



Founded 1950

ENGINEERING AND TEST DIVISION
CHURCH STREET, BOHEMIA, LONG ISLAND, NEW YORK 11716 (631) 589-6300

TEST REPORT NO.: DTB01R01-0548

DAYTON T. BROWN, INC. JOB NO.: 402394-01-000





CUSTOMER: CRESTRON ELECTRONICS, INC.
15 VOLVO DRIVE
ROCKLEIGH, NJ 07647

SUBJECT: FCC CODE OF FEDERAL REGULATIONS, 47 CFR, PART 15,
SUB-PART B AND SUB-PART C TESTING PERFORMED ON
ONE GATEWAY, MODEL NO. STRFGWX, SERIAL NO. C568212;
AND ONE POWER PACK WITH AC ADAPTER, MODEL NO. D7-10-01

PURCHASE ORDER NO.: 42840

ATTENTION: MR. SAM YOGASUNTHARM

THIS REPORT CONTAINS: SIX PAGES AND FIVE ENCLOSURES

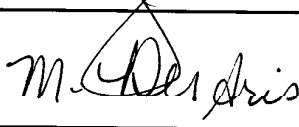TEST ENGINEER	 J. SMRK
DEPARTMENT SUPERVISOR	 T. ZIMOULIS
OPERATIONS MANAGER	 T. ZIMOULIS
QUALITY DEPARTMENT	 M. DESDRIS
DATE	4 SEPTEMBER 2001

THE DATA CONTAINED IN THIS REPORT WAS OBTAINED BY TESTING IN COMPLIANCE WITH THE APPLICABLE TEST SPECIFICATION AS NOTED



TABLE OF CONTENTS

<u>Subject</u>	<u>Paragraph</u>	<u>Page No.</u>
Abstract	1.0	2
References	2.0	3
Administrative Information	3.0	4
Test Program Outline	4.0	5
General Test Information	5.0	6

<u>Enclosures</u>	<u>Number of Pages</u>	<u>Number of Photos</u>
(1) Test Equipment List	2	-
(2) Radiated Emission, Intentional Radiator, 30 MHz to 10 GHz	7	1
(3) Occupied Bandwidth	2	1
(4) Conducted Emission, 450 kHz to 30 MHz	3	1
(5) A2LA Scope of Accreditation	2	-



1.0 ABSTRACT

This report details the results of the FCC Code of Federal Regulations, 47 CFR, Part 15, Sub-Part B and Sub-Part C testing on one Gateway, Model No. STRFGWX, Serial No. C568212, manufactured by Crestron Electronics, Inc. operated with one Power Pack with AC Adapter, Model No. D7-10-01, manufactured by Candor, Inc.

The Gateway and the Power Pack with AC Adapter were found to be in compliance with the radiated portions of the FCC Code of Federal Regulations, 47 CFR, Part 15, Sub-Part B for Class B equipment.

The Gateway and the Power Pack with AC Adapter were found to be in compliance with the radiated portions of the FCC Code of Federal Regulations, 47 CFR, Part 15, Sub-Part C.

The Gateway and the Power Pack with AC Adapter were found to be in compliance with the conducted portions of the FCC Code of Federal Regulations, 47 CFR, Part 15, Sub-Part B, specification limits Class B.

The Gateway and the Power Pack with AC Adapter were found to be in compliance with the conducted portions of the FCC Code of Federal Regulations, 47 CFR, Part 15, Sub-Part C.

Detailed test results can be observed in Enclosures 2, 3, and 4 of this report.

The test results recorded in this report relate only to those items tested.

This report shall not be reproduced, except in full, without the written approval of Dayton T. Brown, Inc.



2.0 REFERENCES

- (a) Customer Purchase Order No.: 42840

- (b) Dayton T. Brown, Inc. Job No.: 402394-01-000

- (c) Test Specifications: Code of Federal Regulations, 47 CFR, Part 15, Sub-Part C
Code of Federal Regulations, 47 CFR, Part 15, Sub-Part B, Class B

- (d) Test Procedure: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz, ANSI C63.4-1992, dated 17 July 1992



3.0 ADMINISTRATIVE INFORMATION

Customer: Crestron Electronics, Inc.
15 Volvo Drive
Rockleigh, NJ 07647

Test Items: Gateway, Model No. STRFGWX, Serial No. C568212, manufactured by Crestron Electronics, Inc. operated with one Power Pack with AC Adapter, Model No. D7-10-01, manufactured by Candor, Inc.

Quantity Received: One of Each

Test Start Date: 16 August 2001

Test Completion Date: 17 August 2001

Disposition of Test Items: The test samples were returned to Crestron Electronics, Inc. on 17 August 2001.



4.0 TEST PROGRAM OUTLINE

Description of Test Method

Results

Radiated Emission, Intentional Radiator,
30 MHz to 10 GHz

Met the specification requirements.

Occupied Bandwidth

Met the specification requirements.

Conducted Emission, 450 kHz to 30 MHz

Met the specification requirements.



5.0 GENERAL TEST INFORMATION

Setup

For the radiated emission test, in the frequency range of 30 to 1000 MHz, the test sample was set up in a climate controlled open field site that measures 44 feet long by 24 feet wide by 24 feet high.

For the radiated emission test, in the frequency range of 1 to 10 GHz, the test sample was set up in an anechoic chamber that measures 20 feet wide by 20 feet long by 12 feet high.

For the conducted emission test, the test sample was set up within a shielded enclosure which is 20 feet wide by 20 feet long by 12 feet high.

All lines carrying power into the shielded enclosure passed through RF suppression filters suitably bonded to the enclosure and capable of 100-dB attenuation over a spectrum of 14 kHz to 10,000 MHz.

Unit Operation:

Operational Mode Tested - Transmit Mode - The Gateway was transmitting at 418.140 MHz.



Enclosure 1
Test Equipment List

Test equipment utilized for the program reported herein was within its assigned interval of calibration.
 Details are on file at Dayton T. Brown, Inc. and will be made available upon request.



01-0548 Enc 1 Pg 1

<u>TEST</u>	<u>ITEM</u>	<u>MANUFACTURER</u>	<u>DTB NO.</u>	<u>EQUIPMENT CHARACTERISTIC</u>	<u>MODEL</u>	<u>SERIAL NO.</u>	<u>CALIBRATION DUE DATE</u>
CE	20-Foot RG-214 BNC Cable	Pasternack	7-9	DC - 1.0 GHz ±1.0 dB	RG214/U	9	7/2/2002
RE	Cable	Dayton T. Brown, Inc.	7-17	DC - 1 GHz ±6 dB	30 Ft	-	1/27/2002
RE	SMA Cable	Insulated Wire, Inc.	7-26	1 - 22 GHz	2505	26	2/24/2002
RE	Cable	Insulated Wire, Inc.	7-30	900 MHz - 6.5 GHz	-	30	3/3/2002
RE	BiLog Antenna	Chase-York	27-1	30 - 2000 MHz	CBL 6112	2055	2/10/2002
RE/OCB	Double Ridge Waveguide Antenna	Electro-Mechanics Co.	27-41	200 - 2000 MHz	3106	2036	2/24/2002
RE	Double Ridge Waveguide Antenna	Electro-Mechanics Co.	27-55	1.0 - 18 GHz	3115	2072	12/8/2002
RE	Interference Analyzer	Electro-Metrics	65-203	9 kHz - 1.0 GHz	EMC-30 Mk IV	44137	11/25/2001
CE	Interference Analyzer	Electro-Metrics	65-206	9 kHz - 1.0 GHz	EMC-30 Mk IV	44162	10/7/2001
RE	Preamplifier	Hewlett-Packard	71-11	1 - 26.5 GHz 30 dB Gain	8449B	3008A-00284	9/29/2002
CE	Line Impedance Stabilization Network	Solar Electronics	73-92	10 kHz - 30 MHz 50 µh, 24 Amps Dual LISN	9252-50-R-24-BNC	951302	10/14/2001
CE	Screen Room	Ace Engineering and Machine Company	-	20 ft x 20 ft 10 ft High	-	Screen Room 1	-

Test equipment utilized for the program reported herein was within its assigned interval of calibration.
 Details are on file at Dayton T. Brown, Inc. and will be made available upon request.



<u>TEST</u>	<u>ITEM</u>	<u>MANUFACTURER</u>	<u>DTB NO.</u>	<u>EQUIPMENT CHARACTERISTIC</u>	<u>MODEL</u>	<u>SERIAL NO.</u>	<u>CALIBRATION DUE DATE</u>
RE	Anechoic Facility	Rayproof	-	20 ft x 20 ft 12 ft High	-	Solid Room 1	-
RE	FCC Facility	Dayton T. Brown, Inc.	-	44 ft x 24 ft 24 ft High	-	FCC Site	-
RE/OCB	Spectrum Analyzer	Hewlett-Packard	376636A	9 kHz - 26.5 GHz	8563E	3635A- 05798	1/12/2002



Enclosure 2

Radiated Emission,
Intentional Radiator, 30 MHz to 10 GHz



RADIATED EMISSION,
INTENTIONAL RADIATOR, 30 MHz to 10 GHz

Test Procedure

A radiated emission test, in the frequency range of 30 to 1000 MHz, was performed with the test item while it was mounted on a wooden table that was standing on a conductive turntable.

For the frequency range of 30 to 1000 MHz, measurements were made utilizing a manually tuned interference measurement receiver which was located in the instrumentation room below the ground plane.

The receiver was connected to the measurement antenna which was located 3 meters from the turntable for the frequency range of 30 to 1000 MHz.

A linear polarized antenna was utilized for the measurements. The antenna height was varied between 1 and 4 meters, and the test sample was rotated 360° to ensure maximum pickup from the test sample.

A radiated emission test, in the frequency range of 1 to 10 GHz, was performed on the test item while it was mounted on a wooden table in an anechoic chamber.

For the frequency range of 1 to 10 GHz, measurements were made utilizing a spectrum analyzer.

The receiver was connected to the measurement antenna, which was located 1 meter from the table for the frequency range of 1 to 10 GHz, with a length of 50Ω coaxial cable.

The test item utilizes pulse modulation with a 50 percent duty cycle.

Measurements were made utilizing the following bandwidth and detector function:

Frequency Range	CISPR Bandwidth	Detector Function
30 to 1000 MHz	120 kHz	Quasi-Peak
1 to 10 GHz	100 kHz	Peak

The antenna per meter factors of the antenna utilized are depicted in the figure contained in this enclosure.

The test setup employed is depicted in the photograph contained in this enclosure.



RADIATED EMISSION,
INTENTIONAL RADIATOR, 30 MHz to 10 GHz
(Continued)

Test Results

No emission levels above the FCC Code of Federal Regulations, 47 CFR, Part 15, Sub-Part B, specification limits for Class B equipment were observed between 30 and 1000 MHz excluding the transmit frequency of 418 MHz.

No emission levels above the FCC Code of Federal Regulations, 47 CFR, Part 15, Sub-Part C, specification limits for intentional radiating equipment transmitting at 418 MHz were observed. Emission levels at 418 MHz were below the maximum specification limit of 80.2 dBuV/m (10,232 microvolts per meter) and spurious emissions between 30 MHz and 10 GHz were below the maximum limit of 51.5 dBuV/m (375 microvolts per meter).

Detailed test results for the radiated emission test for Intentional Radiators can be observed on pages 3 through 7 of this enclosure .


CORRECTION FACTOR

Factor File Name: 27-55.rea

DTB Number: 27-55

Factor Description: Double Ridged Guide Antenna

Cal Due Date: 12/08/02

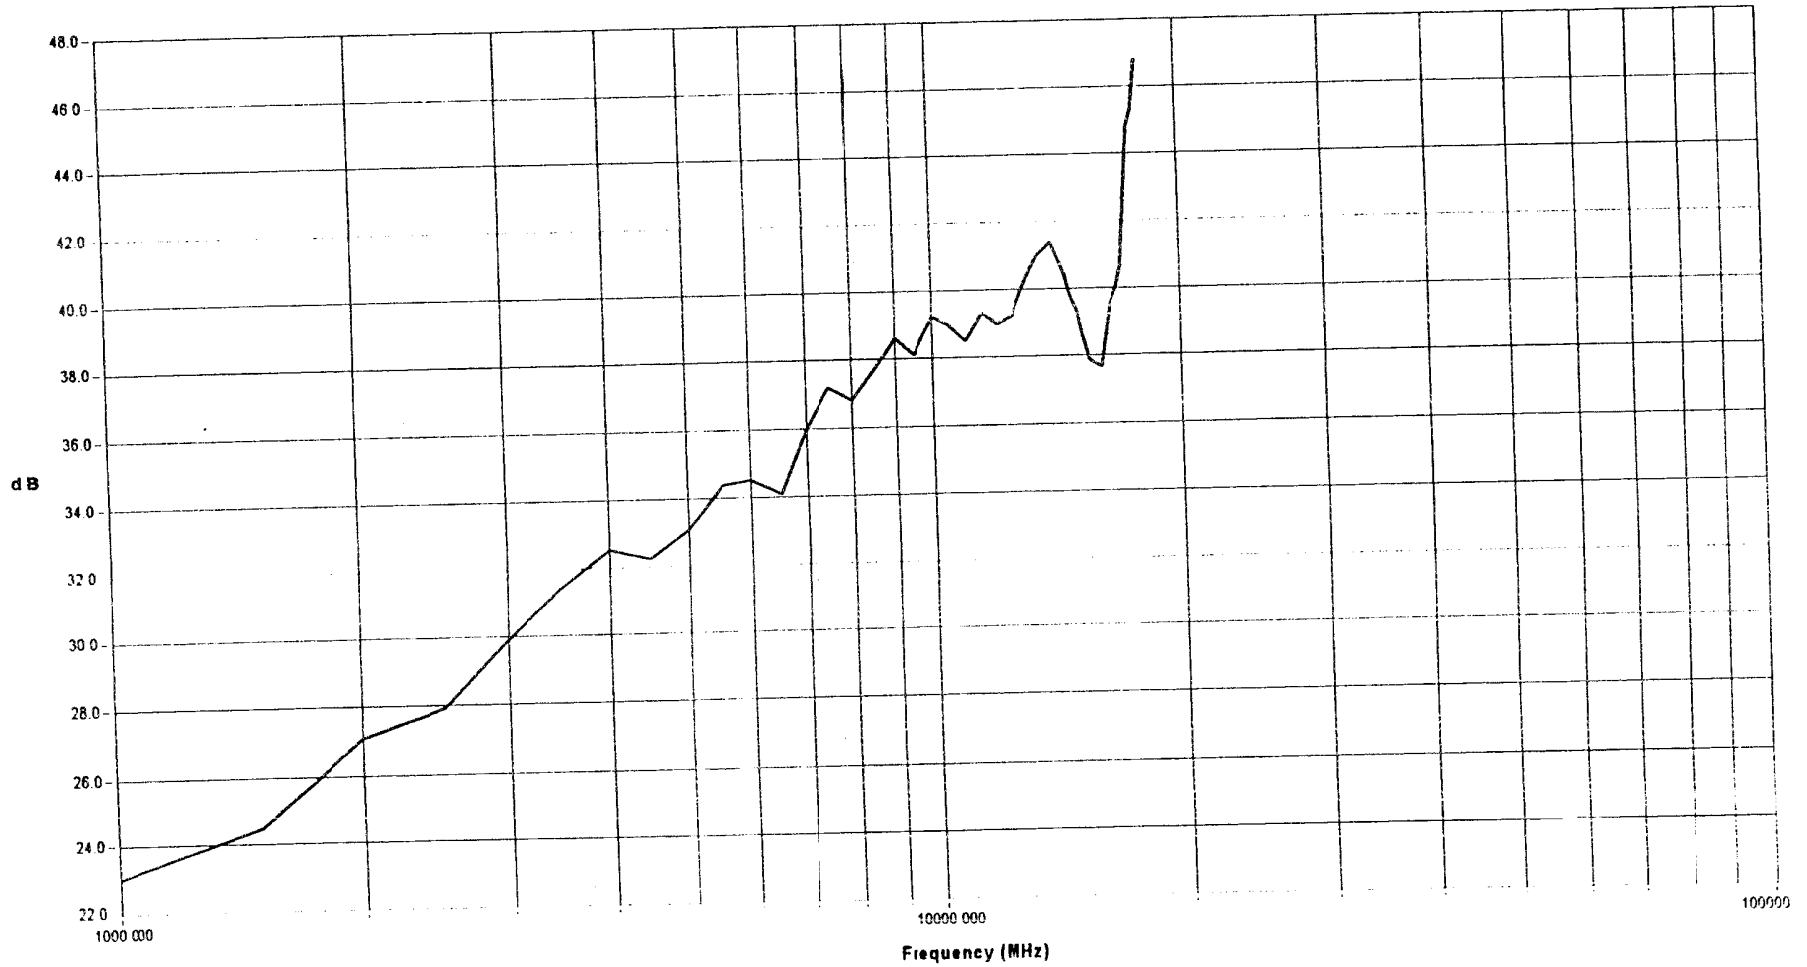

01-0548 Enc 2 Pg 5

Test Title: Radiated Emmissions

Test Procedure: FCC Part 15
Customer: Crestron Electronics, Inc
Test Item: Gateway
Model Num.: STRFGWX
Part Num.: N/A
Serial Num.: C568212
Mode of Op.: Transmitting

Date: 8/16/01
Tested By: S. Retta
Project Eng.: J. Smirk
Job Num.: 402394-01-000
Test Num.: 402394-01-103
Sensor Loc.: 1 Meter from test item
Sensor Pol.: Vertical

Time: 4:44 PM




1. RE Data

Comment: Power pack AC adaptor "Candor" Model No: D7-10-01

File Name: 402394-01-103.red

01-0548 Enc 2 Pg 6

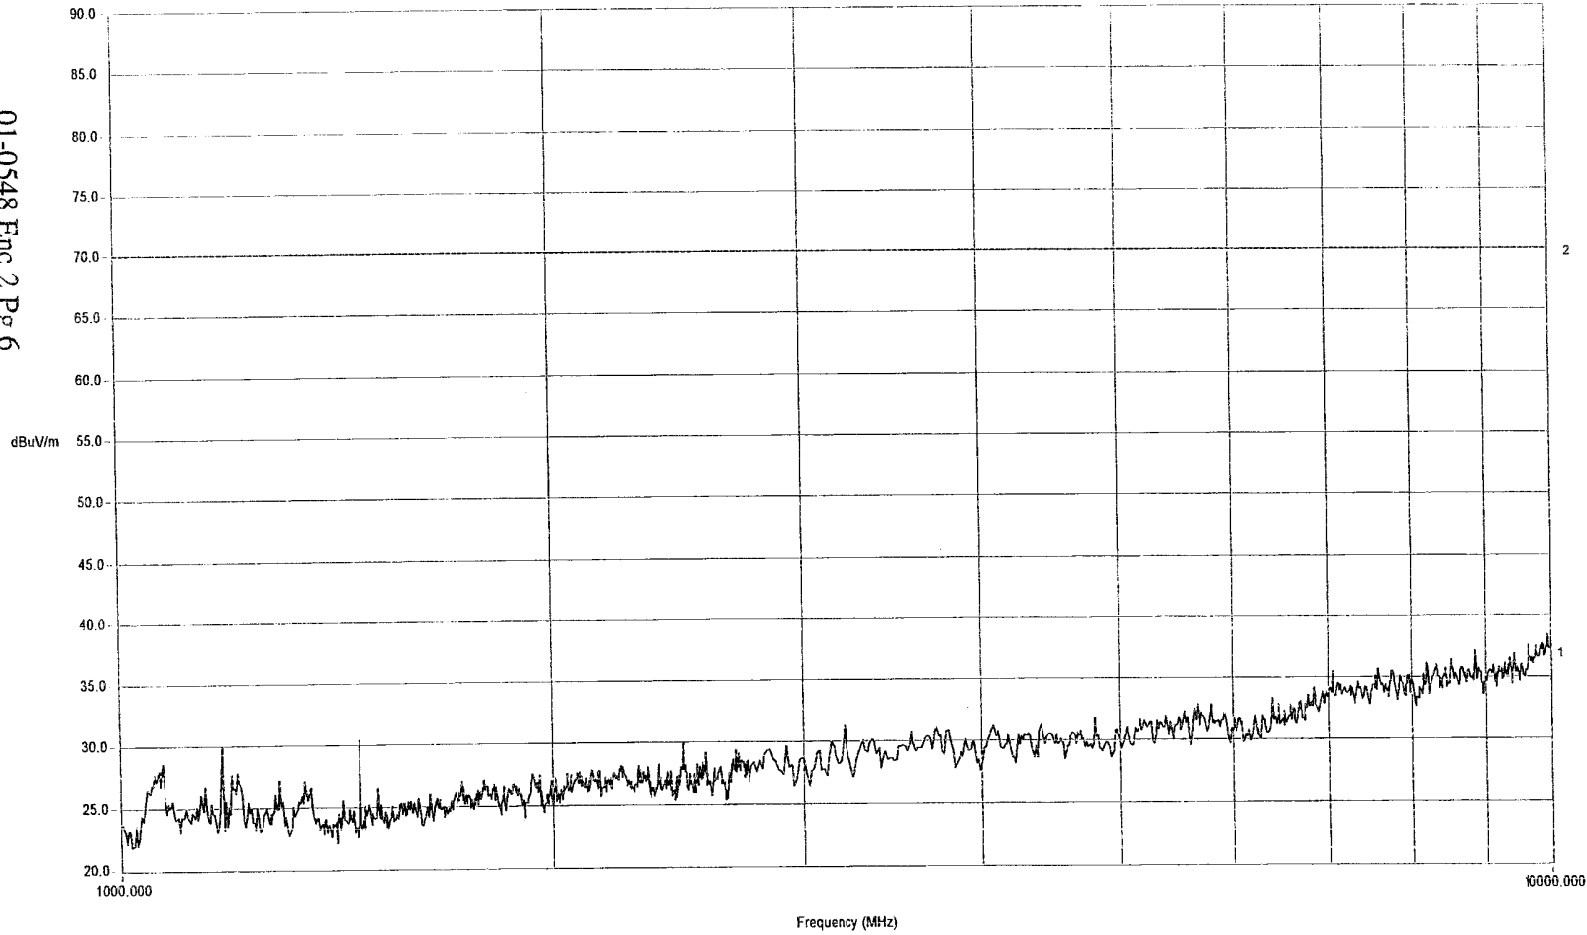

BW Table

Frequency	BW
1000.000 MHz	1.0000E5 Hz
10000.000 MHz	

Factor Files

27-55.rea (1000.00 MHz)

Correction Files

7-26 (1-18,5g).rec (1000.00 MHz)
7-30 (1-26g).rec (1000.00 MHz) (2nd
zero.rec (1000.00 MHz) (3rd cable)
zero.ret (1000.00 MHz) (attenuator)
71-11.rep (1000.00 MHz) (pre-amp)

Engineer:

Technician:

Test Title: Radiated Emmissions

Test Procedure: FCC Part 15

Customer: Crestron Electronics, Inc

Test Item: Gateway

Model Num.: STRFGWX

Part Num.: N/A

Serial Num.: C568212

Mode of Op.: Transmitting

Comment: Power pack AC adaptor " Candor" Model No: D7-10-01

Date: 8/16/01

Tested By: S. Retta

Project Eng.: J. Smirk

Job Num.: 402394-01-000

Test Num.: 402394-01-102

Sensor Loc.: 1 Meter from test item

Sensor Pol.: Horizontal


Time: 4:36 PM



1. RE Data

File Name: 402394-01-02.red

01-0548 Enc 2 Pg 7

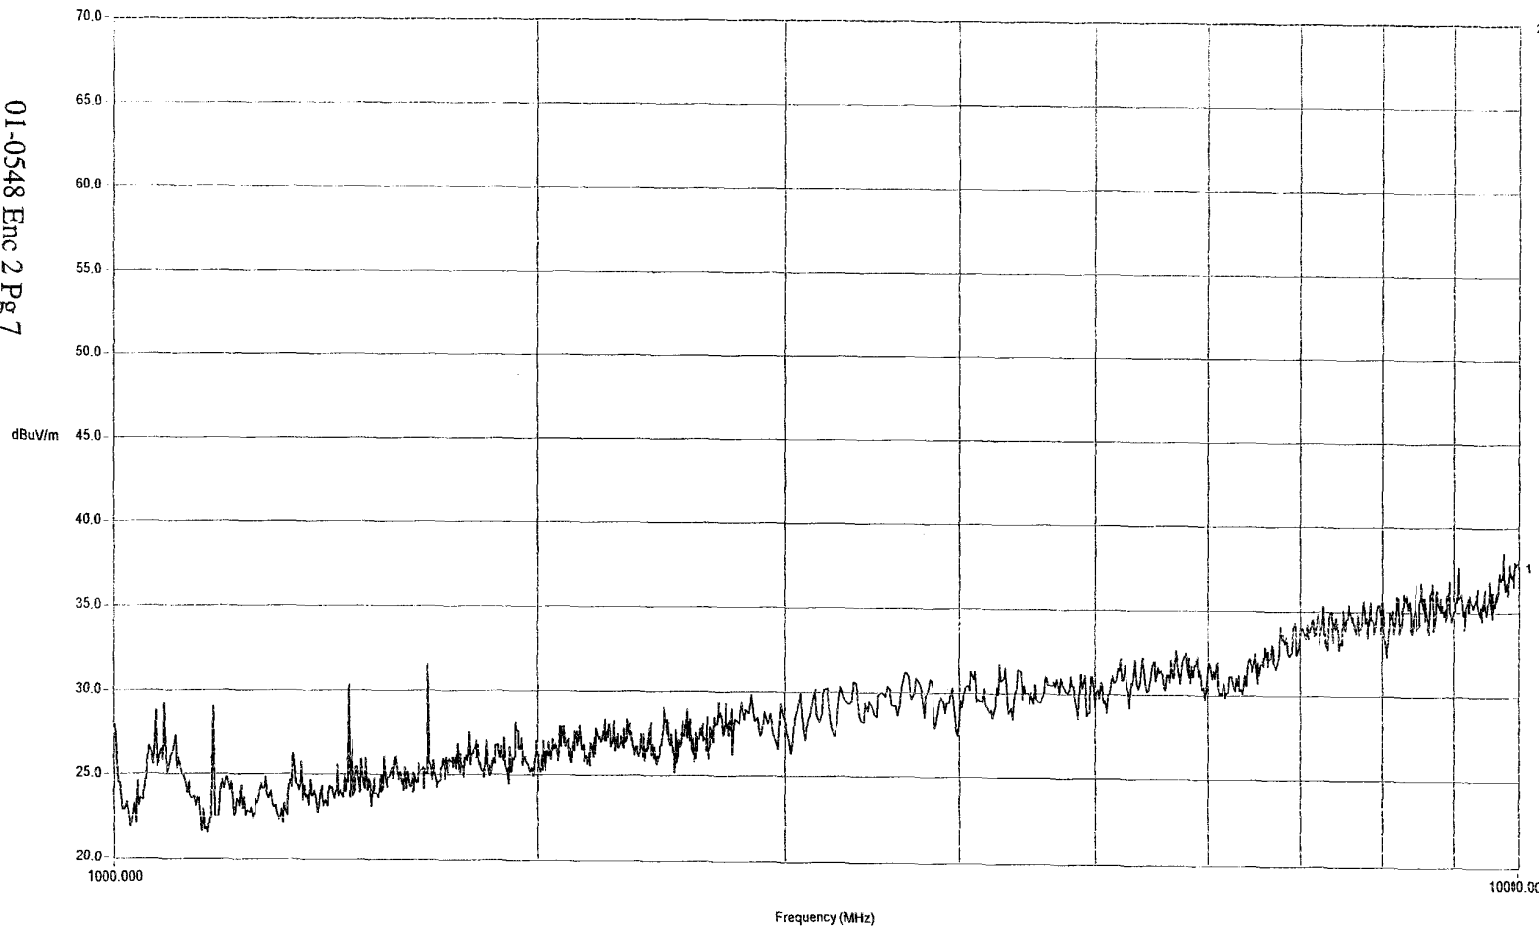

BW Table

Frequency	BW
1000.000 MHz	1.0000E5 Hz
10000.000 MHz	

Fador Files

2f-55.rea (1000.00 MHz)

Corection Files

726 (1-18,5g).rec (1000.00 MHz)
730 (1-26g).rec (1000.00 MHz) (2nd
zero.rec (1000.00MHz) (3rd cable)
zero.ret (1000.00 MHz) (attenuator)
71-11.rep (1000.00 MHz) (pre-amp)

Engineer:

Technician:



01-2903

TESTED FOR CRESTRON ELECTRONICS, INC.
ITEM: GATEWAY

JOB NO. 402394-01-000
DTB01R01-0548

RADIATED EMISSION TEST SETUP
FILE NO. 01-2903
ENCLOSURE 2

M/N STRRGWX
S/N C568212
11 AUGUST 2001
PHOTO 1



Founded 1950



Enclosure 3
Occupied Bandwidth



OCCUPIED BANDWIDTH

Test Procedure

The occupied bandwidth of the test item was measured using a spectrum analyzer with a bandwidth setting of 100 kHz. The spectrum analyzer was operated in the “Max Hold” mode.

The test item has an operating frequency of 418.140 MHz. The maximum allowed bandwidth for devices operating above 70 MHz and below 900 MHz is 0.25 percent of the center frequency.

The maximum allowed bandwidth is calculated as follows:

$$418.140 \text{ MHz} \times 0.0025 = 1.0453 \text{ MHz}$$

The occupied bandwidth was determined at the points 20 dB down from the carrier.

The test item employed is depicted in the photograph contained in this enclosure.

Test Results

The test item met the occupied bandwidth test. The measured occupied bandwidth from the test item was 473 kHz at the 20-dB down point.

Detailed test results for the occupied bandwidth test can be observed on page 2 of this enclosure.


*ATTEN 0dB

RL 70.0dB μ V

5dB/

MKR 64.00dB μ V

418.140MHz

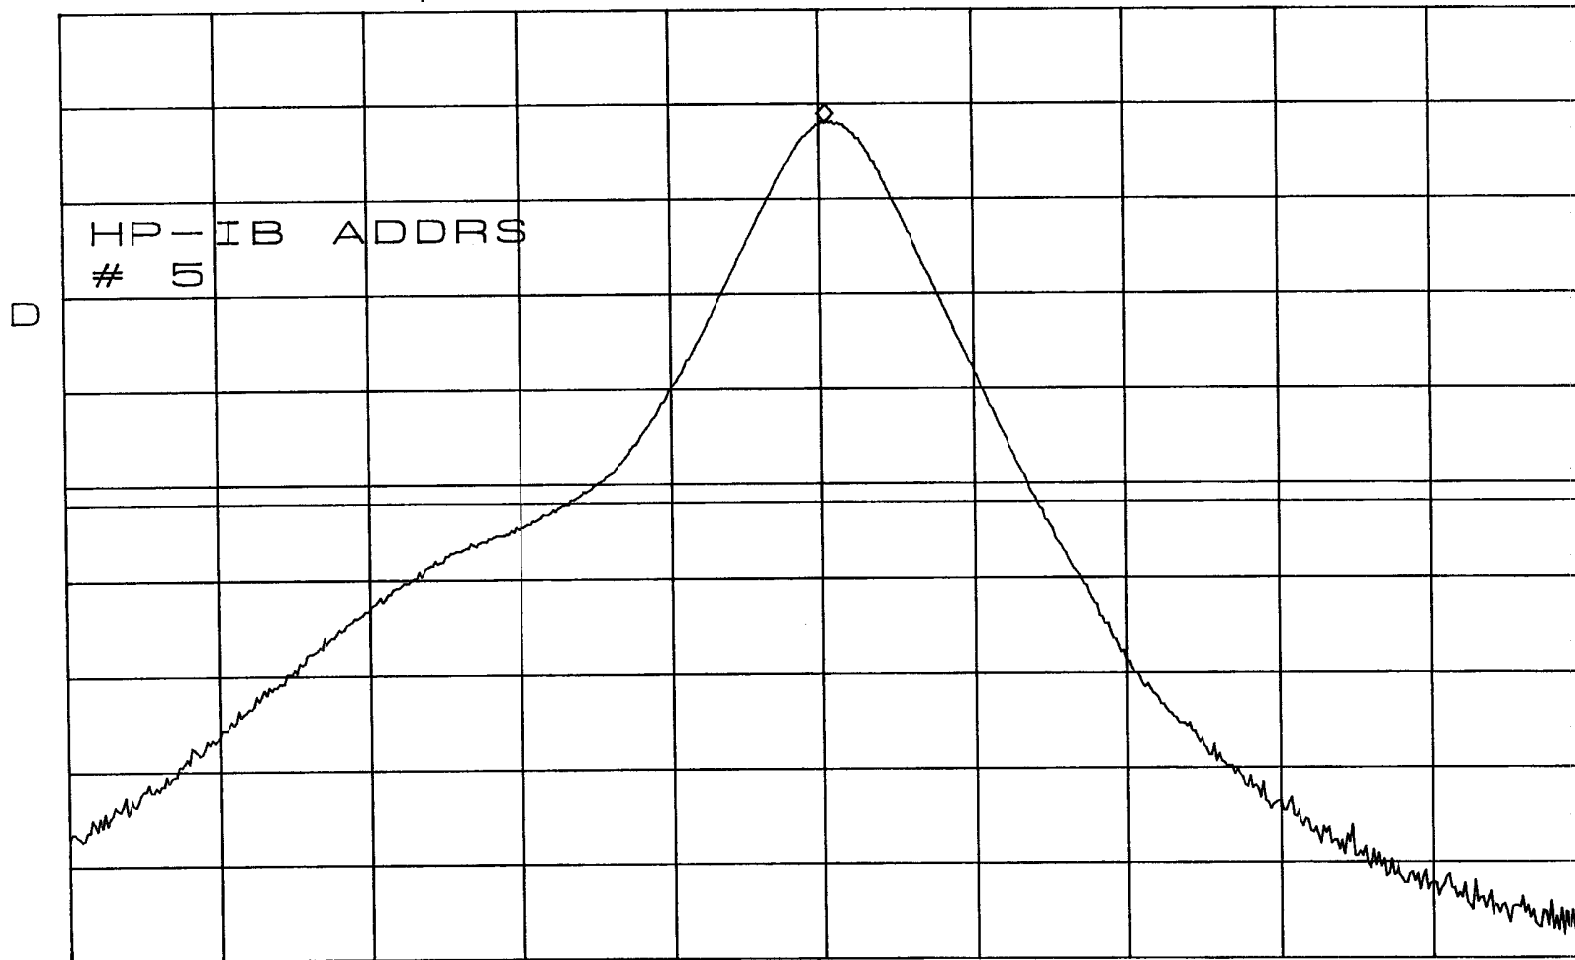


CENTER 418.135MHz

SPAN 1.500MHz

*RBW 100kHz

*VBW 100kHz


*SWP 50.0ms

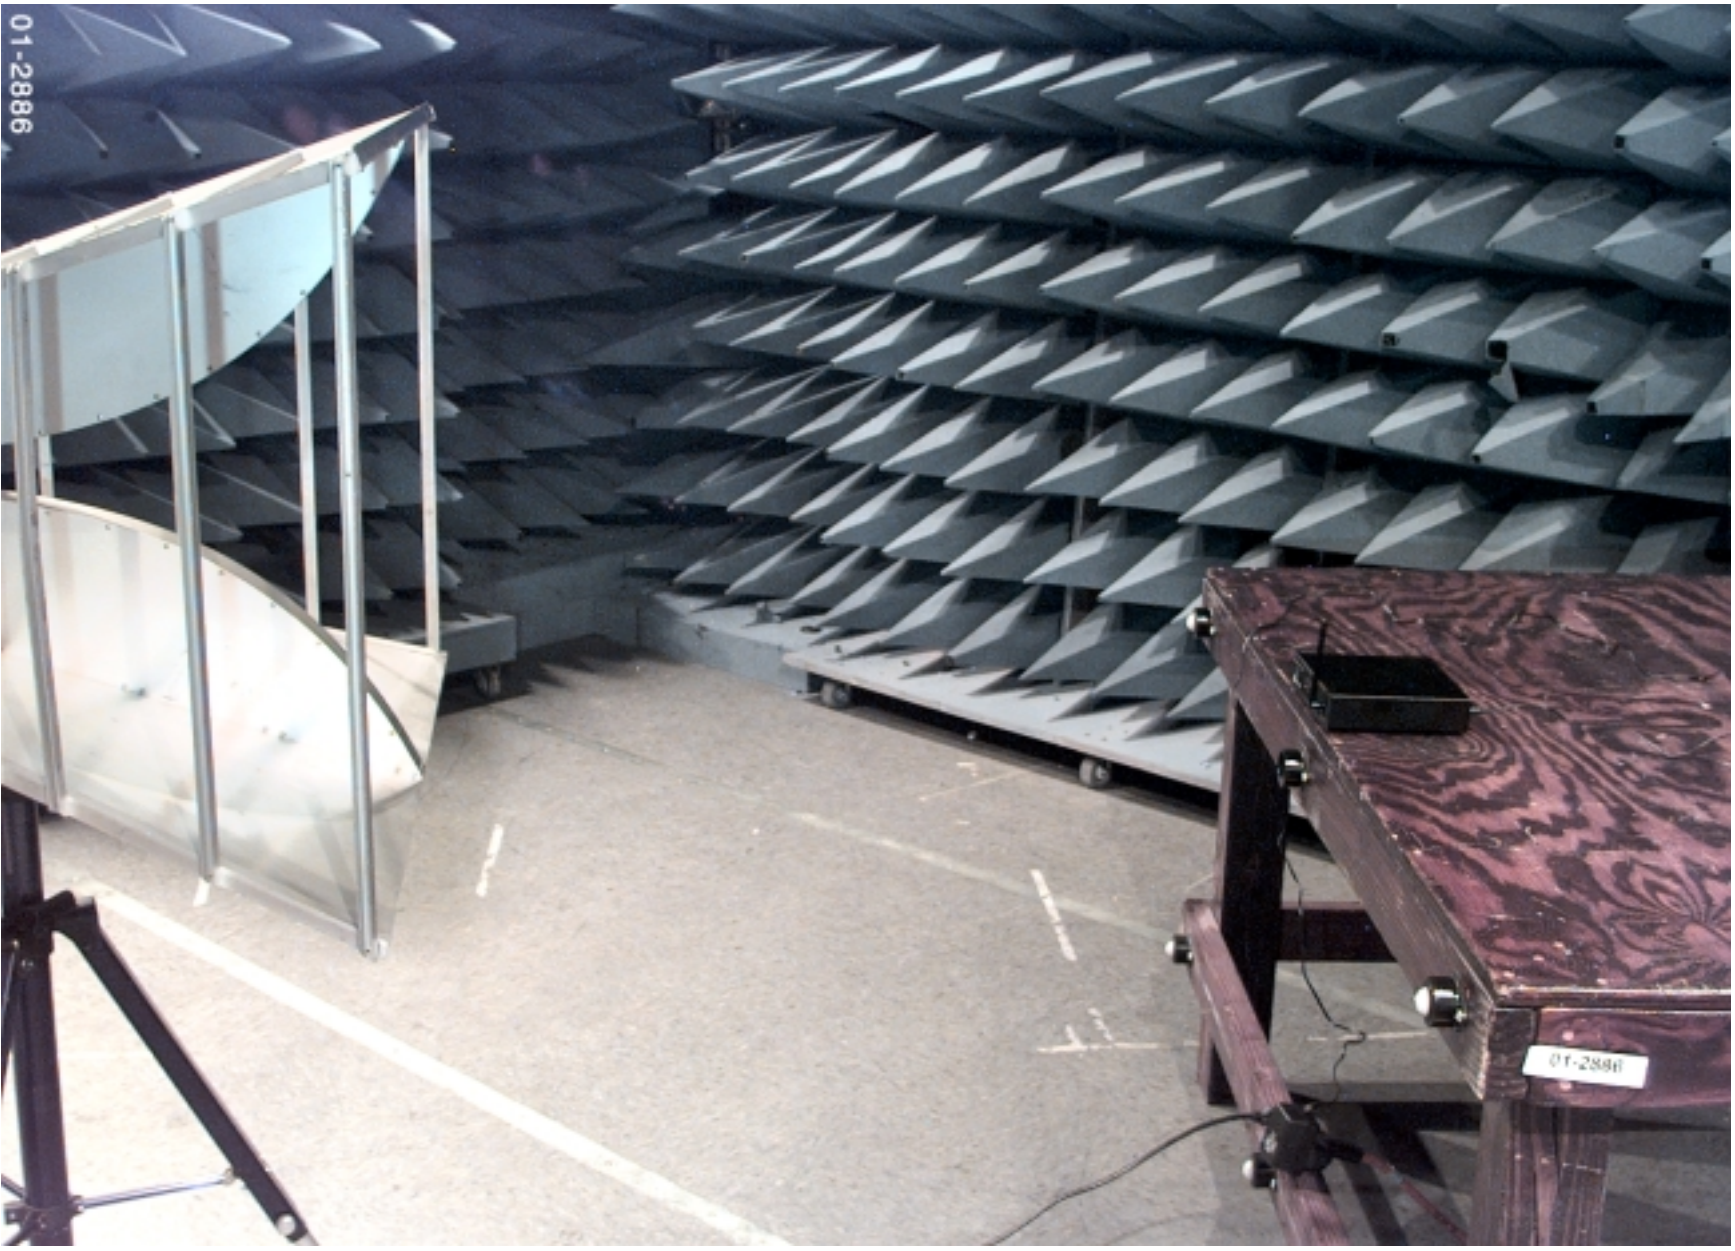

TESTED FOR CRESTRON ELECTRONICS, INC.
ITEM: GATEWAY
JOB NO. 402394-01-000
DTB01R01-0548

OCCUPIED BANDWIDTH TEST SETUP
FILE NO. 01-2886
ENCLOSURE 3

M/N STRRGWX
S/N C568212
11 AUGUST 2001
PHOTO 1





Enclosure 4

Conducted Emission, 450 kHz to 30 MHz



CONDUCTED EMISSION,
450 kHz to 30 MHz

Test Procedure

A conducted emission test, in the frequency range of 450 kHz to 30 MHz, was performed on the test sample while mounted on a nonconductive table. The table measured 1 meter by 1.5 meters with its top surface 80 cm above the ground plane.

Power was supplied to the test sample via LISNs which were bonded to the ground plane below and to the side of the nonconductive table. The unused 50Ω connector on the LISN was terminated in 50Ω.

Measurements were made utilizing the following bandwidth and detector function:

Frequency Range	CISPR Bandwidth	Detector Function
450 kHz to 30 MHz	9 kHz	Quasi-Peak

The test setup employed is depicted in the photograph contained in this enclosure.

Test Results

No emission levels above the FCC Code of Federal Regulations, 47 CFR, Part 15, Sub-Part B, specification limits for Class B equipment were observed between 450 kHz and 30 MHz.

No emission levels above the FCC Code of Federal Regulations, 47 CFR, Part 15, Sub-Part C, specification limits for intentional radiating equipment were observed between 450 kHz and 30 MHz.

Detailed test results for the conducted emission test can be observed on pages 2 and 3 of this enclosure.

Test Title: fcc r & r, part 15, class b

Date: 8/16/01 Time 12:27 PM

Test Procedure: FCC part 15

Customer: Crestron Electronics, Inc.

Test Item: Gateway

Model Num.: STRFGWX

Part Num.: N/A

Serial Num.: C568212

Mode of Op.: Transmitting

Comment: Power pack with AC adaptor "Candor" Model No: D7-10-01

Tested By: S. Retta

Project Eng.: J. Smirk

Job Num: 402394-01-000

Test Num: 402394-01-003

Detector: Quasi-Peak

Dwell: 160 milliseconds

Sensor Loc.: 115 VAC Phase

Sensor Pol: N/A


File Name: 402394-01-003.d30



1. Data

3. fcc r & r, part 15, class b.130 (Spec Limit)

01-0548 Enc 4 Pg 2

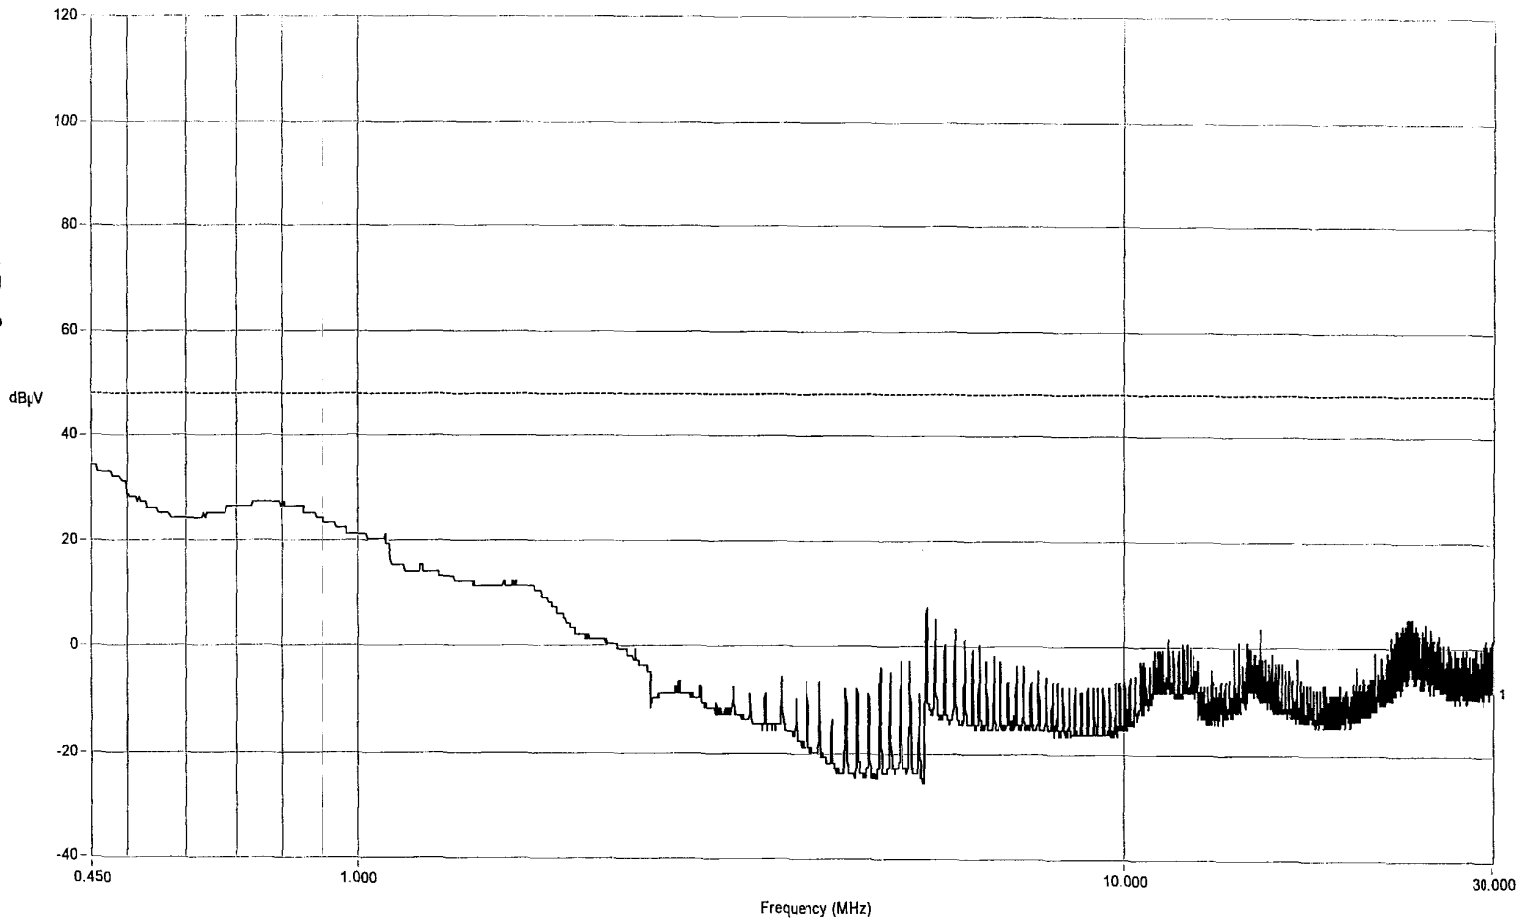

BW Table

Frequency	BW
0.450 MHz	9 KHz
30.000 MHz	

Factor Files

lissn 73-52 max new.r3c

Correction Files

7-09 (10k-1g).c30

Engineer: [Signature]

Technician: [Signature]

Test Title: fcc r & r, part 15, class b

Date: 8/16/01 Time 11:48 AM



Test Procedure: FCC part 15

Customer: Crestron Electronics, Inc.

Test Item: Gateway

Model Num.: STRFGWX

Part Num.: N/A

Serial Num.: C568212

Mode of Op.: Transmitting

Comment: Power pack with AC adaptor "Candor" Model No: D7-10-01

Tested By: S. Retta

Project Eng.: J. Smirk

Job Num: 402394-01-000

Test Num: 402394-01-002

Detector: Quasi-Peak

Dwell: 160 milliseconds

Sensor Loc.: 115 VAC Return


Sensor Pol: N/A

1. Data

3. fcc r & r, part 15, class b.i30 (Spec Limit)

File Name: 402394-01-002.d30

01-0548 Enc 4 Pg 3

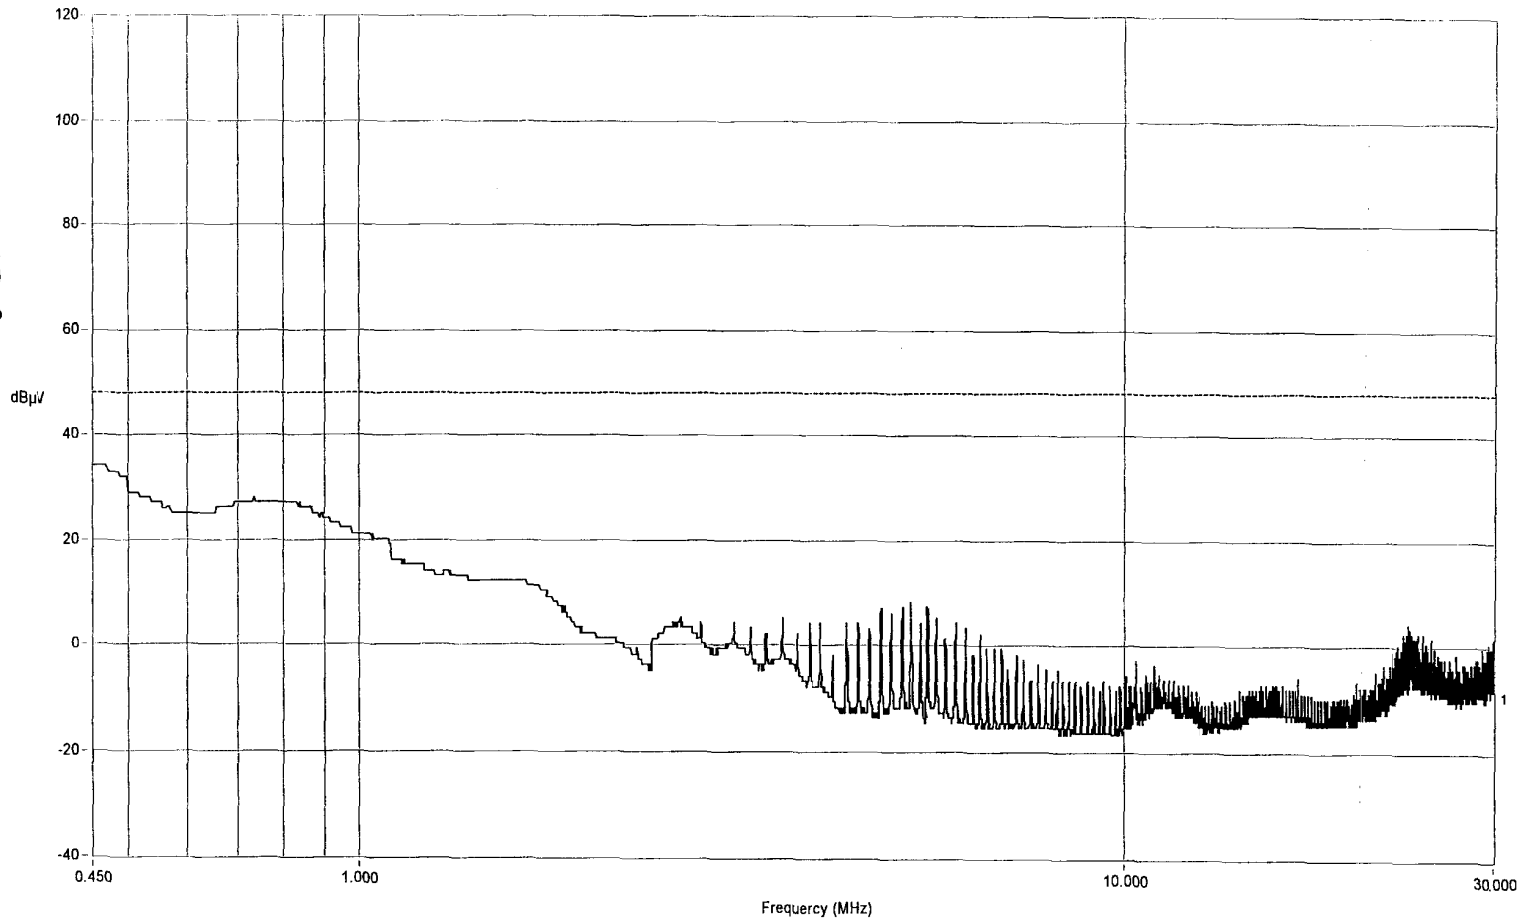

BW Table

Frequency	BW
0.450 MHz	9 KHz
30.000 MHz	

Factor Files


lisn 73-92 max new.r30

Correction Files

7-09 (10k-1g).c30

Engineer: [Signature]

Technician: [Signature]

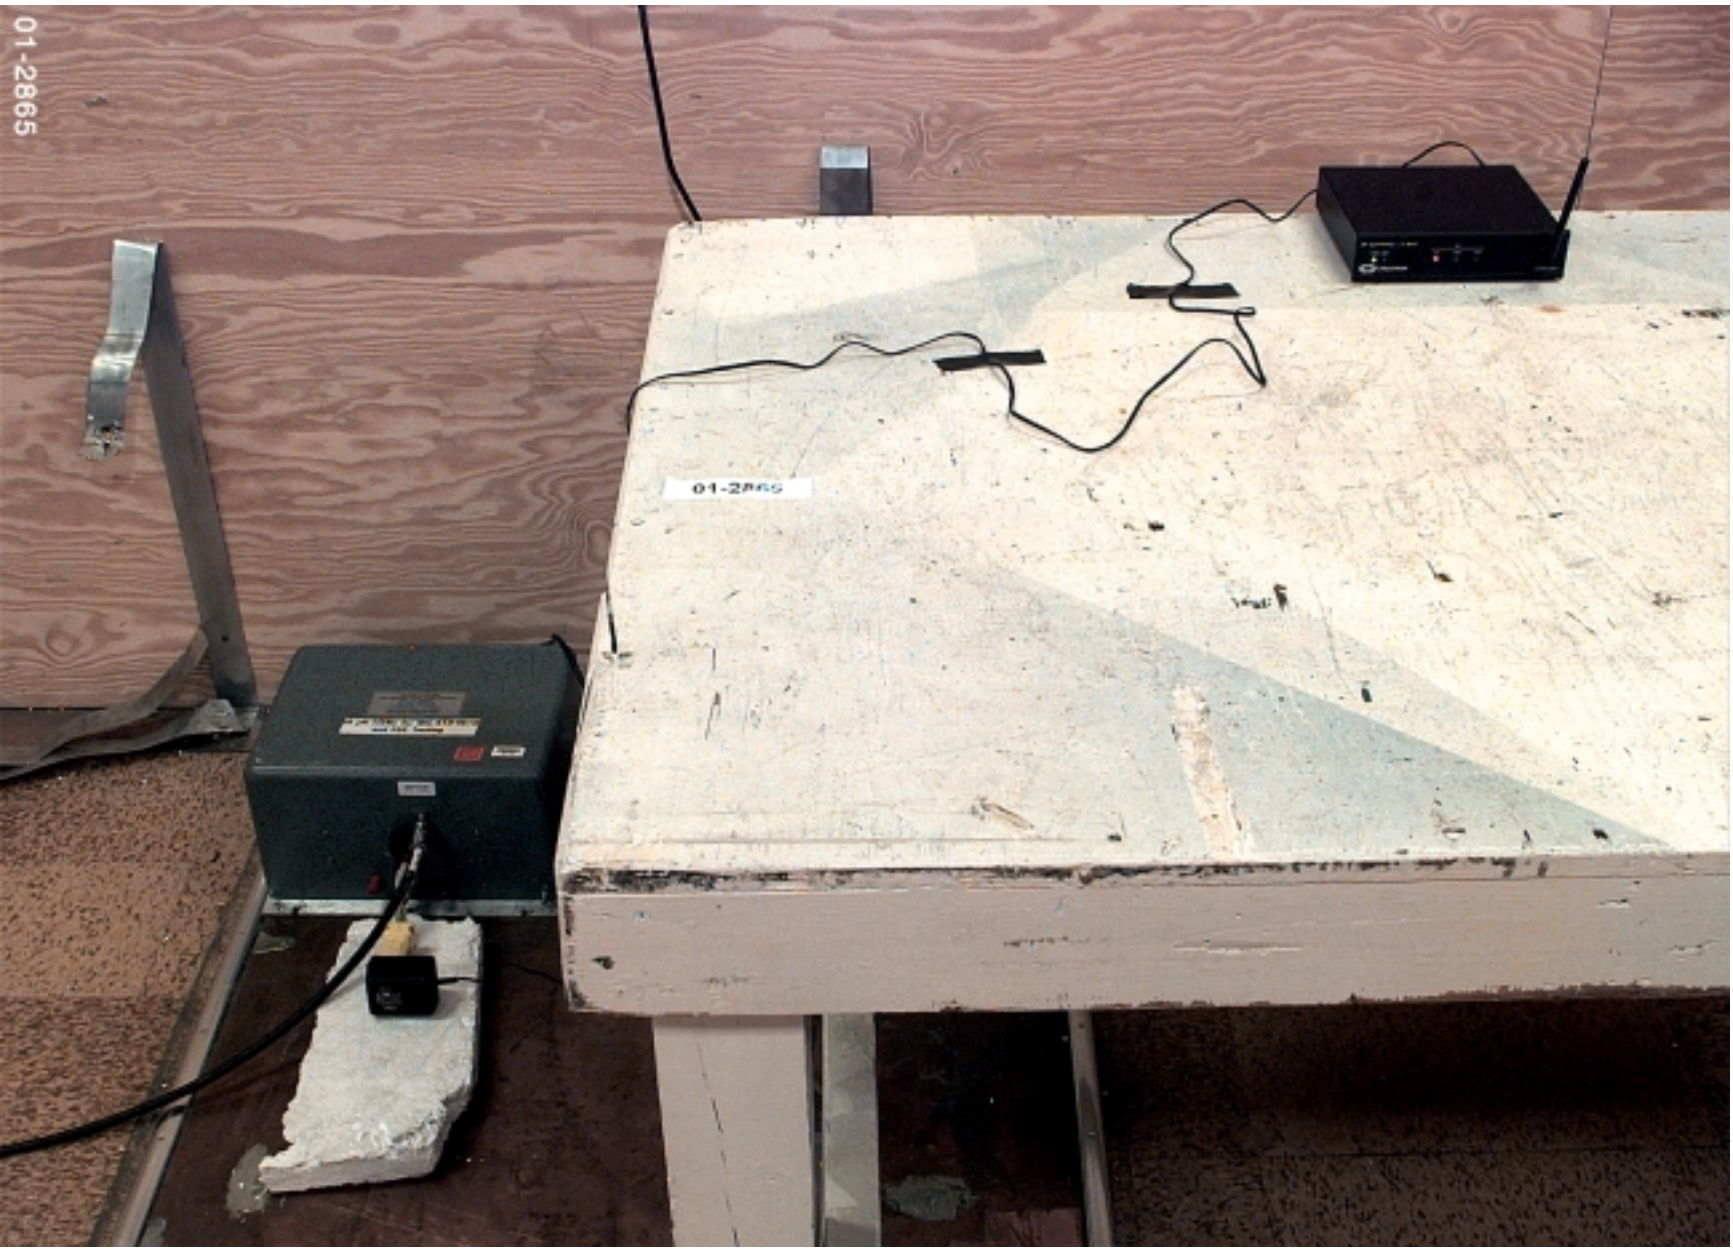


TESTED FOR CRESTRON ELECTRONICS, INC.
ITEM: GATEWAY

JOB NO. 402394-01-000
DTB01R01-0548

CONDUCTED EMISSION TEST SETUP
FILE NO. 01-2865
ENCLOSURE 4

M/N STRFGWX
S/N C568212
16 AUGUST 2001
PHOTO 1





Enclosure 5

A2LA Scope of Accreditation



American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025-1:1999

DAYTON T. BROWN, INC.
Church Street
Bohemia, NY 11716-5031
Charles Gortakowski - Phone: 631 244 6315 / 1 800 TEST456 - Fax: 631 589 4046
Email: test@daytonbrown.com / www.daytonbrown.com

MECHANICAL

Valid To: December 31, 2002 Certificate Number: 0767-03

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following mechanical tests:

- Altitude - 14.1 meters (282 feet to 122,000 meters); 400,000 feet or 1x10E10 TORR
Chamber volumes up to 745 cubic ft
Burst Test - High Pressure Air to 5000psi
Coating/Plating Thickness
Combined Environments - Vibration and Temperature
Dimensional - CMM - X-1200mm (±0.001mm); Y-100mm (±0.001mm); Z-600mm (±0.001mm)
Durability
Durometer Hardness
Dye Penetrant
Explosive Environment - Chamber Volume 75 cubic ft, Altitudes up-to 50,000ft
Fungus Test Area Size 36" x 36"
Hardness
Humidity - Relative humidity range from desert (2%) to a tropical forest (100%),
Chamber volumes up-to 3500 cubic ft
Magnetic Particle Inspection
Material Cleanliness
Metallographic Analysis
Microhardness
Salt Fog/Spray Chamber up-to a Chamber volume of 2500 cubic ft
Sand & Dust Chamber volumes up-to 200 cubic ft, velocities up-to 5700ft/min
Seat Belt Assembly testing
Thermal Shock
Sun/Solar Radiation
Surface Temperature Profilerometer
Temperature - Chambers from 64 cubic ft to 3500 cubic ft; Ambient temperatures from -300°F to -350°F
Tensile Testing
Water Immersion
Wind & Rain

(A2LA Certificate No. 767.03) 01/12/01

Peter Abry Page 1 of 2

5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8373 • Phone: 301-644 3248 • Fax: 301-662 2974

Using the following specifications directly related to the above listed testing technologies:

Table with 2 columns: Test Technology and Test Method(s). Lists various testing methods like MIL-STD-810, GR-63-CORE, etc.

(A2LA Certificate No. 767.03) 01/12/01

Peter Abry Page 2 of 2



American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025-1:1999

DAYTON T. BROWN, INC.
Church Street
Bohemia, NY 11716-5031
Charles Gortakowski - Phone: 631 244 6315 / 1 800 TEST456 - Fax: 631 589 4046
Email: test@daytonbrown.com / www.daytonbrown.com

ACOUSTICS & VIBRATION

Valid To: December 31, 2002 Certificate Number: 0767-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following acoustics & vibration tests:

Vibration (Sine, Random, Sine on Random, Gunfire, Shipboard), Buzz, Squeak and Rattle, Combined Environments and Reliability (Temperature, Humidity and Vibration), Classical Shock (Half Sine, Sawtooth, Square Wave), Pyroshock, Airborne and Structureborne Noise Measurements.

VIBRATION/SHOCK CAPABILITIES UP TO THE FOLLOWING:

- Random
Force Rating 40,000 lb
Frequency Range 4 to 3000 Hertz
Maximum Level 200 grms
Displacement 2 inches Peak-to-Peak
Sinusoidal
Force Rating 40,000 lb
Frequency Range 4 to 3000 Hertz
Sine Velocity Continuous Duty 125 in/sec
Sine Velocity Intermitent Duty 135 in/sec
Maximum Level 200 g's
Displacement 2 inches Peak-to-Peak
Classical Shock
Force 80,000 lb
Waveforms Sine, Sawtooth, Trapezoid
Maximum Level 600 to 3000 g's
Pyroshock
Level 5000 to 32,00 g's
Frequency Range 100 to 10,000 Hertz
Displacement 2 inches Peak-to-Peak

Airborne and Structureborne Noise Measurements

(A2LA Certificate No. 767.01) 01/12/01

Peter Abry Page 1 of 2

5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8373 • Phone: 301-644 3248 • Fax: 301-662 2974

Table with 2 columns: Testing Criteria and Specification(s). Lists criteria like Airborne and Structure Borne Noise Measurement, Acceleration (Centrifuge), etc.

ANSI S12.35 - Precision Methods for the Determination of Sound Power Levels of Noise Sources in Anechoic and Semi-Anechoic Rooms
ANSI S1.2 - Method for the Physical Measurement of Sound
ANSI S1.35 - Sound Power Levels of Noise Sources in Anechoic and Semi-Anechoic Rooms
MIL-STD-810 (Vibration: 810C 514.2, 810D 514.3, 810E 513.4, 810F 514.5; Acoustical Noise: 810C 515.2, 810D 515.3, 810E 515.4, 810F 515.5; Gunfire Vibration, Aircraft: 810C 519.2, 810D 519.3, 810E 519.4, 810F 519.5)
Bellcore GR-63-Core (Office Vibration 5.4.2; Transportation Vibration 5.4.3)
MIL-STD-202 201A Vibration, 202D, 203B Random Drop, 204D Vibration High frequency, 205E, 207A high impact shock, 212A Acceleration, 213B Shock (specified pulse), 214A Random Vibration
RTCA/DO-160C (Sections 7.0 Operational Shocks and Crash Safety, 8.0 Vibration)
MIL-STD-167-1 Shipboard vibration
NAVMAT P-9492 Environmental Stress Screening for Navy Components

(A2LA Certificate No. 767.01) 01/12/01

Peter Abry Page 2 of 2



American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:1999

DAYTON T. BROWN, INC.
Church Street
Bohemia, NY 11716-5031
Charles Gortakowski - Phone: 631 244 6315 / 1 800 TEST456 - Fax: 631 589 4046
Email: test@daytontbrown.com / www.daytontbrown.com

ELECTRICAL (AEMCLAP/EMC)

Valid To: December 31, 2002 Certificate Number: 0767-02

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following electrical, electromagnetic compatibility (EMC), and telecommunications tests:

Table with 2 columns: Test Technology and Test Method(s). Includes Capacitance, AC Loss Characteristics, Conductivity, Current (AC/DC), Impedance, Inductance, Power Factor, Resistance (Dielectric Constant, Insulation Resistance), Voltage (AC/DC).

EMUREI

Table with 2 columns: Test Technology and Test Method(s). Includes Conducted Emissions, Conducted Transient Susceptibility, Conducted Immunity, Radiated Emissions (3m & 10m Sites), Radiated Emissions (Shielded Room, Mode Stirring), Radiated Susceptibility (Immunity), Radiated Transient Susceptibility, Electrostatic Discharge (ESD), Electromagnetic Pulse (EMP), Surge Immunity, Input Power Variations, Magnetic Field Emission, Magnetic Field Susceptibility, Harmonics - Powerline & RF, RF Power Handling, Shielding Effectiveness, Electrical Fast Transient (EFT), Transmissibility, Electromagnetic Site Survey.

Automotive EMC (AEMCLAP)

Table with 2 columns: Test Technology and Test Method(s). Includes Electrostatic Discharge (ESD), Transverse Electromagnetic (TEM) Cell, Audio Frequency Conducted Immunity, Absorption Chamber, Conducted Emissions.

On the following types of materials and products:

Aerospace Components & Systems; Automotive Components & Systems; Shipboard Components & Systems; Railroad & Industrial Vehicle Components & Systems; Information Technology & Telecommunication Equipment & Systems; Electrical & Electronic Components & Systems; Medical Electronic Equipment; Military Equipment & Hardware.

(A2LA Cert. No. 0767.02) 07/17/01

Peter M... Page 1 of 3

5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8373 • Phone: 301-644 3248 • Fax: 301-662 2974

Using the following sources of standards:

Table with 2 columns: Test Technology and Test Method(s). Includes EMC Emissions and Immunity, Harmonic Current Emissions, Voltage Fluctuation and Flicker, EMC Immunity, Electrostatic Discharge, Radiated Field Immunity, Electrical Fast Transient, Surge Immunity, Conducted Immunity, Harmonic Immunity, Magnetic Field Immunity, VoltageDips, Interruptions and Variations, Telecom, Commercial Aviation, Military, Automotive, Safety.

(A2LA Cert. No. 0767.02) 07/17/01

Peter M... Page 2 of 3

In recognition of the successful completion of the A2LA and the Automotive EMC Laboratory Accreditation Program (AEMCLAP) evaluation process, accreditation is granted to this laboratory to perform the following automotive electromagnetic compatibility tests:

Table with 2 columns: Test Technology and Test Method(s). Includes Electrostatic Discharge (ESD), Absorption Chamber, Transverse Electromagnetic (TEM) Cell, Conducted Emissions, Audio Frequency Conducted Immunity.

(A2LA Cert. No. 0767.02) 07/17/01

Peter M... Page 3 of 3