



Produkte
Products

Prüfbericht - Nr.: 12606802 005		Seite 1 von 42 Page 1 of 42	
<i>Test Report No.:</i>			
Auftraggeber: <i>Client:</i>	Mitsumi Electric Co Ltd 1601, Sakai, Atsugi-shi. Kanagawa-ken 243, Japan		
Gegenstand der Prüfung: <i>Test item:</i>	Wireless LAN Module		
Bezeichnung: <i>Identification:</i>	DWM-W028	Serien-Nr.: <i>Serial No.:</i>	MAC 78:A2:A0:35:D4:62
Wareneingangs-Nr.: <i>Receipt No.:</i>	PT214002701-1	Eingangsdatum: <i>Date of receipt:</i>	2010-08-04
Prüfört: <i>Testing location:</i>	TÜV Rheinland Japan Ltd. - Global Technology Assessment Center 4-25-2 Kita-Yamata, Tsuzuki-ku, Yokohama 224-0021, Japan		
Prüfgrundlage: <i>Test specification:</i>	47 CFR Part 15.207 and 15.247 (Subpart: C), 2009-10 47 CFR Part 15.107 and 15.109 (Subpart: B), 2009-10 ANSI C63.4-2003 KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR Part 15.247), March 23, 2005 RSS-210 (Issue 7): 2007 RSS-Gen (Issue 2): 2007		
Prüfergebnis: <i>Test Result:</i>	Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n). The test item passed the test specification(s).		
Prüflaboratorium: <i>Testing Laboratory:</i>	TÜV Rheinland Japan Ltd. - Global Technology Assessment Center 4-25-2 Kita-Yamata, Tsuzuki-ku, Yokohama 224-0021, Japan		
geprüft/ tested by:		kontrolliert/ reviewed by:	
			
2010-08-16	Y. Sasaki / Inspector	2010-08-16	T. Cheung / Reviewer
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>
			Name/Stellung <i>Name/Position</i>
			Unterschrift <i>Signature</i>
Sonstiges / Other Aspects:			
This test report deals with the Permissive Change II on the existing Limited Single Module of Intentional radiator 802.11b and 802.11g of the grant, details refer to Section 1: General remarks			
Abkürzungen:	P(ass) = entspricht Prüfgrundlage F(all) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet	Abbreviations:	P(ass) = passed F(all) = failed N/A = not applicable N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>			

TEST SUMMARY

3.2.1 VOLTAGE REQUIREMENTS, FCC 15.31(E)

RESULT: PASS

3.2.2 ANTENNA REQUIREMENTS, FCC 15.203, FCC 15.204 AND RSS-GEN 7.1.4

RESULT: PASS

5.1.1 MAINS TERMINAL CONTINUOUS DISTURBANCE VOLTAGE OF TRANSMITTER, FCC 15.207 AND RSS-GEN 7.2.2

RESULT: PASS

5.2.1 MAINS TERMINAL CONTINUOUS DISTURBANCE VOLTAGE OF RECEIVER, FCC 15.107 AND RSS-GEN 7.2.2

RESULT: PASS

6.1.1 BAND EDGE RADIATED EMISSION, FCC 15.247(D) AND RSS- 210 2.2

RESULT: PASS

6.1.2 RADIATED EMISSION, OUT-OF-BAND AND SPURIOUS EMISSION, FCC 15.247(D), FCC 15.205, FCC 15.209, RSS-210 2.2, RSS-210 A8.5 AND RSS-GEN 7.2.1

RESULT: PASS

6.2.1 RADIATED EMISSION OF RECEIVER, FCC 15.109, RSS-210 2.2, RSS-210 2.6, RSS-210 A8.5, RSS-GEN 7.2.3.2

RESULT: PASS

Produkte
Products

Prüfbericht - Nr.: 12606802 005

Seite 3 von 42

Test Report No.:

Page 3 of 42

Contents

1.	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	6
2.	TEST SITES	7
2.1	TEST FACILITIES	7
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	8
2.3	MEASUREMENT UNCERTAINTY	9
3.	GENERAL PRODUCT INFORMATION	10
3.1	PRODUCT FUNCTION AND INTENDED USE	10
3.2	SYSTEM DETAILS	10
3.2.1	<i>Voltage Requirements, FCC 15.31(e)</i>	<i>11</i>
3.2.2	<i>Antenna Requirements, FCC 15.203, FCC 15.204 and RSS-Gen 7.1.4.....</i>	<i>11</i>
3.3	CLOCK FREQUENCIES	11
3.4	INDEPENDENT OPERATION MODES	12
3.5	NOISE SUPPRESSING PARTS.....	13
4.	TEST SET-UP AND OPERATION MODES	14
4.1	TEST METHODOLOGY	14
4.2	PHYSICAL CONFIGURATION FOR TESTING	15
4.3	TEST OPERATION AND TEST SOFTWARE.....	16
4.4	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	16
4.5	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	16
5.	TEST RESULTS AC MAINS CONDUCTED EMISSION	17
5.1	AC MAINS CONDUCTED EMISSION OF TRANSMITTER	17
5.1.1	<i>Mains Terminal Continuous Disturbance Voltage of Transmitter, FCC 15.207 and RSS-Gen</i>	
5.1.2	<i>17</i>	
5.2	AC MAINS CONDUCTED EMISSION OF RECEIVER.....	20
5.2.1	<i>Mains Terminal Continuous Disturbance Voltage of Receiver, FCC 15.107 and RSS-Gen 7.2.220</i>	
6.	TEST RESULTS RADIATED EMISSION	22
6.1	RADIATED EMISSION OF TRANSMITTER	22
6.1.1	<i>Band Edge Radiated Emission, FCC 15.247(d) and RSS-210 2.2</i>	<i>22</i>
6.1.2	<i>Radiated Emission, Out-of-Band and Spurious Emission, FCC 15.247(d), FCC 15.205, FCC</i>	
	<i>15.209, RSS-210 2.2, RSS-210 A8.5 and RSS-Gen 7.2.1.....</i>	<i>27</i>
6.2	RADIATED EMISSION OF RECEIVER.....	34
6.2.1	<i>Radiated Emission of Receiver, FCC 15.109, RSS-210 2.2, RSS-210 2.6, RSS-210 A8.5,</i>	
	<i>RSS-Gen 7.2.3.2.....</i>	<i>34</i>

Produkte
Products

Prüfbericht - Nr.: 12606802 005

Seite 4 von 42

Test Report No.:

Page 4 of 42

7.	PHOTOGRAPHS OF TEST SETUP	36
8.	LIST OF TABLES.....	41
9.	LIST OF FIGURES	41
10.	LIST OF PHOTOGRAPHS.....	42

1. General Remarks

It is a permissive change project which is classified as **Permissive Change II** for the existing FCC Grant (FCC ID: EW4DWMW028) and as modification for IC certificate (IC: 4250A-DWMW028) by additional antennas 361.00194.005 CS and minor modified host CTR-001(-01) are applied to this Limited Modular Approval.

Conducted Emission and Radiated Emission were conducted with the modified and additional antenna 361.00194.005 CS for the modification. Refer to the exhibits for the technical details of the changes. Previous technical test data of the module refer to the test report of the original application.

Unintentional (receiver only) radiator of the tested product is considered in the test report.

The test is only covered the radio operation mode will be tested under Class B. The other digital interface operation is handled by customer under Class A.

The history of the module is shown as follow:

Test report number	Content
12606802 001	Original Application Host: Nintendo DS CTR Target Board Antenna: DCA-P08
12606802 002	Original Application RF Exposure report
12606802 003	Permissive change II Application Additional host: CTR-001(-01) Additional antenna: DCA-P17 ES3, DCA-P17 ES4 and DCA-P17 CS
12606802 004	Permissive change II Application RF Exposure report
12606802 005	Permissive change II Application Additional antenna: Antenna 361.00194.005 CS for the host CTR-001(-01). Antenna CS (DCA-P17 CS), ES3 (DCA-P17 ES3) and ES4 (DCA-P17 ES4) are still used. Modification of the host CTR-001(-01): In the schematic, minor changes of the capacitor, resistor and diode are made by adding or deleting or changing values. Fundamental circuit does not change. Artwork is changed based on schematic change. The locations of major parts(IC, module, connector, etc) are same. Details refer to the exhibits
12606802 006	Permissive change II Application RF Exposure report

1.1 Complementary Materials

There is no attachment of this test report.

2. Test Sites

2.1 Test Facilities

TÜV Rheinland Japan Ltd. - Global Technology Assessment Center
4-25-2 Kita-Yamata, Tsuzuki-ku, Yokohama 224-0021, Japan

The used test equipment is in accordance with CISPR 16 for measurement of radio interference.

The Federal Communications Commission has reviewed the technical characteristics of the radiated and conducted emission facility, and has found these test facilities to be in compliance with the requirements of section 2.948 of the FCC rules. The description of the test facility is listed under FCC registration number 299054.

The Industry Canada has reviewed the technical characteristics of the radiated and conducted emission facility, and has found these test facilities to be in compliance. The description of the test facility is listed under OATS filing number 3466B.

The test facility is accredited by VLAC (member of ILAC) under number VLAC-017 according to ISO/IEC 17025:2005. TÜV Rheinland Japan Ltd. is accredited by the Federal Communications Commission as a Conformity Assessment Body under Designation Number JP0017 and Test Firm Registration Number 386498.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Model Name	Serial Number	Equipment ID	Calibrated until
For AC Mains Conducted Emission (CE)					
Receiver	Rohde & Schwarz	ESU 40	100029	RF-0021	2010-12
LISN	Rohde & Schwarz	ENV216	100276	RF-0016	2011-06
For Radiated Emission (RE)					
Receiver	Rohde & Schwarz	ESU 8	100025	RF-0020	2011-02
Receiver	Rohde & Schwarz	ESU 40	100029	RF-0021	2010-12
RF Selector (10m)	Toyo Corporation	NS4900	0703-182	RF-0029	2011-05
3dB Attenuator 50Ohm	Tamagawa Electronics Co., Ltd.	CFA-01	-	RF-0265	2011-05
Low Noise Pre-Amplifier	TSJ	MLA-10K01-B01-35	1370750	RF-0253	2010-11
Microwave Pre-Amplifier, 1-8GHz	Toyo Corporation	TPA0108-40	0634	RF-0052	2010-11
Band Reject Filter	Nitsuki	NF-49BT	027	RF-0131	2010-11
Trilog Antenna, 30-1000MHz	Schwarzbeck	VULB9168	0245	RF-0019	2011-05
Horn Antenna, 1-10GHz	Schwarzbeck	BBHA9120B	419	RF-0050	2011-05
Horn Antenna with Pre-Amplifier, 2-18GHz (RX)	Toyo Corporation	HAP06-18W	00000025	RF-0065	2011-05
Horn Antenna with Pre-Amplifier, 18-26.5GHz (RX)	Toyo Corporation	HAP18-26N	00000010	RF-0070	2011-05
Band pass Filter	Micro-Tronics	HPM50107	006	RF-0334	2011-05
Constant Voltage Constant Frequency Stabilizers					
CVCF (Shielded Room)	NF Corporation	ESU2000S	9075612	RF-0210	N/A
CVCF Booster (Shielded Room)	NF Corporation	ESU2000B	9074403	RF-0211	N/A
CVCF (10m chamber)	NF Corporation	ESU2000S	9067307	RF-0212	N/A
CVCF Booster (10m chamber)	NF Corporation	ESU2000B	9074408	RF-0213	N/A

2.3 Measurement Uncertainty

Table 2: Emission Measurement Uncertainty

Measurement Type	Frequency	Uncertainty
AC Power Line Conducted Emission	150kHz - 30MHz	±3.0dB
Radiated Emission	30MHz - 1GHz	±4.7dB
	> 1GHz	±4.5dB

3. General Product Information

3.1 Product Function and Intended Use

The **EUT** (Equipment Under Test) is a Wireless LAN Module certified as Limited Module Approval (FCC ID: EW4DWMW028 and IC: 4250A-DWMW028). The module consists of radios 802.11b/g. 802.11b at 1/2Mbps supports NDS series. 802.11b/g supports Nintendo Wii. The two radios cannot transmit at the same time.

3.2 System Details

Radio standard:	IEEE 802.11b/g
Specified power output:	8.26dBm (Peak), 4.38dBm (Average) for 802.11b 14.82dBm (Peak), 4.71dBm (Average) for 802.11g
Antenna gain:	-1.91dBi (DCA-P08) for Nintendo DS CTR Target Board -6.52dBi (DCA-P17 ES3) for CTR-001(-01) -6.20dBi (DCA-P17 ES4) for CTR-001(-01) -6.35dBi (DCA-P17 CS) for CTR-001(-01) +1.15dBi (361.00194.005 CS) for CTR-001(-01)
Antenna type:	Inverted F antenna (DCA-P08 and DCA-P17 series) Dipole antenna (361.00194.005 CS)
Mounting type:	External, fixed location
Frequency range:	2412 – 2472 MHz
Number of channel:	13
Channel spacing:	5 MHz
Modulation type:	BPSK, QPSK, CCK (802.11b) BPSK, QPSK, 16 QAM, 64 QAM (802.11g)
FCC Classification:	DTS
Emission designator:	G1D
System Input rating:	DC 4.6V or AC 110-240V, 50/60Hz via AC adaptor
Protection Class:	II
Test voltage:	AC 120V
Test frequency:	60Hz

Remark: Different antenna is for different kinds of the certified typical host. Details refer to the section 1.

Table 3: Interfaces present on the EUT

No.	Interface	Cable Length for Testing, Shielding	Interface Classification
1.	AC Mains input <i>[AC Mains -> AC/DC adaptor]</i>	1.5m, un-shielded	AC Power Input Port
2.	DC power input <i>[AC/DC adaptor -> Host]</i>	0.9m, un-shielded	DC Power Input Port

3.2.1 Voltage Requirements, FCC 15.31(e)

RESULT: **PASS**

The EUT has an external voltage regulator to supply the RF circuit in the host. Hence it complies with the power supply requirements.

3.2.2 Antenna Requirements, FCC 15.203, FCC 15.204 and RSS-Gen 7.1.4

RESULT: **PASS**

The EUT has a permanent external antenna, details refer to the exhibits.

3.3 Clock Frequencies

The highest clock frequency generated by the EUT is 40 MHz

3.4 Independent Operation Modes

The EUT was tested with the host. The test system was configured for testing in a typical fashion (as a customer would normally use it).

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.4:2003. Testing was performed at the lowest operating frequency (2412 MHz), the operating frequency in the middle of the specified frequency band (2442 MHz) and the highest operating frequency (2472 MHz).

The basic operation modes are:

802.11b radio

- b1. EUT continuously transmits at lowest Channel (2412 MHz)
- b2. EUT continuously transmits at middle Channel (2442 MHz)
- b3. EUT continuously transmits at highest Channel (2472 MHz)

802.11g radio

- g1. EUT continuously transmits at lowest Channel (2412 MHz)
- g2. EUT continuously transmits at middle Channel (2442 MHz)
- g3. EUT continuously transmits at highest Channel (2472 MHz)

R. EUT receives packets with 802.11b/gradio

All continuous modulated signals are streaming with 100% duty cycle.

The worst-case data rate for each mode is determined as follows, based on preliminary test of above radios.

Table 4: The Data rate corresponds the worst case of each frequency band of different radio

Channel	Modulation/ Data Rate(Mbps)	
	802.11b	802.11g
Lowest: 2412MHz	11	12
Middle: 2442MHz	11	18
Highest: 2472MHz	1	24

The worst-case position was investigated for X, Y, Z orientation and movable antenna with highest emission, the worst-position was Y orientation below 1GHz and X orientation above 1GHz with the movable antenna (nearly right angle) shown in Photograph 4. Therefore, all tests were conducted in X and Y orientation for particular frequency range.

3.5 Noise Suppressing Parts

Refer to the schematic

4. Test Set-up and Operation Modes

4.1 Test Methodology


The test methodology used is based on the requirements of 47 CFR Part 15, sections 15.31, 15.33, 15.35, 15.205, 15.209 and Measurement of Digital Transmission Systems Operating under Section 15.247.

The test methods, which have been used, are based on ANSI C63.4:2003 and RSS-Gen (Issue 2).

For details, see under each test item.

4.2 Physical Configuration for Testing

Figure 1: Test setup

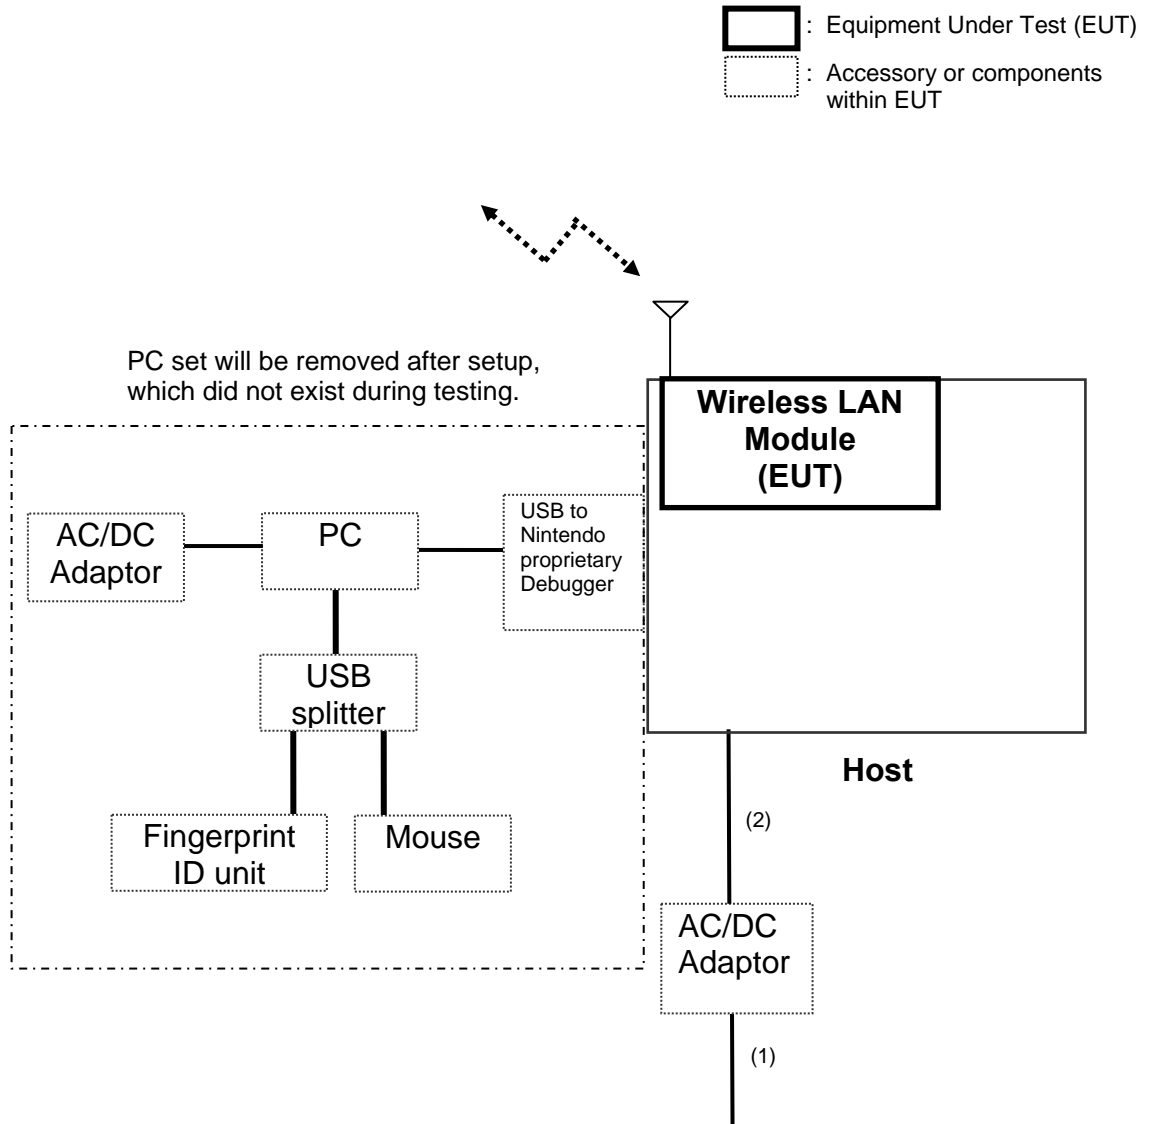

Note: The PC is necessary for operation mode setting. The PC can be disconnected after the setting is successful.

For more details, refer to section: Photographs of the Test Set-Up.

4.3 Test Operation and Test Software

Following software was used for testing provided by Nintendo Co., Ltd.

1. The test program used for 11b/g test is "HOSTIO-ART"..
HOSTIO-ART consists of the software on PC.
The version of "HOSTIO-ART" is 1.8.

The software is used to enable on the EUT the test operation mode specified in section 3.4 as appropriate.

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

1. Product: Host (Portable Game Machine)
Manufacturer: Nintendo Co., Ltd.
Model: CTR-001(-01)
Rated voltage: DC 3.6-3.7V (Battery), DC 4.6V (via Adaptor)
Rated current: 900mA
Protection class: III
Serial number: AAA400014386
2. Product: AC Adapter for the Host
Manufacturer: Nintendo Co., Ltd.
Model: WAP-002(USA)
Rating: AC 120V (input)/ DC 4.6V (output)
Input power: 7W
Frequency: 60Hz
Protection class: II
Serial number: C3FT101

4.5 Countermeasures to achieve EMC Compliance

None

5. Test Results AC Mains Conducted Emission

5.1 AC Mains Conducted Emission of Transmitter

5.1.1 Mains Terminal Continuous Disturbance Voltage of Transmitter, FCC 15.207 and RSS-Gen 7.2.2

RESULT: **PASS**

Date of testing: 2010-08-06

Ambient temperature: 24°C

Relative humidity: 68%

Atmospheric pressure: 1012hPa

Frequency range: 0.15 – 30MHz

Kind of test site: Shielded Room

Requirements:

The AC power line on any frequency within the band 150 kHz to 30MHz shall not exceed the limits specified in FCC 15.207 and RSS-Gen 7.2.2.

Test procedure:

ANSI C63.4-2003

The EUT was placed on a wooden table raised 80cm above the reference ground plane. A vertical conducting plane of the screened room was located 40cm to the rear of the EUT. The AC adapter of the laptop computer was connected to a Line Impedance Stabilization Network (LISN) / Artificial Mains Network (AMN).

The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude and frequency in order to ensure that maximum emission amplitudes were attained.

The measurements were performed with the spectrum analyzer operating in the CISPR quasi-peak and average detection modes. The analyzer's 6 dB bandwidth was set to 9kHz. No video filter less than 10 times the resolution bandwidth was used.

Disturbances other than those mentioned are small or not detectable.

Produkte
 Products

Prüfbericht - Nr.: 12606802 005
 Test Report No.:

Seite 18 von 42
 Page 18 of 42

Table 5: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode b1, 802.11b

Freq. [MHz]	Phase	Reading QP [dB(µV)]	Reading AV [dB(µV)]	Factor [dB]	Level QP [dB(µV)]	Level AV [dB(µV)]	Limit QP [dB(µV)]	Limit AV [dB(µV)]	Margin QP [dB]	Margin AV [dB]
1.2162	N	29.0	15.5	9.7	38.7	25.2	56.0	46.0	17.3	20.8
1.4065	N	31.2	18.8	9.7	40.9	28.5	56.0	46.0	15.1	17.5
1.6044	N	30.2	15.8	9.7	39.9	25.5	56.0	46.0	16.1	20.5
1.7684	N	24.1	7.6	9.7	33.8	17.3	56.0	46.0	22.2	28.7
7.5536	N	19.8	5.4	10.0	29.8	15.4	60.0	50.0	30.2	34.6
0.1997	L1	35.5	27.7	9.7	45.2	37.4	63.6	53.6	18.4	16.2
0.4021	L1	30.7	22.8	9.7	40.4	32.5	57.8	47.8	17.4	15.3
1.4149	L1	33.3	21.0	9.7	43.0	30.7	56.0	46.0	13.0	15.3
1.5688	L1	28.3	9.2	9.7	38.0	18.9	56.0	46.0	18.0	27.1
1.7877	L1	28.7	13.1	9.7	38.4	22.8	56.0	46.0	17.6	23.2
9.6995	L1	25.9	12.1	10.1	36.0	22.2	60.0	50.0	24.0	27.8

Notes: Level QP = Reading QP + Factor
 Level AV = Reading AV + Factor

Table 6: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode b3, 802.11b

Freq. [MHz]	Phase	Reading QP [dB(µV)]	Reading AV [dB(µV)]	Factor [dB]	Level QP [dB(µV)]	Level AV [dB(µV)]	Limit QP [dB(µV)]	Limit AV [dB(µV)]	Margin QP [dB]	Margin AV [dB]
1.2310	N	29.5	15.6	9.7	39.2	25.3	56.0	46.0	16.8	20.7
1.4401	N	31.0	14.9	9.7	40.7	24.6	56.0	46.0	15.3	21.4
1.6220	N	29.7	15.2	9.7	39.4	24.9	56.0	46.0	16.6	21.1
1.8514	N	27.0	10.8	9.7	36.7	20.5	56.0	46.0	19.3	25.5
9.6472	N	20.2	8.7	10.1	30.3	18.8	60.0	50.0	29.7	31.2
0.2003	L1	35.0	26.5	9.7	44.7	36.2	63.6	53.6	18.9	17.4
0.4077	L1	30.7	23.0	9.7	40.4	32.7	57.7	47.7	17.3	15.0
1.4306	L1	33.4	21.3	9.7	43.1	31.0	56.0	46.0	12.9	15.0
1.5694	L1	28.0	6.2	9.7	37.7	15.9	56.0	46.0	18.3	30.1
1.7615	L1	26.7	5.1	9.7	36.4	14.8	56.0	46.0	19.6	31.2
10.6730	L1	26.5	10.9	10.1	36.6	21.0	60.0	50.0	23.4	29.0

Notes: Level QP = Reading QP + Factor
 Level AV = Reading AV + Factor

Produkte
 Products

Prüfbericht - Nr.: 12606802 005

Seite 19 von 42

Test Report No.:

Page 19 of 42

Table 7: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode g1, 802.11g

Freq. [MHz]	Phase	Reading QP [dB(µV)]	Reading AV [dB(µV)]	Factor [dB]	Level QP [dB(µV)]	Level AV [dB(µV)]	Limit QP [dB(µV)]	Limit AV [dB(µV)]	Margin QP [dB]	Margin AV [dB]
1.2045	N	28.7	14.8	9.7	38.4	24.5	56.0	46.0	17.6	21.5
1.4101	N	31.7	15.9	9.7	41.4	25.6	56.0	46.0	14.6	20.4
1.6122	N	30.0	13.1	9.7	39.7	22.8	56.0	46.0	16.3	23.2
1.8110	N	28.5	13.3	9.7	38.2	23.0	56.0	46.0	17.8	23.0
0.1995	L1	35.7	27.8	9.7	45.4	37.5	63.6	53.6	18.2	16.1
0.4002	L1	30.6	22.6	9.7	40.3	32.3	57.8	47.8	17.5	15.5
1.4078	L1	34.0	19.0	9.7	43.7	28.7	56.0	46.0	12.3	17.3
1.5821	L1	29.9	14.7	9.7	39.6	24.4	56.0	46.0	16.4	21.6
1.7466	L1	28.2	9.5	9.7	37.9	19.2	56.0	46.0	18.1	26.8
9.5191	L1	26.2	9.8	10.1	36.3	19.9	60.0	50.0	23.7	30.1

Notes: Level QP = Reading QP + Factor
 Level AV = Reading AV + Factor

Table 8: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode g3, 802.11g

Freq. [MHz]	Phase	Reading QP [dB(µV)]	Reading AV [dB(µV)]	Factor [dB]	Level QP [dB(µV)]	Level AV [dB(µV)]	Limit QP [dB(µV)]	Limit AV [dB(µV)]	Margin QP [dB]	Margin AV [dB]
1.1932	N	28.6	14.6	9.7	38.3	24.3	56.0	46.0	17.7	21.7
1.4141	N	30.3	11.4	9.7	40.0	21.1	56.0	46.0	16.0	24.9
1.5840	N	29.8	14.8	9.7	39.5	24.5	56.0	46.0	16.5	21.5
1.7898	N	27.9	15.6	9.7	37.6	25.3	56.0	46.0	18.4	20.7
10.0607	N	20.7	7.9	10.1	30.8	18.0	60.0	50.0	29.2	32.0
0.1995	L1	35.8	27.8	9.7	45.5	37.5	63.6	53.6	18.1	16.1
0.3936	L1	29.9	20.2	9.7	39.6	29.9	58.0	48.0	18.4	18.1
1.4064	L1	34.0	19.3	9.7	43.7	29.0	56.0	46.0	12.3	17.0
1.6104	L1	32.1	15.3	9.7	41.8	25.0	56.0	46.0	14.2	21.0
1.8077	L1	31.0	16.4	9.7	40.7	26.1	56.0	46.0	15.3	19.9
3.2213	L1	24.2	6.9	9.8	34.0	16.7	56.0	46.0	22.0	29.3
10.0307	L1	26.6	12.5	10.1	36.7	22.6	60.0	50.0	23.3	27.4

Notes: Level QP = Reading QP + Factor
 Level AV = Reading AV + Factor

5.2 AC Mains Conducted Emission of Receiver

5.2.1 Mains Terminal Continuous Disturbance Voltage of Receiver, FCC 15.107 and RSS-Gen 7.2.2

RESULT: **PASS**

Date of testing: 2010-08-06

Ambient temperature: 24°C
Relative humidity: 68%
Atmospheric pressure: 1012hPa

Frequency range: 0.15 – 30MHz
Kind of test site: Shielded Room

Requirements:

The AC power line on any frequency within the band 150 kHz to 30MHz shall not exceed the limits specified in FCC 15.107(a) and RSS-Gen 7.2.2.

Test procedure:
ANSI C63.4-2003

The EUT was placed on a wooden table raised 80cm above the reference ground plane. A vertical conducting plane of the screened room was located 40cm to the rear of the EUT. The AC adapter of the laptop computer was connected to a Line Impedance Stabilization Network (LISN) / Artificial Mains Network (AMN).

The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude and frequency in order to ensure that maximum emission amplitudes were attained.

The measurements were performed with the spectrum analyzer operating in the CISPR quasi-peak and average detection modes. The analyzer's 6 dB bandwidth was set to 9kHz. No video filter less than 10 times the resolution bandwidth was used.

Disturbances other than those mentioned are small or not detectable.

Produkte
 Products

Prüfbericht - Nr.: 12606802 005

Seite 21 von 42

Test Report No.:

Page 21 of 42

Table 9: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode R, 802.11b/g

Freq. [MHz]	Phase	Reading QP [dB(µV)]	Reading AV [dB(µV)]	Factor [dB]	Level QP [dB(µV)]	Level AV [dB(µV)]	Limit QP [dB(µV)]	Limit AV [dB(µV)]	Margin QP [dB]	Margin AV [dB]
1.2436	N	29.8	15.3	9.7	39.5	25.0	56.0	46.0	16.5	21.0
1.4535	N	30.9	15.9	9.7	40.6	25.6	56.0	46.0	15.4	20.4
1.5968	N	25.6	5.4	9.7	35.3	15.1	56.0	46.0	20.7	30.9
7.8726	N	20.9	8.1	10.0	30.9	18.1	60.0	50.0	29.1	31.9
0.2059	L1	35.7	28.1	9.7	45.4	37.8	63.4	53.4	18.0	15.6
1.4520	L1	34.0	17.9	9.7	43.7	27.6	56.0	46.0	12.3	18.4
1.6403	L1	32.3	18.2	9.7	42.0	27.9	56.0	46.0	14.0	18.1
1.8441	L1	30.7	16.5	9.7	40.4	26.2	56.0	46.0	15.6	19.8
9.2659	L1	24.9	10.8	10.1	35.0	20.9	60.0	50.0	25.0	29.1

Notes: Level QP = Reading QP + Factor
 Level AV = Reading AV + Factor

6. Test Results Radiated Emission

6.1 Radiated Emission of Transmitter

6.1.1 Band Edge Radiated Emission, FCC 15.247(d) and RSS- 210 2.2

RESULT: **PASS**

Date of testing:	2010-08-04
Ambient temperature:	22°C
Relative humidity:	78%
Atmospheric pressure:	1009hPa
Measurement distance:	3m
Kind of test site:	Semi Anechoic Chamber

Requirements:

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) and RSS-210 2.7 (Table 1), must comply with the radiated emission limits specified in FCC 15.209(a) and RSS-210 2.7 (Table 2 and 3).

Test procedure:

ANSI C63.4-2003, RSS-Gen 4.9, 4.10 and Measurement of Digital Transmission Systems Operating under Section 15.247

Measurements were made in a Semi Anechoic Chamber at a measurement distance of 3m. The EUT was placed on a nonconductive turntable 0.8m above the ground plane. The EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level.

Pre-check measurements were taken using both horizontal and vertical antenna polarizations for host orientations (X, Y and Z) and movable antenna in order to ensure that maximum emission amplitudes were attained.

Peak (1 MHz RBW/VBW) and average (1 MHz RBW/10 Hz VBW) radiated measurements were taken with a suitable span to encompass the peak of the fundamental.

The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Produkte
 Products

Prüfbericht - Nr.: 12606802 005
 Test Report No.:


Seite 23 von 42
 Page 23 of 42

Table 10: Band Edge Radiated Emission, 802.11b

Operating Frequency [MHz]	EUT / Antenna Orient.	Average Value [dBuV/m]	Peak Value [dBuV/m]	Average Limit [dBuV/m]	Peak Limit [dBuV/m]	Average Margin [dB]	Peak Margin [dB]
2412	X / H	32.77	47.11	54.00	74.00	21.23	26.89
2472	X / H	43.62	51.45	54.00	74.00	10.38	22.55

Notes: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.
 Average limit in dBuV/m is calculated as follows: Average limit = 20 x log(500uV/m).
 Peak limit in dBuV/m is calculated as follows: Peak limit = Average limit + 20dB.

Figure 2: Band Edge Radiated Emission, Mode b1 (2412MHz), Peak and Average

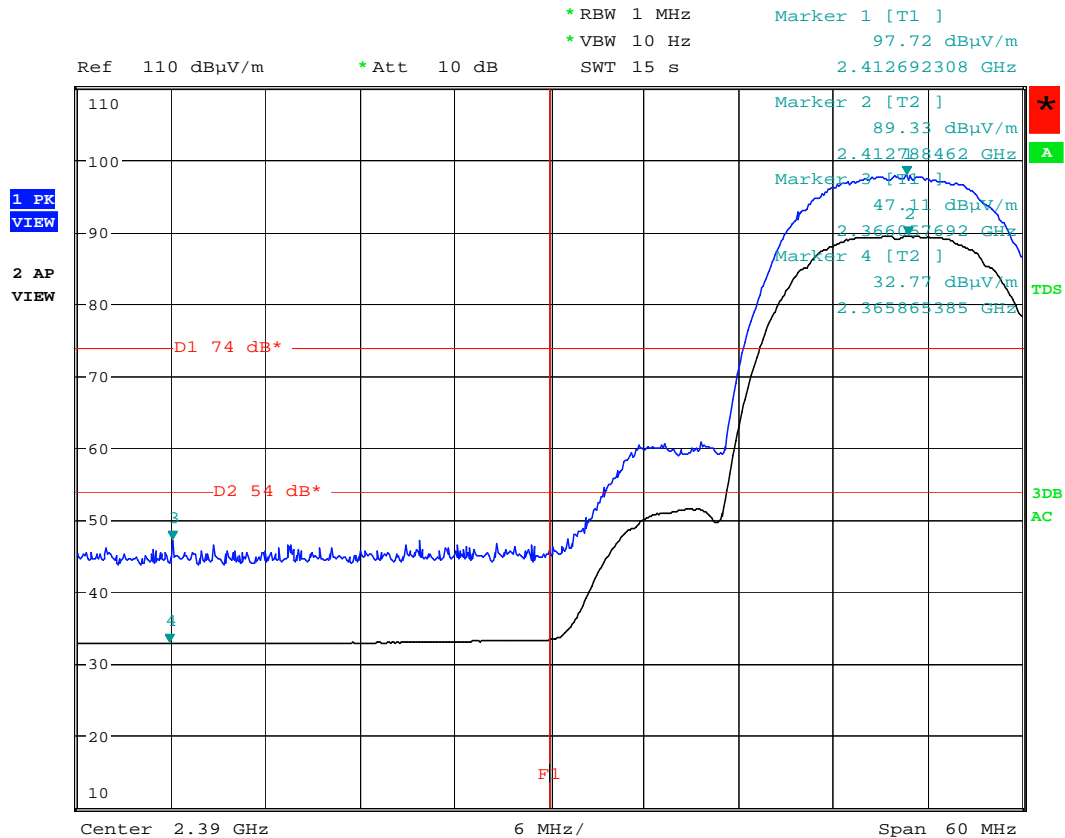

Mode b1, Hor, X-axis
 Date: 4.AUG.2010 12:03:56


Note: The upper trace shows the peak value and the lower trace shows the average value.

Produkte
 Products

Prüfbericht - Nr.: 12606802 005
 Test Report No.:

Seite 24 von 42
 Page 24 of 42

Figure 3: Band Edge Radiated Emission, Mode b3 (2472MHz), Peak and Average

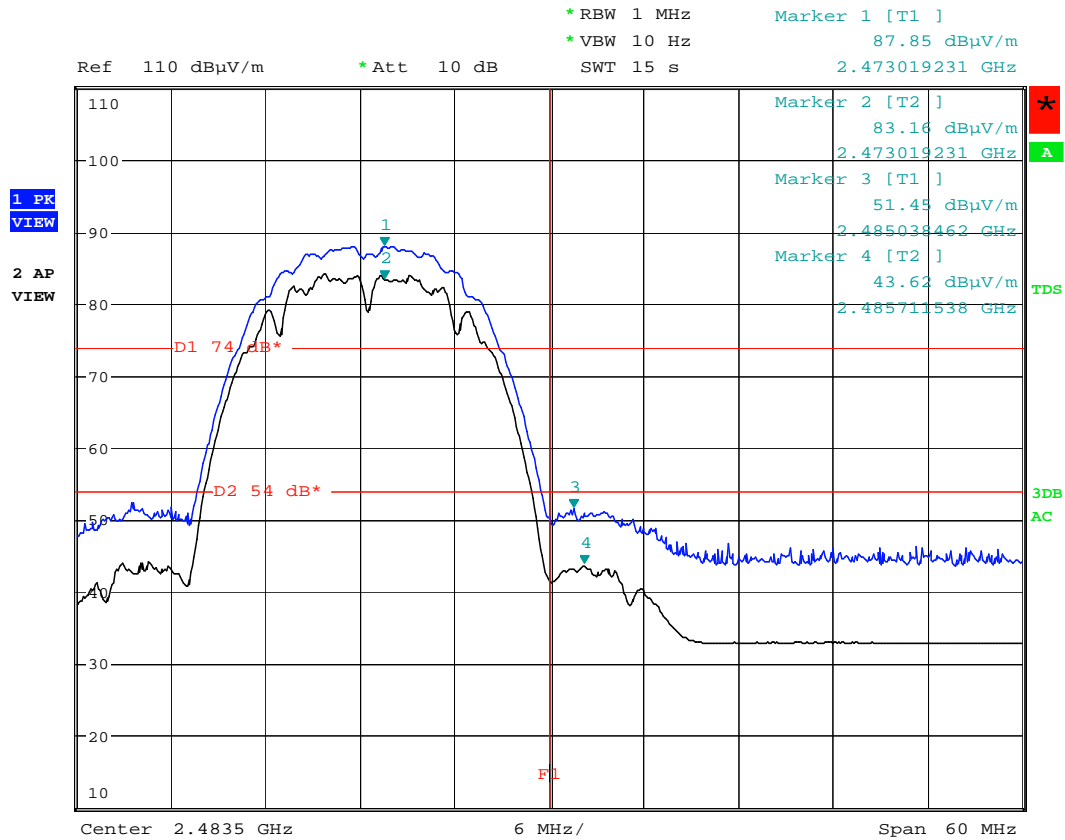

Mode b3, Hor, X-axis
 Date: 4.AUG.2010 13:52:22

Note: The upper trace shows the peak value and the lower trace shows the average value.

Produkte
 Products

Prüfbericht - Nr.: **12606802 005**
 Test Report No.:


Seite 25 von 42
 Page 25 of 42

Table 11: Band Edge Radiated Emission, 802.11g

Operating Frequency [MHz]	EUT / Antenna Orient.	Average Value [dBuV/m]	Peak Value [dBuV/m]	Average Limit [dBuV/m]	Peak Limit [dBuV/m]	Average Margin [dB]	Peak Margin [dB]
2412	X / H	38.16	54.47	54.00	74.00	15.84	19.53
2472	X / H	45.50	71.90	54.00	74.00	8.50	2.10*

Notes: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.
 Average limit in dBuV/m is calculated as follows: Average limit = 20 x log(500uV/m).
 Peak limit in dBuV/m is calculated as follows: Peak limit = Average limit + 20dB.

Figure 4: Band Edge Radiated Emission, Mode g1 (2412MHz), Peak and Average

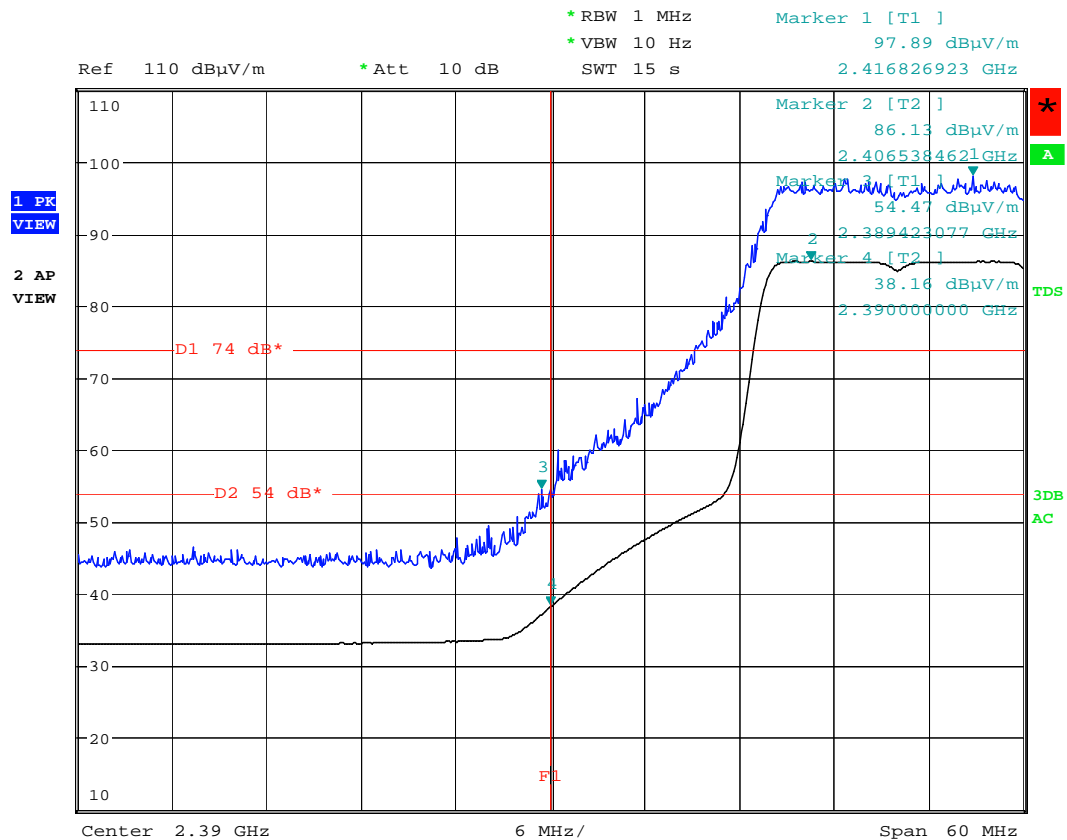

Mode g1, Hor, X-axis
 Date: 4.AUG.2010 12:13:10


Note: The upper trace shows the peak value and the lower trace shows the average value.

Produkte
 Products

Prüfbericht - Nr.: **12606802 005**
 Test Report No.:

Seite 26 von 42
 Page 26 of 42

Figure 5: Band Edge Radiated Emission, Mode g3 (2472MHz), Peak and Average

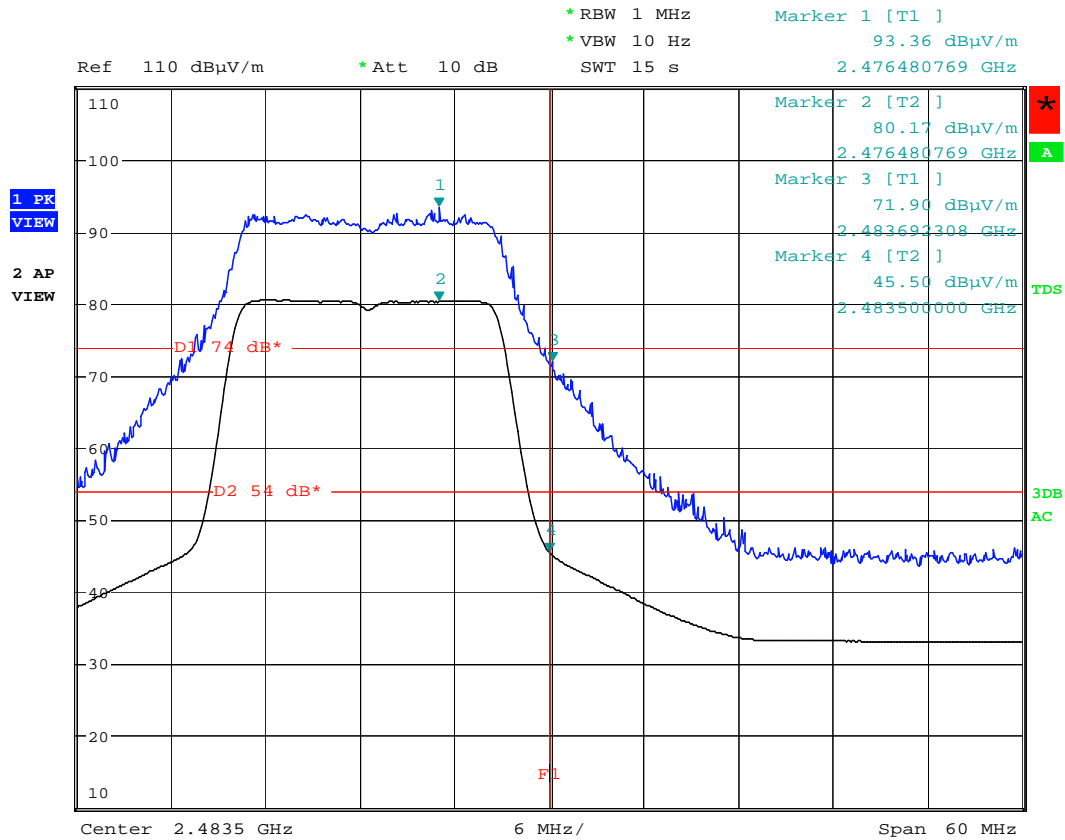

Mode g3, Hor, X-axis

Date: 4.AUG.2010 13:43:59

Note: The upper trace shows the peak value and the lower trace shows the average value.

Uncertainty

(*) The measured result is below the specification limit by a margin less than the measurement uncertainty; it is not therefore possible to determine compliance at a level of confidence of 95%. However, the measured result indicates a higher probability that the product tested complies with the specification limit.

Produkte
Products

Prüfbericht - Nr.: 12606802 005

Seite 27 von 42

Test Report No.:

Page 27 of 42

6.1.2 Radiated Emission, Out-of-Band and Spurious Emission, FCC 15.247(d), FCC 15.205, FCC 15.209, RSS-210 2.2, RSS-210 A8.5 and RSS-Gen 7.2.1

RESULT: PASS

Date of testing:	2010-08-04	2010-08-05	2010-08-06
Ambient temperature:	22°C	22°C	23°C
Relative humidity:	78%	68%	62%
Atmospheric pressure:	1009hPa	1014hPa	1012Hpa
Frequency range:	9kHz – 25GHz		
Measurement distance:	3m		
Kind of test site:	Semi Anechoic Chamber		

Requirements:

The emissions from the intentional radiator shall not exceed the field strength specified in FCC 15.209(a) and RSS-210 2.7.

Test procedure:

ANSI C63.4-2003, RSS-Gen 4.9, 4.10 and Measurement of Digital Transmission Systems Operating under Section 15.247

Before final measurements of radiated emissions were made in Semi Anechoic Chamber, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the host orientation (X, Y and Z) were varied in order to ensure that maximum emission amplitudes were attained. Y orientation below 1GHz and X orientation above 1GHz with the movable antenna (nearly right angle) were found to conduct the final measurement.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Final radiated emission measurements were made at 3m. The spectrum was examined from 30 MHz to the 10th harmonic of the highest fundamental transmitter frequency (25 GHz).

At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

For frequencies between 30MHz and 1GHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1GHz, emissions were measured using following settings: Peak: RBW=1MHz, VBW=1MHz, Average: RBW=1MHz, VBW=10Hz.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Emissions other than those mentioned are small or not detectable.

Produkte
 Products

Prüfbericht - Nr.: 12606802 005

Seite 28 von 42

Test Report No.:

Page 28 of 42

Table 12: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode b1, 802.11b

Freq. [MHz]	Antenna polarity	Reading QP [dB(µV)]	Factor [dB(1/m)]	Level QP [dB(µV/m)]	Limit [dB(µV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
268.11	H	54.8	-22.1	32.7	46.0	13.3	109	93
402.18	H	54.2	-18.1	36.1	46.0	9.9	100	232
938.39	H	42.0	-9.4	32.6	46.0	13.4	147	197
44.65	V	45.0	-23.3	21.7	40.0	18.3	100	172
268.12	V	52.3	-22.3	30.0	46.0	16.0	170	184
402.15	V	49.8	-17.3	32.5	46.0	13.5	238	172
871.34	V	42.9	-10.6	32.3	46.0	13.7	132	144
938.39	V	43.2	-9.7	33.5	46.0	12.5	100	261

Note: Level QP = Reading QP + Factor

Table 13: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode b1, 802.11b

Freq. [MHz]	Antenna polarity	Reading AV [dB(µV)]	Reading PK [dB(µV)]	Factor [dB(1/m)]	Level AV [dB(µV/m)]	Level PK [dB(µV/m)]	Limit AV / PK [dB(µV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1206.50	V	45.3	50.3	-15.1	30.2	35.2	54.0 / 74.0	23.8	38.8	100	230
1742.70	H	45.7	51.0	-13.3	32.4	37.7	54.0 / 74.0	21.6	36.3	131	331
1742.72	V	47.7	52.3	-13.3	34.4	39.0	54.0 / 74.0	19.6	35.0	106	61
4851.17	V	35.9	50.3	-9.3	26.6	40.9	54.0 / 74.0	27.4	33.1	173	21
6638.82	H	38.8	53.6	-5.8	33.0	47.8	54.0 / 74.0	21.0	26.2	105	312
7222.53	V	40.1	54.5	-4.8	35.3	49.7	54.0 / 74.0	18.7	24.3	106	103

Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

Produkte
 Products

Prüfbericht - Nr.: 12606802 005

Seite 29 von 42
 Page 29 of 42

Test Report No.:

Table 14: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode b2, 802.11b

Freq. [MHz]	Antenna polarity	Reading QP [dB(µV)]	Factor [dB(1/m)]	Level QP [dB(µV/m)]	Limit [dB(µV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
268.11	H	55.2	-22.1	33.1	46.0	12.9	100	109
402.17	H	54.0	-18.1	35.9	46.0	10.1	100	238
938.41	H	41.5	-9.4	32.1	46.0	13.9	147	196
44.67	V	46.3	-23.3	23.0	40.0	17.0	103	163
268.08	V	50.0	-22.3	27.7	46.0	18.3	169	179
402.17	V	50.7	-17.3	33.4	46.0	12.6	236	186
804.32	V	39.5	-11.0	28.5	46.0	17.5	138	117
871.37	V	44.2	-10.6	33.6	46.0	12.4	131	136
938.42	V	43.6	-9.7	33.9	46.0	12.1	113	266

Note: Level QP = Reading QP + Factor

Table 15: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode b2, 802.11b

Freq. [MHz]	Antenna polarity	Reading AV [dB(µV)]	Reading PK [dB(µV)]	Factor [dB(1/m)]	Level AV [dB(µV/m)]	Level PK [dB(µV/m)]	Limit AV / PK [dB(µV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1206.50	V	44.2	49.7	-15.1	29.1	34.6	54.0 / 74.0	24.9	39.4	144	269
1742.75	H	45.1	50.7	-13.3	31.8	37.4	54.0 / 74.0	22.2	36.6	135	319
1742.69	V	47.3	51.9	-13.3	34.0	38.6	54.0 / 74.0	20.0	35.4	110	59
3255.98	H	48.7	53.7	-11.0	37.7	42.7	54.0 / 74.0	16.3	31.3	100	302
3256.00	V	46.7	52.6	-11.0	35.7	41.6	54.0 / 74.0	18.3	32.4	127	277
4885.23	V	36.3	50.4	-9.2	27.1	41.2	54.0 / 74.0	26.9	32.8	185	68
7313.46	H	40.3	54.2	-4.6	35.7	49.6	54.0 / 74.0	18.3	24.4	146	135

Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

Produkte
 Products

Prüfbericht - Nr.: 12606802 005

Seite 30 von 42

Test Report No.:

Page 30 of 42

Table 16: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode b3, 802.11b

Freq. [MHz]	Antenna polarity	Reading QP [dB(µV)]	Factor [dB(1/m)]	Level QP [dB(µV/m)]	Limit [dB(µV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
268.11	H	55.0	-22.1	32.9	46.0	13.1	100	96
402.18	H	54.2	-18.1	36.1	46.0	9.9	249	225
938.41	H	41.6	-9.4	32.2	46.0	13.8	148	199
44.67	V	46.0	-23.3	22.7	40.0	17.3	104	187
268.10	V	51.4	-22.3	29.1	46.0	16.9	157	174
402.18	V	50.1	-17.3	32.8	46.0	13.2	235	174
871.37	V	44.0	-10.6	33.4	46.0	12.6	132	144
938.39	V	44.1	-9.7	34.4	46.0	11.6	109	265

Note: Level QP = Reading QP + Factor

Table 17: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode b3, 802.11b

Freq. [MHz]	Antenna polarity	Reading AV [dB(µV)]	Reading PK [dB(µV)]	Factor [dB(1/m)]	Level AV [dB(µV/m)]	Level PK [dB(µV/m)]	Limit AV / PK [dB(µV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1206.51	V	46.1	50.7	-15.1	31.0	35.6	54.0 / 74.0	23.0	38.4	100	266
1742.71	H	45.9	51.0	-13.3	32.6	37.7	54.0 / 74.0	21.4	36.3	132	320
1742.73	V	47.3	52.5	-13.3	34.0	39.2	54.0 / 74.0	20.0	34.8	110	60
3295.99	H	45.3	52.5	-10.9	34.4	41.6	54.0 / 74.0	19.6	32.4	100	302
3587.36	V	35.0	48.6	-9.9	25.1	38.7	54.0 / 74.0	28.9	35.3	199	147
7339.47	H	39.9	54.6	-4.6	35.3	50.0	54.0 / 74.0	18.7	24.0	117	352

Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

Produkte
 Products

Prüfbericht - Nr.: 12606802 005

Seite 31 von 42
 Page 31 of 42

Test Report No.:

Table 18: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode g1, 802.11g

Freq. [MHz]	Antenna polarity	Reading QP [dB(µV)]	Factor [dB(1/m)]	Level QP [dB(µV/m)]	Limit [dB(µV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
32.16	H	35.1	-24.3	10.8	40.0	29.2	116	332
268.12	H	54.5	-22.1	32.4	46.0	13.6	117	98
402.16	H	55.3	-18.1	37.2	46.0	8.8	100	235
938.41	H	42.0	-9.4	32.6	46.0	13.4	149	199
44.70	V	46.3	-23.3	23.0	40.0	17.0	100	172
120.03	V	43.9	-24.7	19.2	43.5	24.3	399	1
268.12	V	52.2	-22.3	29.9	46.0	16.1	180	156
402.17	V	50.2	-17.3	32.9	46.0	13.1	246	189
871.35	V	43.6	-10.6	33.0	46.0	13.0	135	158
938.39	V	43.6	-9.7	33.9	46.0	12.1	112	269

Note: Level QP = Reading QP + Factor

Table 19: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode g1, 802.11g

Freq. [MHz]	Antenna polarity	Reading AV [dB(µV)]	Reading PK [dB(µV)]	Factor [dB(1/m)]	Level AV [dB(µV/m)]	Level PK [dB(µV/m)]	Limit AV / PK [dB(µV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1206.51	V	44.6	49.8	-15.1	29.5	34.7	54.0 / 74.0	24.5	39.3	103	224
1742.68	V	47.5	52.3	-13.3	34.2	39.0	54.0 / 74.0	19.8	35.0	106	49
1742.70	H	46.0	51.3	-13.3	32.7	38.0	54.0 / 74.0	21.3	36.0	131	328
3215.98	V	45.8	52.8	-11.2	34.6	41.6	54.0 / 74.0	19.4	32.4	107	266
3216.02	H	45.7	52.7	-11.2	34.5	41.5	54.0 / 74.0	19.5	32.5	102	305
4882.22	H	36.2	49.8	-9.2	27.0	40.6	54.0 / 74.0	27.0	33.4	127	230
7249.84	V	39.9	54.6	-4.7	35.2	49.9	54.0 / 74.0	18.8	24.1	177	312

Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

Produkte
 Products

Prüfbericht - Nr.: 12606802 005

Seite 32 von 42

Test Report No.:

Page 32 of 42

Table 20: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode g2, 802.11g

Freq. [MHz]	Antenna polarity	Reading QP [dB(µV)]	Factor [dB(1/m)]	Level QP [dB(µV/m)]	Limit [dB(µV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
268.10	H	54.4	-22.1	32.3	46.0	13.7	110	91
402.18	H	53.8	-18.1	35.7	46.0	10.3	100	232
938.39	H	41.5	-9.4	32.1	46.0	13.9	148	197
44.67	V	46.1	-23.3	22.8	40.0	17.2	103	160
268.12	V	51.1	-22.3	28.8	46.0	17.2	182	192
402.18	V	50.3	-17.3	33.0	46.0	13.0	241	179
871.36	V	44.7	-10.6	34.1	46.0	11.9	128	142
938.39	V	44.0	-9.7	34.3	46.0	11.7	114	267

Note: Level QP = Reading QP + Factor

Table 21: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode g2, 802.11g

Freq. [MHz]	Antenna polarity	Reading AV [dB(µV)]	Reading PK [dB(µV)]	Factor [dB(1/m)]	Level AV [dB(µV/m)]	Level PK [dB(µV/m)]	Limit AV / PK [dB(µV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1206.48	V	45.7	50.4	-15.1	30.6	35.3	54.0 / 74.0	23.4	38.7	100	227
1742.69	H	45.8	51.2	-13.3	32.5	37.9	54.0 / 74.0	21.5	36.1	131	326
1742.71	V	47.0	51.7	-13.3	33.7	38.4	54.0 / 74.0	20.3	35.6	110	61
3255.98	H	53.5	57.0	-11.0	42.5	46.0	54.0 / 74.0	11.5	28.0	100	311
3256.00	V	51.6	55.4	-11.0	40.6	44.4	54.0 / 74.0	13.4	29.6	106	268
4926.88	V	36.5	51.2	-9.0	27.5	42.2	54.0 / 74.0	26.5	31.8	101	134
7305.35	H	40.4	54.2	-4.6	35.8	49.6	54.0 / 74.0	18.2	24.4	184	12

Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

Produkte
 Products

Prüfbericht - Nr.: 12606802 005

Seite 33 von 42

Test Report No.:

Page 33 of 42

Table 22: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode g3, 802.11g

Freq. [MHz]	Antenna polarity	Reading QP [dB(µV)]	Factor [dB(1/m)]	Level QP [dB(µV/m)]	Limit [dB(µV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
32.07	H	43.3	-24.3	19.0	40.0	21.0	101	359
268.11	H	55.1	-22.1	33.0	46.0	13.0	101	106
402.17	H	54.2	-18.1	36.1	46.0	9.9	224	224
938.39	H	41.7	-9.4	32.3	46.0	13.7	147	198
44.66	V	45.0	-23.3	21.7	40.0	18.3	100	169
402.16	V	49.8	-17.3	32.5	46.0	13.5	236	185
804.35	V	39.9	-11.0	28.9	46.0	17.1	144	123
871.37	V	44.3	-10.6	33.7	46.0	12.3	133	145
938.40	V	44.3	-9.7	34.6	46.0	11.4	110	265

Note: Level QP = Reading QP + Factor

Table 23: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode g3, 802.11g

Freq. [MHz]	Antenna polarity	Reading AV [dB(µV)]	Reading PK [dB(µV)]	Factor [dB(1/m)]	Level AV [dB(µV/m)]	Level PK [dB(µV/m)]	Limit AV / PK [dB(µV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1206.50	V	45.2	50.4	-15.1	30.1	35.3	54.0 / 74.0	23.9	38.7	100	263
1742.69	H	45.8	51.1	-13.3	32.5	37.8	54.0 / 74.0	21.5	36.2	131	315
1742.71	V	46.5	51.4	-13.3	33.2	38.1	54.0 / 74.0	20.8	35.9	110	37
1787.68	V	32.7	49.8	-13.2	19.5	36.6	54.0 / 74.0	34.5	37.4	100	299
3296.00	H	51.0	55.3	-10.9	40.1	44.4	54.0 / 74.0	13.9	29.6	100	307
3295.99	V	48.9	54.1	-10.9	38.0	43.2	54.0 / 74.0	16.0	30.8	107	270
7330.86	H	40.1	54.3	-4.6	35.5	49.7	54.0 / 74.0	18.5	24.3	186	317

Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

6.2 Radiated Emission of Receiver

6.2.1 Radiated Emission of Receiver, FCC 15.109, RSS-210 2.2, RSS-210 2.6, RSS-210 A8.5, RSS-Gen 7.2.3.2

RESULT:

PASS

Date of testing:	2010-08-04	2010-08-05	2010-08-06
Ambient temperature:	22°C	22°C	23°C
Relative humidity:	78%	68%	62%
Atmospheric pressure:	1009hPa	1014hPa	1012Hpa
Frequency range:	30MHz – 12.5GHz		
Equipment classification:	Class B		
Measurement distance:	3m		
Kind of test site:	Semi Anechoic Chamber		

Requirements:

The emissions from the unintentional radiator shall not exceed the field strength specified in 15.109(a) and RSS-210 Table 2 (and RSS-Gen Table 1).

Test procedure:

ANSI C63.4-2003, RSS-Gen 4.9, 4.10

Before final measurements of radiated emissions were made in Semi Anechoic Chamber, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the orientation (X, Y & Z) of the EUT and movable antenna were varied in order to ensure that maximum emission amplitudes were attained. Y orientation below 1GHz and X orientation above 1GHz with the movable antenna (nearly right angle) were found to conduct the final measurement.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Final radiated emission measurements were made at 3m. The spectrum was examined from 30 MHz to the 5th harmonic of the highest fundamental transmitter frequency (12.5 GHz).

At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

For frequencies between 30MHz and 1GHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1GHz, emissions were measured using following settings: Peak: RBW=1MHz, VBW=1MHz, Average: RBW=1MHz, VBW=10Hz.

Produkte
 Products

Prüfbericht - Nr.: 12606802 005

Seite 35 von 42

Test Report No.:

Page 35 of 42

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Emissions other than those mentioned are small or not detectable.

Table 24: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode R, 802.11b/g

Freq. [MHz]	Antenna polarity	Reading QP [dB(µV)]	Factor [dB(1/m)]	Level QP [dB(µV/m)]	Limit [dB(µV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
32.05	H	41.8	-24.3	17.5	40.0	22.5	100	359
268.14	H	43.0	-22.1	20.9	46.0	25.1	129	95
402.17	H	52.2	-18.1	34.1	46.0	11.9	100	260
737.31	H	40.3	-12.1	28.2	46.0	17.8	116	176
804.33	H	40.9	-11.1	29.8	46.0	16.2	101	184
871.39	H	41.8	-10.4	31.4	46.0	14.6	101	179
44.68	V	43.3	-23.3	20.0	40.0	20.0	105	161
402.18	V	49.1	-17.3	31.8	46.0	14.2	196	257
670.30	V	37.7	-12.3	25.4	46.0	20.6	100	107
938.39	V	43.0	-9.7	33.3	46.0	12.7	131	136

Note: Level QP = Reading QP + Factor

Table 25: Radiated Emission 1GHz – 12.5GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode R, 802.11b/g

Freq. [MHz]	Antenna polarity	Reading AV [dB(µV)]	Reading PK [dB(µV)]	Factor [dB(1/m)]	Level AV [dB(µV/m)]	Level PK [dB(µV/m)]	Limit AV / PK [dB(µV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1206.51	V	44.6	49.9	-15.1	29.5	34.8	54.0 / 74.0	24.5	39.2	100	230
1206.48	H	39.0	47.1	-15.1	23.9	32.0	54.0 / 74.0	30.1	42.0	166	75
1742.75	H	45.2	50.8	-13.3	31.9	37.5	54.0 / 74.0	22.1	36.5	108	300
1742.69	V	45.9	51.2	-13.3	32.6	37.9	54.0 / 74.0	21.4	36.1	133	45
6105.64	V	38.3	53.2	-6.9	31.4	46.3	54.0 / 74.0	22.6	27.7	107	13
6366.55	V	38.4	52.6	-6.2	32.2	46.4	54.0 / 74.0	21.8	27.6	110	263

Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

8. List of Tables

Table 1: List of Test and Measurement Equipment	8
Table 2: Emission Measurement Uncertainty	9
Table 3: Interfaces present on the EUT	11
Table 4: The Date rate corresponds the worst case of each frequency band of different radio	12
Table 5: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode b1, 802.11b	18
Table 6: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode b3, 802.11b	18
Table 7: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode g1, 802.11g	19
Table 8: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode g3, 802.11g	19
Table 9: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode R, 802.11b/g	21
Table 10: Band Edge Radiated Emission, 802.11b	23
Table 11: Band Edge Radiated Emission, 802.11g	25
Table 12: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode b1, 802.11b	28
Table 13: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode b1, 802.11b	28
Table 14: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode b2, 802.11b	29
Table 15: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode b2, 802.11b	29
Table 16: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode b3, 802.11b	30
Table 17: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode b3, 802.11b	30
Table 18: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode g1, 802.11g	31
Table 19: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode g1, 802.11g	31
Table 20: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode g2, 802.11g	32
Table 21: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode g2, 802.11g	32
Table 22: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode g3, 802.11g	33
Table 23: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode g3, 802.11g	33
Table 24: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode R, 802.11b/g	35
Table 25: Radiated Emission 1GHz – 12.5GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode R, 802.11b/g	35

9. List of Figures

Figure 1: Test setup	15
Figure 2: Band Edge Radiated Emission, Mode b1 (2412MHz), Peak and Average	23
Figure 3: Band Edge Radiated Emission, Mode b3 (2472MHz), Peak and Average	24

Produkte
Products

Prüfbericht - Nr.: 12606802 005
Test Report No.:

Seite 42 von 42
Page 42 of 42

Figure 4: Band Edge Radiated Emission, Mode g1 (2412MHz), Peak and Average25
Figure 5: Band Edge Radiated Emission, Mode g3 (2472MHz), Peak and Average26

10. List of Photographs

Photograph 1: Set-up for AC Mains Conducted Emission of Transmitter and Receiver, Front View36
Photograph 2: Set-up for AC Mains Conducted Emission of Transmitter and Receiver, Rear View.....37
Photograph 3: Set-up for Radiated Emission, EUT Configuration X-Axis (Movable antenna)37
Photograph 4: Set-up for Radiated Emission, EUT Configuration Y-Axis (Movable antenna)38
Photograph 5: Set-up for Radiated Emission, EUT Configuration Z-Axis (Movable antenna)38
Photograph 6: Set-up for Radiated Emission of Transmitter, Front View39
Photograph 7: Set-up for Radiated Emission of Transmitter, Rear View.....39
Photograph 8: Set-up for Radiated Emission of Receiver, Front View40
Photograph 9: Set-up for Radiated Emission of Receiver, Rear View.....40