

RADIO TEST REPORT – 407733-1TRFWL

Type of assessment:

Final product testing

Applicant:

VOXX DEI Canada Ltd.

Product:

915MHz Remote Start In Vehicle Transceiver Unit

Model:

G6867T

FCC ID:

EZSG6867

ISED Registration number:

1513A-G6867

Specifications:

- ◆ FCC 47 CFR Part 15 Subpart C, §15.247
- ◆ RSS-247, Issue 2, Feb 2017, Section 5

Date of issue: March 25, 2021

Redwanul Rasel, EMC/RF Specialist

Tested by



Signature


Yong Huang, EMC/RF Specialist

Reviewed by



Signature

Nemko Canada Inc., a testing laboratory, is accredited by the Standards Council of Canada.
The tests included in this report are within the scope of this accreditation





Lab locations

| | | | | |
|--------------|---|--|---|---|
| Company name | Nemko Canada Inc. | | | |
| Facilities | <i>Ottawa site:</i> 303 River Road Ottawa, Ontario Canada K1V 1H2 Tel: +1 613 737 9680 Fax: +1 613 737 9691 | <i>Montréal site:</i> 292 Labrosse Avenue Pointe-Claire, Québec Canada H9R 5L8 Tel: +1 514 694 2684 Fax: +1 514 694 3528 | <i>Cambridge site:</i> 1-130 Saltsman Drive Cambridge, Ontario Canada N3E 0B2 Tel: +1 519 650 4811 | <i>Almonte site:</i> 1500 Peter Robinson Road West Carleton, Ontario Canada K0A 1L0 Tel: +1 613 256-9117 |
| | Organization | Recognition numbers and location | | |
| | FCC/ISED | FCC: CA2040; IC: 2040A-4 (Ottawa/Almonte); FCC: CA2041; IC: 2040G-5 (Montreal); CA0101 (Cambridge) | | |
| Website | www.nemko.com | | | |

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.



Table of Contents

| | |
|--|-----------|
| Table of Contents | 3 |
| Section 1 Report summary | 4 |
| 1.1 Test specifications | 4 |
| 1.2 Test methods | 4 |
| 1.3 Exclusions | 4 |
| 1.4 Statement of compliance | 4 |
| 1.5 Test report revision history | 4 |
| Section 2 Engineering considerations | 5 |
| 2.1 Modifications incorporated in the EUT for compliance | 5 |
| 2.2 Technical judgment | 5 |
| 2.3 Deviations from laboratory tests procedures | 5 |
| Section 3 Test conditions | 6 |
| 3.1 Atmospheric conditions | 6 |
| 3.2 Power supply range | 6 |
| Section 4 Measurement uncertainty | 7 |
| 4.1 Uncertainty of measurement | 7 |
| Section 5 Information provided by the applicant | 8 |
| 5.1 Disclaimer | 8 |
| 5.2 Applicant/Manufacture | 8 |
| 5.3 EUT information | 8 |
| 5.4 Radio technical information | 9 |
| 5.5 EUT setup details | 9 |
| Section 6 Summary of test results | 11 |
| 6.1 Testing location | 11 |
| 6.2 Testing period | 11 |
| 6.3 Sample information | 11 |
| 6.4 FCC Part 15 Subpart A and C, general requirements test results | 11 |
| 6.5 FCC Part §15.247 test results for frequency hopping spread spectrum systems (FHSS) | 11 |
| 6.6 ISED RSS-Gen, Issue 5, test results | 12 |
| 6.7 ISED RSS-247, Issue 2, test results for frequency hopping spread spectrum systems (FHSS) | 12 |
| Section 7 Test equipment | 13 |
| 7.1 Test equipment list | 13 |
| Section 8 Testing data | 14 |
| 8.1 Variation of power source | 14 |
| 8.2 Number of frequencies | 15 |
| 8.3 Antenna requirement | 17 |
| 8.4 Frequency Hopping Systems requirements, 900 MHz operation | 18 |
| 8.5 Transmitter output power and e.i.r.p. requirements for FHSS 900 MHz | 24 |
| 8.6 Spurious (out-of-band) unwanted emissions | 26 |
| Section 9 EUT photos | 37 |
| 9.1 External photos | 37 |

Section 1 Report summary

1.1 Test specifications

| | |
|--|--|
| FCC 47 CFR Part 15, Subpart C, Clause 15.247 | Operation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–585 MHz |
| RSS-247, Issue 2, Feb 2017, Section 5 | Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices |

1.2 Test methods

| | |
|--|---|
| 558074 D01 15.247 Meas Guidance v05r02 (April 2, 2019) | Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules. |
| DA 00-705, Released March 30, 2000 | Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems |
| ANSI C63.10 v2013 | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices |

1.3 Exclusions

None

1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was performed against all relevant requirements of the test standard except as noted in section 1.3 above. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

1.5 Test report revision history

Table 1.5-1: Test report revision history

| Revision # | Date of issue | Details of changes made to test report |
|------------|----------------|--|
| TRF | March 25, 2021 | Original report issued |

Section 2 Engineering considerations

2.1 Modifications incorporated in the EUT for compliance

There were no modifications performed to the EUT during this assessment.

2.2 Technical judgment

As per client, The G6867T has exactly the same unit for all brand name (Viper, Python, Clifford, etc.). DEI6867T uses a now obsoleted transceiver, thus to replace it by a new design based on a new transceiver IC. In brief, DEI6867T and G6867T have same Rx sensitivity.

As per customer, G6867T and DEI6867T both have identical hardware, PCBs and radio antennas. Transmitter output power and e.i.r.p, Spurious (out-of-band), unwanted emissions tests data are from Q102170994 project. As per quotation Q102183877r1, only Frequency Hopping Systems requirements, 900 MHz operation (20 dB bandwidth, 99% bandwidth, Carrier frequency separation, Number of hopping frequencies, Average time of occupancy, Band edge and Conducted spurious (out-of-band) emissions) tests were performed and the report is updated with new test data.

2.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 3 Test conditions

3.1 Atmospheric conditions

| | |
|-------------------|---|
| Temperature | 15 °C – 35 °C |
| Relative humidity | 20 % – 75 % |
| Air pressure | 86 kPa (860 mbar) – 106 kPa (1060 mbar) |

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

3.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 4 Measurement uncertainty

4.1 Uncertainty of measurement

UKAS Lab 34 and TIA-603-B have been used as guidance for measurement uncertainty reasonable estimations with regards to previous experience and validation of data. Nemko Canada, Inc. follows these test methods in order to satisfy ISO/IEC 17025 requirements for estimation of uncertainty of measurement for wireless products.

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of $K = 2$ with 95% certainty.

Table 4.1-1: Measurement uncertainty calculations

| Test name | Measurement uncertainty, \pm dB |
|-------------------------------|-----------------------------------|
| All antenna port measurements | 0.55 |
| Occupied bandwidth | 4.45 |
| Conducted spurious emissions | 1.13 |
| Radiated spurious emissions | 3.78 |

Section 5 Information provided by the applicant

5.1 Disclaimer

This section contains information provided by the applicant and has been utilized to support the test plan. Inaccurate information provided by the applicant can affect the validity of the results contained within this test report. Nemko accepts no responsibility for the information contained within this section and the impact it may have on the test plan and resulting measurements.

5.2 Applicant/Manufacture

| | |
|---------|---|
| Name | VOXX DEI Canada Ltd. |
| Address | 2113 32e Avenue, Lachine, QC, Canada, H8T 3J1 |

5.3 EUT information

| | |
|---|--|
| Product | 915MHz Remote Start In Vehicle Transceiver Unit |
| Model | G6867T |
| Serial number | 200-10402-R1.3-D00 |
| Part number | G6867 |
| Power supply requirements | DC: 12 V |
| Model variant | DEI6867T |
| Product description and theory of operation | The EUT is part of the DEI Car Remote Control DS4/DS4+ System. The EUT is a 915 MHz transceiver installed on the windshield of the car. It serves as the Air Interface between user's remote key fob and the DS4/DS4+ Main Control Unit. The Air Interface uses FHSS scheme with 25 hopping channels. The pulse dwell time is 99.6 ms. The EUT is paired to the user's remote key fob and will answer only to the command of the latter. In normal application, the user would use the key fob 2 to 10 times per day according to his/her need. In some circumstances, the EUT may want to communicate to the key fob (sending alarm to the user or re-synchronizing the system time slots). In such communication, the average occupancy time would be 13.3 ms to 16.5 ms max per 10 seconds. |

5.4 Radio technical information

| | |
|---|--|
| Category of Wideband Data Transmission equipment | Frequency Hopping Spread Spectrum (FHSS) equipment |
| Frequency band | 902–928 MHz |
| Frequency Min (MHz) | 907.09 |
| Frequency Max (MHz) | 923.83 |
| Channel numbers | 25 |
| RF power Max (W), Conducted | 0.124 (20.95 dBm) |
| Measured BW (kHz), 99% OBW | 286.8 |
| Type of modulation | GFSK |
| Emission classification | F1D |
| Transmitter spurious, dB μ V/m @ 3 m | 53.54 peak and 47.10 average at 9148.75 MHz low channel |
| Software details | Version #1287 |
| Antenna information | Integrated print antenna on PCB. The antenna is basically a quarter-wave monopole design. The max gain is 3.0 dBi. |

5.5 EUT setup details

5.5.1 Radio exercise details

For measuring the radiated fundamental power and un-wanted emission & harmonic, the EUT is settled in continuous mode by mean of a controller box. Three operation frequencies (907.095, 916.395 and 923.835 MHz) have been tested.

For measuring the pulse dwell time and the average transmission time over 10 seconds, a complete DS4/DS4+ Remote system is used. The EUT receives key fobs commands via a directional coupler. The EUT transmitted signals are directly measured by a spectrum analyzer in conducted mode (i.e. by mean of a 50 ohms coaxial cable, the EUT antenna is disconnected).

Note: the remote key fob is already a FCC / ISED certified device.

5.5.2 EUT setup configuration

Table 5.5-1: EUT sub assemblies

| Description | Brand name | Model, Part number, Serial number, Revision level |
|---|------------|---|
| 915MHz Remote Start In Vehicle Transceiver Unit | Viper | MN: G6867T, SN: 200-10402-R1.3-D00, PN: G6867 |

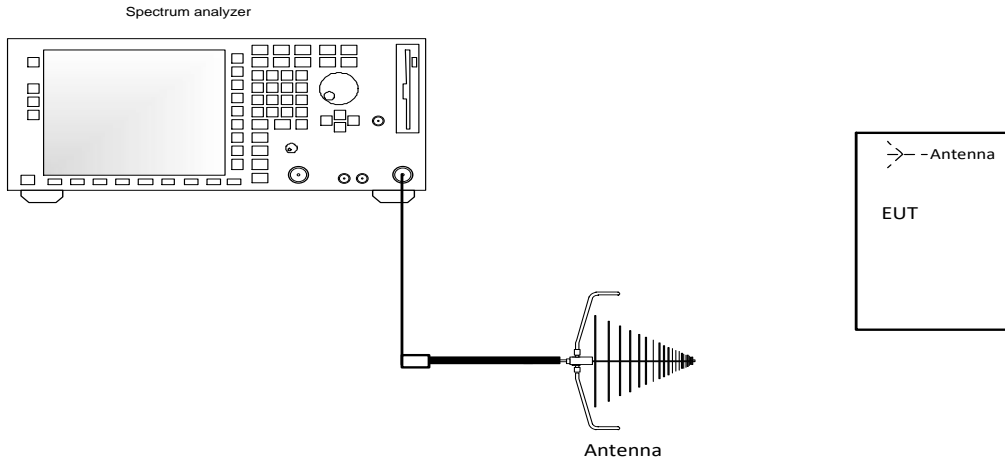


Figure 5.5-1: Radiated testing block diagram

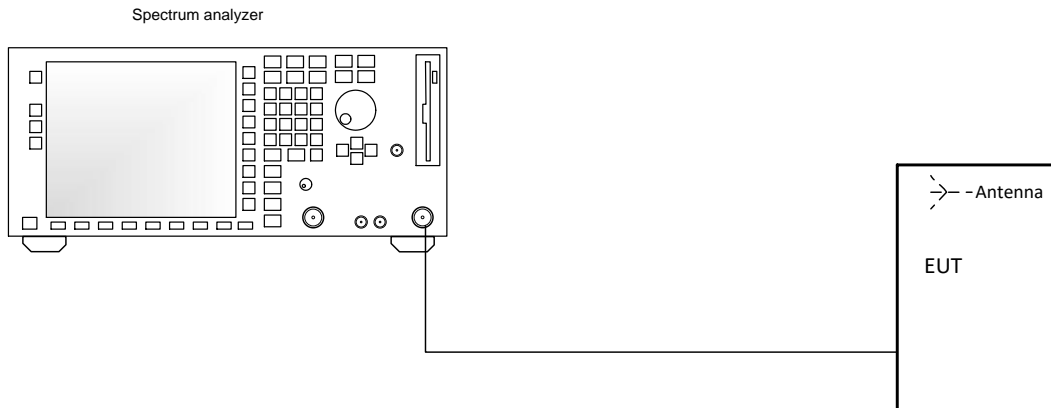


Figure 5.5-2: Antenna port testing block diagram

Section 6 Summary of test results

6.1 Testing location

Test location (s) Montreal

6.2 Testing period

Test start date Jan 14, Feb 13, Oct 9 and Nov 13, 2020 Test end date Jan 14, Feb 13, Oct 9 and Nov 13, 2020

6.3 Sample information

Receipt date Jan 14, Feb 13, Oct 9 and Nov 13, 2020 Nemko sample ID number(s) 1

6.4 FCC Part 15 Subpart A and C, general requirements test results

Table 6.4-1: FCC general requirements results

| Part | Test description | Verdict |
|------------|------------------------------|----------------|
| §15.207(a) | Conducted limits | Not applicable |
| §15.31l | Variation of power source | Pass |
| §15.31(m) | Number of tested frequencies | Pass |
| §15.203 | Antenna requirement | Pass |

Notes: EUT is a battery operated device, used DC power supply only for testing purposes.

6.5 FCC Part §15.247 test results for frequency hopping spread spectrum systems (FHSS)

Table 6.5-1: FCC FHSS requirements results

| Part | Test description | Verdict |
|--------------------|---|----------------|
| §15.247(a)(1)(i) | Requirements for operation in the 902–928 MHz band | Pass |
| §15.247(a)(1)(ii) | Requirements for operation in the 5725–5850 MHz band | Not applicable |
| §15.247(a)(1)(iii) | Requirements for operation in the 2400–2483.5 MHz band | Not applicable |
| §15.247(b)(1) | Maximum peak output power in the 2400–2483.5 MHz band and 5725–5850 MHz band | Not applicable |
| §15.247(b)(2) | Maximum peak output power in the 902–928 MHz band | Pass |
| §15.247(1) | Fixed point-to-point operation with directional antenna gains greater than 6 dBi | Not applicable |
| §15.247(2) | Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams | Not applicable |
| §15.247(d) | Spurious emissions | Pass |
| §15.247(f) | Time of occupancy for hybrid systems | Not applicable |
| §15.247(i) | Radiofrequency radiation exposure evaluation | Not applicable |

Notes: None

6.6 ISED RSS-Gen, Issue 5, test results

Table 6.6-1: RSS-Gen requirements results

| Part | Test description | Verdict |
|------|---|----------------|
| 7.3 | Receiver radiated emission limits ¹ | Not applicable |
| 7.4 | Receiver conducted emission limits ¹ | Not applicable |
| 6.9 | Operating bands and selection of test frequencies | Pass |
| 8.8 | AC power-line conducted emissions limits | Not applicable |

Notes: ¹According to sections 5.2 and 5.3 of RSS-Gen, Issue 5 the EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.
EUT is a battery operated device, the testing was performed using fresh batteries.

6.7 ISED RSS-247, Issue 2, test results for frequency hopping spread spectrum systems (FHSS)

Table 6.7-1: ISED FHSS requirements results

| Part | Test description | Verdict |
|---------|--|----------------|
| 5.1 (a) | Bandwidth of a frequency hopping channel | Pass |
| 5.1 (b) | Minimum channel spacing | Pass |
| 5.1 (c) | Systems operating in the 902–928 MHz band | Pass |
| 5.1 (d) | Systems operating in the 2400–2483.5 MHz band | Not applicable |
| 5.1 (e) | Systems operating in the 5725–5850 MHz band | Not applicable |
| 5.3 | Hybrid Systems | |
| 5.3 (a) | Digital modulation turned off | Not applicable |
| 5.3 (b) | Frequency hopping turned off | Not applicable |
| 5.4 | Transmitter output power and e.i.r.p. requirements | |
| 5.4 (a) | Systems operating in the 902–928 MHz band | Pass |
| 5.4 (b) | Systems operating in the 2400–2483.5 MHz band | Not applicable |
| 5.4 (c) | Systems operating in the 5725–5850 MHz | Not applicable |
| 5.4 (e) | Point-to-point systems in 2400–2483.5 MHz and 5725–5850 MHz band | Not applicable |
| 5.4 (f) | Transmitters which operate in the 2400–2483.5 MHz band with multiple directional beams | Not applicable |
| 5.5 | Unwanted emissions | Pass |

Notes: None

Section 7 Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

| Equipment | Manufacturer | Model no. | Asset no. | Cal cycle | Next cal. |
|----------------------------------|--------------------|-----------|-----------|-----------|--------------------|
| 3 m EMI test chamber (Emissions) | TDK | SAC-3 | FA002532e | 2 year | February 25, 2022 |
| Flush mount turntable | Sunol | FM2022 | FA002550 | — | NCR |
| Controller | Sunol | SC104V | FA002551 | — | NCR |
| Antenna mast | Sunol | TLT2 | FA002552 | — | NCR |
| Receiver/spectrum analyzer | Rohde & Schwarz | ESU 40 | FA002071 | 1 year | June 1, 2021 |
| Bilog antenna (20–2000 MHz) | Sunol | JB1 | FA002517 | 1 year | January 28, 2021 |
| Horn antenna (1–18 GHz) | EMCO | 3115 | FA001451 | 1 year | October 12, 2021 |
| Pre-amplifier (0.5–18 GHz) | Com-Power | PAM-118A | FA002561 | 1 year | September 22, 2021 |
| High Pass Filter (> 1100 MHz) | Microwave Circuits | H1G212G1 | FA002689 | — | VOU |
| 50 Ω coax cable | C.C.A. | None | FA002603 | 1 year | February 4, 2021 |
| 50 Ω coax cable | C.C.A. | None | FA002605 | — | VOU |

Notes: NCR - no calibration required, VOU - verify on use

Section 8 Testing data

8.1 Variation of power source

8.1.1 References, definitions and limits

FCC §15.31 (e):

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

8.1.2 Test summary

| | | | |
|-----------|----------------|-----------|-----------------|
| Verdict | Pass | | |
| Tested by | Redwanul Rasel | Test date | October 9, 2020 |

8.1.3 Observations, settings and special notes

The testing was performed as per ANSI C63.10 Section 5.13.

- Where the device is intended to be powered from an external power adapter, the voltage variations shall be applied to the input of the adapter provided with the device at the time of sale. If the device is not marketed or sold with a specific adapter, then a typical power adapter shall be used.
- For devices, where operating at a supply voltage deviating $\pm 15\%$ from the nominal rated value may cause damages or loss of intended function, test to minimum and maximum allowable voltage per manufacturer's specification and document in the report.
- For devices with wide range of rated supply voltage, test at 15% below the lowest and 15% above the highest declared nominal rated supply voltage.
- For devices obtaining power from an input/output (I/O) port (USB, firewire, etc.), a test jig is necessary to apply voltage variation to the device from a support power supply, while maintaining the functionalities of the device.

For battery-operated equipment, the equipment tests shall be performed using a variable power supply.

8.1.4 Test data

EUT Power requirements:

- | | | | |
|---|---|-----------------------------|---|
| | <input type="checkbox"/> AC | <input type="checkbox"/> DC | <input checked="" type="checkbox"/> Battery |
| If EUT is an AC or a DC powered, was the noticeable output power variation observed? | <input type="checkbox"/> YES | <input type="checkbox"/> NO | <input checked="" type="checkbox"/> N/A |
| If EUT is battery operated, was the testing performed using fresh batteries? | <input checked="" type="checkbox"/> YES | <input type="checkbox"/> NO | <input type="checkbox"/> N/A |
| If EUT is rechargeable battery operated, was the testing performed using fully charged batteries? | <input type="checkbox"/> YES | <input type="checkbox"/> NO | <input checked="" type="checkbox"/> N/A |

8.2 Number of frequencies

8.2.1 References, definitions and limits

FCC §15.31:

- (m) Measurements on intentional radiators or receivers shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table.

RSS-Gen, Clause 6.9:

Except where otherwise specified, measurements shall be performed for each frequency band of operation for which the radio apparatus is to be certified, with the device operating at the frequencies in each band of operation shown in table below. The frequencies selected for measurements shall be reported in the test report.

Table 8.2-1: Frequency Range of Operation

| Frequency range over which the device operates (in each band) | Number of test frequencies required | Location of measurement frequency inside the operating frequency range |
|---|-------------------------------------|--|
| 1 MHz or less | 1 | Center (middle of the band) |
| 1–10 MHz | 2 | 1 near high end, 1 near low end |
| Greater than 10 MHz | 3 | 1 near high end, 1 near center and 1 near low end |

Notes: “near” means as close as possible to or at the centre / low end / high end of the frequency range over which the device operates.

8.2.2 Test summary

| | | | |
|-----------|----------------|-----------|-----------------|
| Verdict | Pass | | |
| Tested by | Redwanul Rasel | Test date | October 9, 2020 |

8.2.3 Observations, settings and special notes

ANSI C63.10, Clause 5.6.2.1:

The number of channels tested can be reduced by measuring the center channel bandwidth first and then applying the following relaxations as appropriate:

- For each operating mode, if the measured channel bandwidth on the middle channel is at least 150% of the minimum permitted bandwidth, then it is not necessary to measure the bandwidth on the high and low channels.
- For multiple-input multiple-output (MIMO) systems, if the measured channel bandwidth on testing the middle channel exceeds the minimum permitted bandwidth by more than 50% on one transmit chain, then it is not necessary to repeat testing on the other chains.
- If the measured channel bandwidth on the middle channel is less than 50% of the maximum permitted bandwidth, then it is not necessary to measure the bandwidth on the high and low channels.

ANSI C63.10, Clause 5.6.2.2:

For devices with multiple operating modes, measurements on the middle channel can be used to determine the worst-case mode(s). The worst-case modes are as follows:

- Band edge requirements—Measurements on the mode with the widest bandwidth can be used to cover the same channel (center frequency) on modes with narrower bandwidth that have the same or lower output power for each modulation family (e.g., OFDM and direct sequence spread spectrum).
- Spurious emissions—Measure the mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum).
- In-band PSD—Measurements on the mode with the narrowest bandwidth can be used to cover all modes within the same modulation family of an equal or lower output power provided the result is less than 50% of the limit.



8.2.4 Test data

Table 8.2-2: *Test channels selection*

| Start of Frequency range, MHz | End of Frequency range, MHz | Frequency range bandwidth, MHz | Low channel, MHz | Mid channel, MHz | High channel, MHz |
|--------------------------------------|------------------------------------|---------------------------------------|-------------------------|-------------------------|--------------------------|
| 902 | 928 | 26 | 907.09 | 916.39 | 923.83 |



8.3 Antenna requirement

8.3.1 References, definitions and limits

FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

FCC §15.247:

- (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
- (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RSS-Gen, Clause 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list. For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report.

8.3.2 Test summary

| | | | |
|-----------|----------------|-----------|-----------------|
| Verdict | Pass | | |
| Tested by | Redwanul Rasel | Test date | October 9, 2020 |

8.3.3 Observations, settings and special notes

None

8.3.4 Test data

- Must the EUT be professionally installed? YES NO
- Does the EUT have detachable antenna(s)? YES NO
- If detachable, is the antenna connector(s) non-standard? YES NO N/A

Table 8.3-1: Antenna information

| Antenna type | Manufacturer | Model number | Maximum gain | Connector type |
|--|---------------------|--------------|--------------|----------------|
| Integrated print antenna on PCB, designed by Voxx DEI. | VOXX DEI Canada Ltd | None | 3.0 dBi | None |

8.4 Frequency Hopping Systems requirements, 900 MHz operation

8.4.1 References, definitions and limits

FCC §15.247:

- (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:
- (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.
- (i) For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
- (f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned-off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4. The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Table 8.4-1: Summary of the basic requirements

| $P_{\text{max-pk}} \leq 1 \text{ W}$ | $P_{\text{max-pk}} \leq 0.125 \text{ W}$ |
|--|--|
| $N_{\text{ch}} \geq 75$ | $N_{\text{ch}} \geq 15$ |
| $\Delta f \geq \text{MAX} \{ 25 \text{ kHz}, BW_{20 \text{ dB}} \}$ | $\Delta f \geq \text{MAX} [\text{MAX} \{ 25 \text{ kHz}, 0.67 \times BW_{20 \text{ dB}} \} \text{ OR } \text{MAX} \{ 25 \text{ kHz}, BW_{20 \text{ dB}} \}]$ |
| max. $BW_{20 \text{ dB}}$ not specified | max. $BW_{20 \text{ dB}}$ not specified |
| $t_{\text{ch}} \leq 0.4 \text{ s for } T = 0.4 \times N_{\text{ch}}$ | $t_{\text{ch}} \leq 0.4 \text{ s for } T = 0.4 \times N_{\text{ch}}$ |

Note: t_{ch} = average time of occupancy; T = period; N_{ch} = # hopping frequencies; BW = bandwidth; Δf = hopping channel carrier frequency separation

RSS-247, Clause 5.1:

- a. The bandwidth of a frequency hopping channel is the 20 dB emission bandwidth, measured with the hopping stopped. The system's radio frequency (RF) bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.
- c. For FHSs in the band 902–928 MHz: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20-second period. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10-second period. The maximum 20 dB bandwidth of the hopping channel shall be 500 kHz.

RSS-247, Clause 5.3:

Hybrid systems employ a combination of both frequency hopping and digital transmission techniques and shall comply with the following:

- a. With the digital transmission operation of the hybrid system turned off, the frequency hopping operation shall have an average time of occupancy on any frequency not exceeding 0.4 seconds within a duration in seconds equal to the number of hopping frequencies multiplied by 0.4.

8.4.2 Test summary

| | | | |
|-----------|----------------|-----------|-----------------|
| Verdict | Pass | | |
| Tested by | Redwanul Rasel | Test date | October 9, 2020 |

8.4.3 Observations, settings and special notes

Carrier frequency separation was tested per ANSI C63.10 subclause 7.8.2. Spectrum analyser settings:

| | |
|----------------------|---|
| Resolution bandwidth | Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. |
| Video bandwidth | ≥ RBW |
| Frequency span | Wide enough to capture the peaks of two adjacent channels |
| Detector mode | Peak |
| Trace mode | Max Hold |

Number of hopping frequencies was tested per ANSI C63.10 subclause 7.8.3. Spectrum analyser settings:

| | |
|----------------------|--|
| Resolution bandwidth | To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller. |
| Video bandwidth | ≥ RBW |
| Frequency span | The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen. |
| Detector mode | Peak |
| Trace mode | Max Hold |

Time of occupancy (dwell time) was tested per ANSI C63.10 subclause 7.8.4. Spectrum analyser settings:

| | |
|----------------------|---|
| Resolution bandwidth | shall be ≤ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel. |
| Video bandwidth | ≥ RBW |
| Frequency span | Zero span, centered on a hopping channel. |
| Detector mode | Peak |
| Trace mode | Max Hold |

20 dB and 99% occupied bandwidth was tested per ANSI C63.10 subclause 6.9.2. Spectrum analyser settings:

| | |
|----------------------|--|
| Resolution bandwidth | 1–5% of the 20 dB and 99% occupied bandwidth |
| Video bandwidth | 3 × RBW |
| Frequency span | approximately 2 to 5 times the 20 dB and 99% occupied bandwidth, centered on a hopping channel |
| Detector mode | Peak |
| Trace mode | Max Hold |

8.4.4 Test data

Table 8.4-2: 20 dB bandwidth results

| Frequency, MHz | 20 dB bandwidth, kHz | Limit, KHz | Margin |
|----------------|----------------------|------------|--------|
| 907.095 | 283.1 | 500 | 216.9 |
| 916.395 | 276.0 | 500 | 224.0 |
| 923.835 | 266.0 | 500 | 234.0 |

Table 8.4-3: 99% occupied bandwidth results

| Frequency, MHz | 99% occupied bandwidth, kHz |
|----------------|-----------------------------|
| 907.095 | 286.5 |
| 916.395 | 286.8 |
| 923.835 | 283.3 |

Notes: There is no 99% occupied bandwidth limit in the standard's requirements the measurement results provided for information purposes only.

Table 8.4-4: Carrier frequency separation results

| Carrier frequency separation, kHz | Minimum limit, kHz | Margin, kHz |
|-----------------------------------|--------------------|-------------|
| 619.0 | 283.1 | 335.9 |

Table 8.4-5: Number of hopping frequencies results


| Number of hopping frequencies | Minimum limit |
|-------------------------------|---------------|
| 25 | 25 |

Table 8.4-6: Average time of occupancy results

| Dwell time of each pulse, ms | Number of pulses within period | Total dwell time within period, ms | Limit, ms | Margin, ms |
|------------------------------|--------------------------------|------------------------------------|-----------|------------|
| 100 | 1 | 100 | 400 | 300 |


Notes: Measurement Period is 10 s

Test data, continued

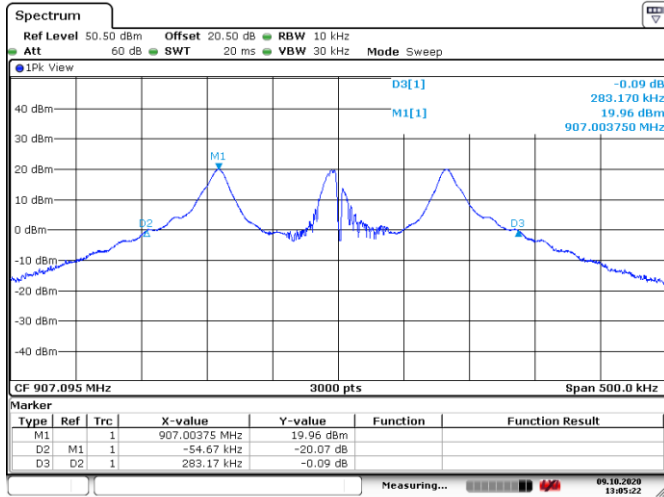


Date: 9.OCT.2020 13:05:23

Figure 8.4-1: 20 dB bandwidth on low channel

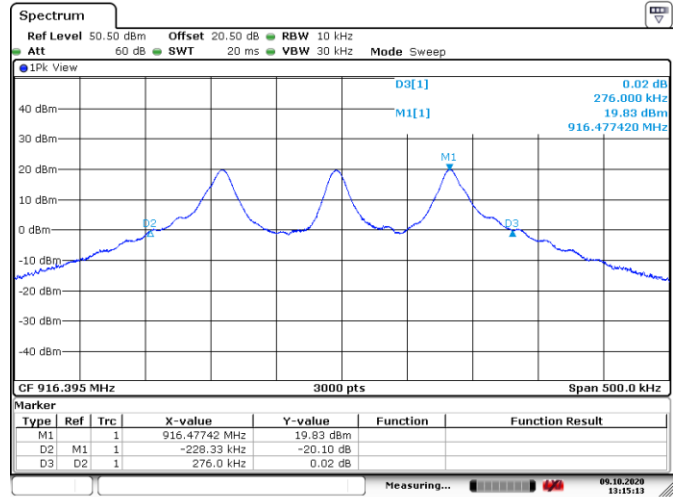

Date: 9.OCT.2020 13:15:13


Figure 8.4-2: 20 dB bandwidth on mid channel

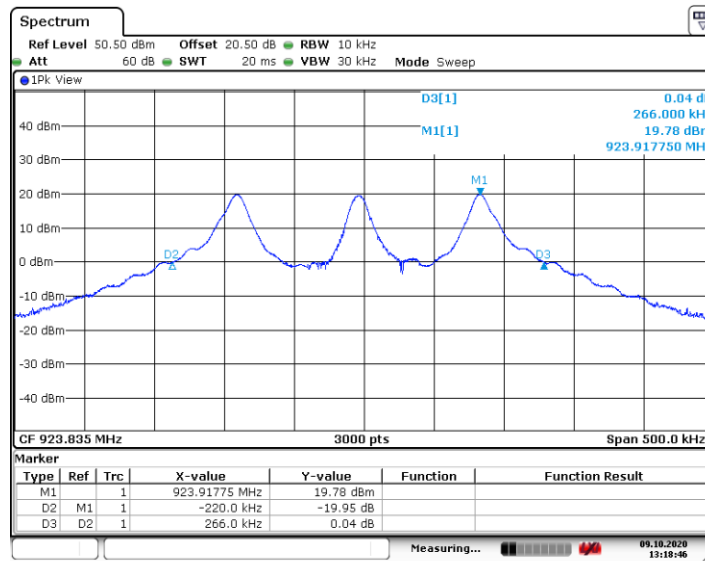

Date: 9.OCT.2020 13:18:46


Figure 8.4-3: 20 dB bandwidth on high channel

Test data, continued

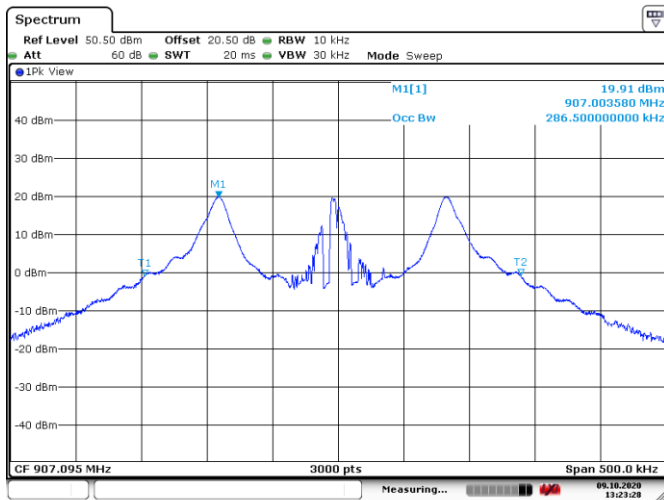


Date: 9.OCT.2020 13:23:28

Figure 8.4-4: 99% Occupied bandwidth on low channel

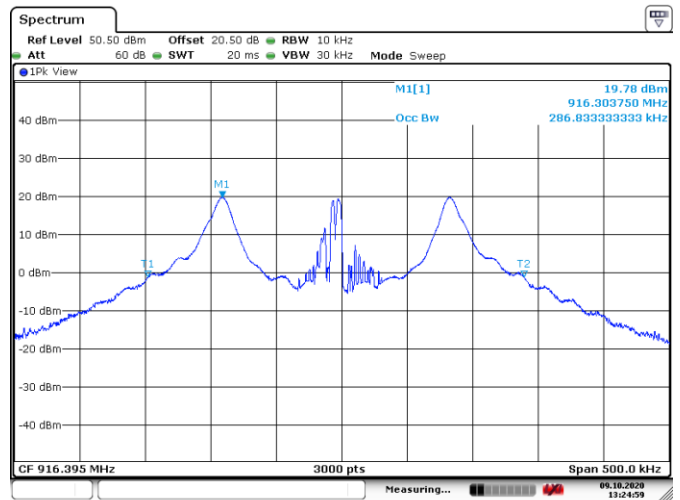

Date: 9.OCT.2020 13:24:59


Figure 8.4-5: 99% Occupied bandwidth on mid channel

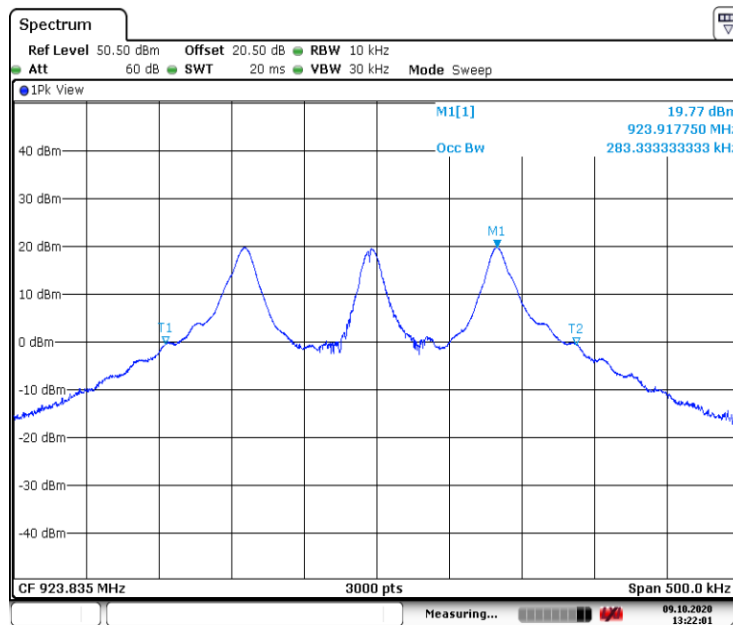

Date: 9.OCT.2020 13:22:01


Figure 8.4-6: 99% Occupied bandwidth on high channel

Test data, continued

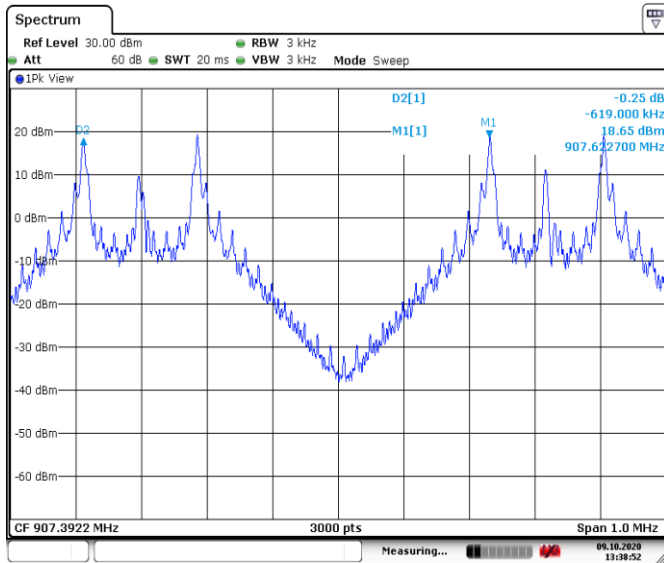


Date: 9 OCT.2020 13:38:52

Figure 8.4-7: Carrier frequency separation

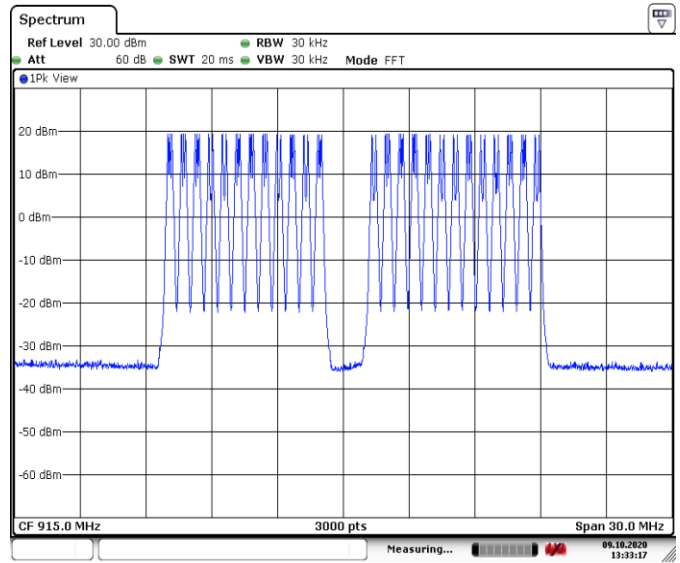


Date: 9 OCT.2020 13:33:18

Figure 8.4-8: Number of hopping channels

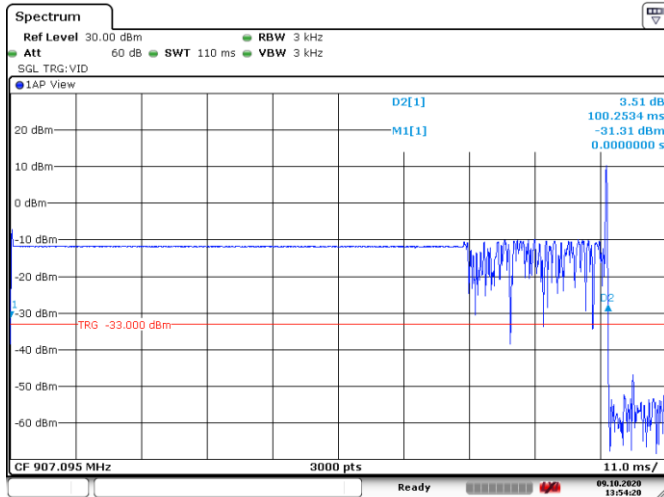

Date: 9 OCT.2020 13:54:21

Figure 8.4-9: Dwell time, 100 ms

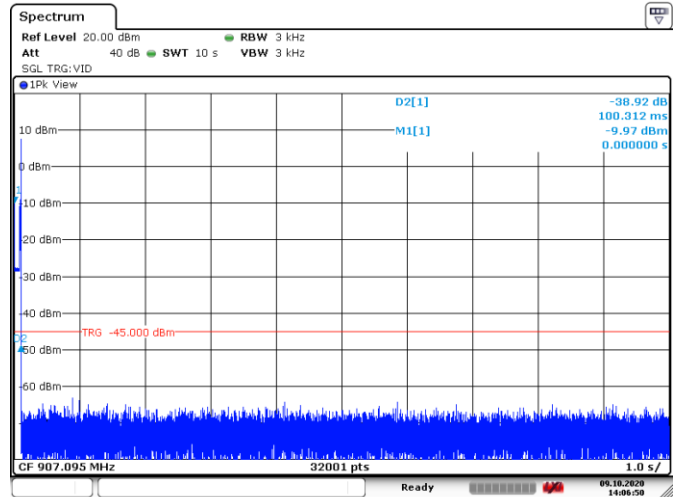

Date: 9 OCT.2020 14:08:50

Figure 8.4-10: Dwell time, 10 s



8.5 Transmitter output power and e.i.r.p. requirements for FHSS 900 MHz

8.5.1 References, definitions and limits

FCC §15.247:

- (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
 - (2) For frequency hopping systems operating in the 902–928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.
 - (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RSS-247, Clause 5.4:

Devices shall comply with the following requirements, where applicable:

- a. For FHSs operating in the band 902–928 MHz, the maximum peak conducted output power shall not exceed 1.0 W, and the e.i.r.p. shall not exceed 4 W if the hopset uses 50 or more hopping channels; the maximum peak conducted output power shall not exceed 0.25 W and the e.i.r.p. shall not exceed 1 W if the hopset uses less than 50 hopping channels.

8.5.2 Test summary

| | | | |
|-----------|----------------|-----------|-------------------|
| Verdict | Pass | | |
| Tested by | Redwanul Rasel | Test date | February 13, 2020 |

8.5.3 Observations, settings and special notes

Conducted output power was tested per ANSI C63.10 subclause 7.8.5. The hopping shall be disabled for this test. Spectrum analyser settings:

| | |
|----------------------|--|
| Resolution bandwidth | > 20 dB bandwidth of the emission being measured |
| Video bandwidth | ≥ RBW |
| Frequency span | approximately 5 times the 20 dB bandwidth, centered on a hopping channel |
| Detector mode | Peak |
| Trace mode | Max Hold |

8.5.4 Test data

Table 8.5-1: Output power and EIRP results

| Frequency, MHz | Conducted output power, dBm | Conducted output power limit, dBm | Margin, dB | Antenna gain, dBi | EIRP, dBm | EIRP limit, dBm | EIRP margin, dB |
|----------------|-----------------------------|-----------------------------------|------------|-------------------|-----------|-----------------|-----------------|
| 907.17 | 20.95 | 23.97 | 3.02 | 3.0 | 23.95 | 29.97 | 6.02 |
| 916.28 | 20.79 | 23.97 | 3.18 | 3.0 | 23.79 | 29.97 | 6.18 |
| 923.92 | 20.69 | 23.97 | 3.28 | 3.0 | 23.69 | 29.97 | 6.28 |

EIRP = Output power + Antenna gain

EIRP limit = Conducted output power limit + Max antenna gain limit (6.0 dBi)

Test data, continued

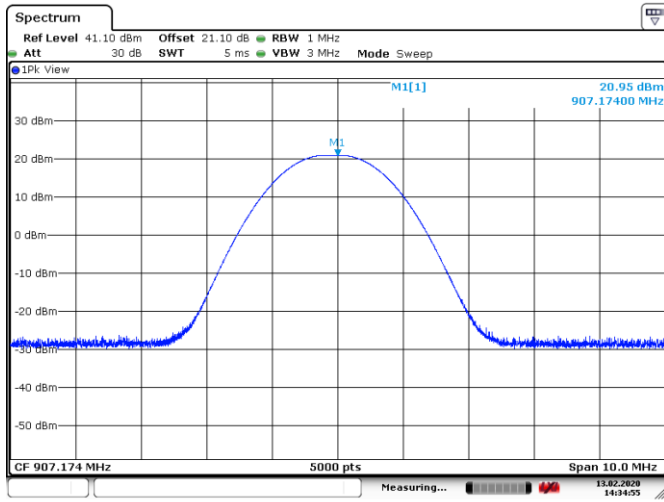


Figure 8.5-1: Output power on low channel

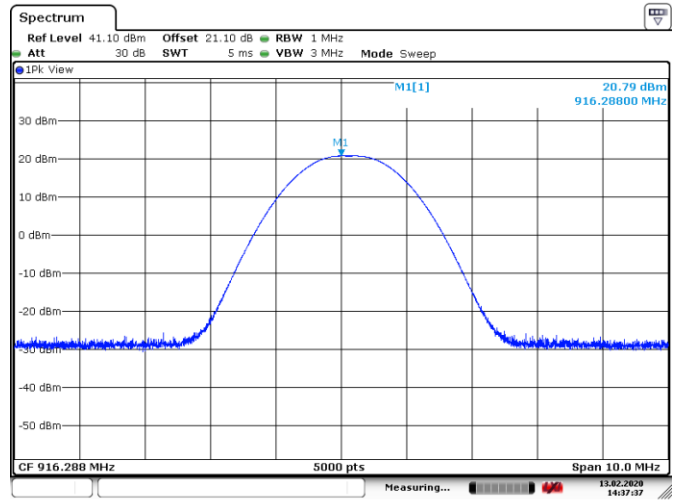


Figure 8.5-2: Output power on mid channel

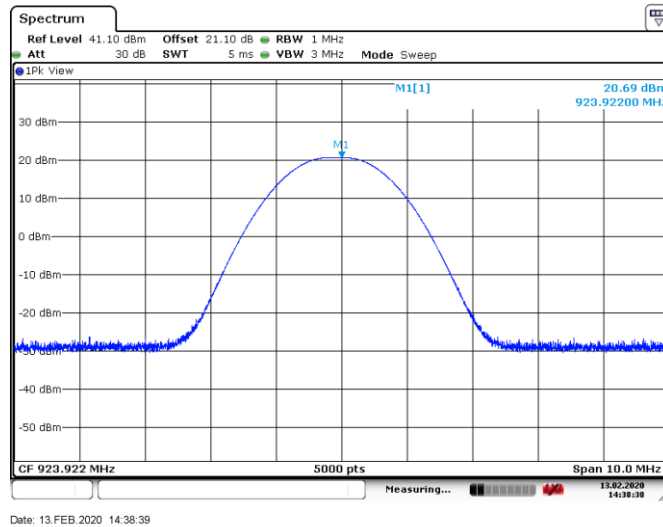


Figure 8.5-3: Output power on high channel

8.6 Spurious (out-of-band) unwanted emissions

8.6.1 References, definitions and limits

FCC §15.247:

- (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247, Clause 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Table 8.6-1: FCC §15.209 and RSS-Gen – Radiated emission limits

| Frequency, MHz | Field strength of emissions | | Measurement distance, m |
|----------------|-----------------------------|---------------------------------|-------------------------|
| | $\mu\text{V/m}$ | $\text{dB}\mu\text{V/m}$ | |
| 0.009–0.490 | 2400/F | $67.6 - 20 \times \log_{10}(F)$ | 300 |
| 0.490–1.705 | 24000/F | $87.6 - 20 \times \log_{10}(F)$ | 30 |
| 1.705–30.0 | 30 | 29.5 | 30 |
| 30–88 | 100 | 40.0 | 3 |
| 88–216 | 150 | 43.5 | 3 |
| 216–960 | 200 | 46.0 | 3 |
| above 960 | 500 | 54.0 | 3 |

Notes: In the emission table above, the tighter limit applies at the band edges.
 For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

References, definitions and limits, continued

Table 8.6-2: ISED restricted frequency bands

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090–0.110 | 12.57675–12.57725 | 399.9–410 | 7.25–7.75 |
| 0.495–0.505 | 13.36–13.41 | 608–614 | 8.025–8.5 |
| 2.1735–2.1905 | 16.42–16.423 | 960–1427 | 9.0–9.2 |
| 3.020–3.026 | 16.69475–16.69525 | 1435–1626.5 | 9.3–9.5 |
| 4.125–4.128 | 16.80425–16.80475 | 1645.5–1646.5 | 10.6–12.7 |
| 4.17725–4.17775 | 25.5–25.67 | 1660–1710 | 13.25–13.4 |
| 4.20725–4.20775 | 37.5–38.25 | 1718.8–1722.2 | 14.47–14.5 |
| 5.677–5.683 | 73–74.6 | 2200–2300 | 15.35–16.2 |
| 6.215–6.218 | 74.8–75.2 | 2310–2390 | 17.7–21.4 |
| 6.26775–6.26825 | 108–138 | 2483.5–2500 | 22.01–23.12 |
| 6.31175–6.31225 | 149.9–150.05 | 2655–2900 | 23.6–24.0 |
| 8.291–8.294 | 156.52475–156.52525 | 3260–3267 | 31.2–31.8 |
| 8.362–8.366 | 156.7–156.9 | 3332–3339 | 36.43–36.5 |
| 8.37625–8.38675 | 162.0125–167.17 | 3345.8–3358 | |
| 8.41425–8.41475 | 167.72–173.2 | 3500–4400 | |
| 12.29–12.293 | 240–285 | 4500–5150 | Above 38.6 |
| 12.51975–12.52025 | 322–335.4 | 5350–5460 | |

Note: Certain frequency bands listed in Table 8.6-2 and above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

Table 8.6-3: FCC restricted frequency bands

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090–0.110 | 16.42–16.423 | 399.9–410 | 4.5–5.15 |
| 0.495–0.505 | 16.69475–16.69525 | 608–614 | 5.35–5.46 |
| 2.1735–2.1905 | 16.80425–16.80475 | 960–1240 | 7.25–7.75 |
| 4.125–4.128 | 25.5–25.67 | 1300–1427 | 8.025–8.5 |
| 4.17725–4.17775 | 37.5–38.25 | 1435–1626.5 | 9.0–9.2 |
| 4.20725–4.20775 | 73–74.6 | 1645.5–1646.5 | 9.3–9.5 |
| 6.215–6.218 | 74.8–75.2 | 1660–1710 | 10.6–12.7 |
| 6.26775–6.26825 | 108–121.94 | 1718.8–1722.2 | 13.25–13.4 |
| 6.31175–6.31225 | 123–138 | 2200–2300 | 14.47–14.5 |
| 8.291–8.294 | 149.9–150.05 | 2310–2390 | 15.35–16.2 |
| 8.362–8.366 | 156.52475–156.52525 | 2483.5–2500 | 17.7–21.4 |
| 8.37625–8.38675 | 156.7–156.9 | 2690–2900 | 22.01–23.12 |
| 8.41425–8.41475 | 162.0125–167.17 | 3260–3267 | 23.6–24.0 |
| 12.29–12.293 | 167.72–173.2 | 3332–3339 | 31.2–31.8 |
| 12.51975–12.52025 | 240–285 | 3345.8–3358 | 36.43–36.5 |
| 12.57675–12.57725 | 322–335.4 | 3600–4400 | Above 38.6 |
| 13.36–13.41 | | | |

8.6.2 Test summary

| | | | |
|-----------|----------------|-----------|--|
| Verdict | Pass | | |
| Tested by | Redwanul Rasel | Test date | Jan 14, Feb 13, Oct 9 and Nov 13, 2020 |

8.6.3 Observations, settings and special notes

- As part of the current assessment, the test range of 9 kHz to 10th harmonic has been fully considered and compared to the actual frequencies utilized within the EUT. Since the EUT contains a transmitter in the GHz range, the EUT has been deemed compliant without formal testing in the 9 kHz to 30 MHz test range, therefore formal test results (tabular data and/or plots) are not provided within this test report.
- EUT was set to transmit with 100 % duty cycle.
- Radiated measurements were performed at a distance of 3 m.
- Since fundamental power was tested using the maximum peak conducted output power procedure to demonstrate compliance, the spurious emissions limit is -20 dBc/100 kHz.

Spectrum analyser settings for radiated measurements within restricted bands below 1 GHz:

| | |
|-----------------------|----------|
| Resolution bandwidth: | 100 kHz |
| Video bandwidth: | 300 kHz |
| Detector mode: | Peak |
| Trace mode: | Max Hold |

Spectrum analyser settings for peak radiated measurements within restricted bands above 1 GHz:

| | |
|-----------------------|----------|
| Resolution bandwidth: | 1 MHz |
| Video bandwidth: | 3 MHz |
| Detector mode: | Peak |
| Trace mode: | Max Hold |


Spectrum analyser settings for average radiated measurements within restricted bands above 1 GHz:

| | |
|-----------------------|----------|
| Resolution bandwidth: | 1 MHz |
| Video bandwidth: | 10 Hz |
| Detector mode: | Peak |
| Trace mode: | Max Hold |

Spectrum analyser settings for conducted spurious emissions measurements:


| | |
|-----------------------|----------|
| Resolution bandwidth: | 100 kHz |
| Video bandwidth: | 300 kHz |
| Detector mode: | Peak |
| Trace mode: | Max Hold |

Test data, Conducted measurements

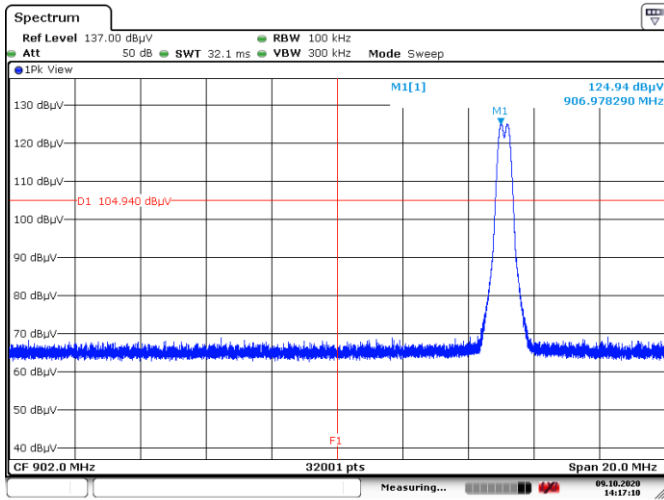


Date: 9.OCT.2020 14:17:10

Figure 8.6-1: Lower band edge emission, Tx on low channel

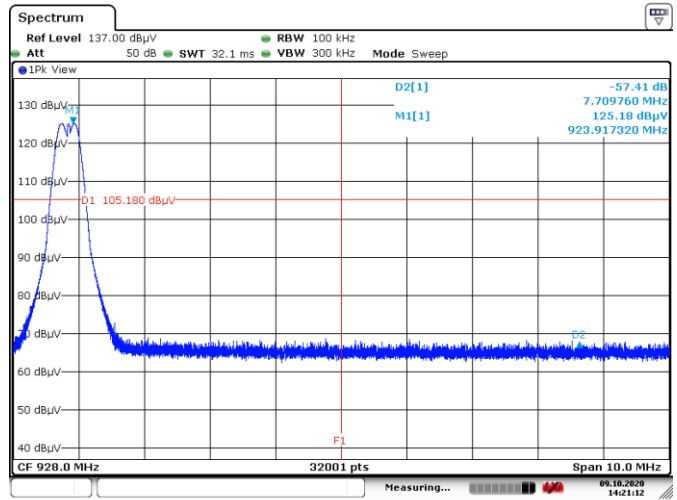


Date: 9.OCT.2020 14:21:12

Figure 8.6-2: Upper band edge emission, Tx on high channel

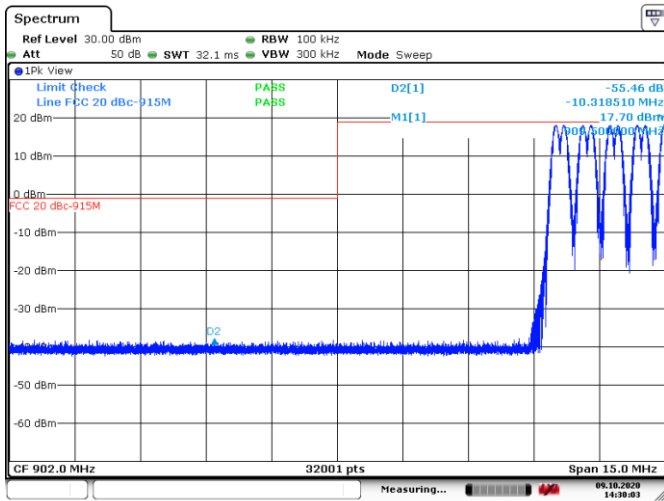

Date: 9.OCT.2020 14:30:03


Figure 8.6-3: Lower band edge emission, Tx hopping on

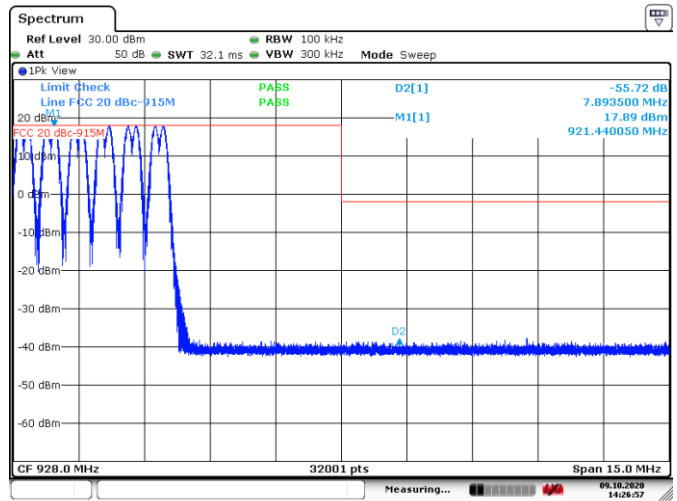

Date: 9.OCT.2020 14:28:57


Figure 8.6-4: Upper band edge emission, Tx hopping on

Test data, Conducted measurements, Continued

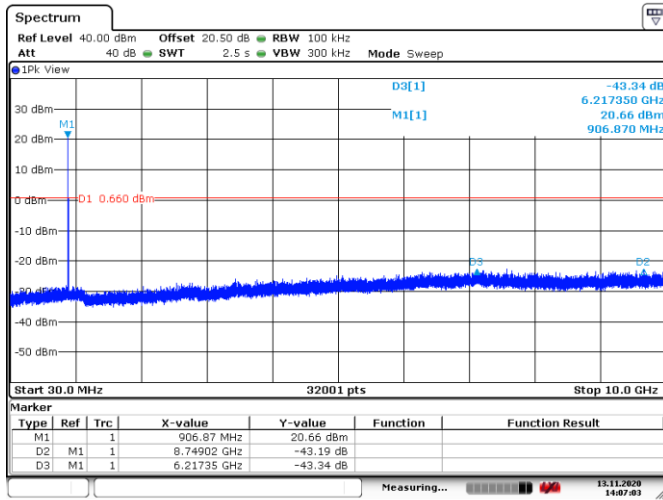


Date: 13.NOV.2020 14:07:03

Figure 8.6-5: Conducted spurious emission, low channel

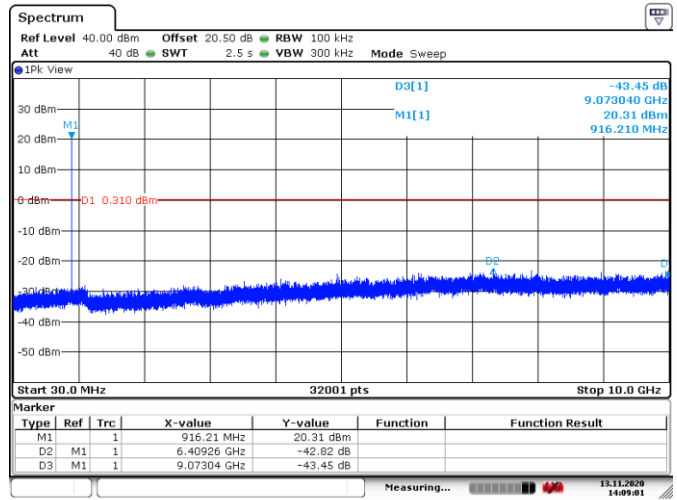

Date: 13.NOV.2020 14:09:01


Figure 8.6-6: Conducted spurious emission, mid channel

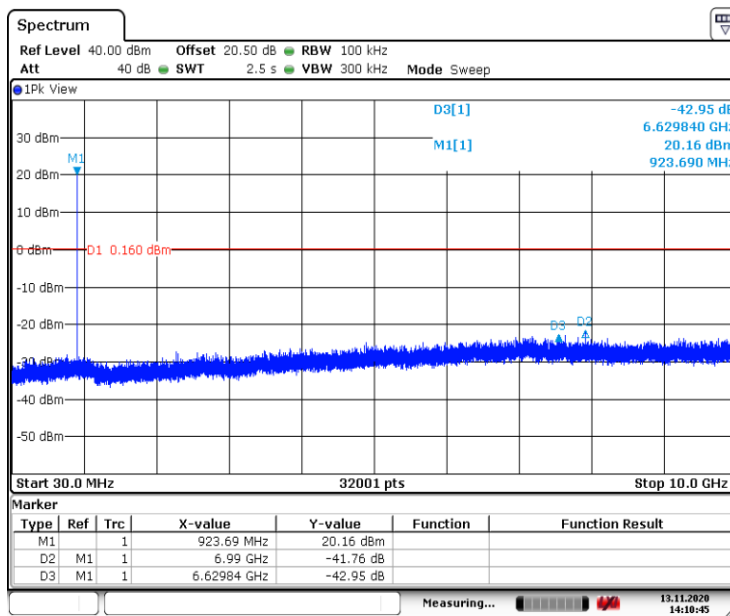

Date: 13.NOV.2020 14:10:46

Figure 8.6-7: Conducted spurious emission, high channel

Test data, continued

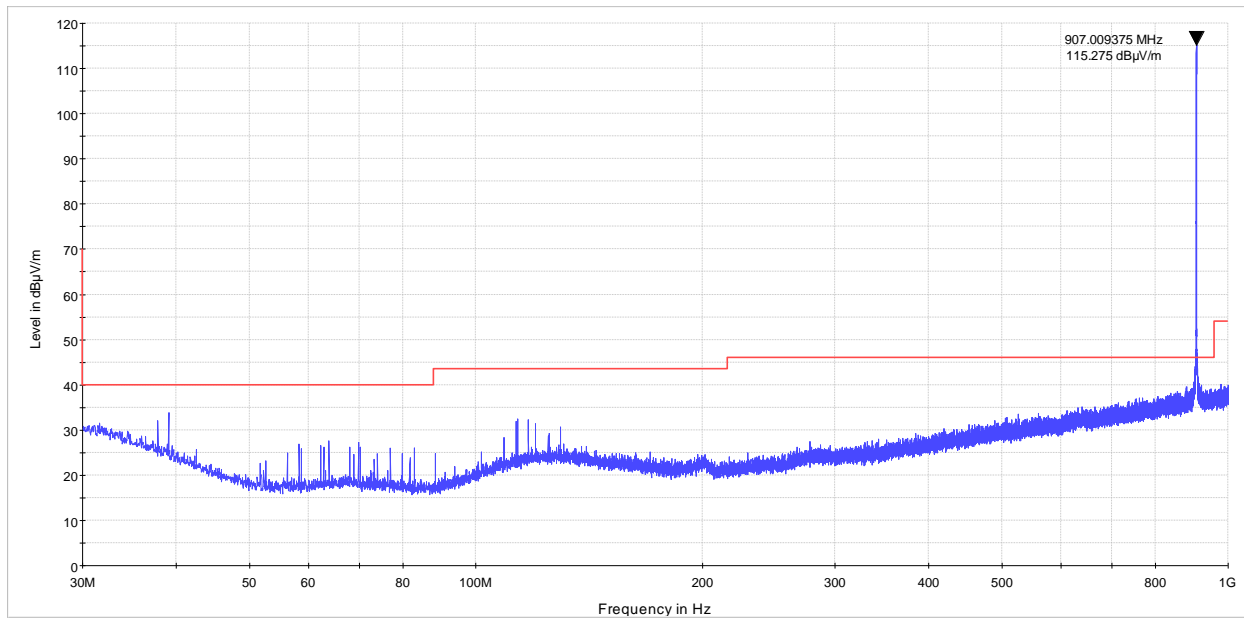


NEX-390921 - Jan 14, 2020 - DEI 6867T - Low Channel

— PK+_MAXH
— FCC 15.209 and RSS-210 limit line

Figure 8.6-8: Radiated spurious (out-of-band) emissions, below 1 GHz low channel


8.6.3 Test data, Continued

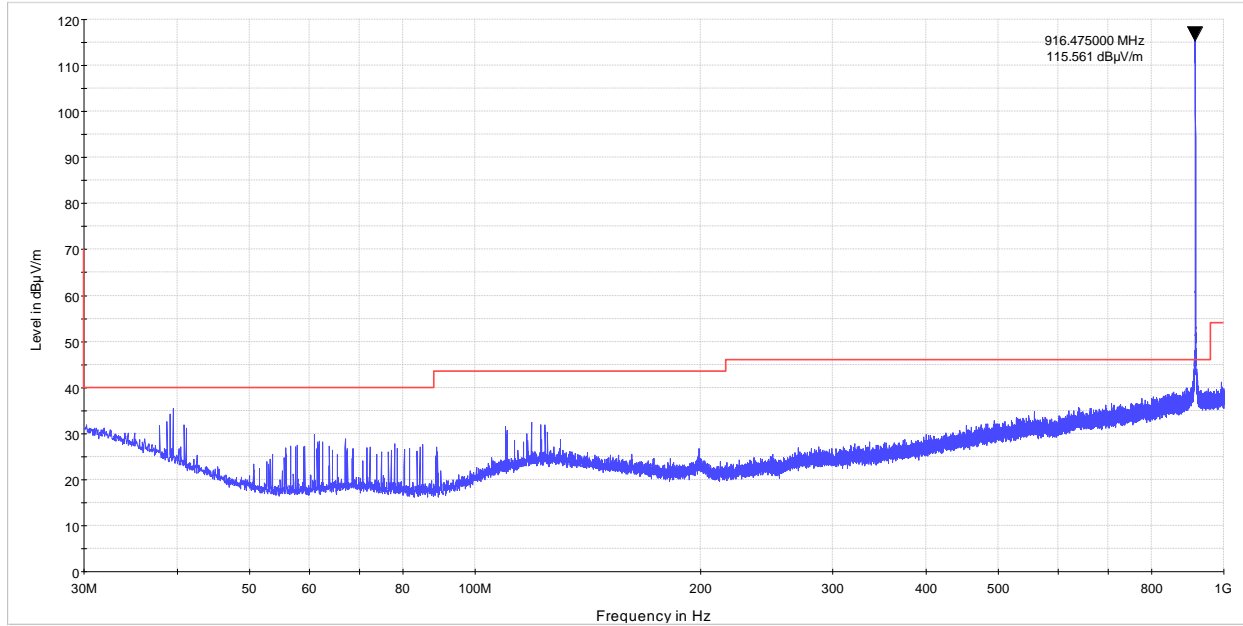

NEX-390921 - Jan 14, 2020 - DEI 6867T - Mid Channel
— PK+, MAXH
— FCC 15.209 and RSS-210 limit line

Figure 8.6-9: Radiated spurious (out-of-band) emissions, below 1 GHz mid channel


8.6.3 Test data, Continued

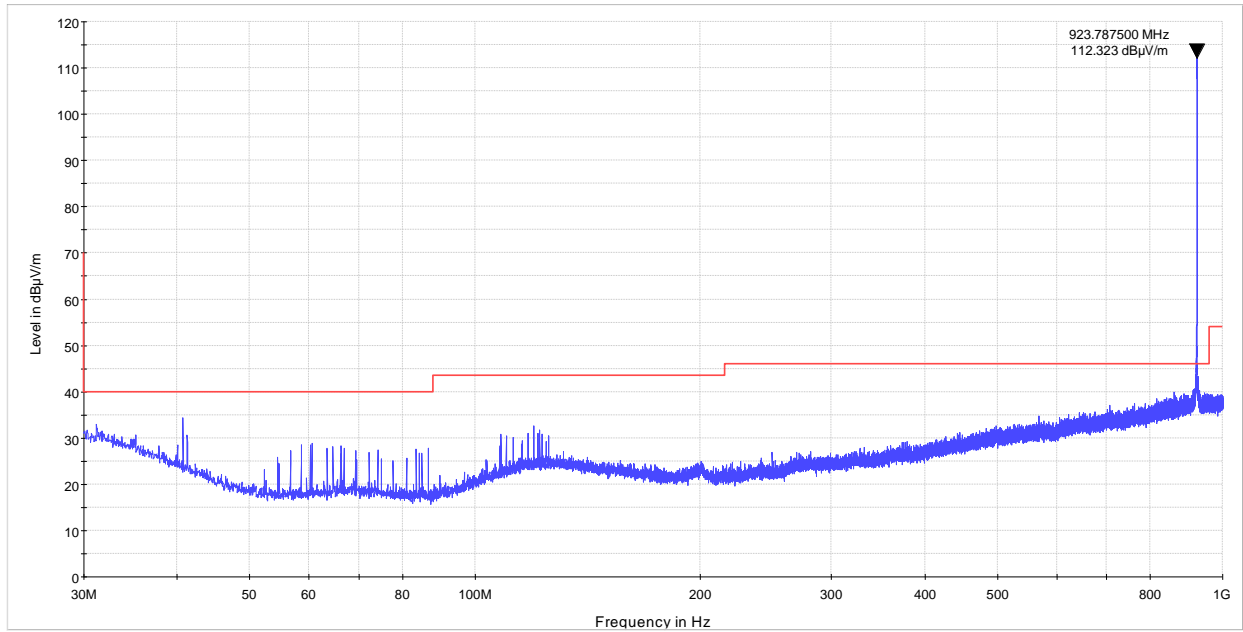

NEX-390921 - Jan 14, 2020 - DEI 6867T - High Channel
— PK+ .MAXH
— FCC 15.209 and RSS-210 limit line

Figure 8.6-10: Radiated spurious (out-of-band) emissions, below 1 GHz high channel


8.6.3 Test data, Continued

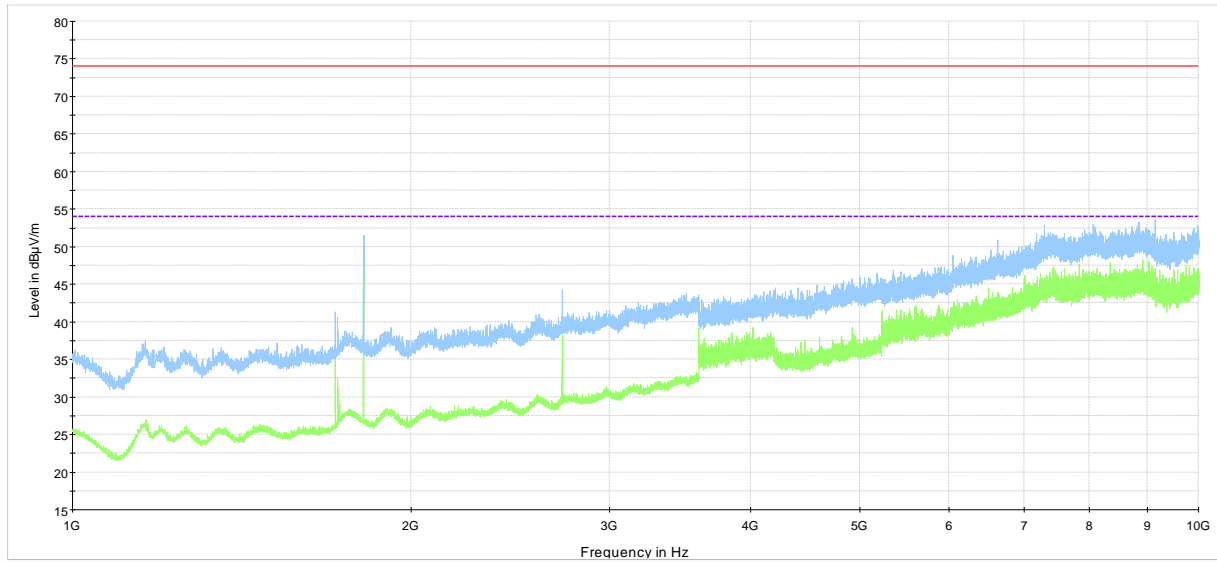

NEX-392950 - Feb 13, 2020 - DEI6867T - Low Channel
Preview Result 2-AVG
Preview Result 1-PK+
FCC 15.209 and RSS-210 limit line pk
FCC 15.209 and RSS-210 limit line

Figure 8.6-11: Radiated spurious (out-of-band) emissions, above 1 GHz low channel


8.6.3 Test data, Continued

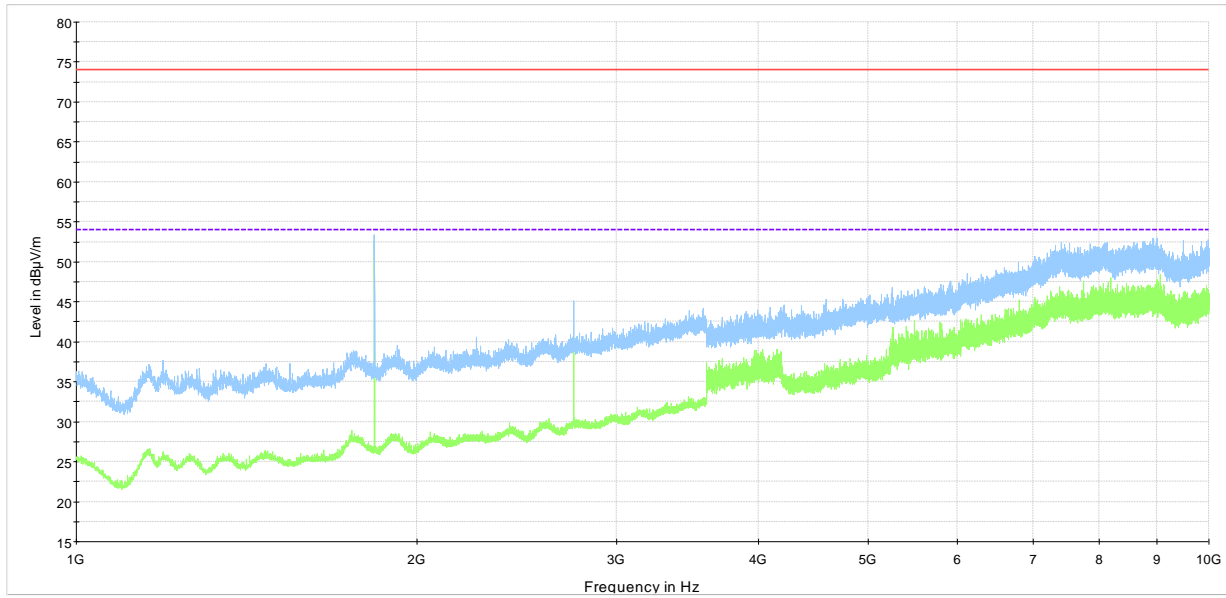

NEX-392950 - Feb 13, 2020 - DEI6867T - Mid Channel
Preview Result 2-AVG
Preview Result 1-PK+
FCC 15.209 and RSS-210 limit line pk
FCC 15.209 and RSS-210 limit line

Figure 8.6-12: Radiated spurious (out-of-band) emissions, above 1 GHz, mid channel

8.6.3 Test data, Continued

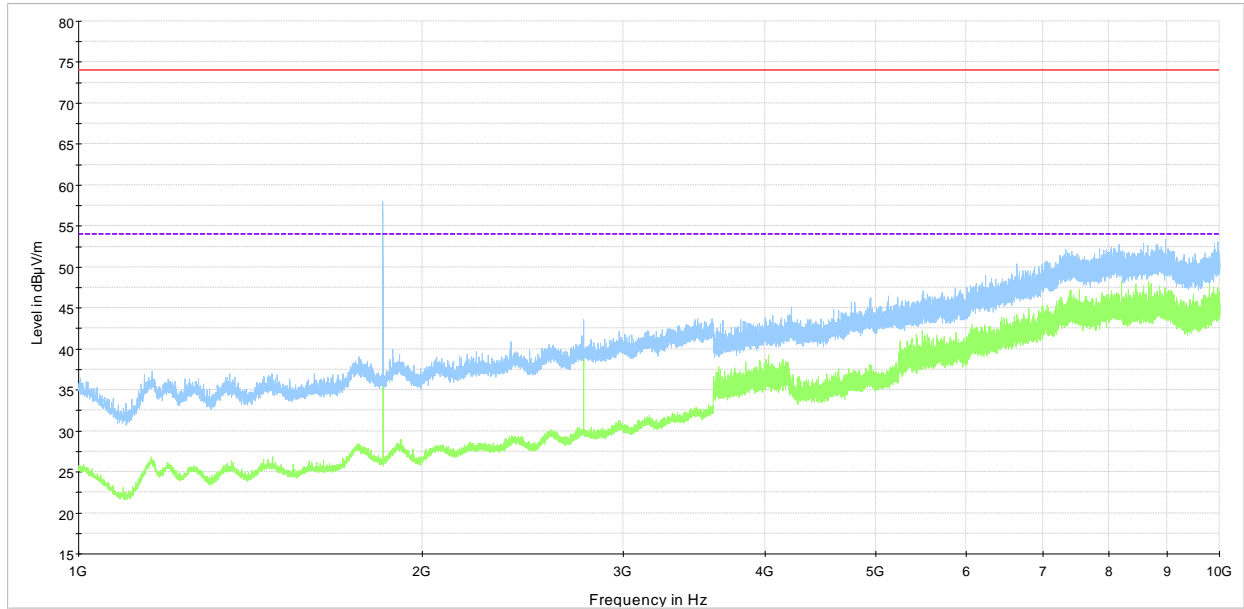

NEX-392950 - Feb 13, 2020 - DEI6867T - High Channel
 Preview Result 2-AVG
 Preview Result 1-PK+
 FCC 15.209 and RSS-210 limit line pk
 FCC 15.209 and RSS-210 limit line

Figure 8.6-13: Radiated spurious (out-of-band) emissions, above 1 GHz, high channel

Table 8.6-4: Radiated field strength measurement results

| Channel | Frequency, MHz | Peak Field strength, dBµV/m | | Margin, dB | Average Field strength, dBµV/m | | Margin, dB |
|---------|----------------|-----------------------------|-------|------------|--------------------------------|-------|------------|
| | | Measured | Limit | | Measured | Limit | |
| Low | 9148.75 | 53.54 | 74.00 | 20.46 | 47.10 | 54.00 | 6.90 |
| Mid | 2749.37 | 45.17 | 74.00 | 28.83 | 40.54 | 54.00 | 13.46 |
| High | 2771.50 | 43.61 | 74.00 | 30.39 | 38.87 | 54.00 | 15.13 |

Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.
 FCC 15.209 limit is not applicable to the frequencies outside of the restricted bands.

Section 9 EUT photos

9.1 External photos



Figure 9.1-1: Top and bottom view photos



Figure 9.1-2: Connector end view photos



Figure 9.1-3: Antenna end view photos

(End of the test report)