




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency	Antenna	Conducted Power	Duty Factor	Total Power	Limit	Verdict
		(MHz)		(dBm)	(dB)	(dBm)	(dBm)	
NVNT	BLE	2402	Ant1	3.729	0	3.729	30	Pass
NVNT	BLE	2442	Ant1	3.587	0	3.587	30	Pass
NVNT	BLE	2480	Ant1	3.796	0	3.796	30	Pass



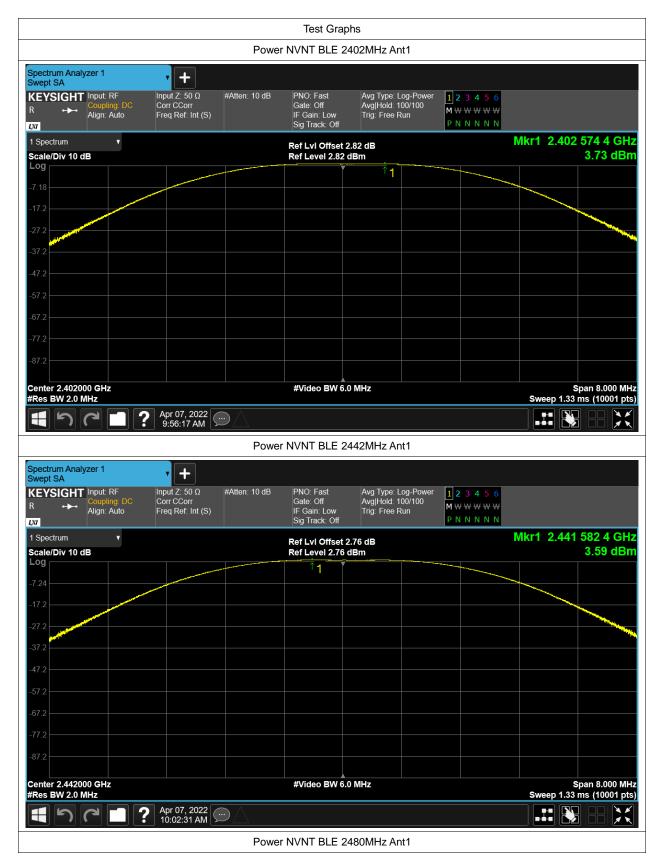









-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant1	1.144	0.5	Pass
NVNT	BLE	2442	Ant1	1.14	0.5	Pass
NVNT	BLE	2480	Ant1	1.142	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	2.044890181	
NVNT	BLE	2442	Ant1	2.05084229	
NVNT	BLE	2480	Ant1	2.06335233	









Tel: +86-755-23118282, Fax: +86-755-23116366





Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-13.868	8	Pass
NVNT	BLE	2442	Ant1	-14.018	8	Pass
NVNT	BLE	2480	Ant1	-13.7	8	Pass













Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-60.27	-20	Pass
NVNT	BLE	2480	Ant1	-54.48	-20	Pass













Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-58.8	-20	Pass
NVNT	BLE	2442	Ant1	-59.18	-20	Pass
NVNT	BLE	2480	Ant1	-56.89	-20	Pass



