



**Test Report:** 6W61450


**Applicant:** Digital Security Controls, a Division of Tyco Safety Products Canada Ltd.  
3301 Langstaff Road,  
Concord, Ontario  
L4K 4L2

**Apparatus:** WS4945NA

**FCC ID:** F5306WS4945

**In Accordance With:** FCC Part 15 Subpart C, 15.231  
Periodic operation in the band 40.66-40.70MHz and above 70 MHz.

**Tested By:** Nemko Canada Inc.  
303 River Road  
Ottawa, Ontario  
K1V 1H2

**Authorized By:**   
Jin Xu, Wireless Specialist

**Date:** March 6, 2006

**Total Number of Pages:** 18

## Report Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C. Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

The assessment summary is as follows:

<b>Apparatus Assessed:</b>	WS4945NA
<b>Specification:</b>	FCC Part 15 Subpart C, 15.231
<b>Compliance Status:</b>	Complies
<b>Exclusions:</b>	None
<b>Non-compliances:</b>	None
<b>Report Release History:</b>	Original Release

Author: Jason Nixon, Telecom Specialist

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025.

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

---

## TABLE OF CONTENTS

<b>Report Summary</b> .....	<b>2</b>
<b>Section 1 : Equipment Under Test</b> .....	<b>4</b>
1.1 Product Identification .....	4
1.2 Samples Submitted for Assessment.....	4
1.3 Theory of Operation .....	4
1.4 Technical Specifications of the EUT .....	5
1.5 Block Diagram of the EUT.....	5
<b>Section 2 : Test Conditions</b> .....	<b>6</b>
2.1 Specifications .....	6
2.2 Deviations From Laboratory Test Procedures .....	6
2.3 Test Environment .....	6
2.4 Test Equipment.....	6
<b>Section 3 : Observations</b> .....	<b>7</b>
3.1 Modifications Performed During Assessment .....	7
3.2 Record Of Technical Judgements .....	7
3.3 EUT Parameters Affecting Compliance .....	7
3.4 Test Deleted.....	7
3.5 Additional Observations .....	7
<b>Section 4 : Results Summary</b> .....	<b>8</b>
4.1 FCC Part 15 Subpart C : Test Results .....	9
<b>Appendix A : Test Results</b> .....	<b>10</b>
Clause 15.209(a) Radiated Emissions within Restricted Bands .....	10
Clause 15.231(a) Conditions for intentional radiators to comply with periodic operation .....	11
Clause 15.231(b) Radiated Emissions .....	13
Clause 15.231(c) 20dB Bandwidth.....	16
<b>Appendix B : Setup Photographs</b> .....	<b>17</b>
<b>Appendix C : Block Diagram of Test Setups</b> .....	<b>18</b>

## **Section 1 : Equipment Under Test**

### **1.1 Product Identification**

The Equipment Under Test was identified as follows:

WS4945NA Wireless Door/Window Contact

### **1.2 Samples Submitted for Assessment**

The following samples of the apparatus have been submitted for type assessment:

<b>Sample No.</b>	<b>Description</b>	<b>Serial No.</b>
1	Wireless Door/Window Contact	2EA0C4
3	Wireless Door/Window contact modified for constant carrier	—

The first samples were received on: February 20, 2006


### **1.3 Theory of Operation**

The WS4945NA Wireless Door/Window Contact is a 433.92MHz transmitter used with DSC security systems to monitor doors and windows. Whenever the door or window are opened or closed the transmitter sends a code to the security system.

### 1.4 Technical Specifications of the EUT

<b>Manufacturer:</b>	Digital Security Controls
<b>Operating Frequency:</b>	433.92MHz
<b>Emission Designator:</b>	P1D
<b>Modulation:</b>	On/Off Keying
<b>Antenna Data:</b>	Integral
<b>Power Source:</b>	3VDC CR2 Battery

### 1.5 Block Diagram of the EUT

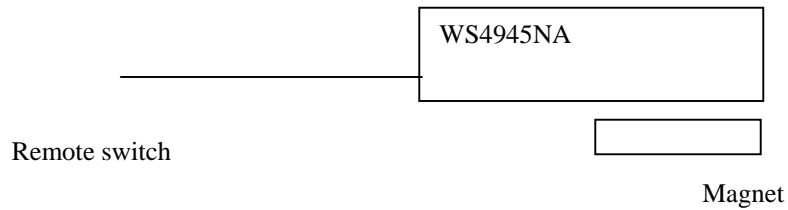

## Section 2 : Test Conditions

### 2.1 Specifications

The apparatus was assessed against the following specifications:

FCC Part 15 Subpart C, 15.231

Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

### 2.2 Deviations From Laboratory Test Procedures

No deviations were made from laboratory test procedures.

### 2.3 Test Environment

All tests were performed under the following environmental conditions:

Temperature range : 15 – 30 °C  
 Humidity range : 20 - 75 %  
 Pressure range : 86 - 106 kPa  
 Power supply range : +/- 5% of rated voltages

### 2.4 Test Equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next Cal.
Spectrum Analyzer	Rohde & Schwarz	FSU	FA001877	May 17/06
Spectrum Analyzer	Hewlett-Packard	8565E	FA000981	March 10/06
Horn Antenna #2	EMCO	3115	FA000825	Dec. 16/06
Biconical (1) Antenna	EMCO	3109	FA000805	April 22/06
Log Periodic Antenna #1	EMCO	LPA-25	FA000477	Aug. 29/06
1.0 – 2.0 GHz Amplifier	JCA	12-400	FA001498	July 14/06
2.0 – 4.0 GHz Amplifier	JCA	24-600	FA001496	July 14/06
4.0 – 8.0 GHz Amplifier	JCA	48-600	FA001497	July 14/06

## **Section 3 : Observations**

### **3.1 Modifications Performed During Assessment**

No modifications were performed during assessment.

### **3.2 Record Of Technical Judgements**

No technical judgements were made during the assessment.

### **3.3 EUT Parameters Affecting Compliance**

The user of the apparatus could not alter parameters that would affect compliance.

### **3.4 Test Deleted**

No Tests were deleted from this assessment.

### **3.5 Additional Observations**

There were no additional observations made during this assessment.

## **Section 4 : Results Summary**

This section contains the following:

FCC Part 15 Subpart C : Test Results

The column headed 'Required' indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

- N No : not applicable / not relevant.
- Y Yes : Mandatory i.e. the apparatus shall conform to these tests.
- N/T Not Tested, mandatory but not assessed. (See section 3.4 Test deleted)

The results contained in this section are representative of the operation of the apparatus as originally submitted.



**4.1 FCC Part 15 Subpart C : Test Results**

Part 15	Test Description	Required	Result
15.207(a)	Powerline Conducted Emissions	N (1)	
15.209(a)	Radiated Emissions within Restricted Bands	Y	PASS
15.231(a)(1)	Manually operated transmitter	N	
15.231(a)(2)	Automatically activated transmitter	Y	PASS
15.231(a)(3)	Periodic transmissions at regular predetermined intervals	Y	PASS
15.231(a)(4)	Radiators used in cases of emergency	Y	PASS
15.231(a)(5)	Set-up information for security systems	N	
15.231(b)	Radiated Emissions	Y	PASS
15.231(c)	20dB Bandwidth	Y	PASS
15.231(d)	Devices operating within the frequency band 40.66-40.70 MHz	N	
15.231(e)	Radiated emissions for Periodic radiators	N	

Notes:

(1) The EUT is battery operated.

## Appendix A : Test Results

### Clause 15.209(a) Radiated Emissions within Restricted Bands

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvoltsmeter)	Measurement Distance (meters)
0.009-0.490	2400/F (kHz)	300
0.490-1.705	24000/F (kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

### Test Conditions:

<b>Sample Number:</b>	3	<b>Temperature:</b>	10
<b>Date:</b>	February 27, 2006	<b>Humidity:</b>	46
<b>Modification State:</b>	0	<b>Tester:</b>	Jason Nixon
		<b>Laboratory:</b>	OATS

### Test Results:

See Attached Table for Results

### Additional Observations:

The Spectrum was searched from 30MHz to the 4.5GHz.

These results apply to emissions found in the Restricted bands defined in FCC Part 15 Subpart C, 15.205.

The EUT was measured on three orthogonal axis. The EUT was tested using fresh new batteries.

All measurements were performed using a Peak Detector with 100kHz RBW/VBW below 1GHz and a 1MHz RBW/VBW above 1GHz at a distance of 3 meters.

Only measurements within 20dB below the limit have been reported.

Frequency (MHz)	Antenna	Polarity	RCVD Signal (dBuV)	Ant. Factor (dB)	Amp. Gain (dB)	Duty Cycle Corr.	Cable Loss (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	
1	1301.7600	Horn2	V	77.8	25.4	48.0	-17.4	3.4	58.6	74.0	15.4	Peak
									41.2	54.0	12.8	Average
2	1301.7600	Horn2	H	71.6	25.3	48.0	-17.4	3.4	52.3	74.0	21.7	Peak
									34.9	54.0	19.1	Average

**Clause 15.231(a) Conditions for intentional radiators to comply with periodic operation**

The provisions of this section are restricted to periodic operation within the band 40.66-40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:

- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
- (4) Intentional radiators, which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.
- (5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.


**Test Conditions:**

<b>Sample Number:</b>	1	<b>Temperature:</b>	20
<b>Date:</b>	February 27, 2006	<b>Humidity:</b>	10
<b>Modification State:</b>	0	<b>Tester:</b>	Jason Nixon
		<b>Laboratory:</b>	Wireless

**Test Results:**

- (1) The EUT is not manual activated.
- (2) See attached plot for the time for transmission.
- (3) Supervisory packets are sent every 64mins. A packet transmission time is 572.4msec.
- (4) The EUT is used in a security system but the transmission of packets does not occur for the entire alarm condition.
- (5) The transmission time does not exceed the timings of (a)(1) or (a)(2).

Total Transmission time

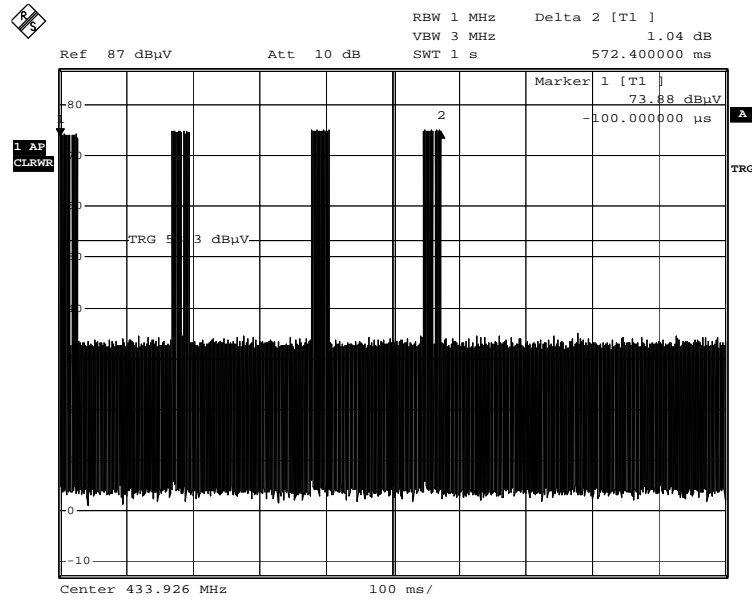

Total time per transmission

Date: 27.FEB.2006 15:22:55

**Clause 15.231(b) Radiated Emissions**

In addition to the provisions of 15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	1,250 to 3,750	125 to 375
174-260	3,750	375
260-470	3,750 to 12,500	375 to 1,250
Above 470	12,500	1,250

**Test Conditions:**

<b>Sample Number:</b>	3	<b>Temperature:</b>	10
<b>Date:</b>	February 27, 2006	<b>Humidity:</b>	46
<b>Modification State:</b>	0	<b>Tester:</b>	Jason Nixon
		<b>Laboratory:</b>	OATS

**Test Results:**

See Attached Table for Results

**Additional Observations:**

The Spectrum was searched from 30MHz to the 4.5GHz.

The EUT was measured on three orthogonal axis. The EUT was tested with fresh new batteries.

All measurements were performed using a Peak Detector with 100kHz RBW/VBW below 1GHz and a 1MHz RBW/VBW above 1GHz at a distance of 3 meters.

Only measurements within 20dB below the limit have been reported.

Freq. (MHz)	Ant	Pol. V/H	RCVD Signal (dBμV)	Ant. Factor (dB)	Amp. Gain (dB)	Duty Cycle Corr. (dB)	Cable Loss (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)
433.9200	LP1	V	77.7	16.1	N/A	-17.4	3.1	79.5	80.8	1.3
433.9200	LP1	H	77.3	16.8	N/A	-17.4	3.1	79.8	80.8	1.0


Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole

**Duty Cycle:**

$$\begin{aligned} \text{Duty Cycle} &= 20\log((\text{header pulse} + \text{sync pulses} + \text{data pulses})/100\text{msec}) \\ &= 20\log((2.5\text{msec} + 1\text{msec} + 10\text{msec})/100\text{msec}) \\ &= -17.4\text{dB} \end{aligned}$$

Sync = 4 x 250usec


Data = 40 x 250usec

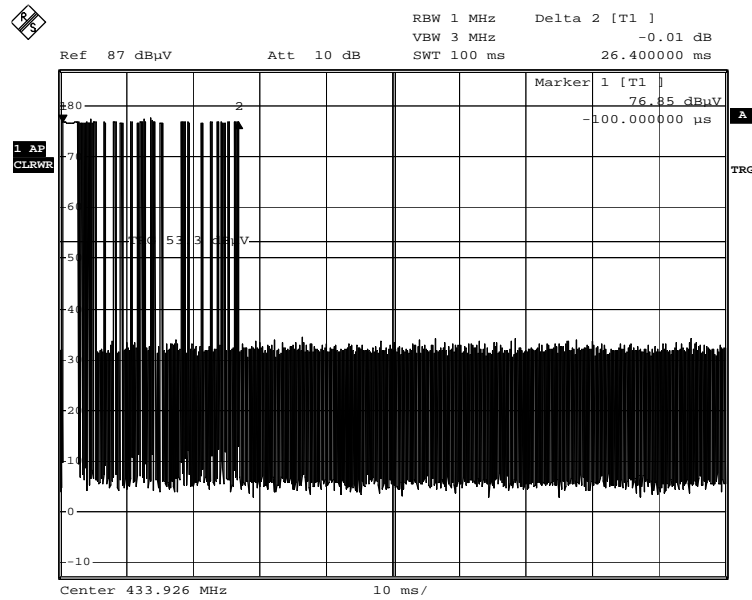

On-time in 100msec

Date: 27.FEB.2006 15:21:39


### Header Pulse

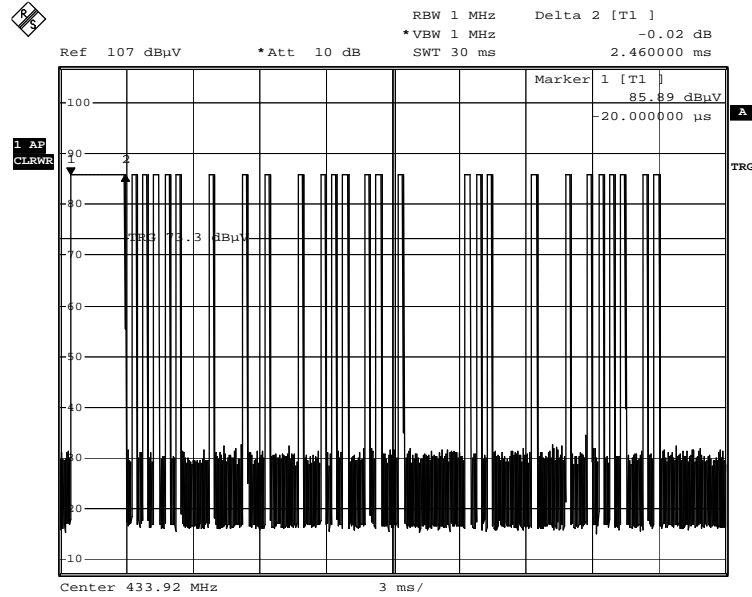

Sync Pulse

Date: 27.FEB.2006 18:44:17

### Pulse Time

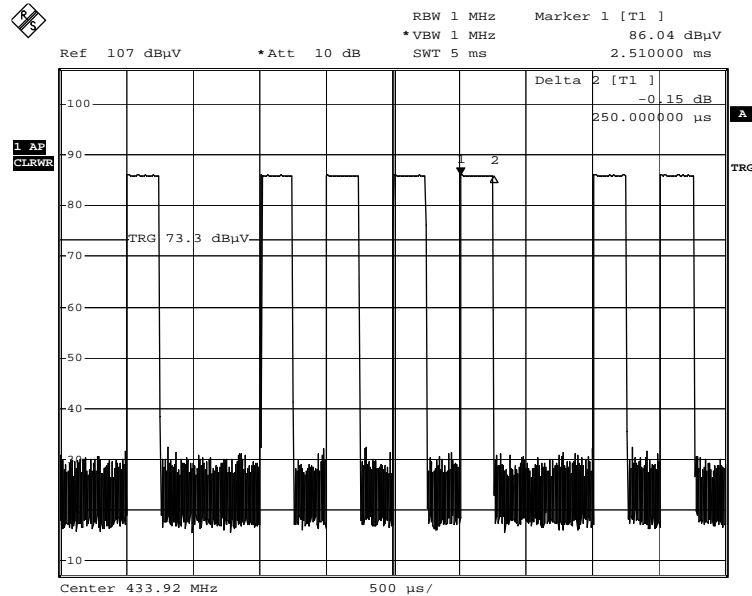

Puls time

Date: 27.FEB.2006 18:45:21

**Clause 15.231(c) 20dB Bandwidth**


The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

**Test Conditions:**

<b>Sample Number:</b>	1	<b>Temperature:</b>	20
<b>Date:</b>	February 27, 2006	<b>Humidity:</b>	10
<b>Modification State:</b>	0	<b>Tester:</b>	Jason Nixon
		<b>Laboratory:</b>	Wireless

**Test Results:**

**20dB Bandwidth:**

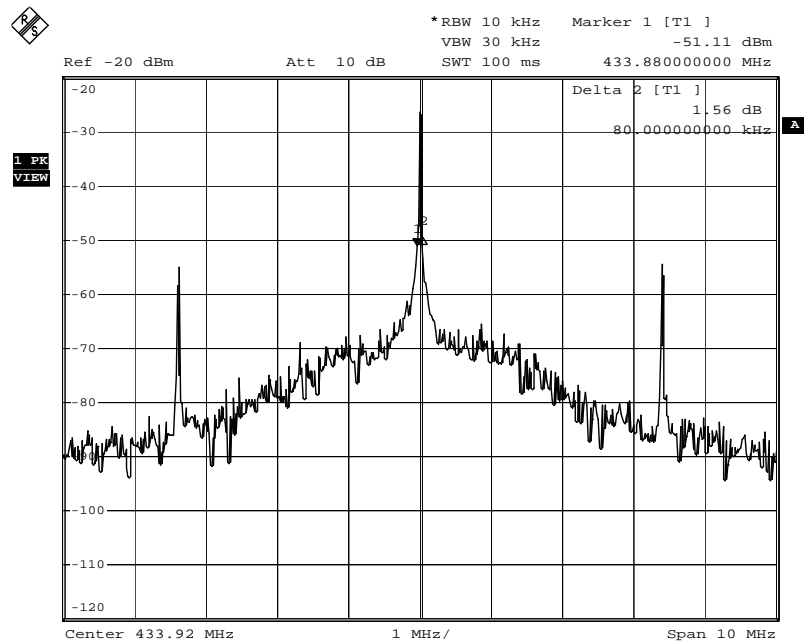

Date: 2.MAR.2006 20:49:29



## Appendix B : Setup Photographs

### Spurious Emissions Setup:



## Appendix C : Block Diagram of Test Setups

### Test Site For Radiated Emissions

