



**MEASUREMENT REPORT
LTE**

Applicant Name:

Digital Security Controls
A Division of Tyco Safety Products Canada Ltd
3301 Langstaff Road
Concord, ON L4K4L2
Canada

Date of Testing:

11/14-11/15/2017

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M1711100294-02-R1.F53

FCC ID:	F5317LE4000
IC:	160A-LE4000
APPLICANT:	Digital Security Controls

Application Type:

Certification

Model:

LE4000

EUT Type:

LTE Cellular Alarm Communicator

FCC Classification:

PCS Licensed Transmitter (PCB)

FCC Rule Part(s):

22, 24, & 27


Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M1711100294-02-R1.F53) supersedes and replaces the previously issued test report (S/N: 1M1711100294-02-R1.F53) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President



FCC ID: F5317LE4000	 MEASUREMENT REPORT (CERTIFICATION)	 <small>A Tyco International Company</small>	Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator	Page 1 of 23

TABLE OF CONTENTS

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	PCTEST Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	EMI Suppression Device(s)/Modifications	4
3.0	DESCRIPTION OF TESTS	5
3.1	Measurement Procedure	5
3.1	Block C Frequency Range	5
3.2	Block A Frequency Range	5
3.3	Cellular - Base Frequency Blocks	5
3.4	Cellular - Mobile Frequency Blocks	6
3.5	PCS - Base Frequency Blocks	6
3.6	PCS - Mobile Frequency Blocks	6
3.7	AWS - Base Frequency Blocks	6
3.8	AWS - Mobile Frequency Blocks	7
3.9	Radiated Power and Radiated Spurious Emissions	7
4.0	MEASUREMENT UNCERTAINTY	8
5.0	TEST EQUIPMENT CALIBRATION DATA	9
6.0	SAMPLE CALCULATIONS	10
7.0	TEST RESULTS	11
7.1	Summary	11
7.2	Radiated Spurious Emissions Measurements	12
8.0	CONCLUSION	23

FCC ID: F5317LE4000		MEASUREMENT REPORT (CERTIFICATION)	 <small>A Tyco International Company</small>	Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator	Page 2 of 23	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: F5317LE4000		MEASUREMENT REPORT (CERTIFICATION)	 <small>A Tyco International Company</small>	Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator	Page 3 of 23	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **DSC LTE Cellular Alarm Communicator FCC ID: F5317LE4000**. A Cellular Alarm Communicator module is used in conjunction with Fire and Security Alarm System to monitor and send alarm events from protected premises to a supervising station using the cellular network. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

Test Device Serial No.: 35353509

Hardware Version No.: UA724 Rev. 01

Software Version No.: 5.0

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 WCDMA/UMTS, LTE Bands 2, 4, 5, 12, and 13

2.3 Test Configuration

The EUT contains an integrated pre-approved Telit module (Model: LE910-NA1). This test report only covers the radiated aspects of the Alarm System product. The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03. See Section 7.0 of this test report for a description of the radiated emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: F5317LE4000	 <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)	 <small>A Tyco International Company</small>	Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator		Page 4 of 23

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03) were used in the measurement of the EUT.

3.1 Block C Frequency Range

§27.5(b)(3)

Two paired channels of 11 megahertz each are available for assignment in Block C in the 746-757 MHz and 776-787 MHz bands. In the event that no licenses for two channels in this Block C are assigned based on the results of the first auction in which such licenses were offered because the auction results do not satisfy the applicable reserve price, the spectrum in the 746-757 MHz and 776-787 MHz bands will instead be made available for assignment at a subsequent auction as follows: (i) Two paired channels of 6 megahertz each available for assignment in Block C1 in the 746-752 MHz and 776-782 MHz bands. (ii) Two paired channels of 5 megahertz each available for assignment in Block C2 in the 752-757 MHz and 782-787 MHz bands.

3.2 Block A Frequency Range


§27.5(c)

698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;
 Block B: 704-710 MHz and 734-740 MHz; and
 Block C: 710-716 MHz and 740-746 MHz.

3.3 Cellular - Base Frequency Blocks

§22.905

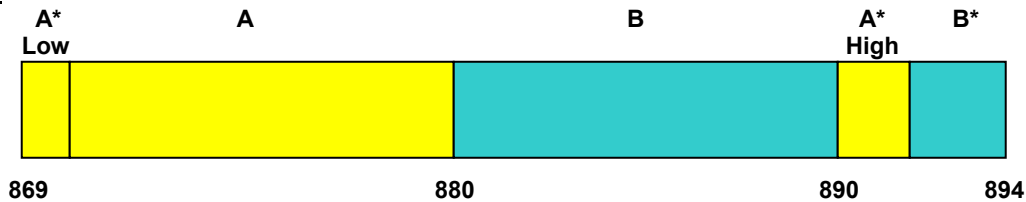


BLOCK 1: 869 – 880 MHz (A* Low + A)
BLOCK 2: 880 – 890 MHz (B)

BLOCK 3: 890 – 891.5 MHz (A* High)
BLOCK 4: 891.5 – 894 MHz (B*)

FCC ID: F5317LE4000		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator	Page 5 of 23	

3.4 Cellular - Mobile Frequency Blocks

§22.905

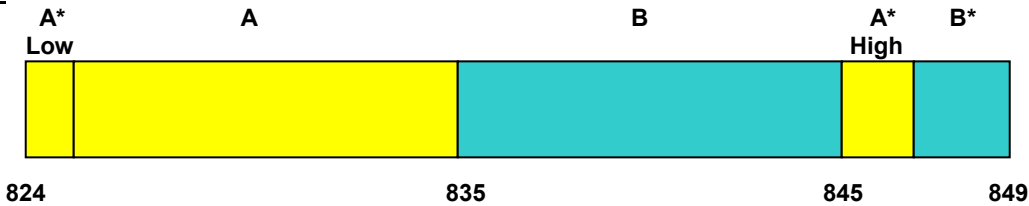


BLOCK 1: 824 – 835 MHz (A* Low + A)
 BLOCK 2: 835 – 845 MHz (B)

BLOCK 3: 845 – 846.5 MHz (A* High)
 BLOCK 4: 846.5 – 849 MHz (B*)

3.5 PCS - Base Frequency Blocks

§24.229

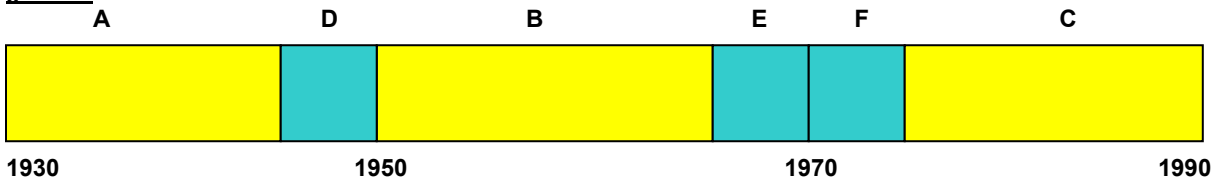


BLOCK 1: 1930 – 1945 MHz (A)
 BLOCK 2: 1945 – 1950 MHz (D)
 BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 4: 1965 – 1970 MHz (E)
 BLOCK 5: 1970 – 1975 MHz (F)
 BLOCK 6: 1975 – 1990 MHz (C)

3.6 PCS - Mobile Frequency Blocks

§24.229

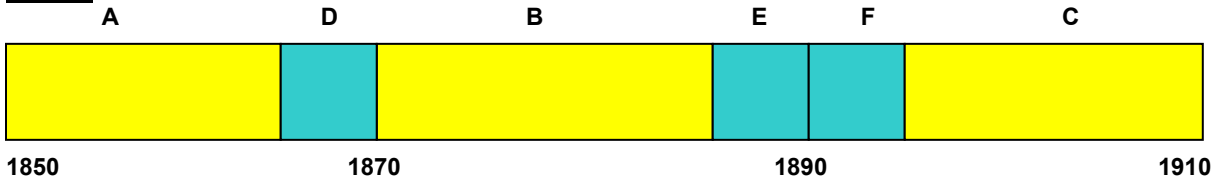


BLOCK 1: 1850 – 1865 MHz (A)
 BLOCK 2: 1865 – 1870 MHz (D)
 BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 4: 1885 – 1890 MHz (E)
 BLOCK 5: 1890 – 1895 MHz (F)
 BLOCK 6: 1895 – 1910 MHz (C)

3.7 AWS - Base Frequency Blocks

§27.5(h)

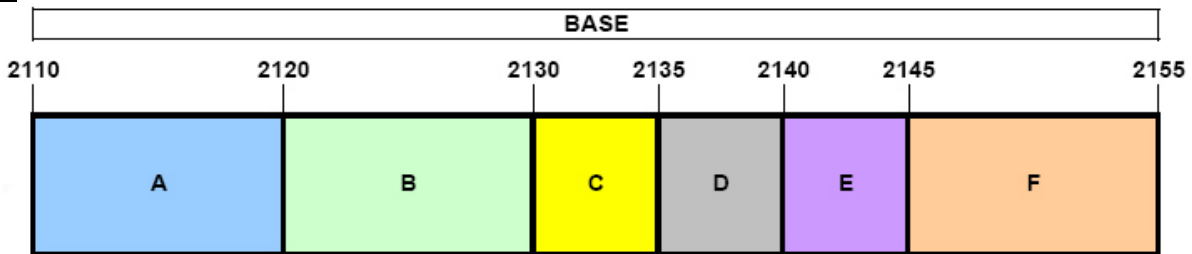


BLOCK 1: 2110 – 2120 MHz (A)
 BLOCK 2: 2120 – 2130 MHz (B)
 BLOCK 3: 2130 – 2135 MHz (C)

BLOCK 4: 2135 – 2140 MHz (D)
 BLOCK 5: 2140 – 2145 MHz (E)
 BLOCK 6: 2145 – 2155 MHz (F)

FCC ID: F5317LE4000		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator		Page 6 of 23

3.8 AWS - Mobile Frequency Blocks

§27.5(h)

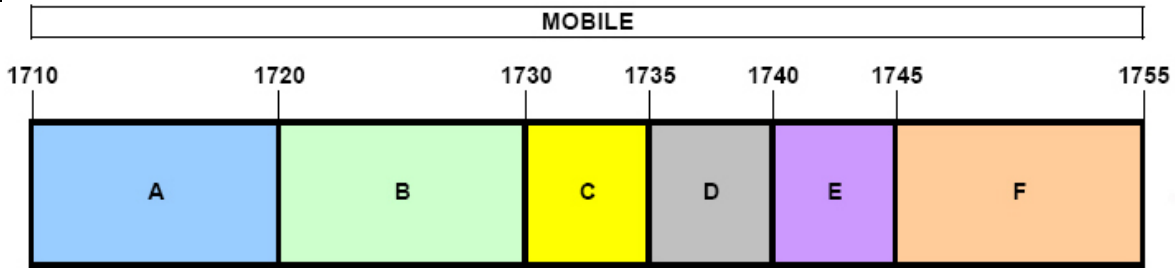

- | | |
|-------------------------------------|-------------------------------------|
| BLOCK 1: 1710 – 1720 MHz (A) | BLOCK 4: 1735 – 1740 MHz (D) |
| BLOCK 2: 1720 – 1730 MHz (B) | BLOCK 5: 1740 – 1745 MHz (E) |
| BLOCK 3: 1730 – 1735 MHz (C) | BLOCK 6: 1745 – 1755 MHz (F) |

3.9 Radiated Power and Radiated Spurious Emissions

§2.1053 §22.913(a)(2) §22.917(a) §24.232(c) §24.238(a) §27.50(b)(10) §27.50(c)(10) §27.50(d)(4) §27.53(f) §27.53(g) §27.53(h) RSS-130(4.4) RSS-132(5.4) RSS-132(5.5) RSS-133(6.4) RSS-133(6.5) RSS-139(6.5) RSS-139(6.6)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power [Watts]})$.

FCC ID: F5317LE4000		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator	Page 7 of 23	

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: F5317LE4000		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator	Page 8 of 23	

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	6/21/2017	Annual	6/21/2018	RE1
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2017	Biennial	10/10/2019	121034
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/23/2016	Biennial	8/23/2018	135427
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/11/2017	Annual	5/11/2018	100040
Rohde & Schwarz	CMW500	Radio Communication Tester	10/13/2017	Annual	10/13/2018	102060
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/31/2017	Annual	7/31/2018	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/11/2017	Annual	8/11/2018	103200
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102134
Sunol	DRH-118	Horn Antenna (1-18GHz)	8/11/2017	Biennial	8/11/2019	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	3/14/2016	Biennial	3/14/2018	A051107

Table 5-1. Test Equipment

FCC ID: F5317LE4000	 MEASUREMENT REPORT (CERTIFICATION)		 <small>A Tyco International Company</small>	Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator		Page 9 of 23

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

- LTE BW = 8.62 MHz
- G = Phase Modulation
- 7 = Quantized/Digital Info
- D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

- LTE BW = 8.45 MHz
- W = Amplitude/Angle Modulated
- 7 = Quantized/Digital Info
- D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80).

FCC ID: F5317LE4000		MEASUREMENT REPORT (CERTIFICATION)	 <small>A Tyco International Company</small>	Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator	Page 10 of 23	

7.0 TEST RESULTS

7.1 Summary

Company Name: Digital Security Controls
 FCC ID: F5317LE4000
 FCC Classification: PCS Licensed Transmitter (PCB)
 Mode(s): LTE

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1053 22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h)	RSS-130(4.6) RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Undesirable Emissions	$> 43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions	RADIATED	PASS	Section 7.2
27.53(f)	N/A	Undesirable Emissions (Band 13)	< -70 dBW/MHz (for wideband signals) < -80 dBW (for discrete emissions less than 700Hz BW) For all emissions in the band 1559 – 1610 MHz		PASS	Section 7.2

Table 7-1. Summary of Radiated Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The EUT's output port was terminated in 50Ω (i.e. directly into a base station simulator) for evaluation of radiated spurious emissions.

FCC ID: F5317LE4000	 MEASUREMENT REPORT (CERTIFICATION)		 <small>A Tyco International Company</small>	Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator	Page 11 of 23	

7.2 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) §24.238(a) §27.53(c) §27.53(f) §27.53(g) §27.53(h) RSS-130(4.6) RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT terminated in 50Ω. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas.

Test Procedures Used

KDB 971168 D01 v03 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW ≥ 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points ≥ 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: F5317LE4000	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator	Page 12 of 23

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

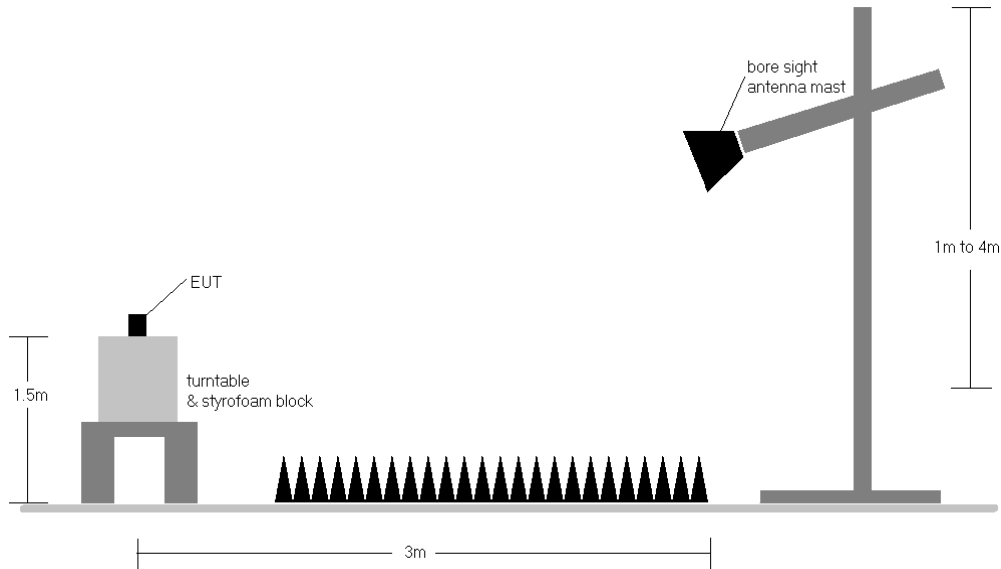


Figure 7-1. Test Instrument & Measurement Setup

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 5) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: F5317LE4000	 MEASUREMENT REPORT (CERTIFICATION)		 <small>A Tyco International Company</small>	Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator	Page 13 of 23	

Band 12

OPERATING FREQUENCY: 704.00 MHz
 CHANNEL: 23060
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1408.00	H	264	284	-70.84	8.00	-62.83	-49.8
2112.00	H	286	276	-64.79	8.89	-55.89	-42.9
2816.00	H	276	245	-71.20	10.10	-61.10	-48.1

Table 7-2. Radiated Spurious Data (Band 12 – Low Channel)

OPERATING FREQUENCY: 707.50 MHz
 CHANNEL: 23095
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1415.00	H	190	332	-68.95	8.09	-60.86	-47.9
2122.50	H	123	190	-65.63	8.88	-56.75	-43.7
2830.00	H	362	162	-70.70	10.13	-60.57	-47.6

Table 7-3. Radiated Spurious Data (Band 12 – Mid Channel)

FCC ID: F5317LE4000		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator		Page 14 of 23

OPERATING FREQUENCY: 711.00 MHz
 CHANNEL: 23130
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1422.00	H	357	276	-68.51	8.17	-60.34	-47.3
2133.00	H	264	234	-65.57	8.87	-56.70	-43.7
2844.00	H	135	135	-71.19	10.16	-61.02	-48.0
3555.00	H	-	-	-68.81	9.71	-59.10	-46.1

Table 7-4. Radiated Spurious Data (Band 12 – High Channel)

FCC ID: F5317LE4000			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator			Page 15 of 23

Band 13

OPERATING FREQUENCY: 782.00 MHz
 CHANNEL: 23230
 MODULATION SIGNAL: _____
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2346.00	H	356	381	-68.23	9.49	-58.74	-45.7
3128.00	H	-	-	-69.88	9.53	-60.35	-47.3

Table 7-5. Radiated Spurious Data (Band 13 – Mid Channel)

MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.00 MHz
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1564.00	H	351	241	-63.08	8.73	-54.35	-14.3

Table 7-6. Radiated Spurious Data (Band 13 – 1559-1610MHz Band)

FCC ID: F5317LE4000			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator		Page 16 of 23	

Band 5

OPERATING FREQUENCY: 829.00 MHz
 CHANNEL: 20450
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1658.00	H	308	349	-67.54	8.96	-58.58	-45.6
2487.00	H	256	246	-65.81	9.13	-56.68	-43.7
3316.00	H	245	243	-67.71	9.36	-58.34	-45.3
4145.00	H	352	154	-69.34	9.95	-59.39	-46.4

Table 7-7. Radiated Spurious Data (Band 5 – Low Channel)

OPERATING FREQUENCY: 836.50 MHz
 CHANNEL: 20525
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.00	H	179	67	-64.94	8.85	-56.09	-43.1
2509.50	H	143	38	-65.51	9.17	-56.34	-43.3
3346.00	H	-	-	-69.09	9.36	-59.73	-46.7

Table 7-8. Radiated Spurious Data (Band 5 – Mid Channel)

FCC ID: F5317LE4000			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator		Page 17 of 23	

OPERATING FREQUENCY: 844.00 MHz
 CHANNEL: 20600
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1688.00	H	241	324	-65.45	8.74	-56.71	-43.7
2532.00	H	286	254	-67.58	9.24	-58.35	-45.3
3376.00	H	257	162	-67.76	9.42	-58.34	-45.3
4220.00	H	235	135	-69.81	10.38	-59.43	-46.4

Table 7-9. Radiated Spurious Data (Band 5 – High Channel)

FCC ID: F5317LE4000			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator		Page 18 of 23	

Band 4

OPERATING FREQUENCY: 1720.00 MHz
 CHANNEL: 20050
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3440.00	H	120	351	-68.28	9.54	-58.74	-45.7
5160.00	H	231	350	-68.79	10.79	-57.99	-45.0
6880.00	H	130	214	-57.21	10.86	-46.36	-33.4
8600.00	H	125	135	-64.10	11.69	-52.41	-39.4

Table 7-10. Radiated Spurious Data (Band 4 – Low Channel)

OPERATING FREQUENCY: 1732.50 MHz
 CHANNEL: 20175
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.00	H	213	132	-68.20	9.59	-58.60	-45.6
5197.50	H	206	135	-68.25	10.83	-57.42	-44.4
6930.00	H	322	162	-58.05	10.90	-47.15	-34.1
8662.50	H	-	-	-64.58	11.76	-52.82	-39.8

Table 7-11. Radiated Spurious Data (Band 4 – Mid Channel)

FCC ID: F5317LE4000		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator		Page 19 of 23

OPERATING FREQUENCY: 1745.00 MHz
 CHANNEL: 20300
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3490.00	H	236	213	-68.34	9.65	-58.69	-45.7
5235.00	H	321	203	-69.66	10.93	-58.73	-45.7
6980.00	H	103	153	-64.13	10.96	-53.17	-40.2

Table 7-12. Radiated Spurious Data (Band 4 – High Channel)

FCC ID: F5317LE4000	 MEASUREMENT REPORT (CERTIFICATION)		 <small>A Tyco International Company</small>	Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator	Page 20 of 23	

Band 2

OPERATING FREQUENCY: 1860.00 MHz
 CHANNEL: 18700
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3720.00	H	135	213	-69.65	9.66	-59.99	-47.0
5580.00	H	246	203	-66.50	11.03	-55.47	-42.5
7440.00	H	232	250	-61.45	10.86	-50.59	-37.6
9300.00	H	321	310	-64.09	12.29	-51.80	-38.8

Table 7-13. Radiated Spurious Data (Band 2 – Low Channel)

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 18900
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	135	210	-68.98	9.50	-59.48	-46.5
5640.00	H	136	320	-68.82	11.16	-57.66	-44.7
7520.00	H	324	351	-64.57	11.03	-53.54	-40.5

Table 7-14. Radiated Spurious Data (Band 2 – Mid Channel)

FCC ID: F5317LE4000		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator		Page 21 of 23

OPERATING FREQUENCY: 1900.00 MHz
 CHANNEL: 19100
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3800.00	H	231	332	-67.89	9.35	-58.54	-45.5
5700.00	H	354	321	-68.45	11.30	-57.16	-44.2
7600.00	H	212	241	-62.95	11.21	-51.73	-38.7
9500.00	H	253	351	-64.27	12.20	-52.07	-39.1

Table 7-15. Radiated Spurious Data (Band 2 – High Channel)

FCC ID: F5317LE4000	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator	Page 22 of 23	

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **DSC LTE Cellular Alarm Communicator FCC ID: F5317LE4000** complies with all the requirements of Part 22, 24, & 27 of the FCC Rules and RSS-132, RSS-133, and RSS-139 of the Innovation, Science, and Economic Development Rules for LTE operation only.

FCC ID: F5317LE4000	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1711100294-02-R1.F53	Test Dates: 11/14-11/15/2017	EUT Type: LTE Cellular Alarm Communicator		Page 23 of 23

© 2017 PCTEST Engineering Laboratory, Inc.

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.

V 7