



## Test Report Summary

### FCC CFR 47, Part 27

### Wireless Communications Service

**Manufacturer:** ADC Telecommunications

**Name of Equipment:** FlexWave™ Prism – AWS 40 Watt

**Model Number(s):** FWP-A810000MOD

**Manufacturer's Address:** P.O. Box 1101  
Minneapolis, MN 55440-1101

**Test Report Number:** MN091125 AWS 40 Watt

**Test Date(s):** 17, 18, 19, and 20 November, 2009 (ETL)

According to testing performed at Intertek, the above-mentioned unit is in accordance with the applicable electromagnetic compatibility (EMC) portions of the requirements defined in FCC Part 27.


It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. Any modifications necessary for compliance made during testing on the above mentioned date(s) must be implemented in all production units for compliance to be maintained.

All testing was done in accordance with the Federal Communications Commission's CFR 47 Part 27 and the EUT fulfills the requirements of the Federal Communications Commission's CFR 47 Part 27.

Date: 25 November, 2009

Location: Intertek Testing Services (ETL)  
7250 Hudson Blvd., Suite 100  
Oakdale, MN 55128  
Phone: (651) 730-1188  
Fax: (651) 730-1282

Testing Conducted by (ADC):  
And Report Written by:

  
Joshua J. Wittman  
Compliance Engineer



## **EMC Emission – T E S T R E P O R T**

**Test Report File Number:** MN091125\_AWS 40 Watt

**Date of Issue:** 25 November, 2009

**Model Number(s):** FWP-A810000MOD

**Product Name:** FlexWave™ Prism – AWS 40 Watt

**Product Type:** Repeater

**Applicant:** ADC Telecommunications

**Manufacturer:** ADC Telecommunications

**License Holder:** ADC Telecommunications

**Address:** P.O. Box 1101  
Minneapolis, MN 55440-1101

**Test Result:**                                     **Positive**                                     Negative

**Test Project Number:**                                    3193847MIN-001M

**Reference(s)**

**Total pages including Appendices:**                                    26



## 1.0 TABLE OF CONTENTS

1.0	Table of Contents .....	3
2.0	Revision Description .....	4
3.0	Documentation .....	4
3.1	Test Regulations .....	4
3.2	Test Operation Mode .....	5
3.3	Configuration of the Device Under Test: .....	5
3.4	Product Options: .....	5
3.5	EUT Specifications and Requirements: .....	5
3.6	Cables: .....	5
3.7	Power Requirements: .....	5
3.8	Typical Installation and/or Operating Environment: .....	5
3.9	Other Special Requirements: .....	5
3.10	EUT Software: .....	5
3.11	EUT System Components .....	6
3.12	Support Equipment .....	6
3.13	Deviations from Standard: .....	6
3.14	General Remarks: .....	6
3.15	Summary: .....	6
4.0	Test Set-Up Drawings and Photos .....	7
4.1	Test Set-up Photo, Radiated Emissions .....	7
4.2	Test Set-up Photo, Radiated Emissions .....	9
4.3	Test Set-up Drawings .....	11
5.0	Test Results .....	13
5.1.1	27.50 RF Power Limits .....	13
5.1.2	27.54 Frequency Stability .....	14
5.1.3	27.53 Emission Limitations .....	15
6.0	Test Equipment .....	16
7.0	Appendix A .....	17
7.1	Conducted Emission Limits Test .....	18
7.2	Conducted Output Power Test .....	19
7.3	Frequency Stability Test .....	21
7.4	Intermodulation Test .....	22
7.5	Occupied Bandwidth Modulation Test .....	23
8.0	Appendix B .....	24
9.0	Appendix C .....	26



## 2.0 REVISION DESCRIPTION

Rev	Total Pages	Date	Description
A	26	25 November, 2009	Original Release

## 3.0 DOCUMENTATION

### 3.1 Test Regulations

- 27.50 Power limits
- 27.53 Emission limits
- 27.54 Frequency stability

The emissions tests were performed according to the following regulations:

- FCC Part 22
- FCC Part 24
- FCC Part 27**
- FCC Part 90
- IC RSS-131 Issue 2

#### Environmental Conditions in the lab:

Temperature:	<b>ETL</b> 15-35° C
Relative Humidity:	30-60%
Atmospheric Pressure:	86-106 kPa

#### Power Supply Utilized:

Power Supply System : 120 VAC, Single Phase

### 3.2 Test Operation Mode

- Standby
- Test Program
- Practice Operation

### ■ Max composite in and out

### 3.3 Configuration of the Device Under Test:

Normal Operation – AWS – 2110 to 2155 MHz

### 3.4 Product Options:

None

### 3.5 EUT Specifications and Requirements:

Length: 10.0"  
Width: 12.0"  
Height: 40.0"  
Weight: 160 pounds

### 3.6 Cables:

Cable Type	Length	From	To
RF	> 3M	Ancillary Equip	EUT
RF	< 3M	EUT	50 Ohm Load
Power	< 3M	Power	Input Power
Fiber	> 3M	Ancillary Equip	EUT

### 3.7 Power Requirements:

Voltage: 120 VAC  
Amps: 5.8 A

### 3.8 Typical Installation and/or Operating Environment:

Outdoor/Indoor. System is typically employed as an outdoor repeater.

### 3.9 Other Special Requirements:

None

### 3.10 EUT Software:

Revision Level: Version V.6 or greater  
Description: Internet Explorer

### 3.11 EUT System Components

Description	Model #	Serial #	FCC ID #
AWS 40 Watt Module	FWP-A810000MOD	None	

### 3.12 Support Equipment

Description	Manufacturer	Model #	FCC ID #
Power Meter	HP	EPM-441A	
Signal Generator	Agilent	E4438C	
Attenuator	Aeroflex	86-30-12	

### 3.13 Deviations from Standard:

Modifications required to pass:

As indicated on the data sheet(s)

■ **None**

Test Specification Deviations; Additions to or Exclusions from:

As indicated in the Test Plan

■ **None**

### 3.14 General Remarks:

None.

### 3.15 Summary:

The requirements according to the technical regulations are

■ **met**

not Met

The equipment under test does

■ **fulfill the general approval requirements mentioned in Section 3.1.**


not fulfill the general approval requirements mentioned in Section 3.1.

## 4.0 TEST SET-UP DRAWINGS AND PHOTOS

[Table of Contents: Section 1.0](#)

### 4.1 Test Set-up Photo, Radiated Emissions




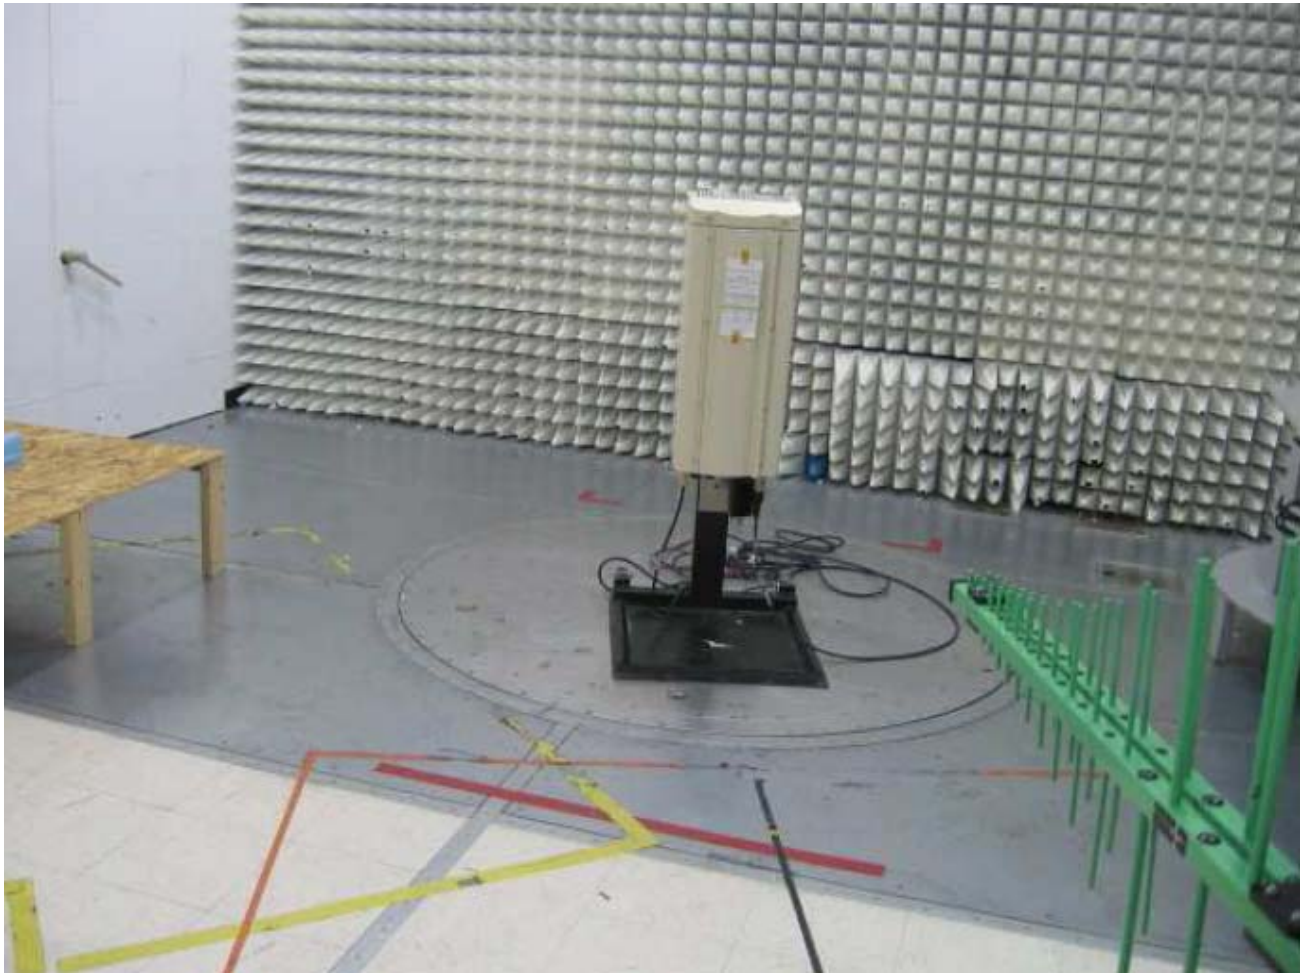



**4.2 Test Set-up Photo, Radiated Emissions**



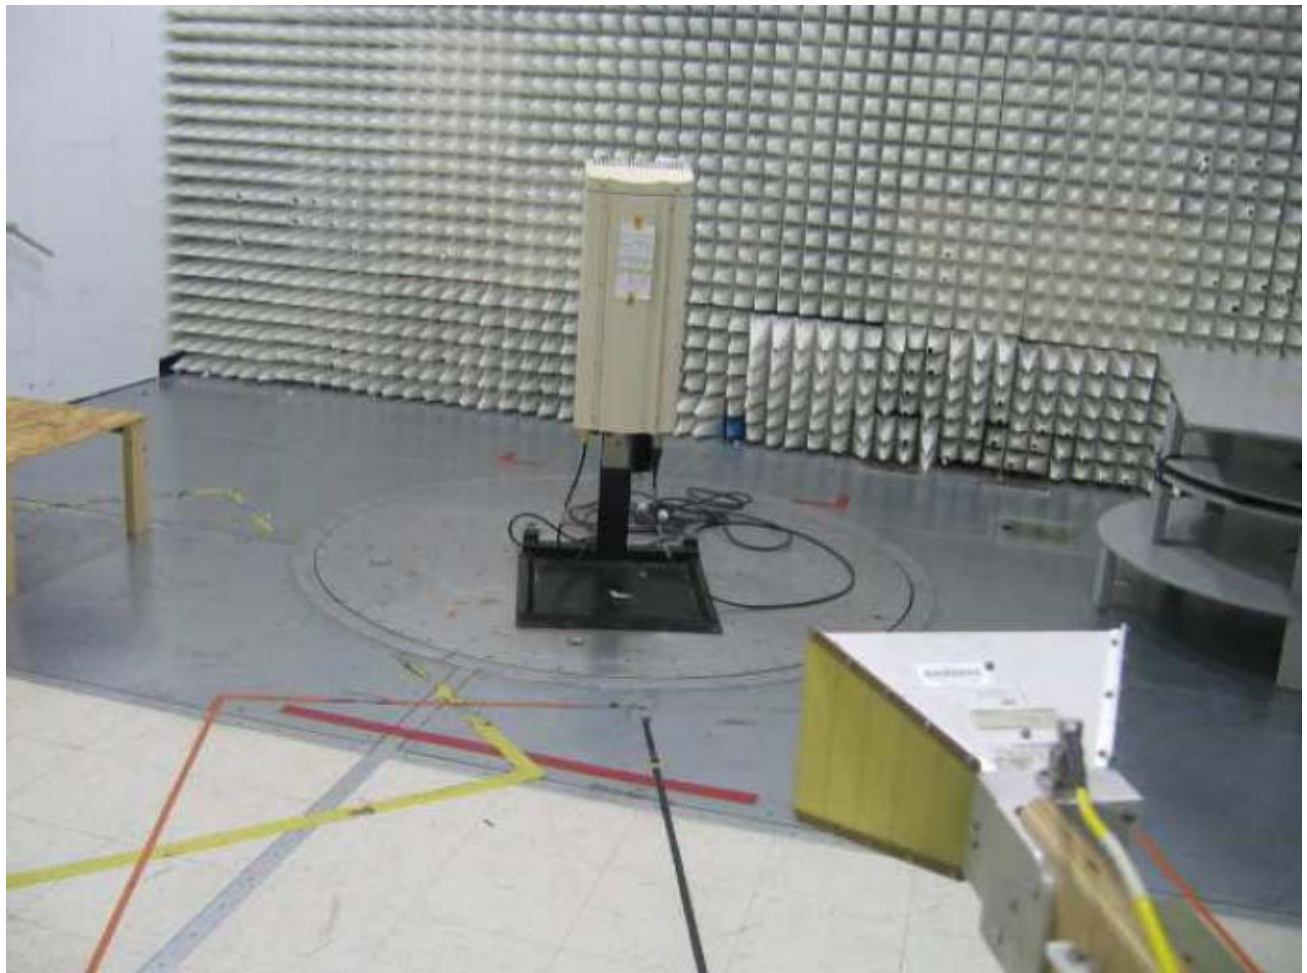


### 4.3 Test Set-up Drawings

## Conducted and Radiated Emission Limits Test

### Conducted Output Power Test


### Inter-Modulation Test

### Occupied Bandwidth Modulation Test

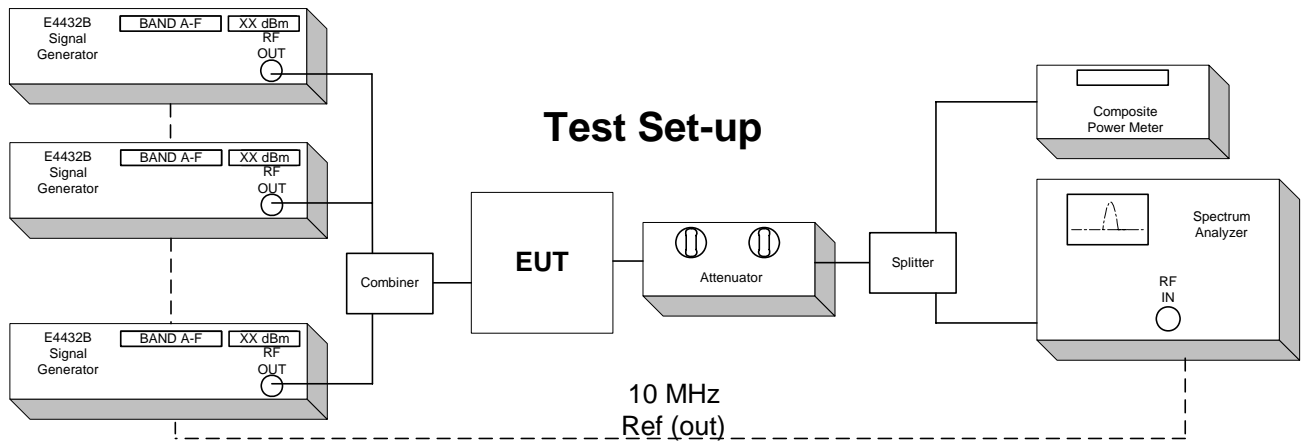

# Frequency Tolerance Test

EUT is specified for outdoor use with temperature range of  $-30^{\circ}$  to  $+50^{\circ}$  C, and was tested with its range.

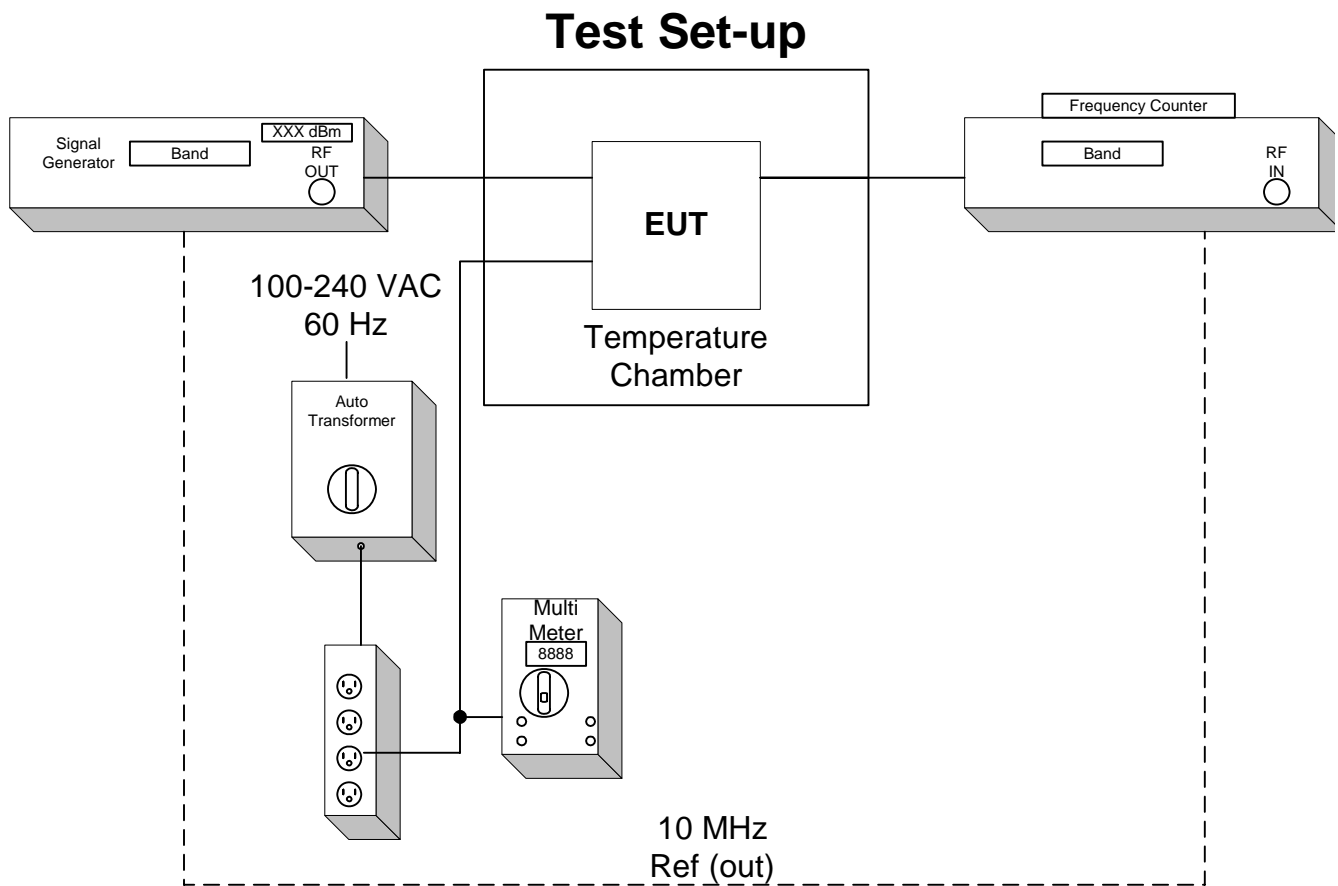

## 5.0 TEST RESULTS

### 5.1.1 27.50 RF Power Limits

#### Test Summary:

- The requirements are:  **MET**  NOT MET

#### Test Location:

- **ETL (Oakdale, MN)**

#### Test Distance:

- 3 Meters
- 10 Meters
- **Conducted measurement**

#### Test Equipment (ADC):

1, 2, 6, 7, 10

#### Test Limit:

100 Watts or 50 dBm Limit

#### Test Data:

[Conducted Output Power; Section 7.2](#)

[Table of Contents; Section 1.0](#)

**Test Engineer:** Norman Shpilsher

**Date:** 19 November, 2009

## 5.1.2 27.54 Frequency Stability

### Test Summary:

- The requirements are:  **MET**  NOT MET
- The fundamental emission stays within the limit.
- Frequency measured over a temperature range of  $-30$  to  $50^{\circ}$  C and an input voltage range of 100 to 240 VAC.

### Test Location:

- **ETL (Oakdale, MN)**

### Test Equipment (ADC):

3, 4, 5, 6, 9, 10

### Test Limit:

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### Test Data:

[Frequency Stability; Section 7.3](#)

[Table of Contents; Section 1.0](#)

**Test Engineer:** Norman Shpilsher

**Date:** 18 November, 2009

### 5.1.3 27.53 Emission Limitations

#### Test Summary:

- The requirements are:  **MET**  NOT MET
- Out of band emissions were less than  $-13$  dBm.
- Outside the emission bandwidth of the carrier, all emissions are attenuated at least 26 dB below the transmitter power.

#### Test Location:

- **ETL (Oakdale, MN)**

#### Test Equipment (ADC):

1, 2, 6, 7, 10

#### Test Limit:

Out of band emissions:

Attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB, or  $-13$  dBm.

Outside of the carrier emissions bandwidth:

26 dB below the transmitter power

#### Test Data:

[Conducted Emissions; Section 7.1](#)

[Intermodulation; Section 7.4](#)

[Occupied Bandwidth; Section 7.5](#)

Radiated Emissions; ([Appendix B](#))

**Test Engineer:** Norman Shpilsher

**Date:** 19 November, 2008

**Date:** 20 November, 2008

**Date:** 19 November, 2008

[Table of Contents; Section 1.0](#)

## 6.0 TEST EQUIPMENT

[Table of Contents: Section 1.0](#)

1	Spectrum Analyzer	HP	8593E	MC54593	9-29-10	☒
2	Power Meter	HP	437B	MC27754	5-29-10	☒
3	Multimeter	Fluke	79	MC18758	6-15-11	☒
4	Frequency Counter	HP	5347A	MC27548	5-19-10	☒
5	Temperature Chamber	Thermotron	SE-600-3-3	MC48285	4-2-10	☒
6	Signal Generator	Aeroflex	3413	MC57343	5-21-10	☒
7	Signal Generator	Aeroflex	3414	NA	1-16-11	☒
8	RF Power Sensor	Agilent	8482H	MC27519	7-14-10	☒
9	Variable Auto Transformer	Staco	1520CT	MC44655	CNR	☒
10	Attenuator	Aeroflex	86-30-12	369	CNR	☒

Equipment with a Calibration Not Required (CNR) listing is verified and compensated for with NIST traceable calibrated equipment.



7.0

**APPENDIX A**

Conducted Emissions Test Data

[Table of Contents: Section 1.0](#)

**Test Engineer:** Norman Shpilsher

## 7.1 Conducted Emission Limits Test

[Table of Contents: Section 1.0](#)

[Back to Emission Limits: Section 5.1.3](#)

The out of band emissions were measured directly from the EUT antenna output with a spectrum analyzer from 30 MHz to the 10<sup>th</sup> harmonic of the highest carrier frequency. Test signals used are W-CDMA, LTE 1.4MHz, 3.0MHz, 5.0MHz, 10MHz, 15MHz, and 20MHz channel bandwidths. The different signals were input one at a time to the EUT. In all cases, the out of band emissions were less than -13 dBm from the equation

$$(19\text{dBm} - [43 + 10\log(0.08\text{W})])$$

Band edge compliance is also demonstrated using a W-CDMA, LTE 1.4MHz, 3.0MHz, 5.0MHz, 10MHz, 15MHz, and 20MHz channel bandwidth signal at the upper and lower limits of the band.

The Host unit connects directly to the BTS via coax. The Host unit does not connect to an antenna or amplifier, thus it is a Part 15 device and has been tested and is compliant as such. No FCC ID is necessary.

Industry practice has generally set the input signal power level. Test signal used was  $\approx$  -25 dBm input to DHU. Industry practice has generally set the output signal power level.

Prism Remote:

Range: 100 - 240 VAC

Tested @: 120 VAC

Tested @: 5.8 A

Digital Host Unit (DHU):

Range: 21-60 VDC

Tested @: 48 VDC

Tested @: 3.5 A

Application details for 2.1033(c)(10), and 2.1033(c)(13):

The input to the host unit has a digital attenuation chip (ALC) to provide protection from overdrive with 5-10 millisecond attack time / 100 millisecond decay time and 31 dB of head room, such that single channel operation, or multi-channel operation will not exceed nominal gain of the system.

The frequency stability is derived by the BTS, base transceiver station. This product uses internal frequency stability to keep the signal inside our filter bandwidths. This means that the frequency can change, but the frequency that transmits is still at the original frequency. The remote system uses the data over the fiber optic path to phase/frequency lock to the host. The purpose is to frequency lock the up- and down-conversion local oscillators, and thereby eliminate any end-to-end frequency shift.

The spurious limitation is completed with the duplexer. The ALC also suppresses in-band spurious by preventing PA overdrive, while the duplexer suppresses out-of-band spurious. Internal to the electronics, the use of SAW filters provides for higher Q roll-off at band edges.

This equipment does not modulate the RF, so there is no modulation limiter. This equipment does not change the modulation of the RF or the occupied bandwidth of any channel. It transports the signal, as is, over an optical link. The RF input is not changed in the RF output.

This is a constant gain device, so the setup controls the output. There is an overdrive and overpower limit control that prevents excess power.

Results:

Pass

(Plots located at Intertek *Test Data Number: 3193847MIN-001M section 2.1.3 27.53*)

## 7.2 Conducted Output Power Test

[Table of Contents: Section 1.0](#)

[Back to Conducted Output Power: Section 5.1.1](#)

\*Note: The EUT is a fixed repeater and not a base station.

This measurement was made as a direct conducted emission measurement. The output from the EUT antenna connector was connected to the power meter. The carrier output, below, was conducted using a single W-CDMA, 1.4, 3, 5, 10, 15 and 20 MHz LTE signal. The power meter level was offset to compensate for attenuators and cable loss between the EUT and the power meter.

A signal was used at the low, mid and high parts of the selected band. The power meter level was offset by 31.0 dB to compensate for cable loss and attenuator between the EUT and the power meter.

<u>W-CDMA</u>	<u>45.81 Watts</u>
Carrier Frequency	Carrier Output
2113 MHz	<u>46.23</u> dBm
2132.5 MHz	<u>46.45</u> dBm
2152 MHz	<u>46.61</u> dBm

<u>1.4 LTE</u>	<u>46.24 Watts</u>
Carrier Frequency	Carrier Output
2113 MHz	<u>46.30</u> dBm
2132.5 MHz	<u>46.35</u> dBm
2152 MHz	<u>46.65</u> dBm

<u>3 LTE</u>	<u>47.86 Watts</u>
Carrier Frequency	Carrier Output
2113 MHz	<u>46.44</u> dBm
2132.5 MHz	<u>46.75</u> dBm
2152 MHz	<u>46.80</u> dBm

<u>5 LTE</u>	<u>46.77 Watts</u>
Carrier Frequency	Carrier Output
2113 MHz	<u>46.53</u> dBm
2132.5 MHz	<u>46.31</u> dBm
2152 MHz	<u>46.70</u> dBm

<u>10 LTE</u>	<u>47.64 Watts</u>
Carrier Frequency	Carrier Output
2117 MHz	<u>46.40</u> dBm
2132.5 MHz	<u>46.60</u> dBm
2148 MHz	<u>46.78</u> dBm

<u>15 LTE</u>	<u>45.5 Watts</u>
Carrier Frequency	Carrier Output
2120 MHz	<u>46.20</u> dBm
2132.5 MHz	<u>46.58</u> dBm
2145 MHz	<u>46.48</u> dBm

<u>20 LTE</u>	<u>44.16 Watts</u>
Carrier Frequency	Carrier Output
2132.5 MHz	<u>46.45</u> dBm

### 7.3 Frequency Stability Test

[Table of Contents: Section 1.0](#)

[Back to Frequency Stability: Section 5.1.2](#)

HOST	REMOTE			
Input Voltage	Input Voltage	Carrier Frequency	Measured Frequency	Meets Requirements?
21 VDC	100 VAC	2110.200 MHz	2110.200 MHz	Yes
48 VDC	170 VAC	2110.200 MHz	2110.200 MHz	Yes
60 VDC	240 VAC	2110.200 MHz	2110.200 MHz	Yes
21 VDC	100 VAC	2132.500 MHz	2132.500 MHz	Yes
48 VDC	170 VAC	2132.500 MHz	2132.500 MHz	Yes
60 VDC	240 VAC	2132.500 MHz	2132.500 MHz	Yes
21 VDC	100 VAC	2154.800 MHz	2154.800 MHz	Yes
48 VDC	170 VAC	2154.800 MHz	2154.800 MHz	Yes
60 VDC	240 VAC	2154.800 MHz	2154.800 MHz	Yes
Temperature		Carrier Frequency	Measured Frequency	Meets Requirements?
-30 Deg. C		2110.200 MHz	2110.200 MHz	Yes
-20 Deg. C		2110.200 MHz	2110.200 MHz	Yes
-10 Deg. C		2110.200 MHz	2110.200 MHz	Yes
0 Deg. C		2110.200 MHz	2110.200 MHz	Yes
10 Deg. C		2110.200 MHz	2110.200 MHz	Yes
20 Deg. C		2110.200 MHz	2110.200 MHz	Yes
30 Deg. C		2110.200 MHz	2110.200 MHz	Yes
40 Deg. C		2110.200 MHz	2110.200 MHz	Yes
50 Deg. C		2110.200 MHz	2110.200 MHz	Yes
-30 Deg. C		2132.500 MHz	2132.500 MHz	Yes
-20 Deg. C		2132.500 MHz	2132.500 MHz	Yes
-10 Deg. C		2132.500 MHz	2132.500 MHz	Yes
0 Deg. C		2132.500 MHz	2132.500 MHz	Yes
10 Deg. C		2132.500 MHz	2132.500 MHz	Yes
20 Deg. C		2132.500 MHz	2132.500 MHz	Yes
30 Deg. C		2132.500 MHz	2132.500 MHz	Yes
40 Deg. C		2132.500 MHz	2132.500 MHz	Yes
50 Deg. C		2132.500 MHz	2132.500 MHz	Yes
-30 Deg. C		2154.800 MHz	2154.800 MHz	Yes
-20 Deg. C		2154.800 MHz	2154.800 MHz	Yes
-10 Deg. C		2154.800 MHz	2154.800 MHz	Yes
0 Deg. C		2154.800 MHz	2154.800 MHz	Yes
10 Deg. C		2154.800 MHz	2154.800 MHz	Yes
20 Deg. C		2154.800 MHz	2154.800 MHz	Yes
30 Deg. C		2154.800 MHz	2154.800 MHz	Yes
40 Deg. C		2154.800 MHz	2154.800 MHz	Yes
50 Deg. C		2154.800 MHz	2154.800 MHz	Yes

## 7.4 Intermodulation Test

[Table of Contents: Section 1.0](#)

[Back to Emission Limits: Section 5.1.3](#)

The inter-modulation products test was performed for the EUT. One test was performed with the modulation type. 2 signals input to the EUT at lower end channels, and 1 signal input to the EUT at upper end channel. The modulation types tested were W-CDMA, LTE 1.4MHz, 3.0MHz, 5.0MHz, 10MHz, 15MHz, and 20MHz channel bandwidths. An investigation was made from 30 MHz to the 10th Harmonic of the highest fundamental frequency (~22 GHz). The following plots show the results.

Results:

Pass

(Plots located at Intertek *Test Data Number: 3193847MIN-001M section 2.1.3 27.53*)

## 7.5 Occupied Bandwidth Modulation Test

[Table of Contents: Section 1.0](#)

[Back to Emission Limits: Section 5.1.3](#)

An output Occupied Bandwidth test was done with modulation types: W-CDMA, LTE 1.4MHz, 3.0MHz, 5.0MHz, 10MHz, 15MHz, and 20MHz channel bandwidths. The purpose was to determine the amount of occupied bandwidth for the different types of modulation schemes produced by the EUT. The following plots show output signals.

The resolution bandwidth is reduced to 1% of the estimated emission bandwidth and the video bandwidth is set to 3 times the resolution bandwidth. The markers are moved to the -20 dB points (from the previously established center frequency level) on either side of center frequency.

### Results:

Pass

(Plots located at Intertek *Test Data Number: 3193847MIN-001M section 2.1.3 27.53*)

8.0

## APPENDIX B

Measurement Protocol

[Table of Contents: Section 1.0](#)

[Back to Emission Limits: Section 5.1.3](#)



# Measurement Protocol

## Test Methodology:

Emission testing is performed according to the procedures in ANSI C63.4-2003.

## Measurement Uncertainty

The test system for conducted emissions is defined as the signal generator(s), the power meter, the spectrum analyzer and the coaxial cable. The equipment comprising the test systems is calibrated prior to testing the EUT.

## Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left un-terminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

## Radiated Emissions

The final level, in dBuV/m, equals the reading from the spectrum analyzer (Level dBuV), adding the antenna correction factor and cable loss factor (Factor dB) to it, and subtracting the preamp gain (and duty cycle correction factor, if applicable). This result then has the limit subtracted from it to provide the Delta, which gives the tabular data as shown in the data sheets in Appendix B.

Example:

FREQ (MHz)	LEVEL (dBuV)	CABLE/ANT/PREAMP (dB) (dB/m) (dB)	FINAL (dBuV/m)	POL/HGT/AZ (m) (deg)	DELTA1
60.80	42.5Qp +	1.2 + 10.9 - 25.5 =	29.1	V 1.0 0.0	-10.9

## Substitution Method

A cabinet (or enclosure) radiated emission scan was also made, at Intertek, with the EUT's antenna replaced with a termination to demonstrate case radiation compliance to the -13 dBm requirement. Radiated emissions from the EUT are measured in the frequency range of 30 to 20,000 MHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT is rotated 360 degrees. The field strength levels were measured per ANSI C63.4. The EUT is then replaced with a tuned dipole antenna (below 1GHz) or horn antenna (above 1 GHz). The substitute antenna was placed in the same polarization as the test antenna. A signal generator was used to generate a signal level that matched the highest level measured from the EUT. The signal generator level minus the cable loss from the signal generator to the substitute antenna plus the substitute antenna gain equals the spurious power level.

## Test Equipment

All measurement instrumentation is traceable to the National Institute of Standards and Technology and is calibrated according to internal procedure.

## Radiated Emissions Test Data

[Table of Contents: Section 1.0](#)

Document Name: *3193847MIN-001M\_Radiated\_Emissions\_Test\_Report\_Part\_27*

**Test Engineer:** Simon Khazon

**Date:** 18 November, 2009

**Test Procedure:**

Test measurements were made in accordance with ANSI C63.4-2003, Standard Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronics Equipment in the Range of 9 kHz to 40 GHz.

**Test Site Location:**

The test site is a 3 meter Semi-Anechoic Chamber, constructed by Panashield™ Inc. and located inside the building at 7250 Hudson Blvd. Suite 100, Oakdale, MN 55128.

**Test Site Description:**

The 3 meter Semi-Anechoic Chamber is constructed of Panabolt™ modular RF shielding and self-supported with structural steel designed for the local seismic zone rating. The chamber has the nominal size of 20' wide x 29' long x 18' high. All walls and ceiling of the chamber are treated with FFG-1000 Ferrite Grid absorber which was developed specifically to meet international requirements for EMC anechoic chambers for emissions and immunity measurements. To meet high frequency testing white HY-35 hybrid absorber is mounted on the ferrites in specular regions of the chamber.

The chamber has a 2 meter diameter ANSI test volume area and meets the requirements of ANSI C63.4 (1992), EN55022, and FCC Part 15 standards for testing at a 3 meter path length.

FCC Registration Number: 90706

IC Registration Number: 4359