



# Test Report Summary

**FCC CFR 47, Part 27:2009  
Wireless Communications Service**

**Manufacturer:** ADC Telecommunications

**Name of Equipment:** FlexWave™ Prism – 700MHz Upper C MIMO

**Model Number(s):** FWP-U4MT000MOD

**Manufacturer's Address:** P.O. Box 1101  
Minneapolis, MN 55440-1101

**Test Report Number:** MN120328 Prism 700MHz Upper C MIMO

**Test Date(s):** 19 March, 2012 (Intertek)  
23, 26 March, 2012 (ADC)

According to testing performed at Intertek, the above-mentioned unit is in accordance with the applicable electromagnetic compatibility (EMC) portions of the requirements defined in FCC Part 27.

It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. Any modifications necessary for compliance made during testing on the above mentioned date(s) must be implemented in all production units for compliance to be maintained.

All testing was done in accordance with the Federal Communications Commission's CFR 47 Part 27 and the EUT fulfills the requirements of the Federal Communications Commission's CFR 47 Part 27.

Date: 28 March, 2012

Location: Intertek Testing Services (INTERTEK)  
7250 Hudson Blvd., Suite 100  
Oakdale, MN 55128  
Phone: (651) 730-1188  
Fax: (651) 730-1282

ADC Telecommunications  
1187 Park Place  
Shakopee, MN 55379  
Phone: (952) 403-8322

Testing Conducted by (ADC):  
And Report Written by:

A handwritten signature in black ink, appearing to read 'Joshua J. Wittman', is written over a horizontal line.

Joshua J. Wittman  
Compliance Engineer



## **EMC Emission – T E S T R E P O R T**

**Test Report File Number:** MN120328 Prism 700MHz Upper C MIMO

**Date of Issue:** 28 March, 2012

**Model Number(s):** FWP-U4MT000MOD

**Product Name:** FlexWave™ Prism – 700MHz Upper C MIMO

**Product Type:** Repeater

**Applicant:** ADC Telecommunications

**Manufacturer:** ADC Telecommunications

**License Holder:** ADC Telecommunications

**Address:** P.O. Box 1101  
Minneapolis, MN 55440-1101

**Test Result:**  **Positive**  Negative

**Test Project Number:** 100659876MIN-001

**Reference(s)**

**Total pages including Appendices:** 65



## 1.0 TABLE OF CONTENTS

1.0	Table of Contents	3
2.0	Revision Description	4
3.0	Documentation	4
3.1	Test Regulations	4
3.2	Test Operation Mode	5
3.3	Configuration of the Device Under Test:	5
3.4	Product Options:	5
3.5	EUT Specifications and Requirements:	5
3.6	Cables:	5
3.7	Power Requirements:	5
3.8	Typical Installation and/or Operating Environment:	5
3.9	Other Special Requirements:	5
3.10	EUT Software:	5
3.11	EUT System Components	6
3.12	Support Equipment	6
3.13	Deviations from Standard:	6
3.14	General Remarks:	6
3.15	Summary:	6
4.0	Test Set-Up Drawings and Photos	7
4.1	Test Set-up Photo, Radiated Emissions	7
4.2	Test Set-up Photo, Radiated Emissions	9
4.3	Test Set-up Drawings	11
5.0	Test Results	13
5.1.1	2.1046 Effective Radiated Power Limits	13
5.1.2	2.1055 Frequency Tolerance	14
5.1.3	2.1047, 2.1049, 2.1051 Emission Limitations 700MHz Upper C	15
6.0	Test Equipment	16
7.0	Appendix A	17
7.1	Conducted Emission Limits Test	18
7.2	Conducted Output Power Test	42
7.3	Frequency Stability Test	43
7.4	Intermodulation Test	45
7.5	Occupied Bandwidth Modulation Test	58
8.0	Appendix B	63
9.0	Appendix C	65



## 2.0 REVISION DESCRIPTION

Rev	Total Pages	Date	Description
A	65	28 March, 2012	Original Release

## 3.0 DOCUMENTATION

### 3.1 Test Regulations

- 2.1046 - RF power output
- 2.1047 - Modulation Characteristics
- 2.1049 - Occupied Bandwidth
- 2.1051 - Conducted Spurious Emissions
- 2.1053 - Radiated Spurious Emissions
- 2.1055 - Frequency Stability

**The emissions tests were performed according to the following regulations:**

- FCC Part 22
- FCC Part 24
- FCC Part 27**
- FCC Part 90
- IC RSS-131 Issue 2

#### **Environmental Conditions in the lab:**

##### **ADC**

Temperature: 23° C  
Relative Humidity: 24%  
Atmospheric Pressure: 101.9 kPa

##### **INTERTEK**

15-35° C  
30-60%  
86-106 kPa

#### **Power Supply Utilized:**

Power Supply System : 120 VAC, Single Phase

### 3.2 Test Operation Mode

- Standby
- Test Program
- Practice Operation

### ■ Max composite in and out

### 3.3 Configuration of the Device Under Test:

Normal Operation – 700MHz - 746 to 756 MHz

### 3.4 Product Options:

None

### 3.5 EUT Specifications and Requirements:

Length: 10.0"  
Width: 12.0"  
Height: 40.0"  
Weight: 150 pounds

### 3.6 Cables:

Cable Type	Length	From	To
RF	> 3M	Ancillary Equip	EUT
RF	< 3M	EUT	50 Ohm Load
Power	< 3M	Power	Input Power
Fiber	> 3M	Ancillary Equip	EUT

### 3.7 Power Requirements:

Voltage: 120 VAC  
Amps: 5.8 A

### 3.8 Typical Installation and/or Operating Environment:

Outdoor/Indoor. System is typically employed as an outdoor repeater.

### 3.9 Other Special Requirements:

None

### 3.10 EUT Software:

Revision Level: Version V.6 or greater  
Description: Internet Explorer

### 3.11 EUT System Components

Description	Model #	Serial #	FCC ID #
Prism Chassis	FP3-0000000000000111	None	
700MHz Lower ABC Module	FWP-U4MT000MOD	None	

### 3.12 Support Equipment

Description	Manufacturer	Model #	FCC ID #
Power Meter	HP	437B	
Signal Generator	Aeroflex	3413	
Attenuator	Aeroflex	86-30-12	

### 3.13 Deviations from Standard:

Modifications required to pass:

As indicated on the data sheet(s)

▪ **None**

Test Specification Deviations; Additions to or Exclusions from:

As indicated in the Test Plan

▪ **None**

### 3.14 General Remarks:

None

### 3.15 Summary:

The requirements according to the technical regulations are

▪ **met**

not Met

The equipment under test does

▪ **fulfill the general approval requirements mentioned in Section 3.1.**

not fulfill the general approval requirements mentioned in Section 3.1.

## 4.0 TEST SET-UP DRAWINGS AND PHOTOS

[Table of Contents; Section 1.0](#)

### 4.1 Test Set-up Photo, Radiated Emissions








## 4.2 Test Set-up Photo, Radiated Emissions



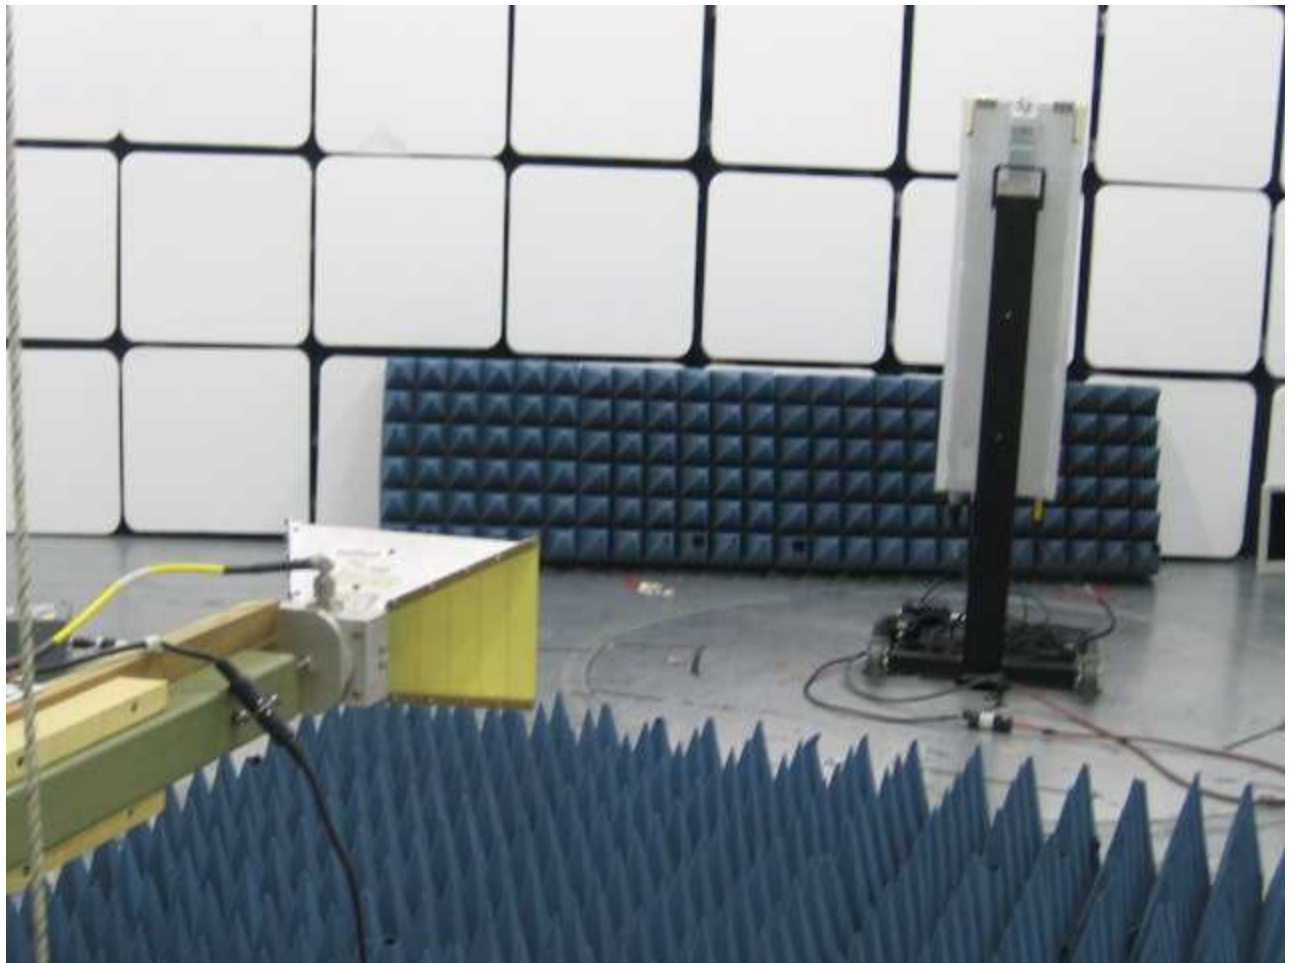


### 4.3 Test Set-up Drawings

## Conducted and Radiated Emission Limits Test

### Conducted Output Power Test


### Inter-Modulation Test

### Occupied Bandwidth Modulation Test

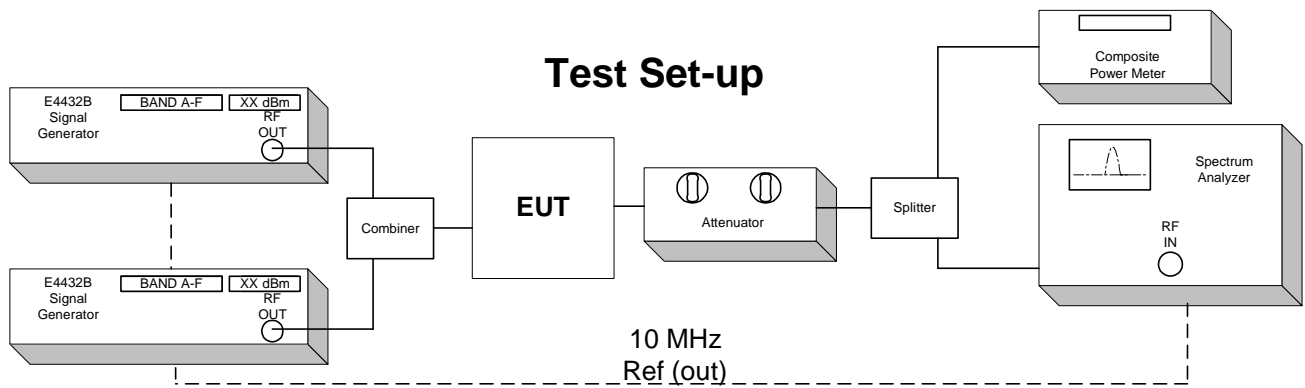

# Frequency Tolerance Test

EUT is specified for outdoor use with temperature range of  $-30^{\circ}$  to  $+50^{\circ}$  C, and was tested with its range.

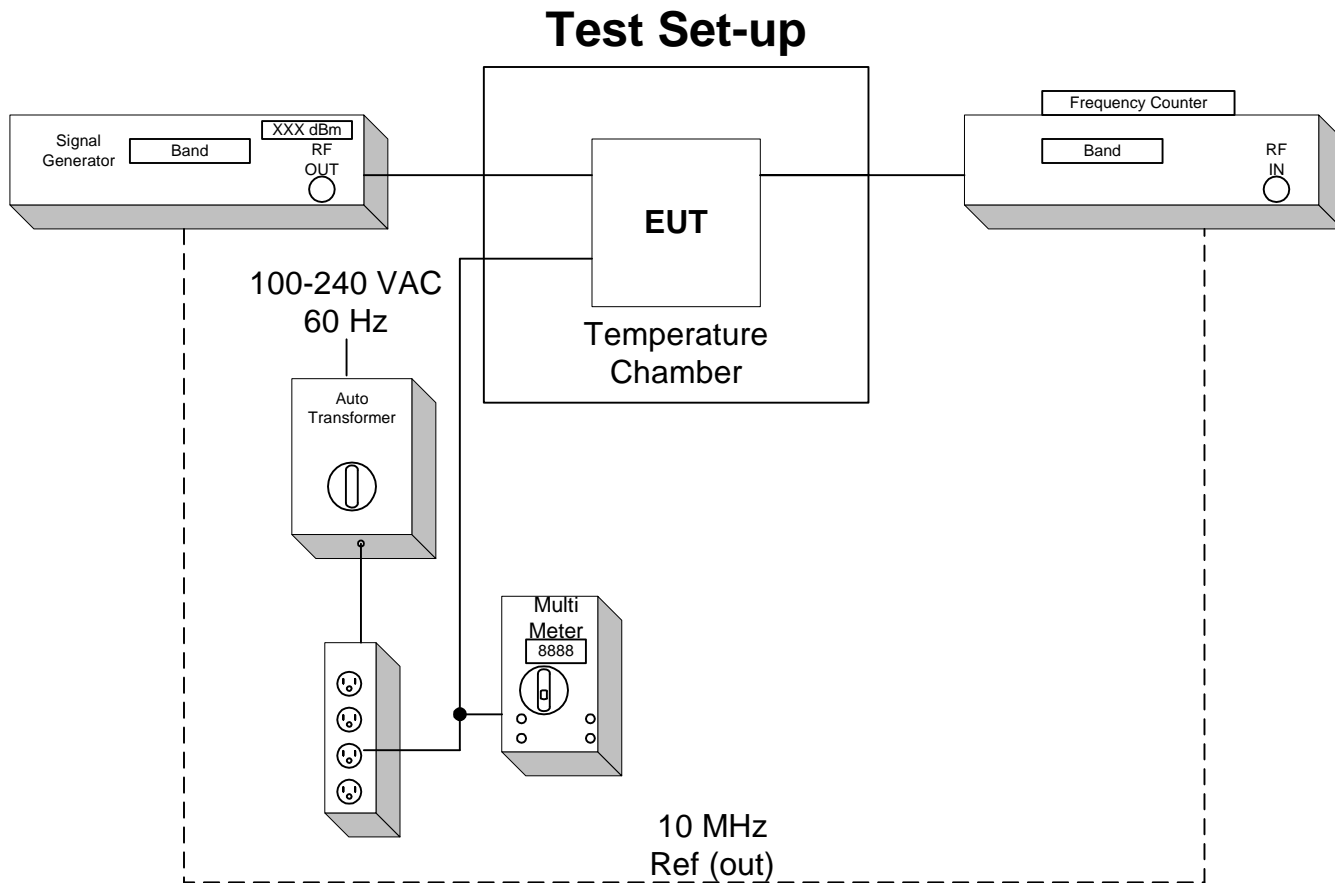

## 5.0 TEST RESULTS

### 5.1.1 2.1046 Effective Radiated Power Limits

#### Test Summary:

- The requirements are:  **MET**  NOT MET

#### Test Location:

INTERTEK (Oakdale, MN)

**ADC facility (Shakopee, MN)**

#### Test Distance:

3 Meters

10 Meters

**Conducted measurement**

#### Test Equipment (ADC):

1, 2, 6, 7, 11, 12

#### Test Limit:

500 Watts or 57 dBm Limit

#### Test Data:

[Conducted Output Power; Section 7.2](#)

[Table of Contents; Section 1.0](#)

**Test Engineer:** Joshua J. Wittman

**Date:** 23 March, 2012

5.1.2 2.1055 Frequency Tolerance

**Test Summary:**

- The requirements are: ■ **MET** □ NOT MET
- The fundamental emission stays within the limit.
- Frequency measured over a temperature range of -30 to 50° C and an input voltage range of 100 to 240 VAC.

**Test Location:**

□ INTERTEK (Oakdale, MN)

■ **ADC facility (Shakopee, MN)**

**Test Equipment (ADC):**

3, 4, 5, 6, 9, 10

**Test Limit:**

TABLE C-1.—FREQUENCY TOLERANCE FOR TRANSMITTERS IN THE PUBLIC MOBILE SERVICES

Frequency range (MHz)	Base, fixed (ppm)	Mobile ≤3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50 .....	20.0	20.0	50.0
50 to 450 .....	5.0	5.0	50.0
450 to 512 .....	2.5	5.0	5.0
821 to 896 .....	1.5	2.5	2.5
928 to 929 .....	5.0	n/a	n/a
929 to 960 .....	1.5	n/a	n/a
2110 to 2220 .....	10.0	n/a	n/a

**Test Data:**

[Frequency Stability; Section 7.3](#)

[Table of Contents; Section 1.0](#)

**Test Engineer:** Joshua J. Wittman

**Date:** 26 March, 2012

### 5.1.3 2.1047, 2.1049, 2.1051 Emission Limitations 700MHz Upper C

#### Test Summary:

- The requirements are:  **MET**  NOT MET
- Out of band emissions were less than -13 dBm.
- Outside the emission bandwidth of the carrier, all emissions are attenuated at least 26 dB below the transmitter power.

#### Test Location:

INTERTEK (Oakdale, MN)

#### ADC facility (Shakopee, MN)

#### Test Equipment (ADC):

1, 2, 6, 7, 11, 12, 13

#### Test Limit:

Out of band emissions:

Attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB, or -13 dBm.

Outside of the carrier emissions bandwidth:

26 dB below the transmitter power

#### Test Data:

[Conducted Emissions; Section 7.1](#)

[Intermodulation; Section 7.4](#)

[Occupied Bandwidth; Section 7.5](#)

Radiated Emissions; ([Appendix B](#))

[Table of Contents; Section 1.0](#)

**Test Engineer:** Joshua J. Wittman

**Date:** 23 March, 2012

**Date:** 23 March, 2012

**Date:** 23 March, 2012

## 6.0 TEST EQUIPMENT

[Table of Contents; Section 1.0](#)

Number	Description	Manufacturer	Model	ADC Serial Number	Cal Due	Used
1	Spectrum Analyzer	HP	8563E	MC27690	6-30-12	☒
2	Power Meter	HP	437B	MC27541	6-30-12	☒
3	Multimeter	Fluke	79	MC18758	6-30-12	☒
4	Frequency Counter	HP	5347A	MC27569	6-30-12	☒
5	Temperature Chamber	ESPEC	PSL-4G	MC10075	8-30-11	☒
6	Signal Generator	Aeroflex	3413	MC57343	11-9-12	☒
7	Signal Generator	Aeroflex	3413	MC57947	4-15-12	☒
8	Variable Auto Transformer	Staco	1520CT	MC44655	CNR	☒
9	Digital Barometer	Fisher Scientific	02-403	MC50719	1-25-13	☒
10	Attenuator	Aeroflex	49-30-33	N/A	CNR	☒
11	Attenuator	Aeroflex	86-30-12	N/A	CNR	☒
12	RF Power Sensor	Agilent	8482H	MC27519	6-30-12	☒
13	Spectrum Analyzer	Rhode & Schwarze	FSQ-8	MC54251	6-30-12	☒

Equipment with a Calibration Not Required (CNR) listing is verified and compensated for with NIST traceable calibrated equipment.



7.0

## APPENDIX A

Conducted Emissions Test Data

[Table of Contents; Section 1.0](#)

**Test Engineer:** Joshua J. Wittman

## 7.1 Conducted Emission Limits Test

[Table of Contents; Section 1.0](#)

[Back to Emission Limits; Section 5.1.3](#)

The out of band emissions were measured directly from the EUT antenna output with a spectrum analyzer from 30 MHz to the 10<sup>th</sup> harmonic of the highest carrier frequency. Test signals used are LTE 3MHz BW and LTE 5 MHz BW. The different signals were input one at a time to the EUT. In all cases, the out of band emissions were less than -13 dBm from the equation

$$(19\text{dBm} - [43 + 10\log(0.08\text{W})])$$

Band edge compliance is also demonstrated using a LTE 3MHz BW & LTE 5 MHz BW signal at the upper and lower limits of the band.

The Host unit connects directly to the BTS via coax. The Host unit does not connect to an antenna or amplifier, thus it is a Part 15 device and has been tested and is compliant as such. No FCC ID is necessary.

Industry practice has generally set the input signal power level. Test signal used was  $\approx$  -25 dBm input to DHU. Industry practice has generally set the output signal power level.

Prism Remote:

Range: 100 - 240 VAC

Tested @: 120 VAC

Tested @: 5.8 A

Digital Host Unit (DHU):

Range: 21-60 VDC

Tested @: 48 VDC

Tested @: 3.5 A

Application details for 2.1033(c)(8), 2.1033(c)(10), and 2.1033(c)(13):

27.53(c)(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations;

27.53(c)(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;

27.53(c)(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

27.53(f) For operations in the 746-763 MHz, 775-793 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

RF amplifier output stage has three devices with 27.5 VDC voltage applied. Current for device #1 is 3.5A max. Devices #2 and #3 have 1.5A max.

The input to the host unit has a digital attenuation chip (ALC) to provide protection from overdrive with 5-10 millisecond attack time / 100 millisecond decay time and 31 dB of head room, such that single channel operation, or multi-channel operation will not exceed nominal gain of the system.

The frequency stability is derived by the BTS, base transceiver station. This product uses internal frequency stability to keep the signal inside our filter bandwidths. This means that the frequency can change, but the frequency that transmits is still at the original frequency. The remote system uses the data over the fiber optic path to phase/frequency lock to the host. The purpose is to frequency lock the up- and down-conversion local oscillators, and thereby eliminate any end-to-end frequency shift.

The spurious limitation is completed with the duplexer. The ALC also suppresses in-band spurious by preventing PA overdrive, while the duplexer suppresses out-of-band spurious. Internal to the electronics, the use of SAW filters provides for higher Q roll-off at band edges.

This equipment does not modulate the RF, so there is no modulation limiter. This equipment does not change the modulation of the RF or the occupied bandwidth of any channel. It transports the signal, as is, over an optical link. The RF input is not changed in the RF output.


This is a constant gain device, so the setup controls the output. There is an overdrive and overpower limit control that prevents excess power.

Results:


Pass (See plots)

Conducted Emissions  
700UpperC Path 1  
Center: 751 MHz

LTE 3 MHz Channel Bandwidth  
Span: 5 MHz  
RBW/VBW: 100 kHz

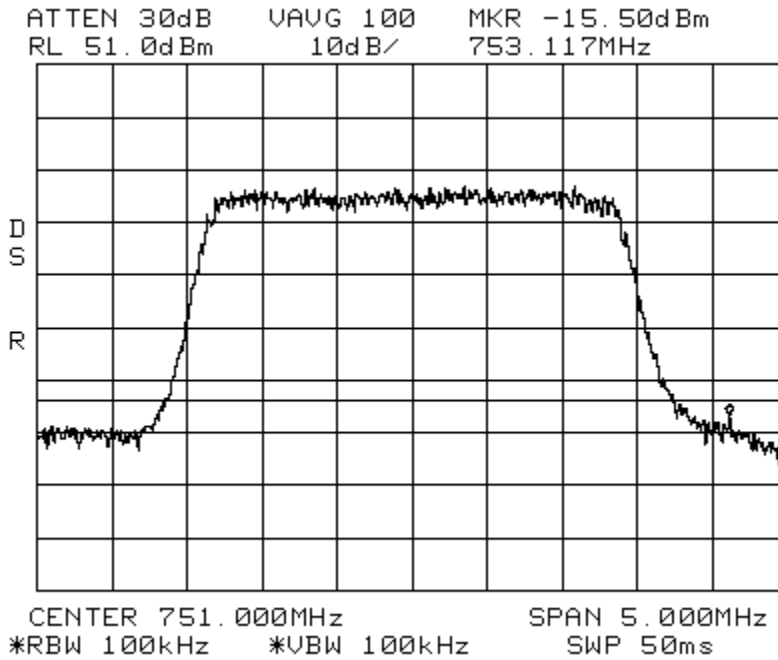

Conducted Emissions    LTE 3 MHz Channel Bandwidth    700UpperC Path 1  
Span: 30 MHz to 1 GHz    RBW/VBW: 300 kHz

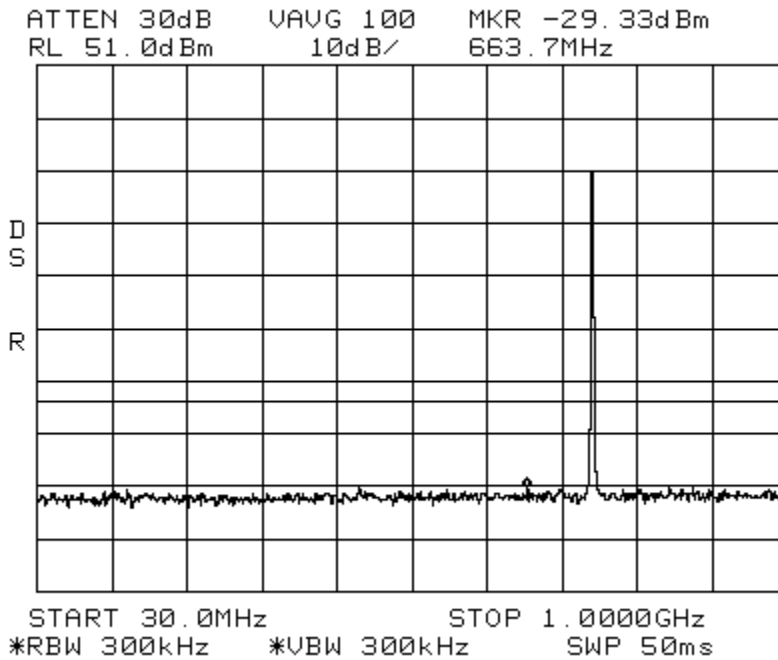


Conducted Emissions

LTE 3 MHz Channel Bandwidth

700UpperC Path 1

Span: 1 GHz to 10 GHz

RBW/VBW: 1 MHz

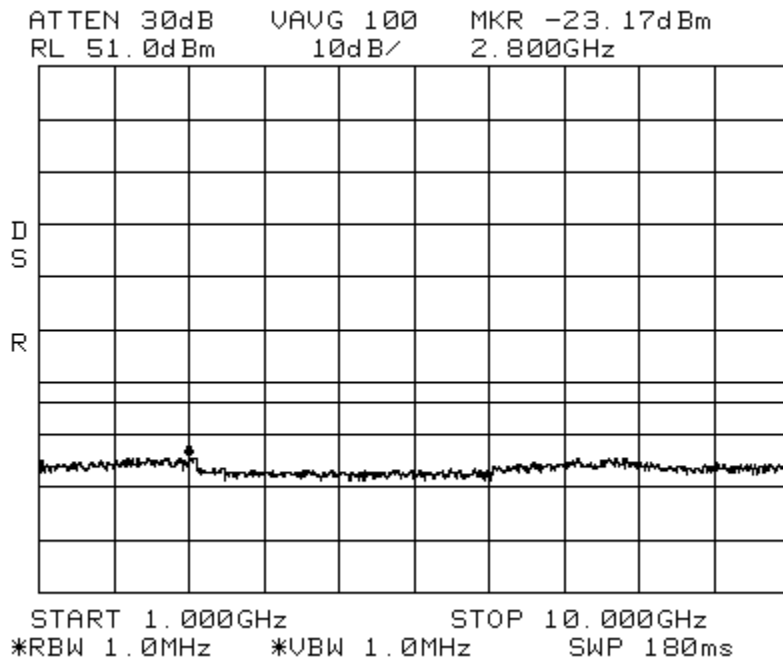

Conducted Emissions

LTE 5 MHz Channel Bandwidth


700UpperC Path

1

Center: 751 MHz

Span: 10 MHz

RBW/VBW: 100 kHz

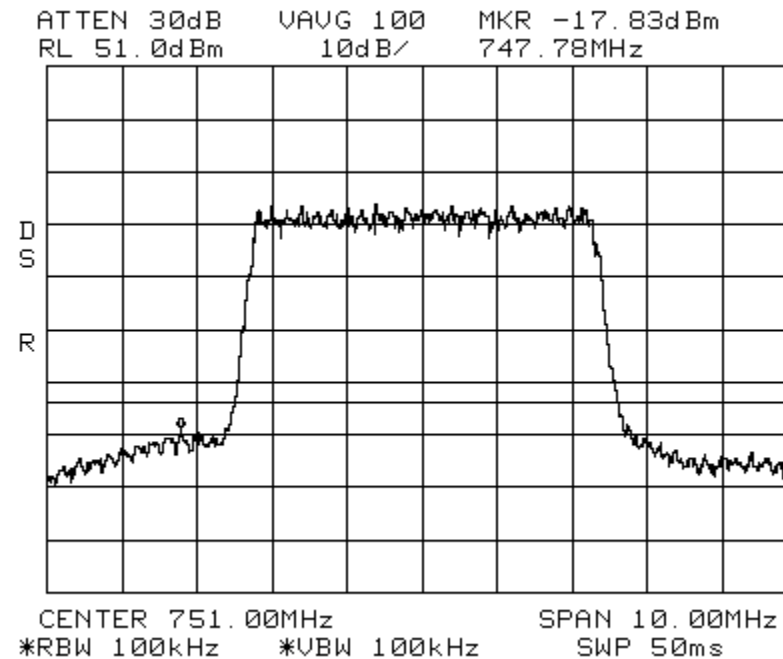


Conducted Emissions

LTE 5 MHz Channel Bandwidth

700UpperC Path 1

Span: 30 MHz to 1 GHz

RBW/VBW: 300 kHz

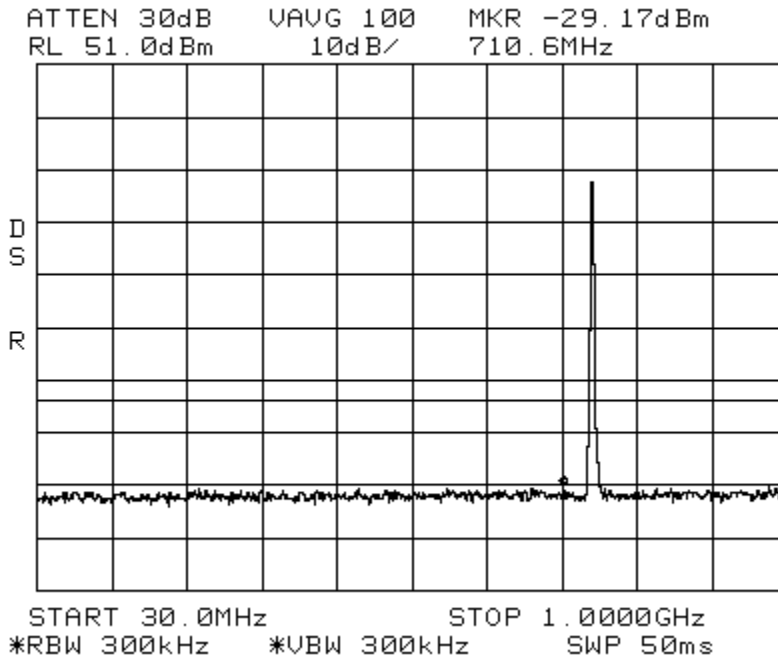


Conducted Emissions

LTE 5 MHz Channel Bandwidth

700UpperC Path 1

Span: 1 GHz to 10 GHz

RBW/VBW: 1 MHz

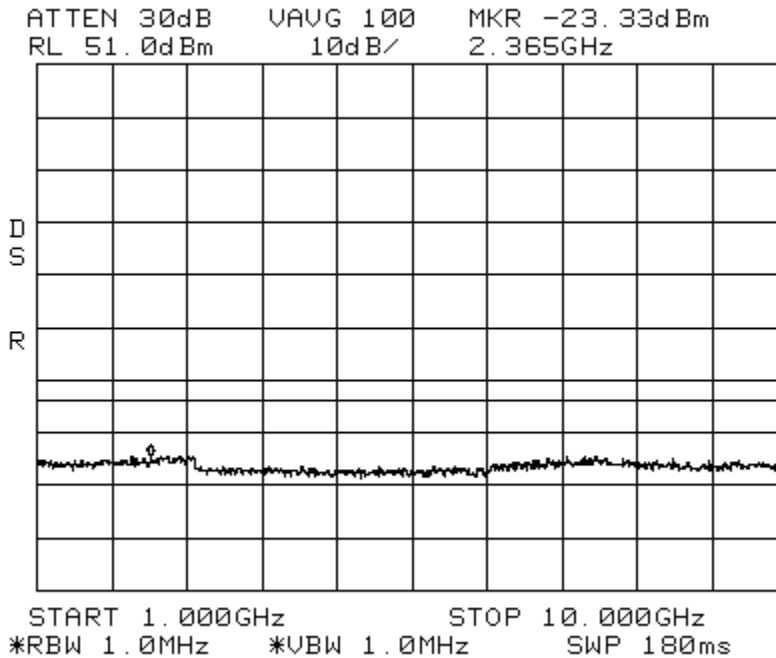


Conducted Emissions  
Center: 751 MHz

LTE 3 MHz Channel Bandwidth  
Span: 5 MHz

700UpperC Path 2  
RBW/VBW: 100 kHz

\*ATTEN 30dB    VAUG 100    MKR -17.83dBm  
RL 51.0dBm    10dB/    748.750MHz

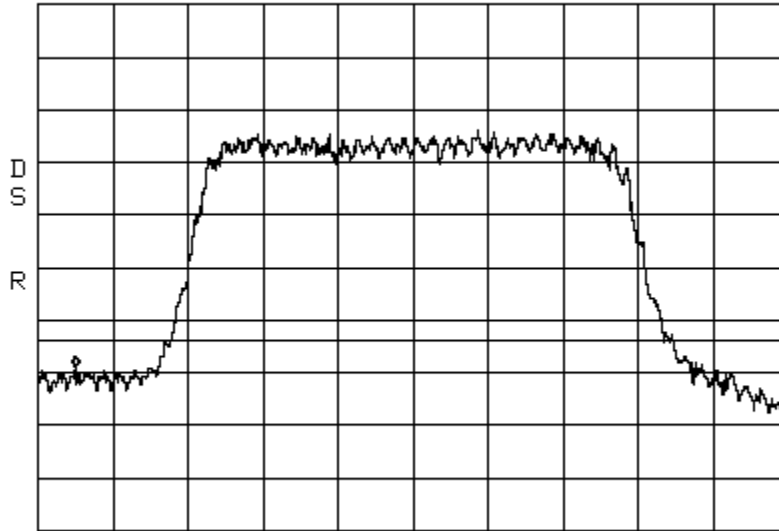


CENTER 751.000MHz    SPAN 5.000MHz  
\*RBW 100kHz    \*VBW 100kHz    SWP 50ms

Conducted Emissions  
Span: 30 MHz to 1 GHz

LTE 3 MHz Channel Bandwidth


700UpperC Path 2  
RBW/VBW: 300 kHz

\*ATTEN 30dB    VAUG 100    MKR -29.17dBm  
RL 51.0dBm    10dB/    681.5MHz

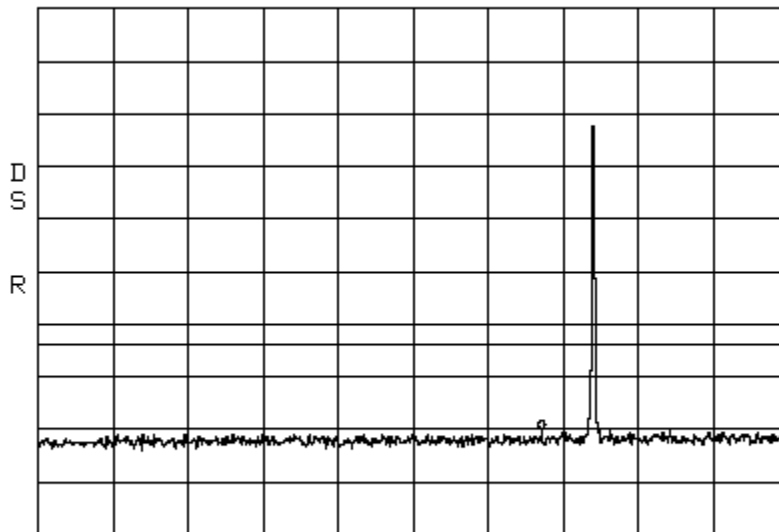


START 30.0MHz    STOP 1.0000GHz  
\*RBW 300kHz    \*VBW 300kHz    SWP 50ms

Conducted Emissions      LTE 3 MHz Channel Bandwidth      700UpperC Path 2  
Span: 1 GHz to 10 GHz      RBW/VBW: 1 MHz

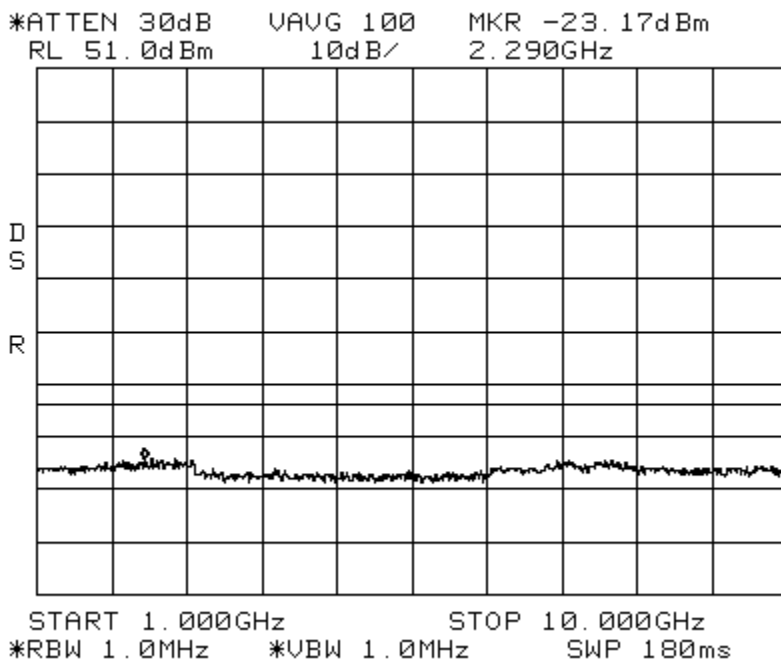

Conducted Emissions      LTE 5 MHz Channel Bandwidth      700UpperC Path 2  
Center: 751 MHz      Span: 10 MHz      RBW/VBW: 100 kHz

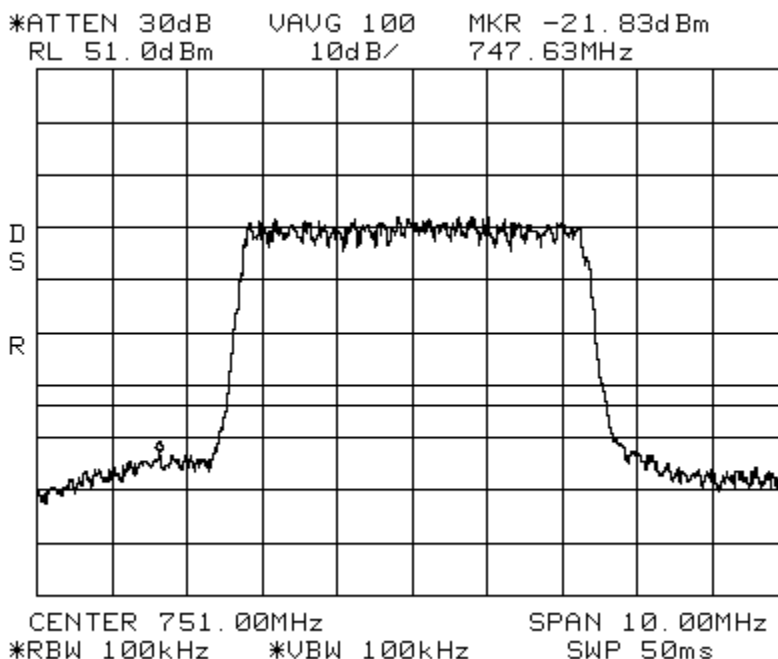



Conducted Emissions


LTE 5 MHz Channel Bandwidth

700UpperC Path 2

Span: 30 MHz to 1 GHz

RBW/VBW: 300 kHz

\*ATTEN 30dB    VAUG 100    MKR -29.17dBm  
RL 51.0dBm    10dB/    797.9MHz

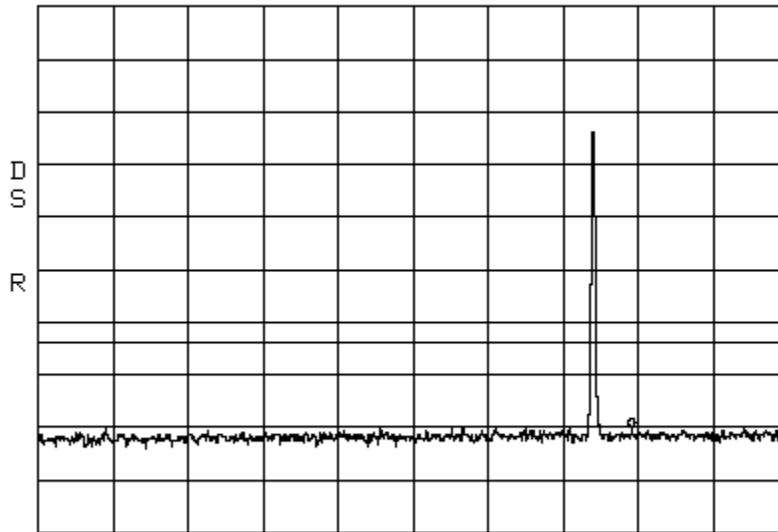

START 30.0MHz    STOP 1.0000GHz  
\*RBW 300kHz    \*VBW 300kHz    SWP 50ms

Conducted Emissions


LTE 5 MHz Channel Bandwidth

700UpperC Path 2

Span: 1 GHz to 10 GHz

RBW/VBW: 1 MHz

\*ATTEN 30dB    VAUG 100    MKR -23.17dBm  
RL 51.0dBm    10dB/    7.810GHz

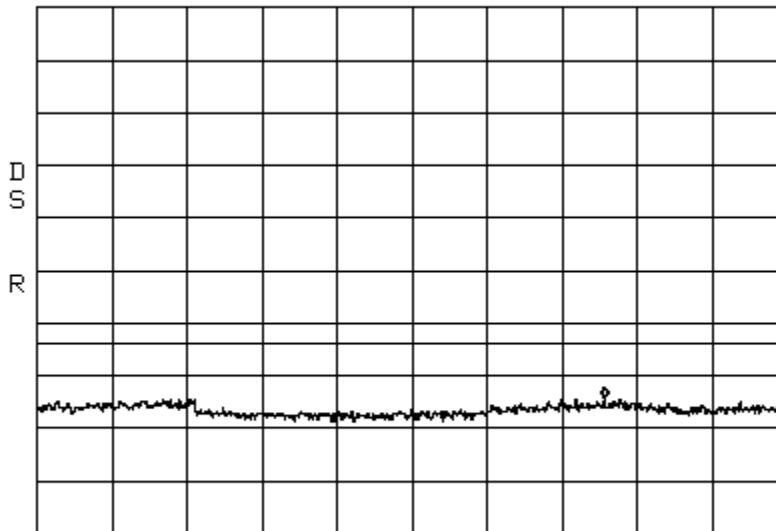


START 1.000GHz    STOP 10.000GHz  
\*RBW 1.0MHz    \*VBW 1.0MHz    SWP 180ms

Conducted Emissions

LTE 3 MHz Channel Bandwidth

700UpperC Path 1

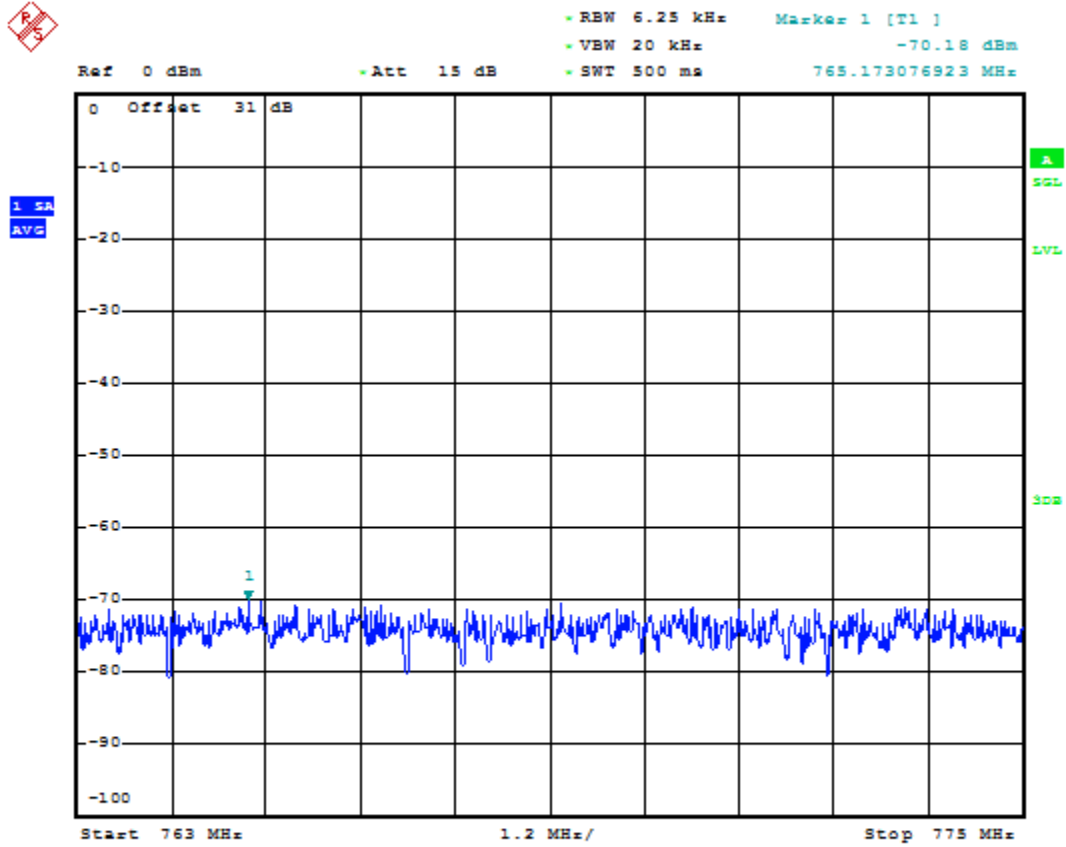

Date: 26.MAR.2012 13:58:44


Conducted Emissions

LTE 3 MHz Channel Bandwidth

700UpperC Path 2



1 SA  
AVG

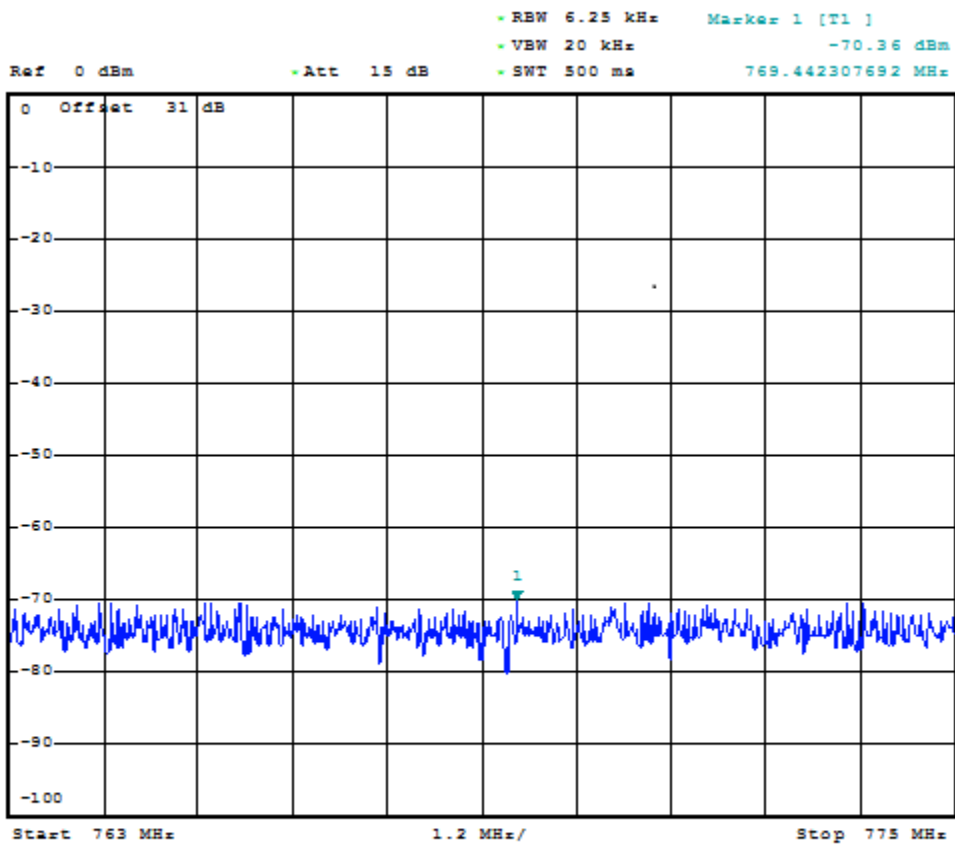

Date: 26.MAR.2012 14:01:56



Conducted Emissions

LTE 5 MHz Channel Bandwidth


700UpperC Path 2



RBW 6.25 kHz    Marker 1 [T1 ]  
VBW 20 kHz    -70.61 dBm  
SWT 500 ms    768.346153846 MHz

Ref 0 dBm    -Att 15 dB

1 SA  
AVG

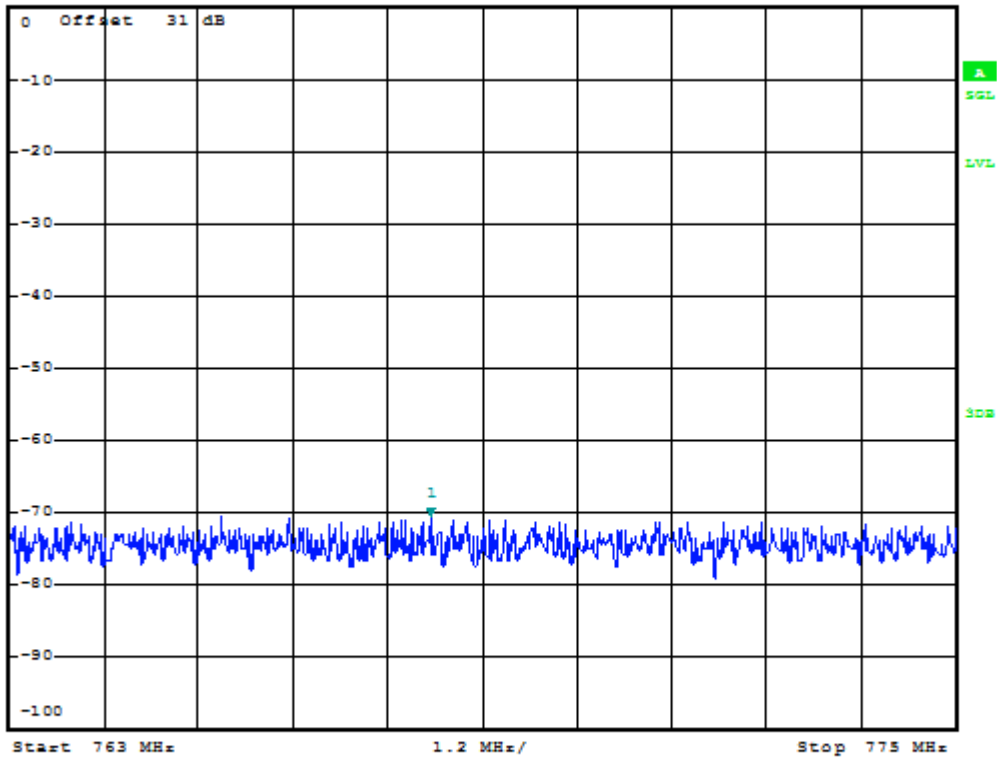

Date: 26.MAR.2012 14:07:17

Conducted Emissions


LTE 3 MHz Channel Bandwidth

700UpperC Path 1



• RBW 6.25 kHz    Marker 1 [T1 ]  
• VBW 20 kHz        -69.89 dBm  
• SWT 500 ms

Ref 0 dBm        -Att 15 dB        799.211538462 MHz

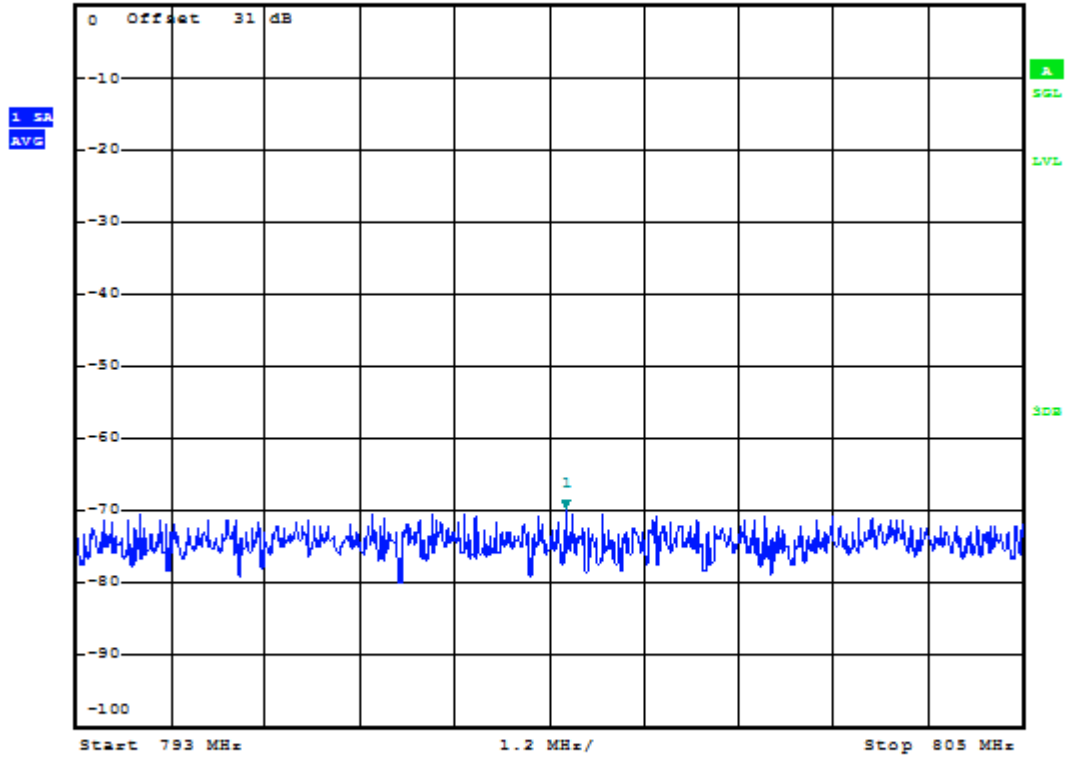

Date: 26.MAR.2012 14:10:17

Conducted Emissions


LTE 3 MHz Channel Bandwidth

700UpperC Path 2



• RBW 6.25 kHz    Marker 1 [T1 ]  
• VBW 20 kHz    -70.28 dBm  
• SWT 500 ms

Ref 0 dBm    -Att 15 dB    799.288461538 MHz

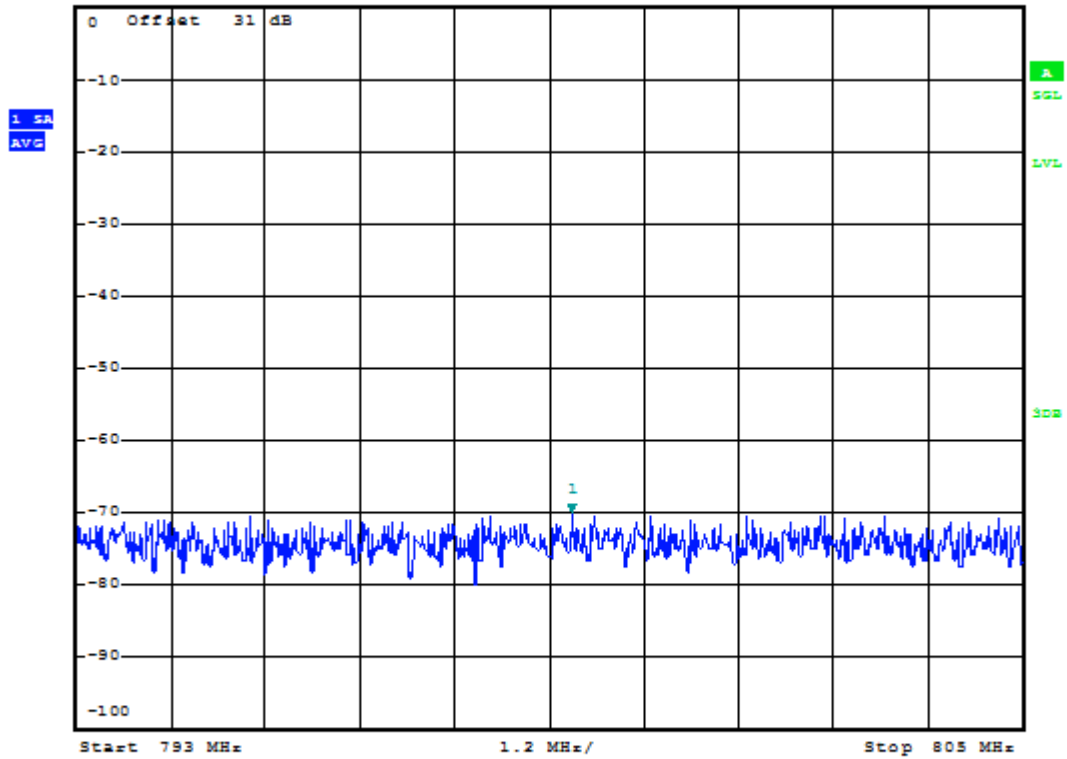

Date: 26.MAR.2012 14:11:24

Conducted Emissions


LTE 5 MHz Channel Bandwidth

700UpperC Path 1



• RBW 6.25 kHz    Marker 1 [T1 ]  
• VBW 20 kHz        -70.46 dBm  
• SWT 500 ms

Ref 0 dBm        -Att 15 dB        801.442307692 MHz

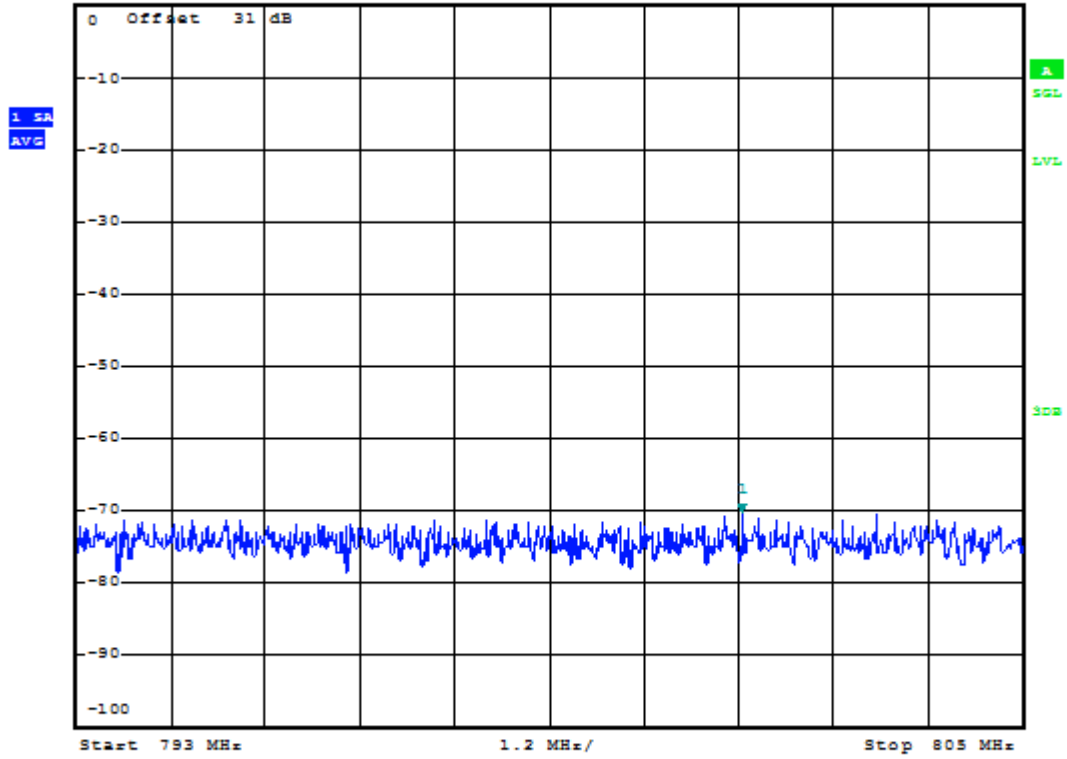

Date: 26.MAR.2012 14:12:59




Conducted Emissions

LTE 5 MHz Channel Bandwidth

700UpperC Path 2



Ref 0 dBm      -Att 15 dB      RBW 6.25 kHz      Marker 1 [T1 ]      -69.93 dBm  
VBW 20 kHz      SWT 500 ms      802.115384615 MHz

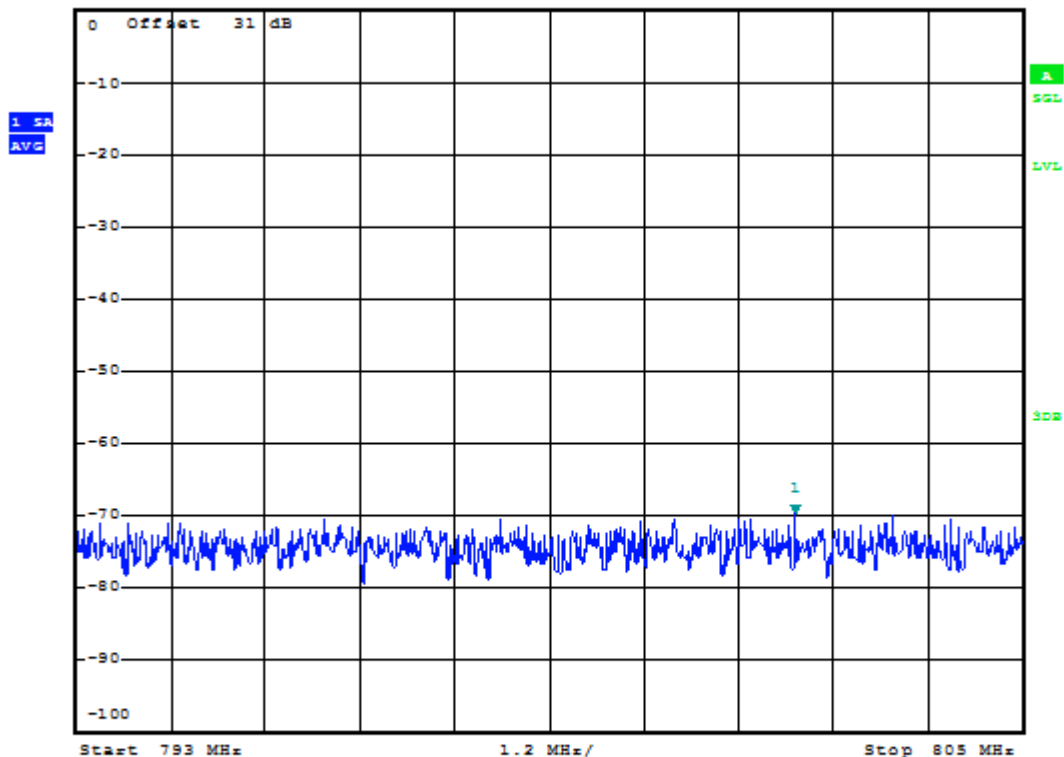

Date: 26.MAR.2012 14:14:15

Conducted Emissions

LTE 3 MHz Channel Bandwidth


700UpperC Path 1



RBW 6.25 kHz    Marker 1 [T1 ]  
VBW 20 kHz    -68.83 dBm  
SWT 2 s    1.591201923 GHz

Ref 0 dBm    Att 15 dB

1 SA  
AVG

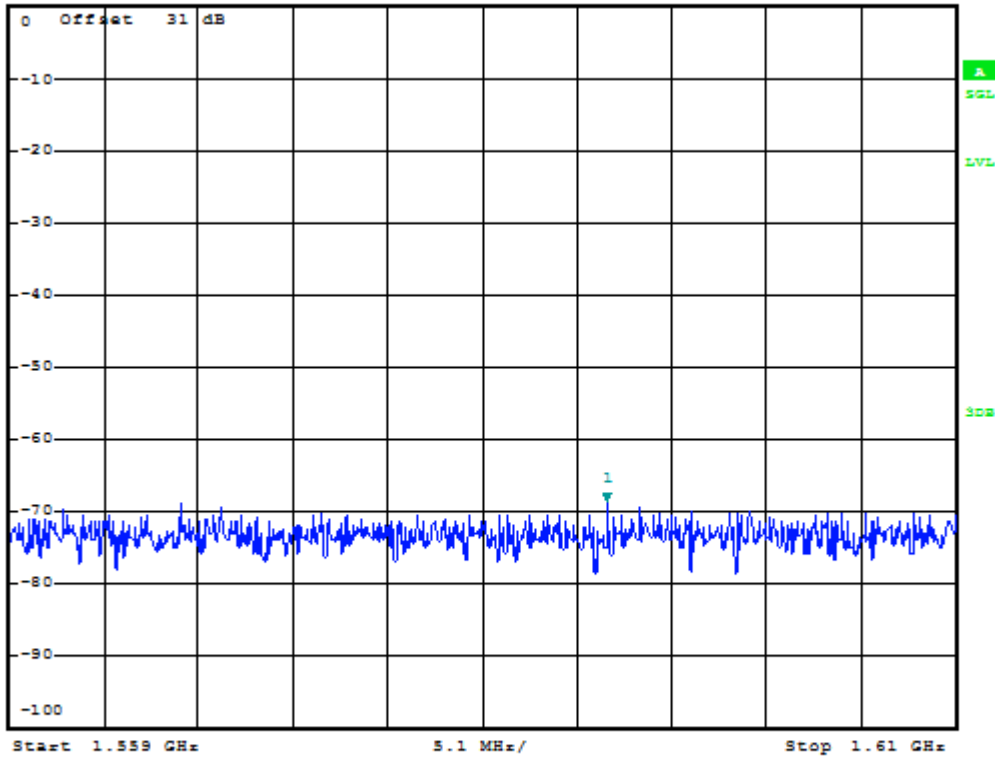

Date: 26.MAR.2012 14:22:00

Conducted Emissions

LTE 3 MHz Channel Bandwidth

700UpperC Path 2




-RBW 6.25 kHz    Marker 1 [T1 ]  
-VBW 20 kHz        -69.18 dBm  
-SWT 2 s            1.606403846 GHz

Ref 0 dBm

-Att 15 dB

1 SA  
AVG

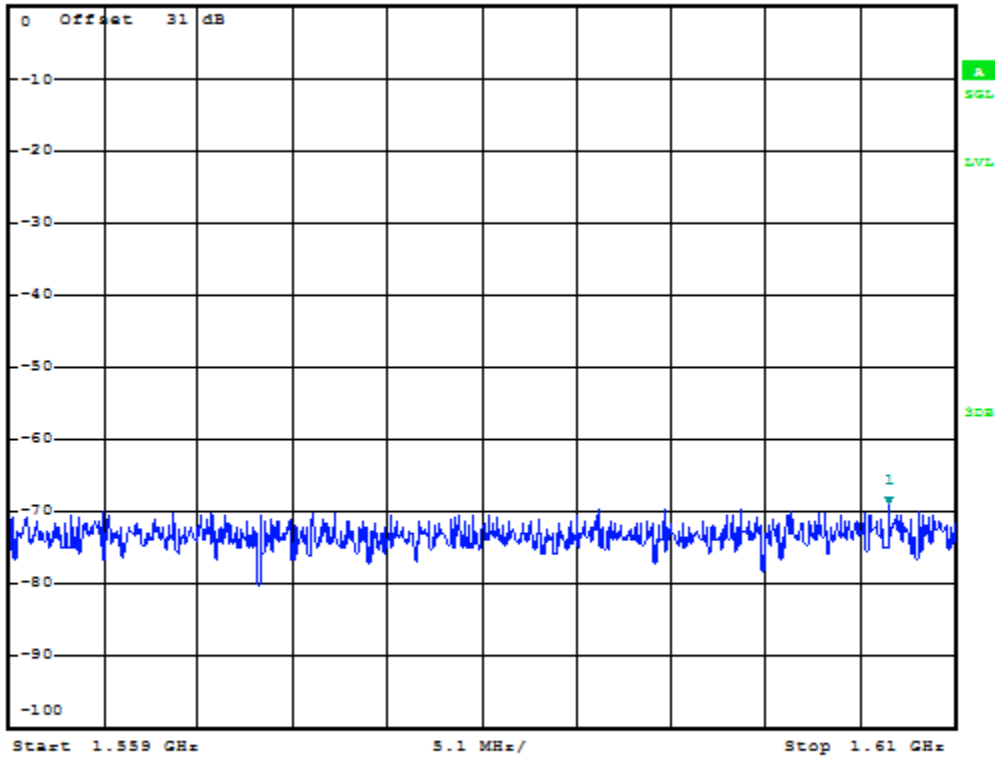

Date: 26.MAR.2012 14:23:54




Conducted Emissions

LTE 5 MHz Channel Bandwidth

700UpperC Path 2




1 SA  
AVG

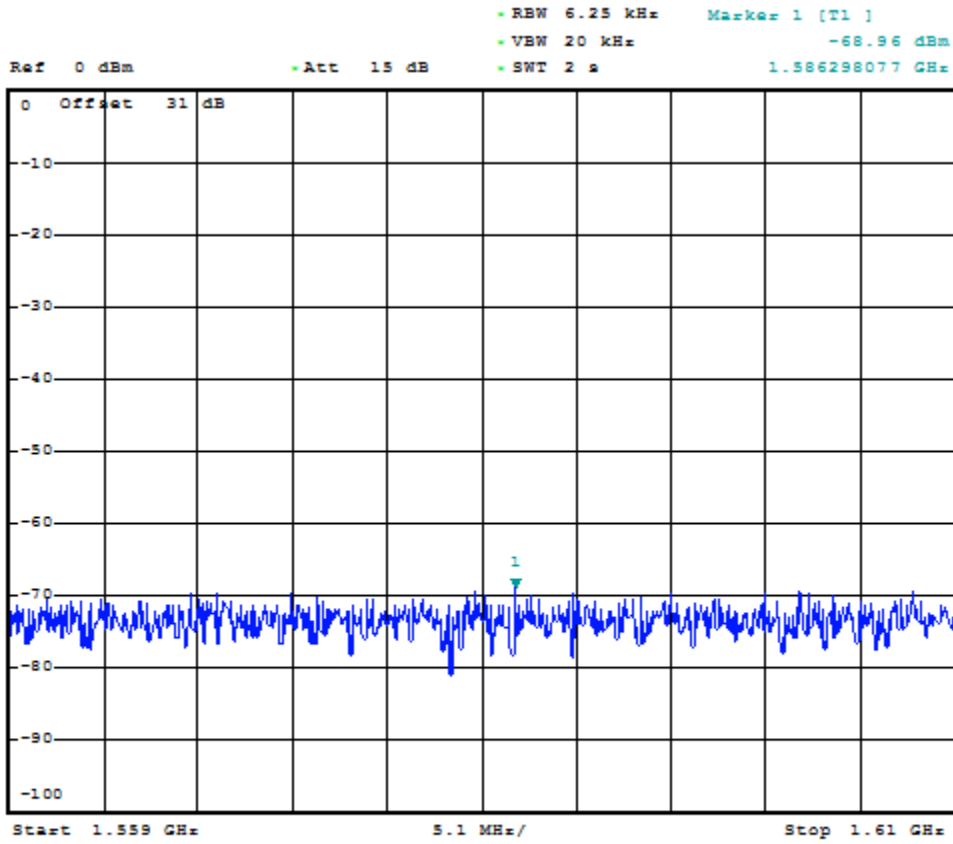

Date: 26.MAR.2012 14:27:05


Band\_Edge                    LTE 3 MHz Channel Bandwidth                    700UpperC Path 1  
 Center: 741.68 MHz Span: 10 MHz                    RBW: 30 kHz VBW: 100 kHz  
 ATTEN 30dB                    VAVG 100                    MKR -25.67dBm  
 RL 51.0dBm                    10dB/                    746.01MHz

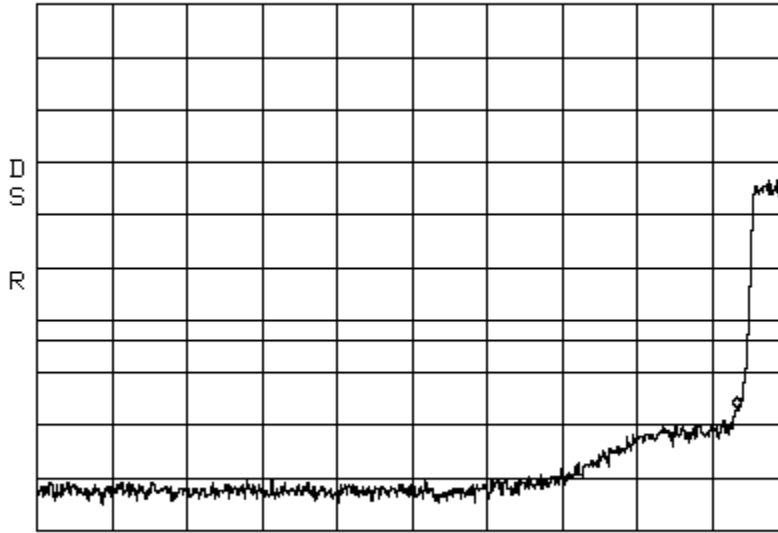

CENTER 741.68MHz                    SPAN 10.00MHz  
 \*RBW 30kHz                    \*VBW 100kHz                    SWP 50ms


Band\_Edge                    LTE 3MHz Channel Bandwidth                    700UpperC Path 1  
 Center: 754.3 MHz Span: 5 MHz                    RBW: 30 kHz VBW: 100 kHz

ATTEN 30dB                    VAVG 100                    MKR -19.17dBm  
 RL 51.0dBm                    10dB/                    756.00MHz

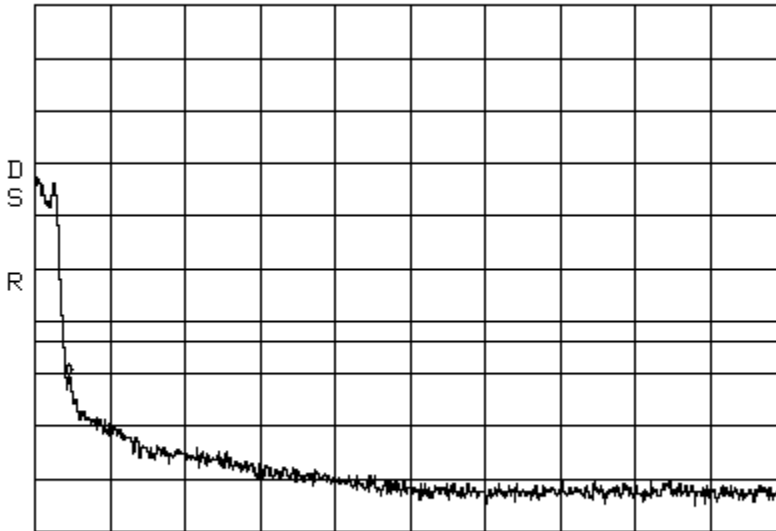


CENTER 760.55MHz                    SPAN 10.00MHz  
 \*RBW 30kHz                    \*VBW 100kHz                    SWP 50ms

Band\_Edge                    LTE 5 MHz Channel Bandwidth                    700UpperC Path 1  
Center: 741.75 MHz Span: 10 MHz                    RBW: 30 kHz VBW: 100 kHz

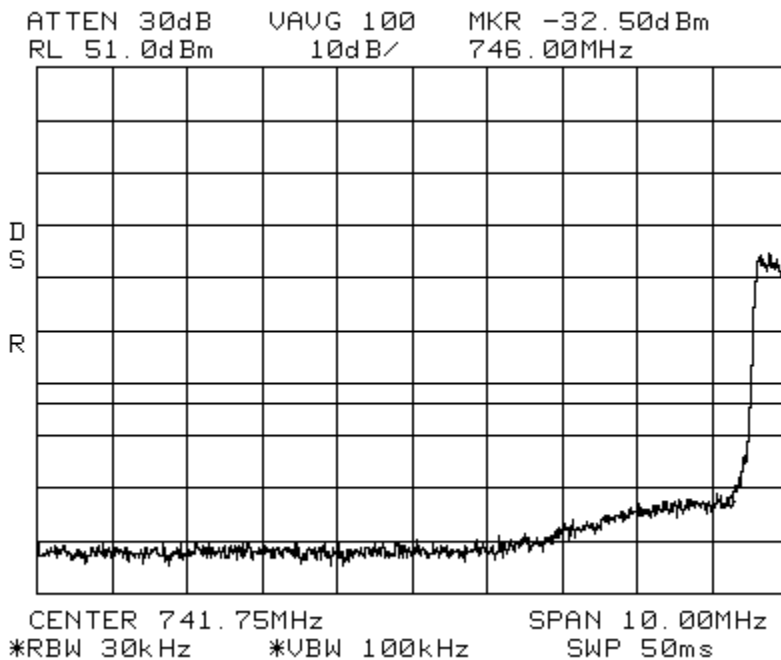


Band\_Edge                    LTE 5 MHz Channel Bandwidth                    700UpperC Path 1  
Center: 760.30 MHz Span: 10 MHz                    RBW: 30 kHz VBW: 100 kHz

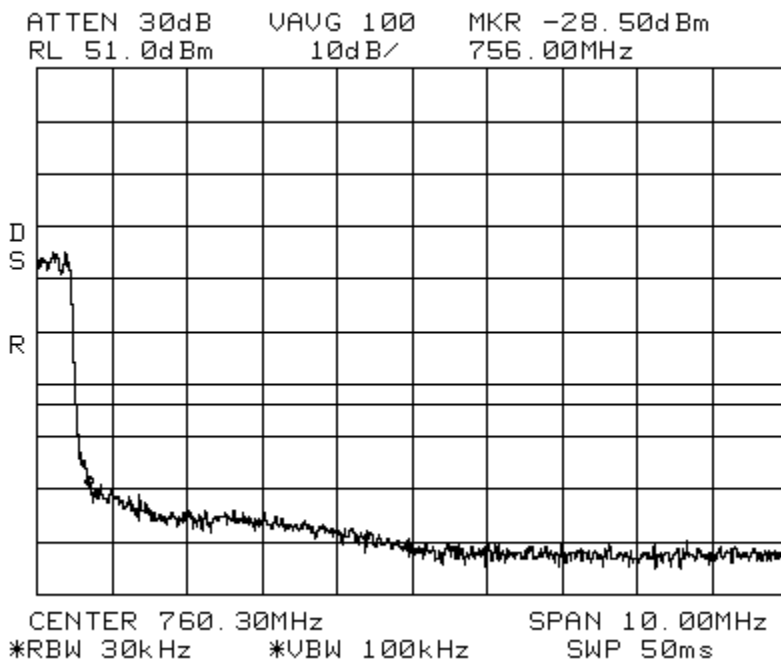

Band\_Edge            LTE 3 MHz Channel Bandwidth            700UpperC Path 2  
Center: 741.8 MHz    Span: 10 MHz            RBW: 30 kHz VBW: 100 kHz


\*ATTEN 30dB    VAUG 100    MKR -19.83dBm  
RL 51.0dBm    10dB/    746.00MHz

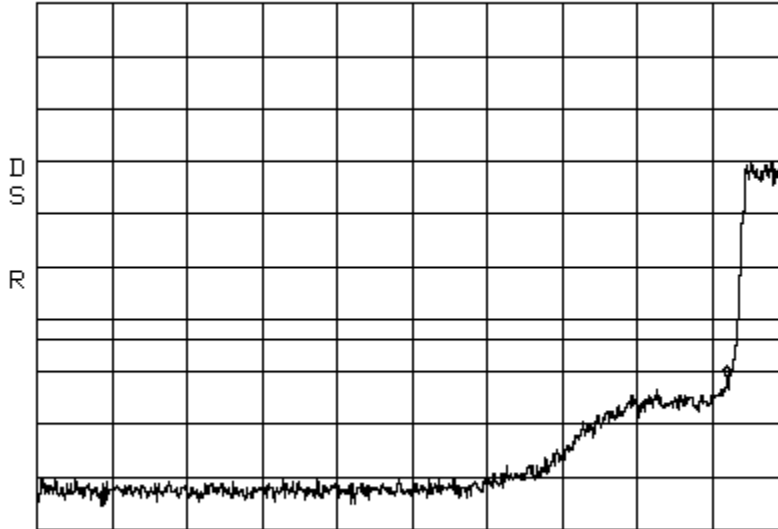

CENTER 741.80MHz            SPAN 10.00MHz  
\*RBW 30kHz            \*VBW 100kHz            SWP 50ms

Band\_Edge            LTE 3MHz Channel Bandwidth            700UpperC Path 2  
Center: 760.3 MHz    Span: 10 MHz            RBW: 30 kHz VBW: 100 kHz

\*ATTEN 30dB    VAUG 100    MKR -17.00dBm  
RL 51.0dBm    10dB/    756.00MHz

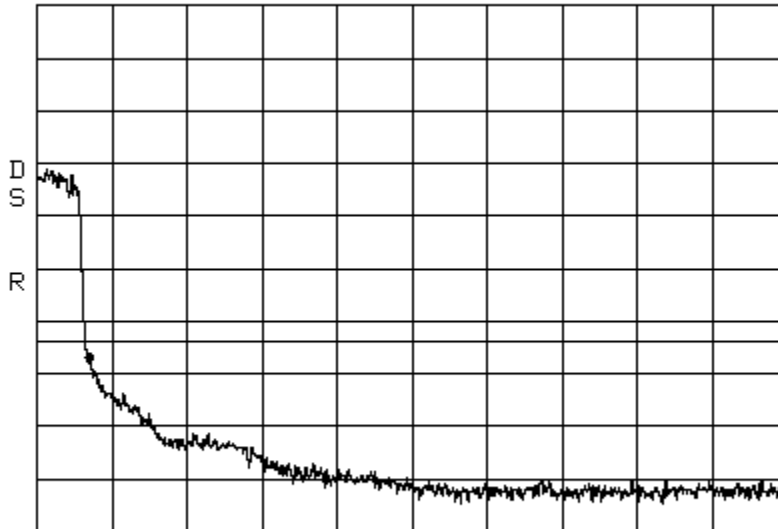


CENTER 760.30MHz            SPAN 10.00MHz  
\*RBW 30kHz            \*VBW 100kHz            SWP 50ms



Band\_Edge            LTE 5 MHz Channel Bandwidth            700UpperC Path 2  
Center: 742.0 MHz    Span: 10 MHz            RBW: 30 kHz VBW: 100 kHz


\*ATTEN 30dB    VAUG 100    MKR -27.83dBm  
RL 51.0dBm    10dB/    746.00MHz

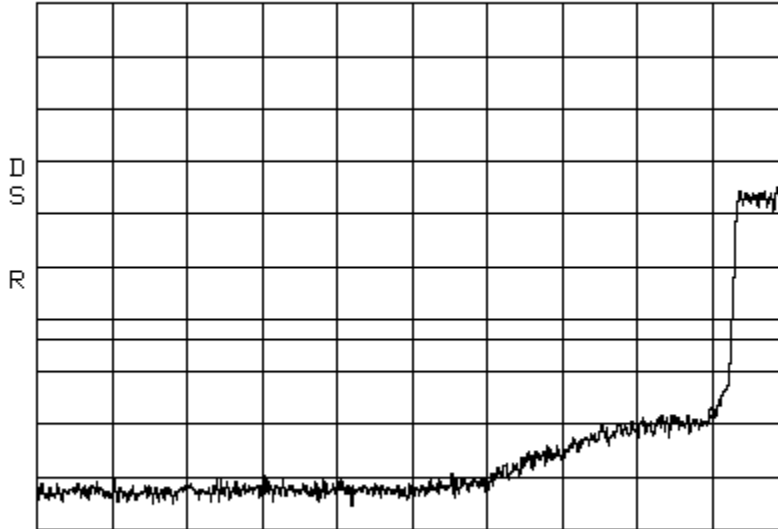

CENTER 742.00MHz            SPAN 10.00MHz  
\*RBW 30kHz            \*VBW 100kHz            SWP 50ms

Band\_Edge            LTE 5 MHz Channel Bandwidth            700UpperC Path 2  
Center: 760.3 MHz    Span: 10 MHz            RBW: 30 kHz VBW: 100 kHz

\*ATTEN 30dB    VAUG 100    MKR -23.17dBm  
RL 51.0dBm    10dB/    756.00MHz

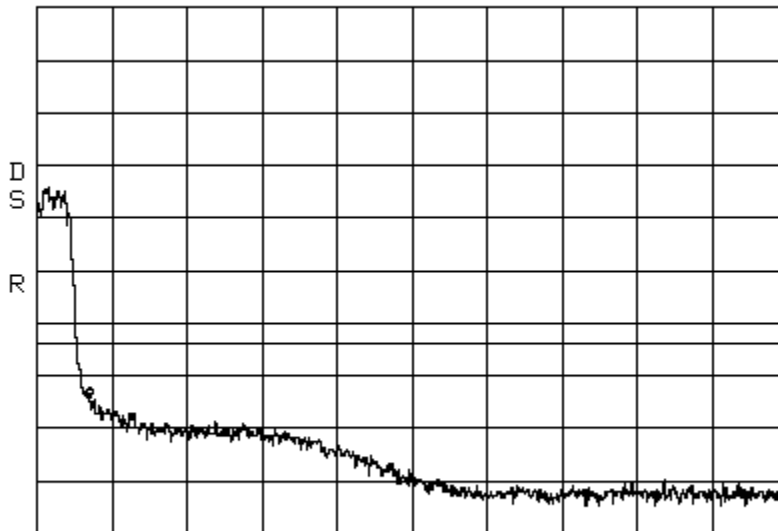

CENTER 760.30MHz            SPAN 10.00MHz  
\*RBW 30kHz            \*VBW 100kHz            SWP 50ms

## 7.2 Conducted Output Power Test

[Table of Contents; Section 1.0](#)

[Back to Conducted Output Power; Section 5.1.1](#)

\*Note: The EUT is a fixed repeater and not a base station.

This measurement was made as a direct conducted emission measurement. The output from the EUT antenna connector was connected to the power meter. The carrier output, below, was conducted using a single LTE 3MHz BW and LTE 5 MHz BW signal.

A signal was used at the low, mid and high parts of the selected band. The power meter level was offset by 31.00 dB to compensate for cable loss and attenuator between the EUT and the power meter.

**3 MHz LTE Path 1      24.77 Watts**  
Carrier Frequency Carrier Output

747.5MHz	43.55dBm
751 MHz	43.94dBm
754.5MHz	43.61dBm

**5 MHz LTE Path 1      23.06 Watts**  
Carrier Frequency Carrier Output

748.5MHz	43.06dBm
751 MHz	43.63dBm
753.5MHz	43.04dBm

**3 MHz LTE Path 2      23.06 Watts**  
Carrier Frequency Carrier Output

747.5MHz	43.60dBm
751 MHz	43.89dBm
754.5MHz	43.30dBm

**5 MHz LTE Path 2      24.54 Watts**  
Carrier Frequency Carrier Output

748.5MHz	43.82dBm
751 MHz	43.90dBm
753.5MHz	43.53dBm

### 7.3 Frequency Stability Test

[Table of Contents; Section 1.0](#)  
[Back to Frequency Stability; Section 5.1.1](#)

#### Path 1

HOST	REMOTE			
Input Voltage	Input Voltage	Carrier Frequency	Measured Frequency	Meets Requirements?
21 VDC	100 VAC	746.200 MHz	746.200 MHz	Yes
48 VDC	170 VAC	746.200 MHz	746.200 MHz	Yes
60 VDC	240 VAC	746.200 MHz	746.200 MHz	Yes
21 VDC	100 VAC	751.000 MHz	751.000 MHz	Yes
48 VDC	170 VAC	751.000 MHz	751.000 MHz	Yes
60 VDC	240 VAC	751.000 MHz	751.000 MHz	Yes
21 VDC	100 VAC	755.800 MHz	755.800 MHz	Yes
48 VDC	170 VAC	755.800 MHz	755.800 MHz	Yes
60 VDC	240 VAC	755.800 MHz	755.800 MHz	Yes
Temperature		Carrier Frequency	Measured Frequency	Meets Requirements?
-30 Deg. C		746.200 MHz	746.200 MHz	Yes
-20 Deg. C		746.200 MHz	746.200 MHz	Yes
-10 Deg. C		746.200 MHz	746.200 MHz	Yes
0 Deg. C		746.200 MHz	746.200 MHz	Yes
10 Deg. C		746.200 MHz	746.200 MHz	Yes
20 Deg. C		746.200 MHz	746.200 MHz	Yes
30 Deg. C		746.200 MHz	746.200 MHz	Yes
40 Deg. C		746.200 MHz	746.200 MHz	Yes
50 Deg. C		746.200 MHz	746.200 MHz	Yes
-30 Deg. C		751.000 MHz	751.000 MHz	Yes
-20 Deg. C		751.000 MHz	751.000 MHz	Yes
-10 Deg. C		751.000 MHz	751.000 MHz	Yes
0 Deg. C		751.000 MHz	751.000 MHz	Yes
10 Deg. C		751.000 MHz	751.000 MHz	Yes
20 Deg. C		751.000 MHz	751.000 MHz	Yes
30 Deg. C		751.000 MHz	751.000 MHz	Yes
40 Deg. C		751.000 MHz	751.000 MHz	Yes
50 Deg. C		751.000 MHz	751.000 MHz	Yes
-30 Deg. C		755.800 MHz	755.800 MHz	Yes
-20 Deg. C		755.800 MHz	755.800 MHz	Yes
-10 Deg. C		755.800 MHz	755.800 MHz	Yes
0 Deg. C		755.800 MHz	755.800 MHz	Yes
10 Deg. C		755.800 MHz	755.800 MHz	Yes
20 Deg. C		755.800 MHz	755.800 MHz	Yes
30 Deg. C		755.800 MHz	755.800 MHz	Yes
40 Deg. C		755.800 MHz	755.800 MHz	Yes
50 Deg. C		755.800 MHz	755.800 MHz	Yes

## Path 2

HOST	REMOTE			
Input Voltage	Input Voltage	Carrier Frequency	Measured Frequency	Meets Requirements?
21 VDC	100 VAC	746.200 MHz	746.200 MHz	Yes
48 VDC	170 VAC	746.200 MHz	746.200 MHz	Yes
60 VDC	240 VAC	746.200 MHz	746.200 MHz	Yes
21 VDC	100 VAC	751.000 MHz	751.000 MHz	Yes
48 VDC	170 VAC	751.000 MHz	751.000 MHz	Yes
60 VDC	240 VAC	751.000 MHz	751.000 MHz	Yes
21 VDC	100 VAC	755.800 MHz	755.800 MHz	Yes
48 VDC	170 VAC	755.800 MHz	755.800 MHz	Yes
60 VDC	240 VAC	755.800 MHz	755.800 MHz	Yes
Temperature		Carrier Frequency	Measured Frequency	Meets Requirements?
-30 Deg. C		746.200 MHz	746.200 MHz	Yes
-20 Deg. C		746.200 MHz	746.200 MHz	Yes
-10 Deg. C		746.200 MHz	746.200 MHz	Yes
0 Deg. C		746.200 MHz	746.200 MHz	Yes
10 Deg. C		746.200 MHz	746.200 MHz	Yes
20 Deg. C		746.200 MHz	746.200 MHz	Yes
30 Deg. C		746.200 MHz	746.200 MHz	Yes
40 Deg. C		746.200 MHz	746.200 MHz	Yes
50 Deg. C		746.200 MHz	746.200 MHz	Yes
-30 Deg. C		751.000 MHz	751.000 MHz	Yes
-20 Deg. C		751.000 MHz	751.000 MHz	Yes
-10 Deg. C		751.000 MHz	751.000 MHz	Yes
0 Deg. C		751.000 MHz	751.000 MHz	Yes
10 Deg. C		751.000 MHz	751.000 MHz	Yes
20 Deg. C		751.000 MHz	751.000 MHz	Yes
30 Deg. C		751.000 MHz	751.000 MHz	Yes
40 Deg. C		751.000 MHz	751.000 MHz	Yes
50 Deg. C		751.000 MHz	751.000 MHz	Yes
-30 Deg. C		755.800 MHz	755.800 MHz	Yes
-20 Deg. C		755.800 MHz	755.800 MHz	Yes
-10 Deg. C		755.800 MHz	755.800 MHz	Yes
0 Deg. C		755.800 MHz	755.800 MHz	Yes
10 Deg. C		755.800 MHz	755.800 MHz	Yes
20 Deg. C		755.800 MHz	755.800 MHz	Yes
30 Deg. C		755.800 MHz	755.800 MHz	Yes
40 Deg. C		755.800 MHz	755.800 MHz	Yes
50 Deg. C		755.800 MHz	755.800 MHz	Yes

## 7.4 Intermodulation Test


[Table of Contents; Section 1.0](#)

[Back to Emission Limits; Section 5.1.3](#)

The inter-modulation products test was performed for the EUT. One test was performed with the modulation type. 2 signals input to the EUT at lower end channels, and 1 signal input to the EUT at upper end channel. The modulation types tested were LTE 3MHz BW and LTE 5 MHz BW. An investigation was made from 30 MHz to the 10th Harmonic of the highest fundamental frequency (~10 GHz). The following plots show the results.

Results:  
(See Plots)


Intermodulation LTE 3 MHz Channel Bandwidth **Low** 700UpperC Path 1  
 Center: 751 MHz Span: 35 MHz RBW/VBW: 100 kHz  
 ATTN 30dB VAUG 100 MKR -19.67dBm  
 RL 51.0dBm 10dB/ 744.82MHz

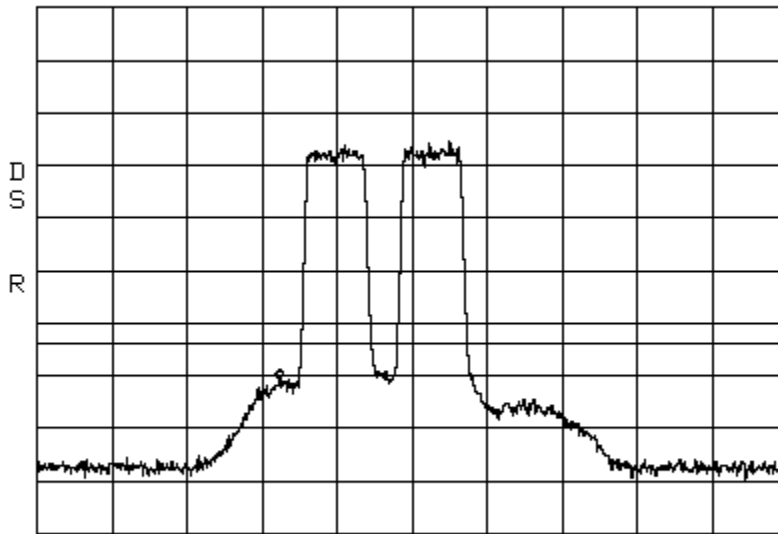

CENTER 751.00MHz SPAN 35.00MHz  
 \*RBW 100kHz \*VBW 100kHz SWP 50ms


Intermodulation LTE 3MHz Channel Bandwidth **Low** 700UpperC Path 1  
 Span: 30 MHz to 1 GHz RBW/VBW: 300 kHz

ATTN 30dB VAUG 100 MKR -17.83dBm  
 RL 51.0dBm 10dB/ 754.3MHz

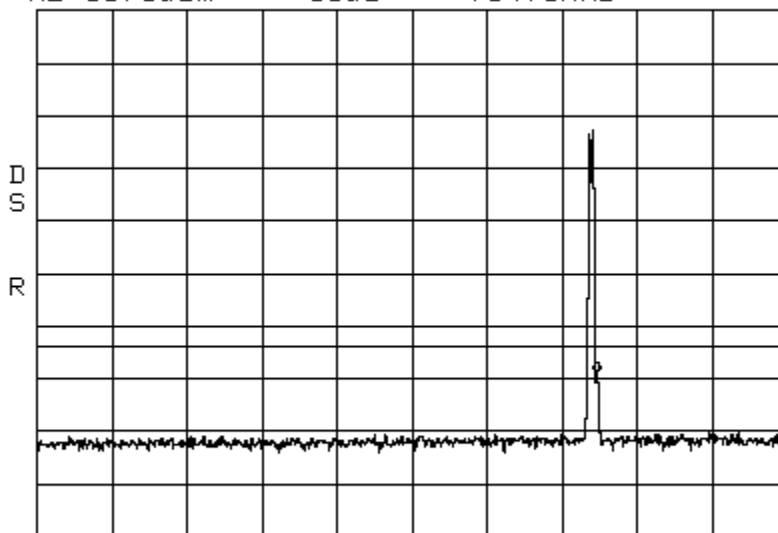


START 30.0MHz STOP 1.0000GHz  
 \*RBW 300kHz \*VBW 300kHz SWP 50ms


Intermodulation      LTE 3 MHz Channel Bandwidth \_Low      700UpperC Path 1  
Span: 1 GHz to 10 GHz      RBW/VBW: 1 MHz

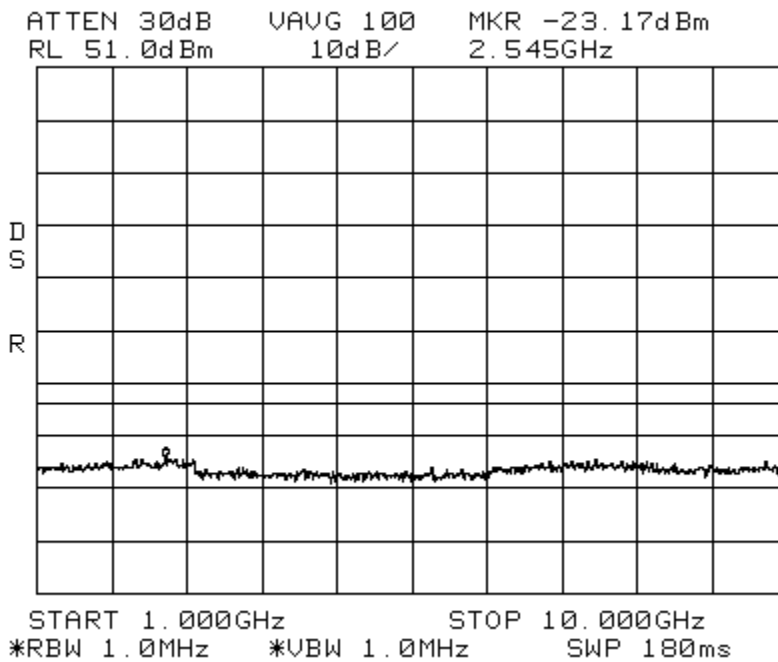


Intermodulation      LTE 3 MHz Channel Bandwidth \_High      700UpperC Path 1  
Center: 751 MHz      Span: 35 MHz      RBW/VBW: 100 kHz

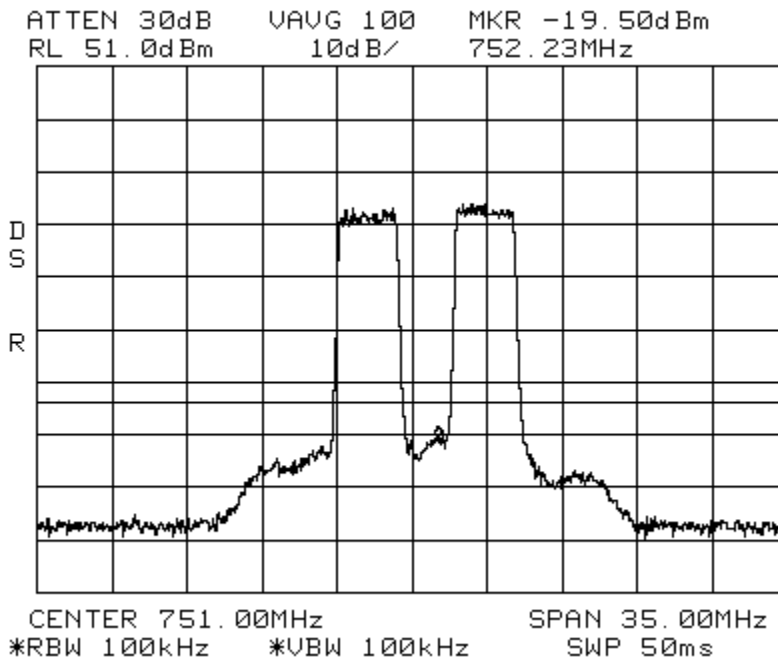

Intermodulation      LTE 3 MHz Channel Bandwidth \_High      700UpperC Path 1  
Span: 30 MHz to 1 GHz      RBW/VBW: 300 kHz

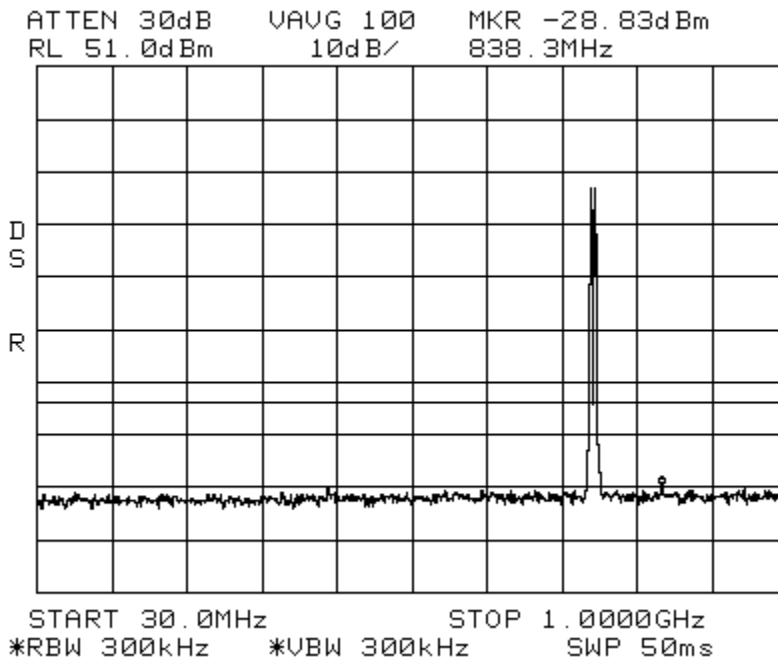


Intermodulation      LTE 3 MHz Channel Bandwidth \_High      700UpperC Path 1  
Span: 1 GHz to 10 GHz      RBW/VBW: 1 MHz

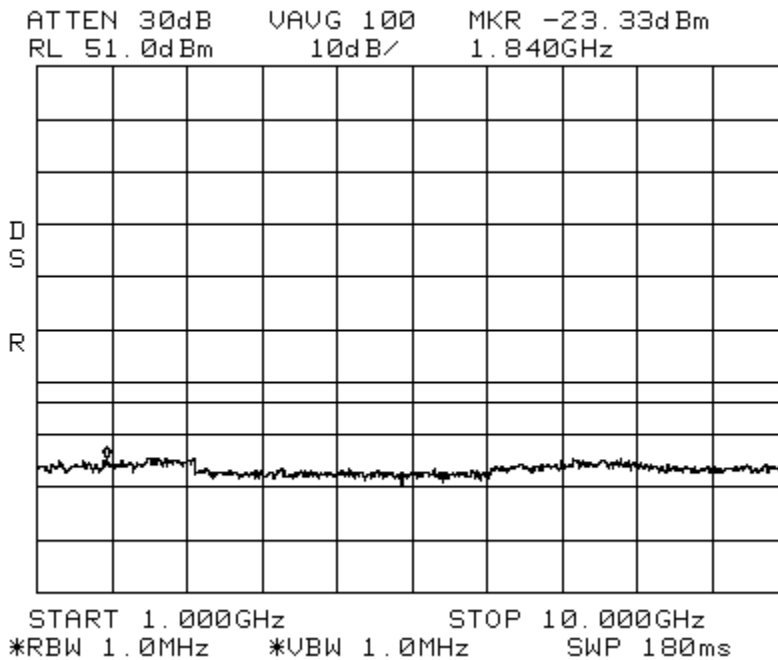





Intermodulation LTE 3 MHz Channel Bandwidth \_Apart 700UpperC Path 1  
Center: 751 MHz Span: 70 MHz RBW/VBW: 100 kHz

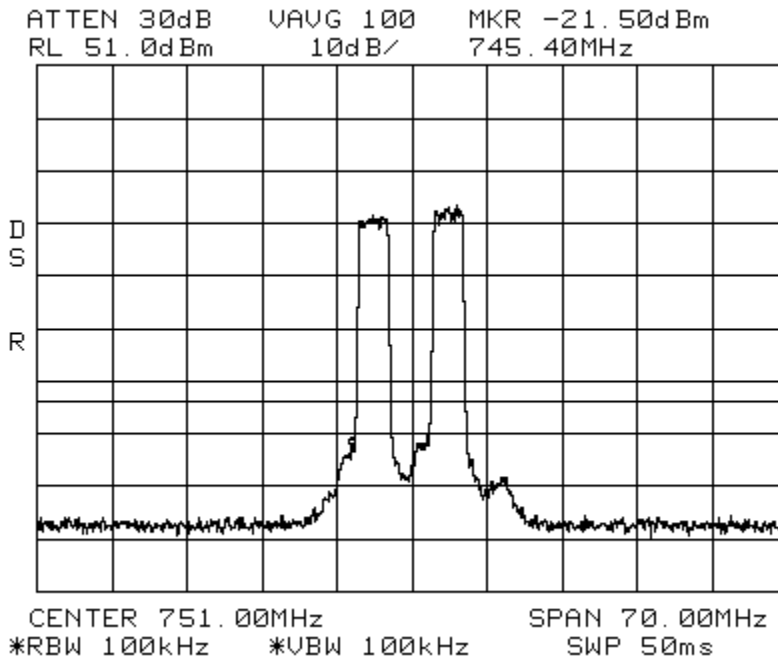


Intermodulation LTE 3 MHz Channel Bandwidth \_Apart 700UpperC Path 1  
Span: 30 MHz to 1 GHz RBW/VBW: 300 kHz

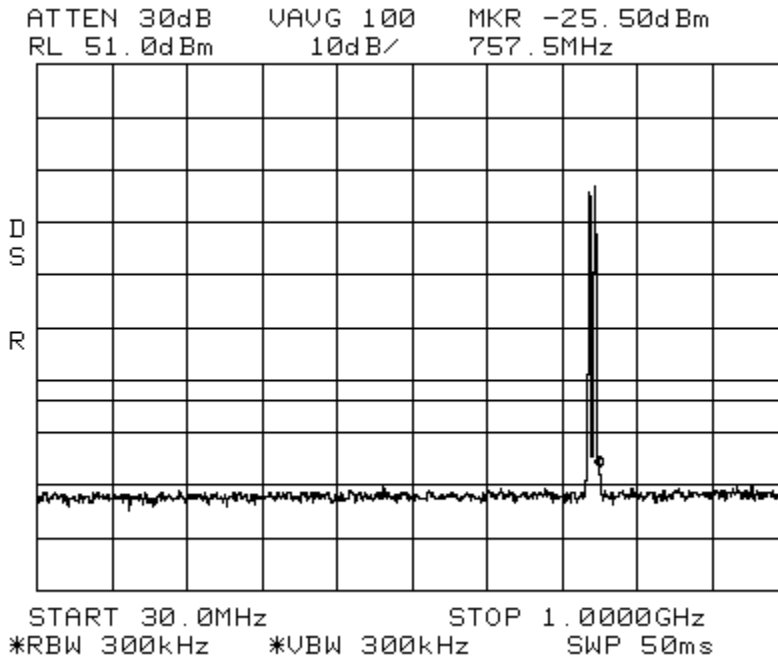


Intermodulation LTE 3 MHz Channel Bandwidth\_Apart 700UpperC Path 1  
Span: 1 GHz to 10 GHz RBW/VBW: 1 MHz

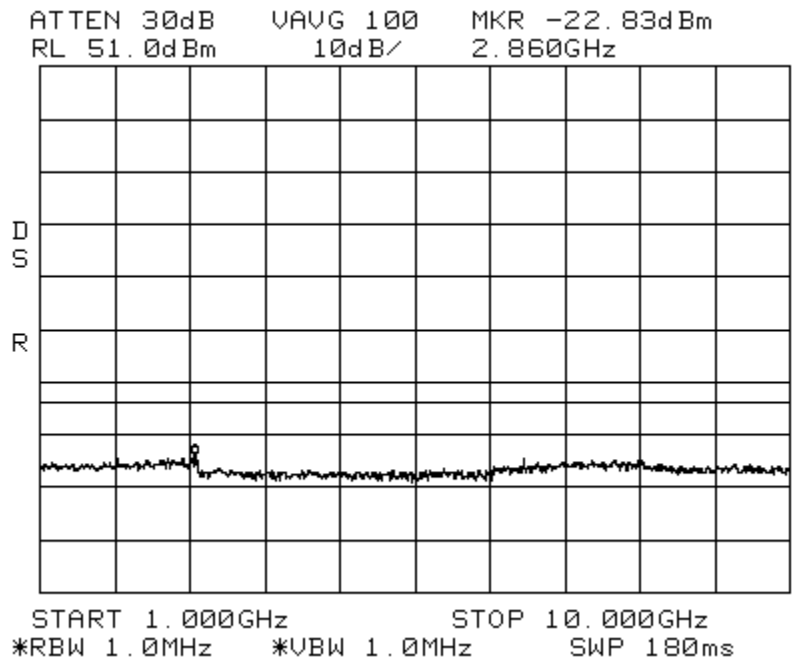


Intermodulation LTE 5 MHz Channel Bandwidth\_Low 700UpperC Path 1  
Center: 751 MHz Span: 35 MHz RBW/VBW: 100 kHz

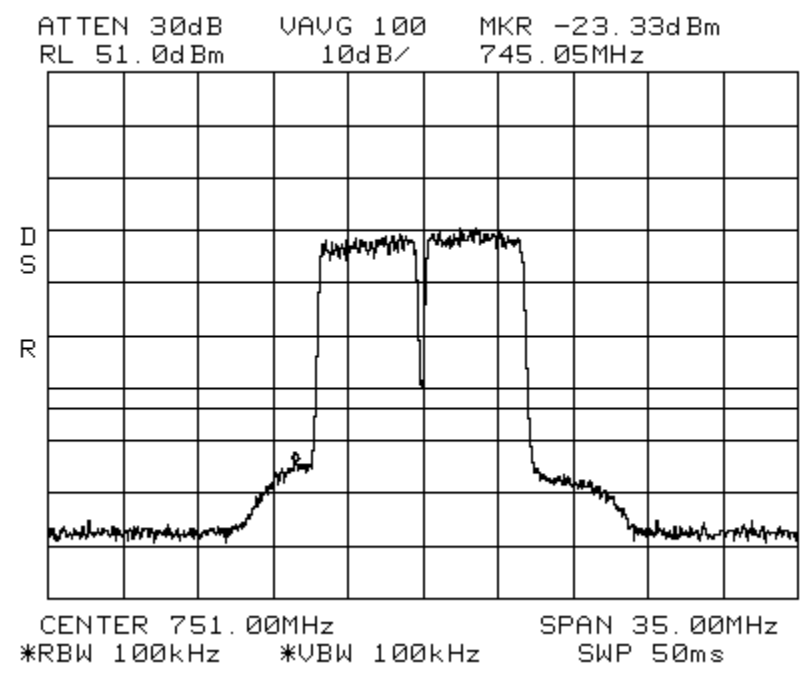


Intermodulation LTE 5 MHz Channel Bandwidth \_Low 700UpperC Path 1  
Span: 30 MHz to 1 GHz RBW/VBW: 300 kHz

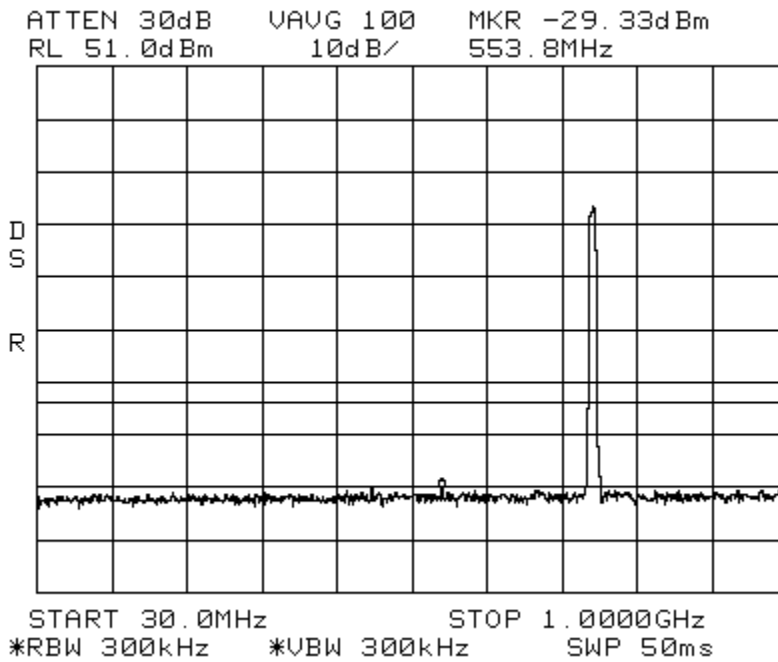

Intermodulation LTE 5 MHz Channel Bandwidth \_Low 700UpperC Path 1  
Span: 1 GHz to 10 GHz RBW/VBW: 1 MHz

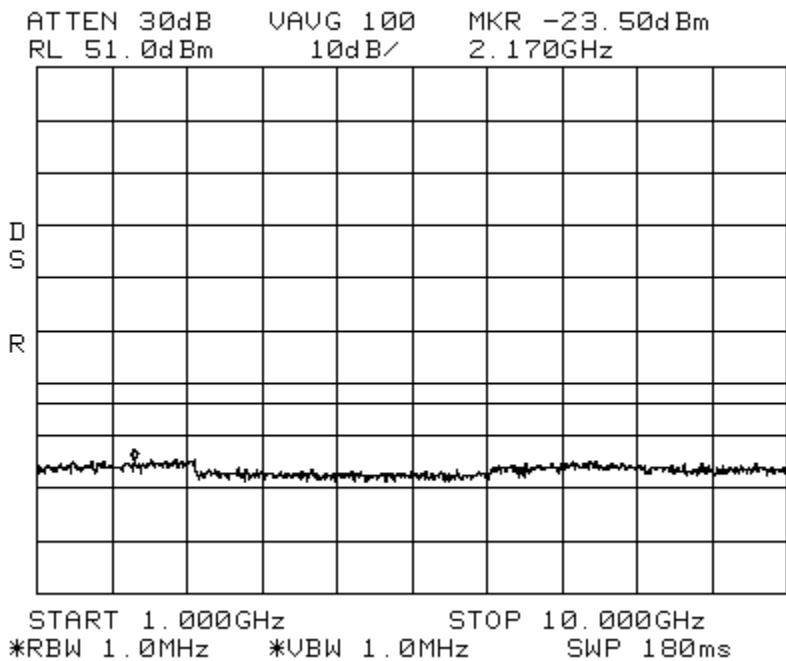


Intermodulation LTE 3 MHz Channel Bandwidth **Low** 700UpperC Path 2  
 Center: 751 MHz Span: 35 MHz RBW/VBW: 100 kHz  
 ATTN 30dB VAUG 100 MKR -20.00dBm  
 RL 51.0dBm 10dB/ 744.99MHz

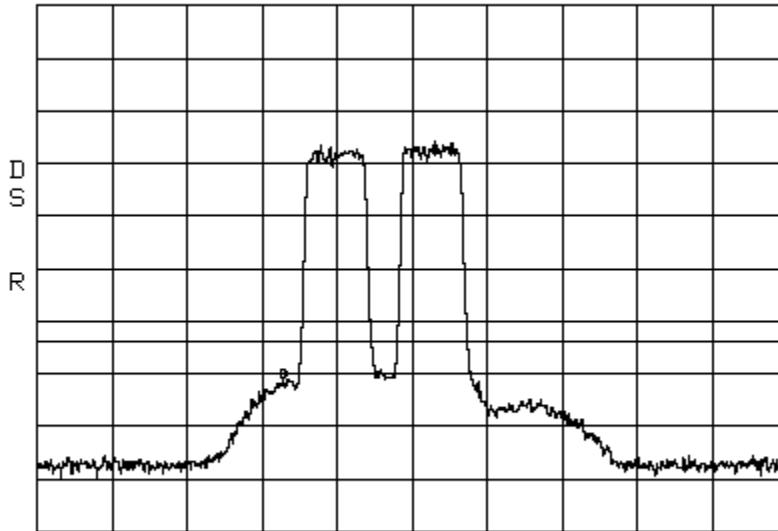

CENTER 751.00MHz SPAN 35.00MHz  
 \*RBW 100kHz \*VBW 100kHz SWP 50ms


Intermodulation LTE 3MHz Channel Bandwidth \_Low700UpperC Path 2  
 Span: 30 MHz to 1 GHz RBW/VBW: 300 kHz

ATTN 30dB VAUG 100 MKR -29.33dBm  
 RL 51.0dBm 10dB/ 141.6MHz

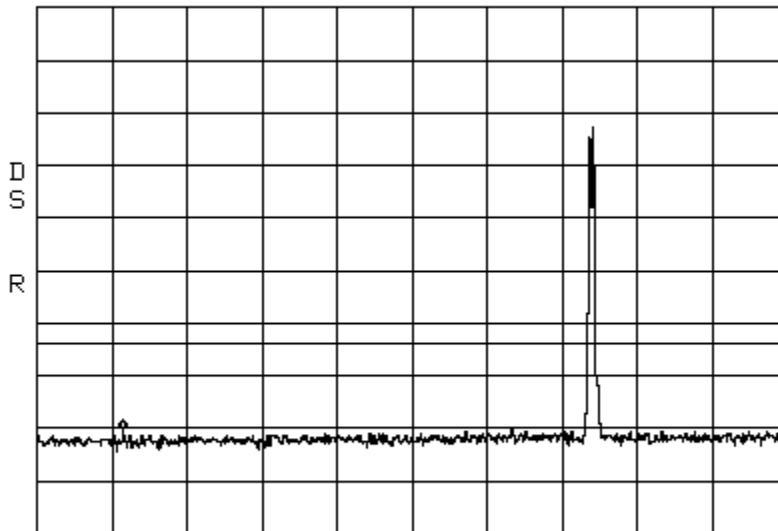


START 30.0MHz STOP 1.0000GHz  
 \*RBW 300kHz \*VBW 300kHz SWP 50ms


Intermodulation LTE 3 MHz Channel Bandwidth \_Low 700UpperC Path 2  
Span: 1 GHz to 10 GHz RBW/VBW: 1 MHz

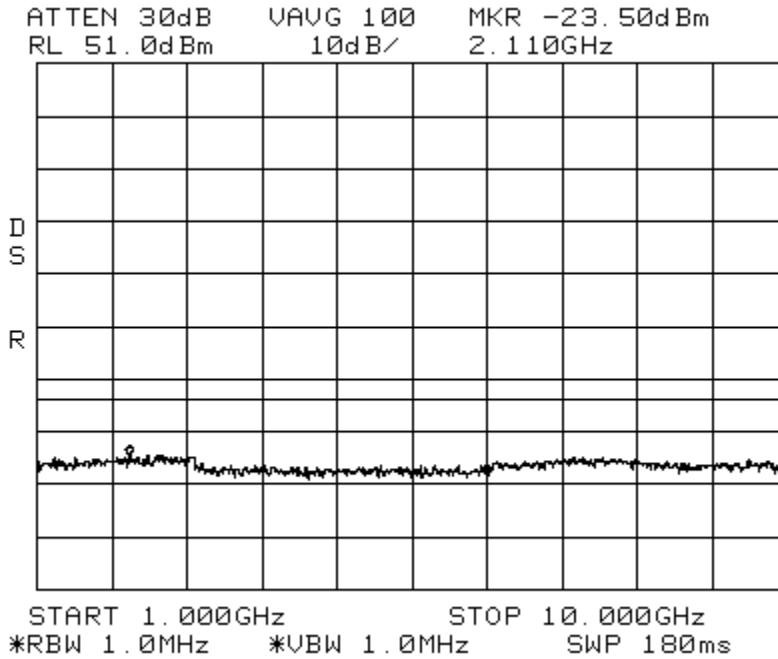


Intermodulation LTE 3 MHz Channel Bandwidth \_High 700UpperC Path 2  
Center: 751 MHz Span: 35 MHz RBW/VBW: 100 kHz

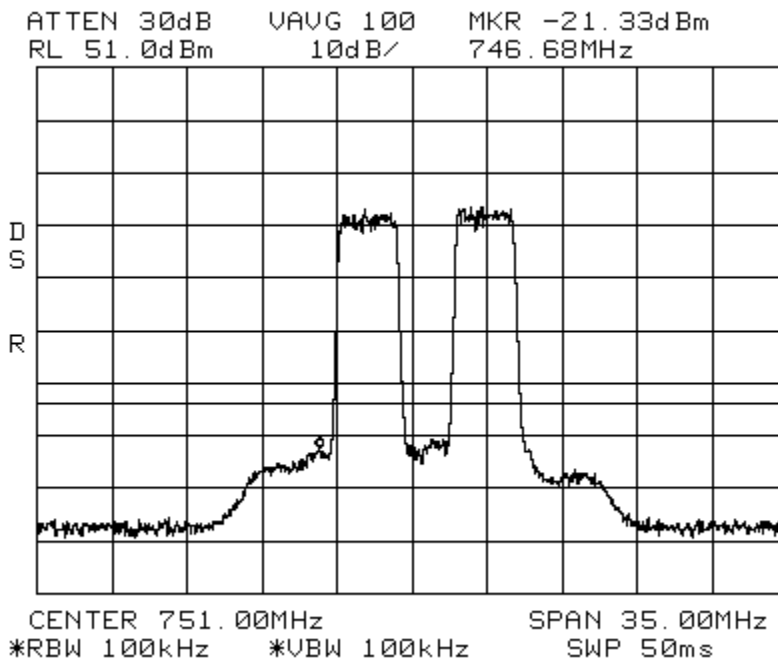


Intermodulation LTE 3 MHz Channel Bandwidth \_High 700UpperC Path 2  
Span: 30 MHz to 1 GHz RBW/VBW: 300 kHz

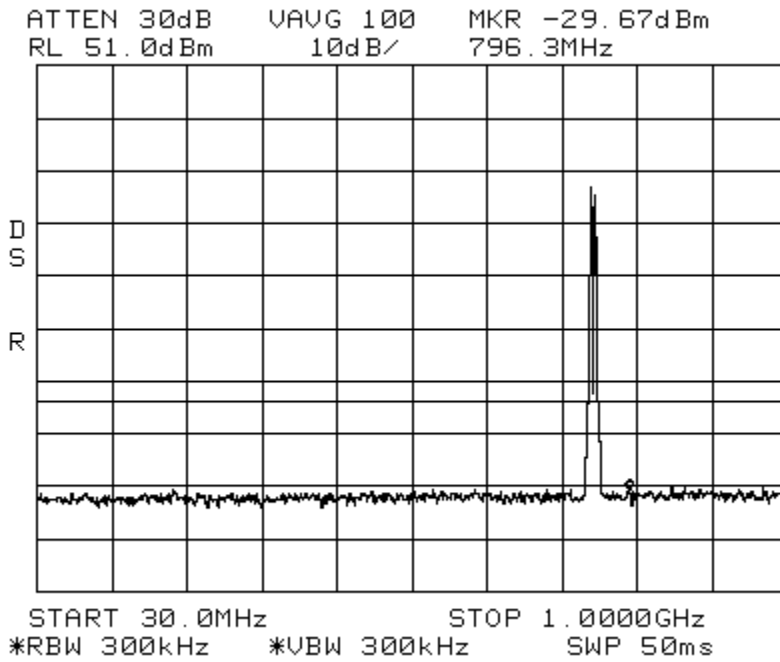


Intermodulation LTE 3 MHz Channel Bandwidth \_High 700UpperC Path 2  
Span: 1 GHz to 10 GHz RBW/VBW: 1 MHz

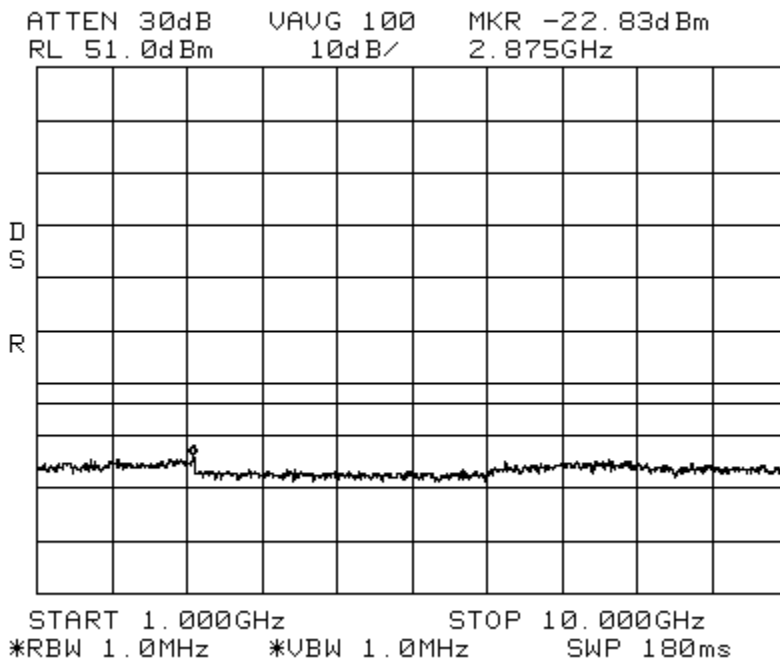


Intermodulation LTE 3 MHz Channel Bandwidth \_Apart 700UpperC Path 2  
Center: 751 MHz Span: 70 MHz RBW/VBW: 100 kHz

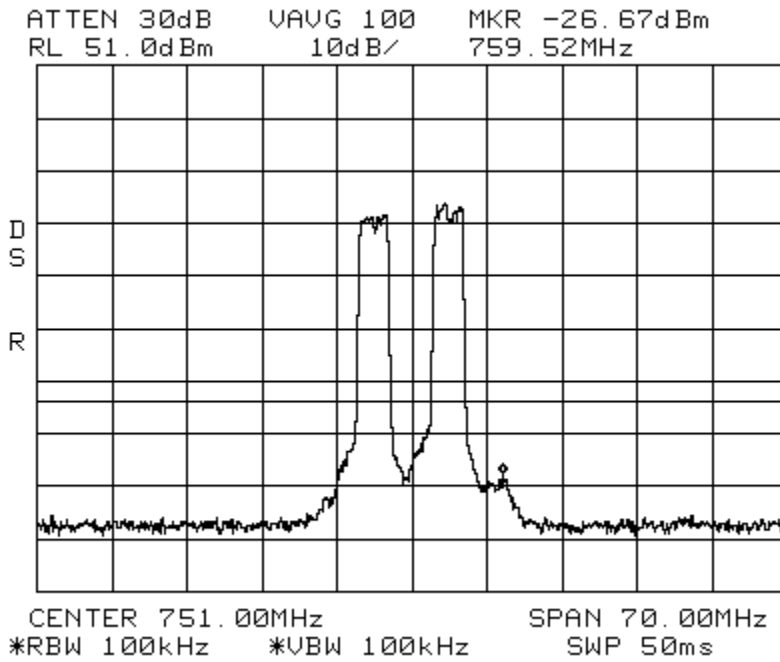


Intermodulation LTE 3 MHz Channel Bandwidth \_Apart 700UpperC Path 2  
Span: 30 MHz to 1 GHz RBW/VBW: 300 kHz

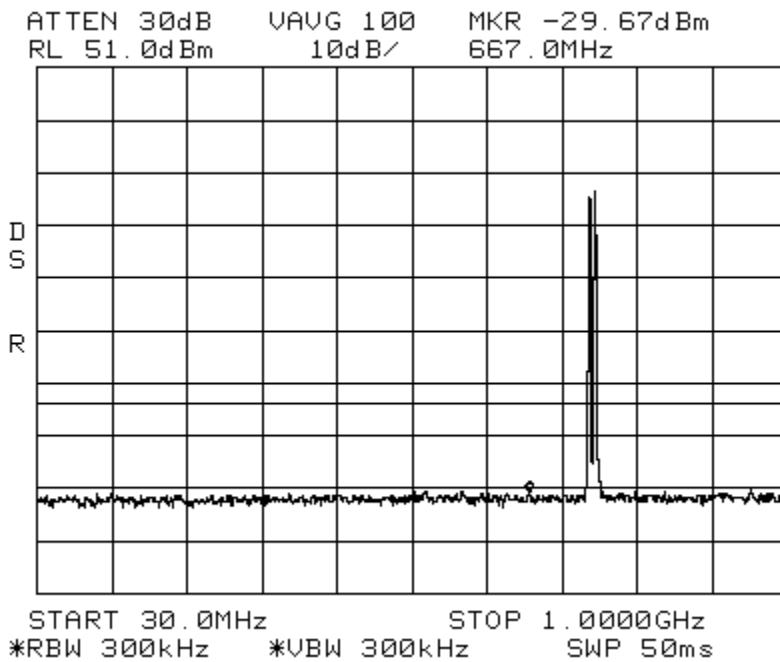

Intermodulation LTE 3 MHz Channel Bandwidth\_Apart 700UpperC Path 2  
Span: 1 GHz to 10 GHz RBW/VBW: 1 MHz

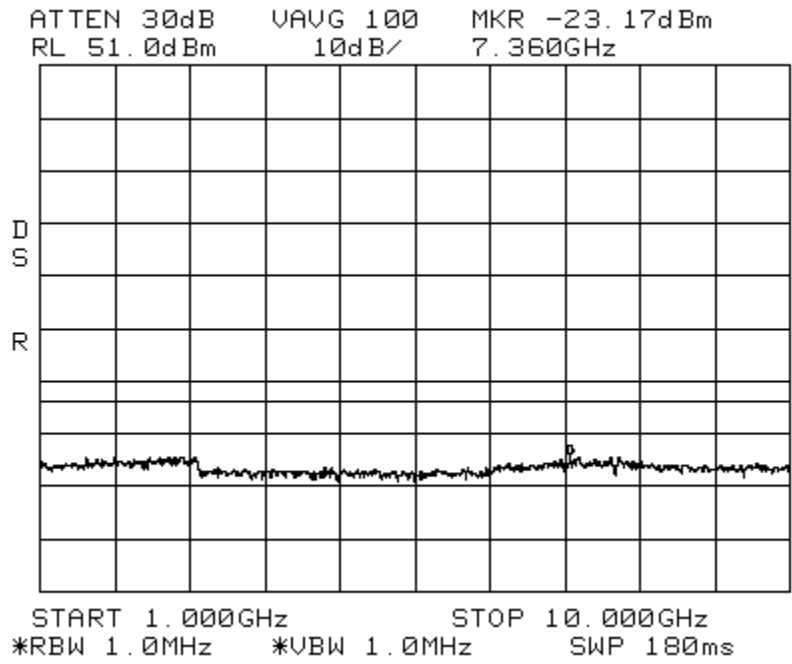


Intermodulation LTE 5 MHz Channel Bandwidth\_Low700UpperC Path 2  
Center: 751 MHz Span: 35 MHz RBW/VBW: 100 kHz

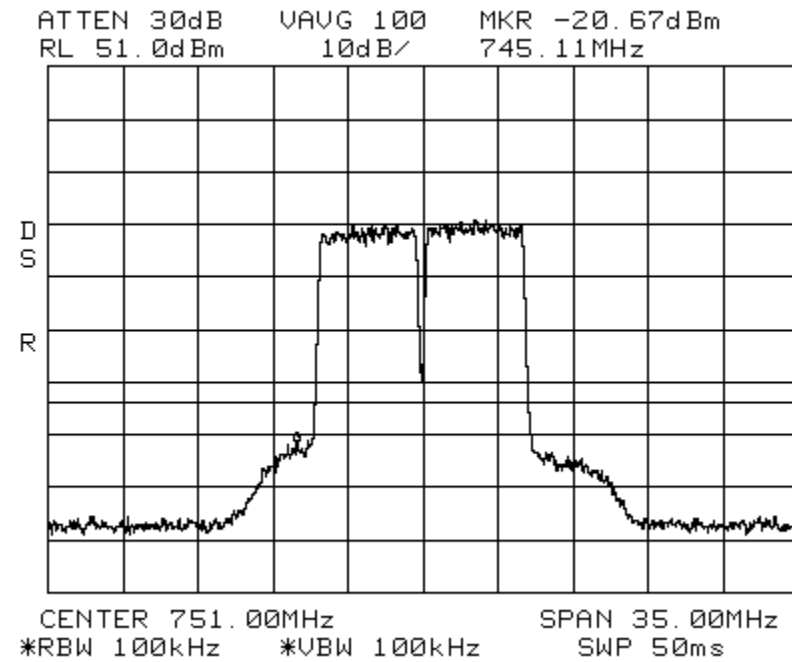




Intermodulation LTE 5 MHz Channel Bandwidth \_Low 700UpperC Path 2  
Span: 30 MHz to 1 GHz RBW/VBW: 300 kHz

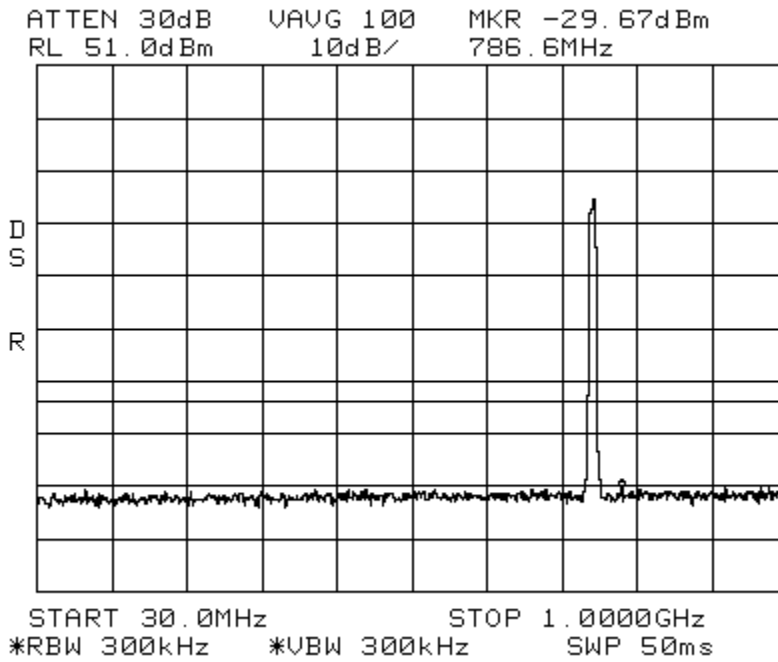

Intermodulation LTE 5 MHz Channel Bandwidth \_Low 700UpperC Path 2  
Span: 1 GHz to 10 GHz RBW/VBW: 1 MHz

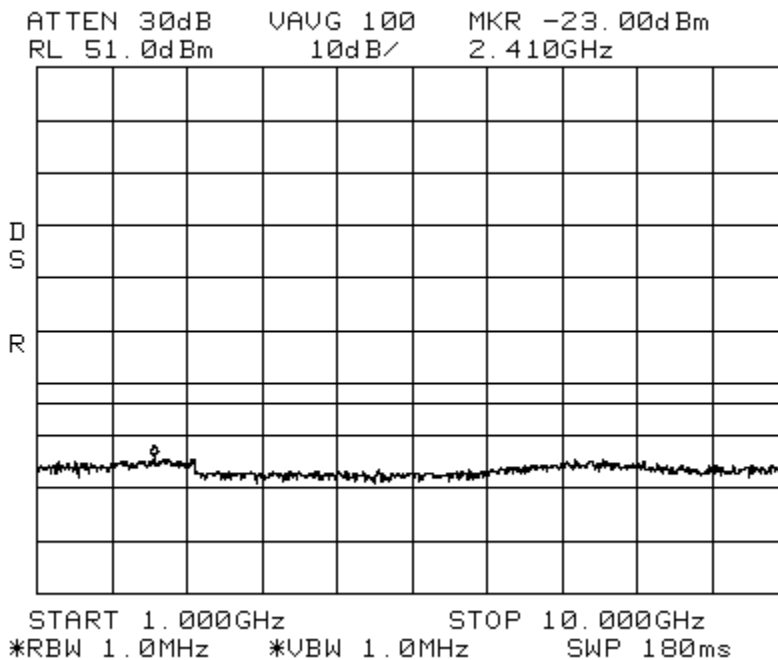

## 7.5 Occupied Bandwidth Modulation Test

[Table of Contents; Section 1.0](#)

[Back to Emission Limits; Section 5.1.3](#)

An output Occupied Bandwidth test was done with modulation types: LTE 3MHz BW and LTE 5 MHz BW. The purpose was to determine the amount of occupied bandwidth for the different types of modulation schemes produced by the EUT. The following plots show output signals.

The resolution bandwidth is reduced to 1% of the estimated emission bandwidth and the video bandwidth is set to 3 times the resolution bandwidth. The markers are moved to the -20 dB points (from the previously established center frequency level) on either side of center frequency.

### **Results:**


Pass (see plots)

Occupied Bandwidth

LTE 3 MHz Channel Bandwidth\_Signal\_In

700UpperC Path

Span: 3 MHz RBW: 30kHz VBW: 100 kHz

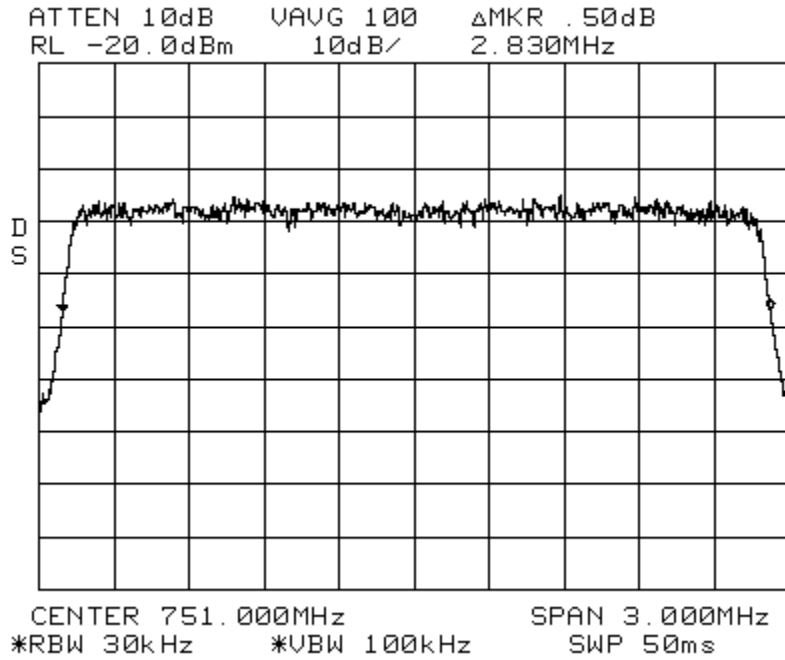


Occupied Bandwidth

LTE 3 MHz Channel Bandwidth\_Signal\_Out


700UpperC Path

Span: 3 MHz RBW: 30 kHz VBW: 100 kHz

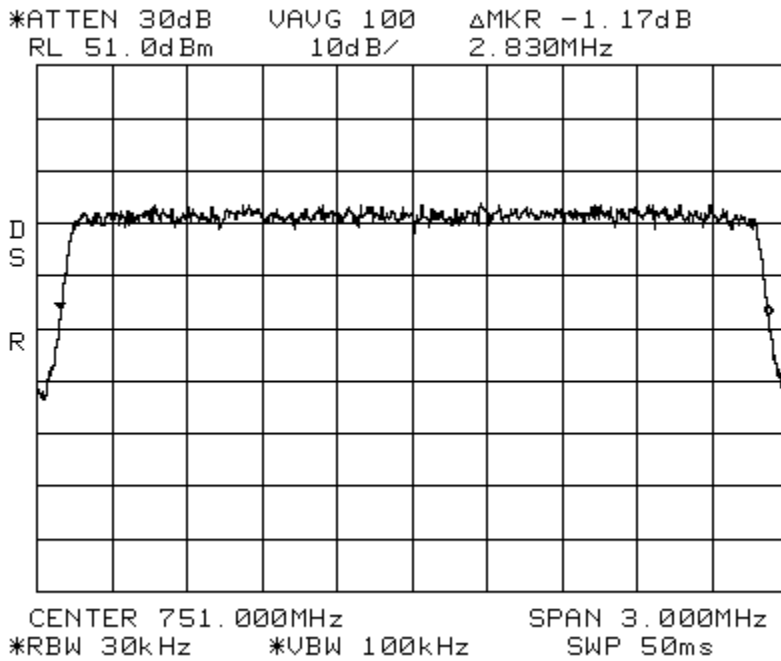

Occupied Bandwidth LTE 5 MHz Channel Bandwidth\_Signal\_In 700UpperC Path 1

Span: 5 MHz RBW: 30 kHz VBW: 100 kHz  
ATTEN 10dB VAUG 100 ΔMKR -.67dB  
RL -20.0dBm 10dB/ 4.642MHz

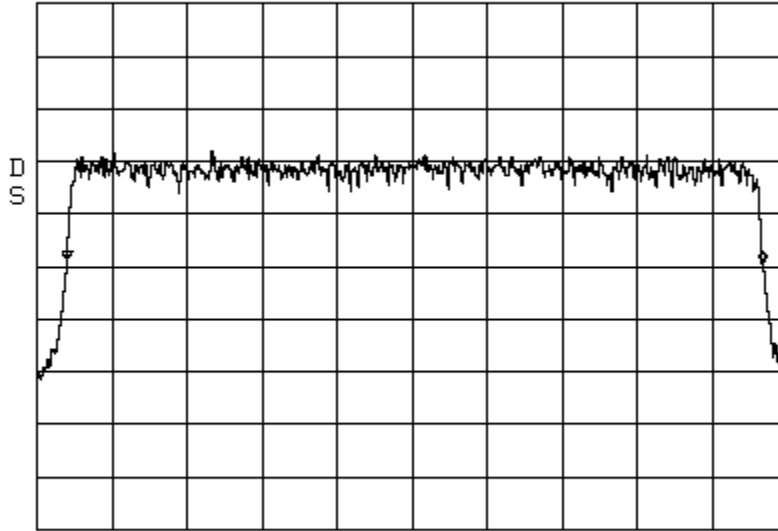


CENTER 751.000MHz SPAN 5.000MHz  
\*RBW 30kHz \*VBW 100kHz SWP 50ms

Occupied Bandwidth LTE 5 MHz Channel Bandwidth\_Signal\_Out 700UpperC Path 1

Span: 5 MHz RBW: 30 kHz VBW: 100 kHz


ATTEN 30dB VAUG 100 ΔMKR -2.33dB  
RL 51.0dBm 10dB/ 4.642MHz

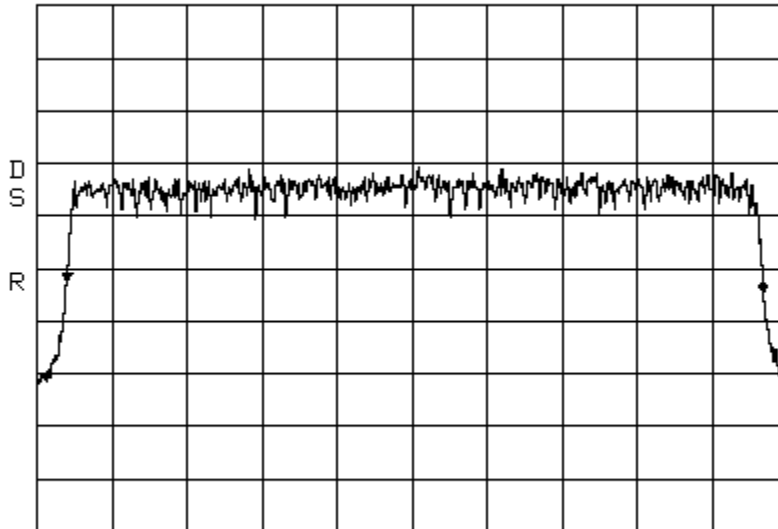

CENTER 751.000MHz SPAN 5.000MHz  
\*RBW 30kHz \*VBW 100kHz SWP 50ms

Occupied Bandwidth LTE 3 MHz Channel Bandwidth\_Signal\_In 700UpperC Path 2

Span: 3 MHz RBW: 30kHz VBW: 100 kHz  
\*ATTEN 10dB VAUG 100 ΔMKR -.67dB  
RL -20.0dBm 10dB/ 2.825MHz

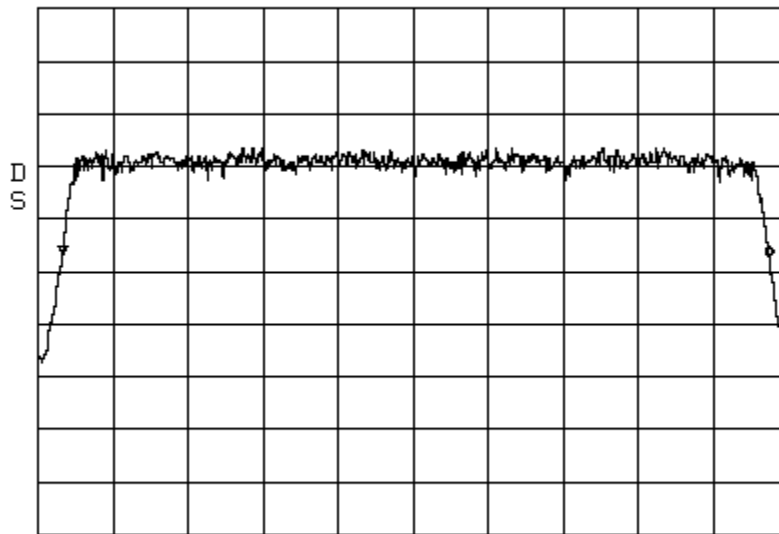


CENTER 751.000MHz SPAN 3.000MHz  
\*RBW 30kHz \*VBW 100kHz SWP 50ms

Occupied Bandwidth LTE 3 MHz Channel Bandwidth\_Signal\_Out 700UpperC Path 2

Span: 3 MHz RBW: 30 kHz VBW: 100 kHz


\*ATTEN 30dB VAUG 100 ΔMKR -1.33dB  
RL 51.0dBm 10dB/ 2.825MHz

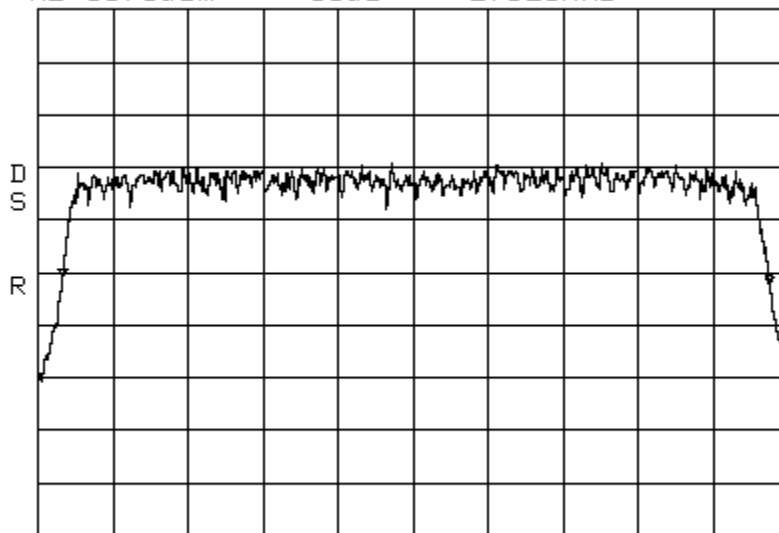

CENTER 751.000MHz SPAN 3.000MHz  
\*RBW 30kHz \*VBW 100kHz SWP 50ms

Occupied Bandwidth LTE 5 MHz Channel Bandwidth\_Signal\_In 700UpperC Path 2  
Span: 5 MHz RBW: 30 kHz VBW: 100 kHz


\*ATTEN 10dB VAUG 100 ΔMKR -3.17dB  
RL -20.0dBm 10dB/ 4.642MHz

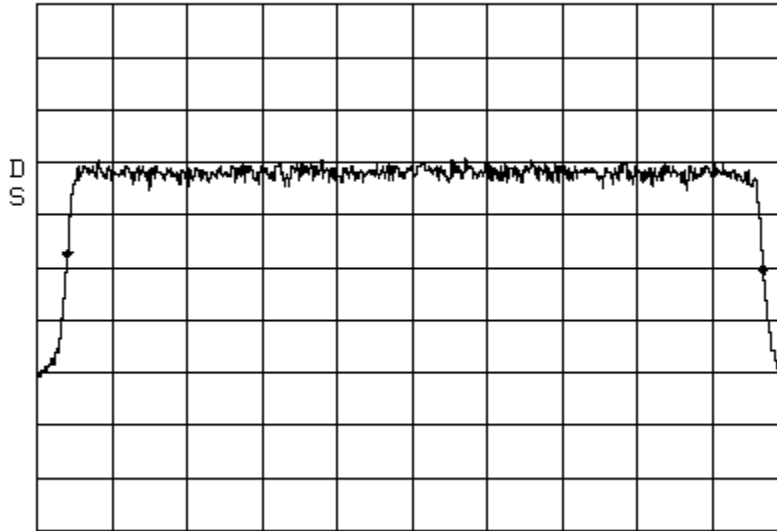

CENTER 751.000MHz SPAN 5.000MHz  
\*RBW 30kHz \*VBW 100kHz SWP 50ms

Occupied Bandwidth LTE 5 MHz Channel Bandwidth\_Signal\_Out 700UpperC Path 2  
Span: 5 MHz RBW: 30 kHz VBW: 100 kHz

\*ATTEN 30dB VAUG 100 ΔMKR -.16dB  
RL 51.0dBm 10dB/ 4.633MHz

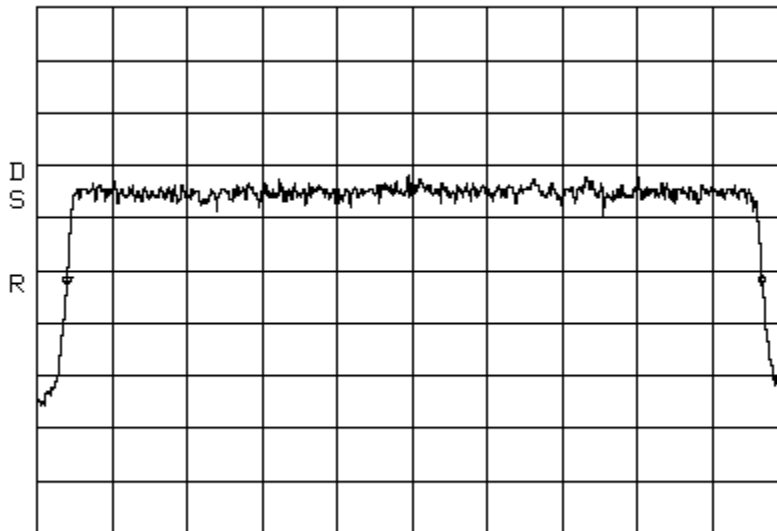

CENTER 751.000MHz SPAN 5.000MHz  
\*RBW 30kHz \*VBW 100kHz SWP 50ms

8.0

## APPENDIX B

Measurement Protocol

[Table of Contents; Section 1.0](#)

[Back to Emission Limits; Section 5.1.3](#)

# Measurement Protocol

## Environmental conditions of the lab, (ADC)

Temperature: 23° C

Relative Humidity: 24 %

Atmospheric Pressure: 101.9 kPa

## **Test Methodology:**

Emission testing is performed according to the procedures in ANSI C63.4-2003.

## **Measurement Uncertainty**

The test system for conducted emissions is defined as the signal generator(s), the power meter, the spectrum analyzer and the coaxial cable. The equipment comprising the test systems is calibrated prior to testing the EUT.

## **Justification**

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left un-terminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

## **Radiated Emissions**

The final level, in dBuV/m, equals the reading from the spectrum analyzer (Level dBuV), adding the antenna correction factor and cable loss factor (Factor dB) to it, and subtracting the preamp gain (and duty cycle correction factor, if applicable). This result then has the limit subtracted from it to provide the Delta, which gives the tabular data as shown in the data sheets in Appendix B.

Example:

FREQ (MHz)	LEVEL (dBuV)	CABLE/ANT/PREAMP (dB) (dB/m) (dB)	FINAL (dBuV/m)	POL/HGT/AZ (m) (deg)	DELTA1
60.80	42.5Qp +	1.2 + 10.9 - 25.5 =	29.1	V 1.0 0.0	-10.9

## **Substitution Method**

A cabinet (or enclosure) radiated emission scan was also made, at Intertek, with the EUT's antenna replaced with a termination to demonstrate case radiation compliance to the -13 dBm requirement. Radiated emissions from the EUT are measured in the frequency range of 30 to 20,000 MHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees. The field strength levels were measured per ANSI C63.4. The EUT is then replaced with a tuned dipole antenna (below 1GHz) or horn antenna (above 1 GHz). The substitute antenna was placed in the same polarization as the test antenna. A signal generator was used to generate a signal level that matched the highest level measured from the EUT. The signal generator level minus the cable loss from the signal generator to the substitute antenna plus the substitute antenna gain equals the spurious power level.

## **Test Equipment**

All measurement instrumentation is traceable to the National Institute of Standards and Technology and is calibrated according to internal procedure.



## Radiated Emissions Test Data

[Table of Contents; Section 1.0](#)

Document Name: *100659876MIN-001.pdf*

**Test Engineer:** Simon Khazon

**Date:** 20 March, 2012

**Test Procedure:**

Test measurements were made in accordance with ANSI C63.4-2003, Standard Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronics Equipment in the Range of 9 kHz to 40 GHz.

**Test Site Location:**

The test site is a 3 meter Semi-Anechoic Chamber, constructed by Panashield™ Inc. and located inside the building at 7250 Hudson Blvd. Suite 100, Oakdale, MN 55128.

**Test Site Description:**

The 3 meter Semi-Anechoic Chamber is constructed of Panabolt™ modular RF shielding and self-supported with structural steel designed for the local seismic zone rating. The chamber has the nominal size of 20' wide x 29' long x 18' high. All walls and ceiling of the chamber are treated with FFG-1000 Ferrite Grid absorber which was developed specifically to meet international requirements for EMC anechoic chambers for emissions and immunity measurements. To meet high frequency testing white HY-35 hybrid absorber is mounted on the ferrites in specular regions of the chamber.

The chamber has a 2 meter diameter ANSI test volume area and meets the requirements of ANSI C63.4 (1992), EN55022, and FCC Part 15 standards for testing at a 3 meter path length.

FCC Registration Number: 0007355381

IC Registration Number: 4359A