



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

FCC PART 74

LOW POWER LICENSED TRANSMITTER

WITH ANTENNA CONNECTOR

TEST REPORT

APPLICANT	CLEARONE INC.
	EDGEWATER CORPORATE PARK, SOUTH TOWER 5225 WILEY POST WAY, SUITE # 500 SALT LAKE CITY UTAH 84116 USA
FCC ID	FBIBELTPACK
MODEL NUMBER	DS80-T-C-M500, 910-6004-004-C, DS80-T-C-M610, 910-6004-003-C
PRODUCT DESCRIPTION	BELT PACK WIRELESS MICROPHONE
STANDARD APPLIED	CFR 47 Part 74.801
DATE SAMPLE RECEIVED	9/15/2014
DATE TESTED	9/22/2014
TESTED BY	Sid Sanders
APPROVED BY	Cory Leverett
TIMCO REPORT NO.	1640AUT14TestReport.docx
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.

TABLE OF CONTENTS

GENERAL REMARKS	3
GENERAL INFORMATION.....	4
TEST PROCEDURES.....	6
TEST REPORT SUMMARY.....	7
RF POWER OUTPUT	8
MODULATION CHARACTERISTICS	9
MODULATION CHARACTERISTICS	9
OCCUPIED BANDWIDTH.....	9
MODULATION CHARACTERISTICS OCCUPIED BANDWIDTH.....	10
20 dB	10
MODULATION CHARACTERISTICS OCCUPIED BANDWIDTH.....	11
20 dB	11
FIELD STRENGTH OF SPURIOUS EMISSIONS.....	12
FIELD STRENGTH OF SPURIOUS EMISSIONS TEST SETUP PHOTO.....	13
FIELD STRENGTH OF SPURIOUS EMISSIONS	14
FIELD STRENGTH OF SPURIOUS EMISSIONS	15
FIELD STRENGTH OF SPURIOUS EMISSIONS	16
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED).....	17
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED) Cont	18
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED).....	19
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED).....	20
FREQUENCY STABILITY	21
EMC EQUIPMENT LIST.....	22

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

The test results relate only to the items tested.

Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669

Authorized Signatory Name:



A handwritten signature in black ink is overlaid on a circular blue ink stamp. The stamp contains the text 'TIMCO ENGINEERING INC.' around the perimeter and 'FL' in the center. The signature appears to be 'J. S. Adles'.

Project Manager Name
Engineering Project Manager

Date: 9/24/14

Table of contents

Applicant: CLEARONE INC.
FCC ID: FBIBELTPACK
REPORT: C:\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx
Page 3 of 22



GENERAL INFORMATION

RULES FCC PART 2.1033

EUT TECHNICAL DESCRIPTION

EUT Description	BELT PACK WIRELESS MICROPHONE
FCC ID	FBIBELTPACK
Model Number	DS80-T-C-M500, 910-6004-004-C, DS80-T-C-M610, 910-6004-003-C
Modulation	CQPSK
Type of Emission	156K0F1D
Frequency Range	499-608MHz & 614-618MHz
Test Frequencies	499, 511.58, 605.40, 614.35, & 617.60MHz
Maximum Output Power	82milliWatts
EUT Power Source	<input type="checkbox"/> 110-120Vac/50- 60Hz <input checked="" type="checkbox"/> DC Power <input type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed <input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable

[Table of contents](#)

Applicant: CLEARONE INC.

FCC ID: FBIBELTPACK

REPORT: C\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx

GENERAL INFORMATION

Test Facility	Timco Engineering, Inc. 849 NW State Road 45, Newberry, FL 32669
Test Condition	The temperature was 24-26°C with a relative humidity of 50-60%.
Modifications	None
Test Exercise (e.g. software description, test signal, etc.)	The EUT was operated in its normal mode of operation.
Applicable Standards	ANSI/TIA 603-C:2010, FCC CFR 47 Parts 2 and 74

[Table of contents](#)

Applicant: CLEARONE INC.

FCC ID: FBIBELTPACK

REPORT: C:\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx

TEST PROCEDURES

Power Line Conducted Interference: The procedure used was ANSI/TIA 603-C:2004 using a 50uH LISN. Both lines were observed with the UUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

Bandwidth 20 dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

Power Output: For a device with a fixed antenna, RF power is measured as ERP as the antenna is permanently attached. The substitution method was used as described in ANSI/TIA-603-C:2004. If the EUT has an antenna connector the RF Power is measured conducted.

Antenna Conducted Emissions: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10th Harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

Radiation Interference: The test procedure used was ANSI/TIA 603-C:2004 using an Agilent spectrum receiver with preselector. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

RF Exposure & SAR Exclusion

Maximum Power: 82mW
Minimum Separation: 5.0mm
Highest Frequency: 618MHz

Calculation: 12.9 and this number must be less than 3.0 for SAR Exclusion

Conclusion: SAR Testing is required.

Table of contents

Applicant: CLEARONE INC.
FCC ID: FBIBELTPACK
REPORT: C:\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx
Page 6 of 22

TEST REPORT SUMMARY

Rule Part No.	Scope of Work	Status Pass/Fail/NA
<u>Part 2.1033(c)(8), Part 2.1046(a), 74.801,</u>	DC Input into the final Amplifier RF Power Output	PASS
<u>Part 2.1033(c) (4) Part 2.1047(a)(b), 74.861(e)(3)</u>	Modulation Characteristics	NA
<u>2.1049(c), 74.861</u>	Emission Mask and Occupied Bandwidths	PASS
<u>2.1053</u>	Antenna Conducted Emissions	PASS
<u>2.1053</u>	Field Strength Spurious Emissions	PASS
<u>Part 2.1055 Part 74.861</u>	Frequency Stability	PASS

[Table of Contents](#)

Applicant: CLEARONE INC.

FCC ID: FBIBELTPACK


REPORT: C\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx

RF POWER OUTPUT


Rule Part No.: Part 2.1046(a), Part 74.801

Method of Measurement: For a device with a fixed antenna, RF power is measured as ERP as the antenna is permanently attached. The substitution method was used as described in ANSI/TIA-603-C:2004. If the EUT has an antenna connector the RF Power is measured conducted. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

Test Setup Diagram:

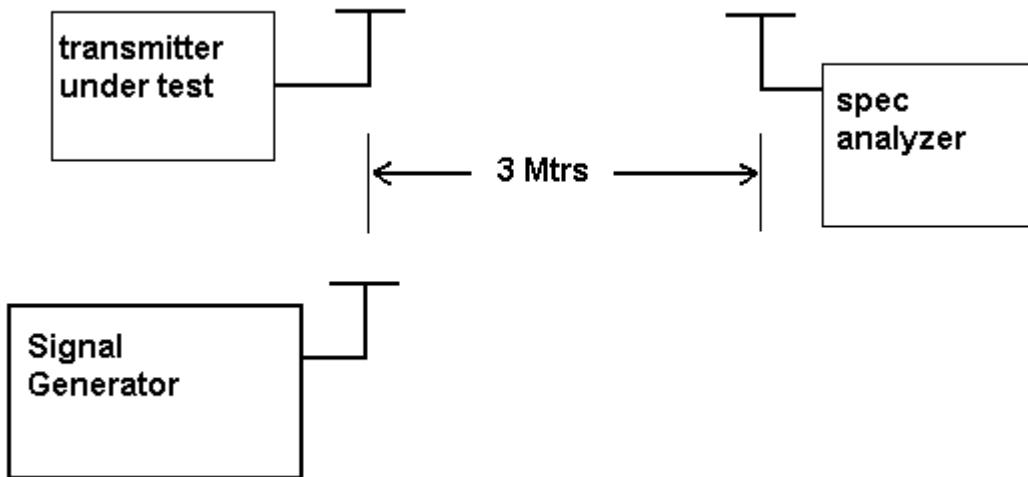

Conducted Method:



Test Data:

OUTPUT POWER: Conducted 82mW

Part 2.1033 (C)(8) DC Input into the final amplifier

INPUT POWER: $(3.0V)(0.092A) = .276$ Watts

[Table of contents](#)

Applicant: CLEARONE INC.

FCC ID: FBIBELTPACK

REPORT: C\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx

MODULATION CHARACTERISTICS

Rule Part No.: Part 2.1047(a)(b), 74.861 (e)(3)

FCC Limit: $\pm 75\text{kHz}$ Deviation


Channel Spacing 200kHz

**Method of Modulation is CQPSK with an emission designator of;
156K0F1D**

MODULATION CHARACTERISTICS

OCCUPIED BANDWIDTH

Data in the plots show that all sidebands between 50 & 100% for the authorized bandwidth are attenuated by at least 25dB. From 100 to 250% of the authorized bandwidth they are attenuated by at least 35dB and beyond 250% 43 log(P_o) dB. The plot shows the transmitter modulated with 15000 Hz(the highest modulation frequency), adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth plot follows.

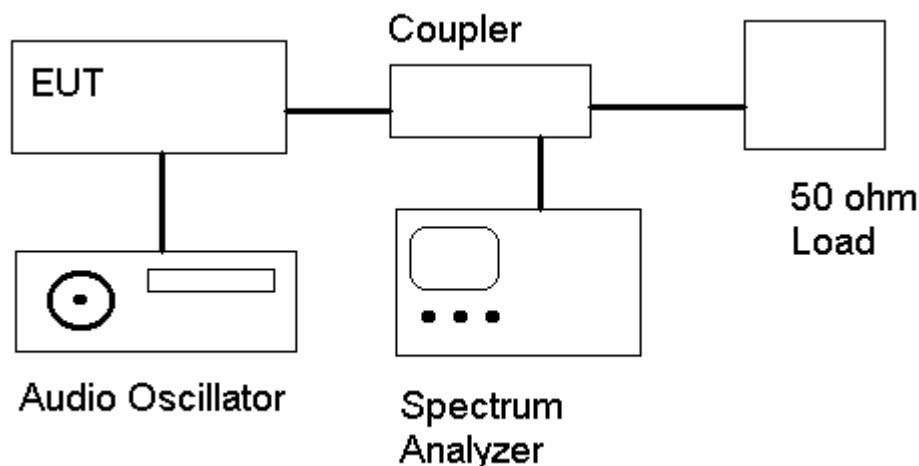


OCCUPIED BANDWIDTH MEASUREMENT

[Table of contents](#)

Applicant: CLEARONE INC.

FCC ID: FBIBELTPACK

REPORT: C:\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx

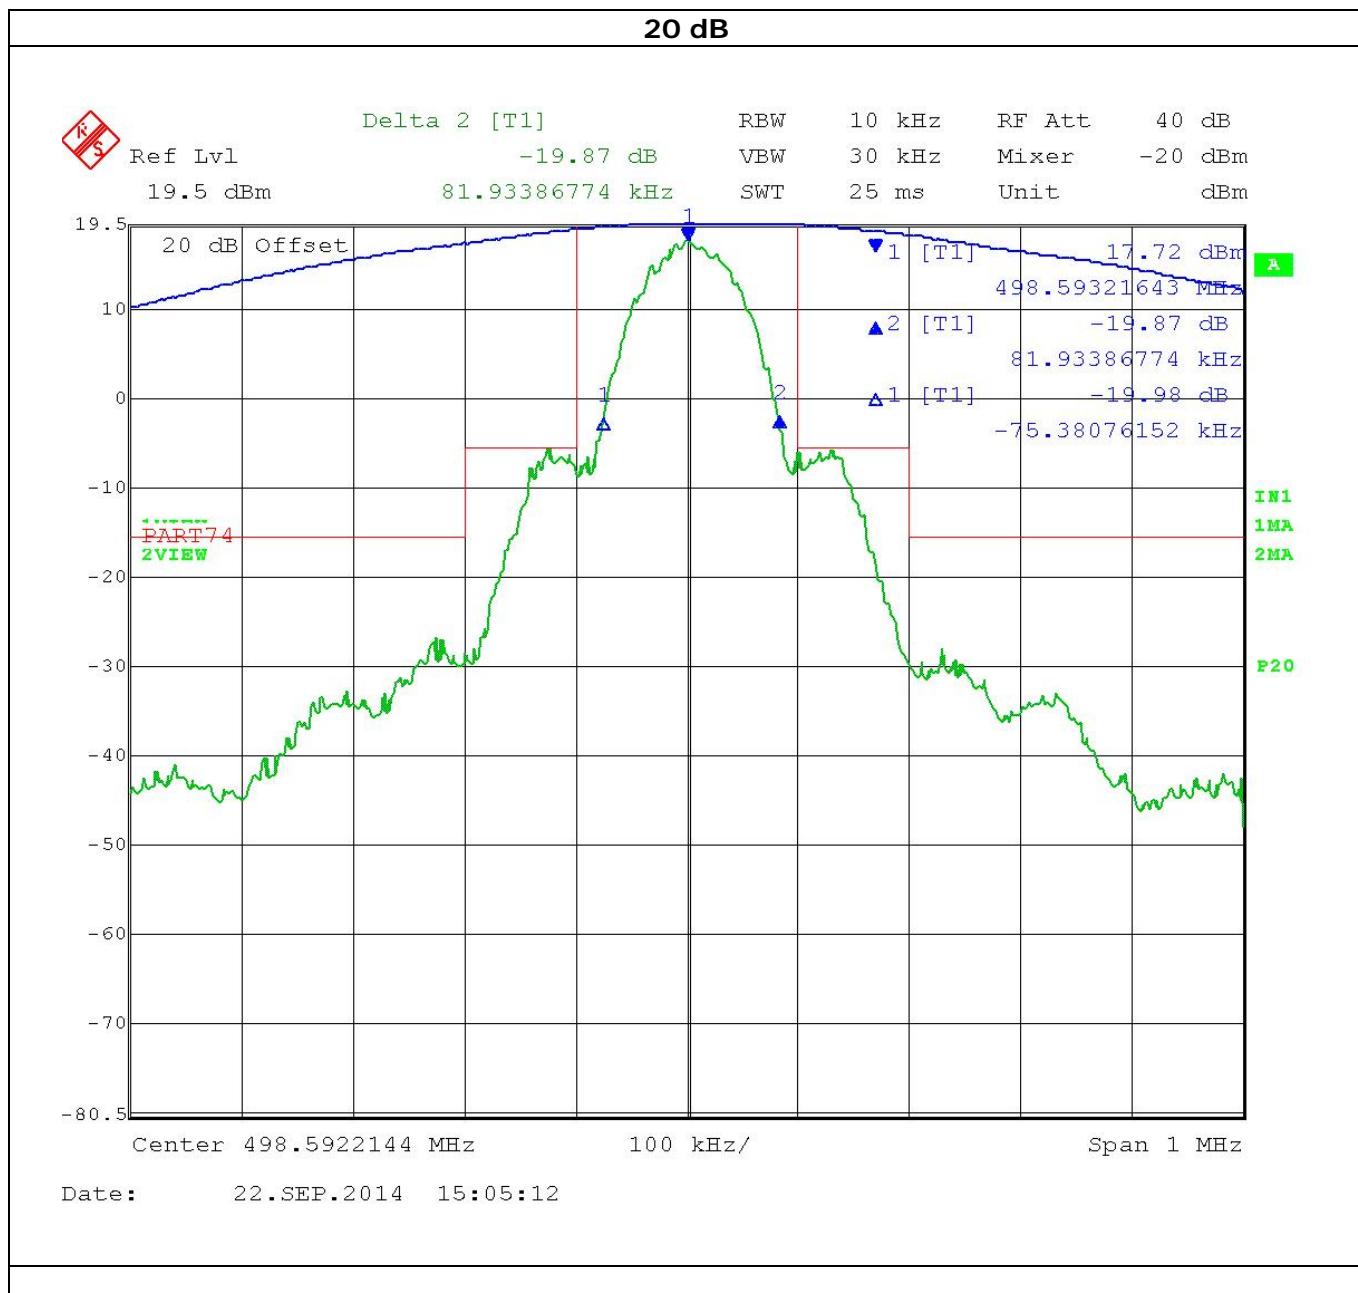
MODULATION CHARACTERISTICS OCCUPIED BANDWIDTH

[Table of contents](#)

Applicant: CLEARONE INC.

FCC ID: FBIBELTPACK

REPORT: C:\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx

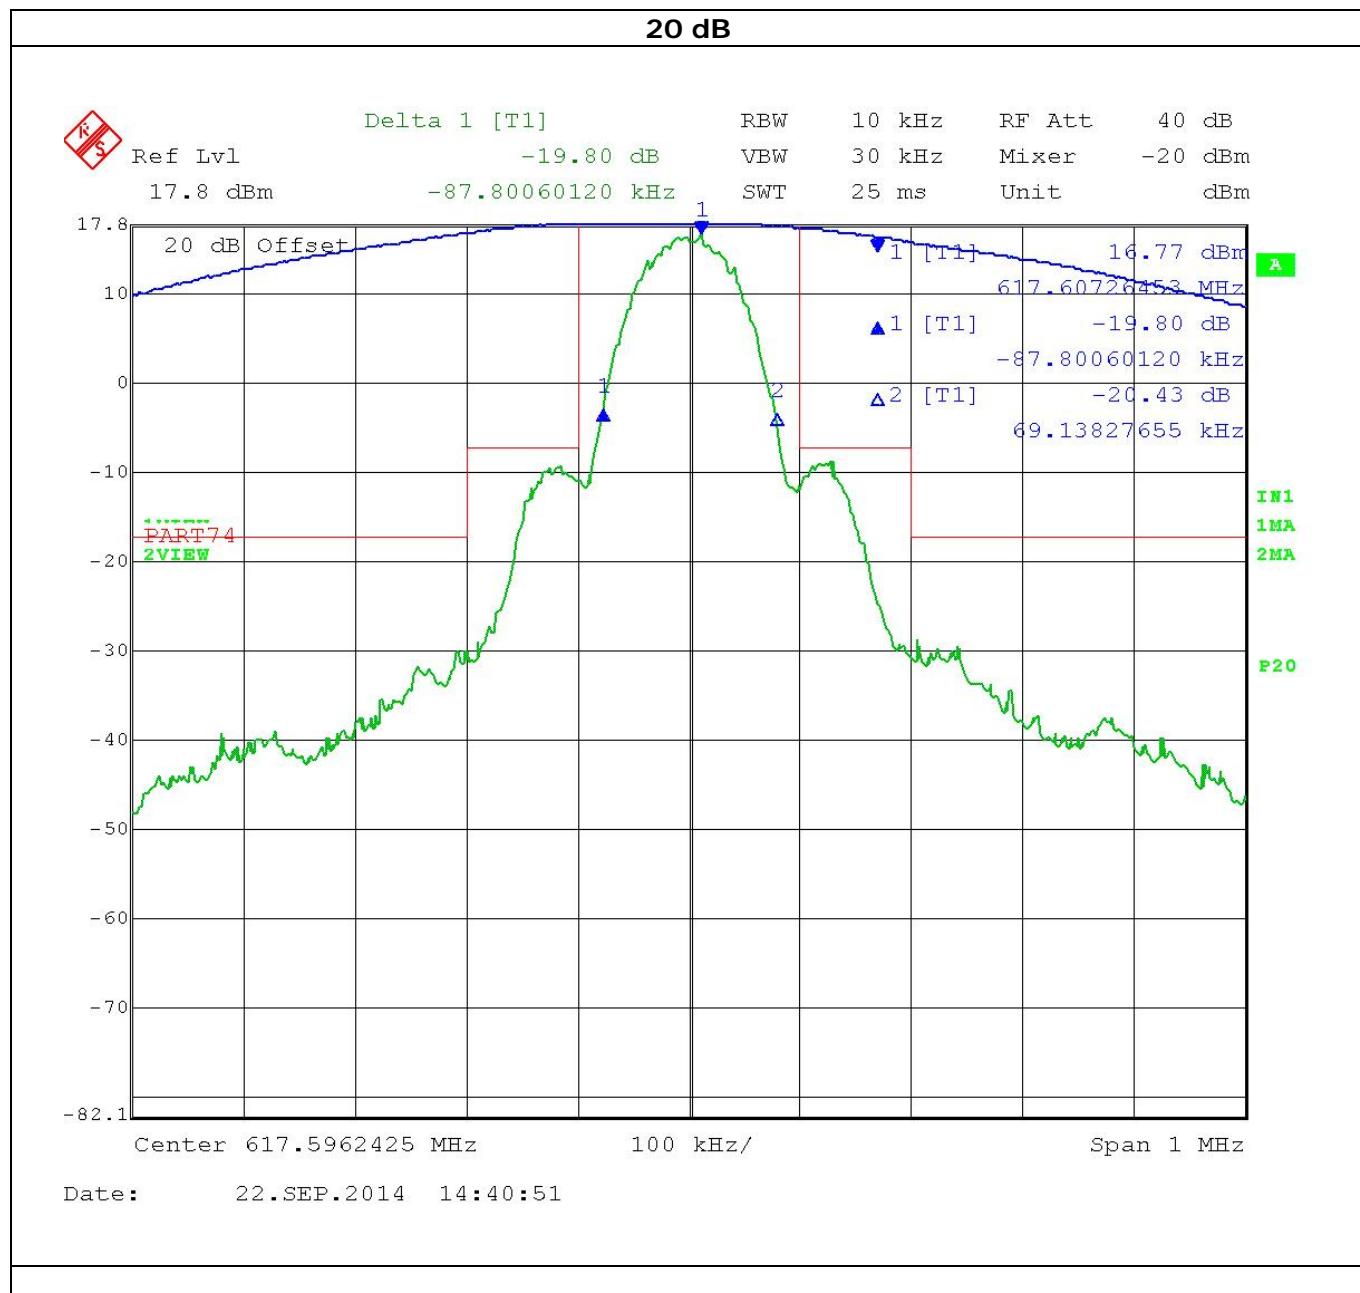MODULATION CHARACTERISTICS OCCUPIED BANDWIDTH



Applicant: CLEARONE INC.

FCC ID: FBIBELTPACK

REPORT: C:\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx

FIELD STRENGTH OF SPURIOUS EMISSIONS

Rule Parts. No.: Part 2.1053


Requirements: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

$$43 + 10 \log(.082) = 32.13\text{dB}$$


METHOD OF MEASUREMENTS: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C:2010 using the substitution method. Measurements were made at the test site of Timco Engineering, Inc. located at 849 NW State Road 45, Newberry, FL 32669.

Test Method: TIA 603 D 2.2.12.3 Determine the EIRP of the EUT at the frequency to be tested and convert to dBm. Then use the substitution SW

Test Setup Diagram:

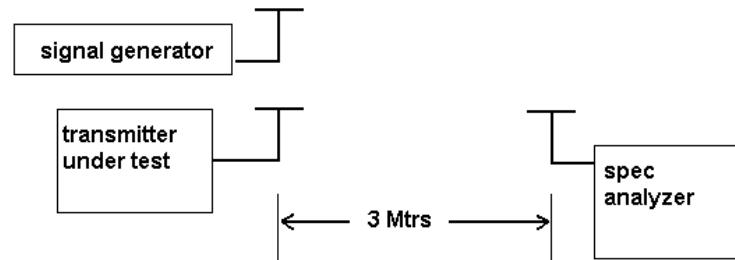

FIELD STRENGTH OF SPURIOUS EMISSIONS TEST SETUP PHOTO

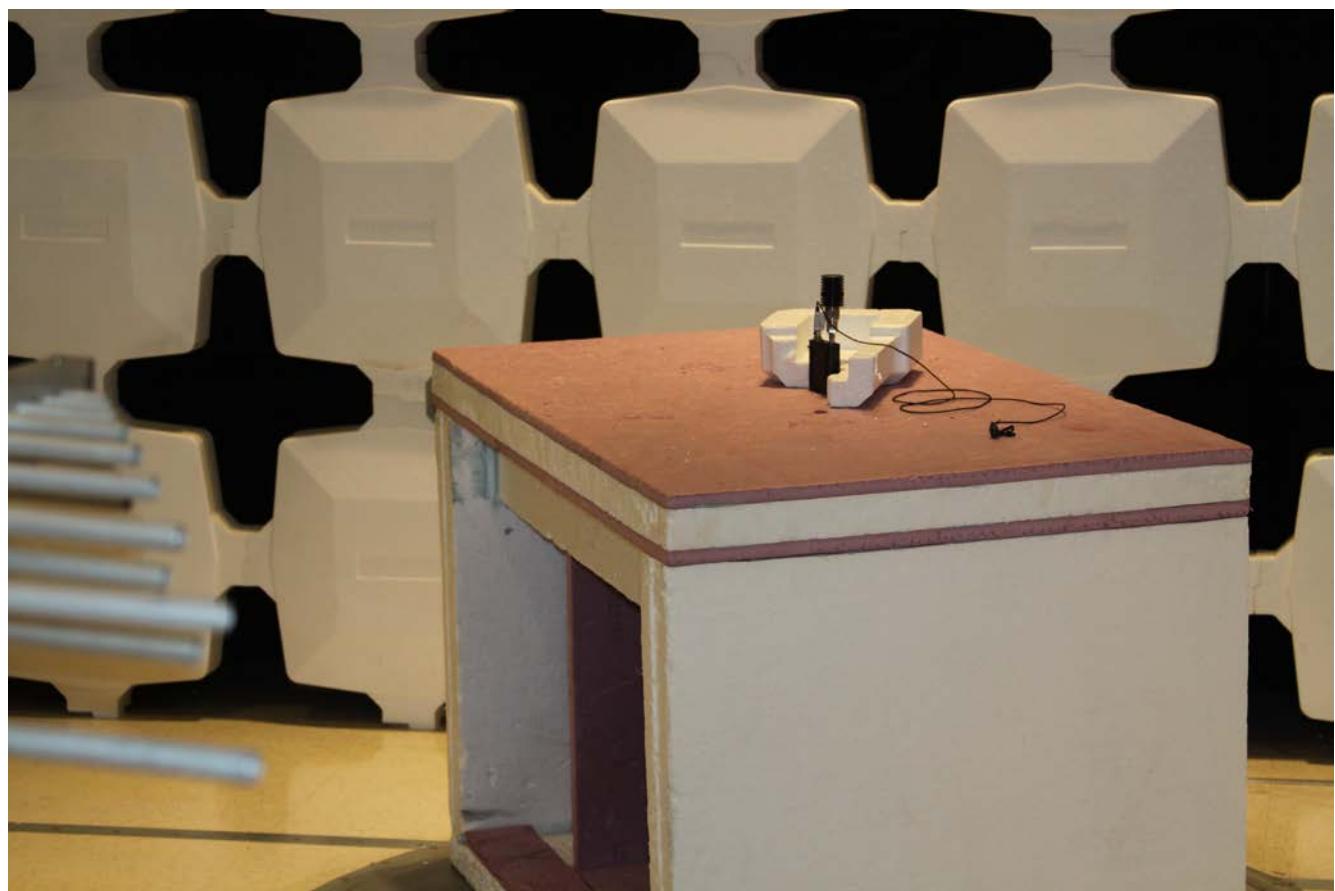

Applicant: CLEARONE INC.

FCC ID: FBIBELTPACK

REPORT: C:\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx



FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Data:

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dB	Bandwidth - BW - kHz
498.60	Hi	0.08	0.00	13.08	25.00

Emission Frequency (MHz)	Ant. Polarity	Below Carrier (dBc)	Margin
997.20	V	16.96	3.88
1,495.80	V	49.54	36.46
1,994.40	H	55.85	42.77
2,493.00	V	52.17	39.09
2,991.60	H	54.17	41.09
3,490.20	H	53.35	40.26
3,988.80	H	52.43	39.35
4,487.40	V	54.94	41.86
4,986.00	H	55.72	42.64

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dB	Bandwidth - BW - kHz
511.58	Hi	0.08	0.00	13.08	25.00

Emission Frequency (MHz)	Ant. Polarity	Below Carrier (dBc)	Margin
1,023.16	H	25.22	12.13
1,534.74	H	36.75	23.66
2,046.32	H	57.95	44.87
2,557.90	H	54.29	41.21
3,069.48	H	55.55	42.47
3,581.06	V	51.24	38.16
4,092.64	V	53.66	40.58
4,604.22	V	62.43	49.35
5,115.80	V	54.46	41.38

Results: Meets Requirements

Applicant: CLEARONE INC.

FCC ID: FBIBELTPACK

REPORT: C\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx



FIELD STRENGTH OF SPURIOUS EMISSIONS

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dB	Bandwidth - BW - kHz
605.40	Hi	0.08	0.00	13.08	25.00

Emission Frequency (MHz)	Ant. Polarity	Below Carrier (dBc)	Margin
1,210.80	H	52.82	39.73
1,816.20	H	55.31	42.22
2,421.60	H	54.51	41.43
3,027.00	H	55.59	42.50
3,632.40	H	57.04	43.96
4,237.80	V	54.19	41.11
4,843.20	V	54.05	40.97
5,448.60	V	53.07	39.99
6,054.00	V	49.79	36.71

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dB	Bandwidth - BW - kHz
614.35	Hi	0.08	0.00	13.08	25.00

Emission Frequency (MHz)	Ant. Polarity	Below Carrier (dBc)	Margin
1,228.70	V	43.86	30.78
1,843.05	H	41.95	28.87
2,457.40	V	39.35	26.26
3,071.75	V	44.36	31.28
3,686.10	H	48.91	35.83
4,300.45	V	46.06	32.98
4,914.80	V	45.73	32.65
5,529.15	V	44.32	31.23
6,143.50	H	42.37	29.29

Results: Meets Requirements

Applicant: CLEARONE INC.

FCC ID: FBIBELTPACK

REPORT: C\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx



FIELD STRENGTH OF SPURIOUS EMISSIONS

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dB	Bandwidth - BW - kHz
617.60	Hi	0.08	0.00	13.08	25.00

Emission Frequency (MHz)	Ant. Polarity	Below Carrier (dBc)	Margin
1,235.20	H	69.51	56.43
1,852.80	H	67.44	54.36
2,470.40	H	67.30	54.22
3,088.00	H	64.05	50.97
3,705.60	H	61.37	48.29
4,323.20	H	60.73	47.64
4,940.80	H	60.65	47.57
5,558.40	H	58.23	45.15
6,176.00	H	55.41	42.33

Results: Meets Requirements

Applicant: CLEARONE INC.

FCC ID: FBIBELTPACK

REPORT: C\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx

SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

REQUIREMENTS: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

$$43 + 10 \log(0.082) = 32.13\text{dB}$$

Test Method: Use the RF Power measured & reported on Page 7 of this report.


Rule Parts. No.: Part 2.1053

Requirements: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

$$43 + 10 \log(0.082.0) = 32.13.00\text{dB}$$

METHOD OF MEASUREMENTS: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C:2004 using the substitution method. Measurements were made at the test site of Timco Engineering, Inc. located at 849 NW State Road 45, Newberry, FL 32669.

Test Setup Diagram:

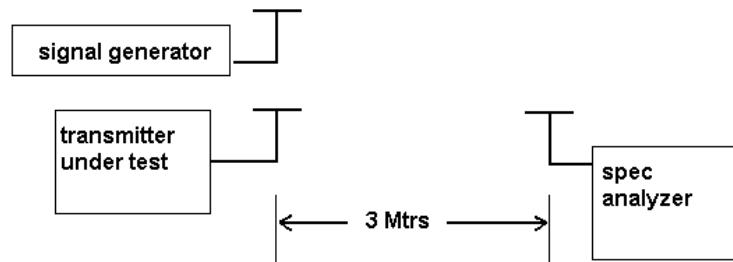

SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED) Cont.

	dBm	dBm	Watts
Power Output	19.1	19.1	0.082
	Frequency	dBm	dBc
Ant. Freq.	499	19.1	0
	998	-53.6	72.7
	1497	-77	96.1
	1996	-78	97.1
	2495	-80	99.1
	2994	-79	98.1
	3493	-80.3	99.4
	3992	-80.4	99.5
	4491	-80.1	99.2

Test Data: High Power Middle of Band: 512MHz

	dBm	dBm	Watts
Power Output	19.1	19.1	0.082
	frequency	dBm	dBc
	512	19.1	0
	1024	-16	35.1
	1536	-60.1	79.2
	2048	-59.2	78.3
	2560	-60.21	79.31
	3072	-60.57	79.67
	3584	-62.33	81.43
	4096	-62.63	81.73
	4608	-60.93	80.03
	5120	-56.87	75.97

Table of contents

Applicant: CLEARONE INC.

FCC ID: FBIBELTPACK

REPORT: C\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx



SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

Test Data: HIGH Power High end of Band607.5MHz

	dBm	dBm	Watts
Power Output	19.1	19.1	0.082
	Frequency	dBm	dBc
	607.5	19.1	0
	1215	-41.05	60.15
	1822.5	-49.17	68.27
	2430	-51.4	70.5
	3037.5	-52.4	71.5
	3645	-51.44	70.54
	4252.5	-53.47	72.57
	4860	-50.32	69.42
	5467.5	-48.56	67.66
	6075	-45.36	64.46

Test Data: HIGH Power High end of Band614.3MHz

	dBm	dBm	Watts
Power Output	19.1	19.1	0.082
	Frequency	dBm	dBc
	614.3	19.1	0
	1228.6	-42.82	61.92
	1842.9	-51.29	70.39
	2457.2	-52.06	71.16
	3071.5	-50.83	69.93
	3685.8	-53.49	72.59
	4300.1	-54.05	73.15
	4914.4	-49.72	68.82
	5528.7	-45.92	65.02
	6143	-42.12	61.22

Applicant: CLEARONE INC.

FCC ID: FBIBELTPACK

REPORT: C:\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx

SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

Test Data: HIGH Power High end of Band 617.6MHz

	dBm	dBm	Watts
Power Output	19.1	19.1	0.082
	Frequency	dBm	dBc
	617.6	19.1	0
	1235.2	-43.07	62.17
	1852.8	-51.14	70.24
	2470.4	-51.32	70.42
	3088	-51.51	70.61
	3705.6	-52.59	71.69
	4323.2	-53.73	72.83
	4940.8	-45.55	64.65
	5558.4	-45.92	65.02
	6176	-45.71	64.81

[Table of contents](#)

Applicant: CLEARONE INC.

FCC ID: FBIBELTPACK

REPORT: C:\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx

FREQUENCY STABILITY

Rule Parts. No.: Part 2.1055, Part 74.861

Requirements: Temperature and voltage tests were performed to verify that the frequency remains within the .0050%,(50 ppm)

Method of Measurements: ANSI/TIA 603-C:2004.

The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 °C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15-second intervals. The worse case number used in the table below. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 °C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15-second intervals. The worst-case number was again used in the table below. This procedure was repeated in 10-degree increments up to + 50 degrees C.

Test Data:

Temperature	Frequency MHz	PPM
25°C (reference)	460.000107	
-30°C	459.99984	-0.580
-20°C	459.999918	-0.411
-10°C	460.00008	-0.059
0°C	460.000103	-0.009
10°C	460.000045	-0.135
20°C	460.000035	-0.157
30°C	460.000063	-0.096
40°C	460.000077	-0.065
50°C	460.000027	-0.174
Battery Voltage	Frequency	PPM
-15%	460.000107	0.000
15%	460.000111	0.009

[Table of contents](#)

Applicant: CLEARONE INC.

FCC ID: FBIBELTPACK

REPORT: C\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx



EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconnical	Eaton	94455-1	1096	05/10/13	05/10/15
Antenna: Log-Periodic	Electro-Metrics	LPA-25	1122	05/09/13	05/09/15
Temperature Chamber LARGE	Tenney Engineering	TTRC	11717-7	08/19/14	08/19/16
AC Voltmeter	HP	400FL	2213A14499	06/20/13	06/20/15
Digital Multimeter	Fluke	FLUKE-77-3	79510405	06/20/13	06/20/15
Frequency Counter	HP	5385A	2730A03025	08/22/13	08/22/15
Measuring Tape-7.5M	Kraftixx	7.5M PROFI		05/20/13	05/20/15
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/13	12/31/15
Temperature Chamber Small	Thermotron Corp.	S1.2 Mini Max	25-1420-09	08/20/14	08/20/16
EMI Test Receiver R & S ESIB 40	Rohde & Schwarz	ESIB 40	100274	08/12/14	08/12/16
Software: Field Strength Program	Timco	N/A	Version 4.0	12/12/99	12/12/99
Hygro-Thermometer	Extech	445703	0602	06/20/13	06/20/15
Attenuator	Narda	766-30	N/A	08/01/13	08/01/15
EMI Test Receiver R & S ESU 40	Rohde & Schwarz	ESU 40	100320	03/11/14	03/11/16
Signal Generator HP 8648C	HP	8648C	3623A02898	08/29/13	08/29/15
Antenna: Double-Ridged Horn 18-40 GHz	EMCO	3116	9011-2145	09/20/13	09/20/15

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

[Table of contents](#)

Applicant: CLEARONE INC.

FCC ID: FBIBELTPACK

REPORT: C:\CLEARONE_FBI\1640AUT14\1640AUT14TestReport.docx