



FCC TEST REPORT

REPORT NO.: RF931101H02

MODEL NO.: WLI2-CB-G54L

RECEIVED: Dec. 30, 2003

TESTED: Jan. 02 to 06, 2004

APPLICANT: BUFFALO INC.

ADDRESS: 4-15, Shibata Hondori ,Minami-ku, Nagoya, Aichi Prefecture, Japan

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien, Taiwan, R.O.C.

This test report consists of 58 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample.



0536
ILAC MRA



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS.....	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS.....	8
4	TEST TYPES AND RESULTS.....	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST PROCEDURES.....	10
4.1.4	TEST SETUP.....	10
4.1.5	EUT OPERATING CONDITIONS.....	11
4.1.6	TEST RESULTS.....	12
4.2	RADIATED EMISSION MEASUREMENT	14
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2	TEST INSTRUMENTS	15
4.2.3	TEST PROCEDURES.....	16
4.2.4	TEST SETUP	17
4.2.5	EUT OPERATING CONDITIONS.....	17
4.2.6	TEST RESULTS.....	18
4.2.7	TEST RESULTS - DSSS.....	19
4.2.8	TEST RESULTS -OFDM	22
4.3	6DB BANDWIDTH MEASUREMENT	25
4.3.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT	25
4.3.2	TEST INSTRUMENTS	25
4.3.3	TEST PROCEDURE	26
4.3.4	TEST SETUP	26
4.3.5	EUT OPERATING CONDITIONS.....	26
4.3.6	TEST RESULTS-DSSS.....	27
4.3.7	TEST RESULTS-OFDM	31
4.4	MAXIMUM PEAK OUTPUT POWER	35
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	35
4.4.2	TEST INSTRUMENTS	35



4.4.3	TEST PROCEDURES.....	36
4.4.4	TEST SETUP	36
4.4.5	EUT OPERATING CONDITIONS.....	36
4.4.6	TEST RESULTS- DSSS.....	37
4.4.7	TEST RESULTS- OFDM	37
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	38
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	38
4.5.2	TEST INSTRUMENTS	38
4.5.3	TEST PROCEDURE	39
4.5.4	TEST SETUP	39
4.5.5	EUT OPERATING CONDITIONS.....	39
4.5.6	TEST RESULTS-DSSS.....	40
4.5.7	TEST RESULTS-OFDM	44
4.6	BAND EDGES MEASUREMENT	48
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	48
4.6.2	TEST INSTRUMENTS	48
4.6.3	TEST PROCEDURE	48
4.6.4	EUT OPERATING CONDITION.....	48
4.6.5	TEST RESULTS - DSSS.....	49
4.6.6	TEST RESULTS-OFDM	52
4.7	ANTENNA REQUIREMENT.....	55
4.7.1	STANDARD APPLICABLE	55
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	55
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	56
6	INFORMATION ON THE TESTING LABORATORIES.....	58



1 CERTIFICATION

PRODUCT : Wireless 11g CardBus Card
BRAND NAME : BUFFALO
MODEL NO. : WLI2-CB-G54L
APPLICANT : BUFFALO INC.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-2001

The above equipment (Model: WLI2-CB-G54L) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** Nov. 04, 2004
(Carol Liao)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** Nov. 04, 2004
Responsible for RF (Hank Chung)

APPROVED BY : Eric Lin , **DATE:** Nov. 04, 2004
(Eric Lin, Manager)



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission Limit: 48dBuV	PASS	Meet the requirement of limit Minimum passing margin is -18.14 dBuV at 0.197 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.0 dBuV at 2038.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless 11g CardBus Card
MODEL NO.	WPC54G V4
POWER SUPPLY	3.3VDC from host equipment
MODULATION TYPE	CCK, OFDM, DBPSK, DQPSK
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	1/2/5.5/6/9/11/12/18/24/36/48/54Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	18.15dBm
ANTENNA TYPE	Non-Detachable strip antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
2. The EUT complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
3. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. Test result, which were mentioned on section 3.1.
4. Transfer rate, 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, were chosen for final test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Wireless 11g CardBus Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 2001

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of 47 CFR Part 15, Subpart B, Class B (DoC). The test report has been issued separately.




3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK	DELL	PP01L	TW-09C748-12800-1A3-1999	FCC DoC
2	PRINTER	HP	C2642A	MY79F1C3MZ	B94C2642X
3	MODEM	ACEEX	1414	0206026776	IFAXDM1414

No.	Signal cable description
1	NA
2	1.8 m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

Note: 1. All power cords of the above support units are unshielded (1.8m).

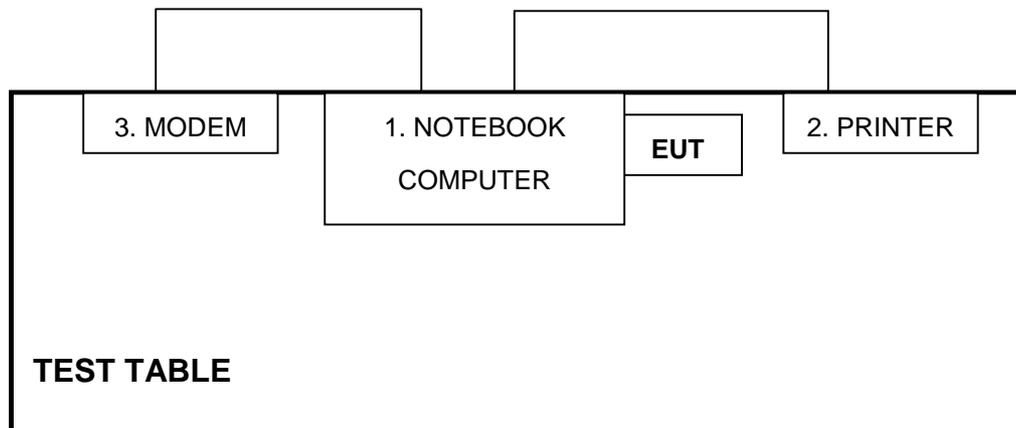

NOTE: 1. Please refer to the photos of test configuration in Item 5 also.



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	847124/029	Dec. 04, 2004
ROHDE & SCHWARZ LISN (for EUT)	ESHS-Z5	848773/004	Nov. 04, 2004
KYORITSU LISN (for peripheral)	KNW-407	8/1395/12	Jul. 27, 2004
RF Cable (JETBAO)	RG233/U	Cable_CA_01	Jul. 03, 2004
Terminator(for KYORITSU)	50	3	Apr. 11, 2004
Software	Cond-V2e	NA	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in ADT Shielded Room No. A.
 3. The VCCI Con A Registration No. is C-817.

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

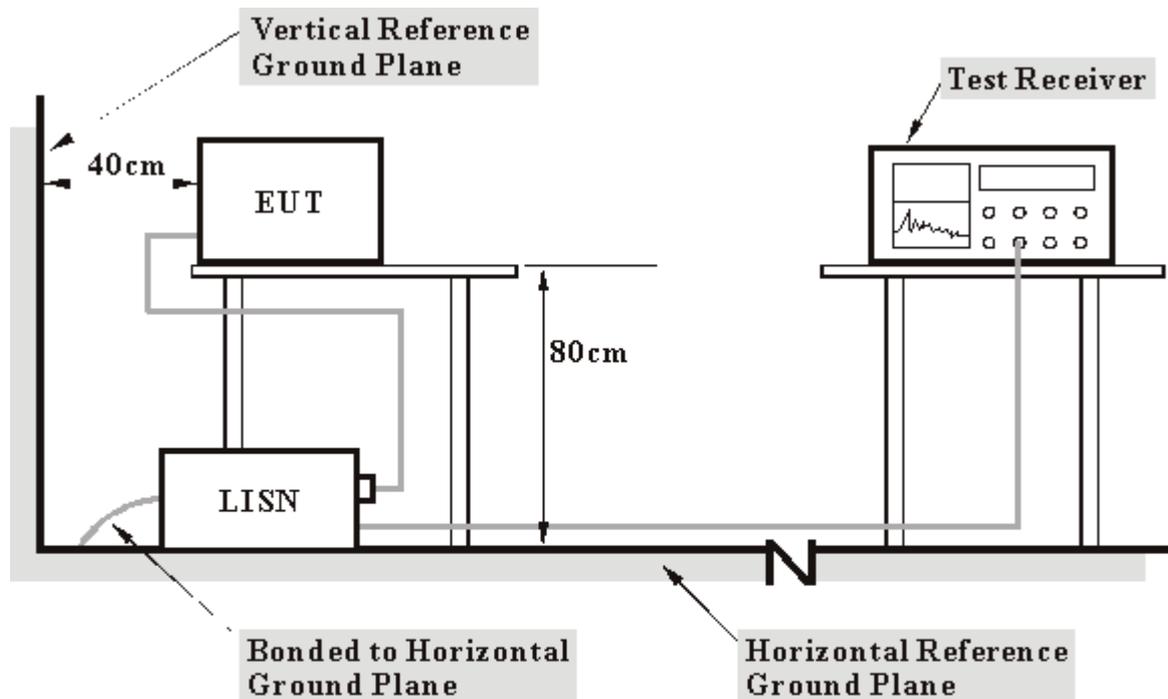

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.5 EUT OPERATING CONDITIONS

- a. Plug the EUT into the support unit 1 (Notebook computer) which placed on a testing table.
- b. The support unit 1 (Notebook computer) ran a test program "MFG TEST" to enable EUT under transmission condition continuously at specific channel frequency.
- c. Notebook computer sends "H" messages to modem.
- d. Notebook computer sends "H" messages to printer, and the printer prints them on paper.




4.1.6 TEST RESULTS

EUT	Wireless 11g CardBus Card	MODEL	WLI2-CB-G54L
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	23 deg. C, 66%RH, 981 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.197	0.20	45.41	-	45.61	-	63.75	53.75	-18.14	-
2	0.407	0.20	30.90	-	31.10	-	57.71	47.71	-26.61	-
3	0.591	0.23	32.21	-	32.44	-	56.00	46.00	-23.56	-
4	1.052	0.30	32.28	-	32.58	-	56.00	46.00	-23.42	-
5	1.880	0.30	34.89	-	35.19	-	56.00	46.00	-20.81	-
6	2.646	0.33	34.36	-	34.69	-	56.00	46.00	-21.31	-

- NOTES:** (1) "": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

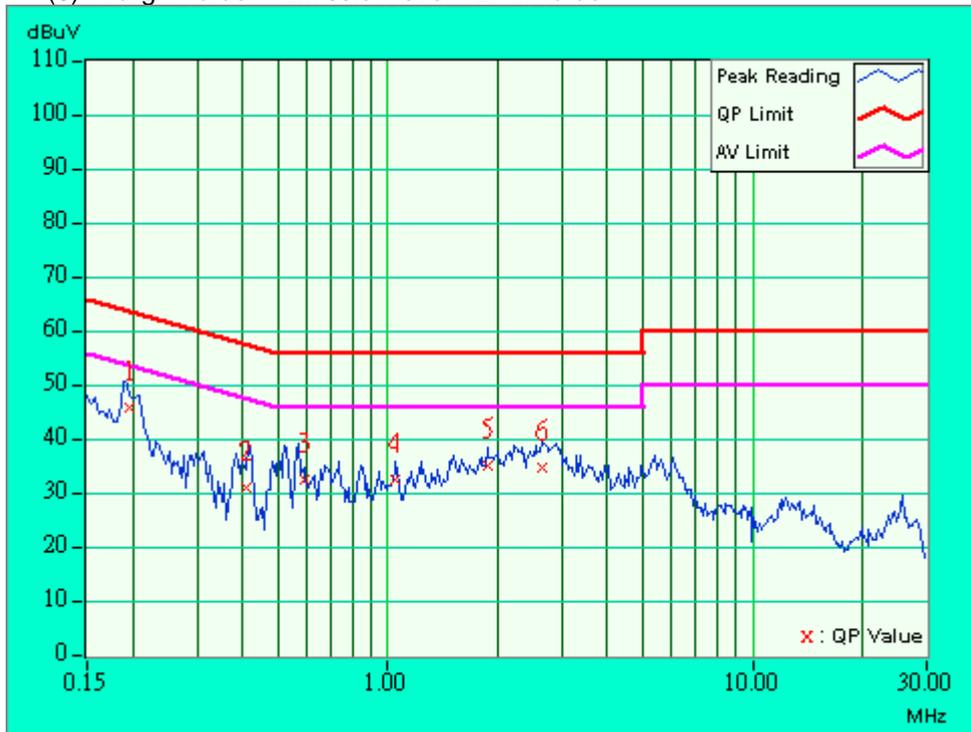




EUT	Wireless 11g CardBus Card	MODEL	WLI2-CB-G54L
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	23 deg. C, 66%RH, 981 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.197	0.20	45.31	-	45.51	-	63.74	53.74	-18.23	-
2	0.407	0.20	31.14	-	31.34	-	57.71	47.71	-26.37	-
3	0.591	0.23	33.14	-	33.37	-	56.00	46.00	-22.63	-
4	0.736	0.26	33.47	-	33.73	-	56.00	46.00	-22.27	-
5	1.056	0.30	32.18	-	32.48	-	56.00	46.00	-23.52	-
6	2.576	0.33	35.72	-	36.05	-	56.00	46.00	-19.95	-

- NOTES:** (1) "**": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

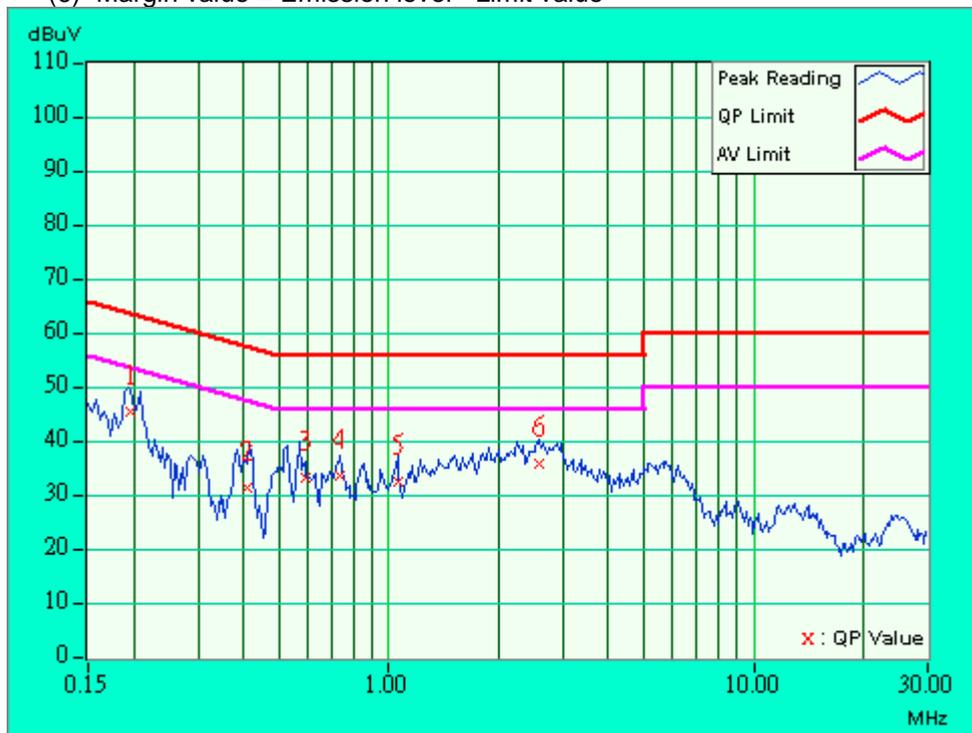



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	uV/m	dBuV/m
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8590L	3467U00646	Jun. 29, 2004
*ADVANTEST Spectrum Analyzer	R3271A	85060311	Jun. 16, 2004
CHASE RF Pre_Amplifier	CPA9232	1010	Feb. 22, 2004
*HP Pre_Amplifier	8449B	3008A01922	Oct. 13, 2004
*ROHDE & SCHWARZ Test Receiver	ESVS 30	841977/002	Sep. 17, 2004
*CHASE Broadband Antenna	CBL6112B	2798	Apr. 16, 2004
*Schwarzbeck Horn_Antenna	BBHA9120-D1	D123	Sep. 24, 2004
SCHWARZBECK Tunable Dipole Antenna	UHAP	897	Mar. 07, 2005
SCHWARZBECK Tunable Dipole Antenna	VHAP	880	Mar. 07, 2005
*RF Switches	MP59B	1-5161-28698	Jul. 31, 2004
*RF Cable(CHASE)	CH A9525	Cable_OB_01	Jul. 31, 2004
*Software	AS60P8	NA	NA
*CHANCE MOST Antenna Tower	AT-100	CM-A007	NA
*CHANCE MOST Turn Table	TC-008	CM-T007	NA
*CORCOM AC Filter	MRI2030	024/019	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Tunable Dipole Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. * = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. B.
5. The VCCI Site Registration No. is R-847.
6. The FCC Site Registration No. is 92753.
7. The CANADA Site Registration No. is IC 3789-B.




4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

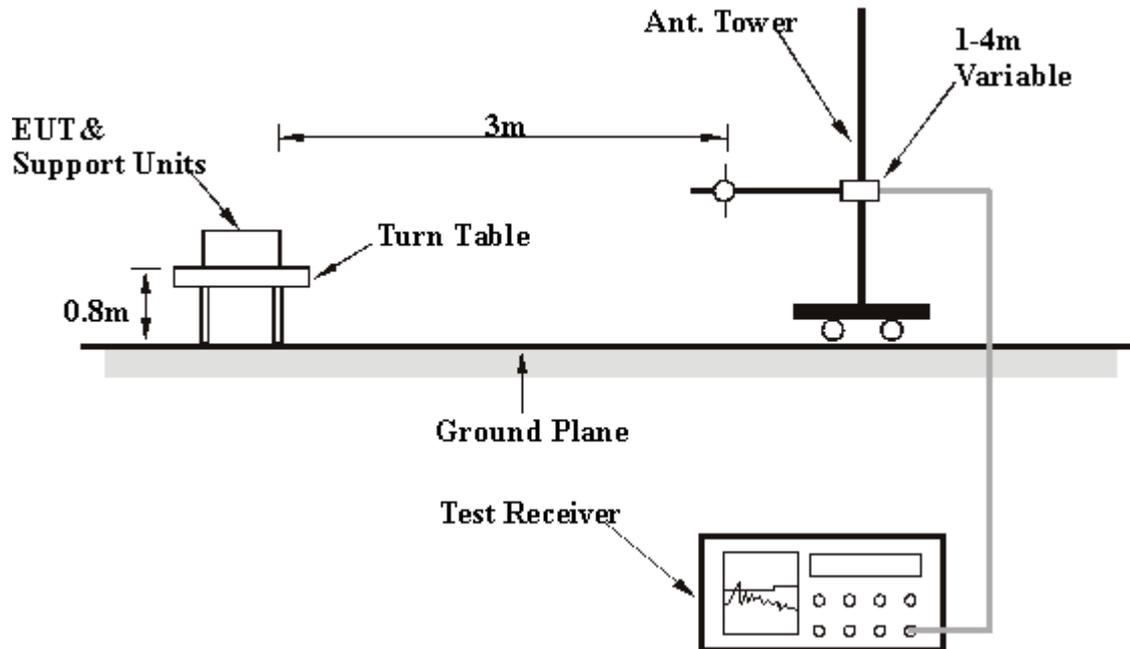

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.



4.2.6 TEST RESULTS

EUT	Wireless 11g CardBus Card	MODEL	WLI2-CB-G54L
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 66%RH, 981 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.28	28.10 QP	40.00	-11.90	1.60 H	57	14.60	13.50
2	120.00	21.90 QP	43.50	-21.60	1.38 H	19	9.20	12.70
3	195.75	29.80 QP	43.50	-13.70	1.35 H	94	20.30	9.50
4	236.95	27.90 QP	46.00	-18.10	1.25 H	71	16.70	11.20
5	301.06	28.30 QP	46.00	-17.70	1.05 H	288	13.60	14.70
6	319.49	22.90 QP	46.00	-23.10	1.01 H	289	7.80	15.10
7	375.02	27.90 QP	46.00	-18.10	1.01 H	60	11.60	16.30
8	400.00	25.40 QP	46.00	-20.60	1.08 H	229	8.60	16.80
9	749.57	28.80 QP	46.00	-17.20	1.20 H	342	4.10	24.80
10	774.14	31.00 QP	46.00	-15.00	1.37 H	207	6.50	24.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.00	28.00 QP	40.00	-12.00	1.24 V	218	14.80	13.20
2	61.25	20.60 QP	40.00	-19.40	1.05 V	172	14.70	5.90
3	114.69	20.00 QP	43.50	-23.50	1.30 V	122	7.70	12.30
4	240.03	21.40 QP	46.00	-24.60	2.22 V	224	9.50	11.90
5	300.00	28.90 QP	46.00	-17.10	1.58 V	354	14.20	14.70
6	420.00	26.90 QP	46.00	-19.10	1.14 V	9	9.50	17.40
7	599.99	24.10 QP	46.00	-21.90	1.27 V	203	3.70	20.40
8	630.00	27.50 QP	46.00	-18.50	1.71 V	3	6.00	21.50
9	659.99	27.30 QP	46.00	-18.70	1.09 V	229	5.20	22.10
10	839.93	28.10 QP	46.00	-17.90	1.93 V	20	3.00	25.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



4.2.7 TEST RESULTS - DSSS

EUT	Wireless 11g CardBus Card	MODEL	WL12-CB-G54L
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	21 deg. C, 59%RH, 981 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	55.60 PK	74.00	-29.50	1.05 H	240	26.80	28.80
1	2038.00	54.60 AV	54.00	-23.10	1.05 H	240	25.80	28.80
2	2332.00	43.80 PK	74.00	-30.20	1.61 H	360	14.20	29.60
3	2390.00	52.30 PK	74.00	-21.70	1.02 H	231	22.50	29.80
3	2390.00	43.40 AV	54.00	-10.60	1.02 H	231	13.60	29.80
4	*2412.00	105.10 PK			1.12 H	173	75.20	29.90
4	*2412.00	97.70 AV			1.12 H	173	67.80	29.90
5	4076.00	41.50 PK	74.00	-32.50	1.84 H	337	7.50	34.00
6	4824.00	48.50 PK	74.00	-25.50	1.57 H	150	12.30	36.20
7	7236.00	49.70 PK	74.00	-24.30	1.55 H	159	8.10	41.70
8	9648.00	55.40 PK	74.00	-18.60	1.22 H	156	10.50	44.90
8	9648.00	45.20 AV	54.00	-8.80	1.22 H	156	0.30	44.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	56.30 PK	74.00	-17.70	1.26 V	207	27.50	28.80
1	2038.00	55.60 AV	54.00	-22.10	1.26 V	207	26.80	28.80
2	2332.00	45.40 PK	74.00	-28.60	1.12 V	217	15.80	29.60
3	2390.00	52.40 PK	74.00	-21.60	1.02 V	230	22.60	29.80
3	2390.00	43.40 AV	54.00	-10.60	1.02 V	230	13.60	29.80
4	*2412.00	104.60 PK			1.95 V	302	74.70	29.90
4	*2412.00	97.70 AV			1.95 V	302	67.80	29.90
5	4076.00	40.50 PK	74.00	-33.50	1.40 V	215	6.50	34.00
6	4824.00	48.80 PK	74.00	-25.20	1.75 V	283	12.60	36.20
7	7236.00	50.70 PK	74.00	-23.30	1.18 V	300	9.00	41.70
8	9648.00	54.90 PK	74.00	-19.10	1.63 V	302	10.00	44.90
8	9648.00	45.60 AV	54.00	-8.40	1.63 V	302	0.70	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	Wireless 11g CardBus Card	MODEL	WLI2-CB-G54L
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21 deg. C, 59%RH, 981 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	51.90 PK	74.00	-22.10	1.12 H	245	23.00	28.90
1	2063.00	50.60 AV	54.00	-3.40	1.12 H	245	21.70	28.90
2	2366.00	51.40 PK	74.00	-22.60	1.29 H	225	21.70	29.70
2	2366.00	41.50 AV	54.00	-12.50	1.29 H	225	11.80	29.70
3	*2437.00	103.70 PK			1.07 H	175	73.70	30.00
3	*2437.00	97.20 AV			1.07 H	175	67.20	30.00
4	2484.00	54.20 PK	74.00	-19.80	1.20 H	228	24.00	30.10
4	2484.00	43.50 AV	54.00	-10.50	1.20 H	228	13.40	30.10
5	4126.00	42.10 PK	74.00	-31.90	1.42 H	230	8.00	34.10
6	4874.00	49.60 PK	74.00	-24.40	1.57 H	230	13.10	36.50
7	7311.00	50.10 PK	74.00	-23.90	1.67 H	237	8.30	41.80
8	9748.00	54.70 PK	74.00	-19.30	1.25 H	239	10.10	44.60
8	9748.00	45.60 AV	54.00	-8.40	1.25 H	239	1.00	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	48.70 PK	74.00	-25.30	1.34 V	309	19.90	28.90
2	2389.00	51.60 PK	74.00	-22.40	1.03 V	313	21.80	29.80
2	2389.00	39.50 AV	54.00	-14.50	1.03 V	313	9.70	29.80
3	*2437.00	106.10 PK			3.00 V	195	76.10	30.00
3	*2437.00	98.90 AV			3.00 V	195	68.90	30.00
4	2483.50	46.70 PK	74.00	-27.30	1.33 V	326	16.50	30.10
5	4126.00	40.30 PK	74.00	-33.70	1.44 V	358	6.20	34.10
6	4874.00	54.20 PK	74.00	-19.80	1.53 V	94	17.70	36.50
6	4874.00	44.30 AV	54.00	-9.70	1.53 V	94	7.90	36.50
7	7311.00	51.10 PK	74.00	-22.90	1.37 V	110	9.40	41.80
7	7311.00	41.60 AV	54.00	-12.40	1.37 V	110	-0.10	41.80
8	9748.00	52.10 PK	74.00	-21.90	1.28 V	69	7.40	44.60
8	9748.00	43.70 AV	54.00	-10.30	1.28 V	69	-0.90	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	Wireless 11g CardBus Card	MODEL	WL12-CB-G54L
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21 deg. C, 59%RH, 981 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	47.40 PK	74.00	-26.60	1.67 H	190	18.40	29.00
2	*2462.00	104.90 PK			1.05 H	173	74.80	30.10
2	*2462.00	98.10 AV			1.05 H	173	68.00	30.10
3	2483.50	51.40 PK	74.00	-22.60	1.03 H	234	21.20	30.10
3	2483.50	42.00 AV	54.00	-12.00	1.03 H	234	11.80	30.10
4	4176.00	40.60 PK	74.00	-33.40	1.15 H	295	6.50	34.20
5	4924.00	49.60 PK	74.00	-24.40	2.13 H	288	12.90	36.70
6	7384.00	50.30 PK	74.00	-23.70	1.75 H	291	8.50	41.80
7	9848.00	49.90 PK	74.00	-24.10	1.07 H	330	5.50	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	47.90 PK	74.00	-26.10	1.00 V	145	18.90	29.00
2	*2462.00	106.70 PK			2.99 V	191	76.70	30.10
2	*2462.00	99.80 AV			2.99 V	191	69.80	30.10
3	2483.50	53.20 PK	74.00	-20.80	1.02 V	321	23.10	30.10
3	2483.50	43.60 AV	54.00	-10.40	1.02 V	321	13.50	30.10
4	4176.00	41.10 PK	74.00	-32.90	4.00 V	48	7.00	34.20
5	4924.00	47.10 PK	74.00	-26.90	1.40 V	234	10.40	36.70
6	7384.00	48.00 PK	74.00	-26.00	1.40 V	254	6.10	41.80
7	9848.00	51.20 PK	74.00	-22.80	1.50 V	314	6.80	44.40
7	9848.00	41.40 AV	54.00	-12.60	1.50 V	314	-3.00	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



4.2.8 TEST RESULTS -OFDM

EUT	Wireless 11g CardBus Card	MODEL	WLI2-CB-G54L
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	21 deg. C, 59%RH, 981 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	54.10 PK	74.00	-19.90	1.00 H	17	25.30	28.80
1	2038.00	53.00 AV	54.00	-1.00	1.00 H	17	24.10	28.80
2	2360.00	41.00 PK	74.00	-33.00	1.52 H	181	11.30	29.70
3	2390.00	51.20 PK	74.00	-22.80	1.22 H	211	21.40	29.80
3	2390.00	41.50 AV	54.00	-12.50	1.22 H	211	11.70	29.80
4	*2412.00	98.10 PK			1.26 H	302	68.20	29.90
4	*2412.00	89.60 AV			1.26 H	302	59.70	29.90
5	4076.00	42.10 PK	74.00	-31.90	1.03 H	207	8.10	34.00
6	4824.00	48.70 PK	74.00	-25.30	1.23 H	201	12.50	36.20
7	7236.00	50.30 PK	74.00	-23.70	1.04 H	101	8.60	41.70
8	9648.00	54.30 PK	74.00	-19.70	1.07 H	230	9.40	44.90
8	9648.00	44.50 AV	54.00	-9.50	1.07 H	230	-0.40	44.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	53.30 PK	74.00	-20.70	1.25 V	358	24.50	28.80
1	2038.00	52.00 AV	54.00	-2.00	1.25 V	358	23.10	28.80
2	2320.00	49.40 PK	74.00	-24.60	1.08 V	210	19.80	29.60
3	2360.00	-4.80 PK	74.00	-78.80	1.03 V	111	-34.50	29.70
4	2390.00	53.60 PK	74.00	-20.40	1.08 V	210	23.80	29.80
4	2390.00	43.30 AV	54.00	-10.70	1.08 V	210	13.50	29.80
5	*2412.00	99.90 PK			1.03 V	111	70.00	29.90
5	*2412.00	91.40 AV			1.03 V	111	61.50	29.90
6	4076.00	43.00 PK	74.00	-31.00	1.13 V	352	9.00	34.00
7	4824.00	49.40 PK	74.00	-24.60	1.56 V	103	13.10	36.20
8	7236.00	48.80 PK	74.00	-25.20	1.26 V	234	7.10	41.70
9	9648.00	54.20 PK	74.00	-19.80	1.23 V	222	9.30	44.90
9	9648.00	45.20 AV	54.00	-8.80	1.23 V	222	0.30	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	Wireless 11g CardBus Card	MODEL	WLI2-CB-G54L
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21 deg. C, 59%RH, 981 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	51.90 PK	74.00	-22.10	1.02 H	15	23.00	28.90
1	2063.00	50.60 AV	54.00	-3.40	1.02 H	15	21.70	28.90
2	2320.00	46.40 PK	74.00	-27.60	1.22 H	334	16.90	29.60
3	*2437.00	97.20 PK			1.25 H	299	67.20	30.00
3	*2437.00	89.90 AV			1.25 H	299	59.90	30.00
4	2484.00	48.80 PK	74.00	-25.20	1.16 H	263	18.70	30.10
5	4126.00	41.20 PK	74.00	-32.80	1.25 H	236	7.10	34.10
6	4874.00	47.00 PK	74.00	-27.00	1.24 H	201	10.50	36.50
7	7311.00	52.40 PK	74.00	-21.60	1.47 H	203	10.60	41.80
7	7311.00	40.60 AV	54.00	-13.40	1.47 H	203	-1.20	41.80
8	9748.00	54.20 PK	74.00	-19.80	1.07 H	360	9.60	44.60
8	9748.00	45.30 AV	54.00	-8.70	1.07 H	360	0.70	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	50.20 PK	74.00	-23.80	1.56 V	122	21.40	28.90
2	2320.00	48.60 PK	74.00	-25.40	1.00 V	242	19.00	29.60
3	*2437.00	101.00 PK			1.00 V	112	71.00	30.00
3	*2437.00	91.80 AV			1.00 V	112	61.80	30.00
4	2483.50	44.80 PK	74.00	-29.20	1.08 V	292	14.70	30.10
5	4126.00	41.20 PK	74.00	-32.80	1.24 V	233	7.10	34.10
6	4874.00	51.40 PK	74.00	-22.60	1.24 V	201	14.90	36.50
6	4874.00	42.30 AV	54.00	-11.70	1.24 V	201	5.80	36.50
7	7311.00	51.20 PK	74.00	-22.80	1.07 V	341	9.40	41.80
7	7311.00	41.20 AV	54.00	-12.80	1.07 V	341	-0.60	41.80
8	9748.00	52.70 PK	74.00	-21.30	1.64 V	237	8.10	44.60
8	9748.00	43.80 AV	54.00	-10.20	1.64 V	237	-0.80	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	Wireless 11g CardBus Card	MODEL	WLI2-CB-G54L
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 59%RH, 981 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	49.90 PK	74.00	-24.10	1.07 H	47	20.90	29.00
2	*2462.00	97.70 PK			1.56 H	298	67.70	30.10
2	*2462.00	89.90 AV			1.56 H	298	59.80	30.10
3	2483.50	49.70 PK	74.00	-24.30	1.27 H	310	19.50	30.10
4	4176.00	41.50 PK	74.00	-32.50	1.24 H	301	7.30	34.20
5	4924.00	48.20 PK	74.00	-25.80	1.37 H	241	11.50	36.70
6	7386.00	51.30 PK	74.00	-22.70	1.07 H	255	9.50	41.80
6	7386.00	41.20 AV	54.00	-12.80	1.07 H	255	-0.60	41.80
7	9848.00	49.70 PK	74.00	-24.30	1.24 H	310	5.30	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	51.00 PK	74.00	-23.00	1.51 V	108	22.10	29.00
1	2088.00	49.20 AV	54.00	-4.80	1.51 V	108	20.20	29.00
2	*2462.00	101.20 PK			1.00 V	113	71.20	30.10
2	*2462.00	91.40 AV			1.00 V	113	61.30	30.10
3	2483.50	51.50 PK	74.00	-22.50	1.02 V	231	21.30	30.10
3	2483.50	42.40 AV	54.00	-11.60	1.02 V	231	12.30	30.10
4	4176.00	41.80 PK	74.00	-32.20	1.24 V	201	7.60	34.20
5	4924.00	47.20 PK	74.00	-26.80	1.28 V	230	10.50	36.70
6	7384.00	47.30 PK	74.00	-26.70	1.07 V	258	5.50	41.80
7	9848.00	51.20 PK	74.00	-22.80	1.27 V	210	6.80	44.40
7	9848.00	41.30 AV	54.00	-12.70	1.27 V	210	-3.10	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	May. 06, 2004

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.6 TEST RESULTS-DSSS

EUT	Wireless 11g CardBus Card		
MODEL	WLI2-CB-G54L	ENVIRONMENTAL CONDITIONS	23 deg. C, 66%RH, 981 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Tony Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	9.85	0.5	PASS
6	2437	10.80	0.5	PASS
11	2462	10.40	0.5	PASS




CH1

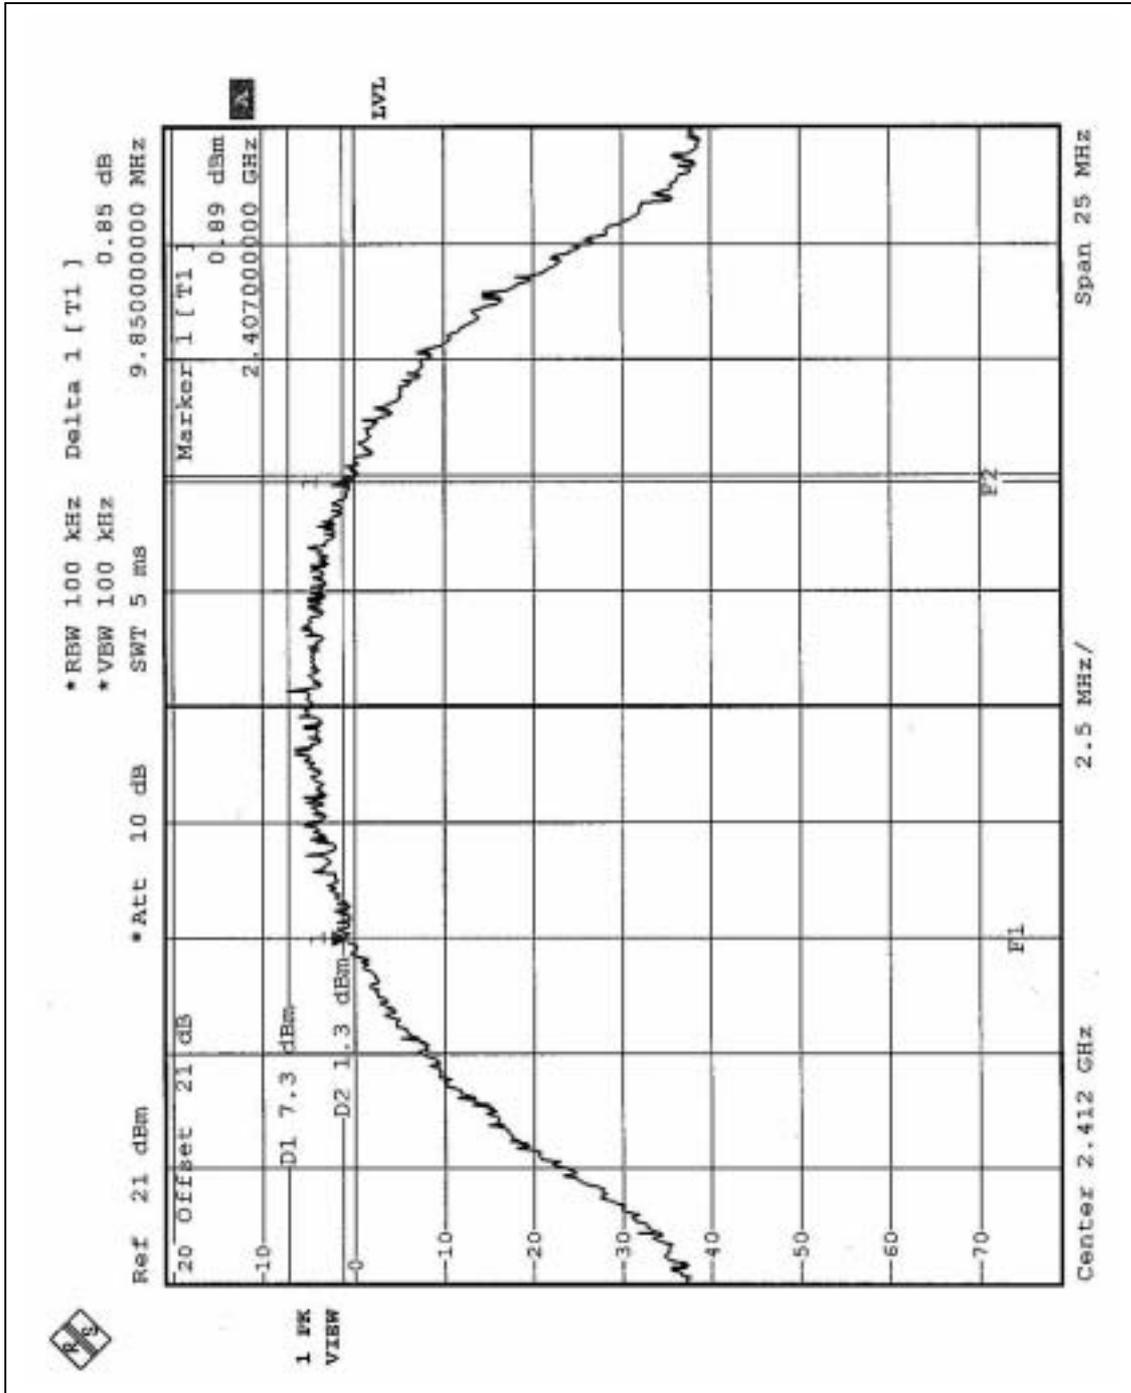




CH6

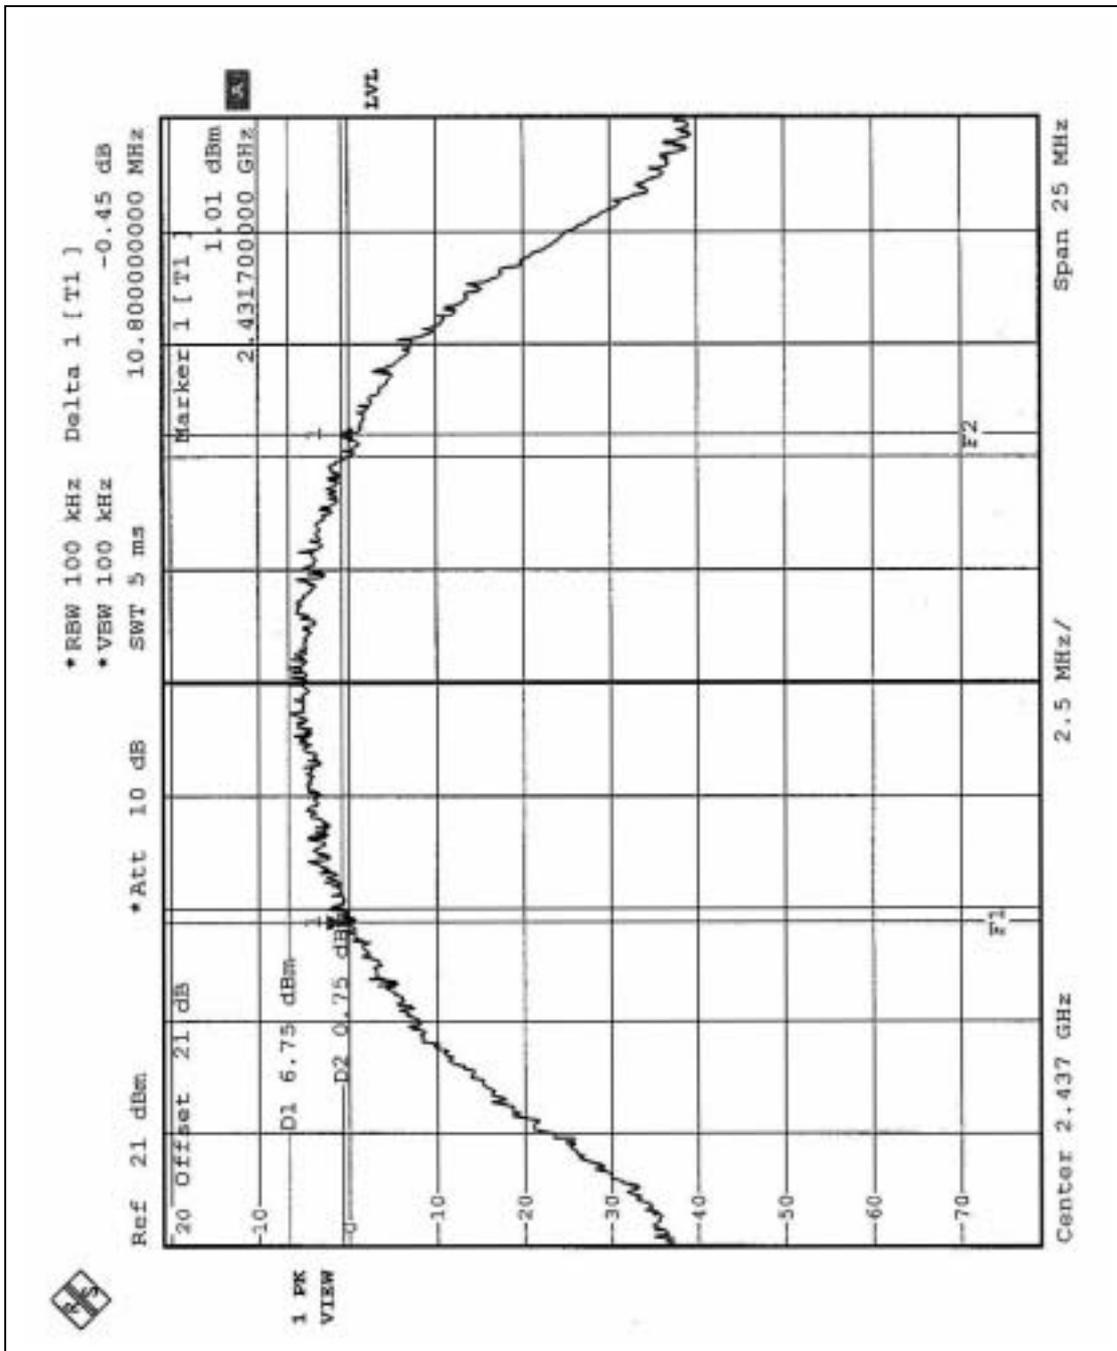



CH11

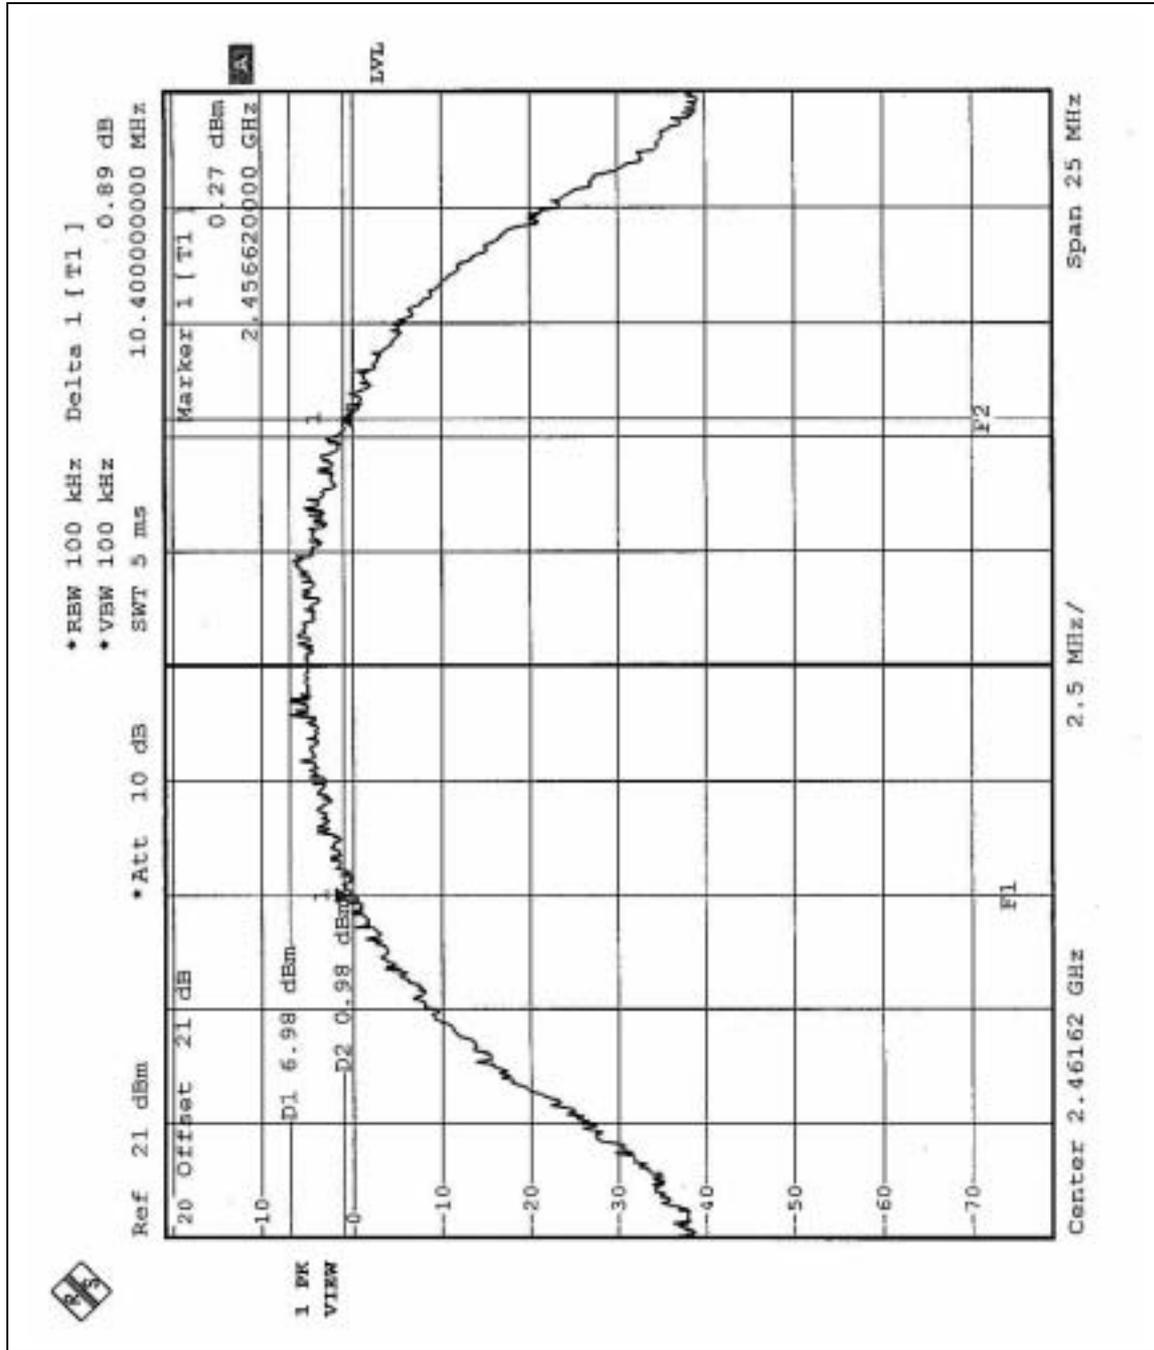




4.3.7 TEST RESULTS-OFDM

EUT	Wireless 11g CardBus Card		
MODEL	WLI2-CB-G54L	ENVIRONMENTAL CONDITIONS	23 deg. C, 6%RH, 981 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Tony Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.30	0.5	PASS
6	2437	16.45	0.5	PASS
11	2462	16.40	0.5	PASS




CH1

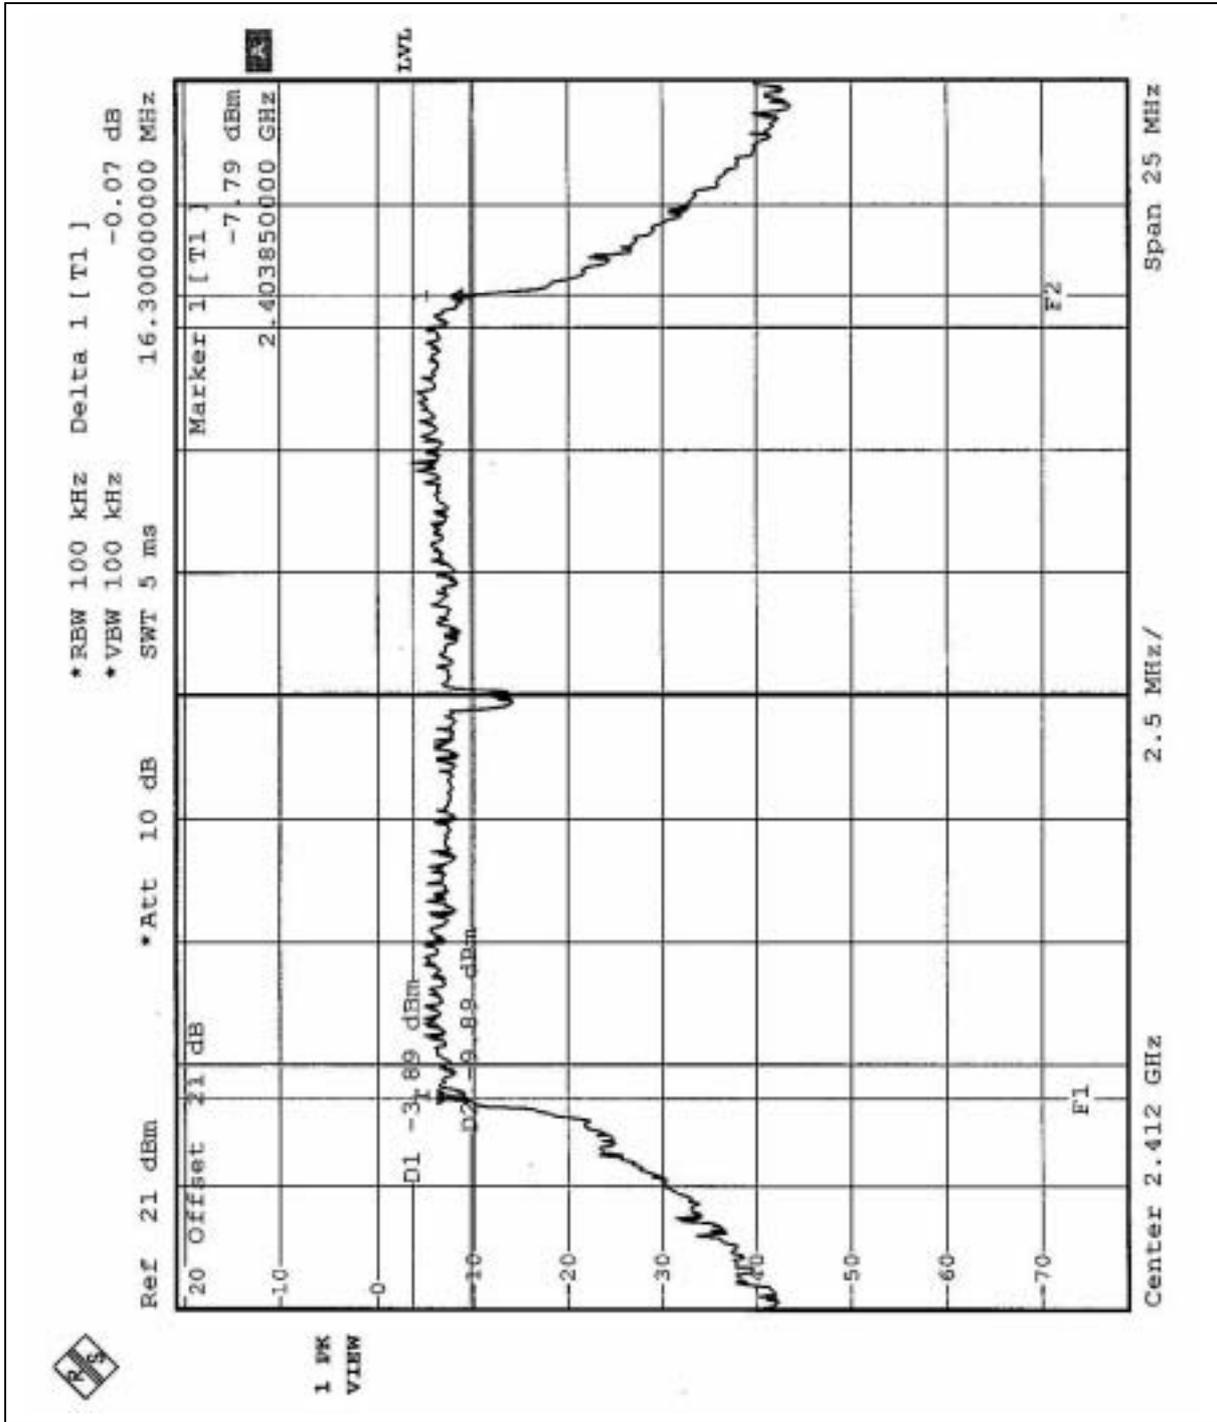




CH6

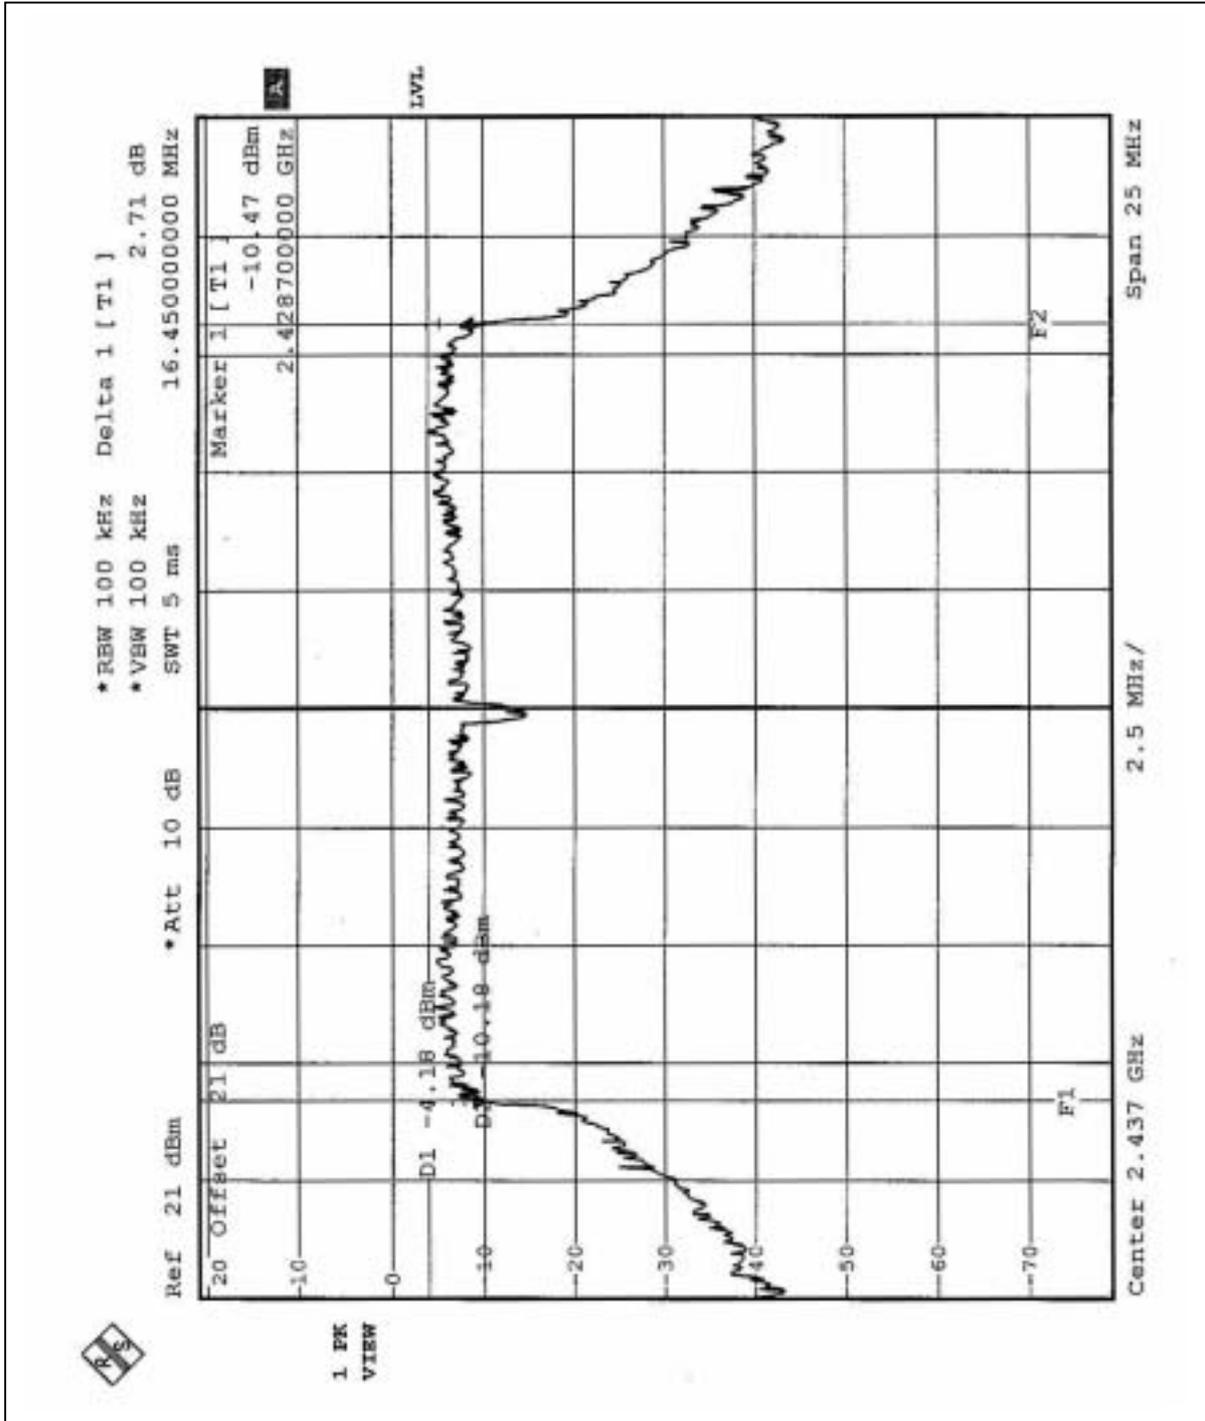



CH11

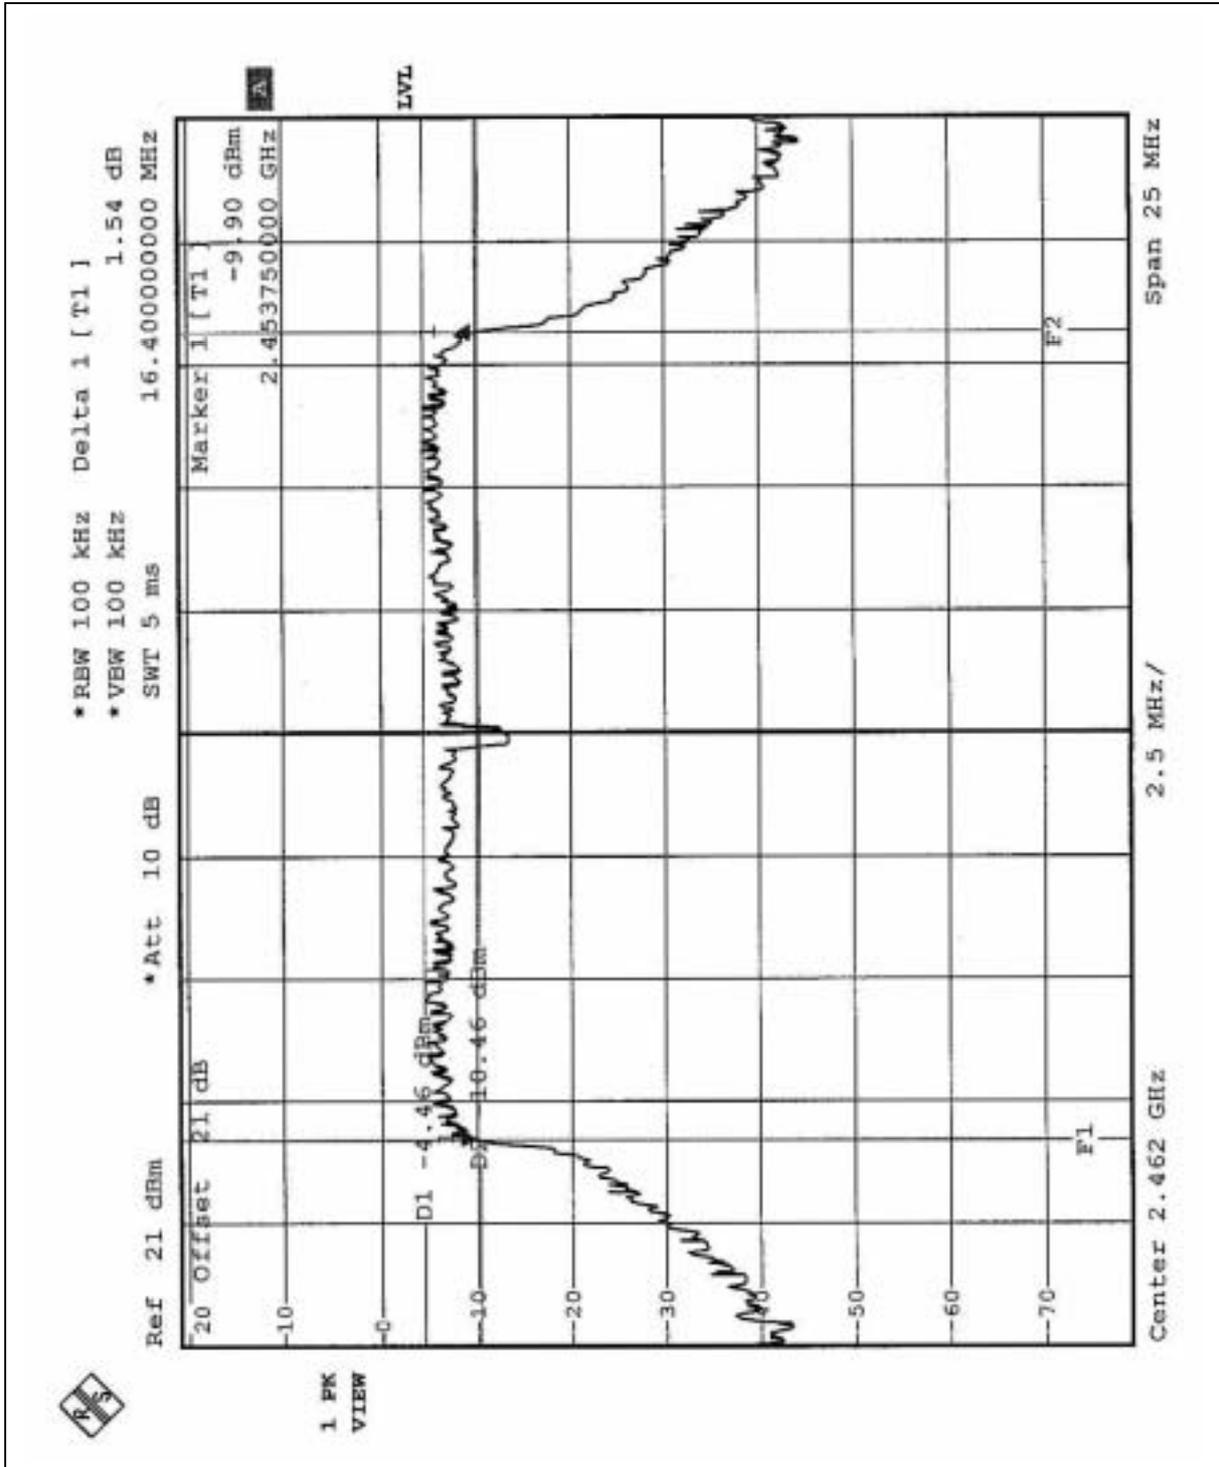



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	May 06, 2004
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:


The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the peak response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5



4.4.6 TEST RESULTS- DSSS

EUT	Wireless 11g CardBus Card		
MODEL	WLI2-CB-G54L	ENVIRONMENTAL CONDITIONS	27 deg. C, 57%RH, 981 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Tony Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	18.05	30	PASS
6	2437	18.15	30	PASS
11	2462	18.11	30	PASS

4.4.7 TEST RESULTS- OFDM

EUT	Wireless 11g CardBus Card		
MODEL	WLI2-CB-G54L	ENVIRONMENTAL CONDITIONS	27 deg. C, 57%RH, 981 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Tony Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	14.05	30	PASS
6	2437	14.21	30	PASS
11	2462	14.10	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	May. 06, 2004


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP

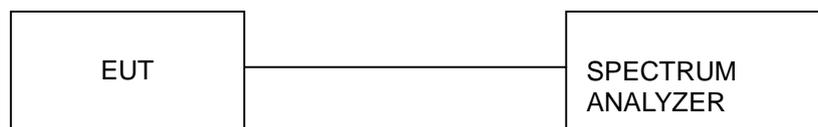

4.5.5 EUT OPERATING CONDITIONS

Same as 4.3.5




4.5.6 TEST RESULTS-DSSS

EUT	Wireless 11g CardBus Card		
MODEL	WLI2-CB-G54L	ENVIRONMENTAL CONDITIONS	23 deg. C, 66%RH, 981 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Tony Chen

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-7.13	8	PASS
6	2437	-7.19	8	PASS
11	2462	-6.84	8	PASS




CH1

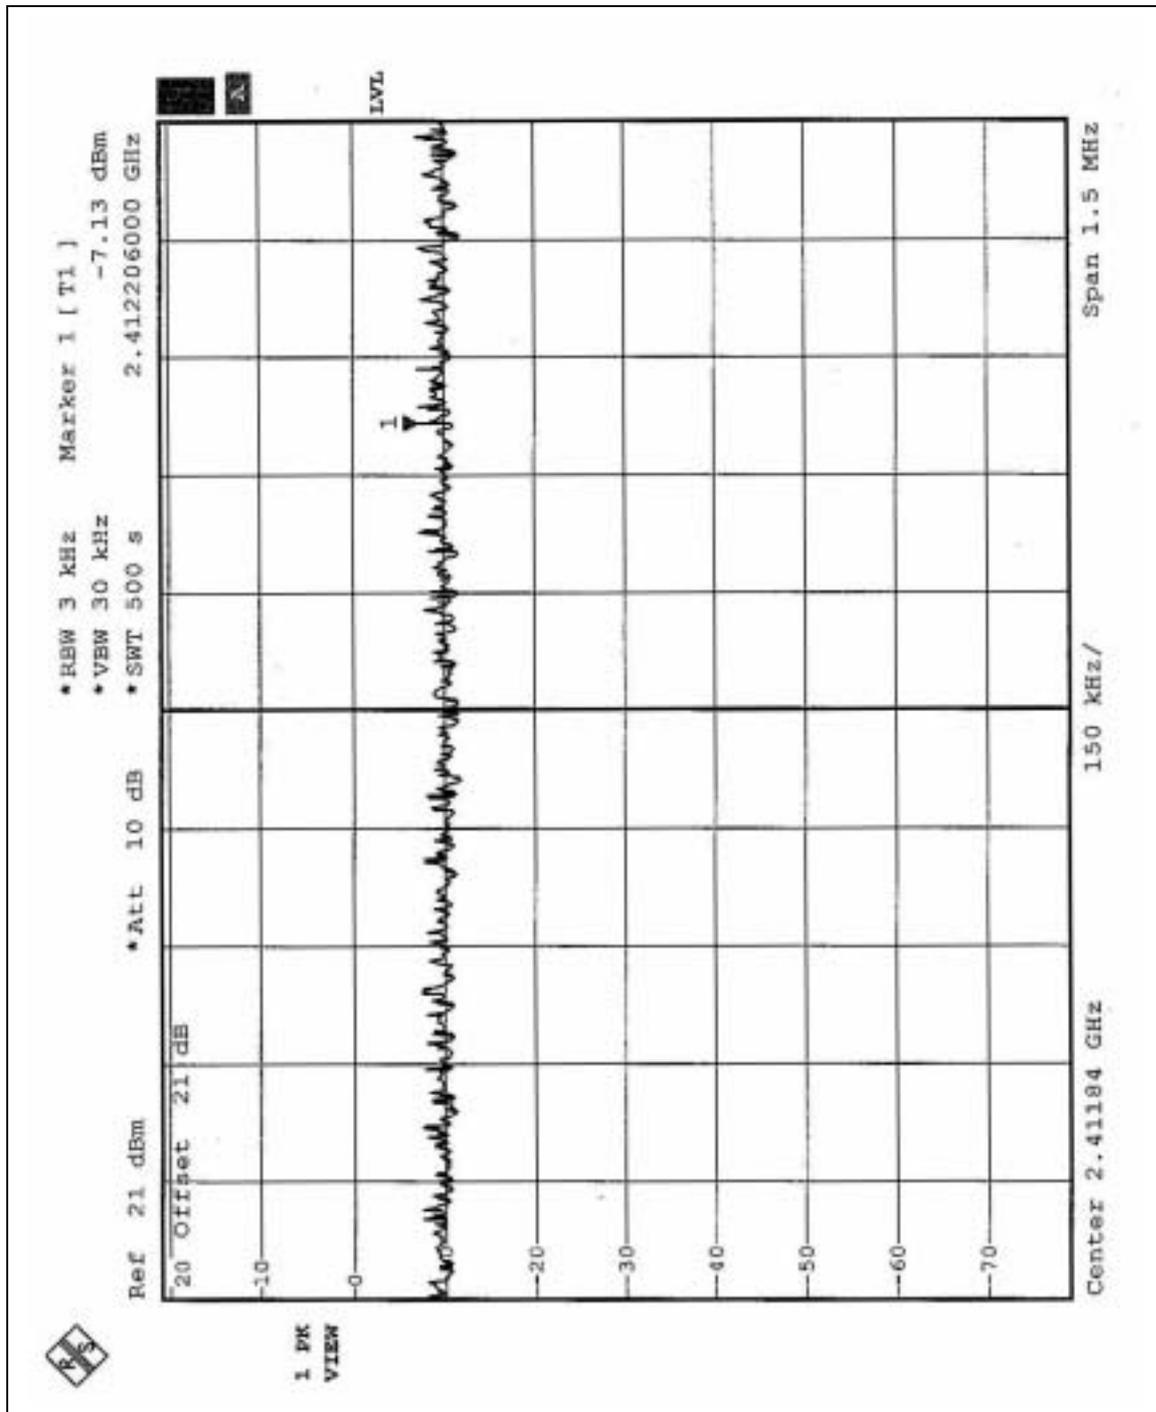




CH6

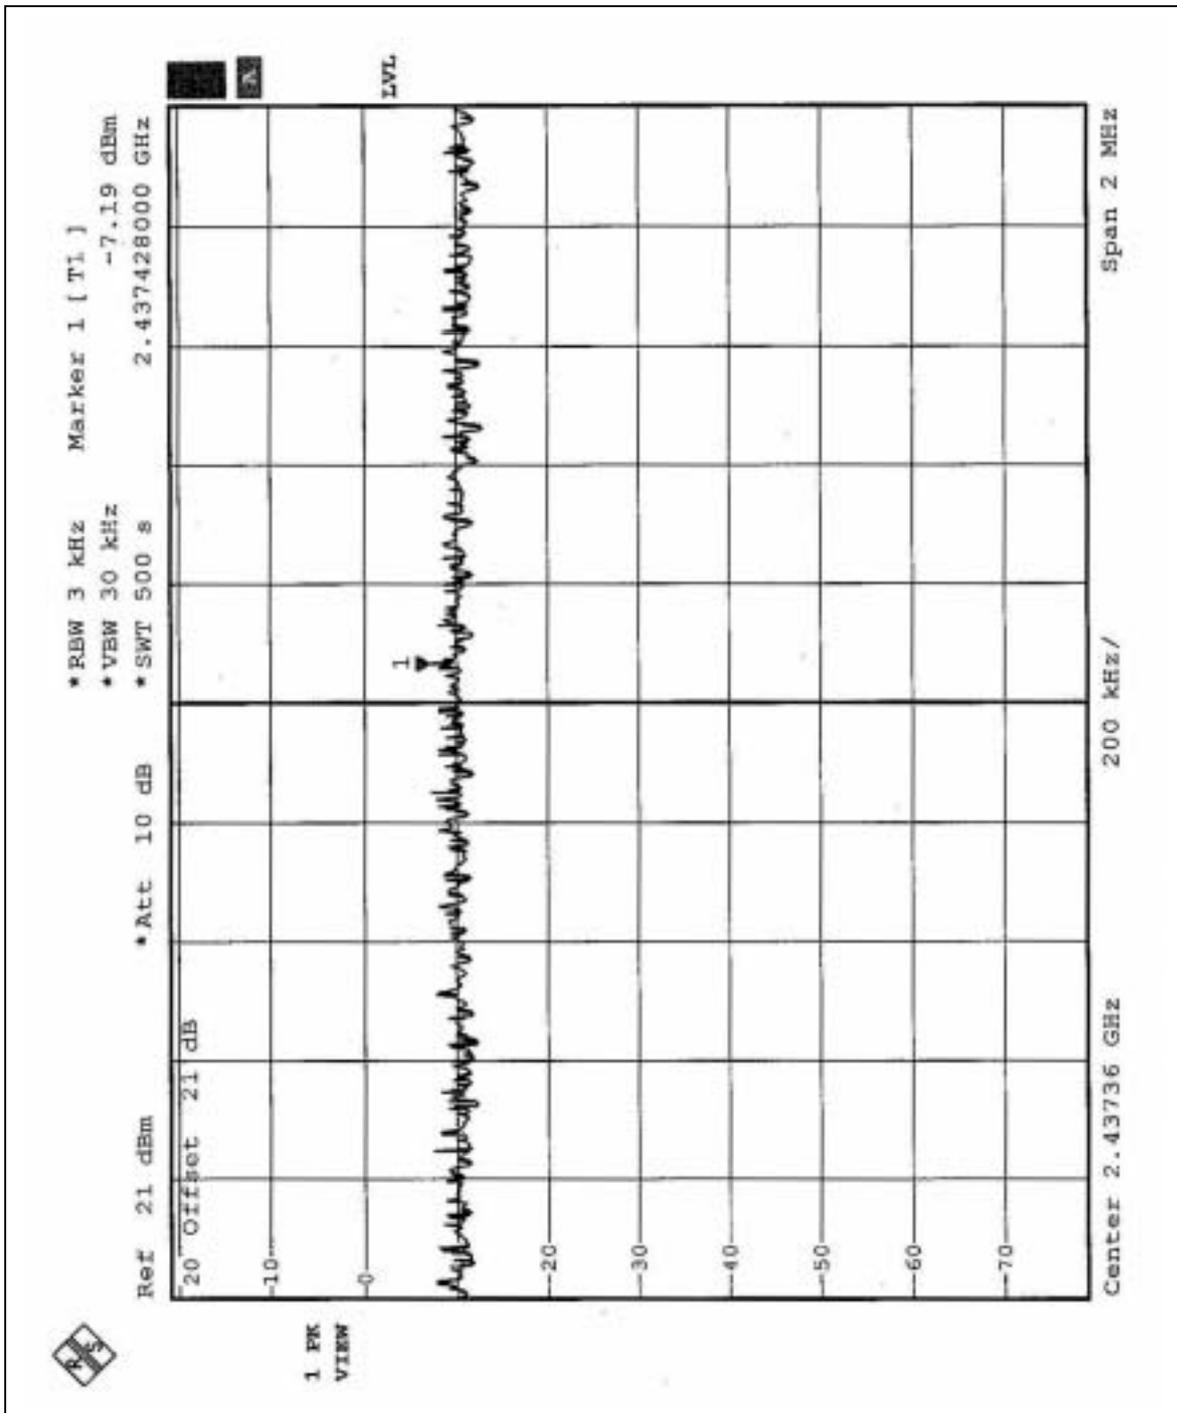



CH11

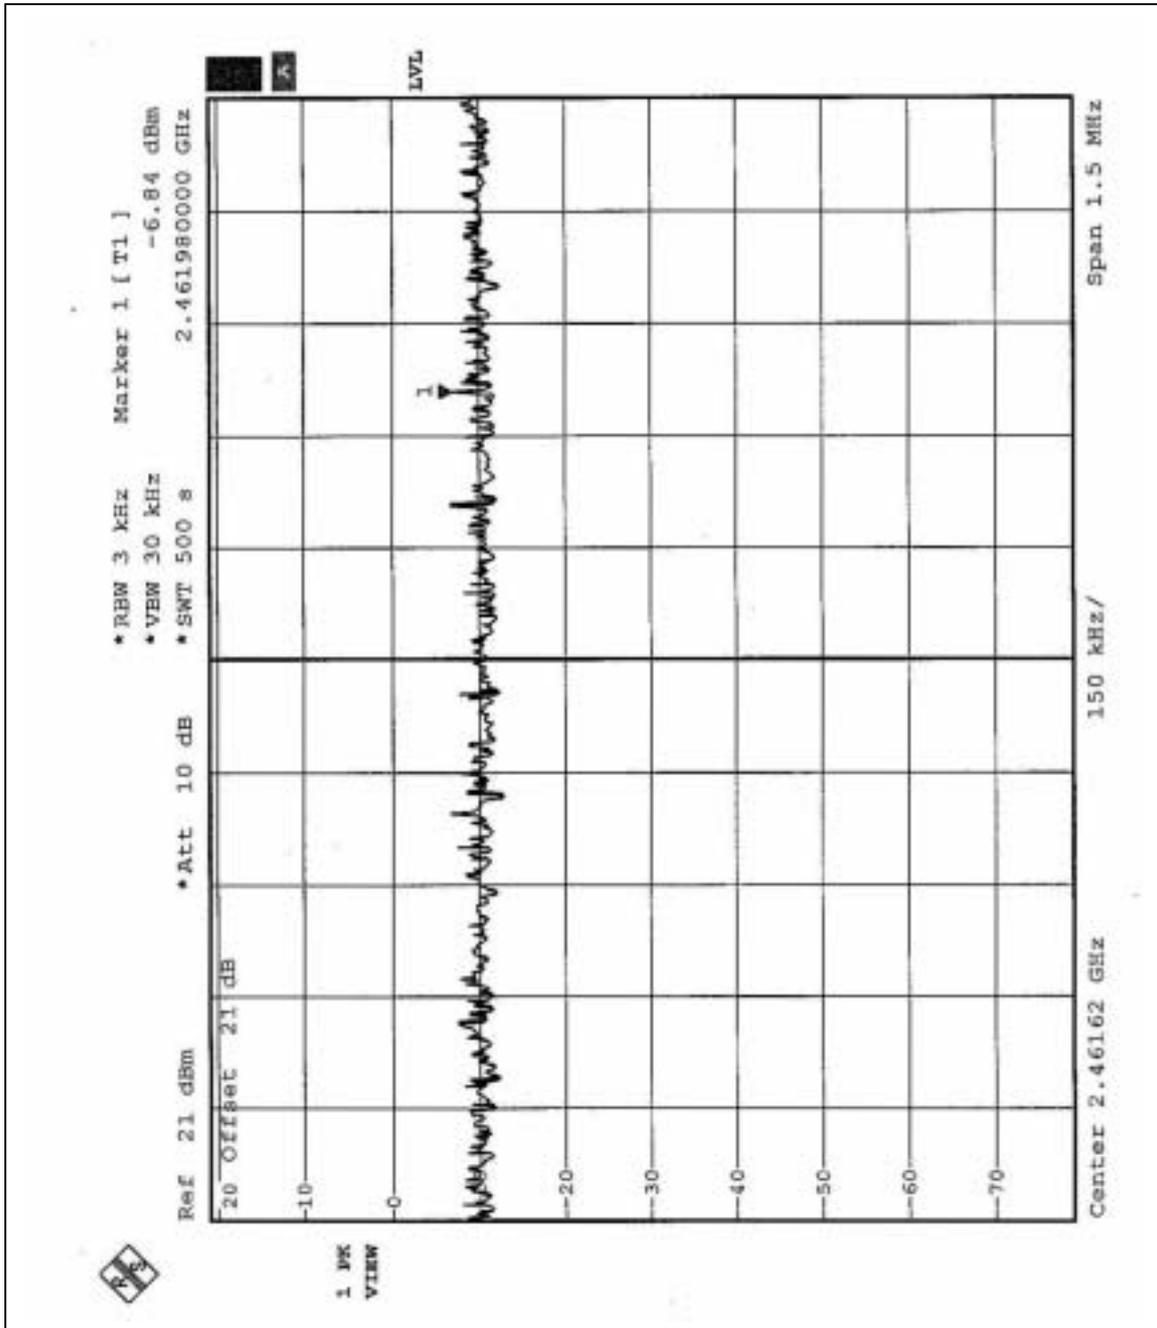




4.5.7 TEST RESULTS-OFDM

EUT	Wireless 11g CardBus Card		
MODEL	WLI2-CB-G54L	ENVIRONMENTAL CONDITIONS	23 deg. C, 66%RH, 981 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Tony Chen

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-16.49	8	PASS
6	2437	-15.08	8	PASS
11	2462	-15.55	8	PASS




CH1

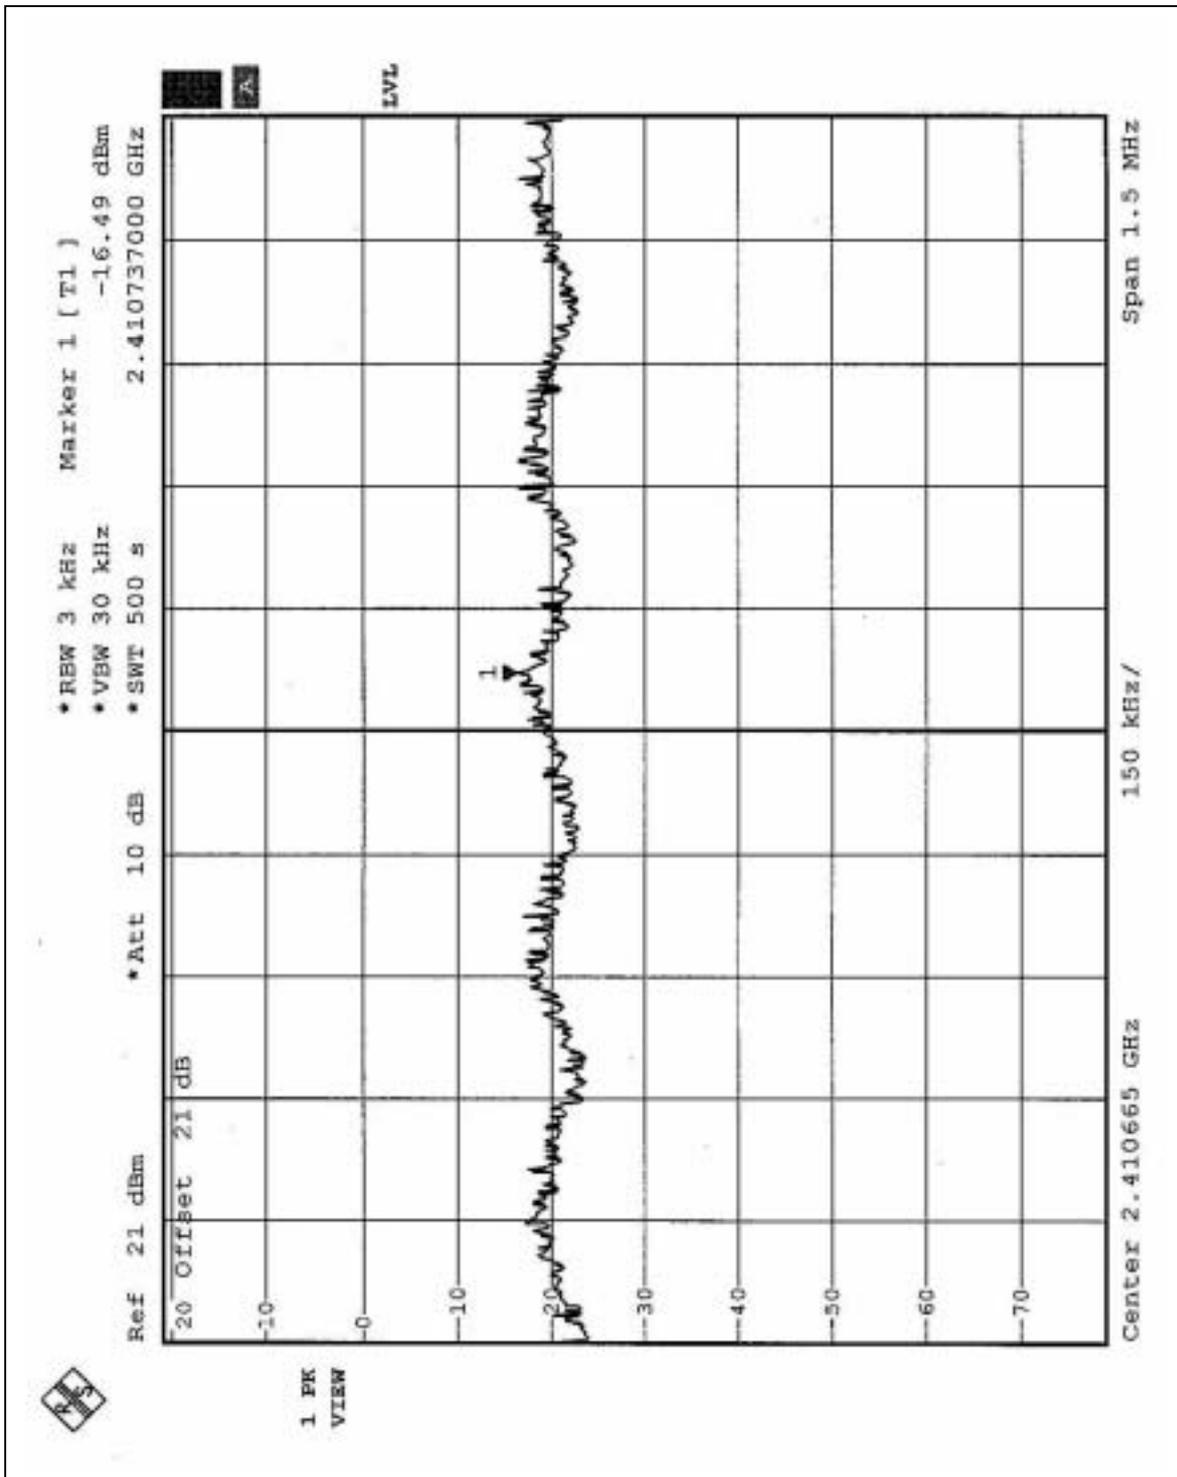



CH6

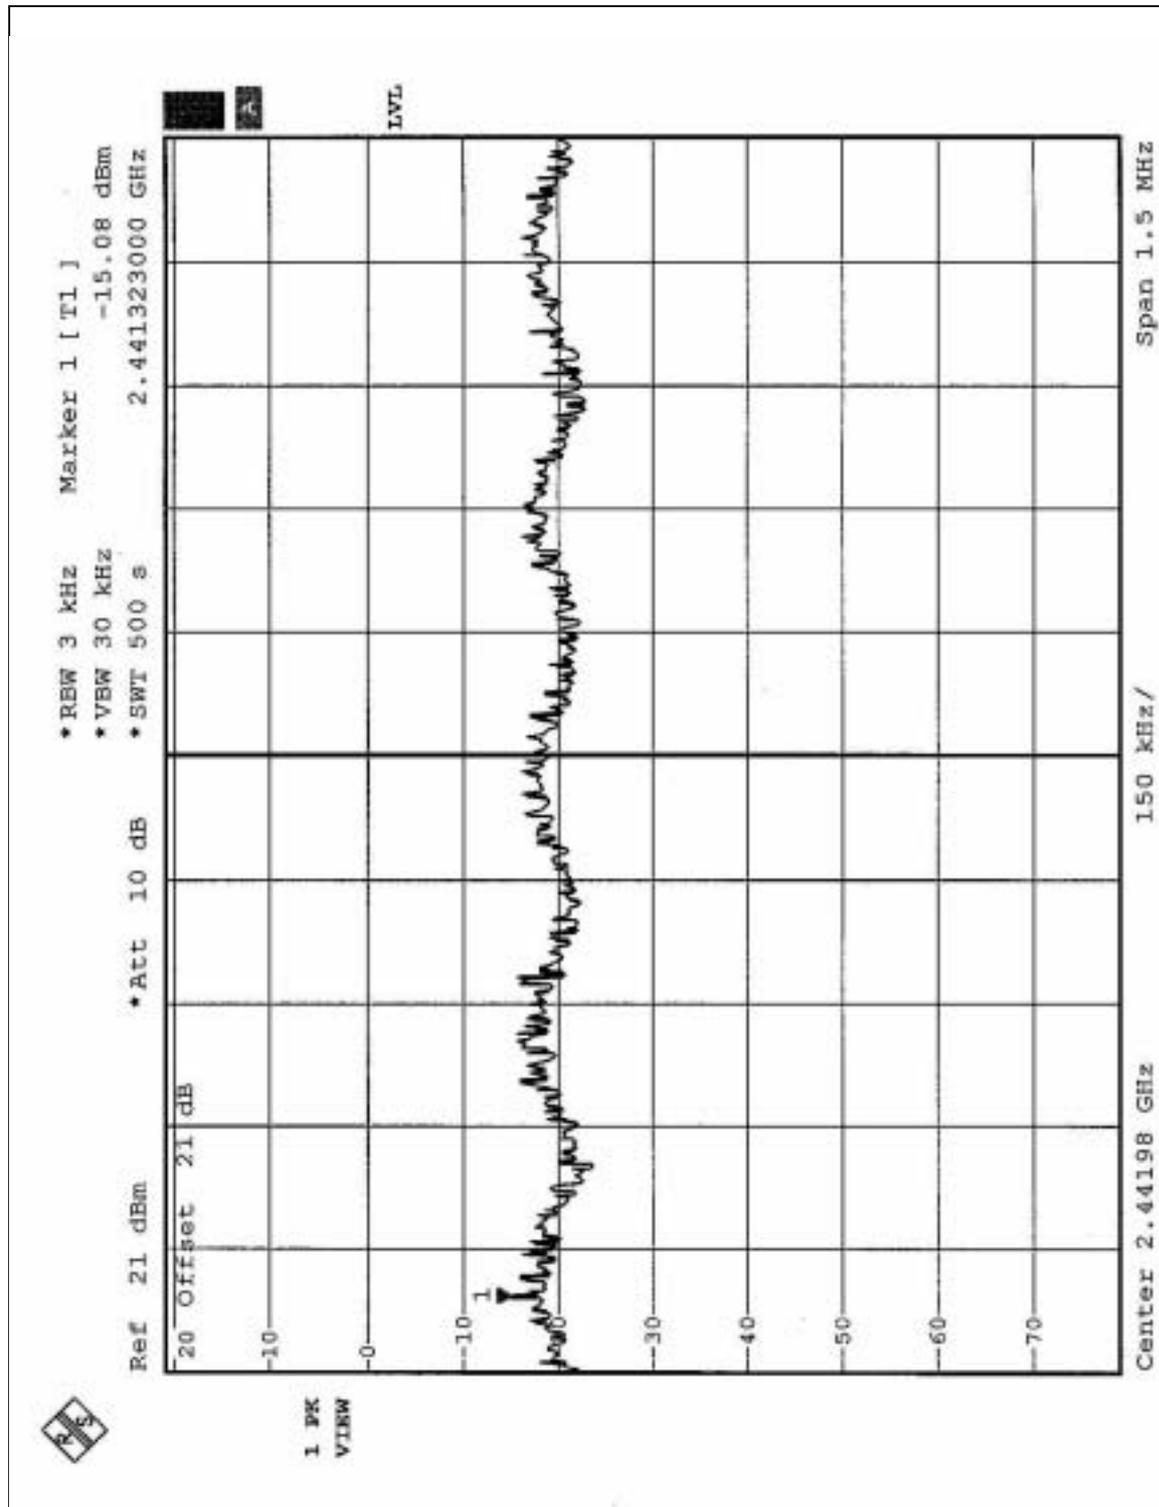



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 1MHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	May. 06, 2004

NOTE:

- 1.The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set RBW spectrum analyzer to 1 MHz and set VBW spectrum analyzer to 300 Hz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 EUT OPERATING CONDITION

Same as Item 4.3.5




4.6.5 TEST RESULTS - DSSS


The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (1): The band edge emission plot on the following first page shows 52.26dB delta between carrier maximum power and local maximum emission in restrict band (2.390GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 97.7dBuV/m, so the maximum field strength in restrict band is $97.7 - 52.26 = 45.44$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 55.89dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 99.8dBuV/m, so the maximum field strength in restrict band is $99.8 - 55.89 = 43.91$ dBuV/m which is under 54 dBuV/m limit.

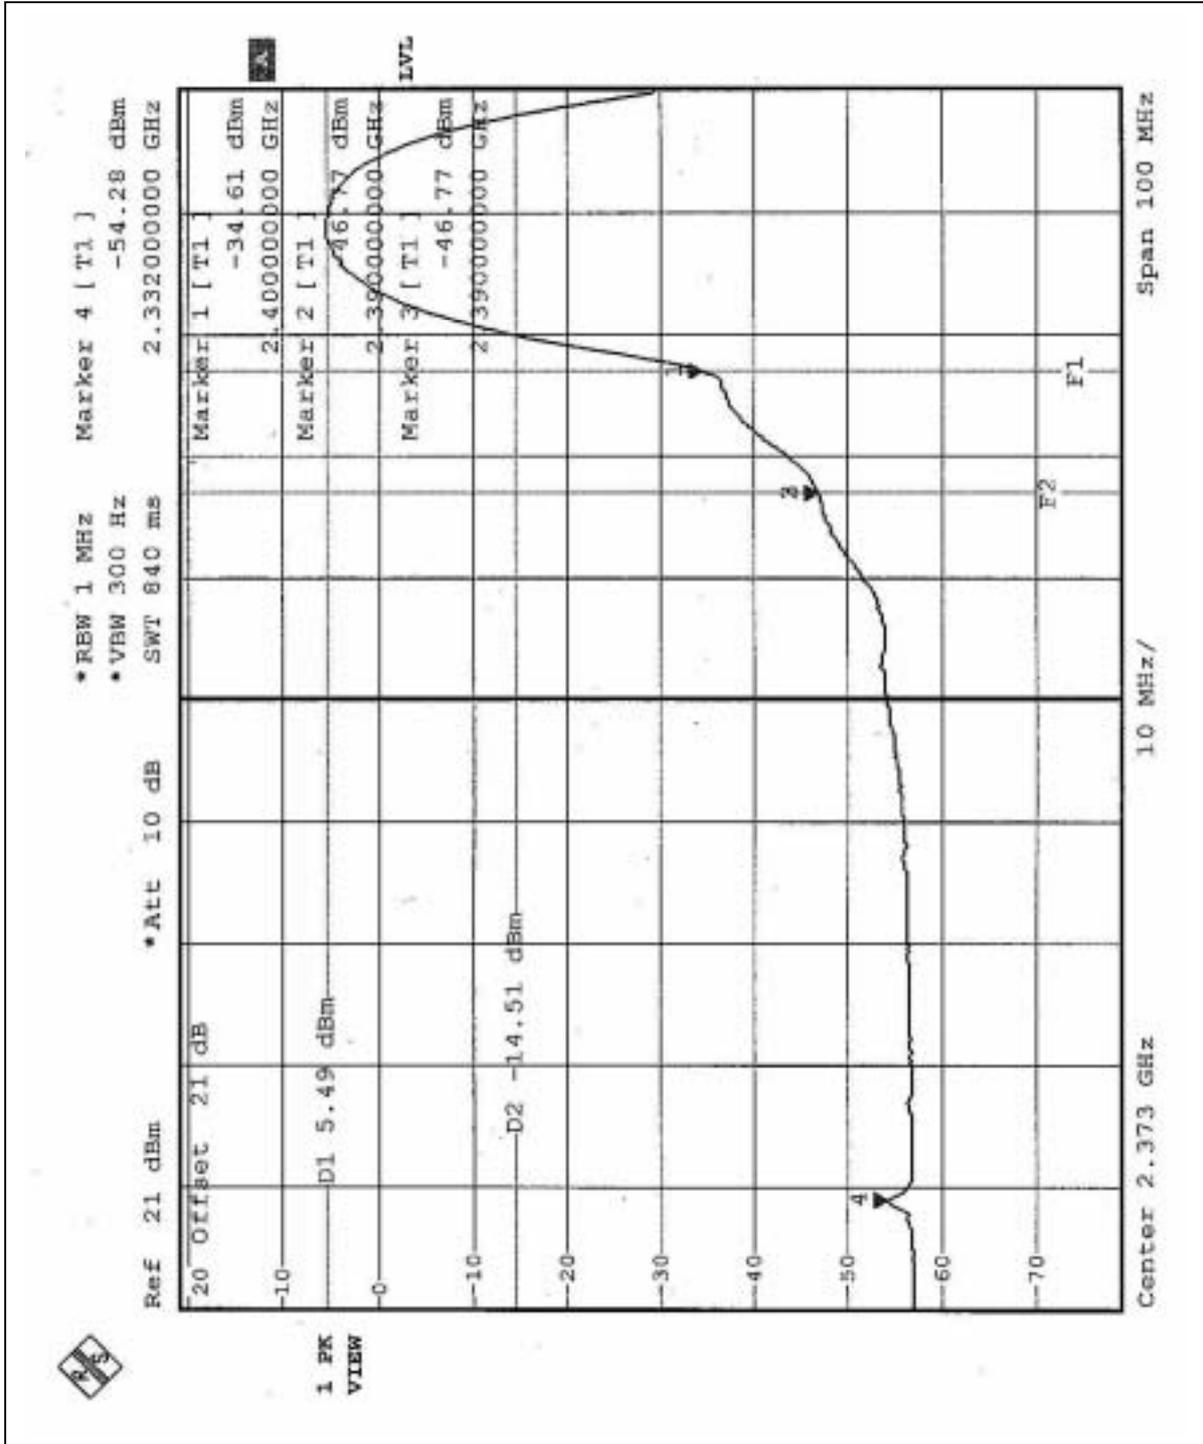

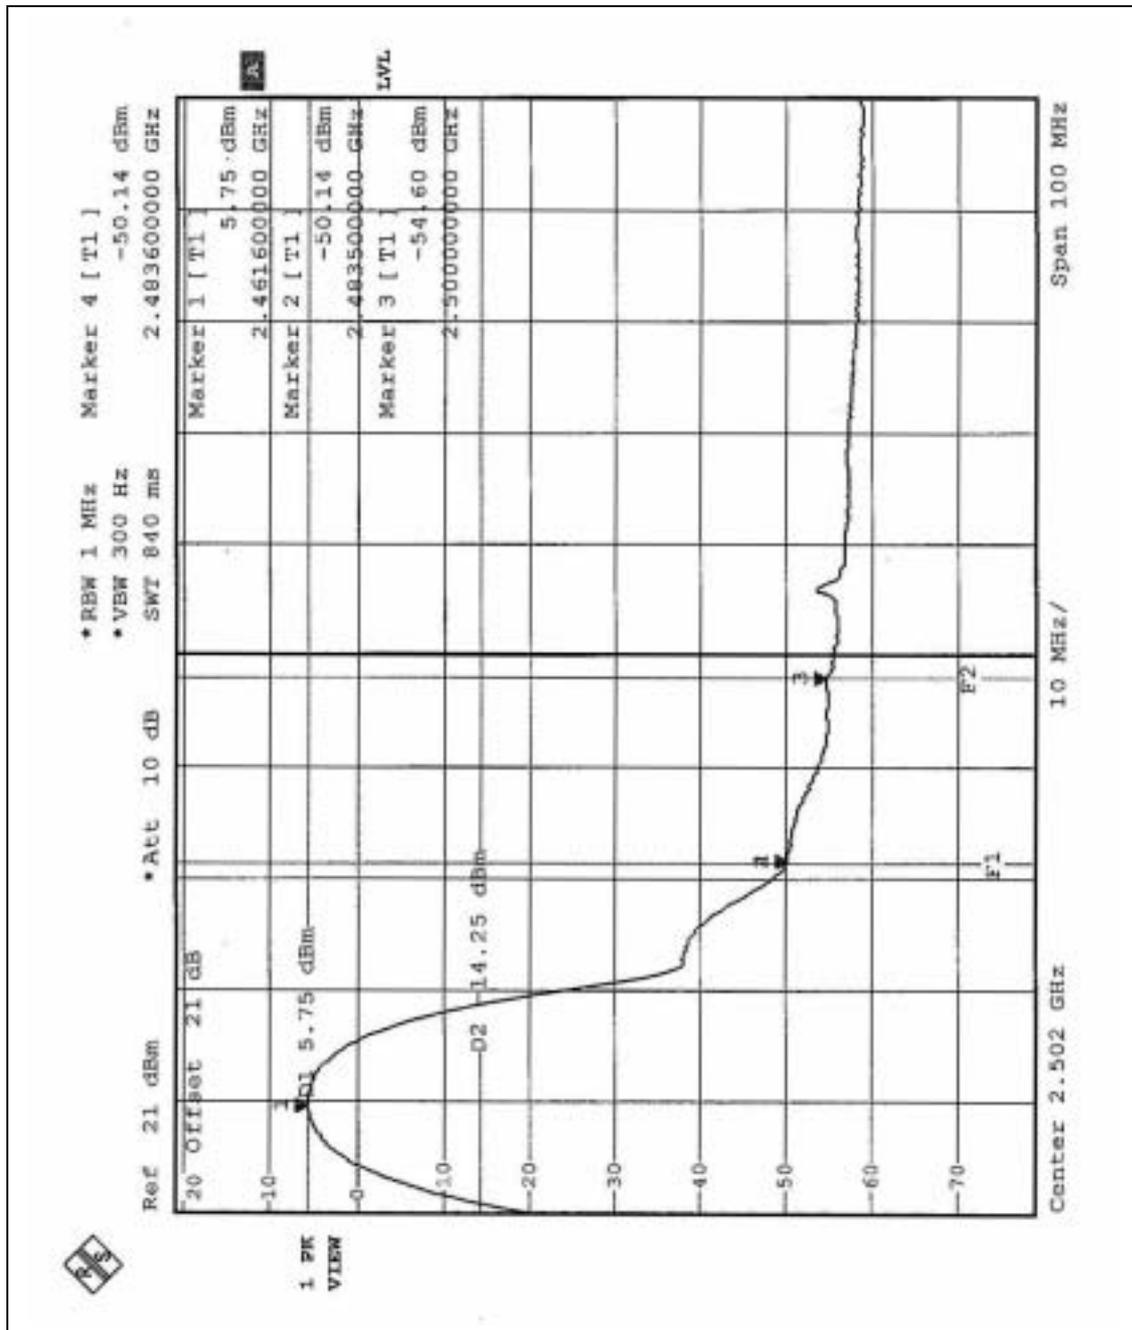




4.6.6 TEST RESULTS-OFDM


The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (1): The band edge emission plot on the following first page shows 48.12dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 91.4dBuV/m, so the maximum field strength in restrict band is $91.4-48.12=43.28$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 48.97dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 91.4dBuV/m, so the maximum field strength in restrict band is $91.4-48.97=42.43$ dBuV/m which is under 54 dBuV/m limit.

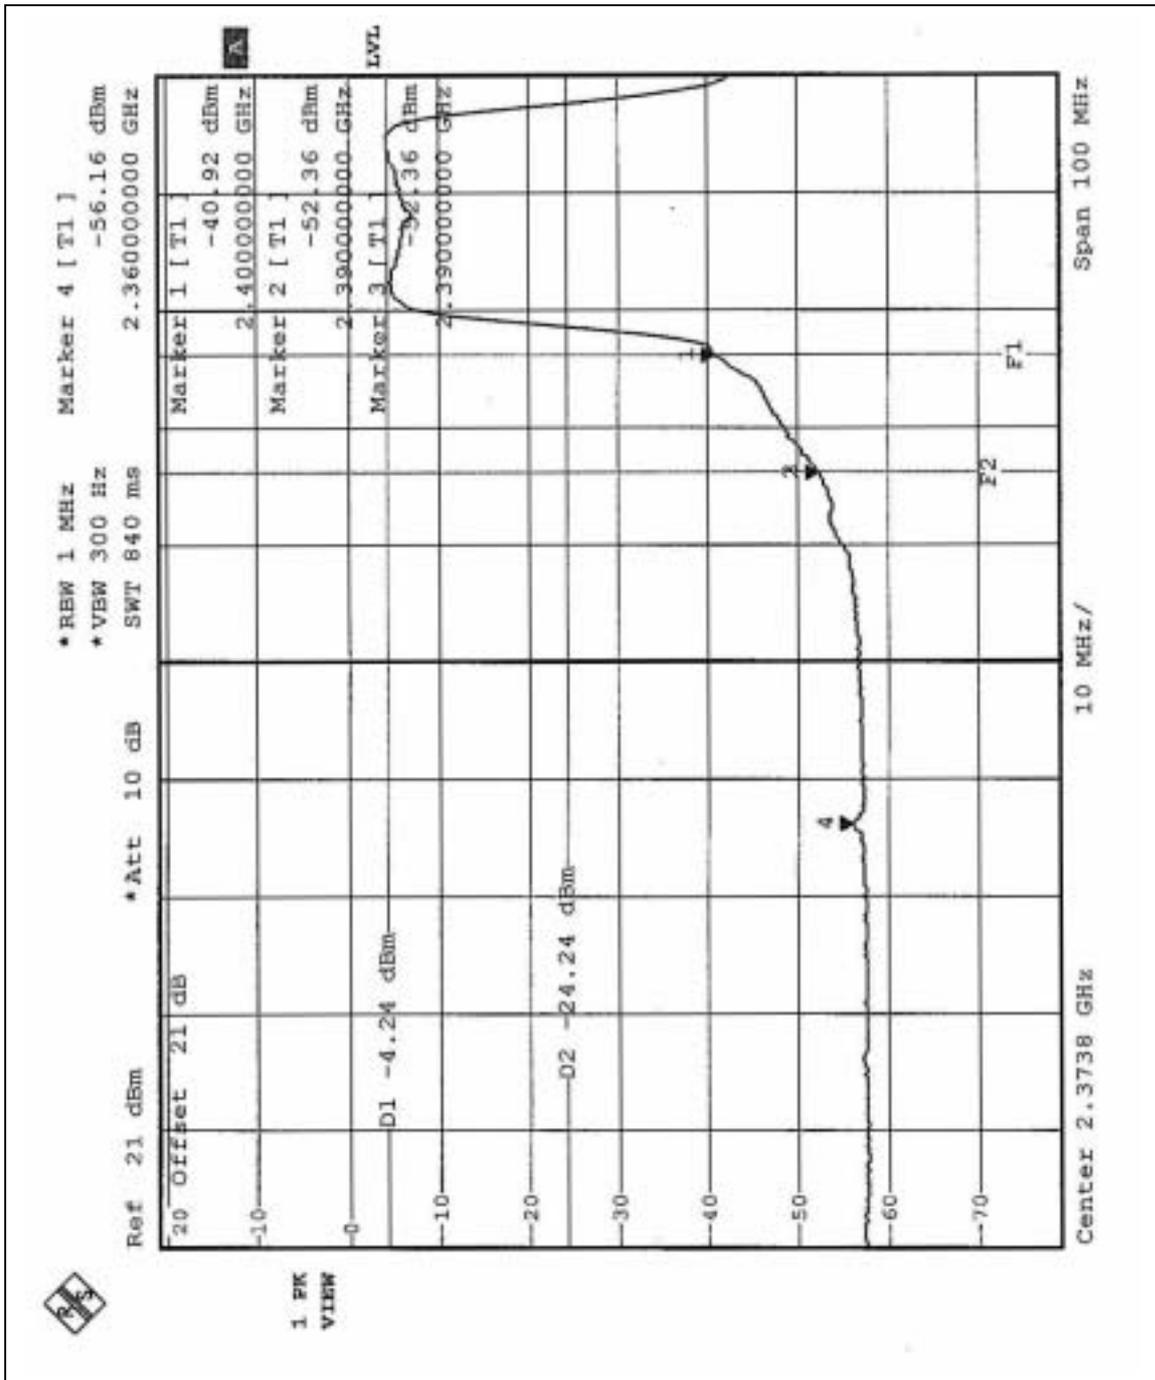

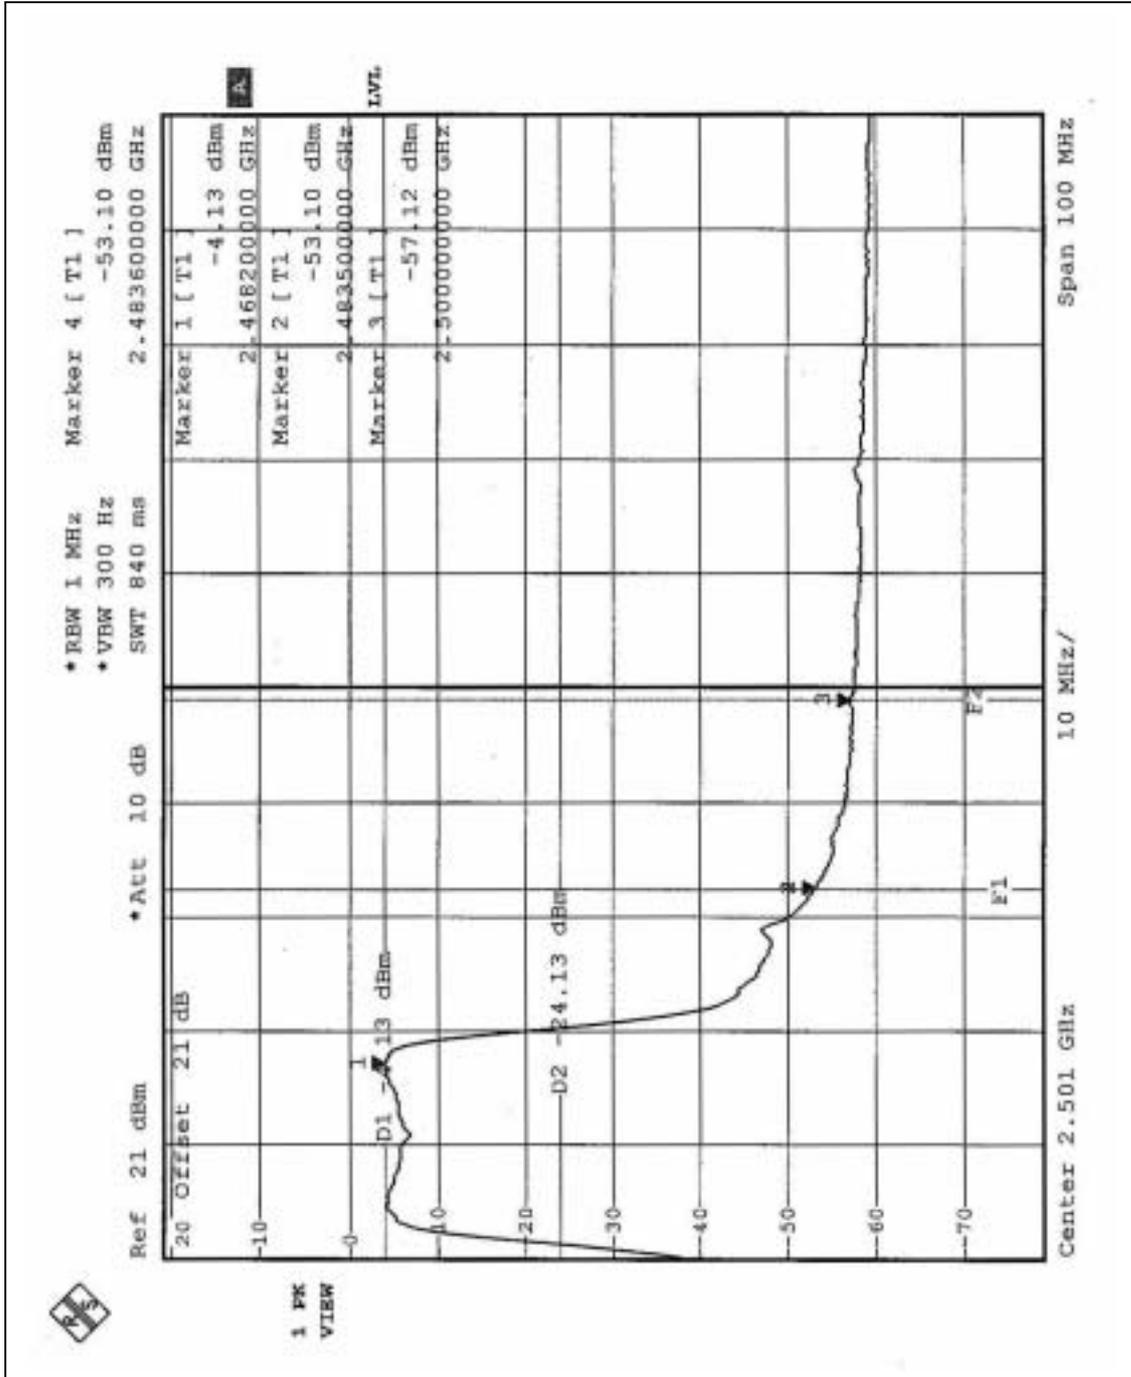



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna type used in this product is Non-Detachable strip antenna without connector. And the maximum Gain of this antenna is only 0 dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST



RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB, GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.