



SAR TEST REPORT

REPORT NO.: SA970825L08
MODEL NO.: WLI-UC-G300HP
RECEIVED: Aug. 25, 2008
TESTED: Feb. 03 ~ Feb. 04, 2009
ISSUED: Feb. 06, 2009

APPLICANT: Buffalo Inc.

ADDRESS: 4-15, Shibata Hondori 4-chome, Minami-ku,
Nagoya 457-8520, Japan

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 55 pages in total except Appendix. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

TABLE OF CONTENTS

1.	CERTIFICATION	3
2.	GENERAL INFORMATION	4
2.1	GENERAL DESCRIPTION OF EUT	4
2.2	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	5
2.3	GENERAL INFORMATION OF THE SAR SYSTEM.....	6
2.4	GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION	9
3.	DESCRIPTION OF SUPPORT UNITS	12
4.	DESCRIPTION OF TEST MODES AND CONFIGURATIONS.....	13
4.1.	DESCRIPTION OF ANTENNA LOCATION.....	13
4.2.	CHECK FOR SCAN RESOLUTION.....	14
4.3.	DESCRIPTION OF ASSESSMENT POSITION	15
4.4.	DESCRIPTION OF TEST MODE.....	17
4.5.	SUMMARY OF TEST RESULTS	21
4.6.	ENHANCED ENERGY COUPLING AT INCREASED SEPARATION DISTANCES ..	25
5.	TEST RESULTS.....	26
5.1	TEST PROCEDURES.....	26
5.2	MEASURED SAR RESULTS	28
5.3	SAR LIMITS	38
5.4	RECIPES FOR TISSUE SIMULATING LIQUIDS.....	39
5.5	TEST EQUIPMENT FOR TISSUE PROPERTY	42
6.	SYSTEM VALIDATION	43
6.1	TEST EQUIPMENT.....	43
6.2	TEST PROCEDURE	44
6.3	VALIDATION RESULTS.....	46
6.4	SYSTEM VALIDATION UNCERTAINTIES.....	47
7.	MEASUREMENT SAR PROCEDURE UNCERTAINTIES	48
7.1.	PROBE CALIBRATION UNCERTAINTY.....	48
7.2.	ISOTROPY UNCERTAINTY	49
7.3.	BOUNDARY EFFECT UNCERTAINTY.....	49
7.4.	PROBE LINEARITY UNCERTAINTY.....	50
7.5.	READOUT ELECTRONICS UNCERTAINTY.....	50
7.6.	RESPONSE TIME UNCERTAINTY	50
7.7.	INTEGRATION TIME UNCERTAINTY	51
7.8.	PROBE POSITIONER MECHANICAL TOLERANCE	52
7.9.	PROBE POSITIONING.....	52
7.10.	PHANTOM UNCERTAINTY	53
7.11.	DASY5 UNCERTAINTY BUDGET	54
8.	INFORMATION ON THE TESTING LABORATORIES	55
	APPENDIX A: TEST CONFIGURATIONS AND TEST DATA	
	APPENDIX B: BV ADT SAR MEASUREMENT SYSTEM	
	APPENDIX C: PHOTOGRAPHS OF SYSTEM VALIDATION	
	APPENDIX D: SYSTEM CERTIFICATE & CALIBRATION	



A D T

1. CERTIFICATION

PRODUCT: AirStation Wireless-N NFINITI HighPower Keychain
USB2.0 Adapter

MODEL: WLI-UC-G300HP

BRAND: BUFFALO

APPLICANT: Buffalo Inc.

TESTED: Feb. 03 ~ Feb. 04, 2009

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: **FCC Part 2 (Section 2.1093)**

FCC OET Bulletin 65, Supplement C (01-01)

RSS-102

The above equipment (model: WLI-UC-G300HP) have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , **DATE** : Feb. 06, 2009
Andrea Hsia / Specialist

TECHNICAL ACCEPTANCE : Long Chen , **DATE** : Feb. 06, 2009
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : Gary Chang , **DATE** : Feb. 06, 2009
Gary Chang / Assistant Manager



A D T

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	AirStation Wireless-N NFINITI HighPower Keychain USB2.0 Adapter	
MODEL NO.	WLI-UC-G300HP	
FCC ID	FDI-09102026-0	
POWER SUPPLY	5Vdc from host equipment	
CLASSIFICATION	Portable device, production unit	
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS, 64QAM, 16QAM, QPSK, BPSK for OFDM	
RADIO TECHNOLOGY	DSSS, OFDM	
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps Draft 802.11n: up to 300.0Mbps	
FREQUENCY RANGE	2412MHz ~ 2462MHz	
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz)	
CHANNEL FREQUENCIES UNDER TEST AND ITS CONDUCTED OUTPUT POWER	1TX	
	802.11b:	802.11g:
	127.644mW / Ch1: 2412MHz	252.930mW / Ch1: 2412MHz
	162.555mW / Ch6: 2437MHz	319.890mW / Ch6: 2437MHz
	159.588mW / Ch11: 2462MHz	255.859mW / Ch11: 2462MHz
	DRAFT 802.11n (20MHz):	DRAFT 802.11n (40MHz):
	319.154mW / Ch6: 2437MHz	319.890mW / Ch4: 2437MHz
	2TX	
DRAFT 802.11n (20MHz):	DRAFT 802.11n (40MHz):	
453.453mW / Ch6: 2437MHz	404.141mW / Ch4: 2437MHz	
AVERAGE SAR (1g)	1.020W/kg	
ANTENNA TYPE	Refer to note as below	
DATA CABLE	0.15m shielded USB cable without core	
I/O PORTS	USB	
ACCESSORY DEVICES	NA	



A D T

NOTE:

1. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers. The EUT supports 1tx transmitting and 2 TX transmitting mode. When EUT operates under 1 TX mode , only antenna 1 can transmit , antenna 2 is not working

MODULATION MODE	TX FUNCTION
802.11b	1TX
802.11g	1TX
Draft 802.11n (20MHz)	1TX / 2TX
Draft 802.11n (40MHz)	1TX / 2TX

2. The following antenna was provided to this EUT.

ANTENNA MODEL NAME	TYPE	GAIN	CABLE LOSS
C210-510521-A(SSR-83976)	Printed	2.2dBi	0.4dB

3. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.2 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to the specifications of the manufacturer, this product must comply with the requirements of the following standards:

FCC Part 2 (2.1093)

FCC OET Bulletin 65, Supplement C (01- 01)

RSS-102

IEEE 1528-2003

All test items have been performed and recorded as per the above standards.

2.3 GENERAL INFORMATION OF THE SAR SYSTEM

DASY5 (**software 5.0 Build 119**) consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY5 software defined. The DASY5 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

EX3DV3 ISOTROPIC E-FIELD PROBE

CONSTRUCTION	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
FREQUENCY	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
DIRECTIVITY	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
DYNAMIC RANGE	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
DIMENSIONS	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
APPLICATION	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

NOTE

1. The Probe parameters have been calibrated by the SPEAG. Please reference "APPENDIX D" for the Calibration Certification Report.
2. For frequencies above 800MHz, calibration in a rectangular wave-guide is used, because wave-guide size is manageable.
3. For frequencies below 800MHz, temperature transfer calibration is used because the wave-guide size becomes relatively large.

TWIN SAM V4.0

CONSTRUCTION

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, EN 62209-1 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

SHELL THICKNESS

2 ± 0.2mm

FILLING VOLUME

Approx. 25liters

DIMENSIONS

Height: 810mm; Length: 1000mm; Width: 500mm

SYSTEM VALIDATION KITS:

CONSTRUCTION

Symmetrical dipole with 1/4 balun enables measurement of feedpoint impedance with NWA matched for use near flat phantoms filled with brain simulating solutions. Includes distance holder and tripod adaptor

CALIBRATION

Calibrated SAR value for specified position and input power at the flat phantom in brain simulating solutions

FREQUENCY

2450MHz

RETURN LOSS

> 20dB at specified validation position

POWER CAPABILITY

> 100W (f < 1GHz); > 40W (f > 1GHz)

OPTIONS

Dipoles for other frequencies or solutions and other calibration conditions upon request

DEVICE HOLDER FOR SAM TWIN PHANTOM

CONSTRUCTION

The device holder for the mobile phone device is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\varepsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered. The device holder for the portable device makes up of the polyethylene foam. The dielectric parameters of material close to the dielectric parameters of the air.

DATA ACQUISITION ELECTRONICS

CONSTRUCTION

The data acquisition electronics (DAE4) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplex, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe is mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

2.4 GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION

The DASY5 post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the micro-volt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters:	- Frequency	F
	- Crest factor	Cf
Media parameters:	- Conductivity	σ
	- Density	ρ

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

V _i	=compensated signal of channel i	(i = x, y, z)
U _i	=input signal of channel I	(i = x, y, z)
Cf	=crest factor of exciting field	(DASY parameter)
dcp _i	=diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

V_i	= compensated signal of channel i	(i = x, y, z)
Norm_i	= sensor sensitivity of channel i $\mu\text{V}/(\text{V/m})^2$ for E-field Probes	(i = x, y, z)
ConvF	= sensitivity enhancement in solution	
a_{ij}	= sensor sensitivity factors for H-field probes	
F	= carrier frequency [GHz]	
E_i	= electric field strength of channel i in V/m	
H_i	= magnetic field strength of channel i in A/m	

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

SAR	= local specific absorption rate in mW/g
E_{tot}	= total field strength in V/m
σ	= conductivity in [mho/m] or [Siemens/m]
ρ	= equivalent tissue density in g/cm ³

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid. The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7 x 7 x 7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30 x 30 x 30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid (42875 points). In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is



A D T

calculated. This cube is moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

3. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP18L	29144041120	CXSMM01BRD02D 330

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE 1: All power cords of the above support units are non shielded (1.8m).

NOTE 2: This NOTEBOOK supports vertical and horizontal orientation ports.

4. DESCRIPTION OF TEST MODES AND CONFIGURATIONS

4.1. DESCRIPTION OF ANTENNA LOCATION

	
<p>ANTENNA LOCATION</p>	<p>ANTENNA LOCATION</p>
	
<p>ANTENNA DEGREE: 0</p>	<p>ANTENNA DEGREE: 90</p>
	
<p>ANTENNA DEGREE: 180</p>	

4.2. CHECK FOR SCAN RESOLUTION

COMPARE WITH DIFFERENT SCAN RESOLUTION

With EUT hold on the worst case configuration (802.11b / mid. channel) with no any change in position or setting, 2 scans with different resolutions are preformed to evaluate the impact on the SAR value. Test results are shown on P74~75 of Test Rpt-SAR (Appendix ABC) FDI-09102026-0_rev3

Test data as below:

MIDDLE CHANNEL IN TEST MODE 49	
SCAN RESOLUTION (mm)	SAR VALUE (W/kg)
2.5	1.00
5	1.02

CONCLUSION: No meaningful change detected.

4.3. DESCRIPTION OF ASSESSMENT POSITION


The following test configurations have been applied in this test report:




A: The front of the EUT face to the phantom with 5mm-separation distance.




B: The front of the EUT face to the phantom with 5mm-separation distance.

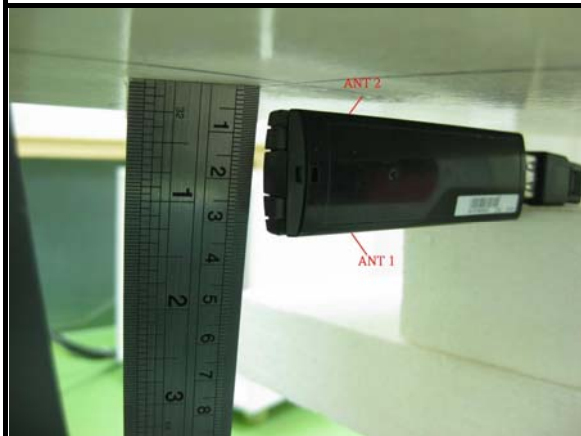

C: The left edge of the EUT face to the phantom with 5mm-separation distance.

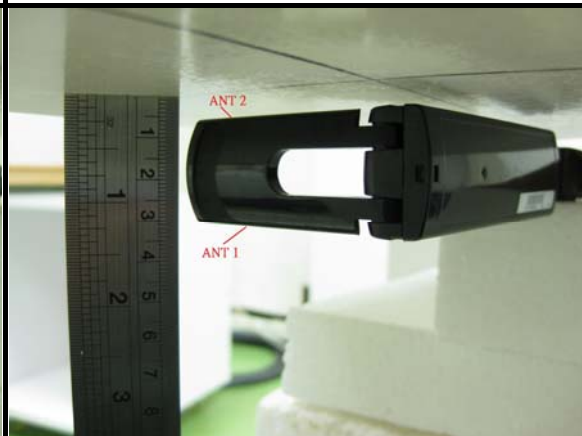

D: The left edge of the EUT face to the phantom with 5mm-separation distance.

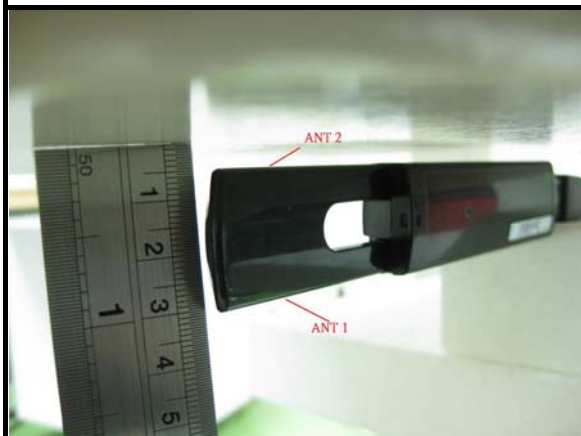

E: The left edge of the EUT face to the phantom with 5mm-separation distance.




F: The bottom of the EUT face to the phantom with 5mm-separation distance.



G: The bottom of the EUT face to the phantom with 5mm-separation distance.



H: The right edge of the EUT face to the phantom with 5mm-separation distance.

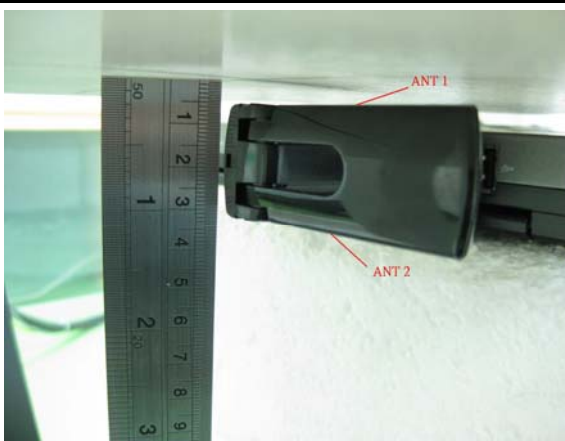

I: The right edge of the EUT face to the phantom with 5mm-separation distance.



J: The right edge of the EUT face to the phantom with 5mm-separation distance.



TEST SETUP PHOTO

NOTE: Position A ~ E: Tested with 11.6 inch USB cable. This cable does not affect device radiating characteristics and output power
 Position F ~ J: Tested with NB

4.4. DESCRIPTION OF TEST MODE

The EUT supports 1TX transmitting and 2 TX transmitting mode. When EUT operates under 1 TX mode, only antenna 1 can transmit, antenna 2 is not working. TX diversity function is not supported for this EUT .Therefore, Ant 1 will be transmitted under 1 TX test mode, Ant 1 and Ant 2 will be transmitted under 2 TX test mode.

Test tool is Ralink QAtest tool provided by client. It can control EUT to transmit continuously at specific channel, output power level, data rates and 100 % duty signal.

“Per KDB 248277, for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than $\frac{1}{4}$ dB higher than those measured at the lowest data rate.”

Comparing output power of all modulations and data rates of each mode can find the lowest data rates has max output power. Therefore, EUT will set under lowest data rates to test.

“Per KDB 447498, when the SAR procedures require multiple channels to be tested and the 1-g SAR for the highest output channel is less than 0.8 W/kg and peak SAR is less than 1.6w/kg , where the transmission band corresponding to all channels is \leq 100 MHz, testing for the other channels is not required.”

According to test data from table of section 4.5, except mode 49, 50, 55, 56, SAR value of highest output power channel for other modes are less than 0.8 W / kg and Peak SAR values are less than 1.6w/kg. Therefore, testing for other channels is not required except mode 49,50,55,56.

NOTE: The hot spot of mode 25~28 doesn't appear on location of antenna1. It appears on other position. This result has been double checked and confirmed to be correct.



A D T

TEST MODE	COMMUNICATION MODE	MODULATION	ASSESSMENT POSITION	TESTED CHANNEL	ANT. DEGREE	REMARK
1	802.11b	DBPSK	A	6	0	Cable
2	802.11g	BPSK		6		
3	Draft 802.11n (20MHz)-1TX	BPSK		6		
4	Draft 802.11n (40MHz)-1TX	BPSK		4		
5	Draft 802.11n (20MHz)-2TX	BPSK		6		
6	Draft 802.11n (40MHz)-2TX	BPSK		4		
7	802.11b	DBPSK	B	6	180	
8	802.11g	BPSK		6		
9	Draft 802.11n (20MHz)-1TX	BPSK		6		
10	Draft 802.11n (40MHz)-1TX	BPSK		4		
11	Draft 802.11n (20MHz)-2TX	BPSK		6		
12	Draft 802.11n (40MHz)-2TX	BPSK		4		
13	802.11b	DBPSK	C	6	0	
14	802.11g	BPSK		6		
15	Draft 802.11n (20MHz)-1TX	BPSK		6		
16	Draft 802.11n (40MHz)-1TX	BPSK		4		
17	Draft 802.11n (20MHz)-2TX	BPSK		6		
18	Draft 802.11n (40MHz)-2TX	BPSK		4		
19	802.11b	DBPSK	D	6	90	
20	802.11g	BPSK		6		
21	Draft 802.11n (20MHz)-1TX	BPSK		6		
22	Draft 802.11n (40MHz)-1TX	BPSK		4		
23	Draft 802.11n (20MHz)-2TX	BPSK		6		
24	Draft 802.11n (40MHz)-2TX	BPSK		4		



A D T

TEST MODE	COMMUNICATION MODE	MODULATION	ASSESSMENT POSITION	TESTED CHANNEL	ANT. DEGREE	REMARK
25	802.11b	DBPSK	E	6	180	Cable
26	802.11g	BPSK		6		
27	Draft 802.11n (20MHz)-1TX	BPSK		6		
28	Draft 802.11n (40MHz)-1TX	BPSK		4		
29	Draft 802.11n (20MHz)-2TX	BPSK		6		
30	Draft 802.11n (40MHz)-2TX	BPSK		4		
31	802.11b	DBPSK	F	6	0	
32	802.11g	BPSK		6		
33	Draft 802.11n (20MHz)-1TX	BPSK		6		
34	Draft 802.11n (40MHz)-1TX	BPSK		4		
35	Draft 802.11n (20MHz)-2TX	BPSK		6		
36	Draft 802.11n (40MHz)-2TX	BPSK		4		
37	802.11b	DBPSK	G	6	180	Notebook
38	802.11g	BPSK		6		
39	Draft 802.11n (20MHz)-1TX	BPSK		6		
40	Draft 802.11n (40MHz)-1TX	BPSK		4		
41	Draft 802.11n (20MHz)-2TX	BPSK		6		
42	Draft 802.11n (40MHz)-2TX	BPSK		4		
43	802.11b	DBPSK	H	6	0	
44	802.11g	BPSK		6		
45	Draft 802.11n (20MHz)-1TX	BPSK		6		
46	Draft 802.11n (40MHz)-1TX	BPSK		4		
47	Draft 802.11n (20MHz)-2TX	BPSK		6		
48	Draft 802.11n (40MHz)-2TX	BPSK		4		



A D T

TEST MODE	COMMUNICATION MODE	MODULATION	ASSESSMENT POSITION	TESTED CHANNEL	ANT. DEGREE	REMARK
49	802.11b	DBPSK	I	1, 6, 11	90	Notebook
50	802.11g	BPSK		1, 6, 11		
51	Draft 802.11n (20MHz)-1TX	BPSK		6		
52	Draft 802.11n (40MHz)-1TX	BPSK		4		
53	Draft 802.11n (20MHz)-2TX	BPSK		6		
54	Draft 802.11n (40MHz)-2TX	BPSK		4		
55	802.11b	DBPSK	J	1, 6, 11	180	
56	802.11g	BPSK		1, 6, 11		
57	Draft 802.11n (20MHz)-1TX	BPSK		6		
58	Draft 802.11n (40MHz)-1TX	BPSK		4		
59	Draft 802.11n (20MHz)-2TX	BPSK		6		
60	Draft 802.11n (40MHz)-2TX	BPSK		4		



A D T

4.5. SUMMARY OF TEST RESULTS

ITEM		1	2	3	ITEM		4
TEST MODE		802.11b	802.11g	DRAFT 802.11n (20MHz)	TEST MODE		DRAFT 802.11n (40MHz)
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)			CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)
6	2437 (Mid.)	0.488	0.489	0.270	4	2437 (Mid.)	0.658

ITEM		5		ITEM		6	
TEST MODE		DRAFT 802.11n (20MHz)		TEST MODE		DRAFT 802.11n (40MHz)	
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)		CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)	
6	2437 (Mid.)	0.376		4	2437 (Mid.)	0.319	

ITEM		7	8	9	ITEM		10
TEST MODE		802.11b	802.11g	DRAFT 802.11n (20MHz)	TEST MODE		DRAFT 802.11n (40MHz)
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)			CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)
6	2437 (Mid.)	0.377	0.256	0.177	4	2437 (Mid.)	0.225

ITEM		11		ITEM		12	
TEST MODE		DRAFT 802.11n (20MHz)		TEST MODE		DRAFT 802.11n (40MHz)	
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)		CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)	
6	2437 (Mid.)	0.141		4	2437 (Mid.)	0.171	

ITEM		13	14	15	ITEM		16
TEST MODE		802.11b	802.11g	DRAFT 802.11n (20MHz)	TEST MODE		DRAFT 802.11n (40MHz)
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)			CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)
6	2437 (Mid.)	0.100	0.122	0.063	4	2437 (Mid.)	0.066

ITEM		17		ITEM		18	
TEST MODE		DRAFT 802.11n (20MHz)		TEST MODE		DRAFT 802.11n (40MHz)	
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)		CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)	
6	2437 (Mid.)	0.356		4	2437 (Mid.)	0.326	



A D T

ITEM		19	20	21	ITEM		22
TEST MODE		802.11b	802.11g	DRAFT 802.11n (20MHz)	TEST MODE		DRAFT 802.11n (40MHz)
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)			CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)
6	2437 (Mid.)	0.108	0.099	0.071	4	2437 (Mid.)	0.067

ITEM		23	ITEM		24		
TEST MODE		DRAFT 802.11n (20MHz)		TEST MODE		DRAFT 802.11n (40MHz)	
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)		CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)	
6	2437 (Mid.)	0.570		4	2437 (Mid.)	0.613	

ITEM		25	26	27	ITEM		28
TEST MODE		802.11b	802.11g	DRAFT 802.11n (20MHz)	TEST MODE		DRAFT 802.11n (40MHz)
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)			CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)
6	2437 (Mid.)	0.150	0.106	0.073	4	2437 (Mid.)	0.089

ITEM		29	ITEM		30		
TEST MODE		DRAFT 802.11n (20MHz)		TEST MODE		DRAFT 802.11n (40MHz)	
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)		CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)	
6	2437 (Mid.)	0.549		4	2437 (Mid.)	0.678	

ITEM		31	32	33	ITEM		34
TEST MODE		802.11b	802.11g	DRAFT 802.11n (20MHz)	TEST MODE		DRAFT 802.11n (40MHz)
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)			CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)
6	2437 (Mid.)	0.167	0.116	0.097	4	2437 (Mid.)	0.120

ITEM		35	ITEM		36		
TEST MODE		DRAFT 802.11n (20MHz)		TEST MODE		DRAFT 802.11n (40MHz)	
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)		CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)	
6	2437 (Mid.)	0.172		4	2437 (Mid.)	0.181	



A D T

ITEM		37	38	39	ITEM		40
TEST MODE		802.11b	802.11g	DRAFT 802.11n (20MHz)	TEST MODE		DRAFT 802.11n (40MHz)
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)			CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)
6	2437 (Mid.)	0.501	0.364	0.300	4	2437 (Mid.)	0.298

ITEM		41	ITEM		42		
TEST MODE		DRAFT 802.11n (20MHz)		TEST MODE		DRAFT 802.11n (40MHz)	
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)		CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)	
6	2437 (Mid.)	0.316		4	2437 (Mid.)	0.294	

ITEM		43	44	45	ITEM		46
TEST MODE		802.11b	802.11g	DRAFT 802.11n (20MHz)	TEST MODE		DRAFT 802.11n (40MHz)
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)			CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)
6	2437 (Mid.)	0.693	0.601	0.392	4	2437 (Mid.)	0.416

ITEM		47	ITEM		48		
TEST MODE		DRAFT 802.11n (20MHz)		TEST MODE		DRAFT 802.11n (40MHz)	
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)		CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)	
6	2437 (Mid.)	0.277		4	2437 (Mid.)	0.265	

ITEM		49	50	51	ITEM		52
TEST MODE		802.11b	802.11g	DRAFT 802.11n (20MHz)	TEST MODE		DRAFT 802.11n (40MHz)
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)			CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)
1	2412 (Low)	0.797	0.641	-	1	2422 (Low)	-
6	2437 (Mid.)	1.020	0.826	0.623	4	2437 (Mid.)	0.713
11	2462 (High)	0.919	0.771	-	7	2452 (High)	-

ITEM		53	ITEM		54		
TEST MODE		DRAFT 802.11n (20MHz)		TEST MODE		DRAFT 802.11n (40MHz)	
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)		CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)	
6	2437 (Mid.)	0.540		4	2437 (Mid.)	0.564	



A D T

ITEM		55	56	57	ITEM		58
TEST MODE		802.11b	802.11g	DRAFT 802.11n (20MHz)	TEST MODE		DRAFT 802.11n (40MHz)
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)			CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)
1	2412 (Low)	0.751	0.640	-	1	2422 (Low)	-
6	2437 (Mid.)	0.976	0.853	0.563	4	2437 (Mid.)	0.730
11	2462 (High)	0.715	0.600	-	7	2452 (High)	-

ITEM		59	ITEM		60		
TEST MODE		DRAFT 802.11n (20MHz)		TEST MODE		DRAFT 802.11n (40MHz)	
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)		CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)	
6	2437 (Mid.)	0.579		4	2437 (Mid.)	0.625	

NOTE: The worst value has been marked by boldface.

4.6. ENHANCED ENERGY COUPLING AT INCREASED SEPARATION DISTANCES

INITIAL POSITION:

The probe tip is positioned at the peak SAR location of middle channel in test mode 4, 30, 37, 49 at a distance of one half the probe tip diameter from the phantom surface. Under this condition to get a single SAR value.

5mm INCREMENTS FROM INITIAL POSITION:

With the probe fixed at this location, the device is moved away from the phantom in 5mm / increments from the initial touching or minimum separation position. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

INITIAL POSITION			
CHAN.	FREQ. (MHz)	DEVICE TEST POSITION MODE	MEASURED 1g SAR (W/kg)
4	2437	11n 40 1TX Front-0 degree	1.390
4	2437	11n 40 2TX Left Edge-180 degree	1.450
6	2437	11b Bottom-180 degree	1.120
6	2437	11g Right Edge 90 degree	2.090
5mm INCREMENTS FROM INITIAL POSITION			
CHAN.	FREQ. (MHz)	DEVICE TEST POSITION MODE	MEASURED 1g SAR (W/kg)
4	2437	11n 40 1TX Front-0 degree	0.502
4	2437	11n 40 2TX Left Edge-180 degree	0.519
6	2437	11b Bottom-180 degree	0.386
6	2437	11g Right Edge 90 degree	0.768

RESULT: No Enhancement Energy Coupling observed.

5. TEST RESULTS

5.1 TEST PROCEDURES

The EUT plugged into the notebook. Use the software to control the EUT channel and transmission power. Then record the conducted power before the testing. Place the EUT to the specific test location. After the testing, must writing down the conducted power of the EUT into the report. The SAR value was calculated via the 3D spline interpolation algorithm that has been implemented in the software of DASY5 SAR measurement system manufactured and calibrated by SPEAG. According to the IEEE 1528 standards, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Verification of the power reference measurement
- Area scan
- Zoom scan
- Power reference measurement

The area scan was performed for the highest spatial SAR location. The zoom scan with 30mm x 30mm x 30mm volume was performed for SAR value averaged over 1g and 10g spatial volumes.



A D T

In the zoom scan, the distance between the measurement point at the probe sensor location (geometric center behind the probe tip) and the phantom surface is 4.0mm and maintained at a constant distance of ± 1.0 mm during a zoom scan to determine peak SAR locations. The distance is 4mm between the first measurement point and the bottom surface of the phantom. The secondary measurement point to the bottom surface of the phantom is with 9mm separation distance. The cube size is 7 x 7 x 7 points consist of 343 points and the grid space is 5mm.

The measurement time is 0.5s at each point of the zoom scan. The probe boundary effect compensation shall be applied during the SAR test. Because of the tip of the probe to the Phantom surface separated distances are longer than half a tip probe diameter.

In the area scan, the separation distance is 4mm between the each measurement point and the phantom surface. The scan size shall be included the transmission portion of the EUT. The measurement time is the same as the zoom scan. At last the reference power drift shall be less than $\pm 5\%$.



A D T

5.2 MEASURED SAR RESULTS

ENVIRONMENTAL CONDITION		Air Temperature : 21.4°C, Liquid Temperature : 20.8°C Humidity : 58%RH					
TESTED BY		Sam Onn			DATE		Feb. 03, 2009
CHAN.	FREQ. (MHz)	TEST MODE	CONDUCTED POWER (mW)		POWER DRIFT (%)	DEVICE TEST POSITION MODE	MEASURED 1g SAR (W/kg)
			BEGIN TEST	AFTER TEST			
6	2437 (Mid.)	802.11b	162.555	162.028	-0.32	1	0.488
6	2437 (Mid.)	802.11g	319.890	319.000	-0.28	2	0.489
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	319.154	318.168	-0.31	3	0.270
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	319.890	319.125	-0.24	4	0.658
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	453.453	452.651	-0.18	5	0.376
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	404.141	403.105	-0.26	6	0.319

NOTE:

1. Test configuration of each mode is described in section 4.3.
2. In this testing, the limit for General Population Spatial Peak averaged over 1g, **1.6 W/kg**, is applied.
3. Please see the Appendix A for the data.
4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.



A D T

ENVIRONMENTAL CONDITION		Air Temperature : 21.4°C, Liquid Temperature : 20.8°C Humidity : 58%RH						
TESTED BY		Sam Onn			DATE		Feb. 03, 2009	
CHAN.	FREQ. (MHz)	TEST MODE	CONDUCTED POWER (mW)		POWER DRIFT (%)	DEVICE TEST POSITION MODE	MEASURED 1g SAR (W/kg)	
			BEGIN TEST	AFTER TEST				
6	2437 (Mid.)	802.11b	162.555	161.680	-0.54	7	0.377	
6	2437 (Mid.)	802.11g	319.890	318.540	-0.42	8	0.256	
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	319.154	318.024	-0.35	9	0.177	
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	319.890	318.895	-0.31	10	0.225	
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	453.453	452.214	-0.27	11	0.141	
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	404.141	402.874	-0.31	12	0.171	

NOTE:

1. Test configuration of each mode is described in section 4.3.
2. In this testing, the limit for General Population Spatial Peak averaged over 1g, **1.6 W/kg**, is applied.
3. Please see the Appendix A for the data.
4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.



A D T

ENVIRONMENTAL CONDITION		Air Temperature : 21.4°C, Liquid Temperature : 20.8°C Humidity : 58%RH					
TESTED BY		Sam Onn			DATE		Feb. 03, 2009
CHAN.	FREQ. (MHz)	TEST MODE	CONDUCTED POWER (mW)		POWER DRIFT (%)	DEVICE TEST POSITION MODE	MEASURED 1g SAR (W/kg)
			BEGIN TEST	AFTER TEST			
6	2437 (Mid.)	802.11b	162.555	161.583	-0.60	13	0.100
6	2437 (Mid.)	802.11g	319.890	318.484	-0.44	14	0.122
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	319.154	317.859	-0.41	15	0.063
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	319.890	318.549	-0.42	16	0.066
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	453.453	452.122	-0.29	17	0.356
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	404.141	402.687	-0.36	18	0.326

NOTE:

1. Test configuration of each mode is described in section 4.3.
2. In this testing, the limit for General Population Spatial Peak averaged over 1g, **1.6 W/kg**, is applied.
3. Please see the Appendix A for the data.
4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.



A D T

ENVIRONMENTAL CONDITION		Air Temperature : 21.4°C, Liquid Temperature : 20.8°C Humidity : 58%RH					
TESTED BY		Sam Onn			DATE		Feb. 03, 2009
CHAN.	FREQ. (MHz)	TEST MODE	CONDUCTED POWER (mW)		POWER DRIFT (%)	DEVICE TEST POSITION MODE	MEASURED 1g SAR (W/kg)
			BEGIN TEST	AFTER TEST			
6	2437 (Mid.)	802.11b	162.555	161.248	-0.80	19	0.108
6	2437 (Mid.)	802.11g	319.890	317.688	-0.69	20	0.099
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	319.154	316.584	-0.81	21	0.071
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	319.890	317.214	-0.84	22	0.067
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	453.453	451.028	-0.53	23	0.570
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	404.141	402.183	-0.48	24	0.613

NOTE:

1. Test configuration of each mode is described in section 4.3.
2. In this testing, the limit for General Population Spatial Peak averaged over 1g, **1.6 W/kg**, is applied.
3. Please see the Appendix A for the data.
4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.



A D T

ENVIRONMENTAL CONDITION		Air Temperature : 21.4°C, Liquid Temperature : 20.8°C Humidity : 58%RH					
TESTED BY		Sam Onn			DATE		Feb. 03, 2009
CHAN.	FREQ. (MHz)	TEST MODE	CONDUCTED POWER (mW)		POWER DRIFT (%)	DEVICE TEST POSITION MODE	MEASURED 1g SAR (W/kg)
			BEGIN TEST	AFTER TEST			
6	2437 (Mid.)	802.11b	162.555	161.125	-0.88	25	0.150
6	2437 (Mid.)	802.11g	319.890	317.458	-0.76	26	0.106
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	319.154	316.541	-0.82	27	0.073
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	319.890	316.584	-1.03	28	0.089
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	453.453	450.543	-0.64	29	0.549
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	404.141	402.011	-0.53	30	0.678

NOTE:

1. Test configuration of each mode is described in section 4.3.
2. In this testing, the limit for General Population Spatial Peak averaged over 1g, **1.6 W/kg**, is applied.
3. Please see the Appendix A for the data.
4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.



A D T

ENVIRONMENTAL CONDITION		Air Temperature : 21.4°C, Liquid Temperature : 20.8°C Humidity : 58%RH						
TESTED BY		Sam Onn			DATE		Feb. 03, 2009	
CHAN.	FREQ. (MHz)	TEST MODE	CONDUCTED POWER (mW)		POWER DRIFT (%)	DEVICE TEST POSITION MODE	MEASURED 1g SAR (W/kg)	
			BEGIN TEST	AFTER TEST				
6	2437 (Mid.)	802.11b	162.555	161.021	-0.94	31	0.167	
6	2437 (Mid.)	802.11g	319.890	317.354	-0.79	32	0.116	
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	319.154	316.258	-0.91	33	0.097	
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	319.890	316.542	-1.05	34	0.120	
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	453.453	450.214	-0.71	35	0.172	
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	404.141	400.638	-0.87	36	0.181	

NOTE:

1. Test configuration of each mode is described in section 4.3.
2. In this testing, the limit for General Population Spatial Peak averaged over 1g, **1.6 W/kg**, is applied.
3. Please see the Appendix A for the data.
4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.



A D T

ENVIRONMENTAL CONDITION		Air Temperature : 21.4°C, Liquid Temperature : 20.8°C Humidity : 58%RH					
TESTED BY		Sam Onn			DATE		Feb. 03, 2009
CHAN.	FREQ. (MHz)	TEST MODE	CONDUCTED POWER (mW)		POWER DRIFT (%)	DEVICE TEST POSITION MODE	MEASURED 1g SAR (W/kg)
			BEGIN TEST	AFTER TEST			
6	2437 (Mid.)	802.11b	162.555	160.689	-1.15	37	0.501
6	2437 (Mid.)	802.11g	319.890	317.025	-0.90	38	0.364
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	319.154	316.258	-0.91	39	0.300
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	319.890	316.389	-1.09	40	0.298
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	453.453	450.025	-0.76	41	0.316
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	404.141	399.954	-1.04	42	0.294

NOTE:

1. Test configuration of each mode is described in section 4.3.
2. In this testing, the limit for General Population Spatial Peak averaged over 1g, **1.6 W/kg**, is applied.
3. Please see the Appendix A for the data.
4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.



A D T

ENVIRONMENTAL CONDITION		Air Temperature : 21.6°C, Liquid Temperature : 20.9°C Humidity : 61%RH					
TESTED BY		Sam Onn			DATE		Feb. 04, 2009
CHAN.	FREQ. (MHz)	TEST MODE	CONDUCTED POWER (mW)		POWER DRIFT (%)	DEVICE TEST POSITION MODE	MEASURED 1g SAR (W/kg)
			BEGIN TEST	AFTER TEST			
6	2437 (Mid.)	802.11b	162.555	160.584	-1.21	43	0.693
6	2437 (Mid.)	802.11g	319.890	316.548	-1.04	44	0.601
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	319.154	316.023	-0.98	45	0.392
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	319.890	316.158	-1.17	46	0.416
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	453.453	449.128	-0.95	47	0.277
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	404.141	399.589	-1.13	48	0.265

NOTE:

1. Test configuration of each mode is described in section 4.3.
2. In this testing, the limit for General Population Spatial Peak averaged over 1g, **1.6 W/kg**, is applied.
3. Please see the Appendix A for the data.
4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.



A D T

ENVIRONMENTAL CONDITION		Air Temperature : 21.6°C, Liquid Temperature : 20.9°C Humidity : 61%RH						
TESTED BY		Sam Onn			DATE		Feb. 04, 2009	
CHAN.	FREQ. (MHz)	TEST MODE	CONDUCTED POWER (mW)		POWER DRIFT (%)	DEVICE TEST POSITION MODE	MEASURED 1g SAR (W/kg)	
			BEGIN TEST	AFTER TEST				
1	2412 (Low)	802.11b	127.644	125.589	-1.61	49	0.797	
6	2437 (Mid.)	802.11b	162.555	159.897	-1.64	49	1.020	
11	2462 (High)	802.11b	159.588	157.124	-1.54	49	0.919	
1	2412 (Low)	802.11g	252.930	250.124	-1.11	50	0.641	
6	2437 (Mid.)	802.11g	319.890	316.254	-1.14	50	0.826	
11	2462 (High)	802.11g	255.859	253.254	-1.02	50	0.771	
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	319.154	315.486	-1.15	51	0.623	
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	319.890	315.554	-1.36	52	0.713	
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	453.453	448.854	-1.01	53	0.540	
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	404.141	399.258	-1.21	54	0.564	

NOTE:

1. Test configuration of each mode is described in section 4.3.
2. In this testing, the limit for General Population Spatial Peak averaged over 1g, **1.6 W/kg**, is applied.
3. Please see the Appendix A for the data.
4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.



A D T

ENVIRONMENTAL CONDITION		Air Temperature : 21.6°C, Liquid Temperature : 20.9°C Humidity : 61%RH						
TESTED BY		Sam Onn			DATE		Feb. 04, 2009	
CHAN.	FREQ. (MHz)	TEST MODE	CONDUCTED POWER (mW)		POWER DRIFT (%)	DEVICE TEST POSITION MODE	MEASURED 1g SAR (W/kg)	
			BEGIN TEST	AFTER TEST				
1	2412 (Low)	802.11b	127.644	125.476	-1.70	55	0.751	
6	2437 (Mid.)	802.11b	162.555	159.684	-1.77	55	0.976	
11	2462 (High)	802.11b	159.588	156.899	-1.68	55	0.715	
1	2412 (Low)	802.11g	252.930	249.856	-1.22	56	0.640	
6	2437 (Mid.)	802.11g	319.890	316.011	-1.21	56	0.853	
11	2462 (High)	802.11g	255.859	253.006	-1.12	56	0.600	
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	319.154	315.258	-1.22	57	0.563	
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	319.890	315.264	-1.45	58	0.730	
6	2437 (Mid.)	DRAFT 802.11n (20MHz)	453.453	448.325	-1.13	59	0.579	
4	2437 (Mid.)	DRAFT 802.11n (40MHz)	404.141	398.856	-1.31	60	0.625	

NOTE:

1. Test configuration of each mode is described in section 4.3.
2. In this testing, the limit for General Population Spatial Peak averaged over 1g, **1.6 W/kg**, is applied.
3. Please see the Appendix A for the data.
4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.



5.3 SAR LIMITS

HUMAN EXPOSURE	SAR (W/kg)	
	(GENERAL POPULATION / UNCONTROLLED EXPOSURE ENVIRONMENT)	(OCCUPATIONAL / CONTROLLED EXPOSURE ENVIRONMENT)
Spatial Average (whole body)	0.08	0.4
Spatial Peak (averaged over 1 g)	1.6	8.0
Spatial Peak (hands / wrists / feet / ankles averaged over 10 g)	4.0	20.0

NOTE:

1. This limits accord to 47 CFR 2.1093 – Safety Limit.
2. The EUT property been complied with the partial body exposure limit under the general population environment.

5.4 RECIPES FOR TISSUE SIMULATING LIQUIDS

For the measurement of the field distribution inside the SAM phantom, the phantom must be filled with 25 liters of tissue simulation liquid.

The following ingredients are used :

- **WATER-** Deionized water (pure H₂O), resistivity ≈ 16 M Ω - as basis for the liquid
- **SUGAR-** Refined sugar in crystals, as available in food shops - to reduce relative permittivity
- **SALT-** Pure NaCl - to increase conductivity
- **CELLULOSE-** Hydroxyethyl-cellulose, medium viscosity (75-125mPa.s, 2% in water, 20 $^{\circ}$ C),
CAS # 54290 - to increase viscosity and to keep sugar in solution
- **PRESERVATIVE-** Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS # 55965-84-9 - to prevent the spread of bacteria and molds
- **DGMBE-** Diethylenglycol-monobuthyl ether (DGMBE), Fluka Chemie GmbH, CAS # 112-34-5 - to reduce relative permittivity

THE RECIPES FOR 2450MHz SIMULATING LIQUID TABLE

INGREDIENT	HEAD SIMULATING LIQUID 2450MHz (HSL-2450)	MUSCLE SIMULATING LIQUID 2450MHz (MSL-2450)
Water	45%	69.83%
DGMBE	55%	30.17%
Salt	NA	NA
Dielectric Parameters at 22 $^{\circ}$ C	f= 2450MHz $\epsilon = 39.2 \pm 5\%$ $\sigma = 1.80 \pm 5\%$ S/m	f= 2450MHz $\epsilon = 52.7 \pm 5\%$ $\sigma = 1.95 \pm 5\%$ S/m

Testing the liquids using the Agilent Network Analyzer E8358A and Agilent Dielectric Probe Kit 85070D. The testing procedure is following as

1. Turn Network Analyzer on and allow at least 30min. warm up.
2. Mount dielectric probe kit so that interconnecting cable to Network Analyzer will not be moved during measurements or calibration.
3. Pour de-ionized water and measure water temperature ($\pm 1^\circ$).
4. Set water temperature in Agilent-Software (Calibration Setup).
5. Perform calibration.
6. Validate calibration with dielectric material of known properties (e.g. polished ceramic slab with $>8\text{mm}$ thickness $\epsilon' = 10.0$, $\epsilon'' = 0.0$). If measured parameters do not fit within tolerance, repeat calibration (± 0.2 for ϵ' : ± 0.1 for ϵ'').
7. Conductivity can be calculated from ϵ'' by $\sigma = \omega \epsilon_0 \epsilon'' = \epsilon'' f [\text{GHz}] / 18$.
8. Measure liquid shortly after calibration. Repeat calibration every hour.
9. Stir the liquid to be measured. Take a sample ($\sim 50\text{ml}$) with a syringe from the center of the liquid container.
10. Pour the liquid into a small glass flask. Hold the syringe at the bottom of the flask to avoid air bubbles.
11. Put the dielectric probe in the glass flask. Check that there are no air bubbles in front of the opening in the dielectric probe kit.
12. Perform measurements.
13. Adjust medium parameters in DASY5 for the frequencies necessary for the measurements ('Setup Config', select medium (e.g. Brain 900MHz) and press 'Option'-button.
14. Select the current medium for the frequency of the validation (e.g. Setup Medium Brain 900MHz).



A D T

FOR 2.4GHz BAND SIMULATING LIQUID

LIQUID TYPE		MSL-2450		
SIMULATING LIQUID TEMP.		20.8		
TEST DATE		Feb. 03, 2009		
TESTED BY		Sam Onn		
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)
2412.0	Permittivity (ϵ)	52.80	54.60	3.41
2422.0		52.70	54.50	3.42
2437.0		52.70	54.50	3.42
2450.0		52.70	54.30	3.04
2452.0		52.70	54.30	3.04
2462.0		52.70	54.30	3.04
2412.0	Conductivity (σ) S/m	1.91	1.96	2.62
2422.0		1.92	1.97	2.60
2437.0		1.94	1.99	2.58
2450.0		1.95	2.01	3.08
2452.0		1.95	2.01	3.08
2462.0		1.97	2.02	2.54
Dielectric Parameters Required at 22°C		f= 2450MHz $\epsilon= 52.7 \pm 5\%$ $\sigma= 1.95 \pm 5\% \text{ S/m}$		



A D T

LIQUID TYPE		MSL-2450		
SIMULATING LIQUID TEMP.		20.9		
TEST DATE		Feb. 04, 2009		
TESTED BY		Sam Onn		
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)
2412.0	Permittivity (ϵ)	52.80	54.40	3.03
2422.0		52.70	54.30	3.04
2437.0		52.70	54.30	3.04
2450.0		52.70	54.20	2.85
2452.0		52.70	54.20	2.85
2462.0		52.70	54.20	2.85
2412.0	Conductivity (σ) S/m	1.91	1.97	3.14
2422.0		1.92	1.98	3.13
2437.0		1.94	1.99	2.58
2450.0		1.95	2.02	3.59
2452.0		1.95	2.02	3.59
2462.0		1.97	2.03	3.05
Dielectric Parameters Required at 22°C		f= 2450MHz $\epsilon= 52.7 \pm 5\%$ $\sigma= 1.95 \pm 5\%$ S/m		

5.5 TEST EQUIPMENT FOR TISSUE PROPERTY

ITEM	NAME	BAND	TYPE	SERIES NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
1	Network Analyzer	Agilent	E5071C	MY46104190	Nov. 28, 2008	Nov. 27, 2009
2	Dielectric Probe	Agilent	85070D	US01440176	NA	NA

NOTE:

1. Before starting, all test equipment shall be warmed up for 30min.
2. The tolerance ($k=1$) specified by Agilent for general dielectric measurements, deriving from inaccuracies in the calibration data, analyzer drift, and random errors, are usually $\pm 2.5\%$ and $\pm 5\%$ for measured permittivity and conductivity, respectively. However, the tolerances for the conductivity is smaller for material with large loss tangents, i.e., less than $\pm 2.5\%$ ($k=1$). It can be substantially smaller if more accurate methods are applied.

6. SYSTEM VALIDATION

The system validation was performed in the flat phantom with equipment listed in the following table. Since the SAR value is calculated from the measured electric field, dielectric constant and conductivity of the body tissue, and the SAR is proportional to the square of the electric field. So, the SAR value will be also proportional to the RF power input to the system validation dipole under the same test environment. In our system validation test, 250mW RF input power was used.

6.1 TEST EQUIPMENT

ITEM	NAME	BAND	TYPE	SERIES NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
1	SAM Phantom	S & P	QD000 P40 CA	TP-1150	NA	NA
2	Signal Generator	Anritsu	68247B	984703	May 27, 2008	May 26, 2009
3	E-Field Probe	S & P	EX3DV3	3504	Jan. 21, 2009	Jan. 20, 2010
4	DAE	S & P	DAE	861	Sep. 22, 2008	Sep. 21, 2009
5	Robot Positioner	Staubli Unimation	NA	NA	NA	NA
6	Validation Dipole	S & P	D2450V2	737	Apr. 22, 2008	Apr. 21, 2009

NOTE: Before starting the measurement, all test equipment shall be warmed up for 30min.

6.2 TEST PROCEDURE

Before the system performance check, we need only to tell the system which components (probe, medium, and device) are used for the system performance check; the system will take care of all parameters. The dipole must be placed beneath the flat section of the SAM Twin Phantom with the correct distance holder in place. The distance holder should touch the phantom surface with a light pressure at the reference marking (little cross) and be oriented parallel to the long side of the phantom. Accurate positioning is not necessary, since the system will search for the peak SAR location, except that the dipole arms should be parallel to the surface. The device holder for mobile phones can be left in place but should be rotated away from the dipole.

The "Power Reference Measurement" and "Power Drift Measurement" jobs are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the amplifier output power. If it is too high (above ± 0.1 dB), the system performance check should be repeated; some amplifiers have very high drift during warm-up. A stable amplifier gives drift results in the DASY system below ± 0.02 dB.

The "Surface Check" job tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1 mm). In that case it is better to abort the system performance check and stir the liquid. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.) However, varying breaking indices of different liquid compositions might also influence the distance. If the indicated difference varies from the actual setting, the probe parameter "optical surface

The "Area Scan" job measures the SAR above the dipole on a plane parallel to the surface. It is used to locate the approximate location of the peak SAR. The proposed scan uses large grid spacing for faster measurement; due to the symmetric field, the peak detection is reliable. If a finer graphic is desired, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result.

The "Zoom Scan" job measures the field in a volume around the peak SAR value assessed in the previous "Area Scan" job (for more information see the application note on SAR evaluation).

About the validation dipole positioning uncertainty, the constant and low loss dielectric spacer is used to establish the correct distance between the top surface of the dipole and the bottom surface of the phantom, the error component introduced by the uncertainty of the distance between the liquid (i.e., phantom shell) and the validation dipole in the DASYS system is less than ± 0.1 mm.

$$SAR_{tolerance} [\%] = 100 \times \left(\frac{(a + d)^2}{a^2} - 1 \right)$$

As the closest distance is 10mm, the resulting tolerance $SAR_{tolerance} [\%]$ is <2%.



A D T

6.3 VALIDATION RESULTS

SYSTEM VALIDATION TEST OF SIMULATING LIQUID					
FREQUENCY (MHz)	REQUIRED SAR (mW/g)	MEASURED SAR (mW/g)	DEVIATION (%)	SEPARATION DISTANCE	TESTED DATE
MSL2450	12.80 (1g)	13.10	2.34	10mm	Feb. 03, 2009
MSL2450	12.80 (1g)	13.30	3.91	10mm	Feb. 04, 2009
TESTED BY	Sam Onn				

NOTE: Please see Appendix for the photo of system validation test.

6.4 SYSTEM VALIDATION UNCERTAINTIES

In the table below, the system validation uncertainty with respect to the analytically assessed SAR value of a dipole source as given in the IEEE 1528 standard is given. This uncertainty is smaller than the expected uncertainty for mobile phone measurements due to the simplified setup and the symmetric field distribution.

Error Description	Tolerance (±%)	Probability Distribution	Divisor	(C _i)		Standard Uncertainty (±%)		(v _i)
				(1g)	(10g)	(1g)	(10g)	
Measurement System								
Probe Calibration	5.50	Normal	1	1	1	5.50	5.50	∞
Axial Isotropy	4.70	Rectangular	$\sqrt{3}$	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.60	Rectangular	$\sqrt{3}$	0.7	0.7	3.88	3.88	∞
Boundary effects	1.00	Rectangular	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.70	Rectangular	$\sqrt{3}$	1	1	2.71	2.71	∞
System Detection Limits	1.00	Rectangular	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	0.30	Normal	1	1	1	0.30	0.30	∞
Response Time	0.80	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration Time	2.60	Rectangular	$\sqrt{3}$	1	1	1.50	1.50	∞
RF Ambient Noise	3.00	Rectangular	$\sqrt{3}$	1	1	1.73	1.73	∞
RF Ambient Reflections	3.00	Rectangular	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe Positioner	0.40	Rectangular	$\sqrt{3}$	1	1	0.23	0.23	∞
Probe Positioning	2.90	Rectangular	$\sqrt{3}$	1	1	1.67	1.67	∞
Max. SAR Eval.	1.00	Rectangular	$\sqrt{3}$	1	1	0.58	0.58	∞
Dipole Related								
Dipole Axis to Liquid Distance	2.00	Rectangular	$\sqrt{3}$	1	1	1.15	1.15	145
Input Power Drift	5.00	Rectangular	$\sqrt{3}$	1	1	2.89	2.89	∞
Phantom and Tissue parameters								
Phantom Uncertainty	4.00	Rectangular	$\sqrt{3}$	1	1	2.31	2.31	∞
Liquid Conductivity (target)	5.00	Rectangular	$\sqrt{3}$	0.64	0.43	1.85	1.24	∞
Liquid Conductivity (measurement)	4.12	Normal	1	0.64	0.43	2.64	1.77	∞
Liquid Permittivity (target)	5.00	Rectangular	$\sqrt{3}$	0.6	0.49	1.73	1.41	∞
Liquid Permittivity (measurement)	3.97	Normal	1	0.6	0.49	2.38	1.95	∞
Combined Standard Uncertainty						10.14	9.70	
Coverage Factor for 95%						Kp=2		
Expanded Uncertainty (K=2)						20.27	19.41	

NOTE: About the system validation uncertainty assessment, please reference the section 7.

7. MEASUREMENT SAR PROCEDURE UNCERTAINTIES

The assessment of spatial peak SAR of the hand handheld devices is according to IEEE 1528. All testing situation shall be met below these requirements.

- The system is used by an experienced engineer who follows the manual and the guidelines taught during the training provided by SPEAG.
- The probe has been calibrated within the requested period and the stated uncertainty for the relevant frequency bands does not exceed 4.8% (k=1).
- The validation dipole has been calibrated within the requested period and the system performance check has been successful.
- The DAE unit has been calibrated within the within the requested period.
- The minimum distance between the probe sensor and inner phantom shell is selected to be between 4 and 5mm.
- The operational mode of the DUT is CW, CDMA, FDMA or TDMA (GSM, DCS, PCS, IS136 and PDC) and the measurement/integration time per point is >500 ms.
- The dielectric parameters of the liquid have been assessed using Agilent 85070D dielectric probe kit or a more accurate method.
- The dielectric parameters are within 5% of the target values.
- The DUT has been positioned as described in section 3.

7.1. PROBE CALIBRATION UNCERTAINTY

SPEAG conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528, EN 62209-1, IEC 62209, etc.) under ISO17025. The uncertainties are stated on the calibration certificate. For the most relevant frequency bands, these values do not exceed 4.8% (k=1). If evaluations of other bands are performed for which the uncertainty exceeds these values, the uncertainty tables given in the summary have to be revised accordingly.

7.2. ISOTROPY UNCERTAINTY

The axial isotropy tolerance accounts for probe rotation around its axis while the hemispherical isotropy error includes all probe orientations and field polarizations. These parameters are assessed by SPEAG during initial calibration. In 2001, SPEAG further tightened its quality controls and warrants that the maximal deviation from axial isotropy is $\pm 0.20\text{dB}$, while the maximum deviation of hemispherical isotropy is $\pm 0.40\text{dB}$, corresponding to $\pm 4.7\%$ and $\pm 9.6\%$, respectively. A weighting factor of c_p equal to 0.5 can be applied, since the axis of the probe deviates less than 30 degrees from the normal surface orientation.

7.3. BOUNDARY EFFECT UNCERTAINTY

The effect can be estimated according to the following error approximation formula

$$SAR_{tolerance} [\%] = SAR_{be} [\%] \times \frac{(d_{be} + d_{step})^2}{2d_{step}} e^{-\frac{d_{be}}{\delta/2}}$$

$$d_{be} + d_{step} < 10\text{mm}$$

The parameter d_{be} is the distance in mm between the surface and the closest measurement point used in the averaging process; d_{step} is the separation distance in mm between the first and second measurement points; δ is the minimum penetration depth in mm within the head tissue equivalent liquids (i.e., $\delta = 13.95\text{mm}$ at 3GHz); SAR_{be} is the deviation between the measured SAR value at the distance d_{be} from the boundary and the wave-guide analytical value SAR_{ref} . DASY5 applies a boundary effect compensation algorithm according to IEEE 1528, which is possible since the axis of the probe never deviates more than 30 degrees from the normal surface orientation. $SAR_{be}[\%]$ is assessed during the calibration process and SPEAG warrants that the uncertainty at distances larger than 4mm is always less than 1%. In summary, the worst case boundary effect SAR tolerance[%] for scanning distances larger than 4mm is $< \pm 0.8\%$.

7.4. PROBE LINEARITY UNCERTAINTY

Field probe linearity uncertainty includes errors from the assessment and compensation of the diode compression effects for CW and pulsed signals with known duty cycles. This error is assessed using the procedure described in IEEE 1528. For SPEAG field probes, the measured difference between CW and pulsed signals, with pulse frequencies between 10Hz and 1kHz and duty cycles between 1 and 100, is $< \pm 0.20\text{dB}$ ($< \pm 4.7\%$).

7.5. READOUT ELECTRONICS UNCERTAINTY

All uncertainties related to the probe readout electronics (DAE unit), including the gain and linearity of the instrumentation amplifier, its loading effect on the probe, and accuracy of the signal conversion algorithm, have been assessed accordingly to IEEE 1528. The combination (root-sum-square RSS method) of these components results in an overall maximum error of $\pm 1.0\%$.

7.6. RESPONSE TIME UNCERTAINTY

The time response of the field probes is assessed by exposing the probe to a well-controlled electric field producing SAR larger than 2.0W/kg at the tissue medium surface. The signal response time is evaluated as the time required by the system to reach 90% of the expected final value after an on/of switch of the power source. Analytically, it can be expressed as:

$$SAR_{\text{tolerance}} [\%] = 100 \times \left(\frac{T_m}{T_m + \tau e^{-T_m/\tau} - \tau} - 1 \right)$$

where T_m is 500 ms, i.e., the time between measurement samples, and τ the time constant. The response time τ of SPEAG's probes is $< 5\text{ms}$. In the current implementation, DASY5 waits longer than 100 ms after having reached the grid point before starting a measurement, i.e., the response time uncertainty is negligible.

7.7. INTEGRATION TIME UNCERTAINTY

If the device under test does not emit a CW signal, the integration time applied to measure the electric field at a specific point may introduce additional uncertainties due to the discretization and can be assessed as follows

$$SAR_{tolerance} [\%] = 100 \times \sum_{all\ sub-frames} \frac{t_{frame}}{t_{integration}} \frac{slot_{idle}}{slot_{total}}$$

The tolerances for the different systems are given in Table 7.1, whereby the worst-case SAR_{tolerance} is 2.6%.

System	SAR _{tolerance} %
CW	0
CDMA*	0
WCDMA*	0
FDMA	0
IS-136	2.6
PDC	2.6
GSM/DCS/PCS	1.7
DECT	1.9
Worst-Case	2.6

TABLE 7.1

7.8. PROBE POSITIONER MECHANICAL TOLERANCE

The mechanical tolerance of the field probe positioner can introduce probe positioning uncertainties. The resulting SAR uncertainty is assessed by comparing the SAR obtained according to the specifications of the probe positioner with respect to the actual position defined by the geometric center of the probe sensors. The tolerance is determined as:

$$SAR_{tolerance} [\%] = 100 \times \frac{d_{ph}}{\delta/2}$$

The specified repeatability of the RX robot family used in DASY5 systems is $\pm 25\mu\text{m}$. The absolute accuracy for short distance movements is better than $\pm 0.1\text{mm}$, i.e., the $SAR_{tolerance} [\%]$ is better than 1.5% (rectangular).

7.9. PROBE POSITIONING

The probe positioning procedures affect the tolerance of the separation distance between the probe tip and the phantom surface as:

$$SAR_{tolerance} [\%] = 100 \times \frac{d_{ph}}{\delta/2}$$

where d_{ph} is the maximum deviation of the distance between the probe tip and the phantom surface. The optical surface detection has a precision of better than 0.2mm, resulting in an $SAR_{tolerance} [\%]$ of <2.9% (rectangular distribution). Since the mechanical detection provides better accuracy, 2.9% is a worst-case figure for DASY5 system.

7.10. PHANTOM UNCERTAINTY

The SAR measurement uncertainty due to SPEAG phantom shell production tolerances has been evaluated using

$$SAR_{tolerance} [\%] \cong 100 \times \frac{2d}{a}, \quad d \ll a$$

For a maximum deviation d of the inner and outer shell of the phantom from that specified in the CAD file of $\pm 0.2\text{mm}$, and a 10mm spacing a between source and tissue liquid, the calculated phantom uncertainty is $\pm 4.0\%$.



7.11. DASY5 UNCERTAINTY BUDGET

Error Description	Tolerance (±%)	Probability Distribution	Divisor	(C _i)		Standard Uncertainty (±%)		(v _i)
				(1g)	(10g)	(1g)	(10g)	
Measurement Equipment								
Probe Calibration	5.50	Normal	1	1	1	5.50	5.50	∞
Axial Isotropy	4.70	Rectangular	√3	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.60	Rectangular	√3	0.7	0.7	3.88	3.88	∞
Boundary effects	1.00	Rectangular	√3	1	1	0.58	0.58	∞
Linearity	4.70	Rectangular	√3	1	1	2.71	2.71	∞
System Detection Limits	1.00	Rectangular	√3	1	1	0.58	0.58	∞
Readout Electronics	0.30	Normal	1	1	1	0.30	0.30	∞
Response Time	0.80	Rectangular	√3	1	1	0.46	0.46	∞
Integration Time	2.60	Rectangular	√3	1	1	1.50	1.50	∞
RF Ambient Noise	3.00	Rectangular	√3	1	1	1.73	1.73	∞
RF Ambient Reflections	3.00	Rectangular	√3	1	1	1.73	1.73	∞
Probe Positioner	0.40	Rectangular	√3	1	1	0.23	0.23	∞
Probe Positioning	2.90	Rectangular	√3	1	1	1.67	1.67	∞
Max. SAR Eval.	1.00	Rectangular	√3	1	1	0.58	0.58	∞
Test Sample Related								
Device Positioning	0.89	Normal	1	1	1	0.89	0.89	9
Device Holder	3.60	Normal	1	1	1	3.60	3.60	5
Power Drift	5.00	Rectangular	√3	1	1	2.89	2.89	∞
Phantom and Tissue parameters								
Phantom Uncertainty	4.00	Rectangular	√3	1	1	2.31	2.31	∞
Liquid Conductivity (target)	5.00	Rectangular	√3	0.64	0.43	1.85	1.24	∞
Liquid Conductivity (measurement)	4.12	Normal	1	0.64	0.43	2.64	1.77	∞
Liquid Permittivity (target)	5.00	Rectangular	√3	0.6	0.49	1.73	1.41	∞
Liquid Permittivity (measurement)	3.97	Normal	1	0.6	0.49	2.38	1.95	∞
Combined Standard Uncertainty						10.73	10.32	
Coverage Factor for 95%						Kp=2		
Expanded Uncertainty (K=2)						21.46	20.65	

TABLE 7.2

The table 7.2: Worst-Case uncertainty budget for DASY5 assessed according to IEEE 1528. The budget is valid for the frequency range 300MHz ~ 3GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerable smaller.



8. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
GERMANY	TUV Rheinland
JAPAN	VCCI
NORWAY	NEMKO
CANADA	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
NETHERLANDS	Telefication
SINGAPORE	GOST-ASIA (MOU)
RUSSIA	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

---END---