

## **FCC CLASS B COMPLIANCE REPORT**

for

**FCC/MELLON      AUG 24 1998**  
Electromagnetic Emissions

of

### **Internal PCI Bus Modem Card**

**Trade Name** : Taicom  
**Model Number** : ML56PVS-MI  
**Serial Number** : Pre-production  
**FCC ID** :FELML56PVS

**Report Number** : 980155-F  
**Date** : July 17, 1998

Prepared for :

**TAICOM DATA SYSTEMS CO., LTD**  
**No.45, Wu-Kung 5 Rd., Wu-Ku Ind. Park,**  
**Taipei Hsien, Taiwan, R.O.C.**

Prepared by :

**C & C Laboratory Co., Ltd.**  
**1<sup>st</sup> Fl., No. 344, Fu Ching Street**  
**Taipei, Taiwan, R.O.C.**  
TEL: (02)27468584  
FAX: (02)27632154

**This report shall not be reproduced, except in full, without the written approval of**  
**C&C Laboratory Co., Ltd.**

## TABLE OF CONTENTS


DESCRIPTION	PAGE
VERIFICATION OF COMPLIANCE	3
GENERAL INFORMATION	4
SYSTEM DESCRIPTION	5
PRODUCT INFORMATION	6
SUPPORT EQUIPMENT	7
MEASUREMENT PRODEDURE & LIMIT (LINE CONDUCTED EMISSION TEST)	8
MEASUREMENT PRODEDURE & LIMIT (RADIATED EMISSION TEST)	10
SUMMARY DATA	13
APPENDIX 1 LETTER OF AGENT AUTHORIZATION	16
APPENDIX 2 LETTER OF MODIFICATION	18
APPENDIX 3 FCC ID LABEL & LOCATION	20
APPENDIX 4 BLOCK DIAGRAM/SCHEMATICS OF EUT	22
APPENDIX 5 USER'S MANUAL OF EUT	24
APPENDIX 6 TEST FACILITY	25
APPENDIX 7 TEST EQUIPMENT	27
APPENDIX 8 BLOCK DIAGRAM OF TEST SETUP	31
APPENDIX 9 PHOTOGRAPHS (TEST SETUP OF LINE CONDUCTED EMISSION TEST)	33
APPENDIX 10 PHOTOGRAPHS (TEST SETUP OF LINE RADIATED EMISSION TEST)	35
APPENDIX 11 PHOTOGRAPHS (EUT)	37

## VERIFICATION OF COMPLIANCE

**Equipment Under Test:** Internal PCI Bus Modem Card  
**Trade Name:** Taicom  
**Model Number:** ML56PVS-MI  
**Serial Number:** Pre-production  
**FCC ID:** FELML56PVS  
**Applicant:** Taicom Data Systems Co., Ltd.  
No.45, Wu-Kung 5 Rd., Wu-Ku Ind. Park,  
Taipei Hsien, Taiwan, R.O.C.  
**Type of Test:** FCC Class B  
**Measurement Procedure:** ANSI C63.4: 1992  
**File Number:** 980155-E  
**Date of test:** July 9, 1998  
**Tested by:** Garry Hsieh  
**Deviation:** None  
**Condition of Test Sample:** Normal

The above equipment was tested by C&C Laboratory, Taiwan for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, Subpart B and the measurement procedure according to ANSI C63.4, 1992. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.



Charles Wang / Director

## **GENERAL INFORMATION**

**Applicant:** Taicom Data Systems Co., Ltd.  
No.45, Wu-Kung 5 Rd., Wu-Ku Ind. Park,  
Taipei Hsien, Taiwan, R.O.C.

**Contact Person:** Mike Yu

**Phone Number:** (02)2299-1223

**Fax Number:** (02)2299-3514

**Manufacturer:** Taicom Data Systems Co., Ltd.  
No.45, Wu-Kung 5 Rd., Wu-Ku Ind. Park,  
Taipei Hsien, Taiwan, R.O.C.

**File Number:** 980155-F

**Date of Test:** July 9,1998

**Equipment Under Test:** Internal PCI Bus Modem Card

**Model Number:** ML56PVS-MI

**Serial Number:** Pre-production

**FCC ID:** FELML56PVS

**Type of Test:** FCC Class B

**Measurement Procedure:** ANSI C63.4: 1992

**Frequency Range:** 150kHz to 30MHz for Line Conducted Test  
30MHz to 1000MHz for Radiated Emission Test

## **SYSTEM DESCRIPTION**

### **EUT Test Program:**

1. EMI test program was loaded and executed in Windows mode.
2. Test program sequentially exercised all related I/O's of Host PC and sent "H" patterns to all applicable output ports of Host PC.
3. "COMM" communication program was executed to connecting each other of EUT and remote side modem
4. "H" patterns was received from the remote side modem and full the monitor screen.
5. Repeat 2 to 4. Test program is self-repeating throughout the test.

## PRODUCT INFORMATION

**Housing Type:** N/A  
**EUT Power Rating:** Receive power from PCI bus of PC  
**AC Power during Test:** 115VAC/60Hz  
**Power Supply Manufacturer:** N/A  
**Power Supply Manufacturer:** N/A  
**AC Power Cord Type:** Unshielded, 1.8m (To Host PC)  
**DC Power Cable Type:** N/A  
**OSC/Clock Frequencies :** 22.1184MHz

I/O PORT TYPES	Q'TY	TESTED WITH
1).MIC.	1	1
2).SPEAKER-OUT	1	1
3).PHONE PORT	1	1
4).LINE PORT	1	1

## SUPPORT EQUIPMENT

Equipment	Model #	Serial #	FCC ID	Manufacturer	Data Cable	Power Cord
Monitor	GDM-17SE2T	7145529	AK8GDM17SE2T	SONY	Shielded, 1.8m	Unshielded, 1.8m
Keyboard	6511-T	K6568070068P	JVP6511-T	Acer	Shielded, 1.2m	N/A
Printer	DJ-400C	MY8261C964	B94C2642X	HP	Shielded, 1.8m	AC I/P: Unshielded, 1.0m DC O/P: Unshielded, 2.0m
Microphone	AT-K40	N/A	N/A	Audio Technica	Unshielded, 1.55m	N/A
Modem	Super 2400	108693	DK467GSM24	GVC	Shielded, 1.8m	Unshielded, 2m
Mouse	M-S34	LZR80306570	DZL211029	Logitech	Shielded, 1.5m,	N/A
Speaker	DS-300	N/A	N/A	CAUSAN	Unshielded, 1.15m	N/A
Telephone	HT-930A	35653226	N/A	SAMPO	Unshielded, 1.5m	N/A
Host PC	VL Series 5/166	SG74903048	FCC DoC	HP	N/A	Unshielded, 1.8m
Notebook PC (Remote)	LIBRETTO 5DCTA	PA1237CA	N/A	Toshiba	Unshielded 10m	Battery

All the above equipment/cables were placed in worse case positions to maximize emission signals.

**Grounding:** Grounding was in accordance with the manufacturer's requirements and conditions for the intended use.

## **MEASUREMENT PROCEDURE (PRELIMINARY LINE CONDUCTED EMISSION TEST)**

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4: 1992 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4: 1992.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4: 1992.
- 4) The EUT received AC power through a Line Impedance Stabilization Network (LISN) which supplied power source of 115VAC/60Hz and was grounded to the ground plane.
- 5) All support equipment received power from a second LISN supplying power of 110VAC/60Hz.
- 6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum analyzer connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to analyzer and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the analyzer.
- 7) Analyzer scanned from 150kHz to 30MHz for emissions in each of the test modes. Analyzer settings were stated on the Measuring Instrument Settings page.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test:

**Mode(s):**

**1. Received**

- 10) After the preliminary scan, we found the following test mode(s) producing the highest emission level.

**Mode(s): 1**

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.



## MEASUREMENT PROCEDURE (FINAL LINE CONDUCTED EMISSION TEST)

- 1) EUT and support equipment was set up on the test bench as per step 10 of the preliminary test.
- 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in peak mode, then the emission signal was rechecked using a Quasi-Peak and Average detector.
- 3) The test data of the worst case condition(s) was reported on the Summary Data page.

### Data Sample:

Freq. MHz	Raw dBuV	Site CF dB	Corr'd dBuV	Q.P. Limit dBuV	Average Limit dBuV	Q.P. Margin dB	Average Margin dB	Note
x.xx	43.95	---	---	56	46	-12.05	-2.05	L1

Freq.	= Emission frequency in MHz
Raw dBuV	= Uncorrected Analyzer/Receiver Reading
Limit dBuV	= Limit stated in standard
Margin dB	= Reading in reference to limit
Note	= Current carrying line of reading
“---“	= The emission level complied with the Average limits, with at least 2dB margin limits, so no further recheck.

## LINE CONDUCTED EMISSION LIMIT

Frequency	Maximum RF	Line Voltage
	Q.P.	AVERAGE
150kHz-500kHz	66-56dBuV	56-46dBuV
500kHz-5MHz	56dBuV	46dBuV
5MHz-30MHz	60dBuV	50dBuV

## **MEASUREMENT PROCEDURE (PRELIMINARY RADIATED EMISSION TEST)**

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4: 1992 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4: 1992.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4: 1992.
- 4) The EUT received 115VAC/60Hz power source from the outlet socket under the turntable. All support equipment received 110VAC/60Hz power from another socket under the turntable.
- 5) The antenna was placed at some given distance away from the EUT as stated in ANSI C63.4: 1992. The antenna connected to the analyzer via a cable and at times a pre-amplifier would be used.
- 6) The analyzer quickly scanned from 30MHz to 1000MHz. Analyzer settings were stated on the Measuring Instrument Settings page. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 7) The following test mode(s) were scanned during the preliminary test:

### **Mode(s):**

#### **1. Received**

- 8) After the preliminary scan, we found the following test mode(s) producing the highest emission level.

### **Mode(s): 1**

Then, the EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for reference of final testing.

## MEASUREMENT PROCEDURE (FINAL RAIDATED EMISSION TEST)

- 1) EUT and support equipment were set up on the turntable as per step 8 of the preliminary test.
- 2) The analyzer scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 3) Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the limit in peak mode, then the emission signal was re-checked using a Quasi-Peak detector, and only Q.P. reading will record in this report.
- 4) The test data of the worst case condition(s) was reported on the Summary Data page.

### Data Sample:

Freq. MHz	Raw ( dB )	Corr. Factor (dBuV)	Emiss. Level dBuV/m	Limit dBuV/m	Margin dB	Det ector	Ant. Heig. (cm)	Turn Table ( ° )
xx.xx	14.0	7.2	21.2	30	-8.8	Peak	102	17.0

Freq.	= Emission frequency in MHz
Raw Data dB	= Uncorrected analyzer/Receiver reading
Corr. Factor dBuV	= Correction factors of antenna factor and cable loss
Emiss. Level dBuV/m	= Raw reading converted to dBuV and CF added
Limit dBuV/m	= Limit stated in standard
Margin dB	= Reading in reference to limit
Detector	= Detector function (Peak or Q.P.)
Ant. Heig.	= Antenna height above ground plane
Turn Table	= EUT placement in reference to antenna

## **RADIATED EMISSION LIMIT**

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m/ Q.P.)
30-230	10	30
230-1000	10	37

## SUMMARY DATA (LINE CONDUCTED TEST)

**Model Number** : ML56PVS-MI **Location:** Site#1

**Tested by** : Peter Chang

**Test Mode** : Received

**Test Results** : Passed

**Temperature** : 28°C **Humidity:** 60%RH

(The chart below shows the highest readings taken from the final data)


FREQ MHz	Peak RAW dBuV	Q.P. RAW dBuV	AVG RAW dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.175	52.3	---	---	64.7	54.7	-12.4	-2.4	L1
0.655	35.8	---	---	56.0	46.0	-20.2	-10.2	L1
9.131	41.2	---	---	60.0	50.0	-18.8	-8.8	L1
11.848	45.1	---	---	60.0	50.0	-14.9	-4.9	L1
24.230	45.5	---	---	60.0	50.0	-14.5	-4.5	L1
28.930	32.7	---	---	60.0	50.0	-27.3	-17.3	L1
0.198	49.5	---	---	63.7	53.7	-14.2	-4.2	L2
0.657	36.8	---	---	56.0	46.0	-19.2	-9.2	L2
1.116	38.0	---	---	56.0	46.0	-18.0	-8.0	L2
9.120	41.6	---	---	60.0	50.0	-18.4	-8.4	L2
11.846	38.9	---	---	60.0	50.0	-21.1	-11.1	L2
24.200	45.0	---	---	60.0	50.0	-15.0	-5.0	L2

L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

**\*\*NOTE: “---” denotes the emission level complied with the Average limit, with at least 2dB margin so no further re-check.**

# C&C Lab.(Taiwan) Cond. Test Site #1

CISPR 22 - Class B QP/AV Limit

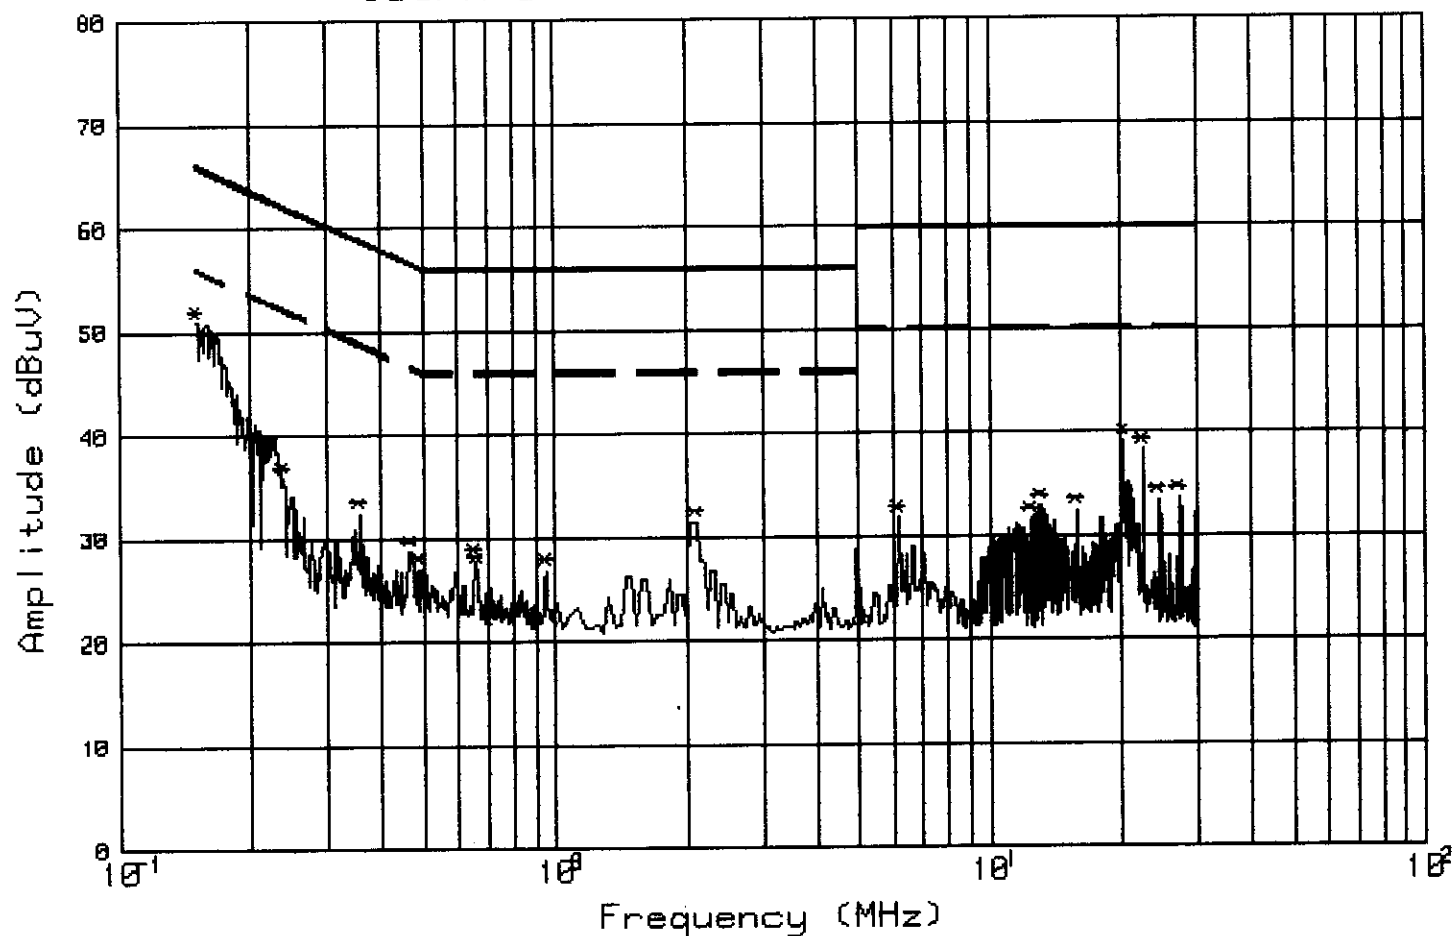

Model:ML56PVS-MI

No. 1 Test Date: 9 Jul 1998 19:43:18

Remark: (FCC)

Auto-Marking;RBW=VBW=10 KHz;SWEEP TIME AUTO

LISN= L1

Tester:Peter

Detector=Peak(R3261C S.P.A.)


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Total (dBuV)	AV.Lmt (dBuV)	Margin (dB)	Warning Mark
1	.151	50.8	-	50.8	55.9	-5.1	
2	.237	35.8	-	35.8	52.2	-16.4	
3	.356	32.4	-	32.4	48.8	-16.4	
4	.465	28.6	-	28.6	46.6	-18.0	
5	.490	27.0	-	27.0	46.2	-19.2	
6	.654	27.8	-	27.8	46.0	-18.2	
7	.660	27.0	-	27.0	46.0	-19.0	
8	.951	26.8	-	26.8	46.0	-19.2	
9	2.119	31.4	-	31.4	46.0	-14.6	
10	6.179	31.8	-	31.8	50.0	-18.2	
11	12.434	31.6	-	31.6	50.0	-18.4	
12	13.180	32.8	-	32.8	50.0	-17.2	
13	15.831	32.4	-	32.4	50.0	-17.6	
14	20.389	39.0	-	39.0	50.0	-11.0	
15	22.626	38.2	-	38.2	50.0	-11.8	
16	24.531	33.4	-	33.4	50.0	-16.6	

C&C Lab. Co. Ltd.

File No. 980455-5

# C&C Lab.(Taiwan) Cond. Test Site #1

## CISPR 22 - Class B QP/AV Limit

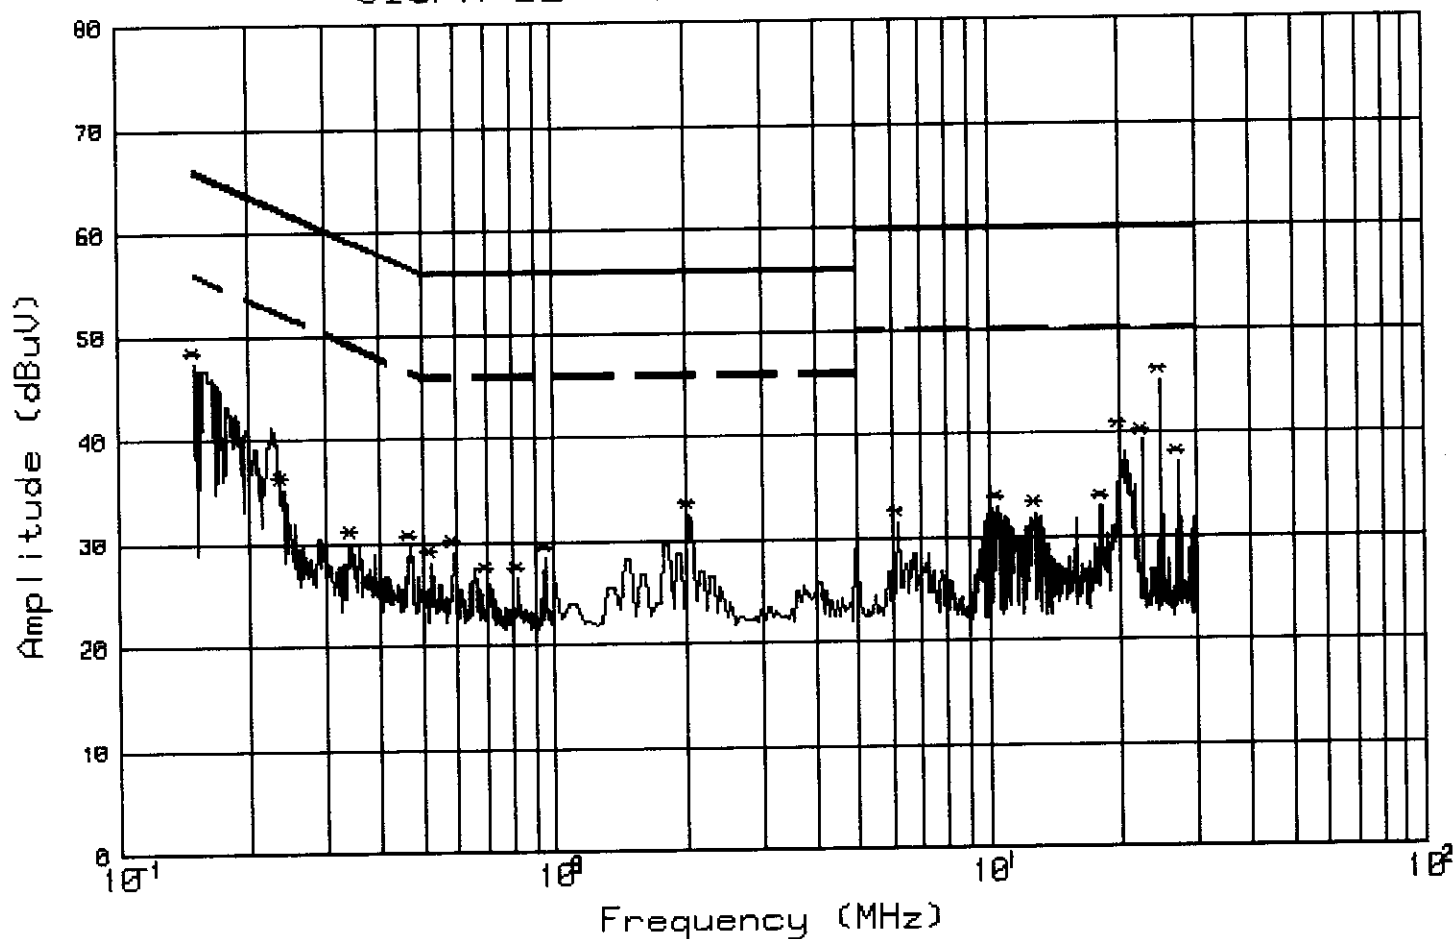

Model: ML56PVS-MI

No. 2

Test Date: 9 Jul 1998 19:44:39

Remark: (FCC)

Auto-Marking; RBW=VBW=10 KHz; SWEEP TIME AUTO

LISN= L2

Tester: Peter

Detector=Peak(R3261C S.P.A.)

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Total (dBuV)	AV.Lmt (dBuV)	Margin (dB)	Warning Mark
1	.150	47.4	-	47.4	56.0	-8.6	
2	.239	35.2	-	35.2	52.1	-16.9	
3	.341	30.0	-	30.0	49.2	-19.2	
4	.469	29.6	-	29.6	46.5	-16.9	
5	.522	28.0	-	28.0	46.0	-18.0	
6	.587	29.0	-	29.0	46.0	-17.0	
7	.703	26.4	-	26.4	46.0	-19.6	
8	.828	26.4	-	26.4	46.0	-19.6	
9	.953	28.4	-	28.4	46.0	-17.6	
10	2.036	32.4	-	32.4	46.0	-13.6	
11	6.137	31.4	-	31.4	50.0	-18.6	
12	10.404	32.8	-	32.8	50.0	-17.2	
13	12.807	32.2	-	32.2	50.0	-17.8	
14	18.110	32.8	-	32.8	50.0	-17.2	
15	19.933	39.8	-	39.8	50.0	-10.2	

## SUMMARY DATA (RADIATED EMISSION TEST)

**Model Number** : ML56PVS-MI                      **Location** : Site#1

**Tested by** : Peter Chang                      **Distance** : 10 m

**Test Mode** : Received

**Test Results** : Passed                      **Antt. Polar .** : Vertical

**Temperature** : 31°C                      **Humidity** : 63%RH

(The chart below shows the highest readings taken from the final data)

Freq. (MHz)	Raw Data ( dB )	Corr. Factor (dBuV)	Emiss. Level ( dBuV/m )	Limits	Margin (dB)	Det ector	Ant. Heig. ( cm )	Turn Table ( ° )
55.11	12.2	6.9	19.1	30.0	-10.9	PK	100.0	65.6
121.93	6.5	14.6	21.1	30.0	-8.9	PK	100.0	313.1
173.94	11.1	13.9	25.0	30.0	-5.0	PK	100.0	276.5
192.20	8.4	13.3	21.7	30.0	-8.3	PK	100.0	360.0
218.70	7.1	13.6	20.7	30.0	-9.3	PK	100.0	108.0
335.80	13.1	18.3	31.4	37.0	-5.6	PK	374.4	240.6



## SUMMARY DATA (RADIATED EMISSION TEST)

**Model Number** : ML56PVS-MI **Location** : Site#1

**Tested by** : Peter Chang **Distance** : 10 m

**Test Mode** : Received

**Test Results** : Passed **Antt. Polar .** : Horizontal

**Temperature** : 31°C **Humidity** : 63%RH

(The chart below shows the highest readings taken from the final data)

Freq. (MHz)	Raw Data ( dB )	Corr. Factor (dBuV)	Emiss. Level ( dBuV/m )	Limits	Margin (dB)	Det ector	Ant. Heig. ( cm )	Turn Table ( ° )
55.29	9.4	8.2	17.6	30.0	-12.4	PK	400.0	52.3
130.61	10.3	13.8	24.1	30.0	-5.9	PK	400.0	245.6
179.10	7.7	12.7	20.4	30.0	-9.6	PK	400.0	184.4
190.93	8.0	12.7	20.7	30.0	-9.3	PK	400.0	216.2
203.40	9.6	12.8	22.4	30.0	-7.6	PK	400.0	27.5
449.20	9.7	22.3	32.0	37.0	-5.0	PK	315.7	322.1

## **APPENDIX 1**

### **LETTER OF AGENT AUTHORIZATION**



台康資訊股份有限公司

TAICOM DATA SYSTEMS CO., LTD.

台北縣五股工業區五工五路45號

No.45, Wu-Kung 5 Rd, Wu-Ku Ind. Park, Taipei Hsien, Taiwan, R.O.C.

TEL: 886-2-299-1222 FAX: 886-2-299-0140 · 299-3514


Federal Communications Commission  
Authorization and Evaluation Division  
7435 Oakland Mills Road  
Columbia, MD 21046  
U.S.A

Gentlemen,

We the undersigned, hereby authorized C&C Laboratory, Taiwan to act on our behalf in all matters relating to applications for equipment authorizations, including the signing of all documents relating to these matters. Any and all acts carried out by C&C Laboratory, Taiwan on our behalf shall have the same effect as acts of our own.

The applicant certifies that, in the case of an individual applicant is not subject to a denial of federal benefits, that includes FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853 (a) , in the case of a non-individual applicant (e.g. corporation, partnership or other unincorporated association) , no party to the application is subject to a denial of federal benefits, that includes FCC benefits, pursuant to that section.

Sincerely yours,

  
\_\_\_\_\_  
Mike Yu/ Manager

## **APPENDIX 2**

### **LETTER OF MODIFICATION**

## **APPENDIX 6**

### **TEST FACILITY**

## TEST FACILITY

**Location:** No. 15, 14 Line, Chin Twu Chi, Lu Chu Hsiang, Taoyuan, Taiwan, R.O.C.

**Description:** There are two 3/10m open area test sites and two line conducted labs for final test, and one 3/10m open area test site for engineering lab. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 1992 and CISPR 22/EN 55022 requirements.

**Site Filing:** A site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.

Registration also was made with Voluntary Control Council for Interference (VCCI).


**Site Accreditation:** Accredited by NEMKO (Authorization #: ELA 124) for EMC & A2LA (Certificate #: 824.01) for Emission

Also accredited by BCIQ for the product category of Information Technology Equipment.

**Instrument Tolerance:** All measuring equipment is in accord with ANSI C63.4 and CISPR 22 requirements that meet industry regulatory agency and accreditation agency requirement.

**Ground Plane:** Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna. It has no holes or gaps having longitudinal dimensions larger than one-tenth of a wavelength at the highest frequency of measurement up to 1GHz.

**Site #1 & Site #3 Line Conducted Test Site:** Vertical ground plane (2.2m x 2.2m)  
Horizontal ground plane (2.5m x 2.5m)



**THE AMERICAN  
ASSOCIATION  
FOR LABORATORY  
ACCREDITATION**

## **ACCREDITED LABORATORY**

A2LA has accredited

**C & C LABORATORY CO., LTD**  
**Taoyuan, Taiwan, R.O.C**

for technical competence in the field of

### **Electrical (EMC) Testing**

The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC Guide 25-1990 "General Requirements for the Competence of Calibration and Testing Laboratories" (equivalent to relevant requirements of the ISO 9000 series of standards) and any additional program requirements in the identified field of testing.

Presented this 7<sup>th</sup> day of November, 1997.



President  
For the Accreditation Council  
Certificate Number 824.01  
Valid to January 31, 2000

For tests or types of tests to which this accreditation applies, please refer to the  
laboratory's Electrical (EMC) Scope of Accreditation  
(REVISED)



## American Association for Laboratory Accreditation

### SCOPE OF ACCREDITATION TO ISO/IEC GUIDE 25-1990

C & C LABORATORY CO., LTD  
No. 28 Wen-Hwa Street  
Taoyuan, Taiwan, R.O.C.

Tony Hounq      Phone: 886 2 746 8584  
Fax: 886 2 763 2154

#### ELECTRICAL (EMC)

Valid to: January 31, 2000

Certificate Number: 0824-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following tests:

Electrical Emissions - Enclosure - 3 & 10 Meters; to 6.5 GHz

Electrical Emissions - AC Power - 0 - 300 V; 50 - 400 Hz

#### On the following products/equipment:

Computer Components and Peripherals; Networking Components; Wireless Communications Components; Electronic Components

#### Using the following test methods/specifications/standards:

Code of Federal Regulations (CFR) 47, FCC Method Part 15 using ANSI C63.4

AS/NZS 3548

BCIQ CNS 13438

CISPR 22

EN: 50081-1, 50082-1, 55022

VCCI V3

A handwritten signature in black ink, appearing to read 'Peter M. Hynes'.

Revised 01/21/98



附件如文

最遲件

經濟部商品檢驗局(函)

中華民國捌拾柒年壹月貳拾日

受文者：奇智科技股份有限公司

檢台八十七二字第 018310 號

行文單位：正本：奇智科技股份有限公司

副本：本局第二組(二份)、第三組、秘書室(秘四科請刊載於檢驗雜誌)、資訊室(請刊載於國際網路)、檢驗處、各分局(均無附件)

主旨：有關 貴公司電磁相容檢測實驗室申請本局電磁相容檢測領域認可案，業經實地評鑑結果，同意認可登錄，請 查照。

說明：

一、認可登錄範圍如下：

實驗室名稱：奇智科技股份有限公司電磁相容檢測實驗室

實驗室地址：桃園縣蘆竹鄉赤塗村14鄰15號

認可代號	認可產品類別	報告簽署人
SL2-IMP-14	(II) 資訊設備(CNS13438)	林淑女

評核標準：ISO Guide 25(1990年版)

- 一、本案評核認可期限三年，自八十七年元月十七日起至九十年元月十六日止，評核追查頻率每年乙次，得視需要增加稽查次數。
- 二、上開已認可領域如有變更事項，請於變更日起二週內函送相關資料至本局辦理。
- 三、貴公司執行本局指定之檢驗業務，依「商品檢驗法」第二十六條規定以執行公務，且 貴公司應依規定履行相關之責任與義務。
- 四、檢送「商品電磁相容型式試驗報告」格式乙份，請自行印製使用。

局長 陳佐鎮

依照分層負責規定授權單位主管執行

# FEDERAL COMMUNICATIONS COMMISSION

7435 Oakland Mills Road  
Columbia, MD 21046  
Telephone: 301-725-1585 (ext-218)  
Facsimile: 301-344-2050

March 13, 1998

IN REPLY REFER TO  
31040/SIT  
1300F2

C & C Laboratory Co., Ltd.  
1st Fl., No. 344, Fu Ching Street  
Taipei, Taiwan

Attention: Ceres Lin

Re: Measurement facility located at Taoyuan  
(3 and 10 meter site)

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for certification or notification under Parts 15 or 18 of the Commission's Rules. Our list will also indicate that the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4-1992. Please note that this filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

Per your request, the above mentioned facility has been also added to our list of those who perform these measurement services for the public on a fee basis. This list is updated monthly and is available on the Laboratory's Public Access Link (PAL) at 301-725-1072, and also on the Internet at the FCC Website [www.fcc.gov/oet/info/database/testsite/](http://www.fcc.gov/oet/info/database/testsite/).

Sincerely,



Thomas W. Phillips  
Electronics Engineer  
Customer Service Branch

# FEDERAL COMMUNICATIONS COMMISSION

7435 Oakland Mills Road  
Columbia, MD 21046  
Telephone: 301-725-1585 (ext-218)  
Facsimile: 301-344-2050

April 20, 1998

IN REPLY REFER TO  
31040/SIT  
1300F2

C&C Laboratory Co., Ltd.  
1st Fl., No. 344, Fu Ching Street  
Taipei, Taiwan

Attention: Charles Wang

Re: Measurement facility located at Taoyuan, Site No. 3  
(3 and 10 meter site)

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for certification or notification under Parts 15 or 18 of the Commission's Rules. Our list will also indicate that the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4-1992. Please note that this filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

Per your request, the above mentioned facility has been also added to our list of those who perform these measurement services for the public on a fee basis. This list is updated monthly and is available on the Laboratory's Public Access Link (PAL) at 301-725-1072, and also on the Internet at the FCC Website [www.fcc.gov/oet/info/database/testsite/](http://www.fcc.gov/oet/info/database/testsite/).

Sincerely,



Thomas W. Phillips  
Electronics Engineer  
Customer Service Branch

## EMC Laboratory Authorization

Aut. No. : ELA 124

EMC Laboratory: C&C Laboratory Taiwan  
No. 28 Wen-Hwa Street, 330 Taoyuan  
TAIWAN R.O.C.

Scope of Authorization: The authorization covers the following standards:

EN 50081-1	EN 50082-1
EN 55022	IEC 801-2
EN 60555-2,-3	IEC 801-3
EN 61000-3-2	IEC 801-4
EN 61000-3-3	EN 61000-4-2
EN 61000-4-3	EN 61000-4-4

This is to confirm that the abovementioned EMC Laboratory has been authorized according to the conditions described in Nemko Document ELA 10.

During Nemko's visit to the laboratory on the 08. October. 1997 an assessment was made of your facilities, qualifications and testing practices, and the relevant part of your organization. It was found that the EMC Laboratory is capable of performing tests within the scope mentioned above, accordingly, Nemko will accept your test results as a basis for attesting conformity with these EMC Standards for the products in question.


In case of product certification, your test report may be used by the applicant manufacturer, enclosed to his application.

In order to maintain the authorization, the information given in the enclosed ELA-INFOs has to be carefully followed. Nemko is to be promptly notified about any changes in the situation at your laboratory which may affect the basis for this authorization. The authorization may at any time be withdrawn if the conditions are no longer considered to be fulfilled.

The authorization is issued on the conditions that you have signed the "Statement by Authorization", ELA 3A-Form. The Statement of 08 October. 1997 is binding.

Oslo, 20. October. 1997

For Nemko as

  
Kjell Bergh, Head of EMC Section



# CERTIFICATE

**Facility: C&C Laboratory, Co., Ltd.**

**( Radiation 3 and 10 meter site )**

**Company : C&C Laboratory, Co., Ltd.**

**Address : No.15, 14 Lin, Chih Twu Chi, Lu Chu Hsiang,  
Taoyuan, Taiwan**

***This is to certify that the following measuring facility  
has been registered in accordance with the Regulations  
for Voluntary Control Measures, Article 8.***

**Registration No. : R-393**

**Date of Registration : April 17, 1996**

**This Certificate is valid until June 30, 1999**

***Voluntary Control Council for Interference by  
Information Technology Equipment***





# CERTIFICATE

**Facility : C&C Laboratory, Company., Ltd.**

**( Conducted Interference Measurement )**

**Company : C&C Laboratory, Company., Ltd.**

**Address : No.15, 14 Lin, Chih Twu Chi, Lu Chu Hsiang,  
Taoyuan, Taiwan**


*This is to certify that the following measuring facility  
has been registered in accordance with the Regulations  
for Voluntary Control Measures, Article 8.*

**Registration No. : C-402**

**Date of Registration : April 17, 1996**

**This Certificate is valid until June 30, 1999**

***Voluntary Control Council for Interference by  
Information Technology Equipment***





# CERTIFICATE

**Facility : C&C Open Area Test Site No.3**

**( Radiation 3 and 10 meter site )**

**Company : C&C Laboratory Co., Ltd.**

**Address : No.15, 14Lin, Chin Twu Chi, Lu Chu Hsiang Taoyuan Shien**


***This is to certify that the following measuring facility  
has been registered in accordance with the Regulations  
for Voluntary Control Measures.***

**Registration No. : R-725**

**Date of Registration : May 1, 1998**

**This Certificate is valid until June 30, 2001**

***Voluntary Control Council for Interference  
Information Technology Equipment***





# CERTIFICATE

**Facility:** C&C Conducted Interference Test Site No.3  
( Conducted Interference Measurement )

**Company :** C&C Laboratory Co., Ltd.

**Address :** No.15, 14Lin, Chin Twu Chi, Lu Chu Hsiang Taoyuan Shien


*This is to certify that the following measuring facility  
has been registered in accordance with the Regulations  
for Voluntary Control Measures.*

**Registration No. :** C-747

**Date of Registration :** May 1, 1998

**This Certificate is valid until June 30, 2001**

***Voluntary Control Council for Interference by  
Information Technology Equipment***





## **APPENDIX 7**

### **TEST EQUIPMENT**

## MEASURING INSTRUMENT SETTING

TEST TYPE	DETECTOR	FREQUENCY RANGE	RESOLUTION BANDWIDTH	VIDEO BANDWIDTH
Conducted	Peak/Avg	10kHz-150kHz	300Hz	100kHz
Conducted	Peak/QP/Avg	150kHz-30MHz	9kHz	100kHz
Radiated	Peak	30MHz-1GHz	100kHz	100kHz
Radiated	QP	30MHz-1GHz	120kHz	120kHz
Radiated	Peak/Avg	Above 1GHz	1MHz	1MHz

**Note:** All readings on data pages are taken with the detector in peak mode unless otherwise stated.

## UNITS OF MEASUREMENT

Measurements of radiated interference are reported in terms of dBuV/m, at a specified distance. The indicated readings on the spectrum analyzer are converted to dBuV/m by use of appropriate conversion factors. Measurements of conducted interference are reported in terms of dBuV.

## TEST EQUIPMENT LIST

**Instrumentation:** The following list contains equipment used at C & C Laboratory, Co., Ltd. for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2-1988 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10kHz to 1.0 / 2.0 GHz.

**Equipment used during the tests:**

Open Area Test Site: ☒ #1 ; ☐ #3

Open Area Test Site # 1					
EQUIPMENT TYPE	* MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL. DUE
Spectrum Analyzer (100Hz-1.5GHz)	HP	8568B	3001A05004 3014A18846	03/25/1998	03/24/1999
Quasi-Peak Adapter	HP	85650A	2811A01399	03/25/1998	03/24/1999
RF Preselector (20Hz-2GHz)	HP	85685A	2947A01064	03/25/1998	03/24/1999
Precision Dipole (30-300MHz)	ROHDE & SCHWARZ	HZ-12	846932/0004	06/06/1998	06/06/1999
Precision Dipole (300-1000MHz)	ROHDE & SCHWARZ	HZ-13	846556/0008	06/16/1998	06/16/1999
Horn Antenna (1GHz-18GHz)	EMCO	3115	9602-4659	04/04/1998	04/04/1999
Bilog Antenna (30MHz-2GHz)	CHASE	CBL6112A	2309	03/14/1998	03/14/1999
Site Information	C&C	N/A	N/A	03/07/1998	03/06/1999

Open Area Test Site # 3					
EQUIPMENT TYPE	* MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL. DUE
Spectrum Analyzer (9kHz-2.6GHz)	ADVANTEST	R3261C	71720533	12/17/1997	12/17/1998
Pre-Amplifier (100kHz-1300MHz)	HP	8447D	2944A09173	01/14/1998	01/14/1999
Receiver (20MHz-1GHz)	ROHDE & SCHWARZ	ESVS10	846285/016	12/04/1997	12/03/1998
Precision Dipole (30-300MHz)	ROHDE & SCHWARZ	HZ-12	846932/0004	06/06/1998	06/06/1999
Precision Dipole (300-1000MHz)	ROHDE & SCHWARZ	HZ-13	846556/0008	06/16/1998	06/16/1999
Horn Antenna (1GHz-18GHz)	EMCO	3115	9602-4659	04/04/1998	04/04/1999
Bilog Antenna (30MHz-2GHz)	CHASE	CBL6112A	2179	11/29/1997	11/28/1998
Site Information	C&C	N/A	N/A	01/21/1998	01/20/1999

Conducted Emission Test Site: ☒ # 1 ; ☐ #3

Conducted Emission Test Site # 1					
EQUIPMENT TYPE	* MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL. DUE
Spectrum Analyzer (100Hz-1.5GHz)	HP	8568B	3001A05004 3014A18846	03/25/1998	03/24/1999
Quasi-Peak Adapter	HP	85650A	2811A01399	03/25/1998	03/24/1999
RF Preselector (20Hz-2GHz)	HP	85685A	2947A01064	03/25/1998	03/24/1999
LISN (10kHz-100MHz)	EMCO	3825/2	9106-1809	03/13/1998	03/12/1999
LISN (10kHz-100MHz)	EMCO	3825/2	9106-1810	03/13/1998	03/12/1999

Conducted Emission Test Site # 3					
EQUIPMENT TYPE	* MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL. DUE
Receiver (9kHz-2.75GHz)	ROHDE & SCHWARZ	ESCS30	844793/012	12/19/1997	12/18/1998
LISN (10kHz-100MHz)	EMCO	3825/2	9003-1628	4/29/1998	4/28/1999
LISN (10kHz-100MHz)	ROHDE & SCHWARZ	ESH3-Z5	848773/014	5/4/1998	5/3/1999

The calibrations of the measuring instruments, including any accessories that may effect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors applied in accordance with instructions contained in the manual for the measuring instrument.

## **APPENDIX 8**

### **BLOCK DIAGRAM OF TEST SETUP**


### System Diagram of Connections between EUT and Simulators

EUT: Internal PCI Bus Modem Card

Trade Name: TAICOM

Model Number: ML56PVS-MI

Power Cord: Unshielded 1.8 M(to Host PC)

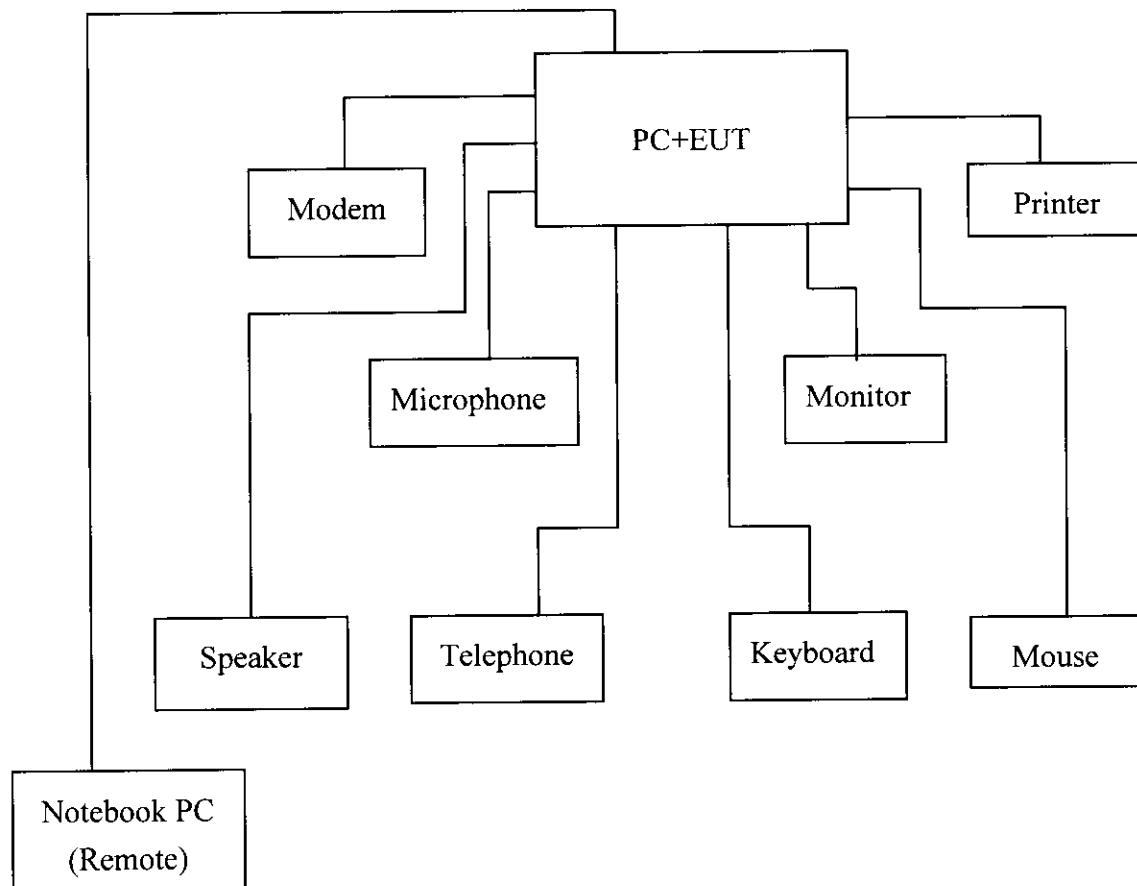

## **APPENDIX 9**

### **PHOTOGRAPHS (TEST SETUP OF LINE CONDUCTED EMISSION TEST)**