

EMC TEST REPORT

No. 2019404STO-101

Electromagnetic disturbances

EQUIPMENT UNDER TEST

Equipment: Wall mounted luminaire with LED
Type/Model: V1920 Raksta
Manufacturer: IKEA of Sweden AB
Tested by request of: IKEA of Sweden AB

SUMMARY

Referring to the emission limits, and the operating mode during the tests specified in this report, the equipment complies with the requirements according to the following standards:


FCC 47 CFR Part 15: Radio frequency devices, Subpart B: Unintentional radiators, Class B Equipment.

ICES-005 Issue 5: Lighting Equipment Class B (2018).

For details, see clause 2 – 4.

Date of issue: May 26, 2020

Tested by:


Lovisa Gibson

Approved by:


Per Granberg

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Revision History

Test report number	Date	Description	Changes
2019404STO-101	May 26, 2020	First release	

CONTENTS

	Page
1. Client Information.....	4
2. Equipment under test (EUT).....	4
2.1 Identification of the EUT	4
2.2 Test set up and EUT photos.....	4
2.3 Additional information about the EUT.....	4
3. Test Specifications.....	5
3.1 Standards	5
3.2 Additions, deviations and exclusions from standards and accreditation.....	5
3.3 Test site	5
3.4 Mode of operation during the test.....	5
3.5 Compliance.....	6
4. Test Summary	7
5. Conducted continuous disturbances	8
5.1 Operating environment	8
5.2 Test setup and test procedure.....	8
5.3 Measurement uncertainty	8
5.4 Test results, AC Power input port, Class B	8
5.5 Test equipment.....	9
6. Radiated rf Emission in the frequency-range 30 MHz – 1 GHz.....	10
6.1 Operating environment	10
6.2 Test setup and test procedure.....	10
6.3 Test conditions	10
6.4 Measurement uncertainty	10
6.5 Test results, 30 – 1000 MHz, FCC, Class B	11
6.6 Test equipment.....	12

3. TEST SPECIFICATIONS

3.1 Standards

Requirements:

FCC 47 CFR Part 15: Radio frequency devices, Subpart B: Unintentional radiators.

ICES-005 Issue 5: Lighting Equipment (2018).

Test methods:

ANSI C63.4: 2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Additions, deviations and exclusions from standards and accreditation

No additions, deviations or exclusions have been made from standards and accreditation.

3.3 Test site

Measurements were performed at:

Intertek Semko AB.
Torshamnsgatan 43,
P.O. Box 1103
SE-164 22 Kista

Intertek Semko AB is a FCC listed test site with site registration number 90913
Intertek Semko AB is a FCC accredited conformity assessment body with designation number SE0002
Intertek Semko AB is an Industry Canada listed test facility with IC assigned code 2042G

Measurement chambers

Measurement Chamber	Type of chamber	IC Site filing #
STORA HALLEN	Semi-anechoic 10 m and 3 m	2042G-2

3.4 Mode of operation during the test

The EUT was tested with light on, supply 120 V, 60 Hz.

3.5 Compliance

The EUT shall comply with the emission limits according to the standards as listed below

Radiated Emission requirements:

The EUT shall meet the limits for the standards.

Reference: 47 CFR §15.109
ICES-005, section 5.5.3

Limits for radiated emission according to FCC

Class B

Frequency range [MHz]	Field strength at 3 m (dBµV/m)	Field strength at 10 m (dBµV/m)	Detector
30 – 88	40.0	29.5	Quasi Peak
88 – 216	43.5	33.1	Quasi Peak
216 – 960	46.0	35.6	Quasi Peak
960 – 1000	54.0	43.5	Quasi Peak
Above 1000	54.0 / 74.0	43.5 / 63.5	Average / Peak

The values for 10 m measuring distance are calculated by subtracting 10.5 dB from the 3 m limit. (i.e. an extrapolation factor of 20 dB/decade according to §15.31(f)(1))

Limits for radiated emission according to ICES-005

Class B

Frequency range [MHz]	Field strength at 3 m (dBµV/m)	Field strength at 10 m (dBµV/m)	Detector
30 – 88	40.0	29.5	Quasi Peak
88 – 216	43.5	33.1	Quasi Peak
216 – 1000	46.0	35.6	Quasi Peak

4. TEST SUMMARY

The results in this report apply only to sample tested:
 Result: Pass – Fail – N/A= Not applicable

Standard	Description	Result
	Emission	
FCC Part 15 subpart B ICES-005	Conducted continuous emission in the frequency range 0.150 – 30 MHz, AC Power input port The EUT complies with the Class B limits. The margin to the limit was at least 11.4 dB at 0.187 MHz See clause 5.4.	PASS
FCC Part 15 subpart B ICES-005	Radiated emission of electromagnetic fields in the frequency range 30 – 1000 MHz The EUT complies with the Class B limits. The margin to the limit was at least 7.2 dB at 68.640 MHz The measured value is within the measurement uncertainty. See clause 6.5.	PASS
FCC Part 15 subpart B ICES-005	Radiated emission of electromagnetic fields in the frequency range 1.0 – X.0 GHz Not applicable. The clock frequency is below 108 MHz.	N/A

5. CONDUCTED CONTINUOUS DISTURBANCES
in the frequency-range 0.15 – 30 MHz

5.1 Operating environment

Date of test:	Temperature:	Relative Humidity:
May 15, 2020	23 [°C]	21 [%]

5.2 Test setup and test procedure

The test method is in accordance with ANSI C63.4.


The EUT was connected to the power via Artificial Mains Networks AMN.
The EUT was placed on an insulating support 0.8 m above the floor, 0.4 m from the vertical reference ground plane (RGP) and 0.8 m from the AMN/ISN.
Overview sweeps were performed for each lead.
During the tests the EUT was operated according to the mode of operation mentioned in clause 3.4.

5.3 Measurement uncertainty

Continuous conducted disturbances with AMN
in the frequency range 150 kHz to 30 MHz ± 3.3 dB

Measurement uncertainty is calculated in accordance with CISPR 16-4-2:2011.
The measurement uncertainty is given with a confidence of 95 %.

5.4 Test results, AC Power input port, Class B

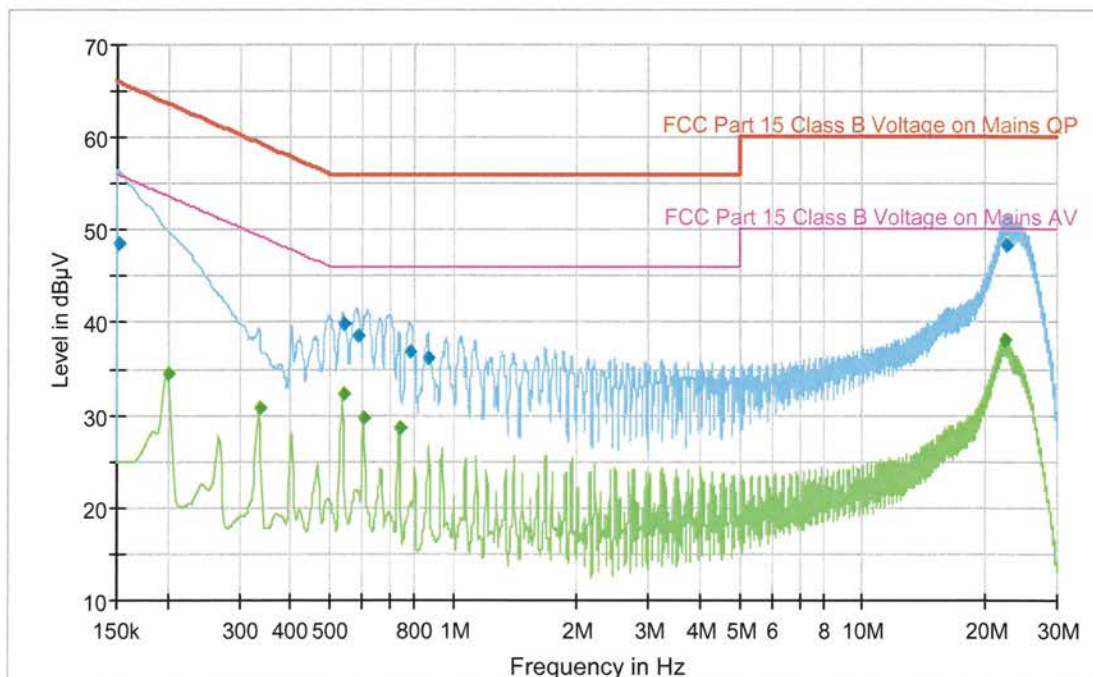

Diagram, Peak and Average overview sweep

Measurement results, Quasi-peak, Class B

Frequency [MHz]	Result [dB μ V]	Limit [dB μ V]	Line L/N	Margin [dB]
0.152	48.6	65.9	N	17.3
0.539	40.0	56.0	L	16.0
0.584	38.6	56.0	L	17.4
0.787	36.8	56.0	L	19.2
0.872	36.1	56.0	L	19.9
22.670	48.4	60.0	N	11.6

Measurement results, Average, Class B


Frequency [MHz]	Result [dB μ V]	Limit [dB μ V]	Line L/N	Margin [dB]
0.202	34.4	53.5	N	19.1
0.337	30.8	49.3	L	18.5
0.539	32.4	46.0	L	13.6
0.606	29.7	46.0	L	16.3
0.742	28.6	46.0	L	17.4
22.409	38.1	50.0	N	11.9

Result [dB μ V] = Analyser reading [dB μ V] + cable loss [dB] + LISN insertion loss [dB]

5.5 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Last Cal. date	Cal. interval
Test receiver	Rohde & Schwarz	ESU8	12866	06-2019	1 year
Cable	Suhner	G03232 D-01	9701	06-2019	1 year
Power unit	Chroma	61604	31757	-	-
Cable	Suhner	RG 223/U	9815	06-2019	1 year
Pulse limiter	Rohde & Schwarz	ESH3-Z2	4623	05-2020	1 year
Artificial Mains Network	Rohde & Schwarz	ESH3-Z5	2728	06-2019	1 year

6.5 Test results, 30 – 1000 MHz, FCC, Class B

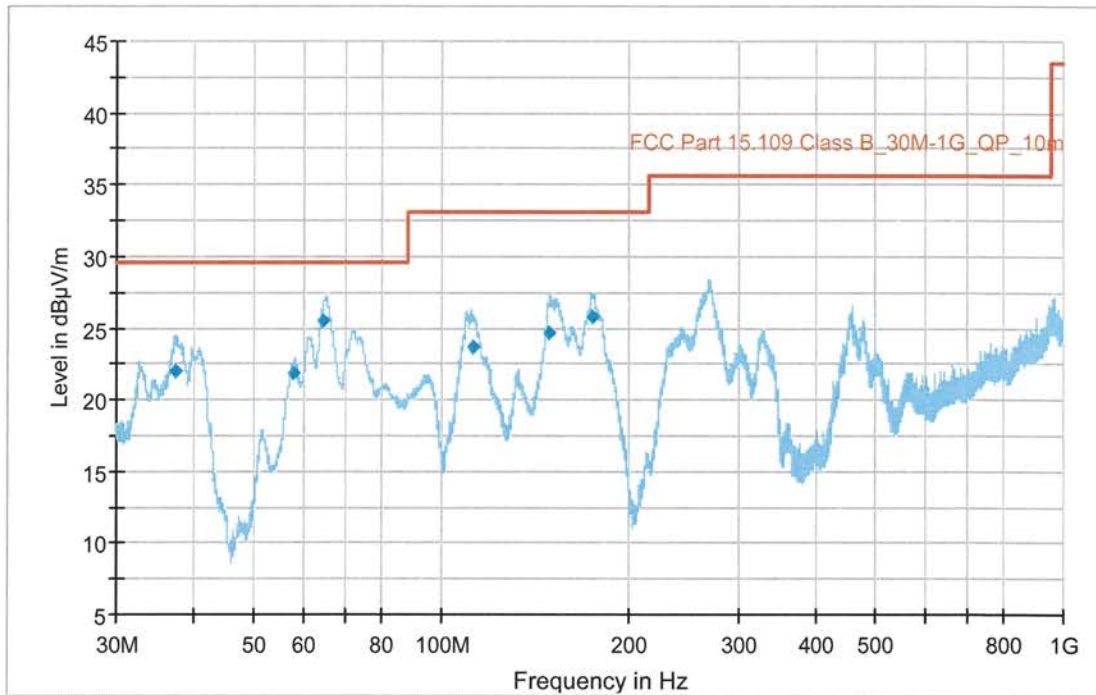

Diagram, Peak overview sweep, 30 – 1000 MHz at 10 m distance.

Measurement results, Quasi Peak, Class B

Frequency [MHz]	Result [dBµV/m]	Limit [dBµV/m]	Polarization H/V	Margin [dB]
37.440	22.0	29.5	V	7.5
58.050	21.8	29.5	V	7.7
64.860	25.5	29.5	V	4.0*
112.320	23.7	33.1	V	9.4
148.980	24.7	33.1	V	8.4
175.470	25.8	33.1	V	7.3

Result [dBµV/m] = Analyser reading [dBµV] + Antenna factor [1/m] - Amplifier gain [dB] + Cable loss [dB]

The EUT also fulfil the limit of ICES-005, see limit table, clause 3.5 Compliance in this report.

* The measured result is below the limit by a margin less than the measured uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance is more probable than non-compliance with specification limit.

6.6 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Last Cal. date	Cal. interval
Pre-amplifier	SEMKO	AM1331	S7992	04/2019	1 year + 1 month
Cable	Rosenberger	LA5-S003-8500	39149	03/2020	1 year
Cable	Huber + Suhner	Sucoflex 106	39122	04/2020	1 year
Cable	Rosenberger	LA5-S003-10000 (UFB293C)	39163	04/2019	1 year + 1 month
Bilog antenna	Teseq	CBL 6111D	34200	03/2020	3 years
Measurement receiver	ROHDE & SCHWARZ	ESW 44	33890	06/2019	1 year