

FCC TEST REPORT

for

CISPR PUB. 22 Class B

Equipment : KEYPAD

Model No. : K622

FCC ID : FKD46AK622

Filing Type : Original Grant

Applicant : **MONTEREY International Corp.**
1FL., No. 40, DEH HWEI STREET,
TAIPEI, TAIWAN, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

CERTIFICATE OF COMPLIANCE	3
1. General Description of Equipment under Test	4
1.1. Applicant	4
1.2. Manufacturer	4
1.3. Basic Description of Equipment under Test	4
1.4. Feature of Equipment under Test	4
2. Test Configuration of Equipment under Test	5
2.1. Test Manner	5
2.2. Description of Test System	5
2.3. Connection Diagram of Test System	7
3. Test Software	8
4. General Information of Test	9
4.1. Test Facility	9
4.2. Standard for Methods of Measurement	9
4.3. Test in Compliance with	9
4.4. Frequency Range Investigated	9
4.5. Test Distance	9
5. Test of Conducted Powerline	10
5.1. Major Measuring Instruments	10
5.2. Test Procedures	11
5.3. Typical Test Setup Layout of Conducted Powerline	12
5.4. Test Result of AC Powerline Conducted Emission	13
5.5. Photographs of Conducted Powerline Test Configuration	14
6. Test of Radiated Emission	16
6.1. Major Measuring Instruments	16
6.2. Test Procedures	17
6.3. Typical Test Setup Layout of Radiated Emission	18
6.4. Test Result of Radiated Emission	19
6.5. Photographs of Radiated Emission Test Configuration	20
7. Antenna Factor & Cable Loss	21
8. List of Measuring Equipment Used	22
Appendix A. Photographs of EUT	A1 ~ A7

CERTIFICATE OF COMPLIANCE

for

CISPR PUB. 22 Class B

Equipment : KEYPAD
Model No. : K622
FCC ID : FKD46AK622
Applicant : **MONTEREY International Corp.**
1FL., No. 40, DEH HWEI STREET,
TAIPEI, TAIWAN, R.O.C.

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was ***passed* CISPR PUB. 22** both radiated and conducted emission class B limits. Testing was carried out on May. 10, 2000 at **SPORTON International Inc.** LAB. in Lin Kou.



Lenore Chang
President

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

MONTEREY International Corp.
1FL., No. 40, DEH HWEI STREET,
TAIPEI, TAIWAN, R.O.C.

1.2. Manufacturer

Same as 1.1.

1.3. Basic Description of Equipment under Test

Equipment	: KEYPAD
Model No.	: K622
FCC ID	: FKD46AK622
Trade Name	: MONTEREY, MTEK, AOPEN, DELTA, ECS, CTX, WINTEK, LEO, LEMEL, TSANN KUEN
Keyboard cable	: Non-Shielded, 1 m
Power Supply Type	: From PC
Power Cord	: N/A

1.4. Feature of Equipment under Test

- 5V DC 300mA MAX
- IBM PC compatible
- USB Port
- OS: at least Window98

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. The SONY Monitor, DELL PS/2 Keyboard, PRIMAX PS/2 Mouse, HP Printer, ACEEX Modem and EUT were connected to the FIC PC for EMI test.
- c. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 1000MHz.

2.2. Description of Test System

Support Unit 1. -- Personal Computer (FIC)

FCC ID	: N/A
Model No.	: P2L97
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0037
Data Cable	: Shielded, 360 degree via metal backshells
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. -- Monitor (SONY)

FCC ID	: AK8GDM17SE2T
Model No.	: GDM-17SE2T
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0013
Data Cable	: Shielded, 360 degree via metal backshells, 1.15m

Support Unit 3. -- PS/2 Keyboard (DELL)

FCC ID	: GYUM92SK
Model No.	: AT101(DE8M)
Serial No.	: SP0054
Data Cable	: Shielded, 360 degree via metal backshells, 1.9m

Support Unit 4. -- PS/2 Mouse (PRIMAX)

FCC ID : EMJMUSJQ
Model No. : MUS9J
Serial No. : SP0045
Data Cable : Shielded, 360 degree via metal backshells, 1.7m


Support Unit 5. -- Printer (HP)

FCC ID : B94C2642X
Model No. : DeskJet 400
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0048
Data Cable : Braided-Shielded, 360 degree via metal backshells, 1.35m

Support Unit 6. -- Modem (ACEEX)

FCC ID : IFAXDM1414
Model No. : DM1414
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0015
Data Cable : Shielded, 360 degree via metal backshells, 1.15m

2.3. Connection Diagram of Test System

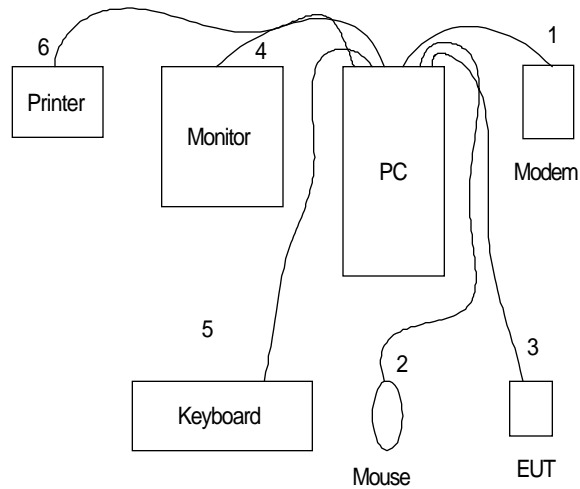

1. The I/O cable is connected from PC to the support unit 6.
2. The I/O cable is connected from PC to the support unit 4.
3. The I/O cable is connected from PC to the EUT.
4. The I/O cable is connected from PC to the support unit 2.
5. The I/O cable is connected from PC to the support unit 3.
6. The I/O cable is connected from PC to the support unit 5.

3. Test Software

An executive program, EMITEST.EXE under WIN 98, which generates a complete line of continuously repeating " H" pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H" messages to the monitor, and the monitor displays " H" patterns on the screen.
- d. The PC sends " H" messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H" messages to the modem.
- f. The PC sends " H" messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

4. General Information of Test

4.1. Test Facility

This test was carried out by SPORTON International Inc.

Test Site Location : No. 30-2, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,
Taipei Hsien, Taiwan, R.O.C.
TEL : 886-2-2601-1640
FAX : 886-2-2601-1695

4.2. Standard for Methods of Measurement

ANSI C63.4-1992

4.3. Test in Compliance with

CISPR PUB. 22 Class B

4.4. Frequency Range Investigated

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation : from 30 MHz to 1,000 MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 10 M.

5. Test of Conducted Powerline

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 5.3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


5.1. Major Measuring Instruments

Test Receiver	HP 8591EM
Attenuation	0 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 kHz

5.2. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be retested one by one using the quasi-peak method and reported.

5.3. Typical Test Setup Layout of Conducted Powerline

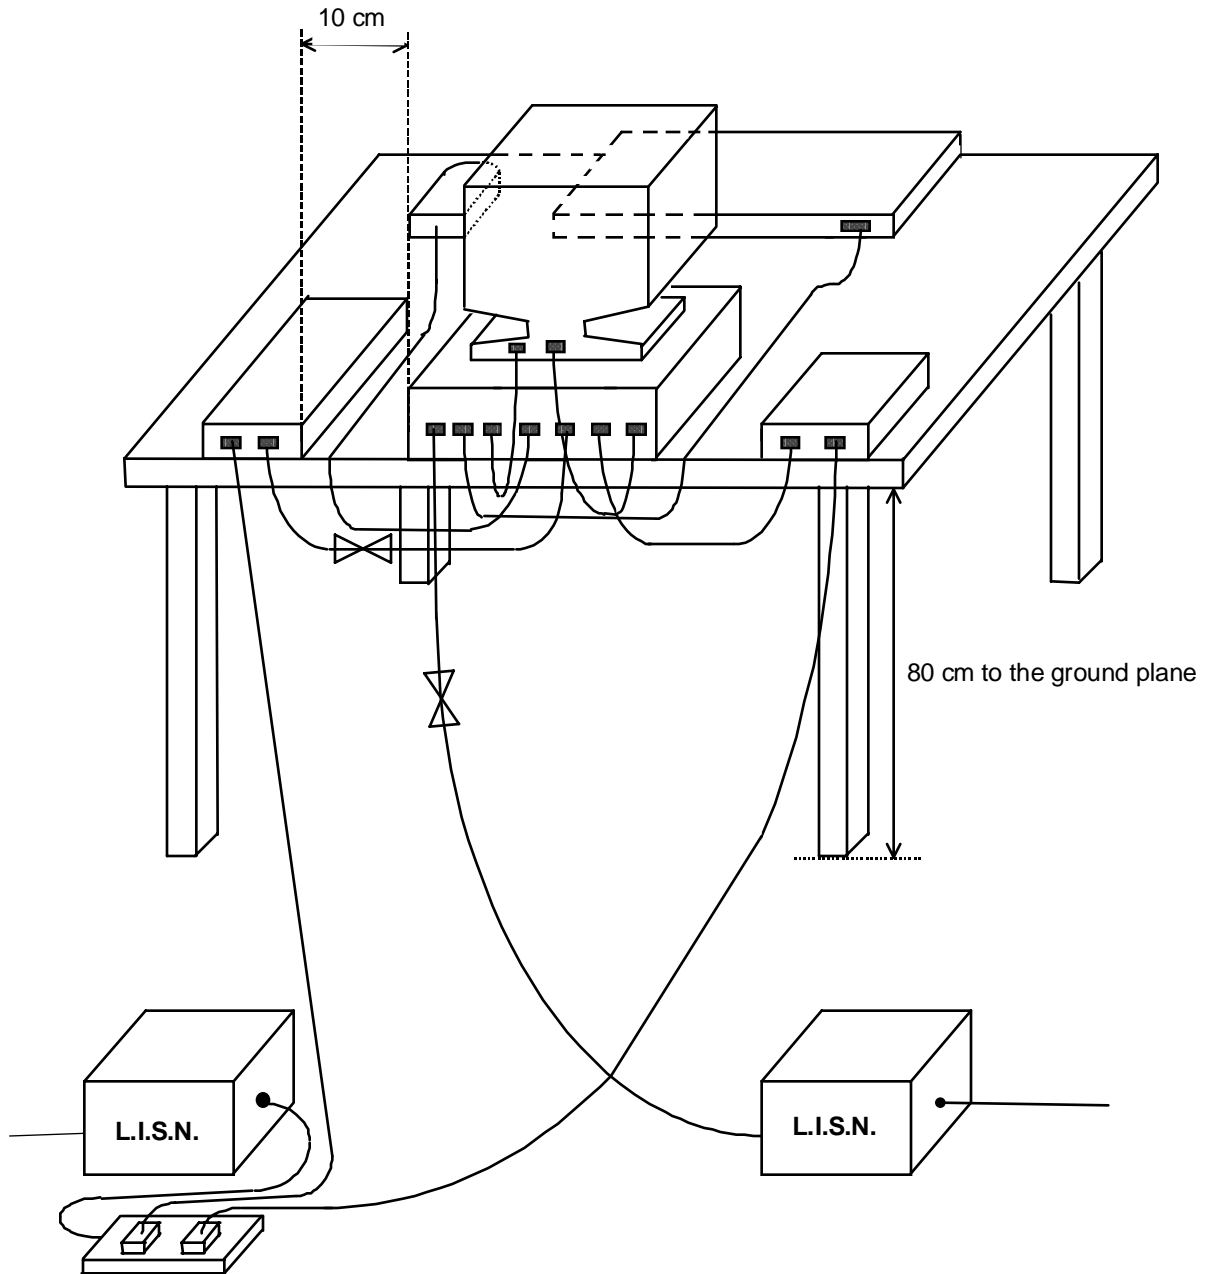


5.4. Test Result of AC Powerline Conducted Emission

- Frequency Range of Test : from 0.15 MHz to 30 MHz
- Temperature : 26°C
- Relative Humidity : 65 %
- Test Date : May. 10, 2000

The Conducted Emission test was passed at minimum margin

LINE 0.226 MHz / 46.50 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.226	L	47.00	46.50	223.87	211.35	62.61	52.61	1350.54	427.08	-15.6	-6.1
0.353	L	42.20	41.80	128.83	123.03	58.88	48.88	879.48	278.12	-16.7	-7.1
0.547	L	38.70	38.00	86.10	79.43	56.00	46.00	630.96	199.53	-17.3	-8.0
0.226	N	46.70	46.30	216.27	206.54	62.61	52.61	1351.11	427.26	-15.9	-6.3
0.354	N	42.00	41.50	125.89	118.85	58.87	48.87	877.58	277.52	-16.9	-7.4
0.837	N	38.70	37.90	86.10	78.52	56.00	46.00	630.96	199.53	-17.3	-8.1



Test Engineer :

JONES JAN

5.5. Photographs of Conducted Powerline Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW



SIDE VIEW



6. Test of Radiated Emission

Radiated emissions from 30 MHz to 1,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.


6.1. Major Measuring Instruments

Amplifier	(HP 87405A)
Attenuation	0 dB
RF Gain	25 dB
Signal Input	10 MHz to 3 GHz
Spectrum Analyzer	(HP 8560E)
Attenuation	0 dB
Start Frequency	30 MHz
Stop Frequency	1,000 MHz
Resolution Bandwidth	1 MHz
Video Bandwidth	1 MHz
Signal Input	30 Hz to 2.9 GHz
Receiver	(R&S ESCS30)
Resolution Bandwidth	120 KHz
Frequency Band	30 MHz to 2.75 GHz
Quasi-Peak Detector	ON for Quasi-Peak Mode; OFF for Peak Mode

6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. Typical Test Setup Layout of Radiated Emission

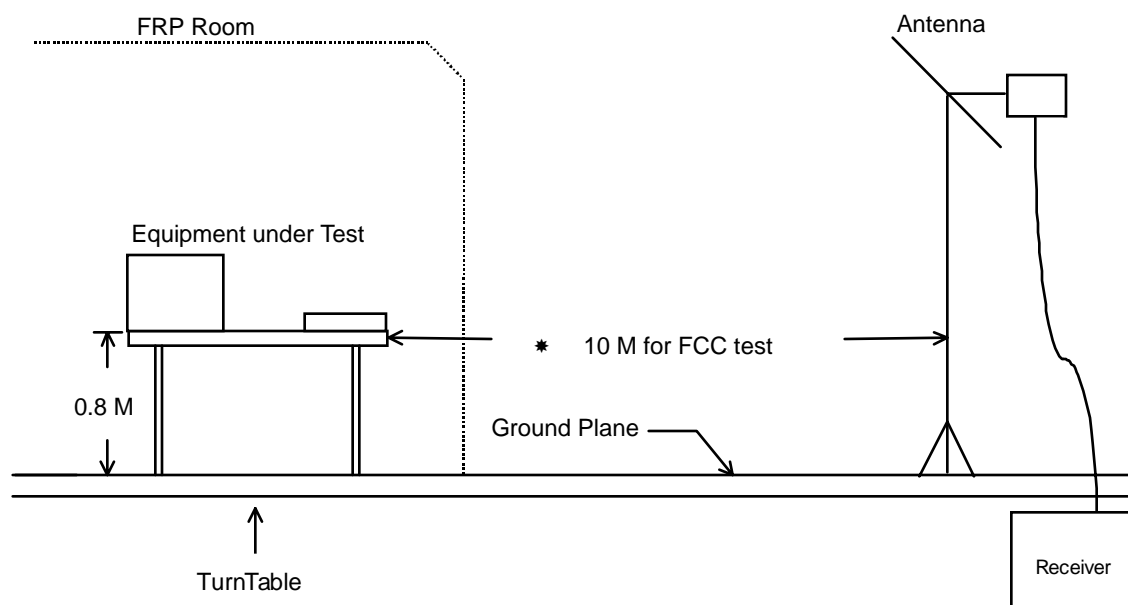

6.4. Test Result of Radiated Emission

- Frequency Range of Test : from 30 MHz to 1,000 MHz
- Test Distance : 10 M
- Temperature : 28°C
- Relative Humidity : 64 %
- Test Date : May. 3, 2000
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

299.315 MHz / 32.60 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 159 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
199.803	H	9.50	1.57	13.70	30.00	31.62	24.77	17.32	-5.23
717.600	H	20.16	3.03	9.30	37.00	70.79	32.49	42.12	-4.51
762.400	H	20.99	3.09	7.30	37.00	70.79	31.38	37.07	-5.62
66.423	V	6.22	0.93	16.45	30.00	31.62	23.60	15.14	-6.40
132.429	V	12.34	1.29	10.64	30.00	31.62	24.27	16.35	-5.73
299.315	V	14.23	1.90	16.47	37.00	70.79	32.60	42.66	-4.40

Test Engineer :

PETER WANG


6.5. Photographs of Radiated Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW

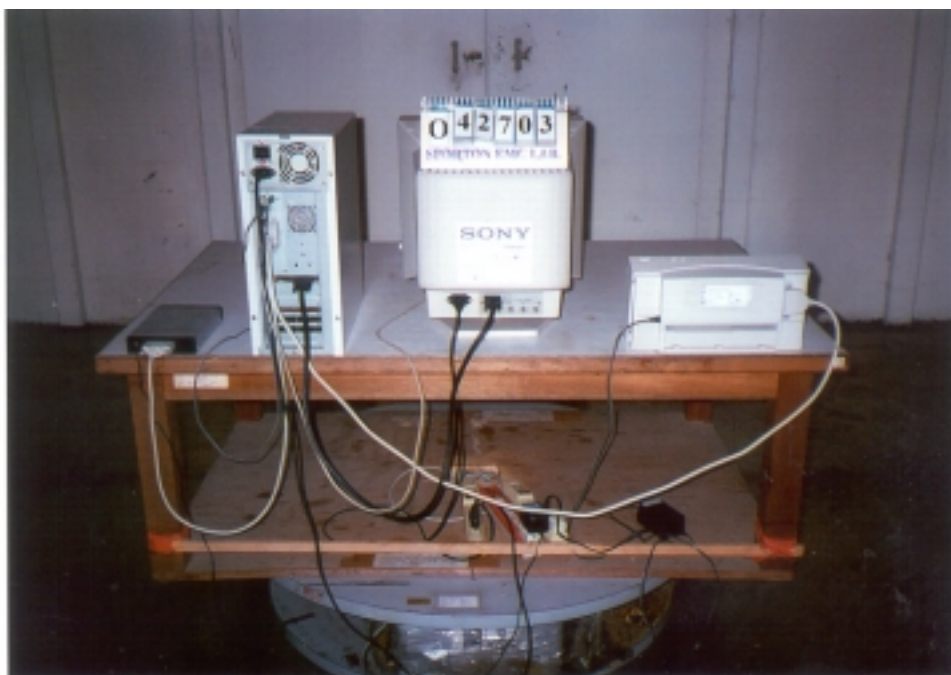

7. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	16.8	0.6
35	15.6	0.7
40	14.4	0.8
45	11.4	0.8
50	9.4	0.8
55	8.1	0.9
60	6.8	0.9
65	6.4	0.9
70	5.9	0.9
75	6.3	1.1
80	6.7	1.0
85	7.4	1.1
90	8.1	1.1
95	9.3	1.2
100	10.6	1.1
110	11.7	1.2
120	12.7	1.2
130	12.3	1.3
140	12.3	1.3
150	10.6	1.3
160	9.9	1.3
170	9.5	1.4
180	9.4	1.5
190	9.4	1.5
200	9.5	1.6
220	10.8	1.6
240	11.9	1.7
260	12.9	1.8
280	13.6	1.9
300	14.2	1.9
320	14.6	2.0
340	14.9	2.0
360	15.3	2.1
380	15.6	2.1
400	15.9	2.1
450	15.8	2.3
500	15.7	2.4
550	16.9	2.7
600	18.1	2.7
650	19.0	2.8
700	19.8	3.0
750	20.8	3.1
800	21.7	3.1
850	22.2	3.2
900	22.7	3.6
950	21.2	3.6
1000	19.6	3.6

LKOP1

8. List of Measuring Equipment Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver (site 1)	HP	8591EM	3536A00672	9 KHz – 1.8 GHz	Aug. 30, 1999	Conduction
LISN (EUT) (site 1)	EMCO	3850/2	9510-1035	50 ohm / 50 uH	Oct. 22, 1999	Conduction
LISN (Support Unit) (site 1)	KYORITSU	KNW-407	8-693-10	50 ohm / 50 uH	Oct. 22, 1999	Conduction
EMI Filter (site 1)	CORCOM	MRI-2030	N/A	480 VAC / 30 A	N/A	Conduction
Amplifier (Site 1)	HP	87405A	3207A01431	10MHz – 3.0GHz	Jun. 24, 1999	Radiation
Spectrum Analyzer (site 1)	HP	8560E	3728A03186	30Hz – 2.9GHz	Sep. 06, 1999	Radiation
Receiver (Site 1)	R&S	ESCS30	70-213-4258	9KHz - 2.75GHz	Dec. 16, 1999	Radiation
Bilog Antenna (Site 1)	CHASE	CBL6112A	2288	30MHz - 2GHz	Jul. 12, 1999	Radiation
Half-wave dipole antenna (site 1)	EMCO	3121C	9705-1285	28 M - 1GHz	May 18, 1999	Radiation
Turn Table (site 1)	EMCO	1060-1.211	9507-1805	0 ~ 360 degree	N/A	Radiation
Antenna Mast (site 1)	EMCO	2075	9806-2160	1 m - 4 m	N/A	Radiation