

Date: 2000-04-20

TEST REPORT

Page 1 of 7

No.: HM102460

APPLICANT: (CODE: NEB001)
NEW BRIGHT INDUSTRIAL CO., LTD.
NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, HONG KONG

DATE OF SAMPLES RECEIVED: 2000-04-11

DATE OF TESTING: 2000-04-18

DESCRIPTION OF SAMPLE(S):

A sample of product said to be:

Product: RADIO CONTROL TOY VEHICLE TRANSMITTERS AND RECEIVERS
Manufacturer: NEW BRIGHT INDUSTRIAL CO., LTD.
Model Number: TX-4355H
Brand Name: NEW BRIGHT
Rating: 9.0Vd.c. ("6F22" size battery × 1)
Origin: CHINA

INVESTIGATIONS REQUESTED:

Measurement to the relevant clauses of F.C.C. Rules and Regulations Part 15
Subpart C - Intentional Radiator.

RESULT/ REMARK: Please see attached sheet(s).

CONCLUSION:

From the measurement data obtained, the tested sample was considered to have
COMPLIED with the clause 15.235 of Federal Communications Commission Rules and
Regulations Part 15.

TEST EQUIPMENT AUDIT: Please see Appendix A

Law Man Kit
Testing Engineer

Kitty Choy
Verify by

Patrick Wong
Patrick Wong
for Managing Director

Date: 2000-04-20

TEST REPORT

Page 2 of 7

No.: HM102460

TEST SUMMARY

*** INTENTIONAL RADIATOR ***

- (1) Measurement of Emission of RF energy on the carrier frequency Satisfactory
- (2) Measurement of the out-of band emissions including harmonics Satisfactory
- (3) Measurement of Emission Within Band Edges Satisfactory
- (4) Measurement of Line-Conducted Voltage onto AC Power Line Not applicable

TEST DATA

Please refer to the attached result sheets.

Date: 2000-04-20

TEST REPORT

Page 3 of 7

No.: HM102460

*** INTENTIONAL RADIATOR ***

(1) Measurement of Radiated Interference

TEST REFERENCE : FCC Rules Part 15 Section 15.235(49.82-49.90 MHz)

TEST CONDITION : Normal

TEST DATE : 2000-04-18.

Emission of RF energy on the carrier frequency -- 49.859 MHz

(PEAK VALUE)

| Emission Frequency | Meter Reading | Polarization | Antenna Factor | Field Strength (at 3m) | FCC Limit |
|--------------------|---------------|--------------|----------------|------------------------|-----------|
| MHz | dB(μV) | H-V | dB | dB(μV/m) μV/m | μV/m |
| 49.9 | 64.5 | V | + 15.0 | 79.5 9440.6 | 100000.0 |

Emission of RF energy on the carrier frequency -- 49.859 MHz

(AVERAGE VALUE)

| Emission Frequency | Meter Reading | Polarization | Antenna Factor | Field Strength (at 3m) | FCC Limit |
|--------------------|---------------|--------------|----------------|------------------------|-----------|
| MHz | dB(μV) | H-V | dB | dB(μV/m) μV/m | μV/m |
| 49.9 | 53.0 | V | + 15.0 | 68.0 2511.9 | 10000.0 |

... to be continued

No.: HM102460

*** INTENTIONAL RADIATOR ***

(1) Measurement of Radiated Interference . . Continued

TEST REFERENCE : FCC Rules Part 15 Section 15.235(49.82-49.90 MHz)
 TEST CONDITION : Normal
 TEST DATE : 2000-04-18

**The out-of-band emissions, including harmonics (25-1000 MHz)
 (CISPR VALUE)**

| Emission Frequency | Polarization | Meter reading (at 3m) | Antenna factor | Field Strength (at 3m) | | FCC Limit @ |
|--------------------|--------------|-----------------------|----------------|------------------------|--------|-------------|
| MHz | H-V | | dB | dB(μV) | μV/m | μV/m |
| 99.7 | V | 13.4 + | 12.2 | 25.6 | 19.1 | 150 |
| 149.6 | | < 1.0 + | 9.8 | < 10.8 | < 3.5 | 150 |
| 199.4 | | < 1.0 + | 11.5 | < 12.5 | < 4.2 | 150 |
| 249.3 | | < 1.0 + | 15.9 | < 16.9 | < 7.0 | 200 |
| 299.2 | | < 1.0 + | 17.0 | < 18.0 | < 7.9 | 200 |
| 349.0 | | < 1.0 + | 17.2 | < 18.2 | < 8.1 | 200 |
| 398.9 | | < 1.0 + | 18.8 | < 19.8 | < 9.8 | 200 |
| 448.7 | | < 1.0 + | 19.7 | < 20.7 | < 10.8 | 200 |
| 498.6 | | < 1.0 + | 20.6 | < 21.6 | < 12.0 | 200 |
| 548.4 | | < 1.0 + | 22.2 | < 23.2 | < 14.5 | 200 |
| 598.3 | | < 1.0 + | 23.4 | < 24.4 | < 16.6 | 200 |
| 648.2 | | < 1.0 + | 23.5 | < 24.5 | < 16.8 | 200 |
| 698.0 | | < 1.0 + | 25.0 | < 26.0 | < 20.0 | 200 |
| 747.9 | | < 1.0 + | 26.3 | < 27.3 | < 23.2 | 200 |
| 797.7 | | < 1.0 + | 27.2 | < 28.2 | < 25.7 | 200 |
| 847.6 | | < 1.0 + | 26.6 | < 27.6 | < 24.0 | 200 |
| 897.5 | | < 1.0 + | 27.1 | < 28.1 | < 25.4 | 200 |
| 947.3 | | < 1.0 + | 28.0 | < 29.0 | < 28.2 | 200 |
| 997.2 | | < 1.0 + | 28.5 | < 29.5 | < 29.9 | 500 |

=====SUMMARY=====

All data is within limits

Broad-band Antennas were used and both polarizations of emissions were measured.
 polarizations at highest reading indicated as:

H -- Horizontal V -- Vertical

=====

Date: 2000-04-20

TEST REPORT

Page 5 of 7

No.: HM102460


*** INTENTIONAL RADIATOR ***

(2) Measurement of Emissions Within Band Edges

TEST REFERENCE : FCC Rules Part 15 Section 15.235(49.82-49.90 MHz)

TEST CONDITION : Normal

TEST DATE : 2000-04-18

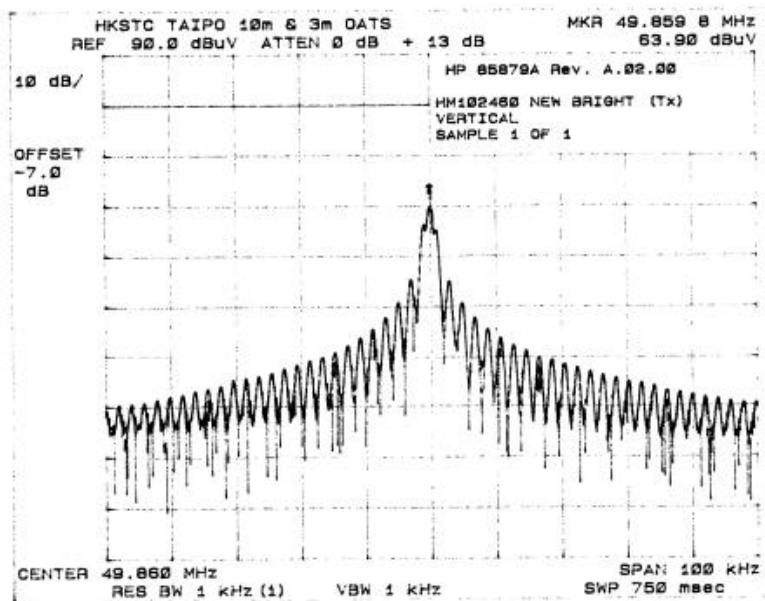

RESULTS AND NOTES

L: FCC Lower Band Edge.....-> 49.820MHz

H: FCC Higher Band Edge.....-> 49.900MHz

C: Unmodulated carrier at frequency.....-> 49.859MHz

D: No. of dB from unmodulated carrier.....-> 63.90dB

SPECTRUM ANALYZER SETTINGS

Resolution bandwidth : 10.3KHz

Frequency span : 10.0KHz/div

No. of dB/div : 10.0dB/div

FCC Limit

Minimum No. of dB from unmodulated carrier required : 26.0dB

=====SUMMARY=====

All data is within limits

=====

NOTES FOR THE RADIATION MEASUREMENT

- (1) Test site facility:
Open field test site located at Taipo (Hong Kong) with a metal ground plane on filed with the FCC pursuant to section 2.948 of the FCC rules.
- (2) Distance between the EUT and measuring antenna:
3 meters.
- (3) Measuring instrumentations:
CISPR Quasi-peak type field strength meter (25 MHz - 1000 MHz). 6 dB bandwidth set at 120KHz. Also, peak level of the fundamental emissions was measured in order to determine compliance with the 20dB peak to average limit specified in Section 15.35(b) of the FCC new Rules.
- (4) Measuring antenna:
Broad band antenna for the frequency range 25-1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the Antenna Factor for measurement data. The antenna are capable of measuring both horizontal and vertical polarizations.
- (5) Frequency range scanned:
The frequency range from 25 MHz to 1000 MHz had been searched. Readings of the highest emissions relating to the limit were reported as above.
- (6) Arrangement of EUT:
During the test, the sample was operated at rated supply voltage and arranged for maximum emissions.
- (7) Measuring Procedure:
In accordance with the relevant clauses of the FCC Rules Part 15 section 15.235.
- (8) Measuring Uncertainty:
The calculated uncertainty for measurement performed at 3M test distance are:-
30MHz to 300MHz = $\pm 3.7\text{dB}$, 300MHz to 1000MHz = $+ 3.0\text{dB}/-2.7\text{dB}$.

Remark: Purpose of this test is to provide the Applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under FCC Equipment Authorization Program. This test itself is not an Approval Test.

End of Document

Date: 2000-04-20

TEST REPORT

Page 7 of 7

No.: HM102460

TEST EQUIPMENT AUDIT

Radiated Emission

| EQP NO. | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | LAST CAL. |
|---------|--|---|--------------------------------|--|-----------|
| EM007 | SPECTRUM ANALYZER | HEWLETT PACKARD | HP85660B | 3144A21192 | 11/06/99 |
| EM008 | SPECTRUM ANALYZER DISPLAY | HEWLETT PACKARD | HP85662A | 3144A20514 | 11/06/99 |
| EM009 | QUASI PEAK ADAPTOR | HEWLETT PACKARD | HP85650A | 3303A01702 | 11/06/99 |
| EM010 | RF PRESELECTOR | HEWLETT PACKARD | HP85685A | 3221A01410 | 11/06/99 |
| EM011 | ATTENUATOR/SWITCH | HEWLETT PACKARD | HP11713A | 2508A10595 | 11/06/99 |
| EM012 | PRE-AMPLIFIER | HEWLETT PACKARD | HP8449B | 3008A00262 | 11/06/99 |
| EM013 | CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD & MOUSE FLOPPY DRIVE | HEWLETT PACKARD HEWLETT PACKARD HEWLETT PACKARD | HP9000 HP A1097C HP9133L | 6226A60314 3151J39517 2623A02468 | CM |
| EM017 | ANTENNA | ARA INC. | LPB-2513/A | 1069 | 17/02/00 |
| EM020 | HORN ANTENNA | EMCO | 3115 | 4032 | 30/06/97 |
| EM072 | SIGNAL GENERATOR | HEWLETT PACKARD | 8640B | 1948A11892 | 30/03/98 |
| EM083 | HKSTC OPEN AREA TEST SITE | HKSTC | N/A | N/A | 15/01/00 |
| EM145 | EMI TEST RECEIVER | R & S | ESCS 30 | 830245/021 | 10/05/99 |

Remarks:-

CM Corrective Maintenance

N/A Not Applicable or Not Available

TBD To Be Determined