

# COLLAGE INVESTMENTS LLC

## Mobile phone

**Main Model: L1 FLYER**

**Serial Model: N/A**

**June 09, 2014**




**Report No.: 14050021-FCC-E**

**(This report supersedes NONE)**



Modifications made to the product : None

This Test Report is Issued Under the Authority of:

|   |   |   |
|---|---|---|
|  |  |  |
| Kevin Tian<br>Compliance Engineer   | Alex Liu<br>Technical Manager   |   |

This test report may be reproduced in full only.  
Test result presented in this test report is applicable to the representative sample only.

# EMC Test Report

To: FCC Part 15 Subpart B Class B: 2013, ANSI C63.4: 2009

**SIEMIC, INC.**  
Accessing global markets



## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to [testing](#) and [certification](#), SIEMIC provides initial design reviews and [compliance management](#) through out a project. Our extensive experience with [China](#), [Asia Pacific](#), [North America](#), [European](#), and [international](#) compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the [global markets](#).

### Accreditations for Conformity Assessment

| Country/Region | Scope                          |
|----------------|--------------------------------|
| USA            | EMC , RF/Wireless , Telecom    |
| Canada         | EMC, RF/Wireless , Telecom     |
| Taiwan         | EMC, RF, Telecom , Safety      |
| Hong Kong      | RF/Wireless ,Telecom           |
| Australia      | EMC, RF, Telecom , Safety      |
| Korea          | EMI, EMS, RF , Telecom, Safety |
| Japan          | EMI, RF/Wireless, Telecom      |
| Singapore      | EMC , RF , Telecom             |
| Europe         | EMC, RF, Telecom , Safety      |

This page has been left blank intentionally.

# CONTENTS

|          |  |           |
|----------|--|-----------|
| <b>1</b> | <b>EXECUTIVE SUMMARY &amp; EUT INFORMATION .....</b>                       | <b>5</b>  |
| <b>2</b> | <b>TECHNICAL DETAILS.....</b>  | <b>6</b>  |
| <b>3</b> | <b>MODIFICATION.....</b>   | <b>7</b>  |
| <b>4</b> | <b>TEST SUMMARY.....</b>   | <b>8</b>  |
| <b>5</b> | <b>MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....</b>                  | <b>9</b>  |
|          | <b>ANNEX A. TEST INSTRUMENTATION &amp; GENERAL PROCEDURES .....</b>        | <b>14</b> |
|          | <b>ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS .....</b>                       | <b>19</b> |
|          | <b>ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....</b>                   | <b>30</b> |
|          | <b>ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST .....</b> | <b>34</b> |
|          | <b>ANNEX E. DECLARATION OF SIMILARITY .....</b>                            | <b>35</b> |

# **1 EXECUTIVE SUMMARY & EUT INFORMATION**

**The purpose of this test programme was to demonstrate compliance of the COLLAGE INVESTMENTS LLC, Mobile phone and Model: L1 FLYER against the current Stipulated Standards. The Mobile phone has demonstrated compliance with the FCC Part 15 Subpart B Class B: 2013, ANSI C63.4: 2009.**

## **EUT Information**

|  |  |
|--|--|
| <b>EUT Description</b>                             | <b>Mobile phone</b>  |
| <b>Main Model</b>                                  | <b>L1 FLYER</b>  |
| <b>Serial Model</b>                                | <b>N/A</b>   |
| <b>Antenna Gain</b>                                | <b>GSM850: -1.87 dBi</b><br><b>PCS1900: -0.75 dBi</b><br><b>UMTS-FDD Band V: -0.62 dBi</b><br><b>UMTS-FDD Band II: -0.62 dBi</b><br><b>Bluetooth/ WIFI: -0.7 dBi</b>                     |
| <b>Input Power</b>                                 | <b>Adapter:</b><br><b>Model: BSN-DB05B</b><br><b>Input: AC 100-240V 50/60Hz 150mA</b><br><b>Output: DC 5V 500mA</b><br><b>RECHARGEABLE BATTERY BH-P4B:</b><br><b>3.7V 1300mAh 4.81Wh</b> |
| <b>Classification Per Stipulated Test Standard</b> | <b>Per FCC Part 15 Subpart B Class B: 2013, ANSI C63.4: 2009</b>   |



Title: EMC Test Report for Mobile phone  
Main Model: L1 FLYER  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14050021-FCC-E  
Issue Date: June 09, 2014  
Page: 6 of 35  
www.siemic.com.cn

## 2 TECHNICAL DETAILS

|                                 |  |
|---------------------------------|--|
| Purpose                         | Compliance testing of Mobile phone with stipulated standards   |
| Applicant / Client              | COLLAGE INVESTMENTS LLC<br>11437 NW 34 STREET, DORAL, FLORIDA 33178 U.S.A.   |
| Manufacturer                    | NINGBO BIRD CO., LTD<br>No.999 Dacheng East Road,Fenghua City,Zhejiang   |
| Laboratory performing the tests | SIEMIC (Nanjing-China) Laboratories<br>NO.2-1,Longcang Dadao, Yuhua Economic Development Zone, Nanjing, China<br>Tel: +86(25)86730128/86730129<br>Fax: +86(25)86730127<br>Email: China@siemic.com.cn   |
| Test report reference number    | 14050021-FCC-E   |
| Date EUT received               | May 19, 2014   |
| Standard applied                | FCC Part 15 Subpart B Class B: 2013, ANSI C63.4: 2009  |
| Dates of test (from – to)       | May 28 to June 06, 2014  |
| Equipment Category              | JBP  |
| No of Units                     | #1   |
| Trade Name                      | LIKUID   |
| RF Operating Frequency (ies)    | GSM850 TX : 824.2 ~ 848.8 MHz; RX : 869.2 ~ 893.8 MHz<br>PCS1900 TX : 1850.2 ~ 1909.8 MHz; RX : 1930.2 ~ 1989.8 MHz<br>UMTS-FDD Band V TX : 826.4 ~ 846.6 MHz; RX : 871.4 ~ 891.6 MHz<br>UMTS-FDD Band II TX : 1852.4 ~ 1907.6 MHz; RX : 1932.4 ~ 1987.6 MHz<br>802.11b/g/n: 2412-2462 MHz<br>Bluetooth: 2402-2480 MHz |
| Number of Channels              | 299CH (PCS1900) and 124CH (GSM850)<br>UMTS-FDD Band V: 102CH<br>UMTS-FDD Band II : 277CH<br>Bluetooth: 79CH<br>802.11b/g/n: 11CH   |
| Modulation                      | GSM / GPRS: GMSK<br>UMTS-FDD: QPSK<br>802.11b/g/n: DSSS/OFDM<br>Bluetooth: GFSK  |
| GPRS Multi-slot class           | 8/10/12  |
| Port                            | Earphone Port, USB Port  |
| FCC ID                          | GAO-FLYER  |



**SIEMIC, INC.**

Title: EMC Test Report for Mobile phone  
Main Model: L1 FLYER  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14050021-FCC-E  
Issue Date: June 09, 2014  
Page: 7 of 35  
[www.siemic.com.cn](http://www.siemic.com.cn)

### **3 MODIFICATION**

**NONE**

## 4 TEST SUMMARY

The product was tested in accordance with the following specifications.  
All testing has been performed according to below product classification:

### Class B Emission Product

### Test Results Summary

| Emissions  |                     |               |             |
|--|---------------------|---------------|-------------|
| Test Standard  | Description         | Product Class | Pass / Fail |
| FCC Part 15 Subpart B Class B:<br>2013, ANSI C63.4: 2009 | Conducted Emissions | See Above     | Pass        |
| FCC Part 15 Subpart B Class B:<br>2013, ANSI C63.4: 2009 | Radiated Emissions  | See Above     | Pass        |

All measurement uncertainty is not taken into consideration for all presented test result.



## 5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

### 5.1 Conducted Emissions Test Result

Note:


1. All possible modes of operation were investigated. Only the several worst case emissions measured, using the correct CISPR and Average detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is  $\pm 3.86\text{dB}$ .
4. Environmental Conditions

|                      |          |
|----------------------|----------|
| Temperature          | 20°C     |
| Relative Humidity    | 50%      |
| Atmospheric Pressure | 1009mbar |
5. Test date : May 28, 2014  
Tested By : Kevin Tian

**Test Result: Pass**

|            |                                      |
|------------|--------------------------------------|
| Test Mode: | Charging and Downloading(Worse Case) |
|------------|--------------------------------------|

Peak Detector  Quasi Peak Limit   
 Average Detector  Average Limit 

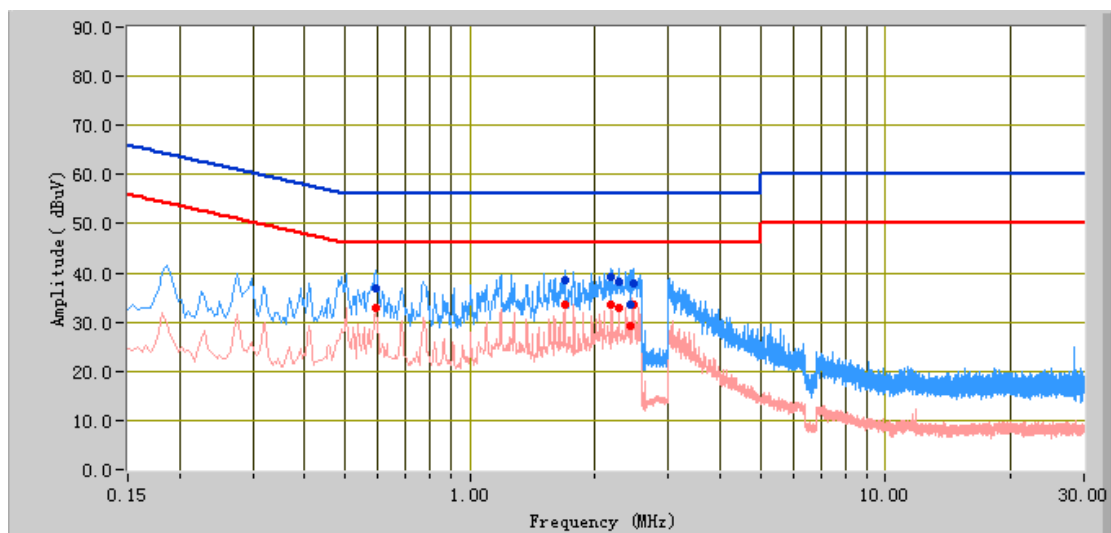


## Test Data

### Phase Line Plot at 120V AC, 60Hz

| Frequency (MHz) | Quasi Peak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Factors (dB) |
|-----------------|---------------------|----------------|-------------|------------------|----------------|-------------|--------------|
| 2.47            | 37.78               | 56.00          | -18.22      | 33.68            | 46.00          | -12.32      | 10.88        |
| 2.19            | 39.11               | 56.00          | -16.89      | 33.49            | 46.00          | -12.51      | 10.88        |
| 2.28            | 38.06               | 56.00          | -17.94      | 32.98            | 46.00          | -13.02      | 10.88        |
| 1.69            | 38.45               | 56.00          | -17.55      | 33.56            | 46.00          | -12.44      | 10.82        |
| 2.42            | 33.54               | 56.00          | -22.46      | 29.16            | 46.00          | -16.84      | 10.88        |
| 0.59            | 36.88               | 56.00          | -19.12      | 32.96            | 46.00          | -13.04      | 11.01        |

|            |                                      |
|------------|--------------------------------------|
| Test Mode: | Charging and Downloading(Worse Case) |
|------------|--------------------------------------|

Peak Detector  Quasi Peak Limit   
 Average Detector  Average Limit 

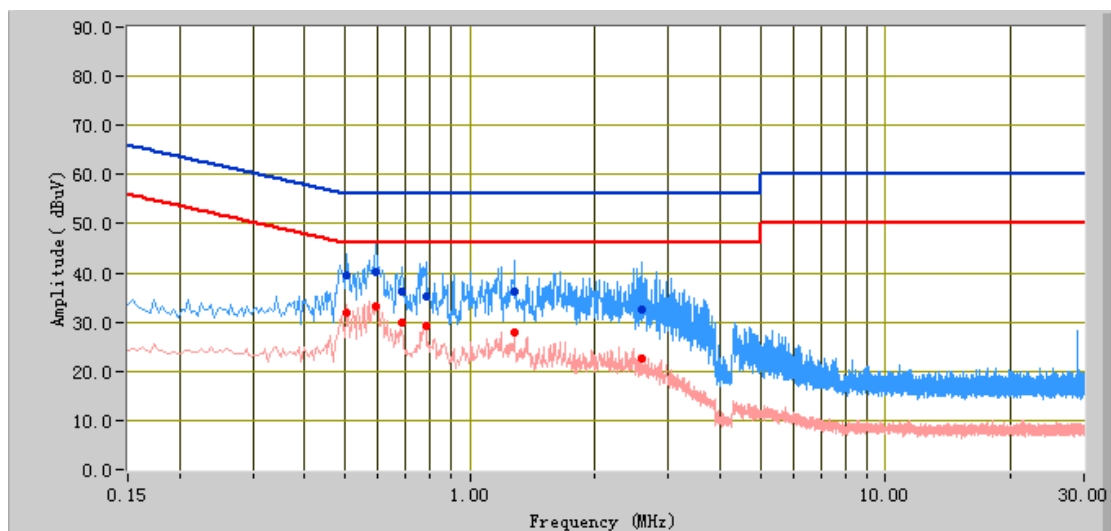

## Test Data

### Phase Natural Plot at 120V AC, 60Hz

| Frequency (MHz) | Quasi Peak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Factors (dB) |
|-----------------|---------------------|----------------|-------------|------------------|----------------|-------------|--------------|
| 0.59            | 40.17               | 56.00          | -15.83      | 33.30            | 46.00          | -12.70      | 10.99        |
| 0.50            | 39.42               | 56.00          | -16.58      | 31.95            | 46.00          | -14.05      | 11.06        |
| 1.28            | 36.24               | 56.00          | -19.76      | 27.74            | 46.00          | -18.26      | 10.76        |
| 2.60            | 32.58               | 56.00          | -23.42      | 22.59            | 46.00          | -23.41      | 10.93        |
| 0.78            | 35.20               | 56.00          | -20.80      | 29.18            | 46.00          | -16.82      | 10.86        |
| 0.69            | 36.36               | 56.00          | -19.64      | 29.84            | 46.00          | -16.16      | 10.93        |

## 5.2 Radiated Emissions Test Result

### Note:



1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 1GHz (QP only @ 3m & 10m) is +6dB/-6dB (for EUTs < 0.5m X 0.5m X 0.5m).
4. 


|                          |                      |          |
|--------------------------|----------------------|----------|
| Environmental Conditions | Temperature          | 20°C     |
|                          | Relative Humidity    | 50%      |
|                          | Atmospheric Pressure | 1011mbar |
5. Test date : June 06, 2014  
Tested By : Kevin Tian

**Test Result: Pass**

|                   |   |
|-------------------|---|
| <b>Test Mode:</b> | <b>Charging and Downloading(Worse Case)</b> |
|-------------------|---|

### Below 1GHz

Peak Detector   
 Quasi Peak Limit 

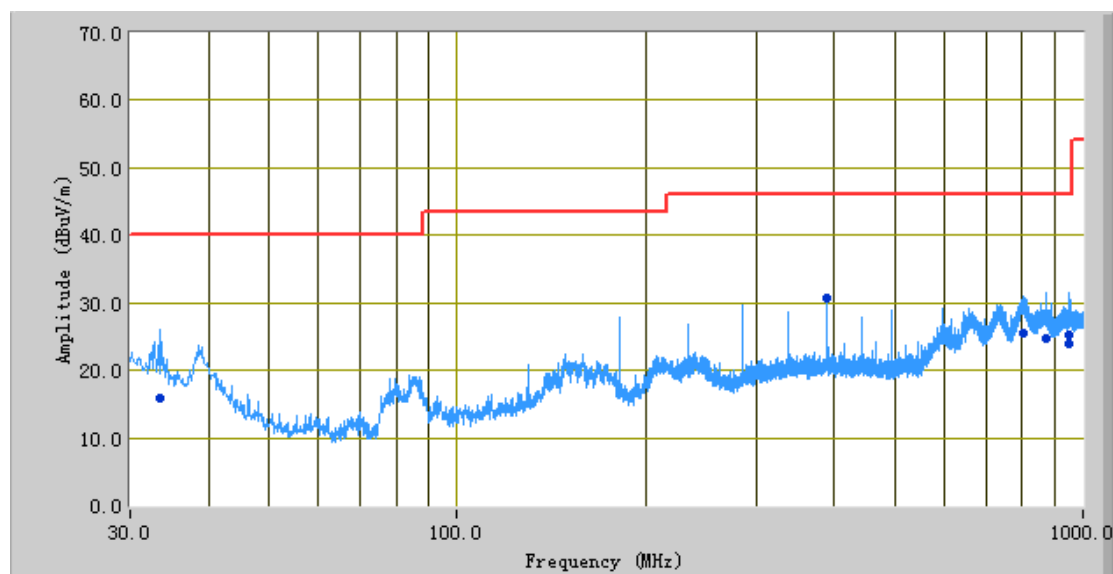

### Test Data

#### Vertical & Horizontal Polarity Plot at 3m

| Frequency (MHz) | Quasi Peak (dBμV/m) | Azimuth | Polarity (H/V) | Height (cm) | Factors (dB) | Limit (dBμV/m) | Margin (dB) |
|-----------------|---------------------|---------|----------------|-------------|--------------|----------------|-------------|
| 33.41           | 15.85               | 153.00  | H              | 220.00      | -25.92       | 40.00          | -24.15      |
| 870.61          | 24.69               | 235.00  | V              | 244.00      | -18.21       | 46.00          | -21.31      |
| 951.40          | 23.84               | 6.00    | H              | 365.00      | -18.13       | 46.00          | -22.16      |
| 389.99          | 30.75               | 26.00   | V              | 194.00      | -28.28       | 46.00          | -15.25      |
| 802.42          | 25.47               | 238.00  | V              | 110.00      | -17.48       | 46.00          | -20.53      |
| 951.45          | 25.20               | 208.00  | H              | 245.00      | -18.13       | 46.00          | -20.80      |

Note: The data above 1 GHz which below 20 dB to the limit was not recorded.

## **Annex A. TEST INSTRUMENTATION & GENERAL PROCEDURES**


### **Annex A.i. TEST INSTRUMENTATION**

| Instrument                                  | Model                  | Serial #       | Calibration Date | Calibration Due Date |
|---|------------------------|----------------|------------------|----------------------|
| <b>AC Line Conducted Emissions</b>          |                        |                |                  |                      |
| R&S EMI Test Receiver                       | ESPI3                  | 101216         | 09/27/2013       | 09/26/2014           |
| ROHDE&SCHWARZ V-LISN                        | ESH3-Z5                | 838979/005     | 09/27/2013       | 09/26/2014           |
| Com-Power Transient Limiter                 | LIT-153                | 531021         | 09/27/2013       | 09/26/2014           |
| SIEMIC Labview Conducted Emissions software | V1.0                   | N/A            | N/A              | N/A                  |
| <b>Radiated Emissions</b>                   |                        |                |                  |                      |
| Hp Spectrum Analyzer                        | 8563E                  | 3821A09023     | 09/27/2013       | 09/26/2014           |
| R&S EMI Receiver                            | ESPI3                  | 101216         | 09/27/2013       | 09/26/2014           |
| Antenna (30MHz~6GHz)                        | JB6                    | A121411        | 04/15/2014       | 04/14/2015           |
| ETS-Lindgren Antenna (1 ~18GHz)             | 3115                   | N/A            | 10/09/2013       | 10/08/2014           |
| A-INFOMW Antenna (1 ~18GHz)                 | JXTXLB-10180           | J2031081120092 | 10/09/2013       | 10/08/2014           |
| Horn Antenna (18~40GHz)                     | AH-840                 | 101013         | 04/22/2014       | 04/22/2015           |
| Microwave Pre-Amp (18~40GHz)                | PA-840                 | 181250         | 05/29/2014       | 05/28/2015           |
| Hp Agilent Pre-Amplifier                    | 8447F                  | 1937A01160     | 10/27/2013       | 10/26/2014           |
| MITEQ Pre-Amplifier (0.1 ~ 18GHz)           | AMF-7D-00101800-30-10P | 1451709        | 10/27/2013       | 10/26/2014           |
| Chamber                                     | 3m                     | N/A            | 04/13/2014       | 04/12/2015           |
| SIEMIC Labview Radiated Emissions software  | V1.0                   | N/A            | N/A              | N/A                  |

## Annex A.ii. AC LINE CONDUCTED EMISSIONS TEST DESCRIPTION

### Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.
2. The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipments were powered separately from another main supply.

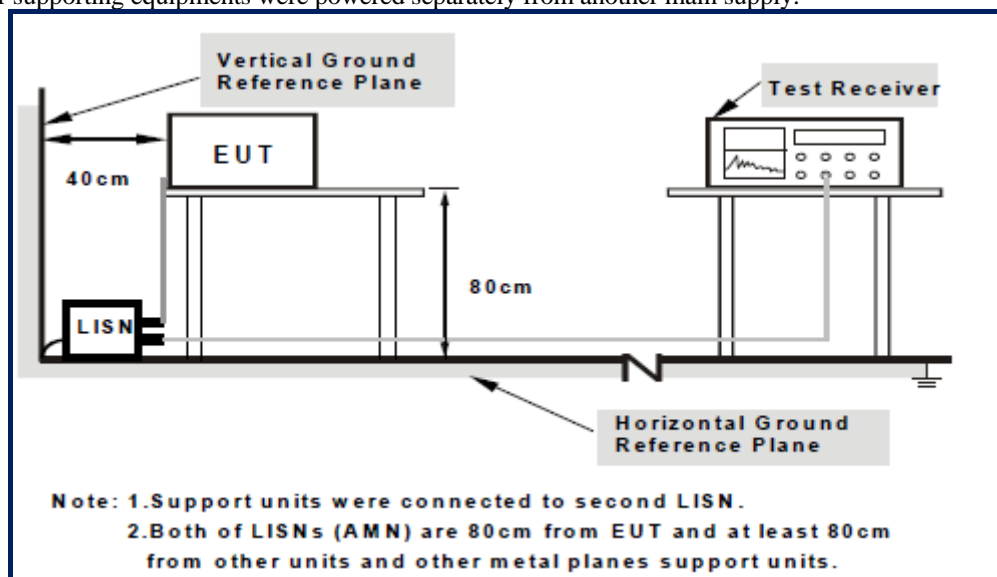


For the actual test configuration, please refer to the related item – Photographs of the Test Configuration1

### Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line (for AC mains) or DC line (for DC power).

### Description of Conducted Emission Program

This EMC Measurement software run LabView automation software and offers a common user interface for electromagnetic interference (EMI) measurements. This software is a modern and powerful tool for controlling and monitoring EMI test receivers and EMC test systems. It guarantees reliable collection, evaluation, and documentation of measurement results. Basically, this program will run a pre-scan measurement before it proceeds with the final measurement. The pre-scan routine will run the common scan range from 150 kHz to 30 MHz; the program will first start a peak and average scan on selectable measurement time and step size. After the program complete the pre-scan, this program will perform the Quasi Peak and Average measurement, based on the pre-scan peak data reduction result.

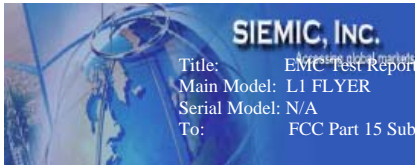

Title: EMC Test Report for Mobile phone  
Main Model: L1 FLYER  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14050021-FCC-E  
Issue Date: June 09, 2014  
Page: 16 of 35  
www.siemic.com.cn

### **Sample Calculation Example**

At 20 MHz

limit =  $250 \mu\text{V} = 47.96 \text{ dB}\mu\text{V}$

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.20 dB

Q-P reading obtained directly from EMI Receiver =  $40.00 \text{ dB}\mu\text{V}$   
(Calibrated for system losses)

Therefore, Q-P margin =  $47.96 - 40.00 = 7.96$  i.e. **7.96 dB below limit**



## **Annex A. iii. RADIATED EMISSIONS TEST DESCRIPTION**


### **EUT Characterisation**

EUT characterisation, over the frequency range from 30MHz to 10<sup>th</sup> Harmonic, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8 m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer /receiver with the appropriate broadband antenna placed 3m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred; clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS) or 3m EMC chamber.

### **Test Set-up**

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5mX1.0mX0.8m high, non-conductive table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

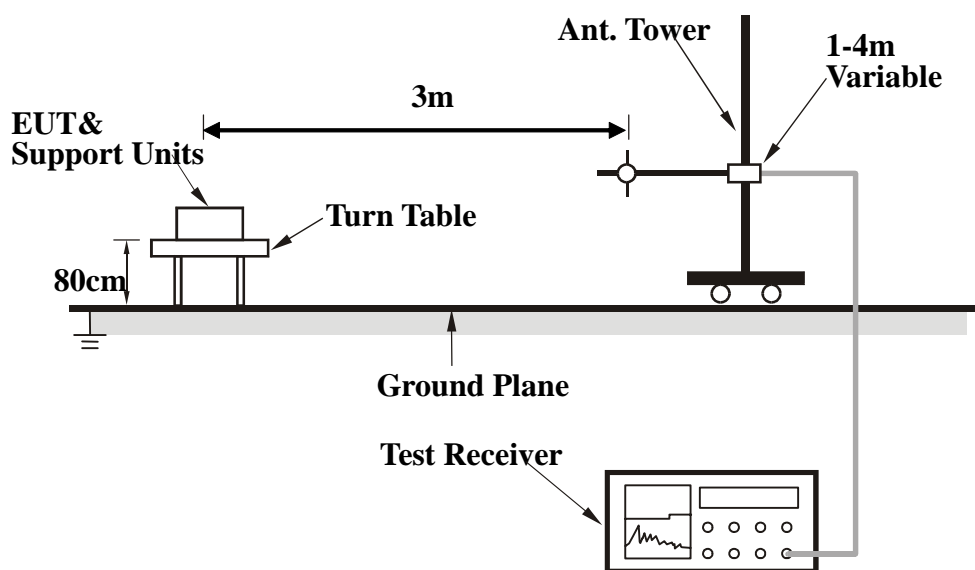

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration2

## **Test Method**

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

### **Final Radiated Emission Measurement**

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on an open test site. As the same purpose, for emission frequencies measured above 1GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1GHz, set the spectrum analyzer on a 100kHz and 1MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured was complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

| Frequency Band (MHz) | Function | Resolution bandwidth | Video Bandwidth |
|----------------------|----------|----------------------|-----------------|
| 30 to 1000           | Peak     | 100kHz               | 100kHz          |
| Above 1000           | Peak     | 1MHz                 | 1MHz            |
|                      | Average  | 1MHz                 | 10Hz            |

## **Sample Calculation Example**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

Corr. Factor = Antenna Factor + Cable Factor - Amplifier Gain (if any)

And the average value is

$$\begin{aligned} \text{Average} &= \text{Peak Value} + \text{Duty Factor or} \\ \text{Set RBW} &= 1\text{MHz, VBW} = 10\text{Hz.} \end{aligned}$$

Note:

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1GHz. And the measuring instrument is set to quasi peak detector function.

## **Annex B. EUT AND TEST SETUP PHOTOGRAPHS**

### **Annex B.i. Photograph : EUT External Photo**



All Packages – Front View



EUT - Front View



EUT - Rear View



## SIEMIC, INC.

Title: EMC TEST Report for Mobile phone  
Main Model: L1 FLYER  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14050021-FCC-E  
Issue Date: June 09, 2014  
Page: 21 of 35  
[www.siemic.com.cn](http://www.siemic.com.cn)



EUT – Top View



EUT – Bottom View





# SIEMIC, INC.

Title: EMC Test Report for Mobile phone  
Main Model: L1 FLYER  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14050021-FCC-E  
Issue Date: June 09, 2014  
Page: 22 of 35  
[www.siemic.com.cn](http://www.siemic.com.cn)



EUT – Left View



EUT – Right View

**Annex B.ii. Photograph 2: EUT Internal Photo**



EUT – Uncover Front View 1



EUT – Uncover Front View 2



## SIEMIC, INC.

Title: EMC Test Report for Mobile phone  
Main Model: L1 FLYER  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14050021-FCC-E  
Issue Date: June 09, 2014  
Page: 24 of 35  
[www.siemic.com.cn](http://www.siemic.com.cn)



EUT – Battery Front View



EUT – Battery Rear View






## SIEMIC, INC.

Title: EMC Test Report for Mobile phone  
Main Model: L1 FLYER  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14050021-FCC-E  
Issue Date: June 09, 2014  
Page: 25 of 35  
[www.siemic.com.cn](http://www.siemic.com.cn)



LCD - Front View

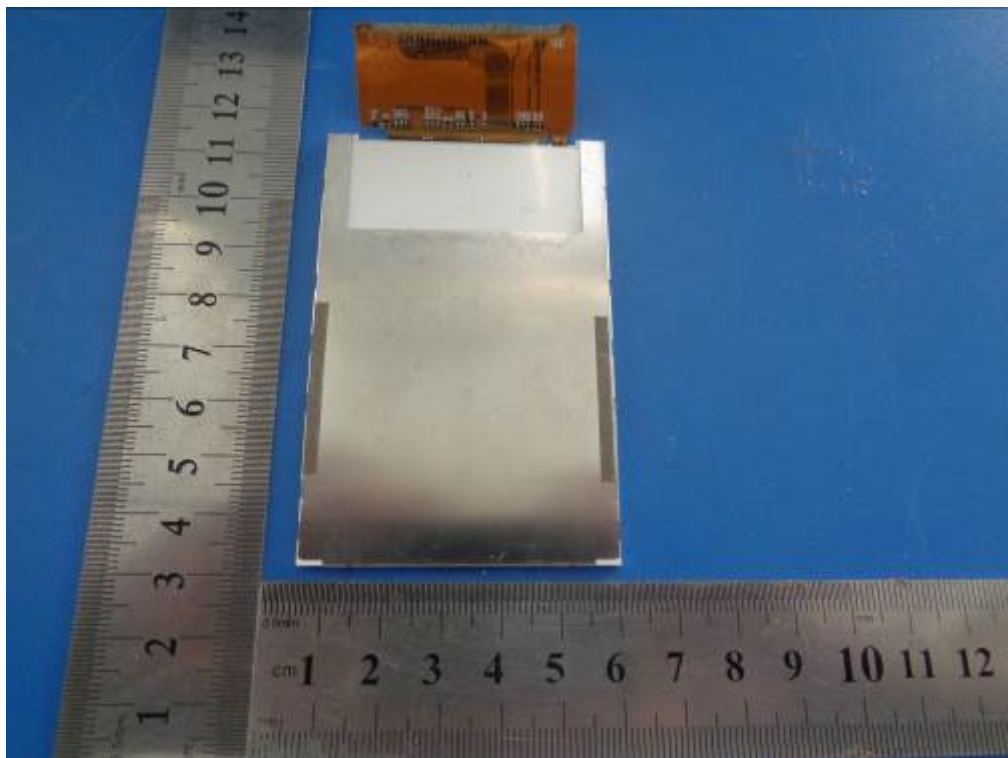

LCD - Rear View




## SIEMIC, INC.

Title: EMC Test Report for Mobile phone  
Main Model: L1 FLYER  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14050021-FCC-E  
Issue Date: June 09, 2014  
Page: 26 of 35  
[www.siemic.com.cn](http://www.siemic.com.cn)



EUT – PCB Front View

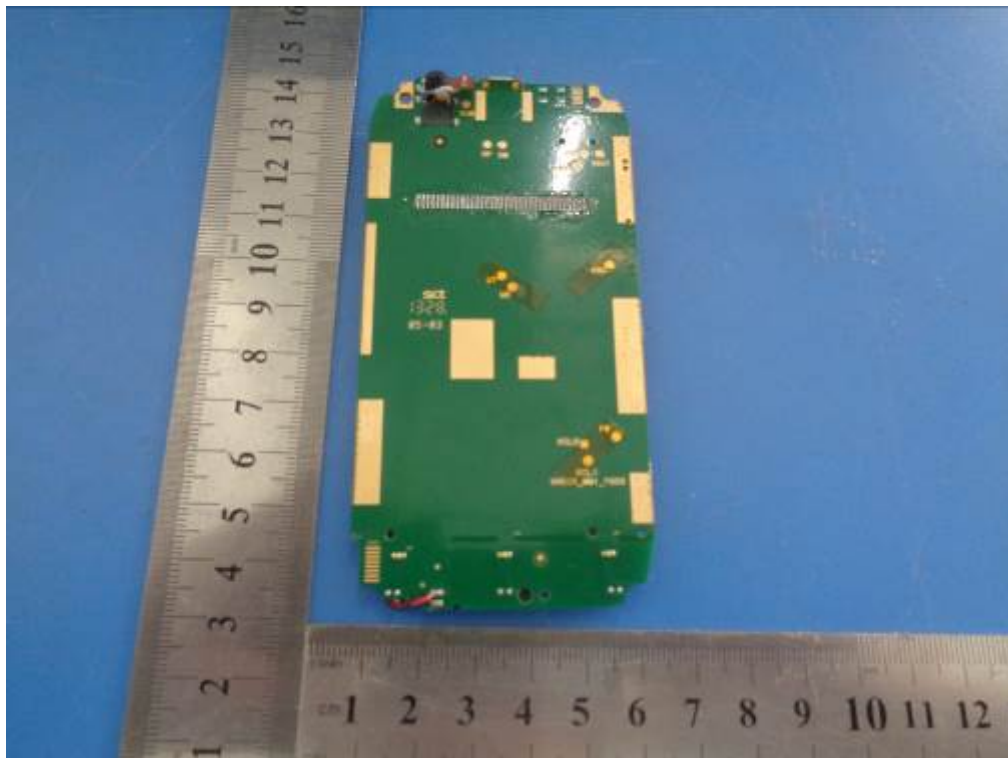


EUT – PCB Rear View



## SIEMIC, INC.

Title: EMC Test Report for Mobile phone  
Main Model: L1 FLYER  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14050021-FCC-E  
Issue Date: June 09, 2014  
Page: 27 of 35  
[www.siemic.com.cn](http://www.siemic.com.cn)

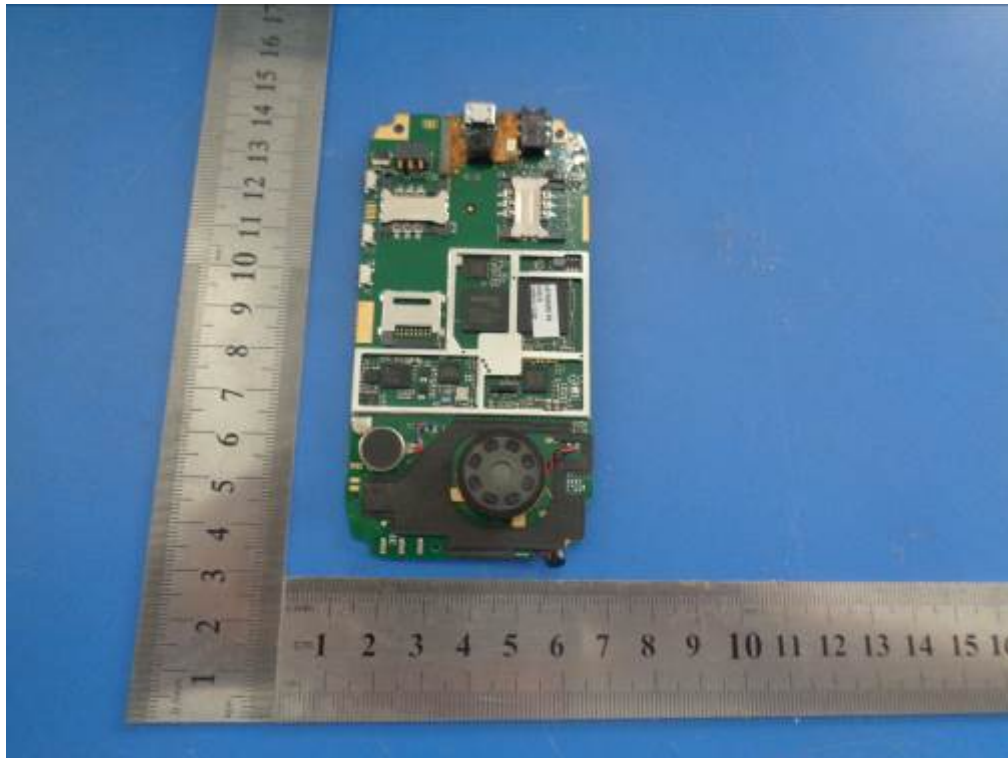

EUT – PCB Shielding Off Front View



Title: EMC Test Report for Mobile phone  
Main Model: L1 FLYER  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14050021-FCC-E  
Issue Date: June 09, 2014  
Page: 28 of 35  
www.siemic.com.cn

### **Annex B.iii. Photograph 3: Test Setup Photo**



Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View







**SIEMIC, INC.**

Title: EMC Test Report for Mobile phone  
Main Model: L1 FLYER  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14050021-FCC-E  
Issue Date: June 09, 2014  
Page: 29 of 35  
[www.siemic.com.cn](http://www.siemic.com.cn)

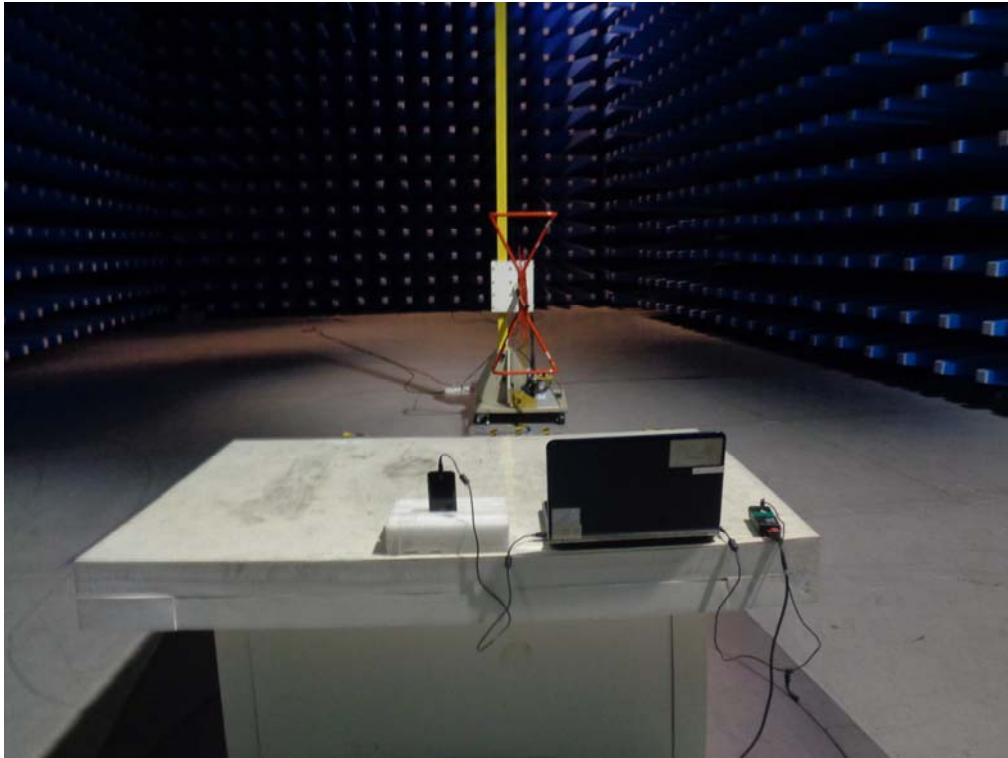

Radiated Emissions Test Setup Below 1GHz - Front View

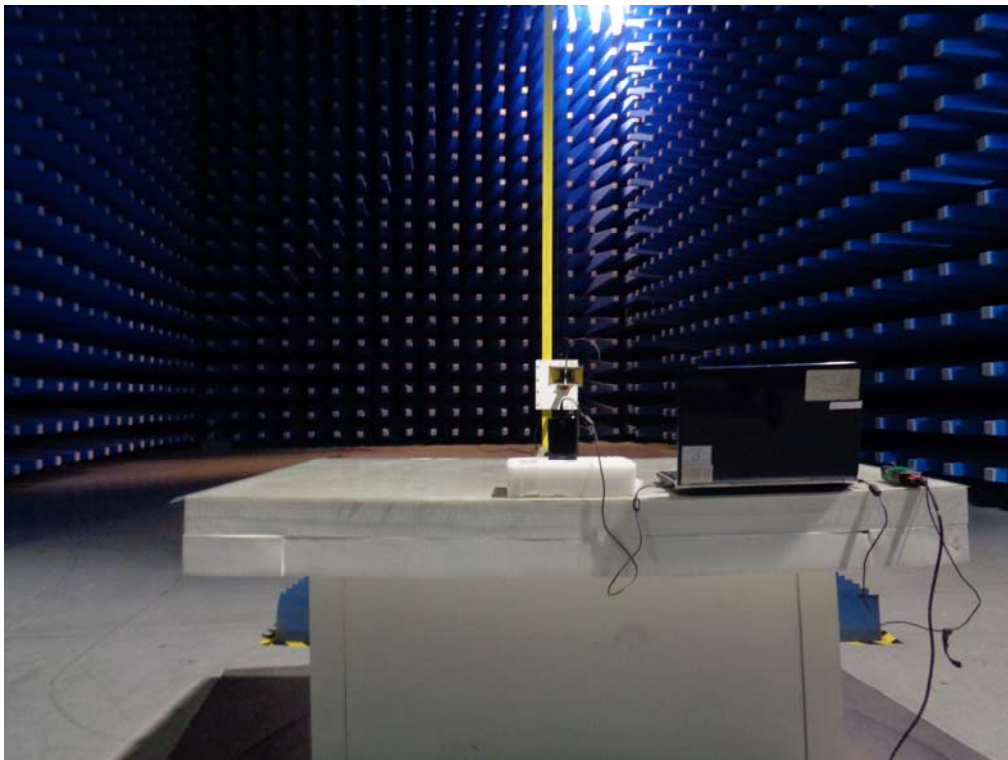

Radiated Emissions Test Setup Above 1GHz–Front View

**Annex C. TEST SETUP AND SUPPORTING EQUIPMENT**


**EUT TEST CONDITIONS**

**Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION**


The following is a description of supporting equipment and details of cables used with the EUT.

| Manufacturer | Equipment Description<br>(Including Brand Name) | Model                                  | Calibration Due Date |
|--------------|---|--|----------------------|
| Gateway      | Laptop  | MS2288 &<br>LXWHF02013951C3CA<br>92200 | N/A                  |

Block Configuration Diagram for Conducted Emissions

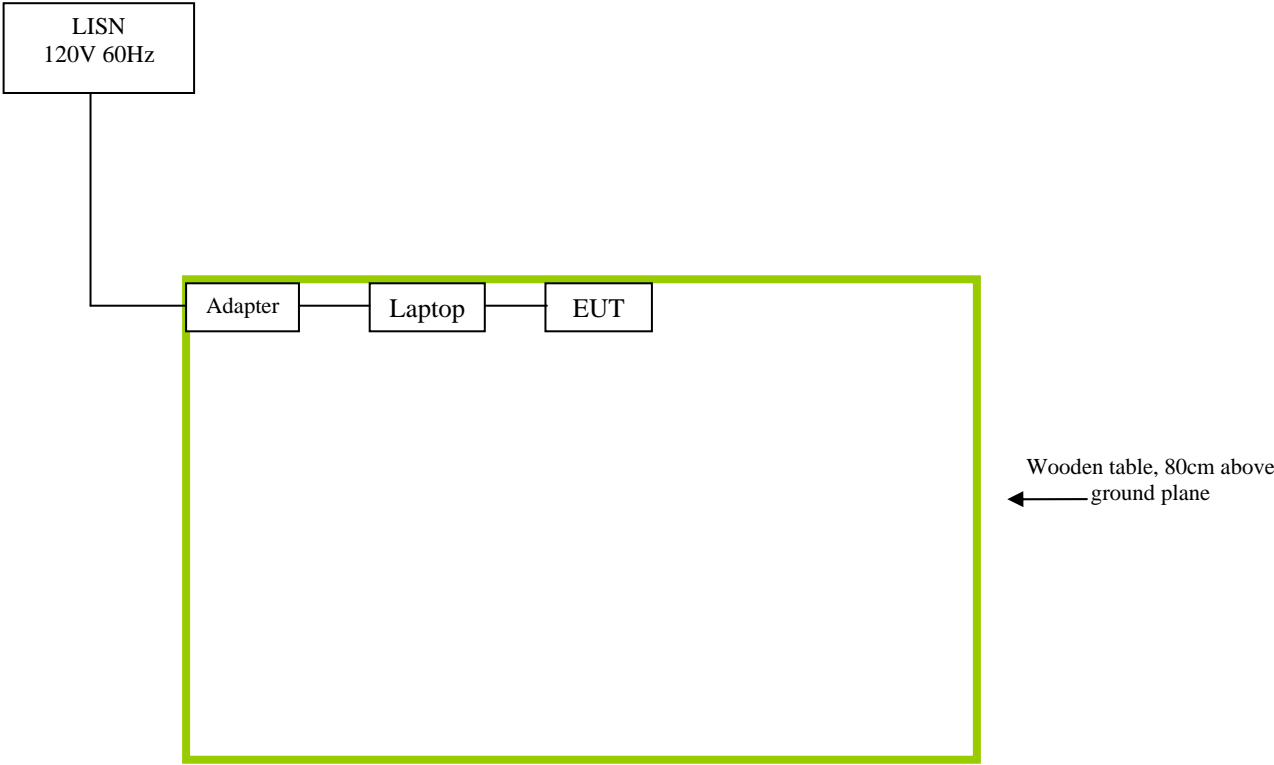

Block Configuration Diagram for Radiated Emission

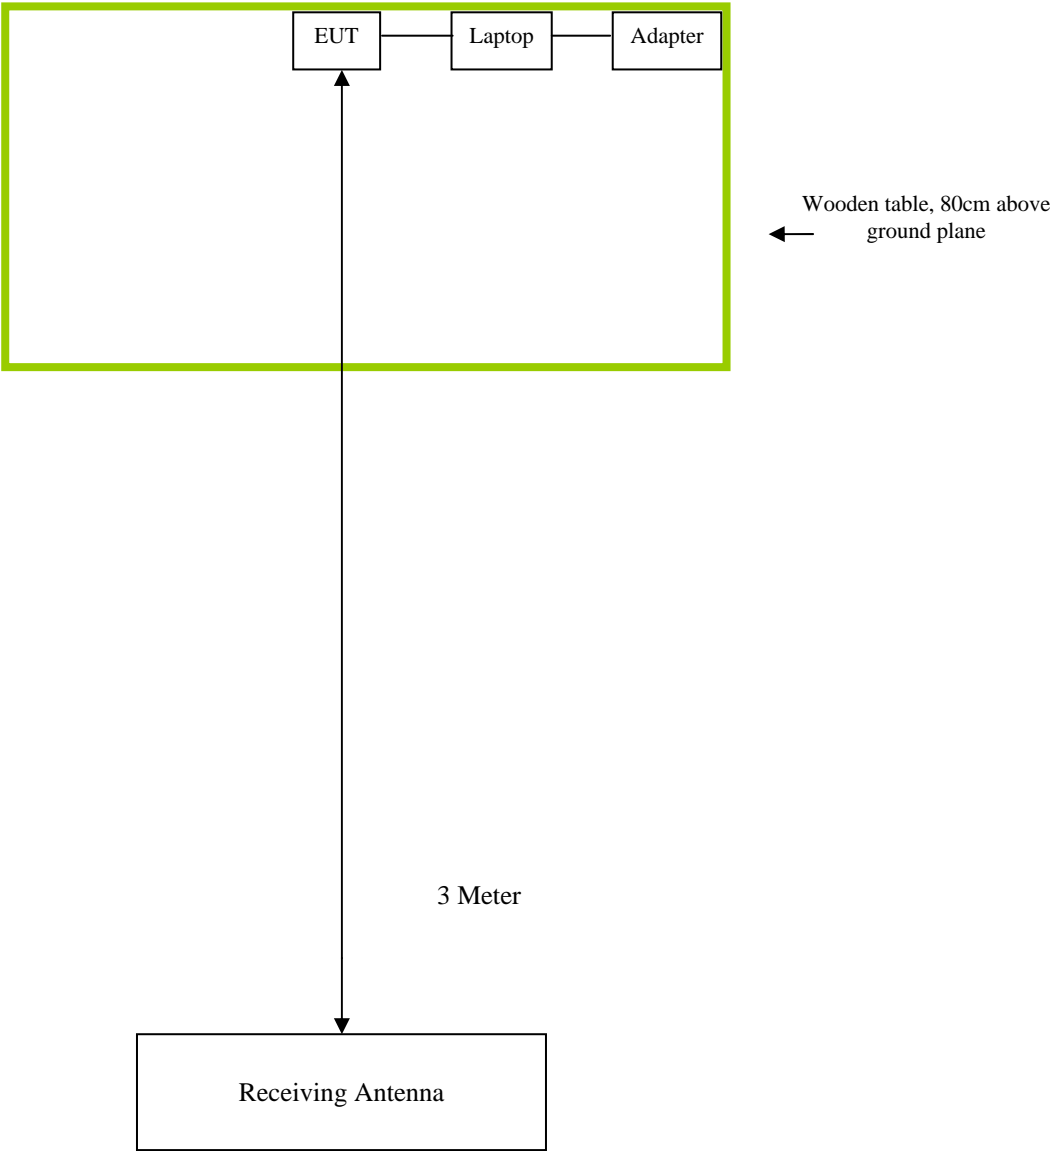



## **Annex C.ii. EUT OPERATING CONDITIONS**

The following is the description of how the EUT is exercised during testing.

| Test      | Description Of Operation             |
|-----------|--------------------------------------|
| Emissions | Charging and Downloading(Worse Case) |

**Annex D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST**

**Please see attachment**

## **Annex E. DECLARATION OF SIMILARITY**

N/A