

TEST REPORT

FCC ID: GAO-SNTANK3

Product: MOBILE PHONE

Model No.: SNAP TANK 3

Additional Model No.: N/A

Trade Mark: S SMOOTH

Report No.: TCT201116E008

Issued Date: Nov. 30, 2020

Issued for:

Collage Investments LLC.

6030 NW 99 Ave #414, Doral, Florida 33178, United States

Issued By:

Shenzhen Tongce Testing Lab.

1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District, Shenzhen, Guangdong, China

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com





TABLE OF CONTENTS

1.	Test Certification		
2.	Test Result Summary	(0)	4
3.	EUT Description		5
4.	General Information		6
	4.1. Test environment and mode		6
	4.2. Description of Support Units		6
5 .	Facilities and Accreditations	<u>(6)</u>	7
	5.1. Facilities		7
	5.2. Location		
	5.3. Measurement Uncertainty		7
6.	Test Results and Measurement Data		8
	6.1. Antenna requirement		
	6.2. Conducted Emission		9
	6.3. Conducted Output Power		
	6.4. 20dB Occupy Bandwidth		
	6.5. Carrier Frequencies Separation		15
	6.6. Hopping Channel Number		
	6.7. Dwell Time		
	6.8. Pseudorandom Frequency Hopping Sequence		19
	6.9. Conducted Band Edge Measurement		
	6.10.Conducted Spurious Emission Measurement		21
	6.11.Radiated Spurious Emission Measurement		22
Δ	ppendix A: Test Result of Conducted Test		
Δ	ppendix B: Photographs of Test Setup		
Δ	ppendix C: Photographs of EUT		



1. Test Certification

Product:	MOBILE PHONE
Model No.:	SNAP TANK 3
Additional Model No.:	N/A
Trade Mark:	S SMOOTH
Applicant:	Collage Investments LLC.
Address:	6030 NW 99 Ave #414, Doral, Florida 33178, United States
Manufacturer:	Collage Investments LLC.
Address:	6030 NW 99 Ave #414, Doral, Florida 33178, United States
Date of Test:	Nov. 17, 2020 – Nov. 27, 2020
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247 FCC KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Brens Xu

Date: Nov. 27, 2020

Brews Xu

Reviewed By:

Date: N

Nov. 30, 2020

Approved By:

Date:

Nov. 30, 2020



2. Test Result Summary

Requirement	CFR 47 Section	Result		
Antenna Requirement	§15.203/§15.247 (c)	PASS		
AC Power Line Conducted Emission	§15.207	PASS		
Conducted Peak Output Power	§15.247 (b)(1)	PASS		
20dB Occupied Bandwidth	§15.247 (a)(1)	PASS		
Carrier Frequencies Separation	§15.247 (a)(1)	PASS		
Hopping Channel Number	§15.247 (a)(1)	PASS		
Dwell Time	§15.247 (a)(1)	PASS		
Radiated Emission	§15.205/§15.209	PASS		
Band Edge	§15.247(d)	PASS		

Note:

- 1. PASS: Test item meets the requirement.
- 2. Fail: Test item does not meet the requirement.
- 3. N/A: Test case does not apply to the test object.
- 4. The test result judgment is decided by the limit of test standard.





3. EUT Description

Product:	MOBILE PHONE
Model No.:	SNAP TANK 3
Additional Model No.:	N/A
Trade Mark:	S SMOOTH
Bluetooth Version:	V2.1+EDR
Operation Frequency:	2402MHz~2480MHz
Transfer Rate:	1/2/3 Mbits/s
Number of Channel:	79
Modulation Type:	GFSK, π/4-DQPSK, 8DPSK
Modulation Technology:	FHSS
Antenna Type:	Internal Antenna
Antenna Gain:	3.1dBi
Power Supply:	Rechargeable Li-ion Battery DC 3.7V
AC adapter:	Adapter Information: Model: Rok 2 Input: AC 100-240V, 50/60Hz, 0.15A Output: DC 5.0V, 1A

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

Operation Frequency each of channel for GFSK, π/4-DQPSK, 8DPSK

Operation	ni i roquono	y caon c	i onamino i	<u> </u>	, 117 T DQ1 O	1 1, 0 01 01	1
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
9)1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		-
Bl. J	01	0.070 1		1	EOI/ // D/	ODOK OF	NDOI/

Remark: Channel 0, 39 &78 have been tested for GFSK, $\pi/4$ -DQPSK, 8DPSK modulation mode.



4. General Information

4.1. Test environment and mode

Operating Environment:									
Condition	Conducted Emission	Radiated Emission							
Temperature:	25.0 °C	25.0 °C							
Humidity:	55 % RH	55 % RH							
Atmospheric Pressure:	1010 mbar	1010 mbar							
Test Mode:									
Engineering mode:	Keep the EUT in continuous	transmitting by select							

The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case(Z axis) are shown in Test Results of the following pages. DH1 DH3 DH5 all have been tested, only worse case DH1 is reported.

channel and modulations with Fully-charged battery

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
1	1	1	1	1

Note:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
- 3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



TESTING CENTRE TECHNOLOGY Report No.: TCT201116E008

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

• FCC - Registration No.: 645098

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

• IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of SHENZHEN TONGCE TESTING LAB has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

5.2. Location

Shenzhen Tongce Testing Lab.

Address: 1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District,

Shenzhen, Guangdong, China

Tel: 86-755-27673339

5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	±2.56dB
2	RF power, conducted	±0.12dB
3	Spurious emissions, conducted	±0.11dB
4	All emissions, radiated(<1G)	±3.92dB
5	All emissions, radiated(>1G)	±4.28dB
6	Temperature	±0.1°C
7	Humidity	±1.0%



6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The Bluetooth antenna is internal antenna which permanently attached, and the best case gain of the antenna is 3.1dBi.

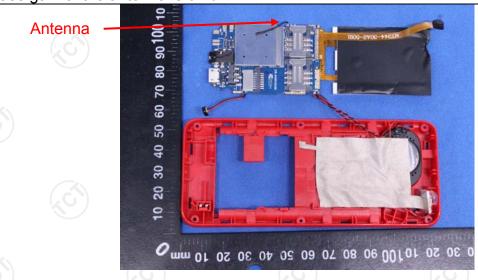



6.2. Conducted Emission

6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section	15.207	E.						
Test Method:	ANSI C63.10:2013								
Frequency Range:	150 kHz to 30 MHz								
Receiver setup: RBW=9 kHz, VBW=30 kHz, Sweep time=auto									
Limits:	Frequency range (MHz) 0.15-0.5 0.5-5 5-30	Limit (Quasi-peak 66 to 56* 56 60	dBuV) Average 56 to 46* 46 50						
Reference Plane 40cm 80cm Filter AC power E.U.T AC power Filter AC power EMI Receiver Remark: E.U.T. Equipment Under Test LISN Line Impedence Stabilization Network Test table height=0.8m									
Test Mode:	Refer to item 4.1								
Test Procedure:	 The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 								



6.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)										
Equipment	Manufacturer	Model	Serial Number	Calibration Due						
Test Receiver	R&S	ESCI3	100898	Jul. 27, 2021						
LISN-2	Schwarzbeck	NSLK 8126	8126453	Sep. 11, 2021						
Line-5	TCT	CE-05	N/A	Sep. 02, 2021						
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A						






6.2.3. Test data

Report No.: TCT201116E008

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

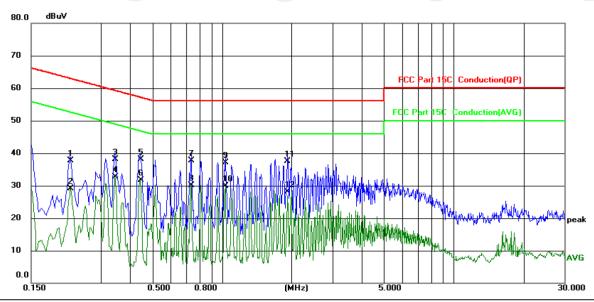

Site Phase: L1 Temperature: 25 (C)
Limit: FCC Part 15C Conduction(QP) Power: AC120V/60Hz Humidity: 55 %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2220	27.57	10.11	37.68	62.74	-25.06	QP	
2		0.2220	18.90	10.11	29.01	52.74	-23.73	AVG	
3		0.3460	28.02	10.12	38.14	59.06	-20.92	QP	
4		0.3460	22.60	10.12	32.72	49.06	-16.34	AVG	
5		0.4460	28.06	10.13	38.19	56.95	-18.76	QP	
6	*	0.4460	21.67	10.13	31.80	46.95	-15.15	AVG	
7		0.7380	27.58	10.15	37.73	56.00	-18.27	QP	
8		0.7380	20.05	10.15	30.20	46.00	-15.80	AVG	
9		1.0339	26.93	10.17	37.10	56.00	-18.90	QP	
10		1.0339	19.65	10.17	29.82	46.00	-16.18	AVG	
11		1.9180	27.25	10.24	37.49	56.00	-18.51	QP	
12		1.9180	17.78	10.24	28.02	46.00	-17.98	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level $(dB\mu V)$ = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement $(dB\mu V)$ = Reading level $(dB\mu V)$ + Corr. Factor (dB)

 $Limit (dB\mu V) = Limit stated in standard$

 $Margin (dB) = Measurement (dB\mu V) - Limits (dB\mu V)$

Q.P. =Quasi-Peak


AVG =average

^{*} is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.





Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

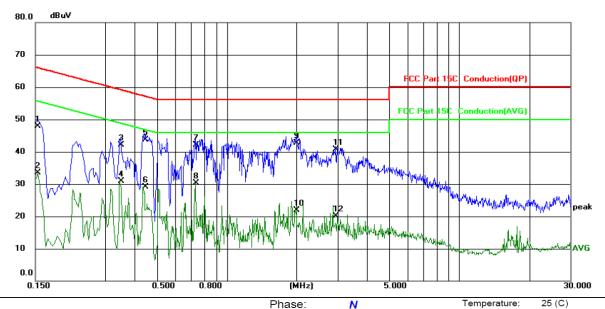

Limit: FCC Part 15C Conduction(QP)

Power: AC120V/60Hz Humidity: 55 %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBu∨	dBuV	dB	Detector	Comment
1		0.1539	37.77	10.11	47.88	65.79	-17.91	QP	
2		0.1539	23.31	10.11	33.42	55.79	-22.37	AVG	
3		0.3500	31.89	10.12	42.01	58.96	-16.95	QP	
4		0.3500	20.82	10.12	30.94	48.96	-18.02	AVG	
5	*	0.4460	33.63	10.13	43.76	56.95	-13.19	QP	
6		0.4460	18.93	10.13	29.06	46.95	-17.89	AVG	
7		0.7340	31.99	10.15	42.14	56.00	-13.86	QP	
8		0.7340	20.21	10.15	30.36	46.00	-15.64	AVG	
9		1.9940	32.38	10.24	42.62	56.00	-13.38	QP	
10		1.9940	11.66	10.24	21.90	46.00	-24.10	AVG	
11		2.9380	30.49	10.30	40.79	56.00	-15.21	QP	
12		2.9380	9.82	10.30	20.12	46.00	-25.88	AVG	

Note1:

Freq. = Emission frequency in MHz

Reading level $(dB\mu V)$ = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement $(dB\mu V)$ = Reading level $(dB\mu V)$ + Corr. Factor (dB)

Limit (dBµV) = Limit stated in standard

 $Margin (dB) = Measurement (dB\mu V) - Limits (dB\mu V)$

Q.P. =Quasi-Peak AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Note2:

Measurements were conducted in all three channels (high, middle, low) and three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (middle channel and 8DPSK) was submitted only.



6.3. Conducted Output Power

6.3.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)		
Test Method:	KDB 558074 D01 v05r02		
Limit:	Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.		
Test Setup:	Spectrum Analyzer EUT		
Test Mode:	Transmitting mode with modulation		
Test Procedure:	Use the following spectrum analyzer settings: Span = approximately 5 times the 20 dB bandwid centered on a hopping channel RBW > the 20 dB bandwidth of the emission being measured VBW ≥ RBW Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize. Use the marker-to-peak function to set the marker to peak of the emission.		
Test Result:	PASS		

6.3.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 11, 2021
4 Ch. Simultaneous Sampling 14 Bits 2 MS/s	Agilent	U2531A	N/A	Sep. 02, 2021
Combiner Box	Ascentest	AT890-RFB	N/A	Sep. 02, 2021



6.4. 20dB Occupy Bandwidth

6.4.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)			
Test Method:	KDB 558074 D01 v05r02			
Limit:	N/A	(3)		(3)
Test Setup:	Spectrum Analyzer		EUT	(C
Test Mode:	Transmitting mode with modulation			
Test Procedure:				
Test Result:	4. Measure and red PASS			

6.4.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 11, 2021
4 Ch. Simultaneous Sampling 14 Bits 2 MS/s	Agilent	U2531A	N/A	Sep. 02, 2021
Combiner Box	Ascentest	AT890-RFB	N/A	Sep. 02, 2021



6.5. Carrier Frequencies Separation

6.5.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	KDB 558074 D01 v05r02
Limit:	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
Test Setup:	Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Enable the EUT hopping function. Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels; RBW is set to approximately 30% of the channel spacing, adjust as necessary to best identify the center of each individual channel; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Record the value in report.
Test Result:	PASS



6.5.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 11, 2021
4 Ch. Simultaneous Sampling 14 Bits 2 MS/s	Agilent	U2531A	N/A	Sep. 02, 2021
Combiner Box	Ascentest	AT890-RFB	N/A	Sep. 02, 2021





6.6. Hopping Channel Number

6.6.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	KDB 558074 D01 v05r02
Limit:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Setup:	Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Enable the EUT hopping function. Use the following spectrum analyzer settings: Span = the frequency band of operation; set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold. The number of hopping frequency used is defined as the number of total channel. Record the measurement data in report.
Test Result:	PASS
1 (***)	

6.6.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 11, 2021
4 Ch. Simultaneous Sampling 14 Bits 2 MS/s	Agilent	U2531A	N/A	Sep. 02, 2021
Combiner Box	Ascentest	AT890-RFB	N/A	Sep. 02, 2021



6.7. Dwell Time

6.7.1. Test Specification

FCC Part15 C Section 15.247 (a)(1)		
KDB 558074 D01 v05r02		
The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.		
Spectrum Analyzer EUT		
Hopping mode		
 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Enable the EUT hopping function. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW shall be ≤ channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel; VBW≥RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold. Measure and record the results in the test report. 		
PASS		

6.7.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 11, 2021
4 Ch. Simultaneous Sampling 14 Bits 2 MS/s	Agilent	U2531A	N/A	Sep. 02, 2021
Combiner Box	Ascentest	AT890-RFB	N/A	Sep. 02, 2021



6.8. Pseudorandom Frequency Hopping Sequence

Test Requirement:

FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- · Number of shift register stages: 9
- Length of pseudo-random sequence: 29-1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in

synchronization with the transmitted signals.



Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com



6.9. Conducted Band Edge Measurement

6.9.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB 558074 D01 v05r02
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	 Set to the maximum power setting and enable the EUT transmit continuously. Set RBW = 100 kHz (≥1% span=10MHz), VBW = 300 kHz (≥RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used. Enable hopping function of the EUT and then repeat step 2 and 3. Measure and record the results in the test report.
Test Result:	PASS

6.9.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 11, 2021
4 Ch. Simultaneous Sampling 14 Bits 2 MS/s	Agilent	U2531A	N/A	Sep. 02, 2021
Combiner Box	Ascentest	AT890-RFB	N/A	Sep. 02, 2021



6.10. Conducted Spurious Emission Measurement

6.10.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
•	
Test Method:	KDB 558074 D01 v05r02
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Measure and record the results in the test report. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS

6.10.2. Test Instruments


Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 11, 2021
4 Ch. Simultaneous Sampling 14 Bits 2 MS/s	Agilent	U2531A	N/A	Sep. 02, 2021
Combiner Box	Ascentest	AT890-RFB	N/A	Sep. 02, 2021



6.11. Radiated Spurious Emission Measurement

6.11.1. Test Specification

Test Requirement:	FCC Part15	C Se	ction	15.209	(C)		(c	
Test Method:	ANSI C63.10	ANSI C63.10:2013						
Frequency Range:	9 kHz to 25 (GHz					*	
Measurement Distance:	3 m		(3)	5)		(0		
Antenna Polarization:	Horizontal &	Verti	ical					
Receiver Setup:	Frequency 9kHz- 150kHz 150kHz- 30MHz 30MHz-1GHz Above 1GHz	Quas Quas Quas	tector si-peak si-peak si-peak eak	9kHz	VBW 1kHz 30kHz 300KHz 3MHz 10Hz	Quas Quas Quas	Remark si-peak Value si-peak Value si-peak Value eak Value erage Value	
Limit:	Frequen 0.009-0.4 0.490-1.7 1.705-3 30-88 88-216 216-96 Above 9	cy 190 705 0	Field	Field Stre (microvolts/ 2400/F(K 24000/F(I) 30 100 150 200 500 I Strength volts/meter)	ength (meter) (Hz) (Hz) Measure Distan	Me Dista	asurement nce (meters) 300 30 30 30 3 3 3 3 3	
	Above 1GHz	Above 1GHz		500 5000		rs)	Average Peak	
Test setup:		stance = 3	m	lm		Comput		

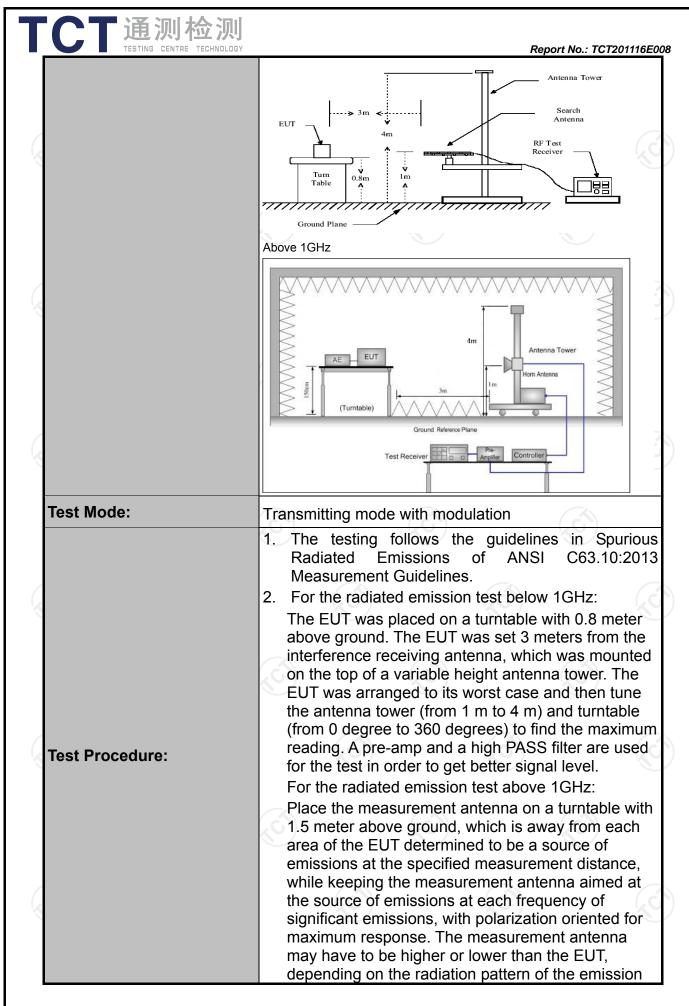

CT通测检测
TESTING CENTRE TECHNOLOGY Report No.: TCT201116E008 and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. 3. Set to the maximum power setting and enable the EUT transmit continuously. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=120 kHz for f < 1 GHz, RBW=1MHz for f>1GHz; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak (3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time =N1*L1+N2*L2+...+Nn-1*LNn-1+Nn*Ln Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc. Average Emission Level = Peak Emission Level + 20*log(Duty cycle)



PASS

Test results:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



6.11.2. Test Instruments

Report No.: TCT201116E008


	Radiated Em	ission Test Site	966)	
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	ROHDE&SCHW ARZ	ESIB7	100197	Jul. 27, 2021
Spectrum Analyzer	ROHDE&SCHW ARZ	FSQ40	200061	Sep. 11, 2021
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 02, 2021
Pre-amplifier	HP	8447D	2727A05017	Sep. 02, 2021
Loop antenna	ZHINAN	ZN30900A	12024	Sep. 05, 2022
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 04, 2022
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 04, 2022
Horn Antenna	A-INFO	LB-180400-KF	J211020657	Sep. 04, 2022
Antenna Mast	Keleto	RE-AM	N/A	N/A
Line-4	TCT	RE-high-04	N/A	Sep. 02, 2021
Line-8	тст	RE-01	N/A	Jul. 27, 2021
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A




6.11.3. Test Data

Duty cycle correction factor for average measurement

3DH5 on time (One Pulse) Plot on Channel 39

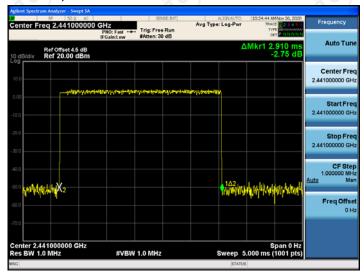

3DH5 on time (Count Pulses) Plot on Channel 39

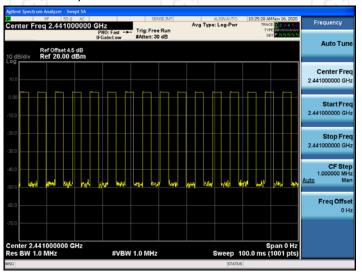

Note:

- 1. Worst case Duty cycle = on time/100 milliseconds = (2.910*16)/100= 0.4656
- 2. Worst case Duty cycle correction factor = 20*log (Duty cycle) = -6.64dB
- 3. 3DH5 has the highest duty cycle worst case and is reported.
- 4. The average levels were calculated from the peak level corrected with duty cycle correction factor (-6.64dB) derived from 20log (dwell time/100ms). This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.


Page 26 of 91



Please refer to following diagram for individual

Below 1GHz

Horizontal:

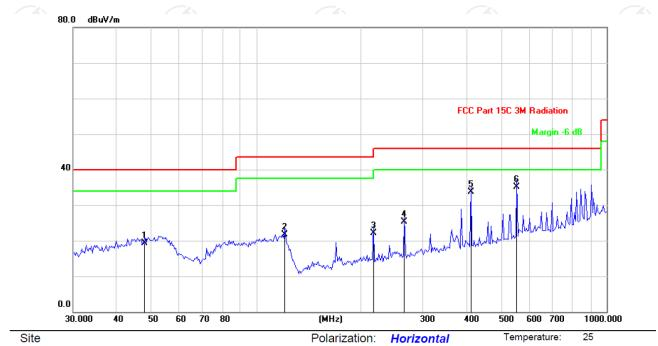


Limit: FCC Part 15C 3M Radiation Power: AC 120V/60Hz Humidity: 55 %

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		48.0392	31.35	-12.01	19.34	40.00	-20.66	QP
2		120.6118	35.86	-14.17	21.69	43.50	-21.81	QP
3		216.1197	35.25	-13.22	22.03	46.00	-23.97	QP
4		264.9709	36.81	-11.53	25.28	46.00	-20.72	QP
5		409.6506	42.51	-8.87	33.64	46.00	-12.36	QP
6	*	554.1708	41.62	-6.43	35.19	46.00	-10.81	QP





Vertical:

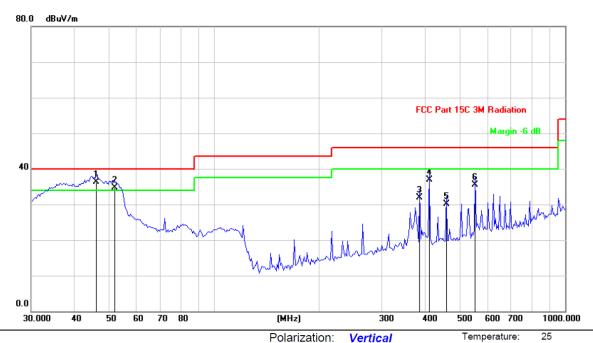

Site Polarization: Vertical Temperature: 25
Limit: FCC Part 15C 3M Radiation Power: AC 120V/60Hz Humidity: 55 %

No. Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBu∀	dB	dBuV/m	dB/m	dB	Detector
1 *	46.0558	48.35	-12.09	36.26	40.00	-3.74	QP
2 !	51.8998	47.00	-12.36	34.64	40.00	-5.36	QP
3	384.5447	41.21	-9.21	32.00	46.00	-14.00	QP
4	409.6506	45.75	-8.87	36.88	46.00	-9.12	QP
5	458.3987	38.35	-8.30	30.05	46.00	-15.95	QP
6	554.1708	41.97	-6.43	35.54	46.00	-10.46	QP

Note: 1.The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3. Freq. = Emission frequency in MHz

Measurement $(dB\mu V/m) = Reading level (dB\mu V) + Corr. Factor (dB)$

Correction Factor= Antenna Factor + Cable loss - Pre-amplifier

Limit $(dB\mu V/m) = Limit$ stated in standard

Over (dB) = Measurement $(dB\mu V/m)$ – Limits $(dB\mu V/m)$

^{2.} Measurements were conducted in all three channels (high, middle, low) and three modulation (GFSK, Pi/4 DQPSK, 8DPSK) and the worst case Mode (middle channel and 8DPSK) was submitted only.


^{*} is meaning the worst frequency has been tested in the test frequency range.



Test Result of Radiated Spurious at Band edges

Lowest channel 2402:



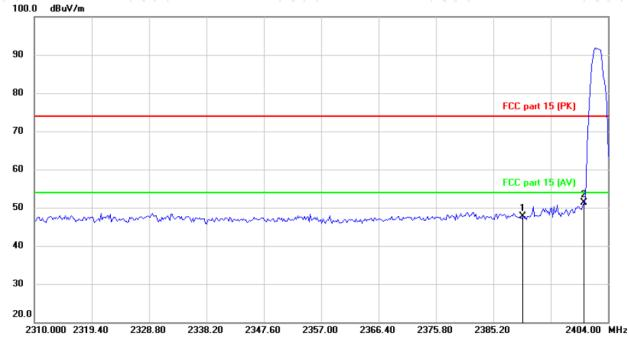


25 Site Polarization: Horizontal Temperature: Humidity: 55 % Limit: FCC part 15 (PK) Power:

No	٥.	Mk	. Freq.			Measure- ment	Limit	Over	
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
	1		2390.000	60.92	-13.15	47.77	74.00	-26.23	peak
	2	*	2400.000	64.42	-13.12	51.30	74.00	-22.70	peak





Vertical:

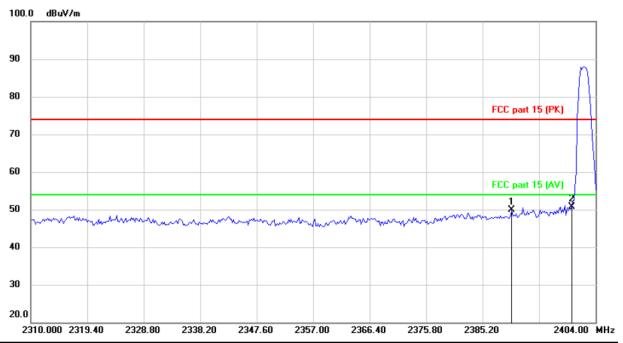

Site Polarization: Vertical Temperature: 25
Limit: FCC part 15 (PK) Power: Humidity: 55 %


-	No.	Mk	. Freq.			Measure- ment	Limit	Over	
_			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
_	1		2390.000	63.04	-13.15	49.89	74.00	-24.11	peak
(2	*	2400.000	63.81	-13.12	50.69	74.00	-23.31	peak





Highest channel 2480:

Horizontal:

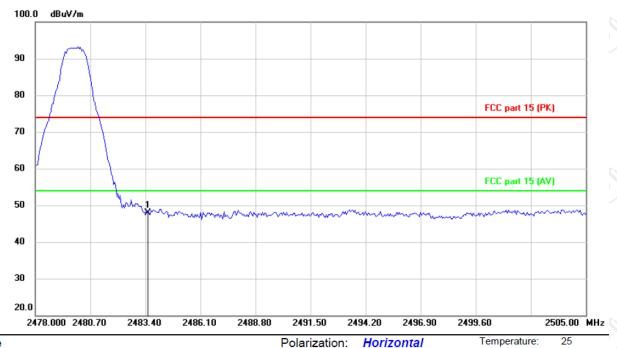


Site Polarization: Horizontal Temperature: 25
Limit: FCC part 15 (PK) Power: Humidity: 55 %

	No. N	Λk.	Freq.			Measure- ment	Limit	Over	
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
•	1 *		2483.500	60.69	-12.84	47.85	74.00	-26.15	peak





Vertical:

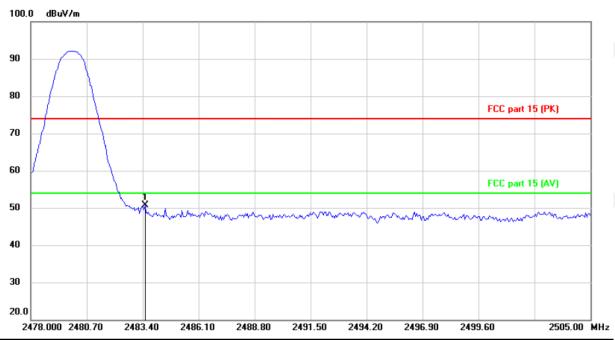

Site Polarization: Vertical Temperature: 25
Limit: FCC part 15 (PK) Power: Humidity: 55 %

No. I	Mk	. Freq.			Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	2483.500	63.53	-12.84	50.69	74.00	-23.31	peak

Note: Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (8DPSK) was submitted only.





Above 1GHz

Modulation	Modulation Type: 8DPSK									
Low chann	Low channel: 2402 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBuV)	Correction Factor (dB/m)	Emissic Peak (dBµV/m)	AV	Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)	
4804	Н	45.56		0.66	46.22		74	54	-7.78	
7206	Н	35.22		9.5	44.72		74	54	-9.28	
	Ŧ	-					-	7-74		
(.G")		(,C)	*)		.G`)		(.C)		
4804	V	45.39		0.66	46.05	<u></u>	74	54	-7.95	
7206	V	36.41		9.5	45.91		74	54	-8.09	
	V									

Middle cha	nnel: 2441	MHz		XC)		(0)		KC
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Emissic Peak (dBµV/m)	AV	Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)
4882	Н	45.95	/	0.99	46.94		74	54	-7.06
7323	(H	36.48	1/20	9.87	46.35	07	74	54	-7.65
	H					<u></u>			
4882	V	44.37		0.99	45.36		74	54	-8.64
7323	V	35.54		9.87	45.41		74	54	-8.59
)	V	12)		()/		

High channel: 2480 MHz												
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Emissic Peak (dBµV/m)	AV	Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)			
4960	Η	46.62)	1.33	47.95	-	74	54	-6.05			
7440	Τ	37.28		10.22	47.50	-	74	54	-6.50			
	Τ						-7					
(()		(.C)		(, ((.G)		(.0			
4960	V	47.91		1.33	49.24		74	54	-4.76			
7440	V	37.86		10.22	48.08		74	54	-5.92			
	V											

Note:

- 1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss Pre-amplifier
- 2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 5. Data of measurement shown "---"in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
- 6. Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (8DPSK) was submitted only.
- 7. All the restriction bands are compliance with the limit of 15.209.







Appendix A: Test Result of Conducted Test

Maximum Conducted Output Power

			- I A V I I I - I I I I I I I I I I I I I I I		
Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	2.209	21	Pass
NVNT	1-DH1	2441	2.561	21	Pass
NVNT	1-DH1	2480	1.862	21	Pass
NVNT	2-DH1	2402	3.561	21	Pass
NVNT	2-DH1	2441	3.890	21	Pass
NVNT	2-DH1	2480	2.973	21	Pass
NVNT	3-DH1	2402	3.820	21	Pass
NVNT	3-DH1	2441	4.126	21	Pass
NVNT	3-DH1	2480	3.172	21	Pass

Power NVNT 1-DH1 2402MHz



Power NVNT 1-DH1 2441MHz



Power NVNT 1-DH1 2480MHz



Power NVNT 2-DH1 2402MHz



Power NVNT 2-DH1 2441MHz



Power NVNT 2-DH1 2480MHz




Power NVNT 3-DH1 2402MHz



Power NVNT 3-DH1 2441MHz



Power NVNT 3-DH1 2480MHz

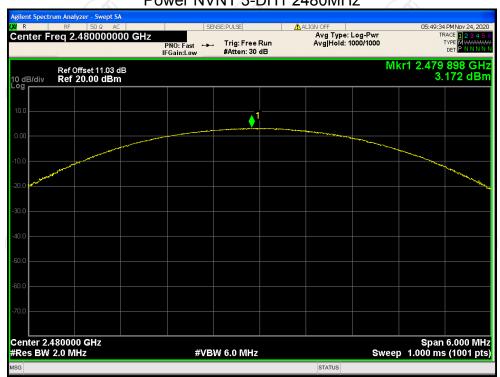



-20dB Bandwidth

Condition	Mode	Frequency	-20 dB Bandwidth	Limit -20 dB Bandwidth	Verdict	
		(MHz)	(MHz)	(MHz)		
NVNT	1-DH1	2402	1.041	Within 2400~2483.5	Pass	
NVNT	1-DH1	2441	1.047	Within 2400~2483.5	Pass	
NVNT	1-DH1	2480	1.047	Within 2400~2483.5	Pass	
NVNT	2-DH1	2402	1.261	Within 2400~2483.5	Pass	
NVNT	2-DH1	2441	1.262	Within 2400~2483.5	Pass	
NVNT	2-DH1	2480	1.261	Within 2400~2483.5	Pass	
NVNT	3-DH1	2402	1.277	Within 2400~2483.5	Pass	
NVNT	3-DH1	2441	1.277	Within 2400~2483.5	Pass	
NVNT	3-DH1	2480	1.277	Within 2400~2483.5	Pass	

-20dB Bandwidth NVNT 1-DH1 2402MHz




-20dB Bandwidth NVNT 1-DH1 2441MHz




-20dB Bandwidth NVNT 1-DH1 2480MHz



-20dB Bandwidth NVNT 2-DH1 2402MHz

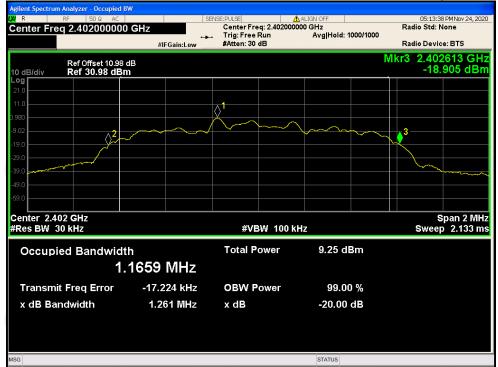


-20dB Bandwidth NVNT 2-DH1 2441MHz

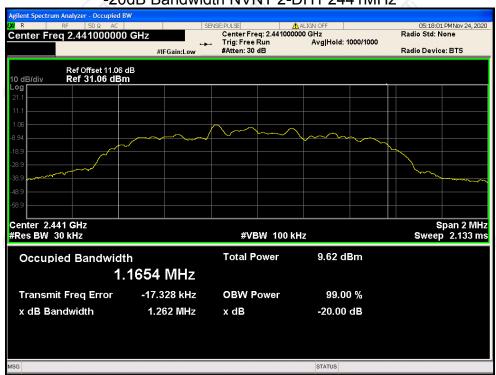

-20dB Bandwidth NVNT 2-DH1 2480MHz



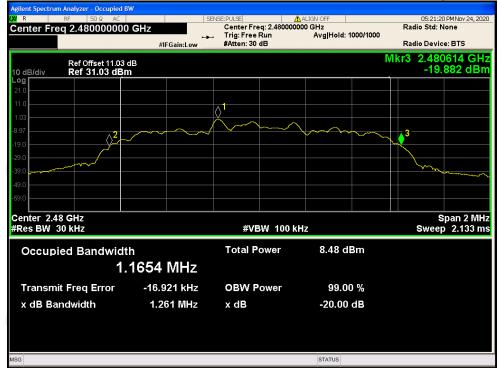


-20dB Bandwidth NVNT 3-DH1 2402MHz



-20dB Bandwidth NVNT 3-DH1 2441MHz



-20dB Bandwidth NVNT 3-DH1 2480MHz

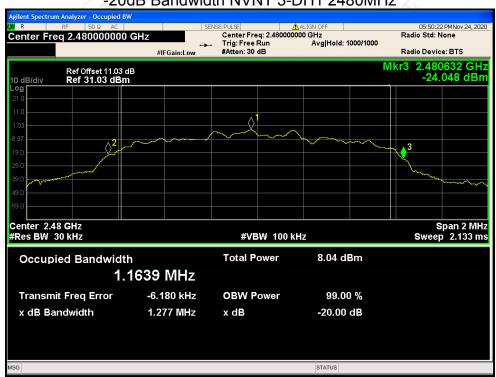




Carrier Frequencies Separation

Condition	Mode	Hopping Freq1	Hopping Freq2	HFS	Limit	Verdict	
		(MHz)	(MHz)	(MHz)	(MHz)		
NVNT	1-DH1	2401.987	2402.986	0.999	0.698	Pass	
NVNT	1-DH1	2440.987	2441.986	0.999	0.698	Pass	
NVNT	1-DH1	2478.987	2479.986	0.999	0.698	Pass	
NVNT	2-DH1	2401.825	2402.821	0.996	0.841	Pass	
NVNT	2-DH1	2440.828	2441.833	1.005	0.841	Pass	
NVNT	2-DH1	2478.825	2479.821	0.996	0.841	Pass	
NVNT	3-DH1	2401.978	2402.98	1.002	0.851	Pass	
NVNT	3-DH1	2440.972	2441.974	1.002	0.851	Pass	
NVNT	3-DH1	2478.969	2479.974	1.005	0.851	Pass	

CFS NVNT 1-DH1 2402MHz




CFS NVNT 1-DH1 2441MHz

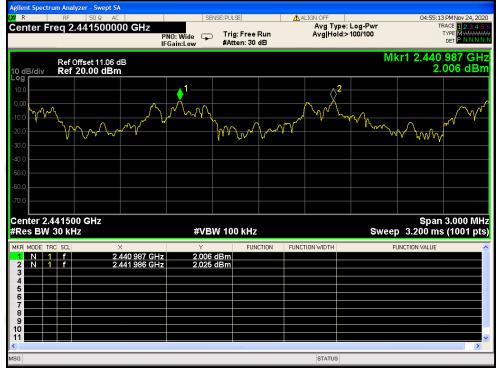


CFS NVNT 1-DH1 2480MHz



CFS NVNT 2-DH1 2402MHz

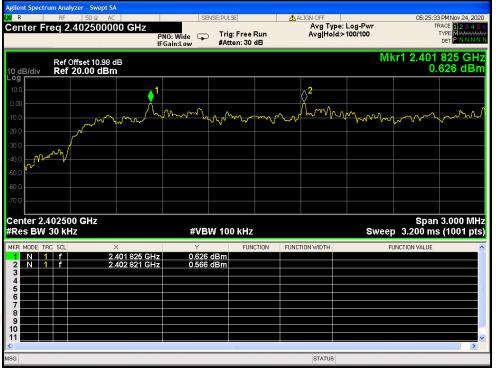

CFS NVNT 2-DH1 2441MHz

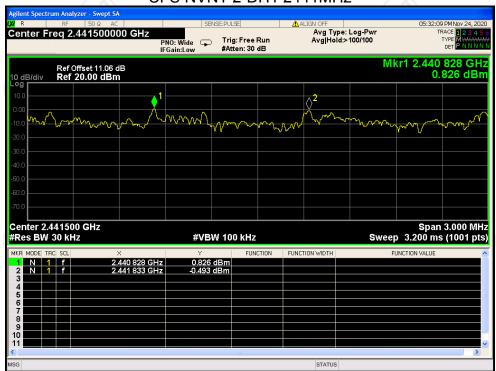


CFS NVNT 2-DH1 2480MHz




CFS NVNT 3-DH1 2402MHz



CFS NVNT 3-DH1 2441MHz

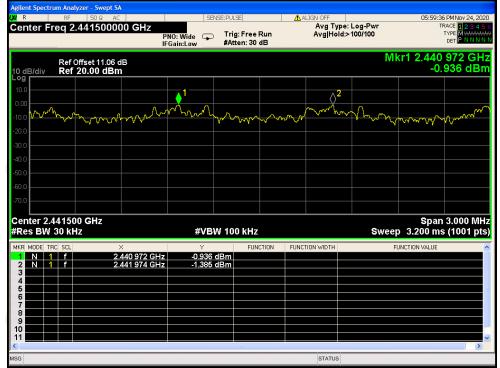

CFS NVNT 3-DH1 2480MHz

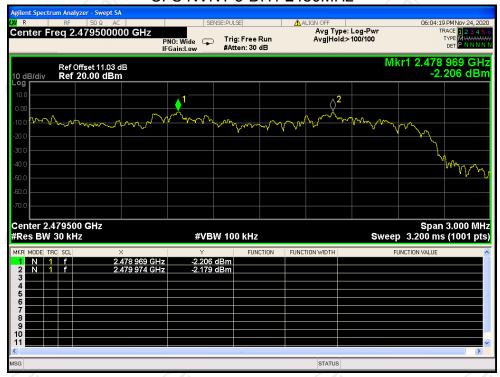




Band Edge

		Eroguepov.	Honning	Max Value	Limit	
Condition	Mode	Frequency	Hopping	iviax value	LITTIL	Verdict
Condition	Mode	(MHz)	Mode	(dBc)	(dBc)	Verdict
NVNT	1-DH1	2402	No-Hopping	-50.15	-20	Pass
NVNT	1-DH1	2480	No-Hopping	-50.18	-20	Pass
NVNT	2-DH1	2402	No-Hopping	-50.41	-20	Pass
NVNT	2-DH1	2480	No-Hopping	-49.28	-20	Pass
NVNT	3-DH1	2402	No-Hopping	-49.76	-20	Pass
NVNT	3-DH1	2480	No-Hopping	-49.10	-20	Pass

Band Edge NVNT 1-DH1 2402MHz No-Hopping Ref



Band Edge NVNT 1-DH1 2402MHz No-Hopping Emission

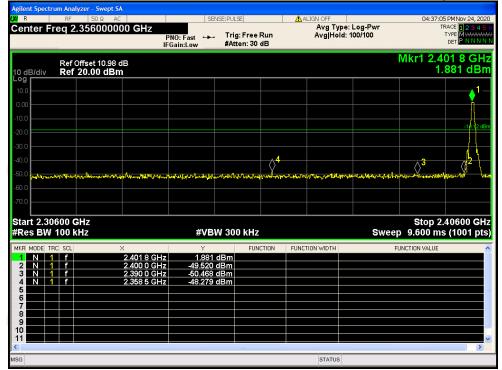

Band Edge NVNT 1-DH1 2480MHz No-Hopping Ref



Band Edge NVNT 1-DH1 2480MHz No-Hopping Emission