

Straubing, 29 September 2003

**TEST - REPORT****No. 50305-30587-9****for****Model F-89XX, Article Code F-89XX ZZ ZZ****Wireless Mouse****Uniform variants: Model F-87XX, Article Code F-87XX ZZ ZZ**

Applicant: Cherry GmbH

Test Specification: FCC Code of Federal Regulations,  
CFR 47, Part 15,  
Sections 15.209 and 15.227

---

**Note:**

The test data of this report relate only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

---

**Table of Contents**

1. Administrative Data.....	3
2. Identification of Test Laboratory.....	4
3. Operation Mode of EUT.....	5
4. Configuration.....	6
5. Measuring Methods .....	7
5.1. Field Strength of Emissions, Prescans in a fully-anechoic Room.....	8
5.2. Radiated Emission Measurement at Open Area Test Site .....	9
6. Photographs Taken During Testing .....	10
7. List of Measurements.....	13
8. Referenced Regulations .....	15
Charts taken during testing .....	16


**1. Administrative Data**

<b>Test item (EUT)</b>	
Type designation	Model F-89XX, Article Code F-89XX ZZ ZZ
Uniform variants:	Model F-87XX, Article Code F-87XX ZZ ZZ
Serial number(s):	001
Type of equipment:	Wireless Mouse
Parts/accessories:	
FCC-ID:	
<b>Technical data</b>	
Frequency range	26.96 - 27.28 MHz
Operational frequencies	27.045 MHz
Type of modulation	10K0A1D
Pulse frequency	N/A
Pulse width	N/A
Antenna	Integrated
Power supply	3 V DC (2 Alkaline Batteries)
<b>Applicant:</b> (full address)	Cherry GmbH Cherrystrasse D-91275 Auerbach / Germany
Contract identification:	---
Contact person:	Jürgen Meier
Manufacturer:	Applicant
<b>Application details</b>	
Receipt of EUT:	27 August 2003
Date of test:	September 2003
Note:	
Responsible for testing:	Johann Roidt
Responsible for test report:	Johann Roidt

**2. Identification of Test Laboratory****DETAILS OF THE TEST LABORATORY**

COMPANY NAME:	Senton GmbH EMI/EMC Test Center
ADDRESS:	Aeussere Fruhlingsstrasse 45 D-94315 Straubing Germany
LABORATORY ACCREDITATION:	DAR-Registration No. TTI-P-G 062/94-40
FCC TEST SITE LISTING	
INDUSTRY CANADA TEST SITE REGISTRATION	IC 3050
NAME FOR CONTACT PURPOSES:	Mr. Johann Roidt
TELEPHONE: (+49) (0)9421 5522-0	FAX: (+49) (0)9421 5522-99

**PERSONNEL INVOLVED IN THIS TEST REPORT**

TECHNICAL DIRECTOR:	 Mr. Johann Roidt
RESPONSIBLE FOR TESTING:	Mr. Johann Roidt
RESPONSIBLE FOR TEST REPORT:	Mr. Johann Roidt

**SUMMARY OF TEST RESULTS**

The tested sample complies with the requirements set forth in the **Code of Regulations CFR 47, Part 15, Sections 15.209 and 15.227**

### 3. Operation Mode of EUT

Normal operation

**4. Configuration**

<b>Configuration of the EUT</b>
Not applicable

<b>Cables connected to the EUT</b>
Not applicable


<b>Peripheral devices connected to the EUT</b>
Not applicable

## 5. Measuring Methods

## 5.1. Field Strength of Emissions, Prescans in a fully-anechoic Room

Rules and Specifications:	Sections 15.109 & 15.209
Guide:	ANSI C63.4 1997

**Measurement Procedure:**  
 Radiated emissions are measured over the frequency range from 30 MHz to the maximum frequency as required in section 15.33  
 Measurements were made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution bandwidth set to 100 kHz. All tests were performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. For final testing an open-area test-site was used. During the tests the EUT is rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions.

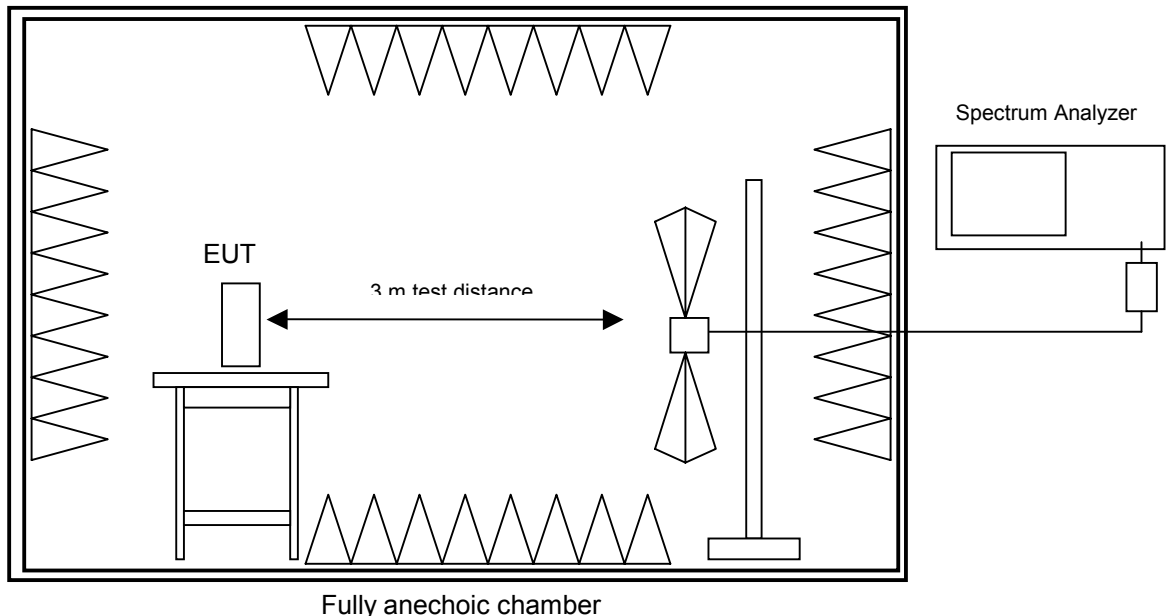

**Test instruments used:**


No.	Type	Model	Serial Number	Manufacturer
01	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
113	Preamplifier	CPA9231A	3393	Schaffner
141	Biconical antenna	HK 116	829708/006	Rohde & Schwarz
143	Log. periodic antenna	3147	9112-1054	EMCO
145	Horn antenna	3115	9508-4553	EMCO
146	Horn antenna set	3160-03/-09	9112-1003	EMCO
114	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
115	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
003	Fully anechoic room	No. 2	1452	Albatross Projects



## 5.2. Radiated Emission Measurement at Open Area Test Site

Rules and Specifications:	Sections 15.109 & 15.209
Guide:	ANSI C63.4 1997

Measurement Procedure:
<p>Radiated emissions are measured in the frequency range specified in section 15.33. Resolution and video bandwidth of the spectrum analyzer are set to 1 MHz. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. Additional measurements are performed at critical frequencies with reduced span.</p> <p>EUT is rotated all around and receiving antenna is raised and lowered to find the maximum levels of emission. The cables and equipment are placed and moved within the range of position likely to find their maximum emissions.</p> <p>All tests are performed in a fully-anechoic chamber with a test-distance of 3 meters.</p> <p>If required preamplifiers are used for the whole frequency range. Special care is taken to avoid overload in transmit mode (using appropriate attenuators and filters if necessary).</p>

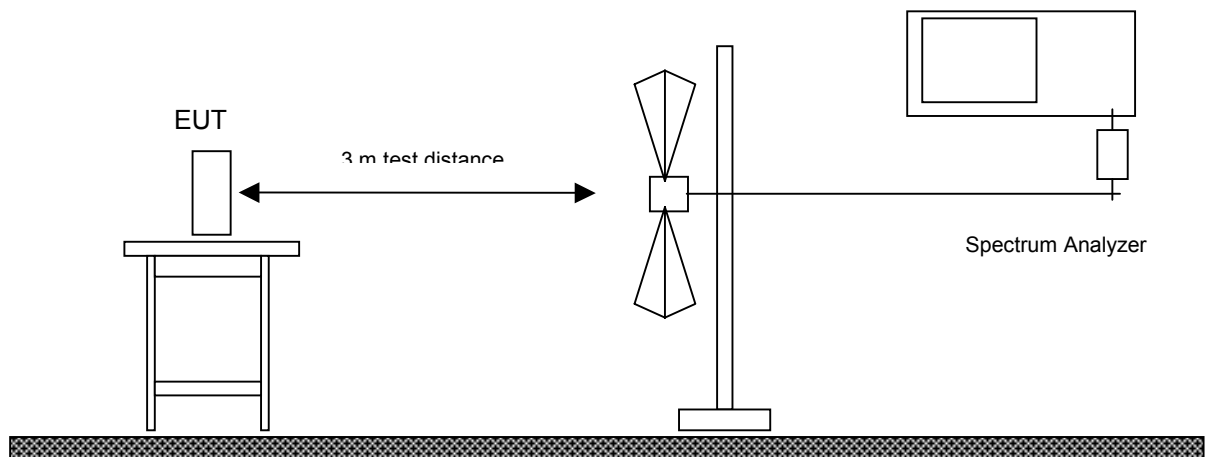


### Test instruments used:

No.	Type	Model	Serial Number	Manufacturer
01	EMI Receiver	ESVP	881414/009	Rohde & Schwarz
141	Biconical antenna	HK 116	829708/006	Rohde & Schwarz
143	Log. periodic antenna	3147	9112-1054	EMCO
145	Horn antenna	3115	9508-4553	EMCO
146	Horn antenna set	3160-03/-09	9112-1003	EMCO
114	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
115	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
003	Open Field Test Site	No. 1	N/A	Senton

## 6. Photographs Taken During Testing

## Test setup for radiated emission measurement (fully anechoic room)

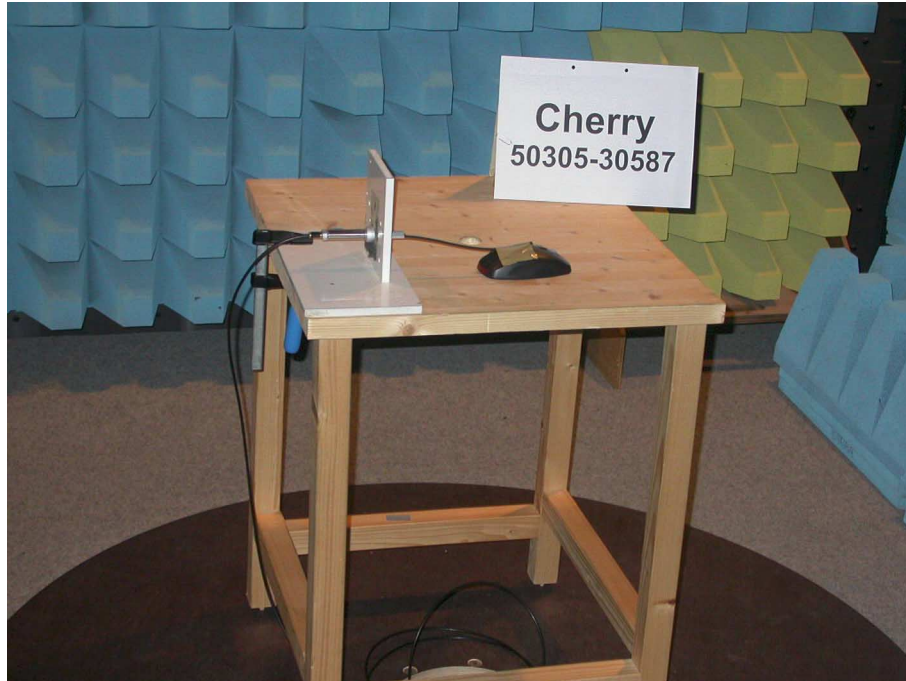

## Test setup for radiated emission measurement (open area test site)



**7. List of Measurements**

<b>FCC Part 15</b>			
<b>Section(s):</b>	<b>Test</b>	<b>Page(s)</b>	<b>Result</b>
<b>15.205</b>	Restricted Bands		Pass
<b>15.227 (a)</b>	Field strength of emissions - inband	---	Pass
<b>15.227 (b)</b>	Field strength of emissions - outside assigned frequency band	---	Pass
<b>15.209</b>	Field strength of emissions - Receiver		Pass

## Field Strength of Emissions - Transmitter

Rules and Specifications:	15.227 (a) Field Strength of Emissions - inband 15.227 (b) Field Strength of Emissions - outside assigned frequency band
Guide:	ANSI C63.4
Limit:	The field strength of any emission in this band shall not exceed 10,000 microvolts/meter at 3 meters. The field strength of any emission which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209

Tested Frequency:	27.045 MHz (Transmitter under Test)
Test Site:	Open Area Test Site (< 1 GHz), Fully anechoic chamber (> 1 GHz)
Distance:	3 Meter

Frequency (MHz)	Detector	Antenna Polarization	Analyzer Reading (dBµV)	Correction Factor (dB/m)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
27.045	Av	Hor	36.70	15.00	51.70	80.00	<b>28.3</b>

\*\*\* = All emissions showed more than 20 dB margin to the limit

**Sample calculation of erp values:**

$$\text{Field Strength (dBµV/m)} = \text{Analyzer Reading (dBµV)} + \text{Correction Factor (dB/m)}$$

<b>Test Results:</b>	Pass
----------------------	------

## 8. Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency Allocations And Radio Treaty Matters, General Rules And Regulations) of the Federal Communication Commission (FCC)	October 1, 2001
<input type="checkbox"/>	CFR 47 Part 15 Subpart A	Code of Federal Regulations Part 15 (Radio Frequency Devices), Subpart A (General) of the Federal Communication Commission (FCC)	March 13, 2003
<input type="checkbox"/>	CFR 47 Part 15 Subpart B	Code of Federal Regulations Part 15 (Radio Frequency Devices), Subpart B (Unintentional Radiators) of the Federal Communication Commission (FCC)	March 13, 2003
<input checked="" type="checkbox"/>	CFR 47 Part 15 Subpart C	Code of Federal Regulations Part 15 (Radio Frequency Devices), Subpart C (Intentional Radiators) of the Federal Communication Commission (FCC)	March 13, 2003
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz - 40 GHz	October, 1992
<input checked="" type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 5 for Low Power Licence-Exempt Radiocommunication Devices of Industry Canada	November 2001
<input type="checkbox"/>	TIA/EIA-603	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	February 1993
<input type="checkbox"/>	TIA/EIA-603-1	Addendum to TIA/EIA-603	March 4, 1998


## Charts taken during testing



**Restricted bands of operation 25 MHz - 27.5 MHz  
acc. to FCC Part 15.205 (Fully Anechoic Chamber)**

Model: Mouse Modell F-89XX	Comment: - 2 x 1.5 V alkaline battery supply  - moving mouse - sending continuously
Serial no.: Prototyp #2	
Applicant: Cherry GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 09/10/2003      Operator: M. Steindl	
Test performed: automatically      File name: default.emi	

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

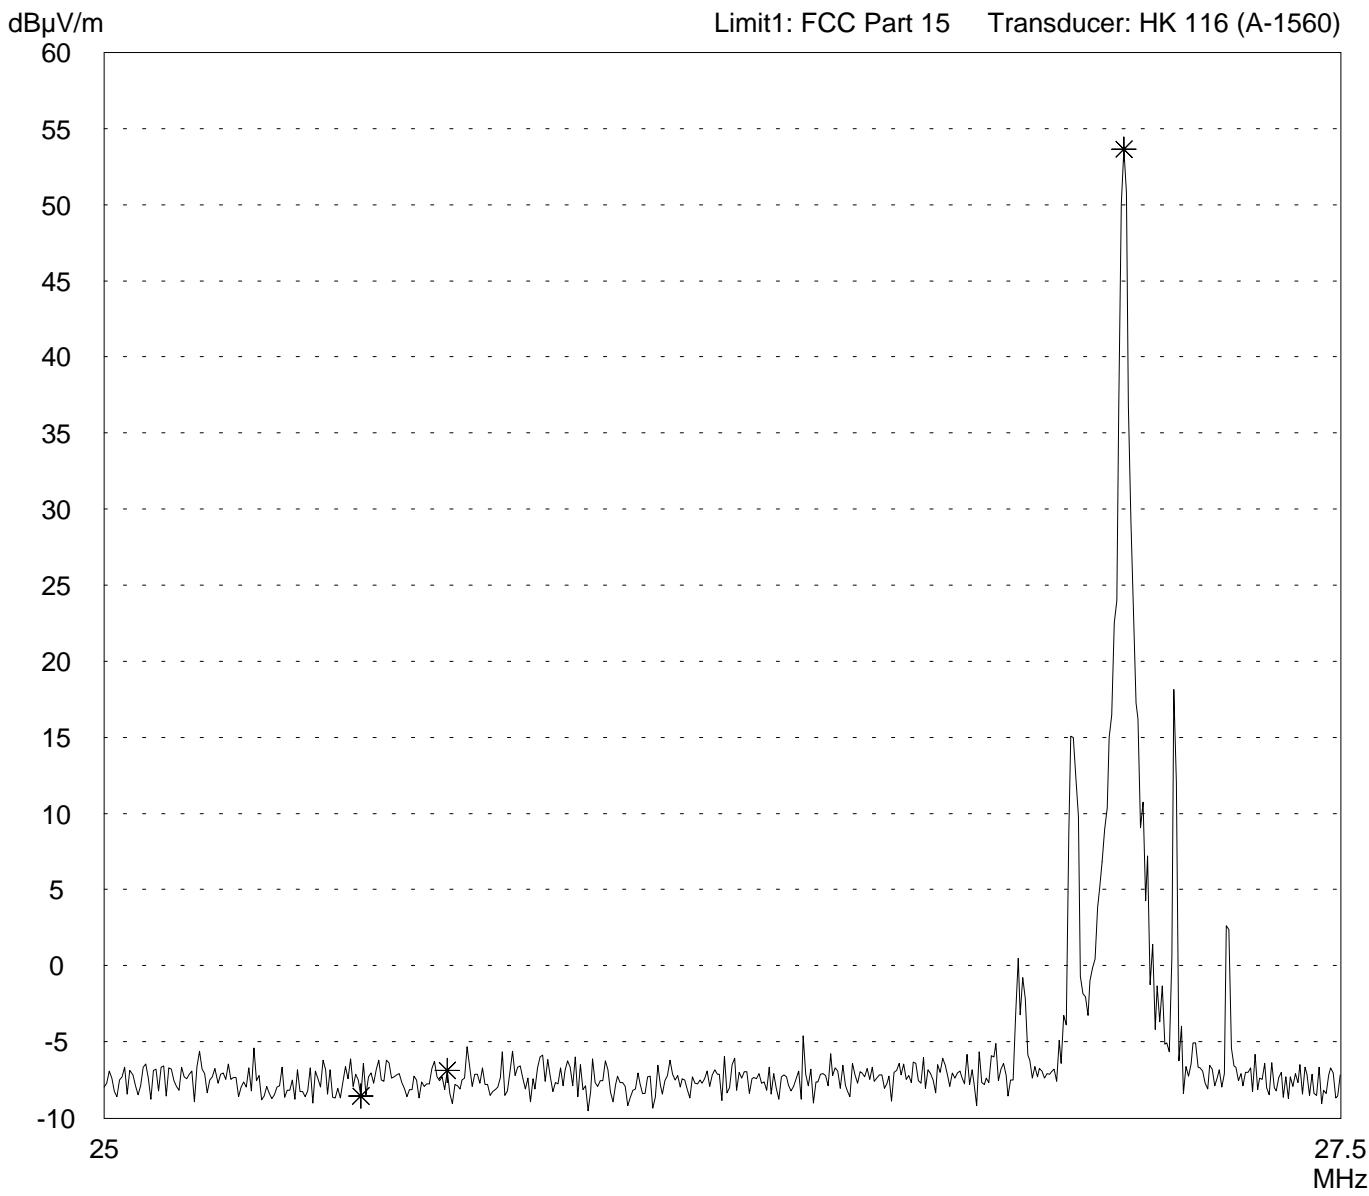


Result: Requirement kept	Project file: 50305-30587-2	Page      of      Pages
-----------------------------	--------------------------------	-------------------------

# Radiated Emission Test 20 MHz - 300 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

<p>Model: <b>Mouse Modell F-89XX</b></p> <p>Serial no.: <b>Prototyp #2</b></p> <p>Applicant: <b>Cherry GmbH</b></p> <p>Test site: <b>Fully anechoic room, cabin no. 2</b></p> <p>Tested on: <b>Test distance 3 metres Horizontal Polarization</b></p> <p>Date of test: <b>09/10/2003</b>      Operator: <b>M. Steindl</b></p> <p>Test performed: <b>automatically</b>      File name: <b>default.emi</b></p>	<p>Comment:</p> <ul style="list-style-type: none"> <li>- 2 x 1.5 V alkaline battery supply</li> <li>- moving mouse</li> <li>- sending continuously</li> </ul>
--	---

<p>Detector: <b>Peak</b></p>	<p>List of values: <b>Selected by hand</b></p>
----------------------------------	--

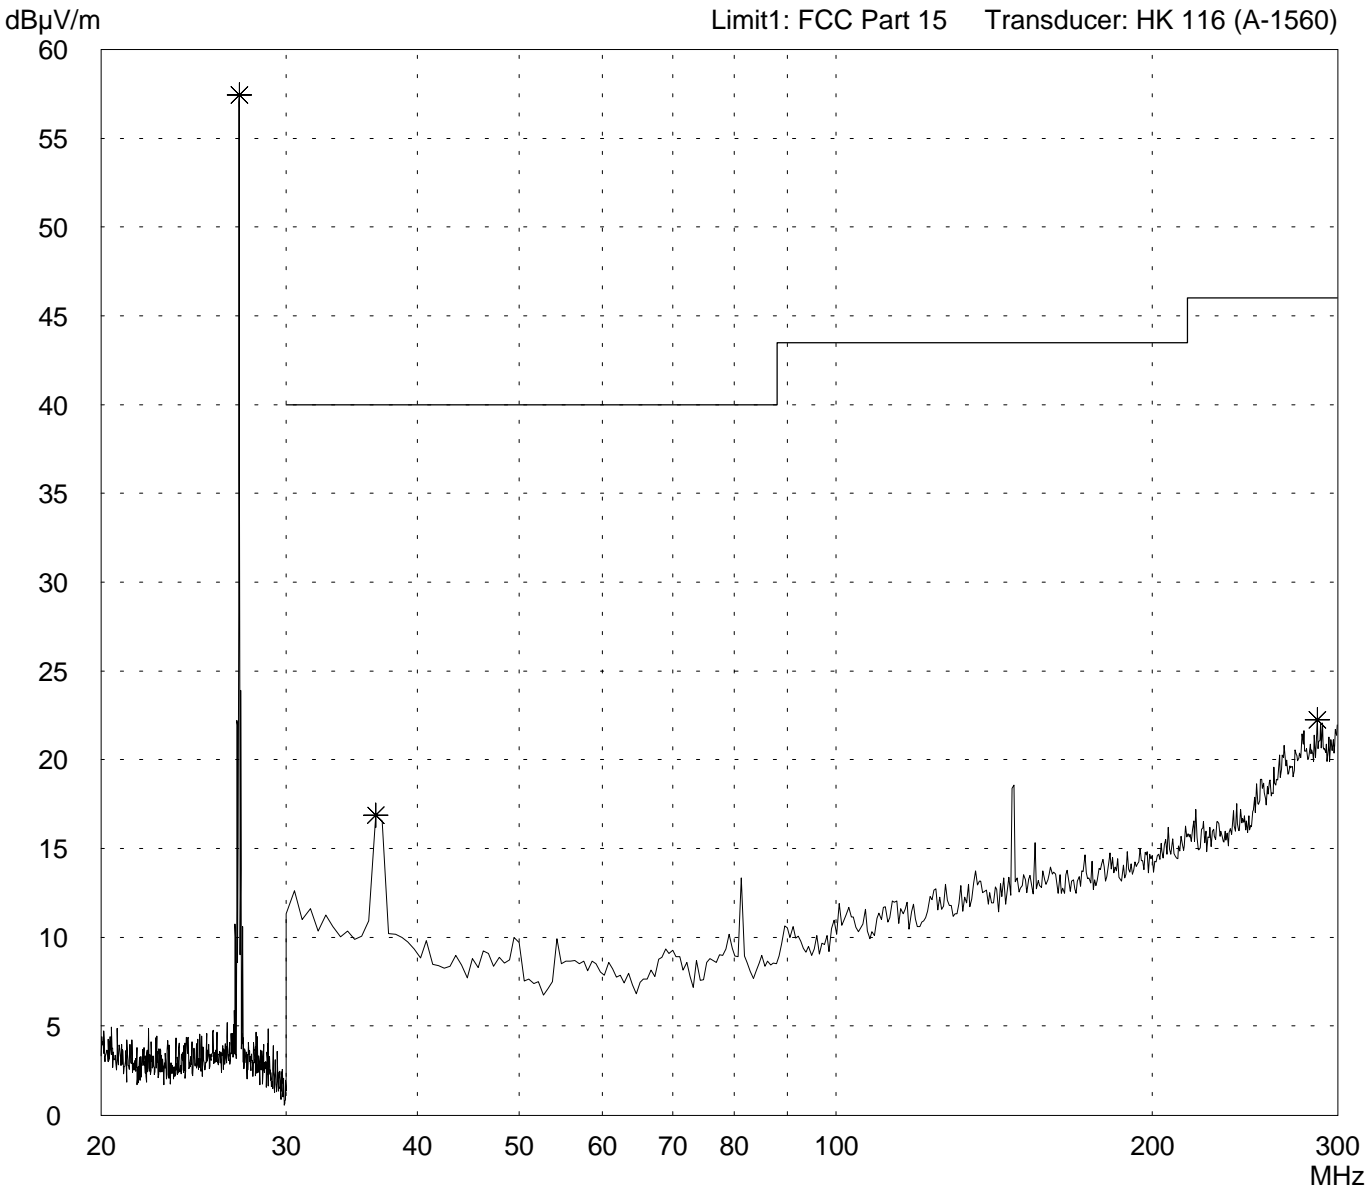


<p>Result: <b>Prescan</b></p>	<p>Project file: <b>50305-30587-2</b></p> <p style="text-align: right;">Page    of    Pages</p>
-----------------------------------	---

# Radiated Emission Test 20 MHz - 300 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

<p>Model: <b>Mouse Modell F-89XX</b></p> <p>Serial no.: <b>Prototyp #2</b></p> <p>Applicant: <b>Cherry GmbH</b></p> <p>Test site: <b>Fully anechoic room, cabin no. 2</b></p> <p>Tested on: <b>Test distance 3 metres Vertical Polarization</b></p> <p>Date of test: <b>09/10/2003</b>      Operator: <b>M. Steindl</b></p> <p>Test performed: <b>automatically</b>      File name: <b>default.emi</b></p>	<p>Comment:</p> <ul style="list-style-type: none"> <li>- 2 x 1.5 V alkaline battery supply</li> <li>- moving mouse</li> <li>- sending continuously</li> </ul>
--	---

<p>Detector: <b>Peak</b></p>	<p>List of values: <b>Selected by hand</b></p>
----------------------------------	--

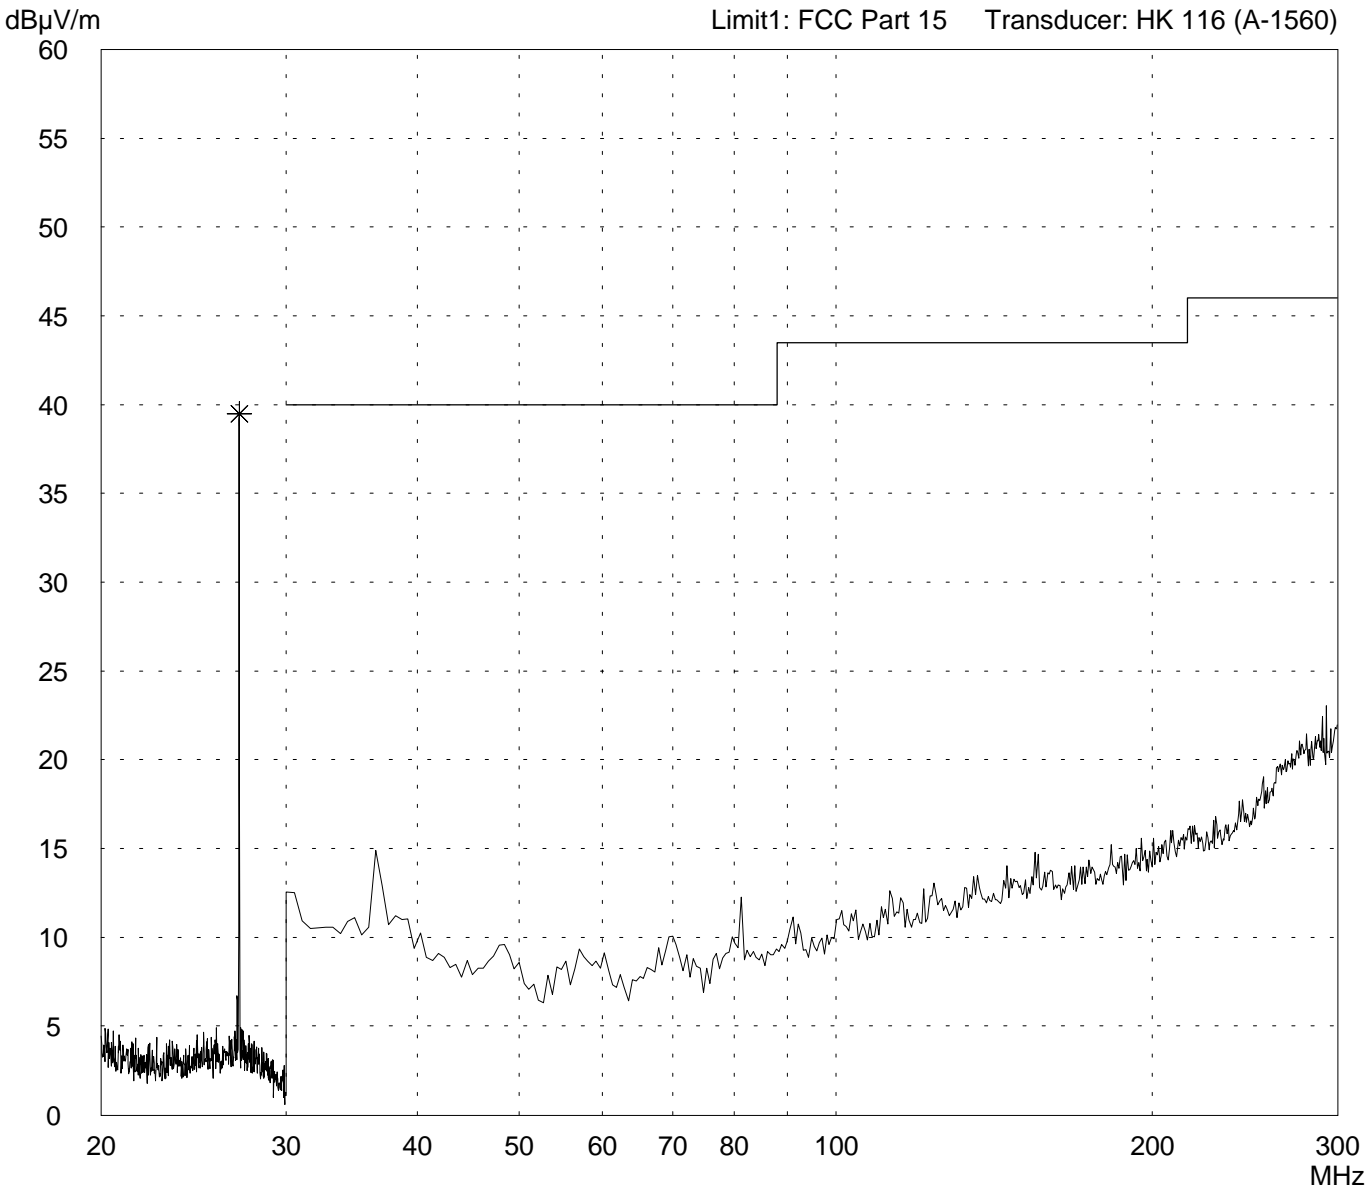


<p>Result: <b>Prescan</b></p>	<p>Project file: <b>50305-30587-2</b></p> <p style="text-align: right;">Page    of    Pages</p>
-----------------------------------	---

# Radiated Emission Test 300 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

<p><b>Model:</b> Mouse Modell F-89XX</p> <p><b>Serial no.:</b> Prototyp #2</p> <p><b>Applicant:</b> Cherry GmbH</p> <p><b>Test site:</b> Fully anechoic room, cabin no. 2</p> <p><b>Tested on:</b> Test distance 3 metres Horizontal Polarization</p> <p><b>Date of test:</b> 09/10/2003</p> <p><b>Operator:</b> M. Steindl</p> <p><b>Test performed:</b> automatically</p> <p><b>File name:</b> default.emi</p>	<p><b>Comment:</b></p> <ul style="list-style-type: none"> <li>- 2 x 1.5 V alkaline battery supply</li> <li>- moving mouse</li> <li>- sending continuously</li> </ul>
--	--

<p><b>Detector:</b> Peak</p>	<p><b>List of values:</b> Selected by hand</p>
----------------------------------	--

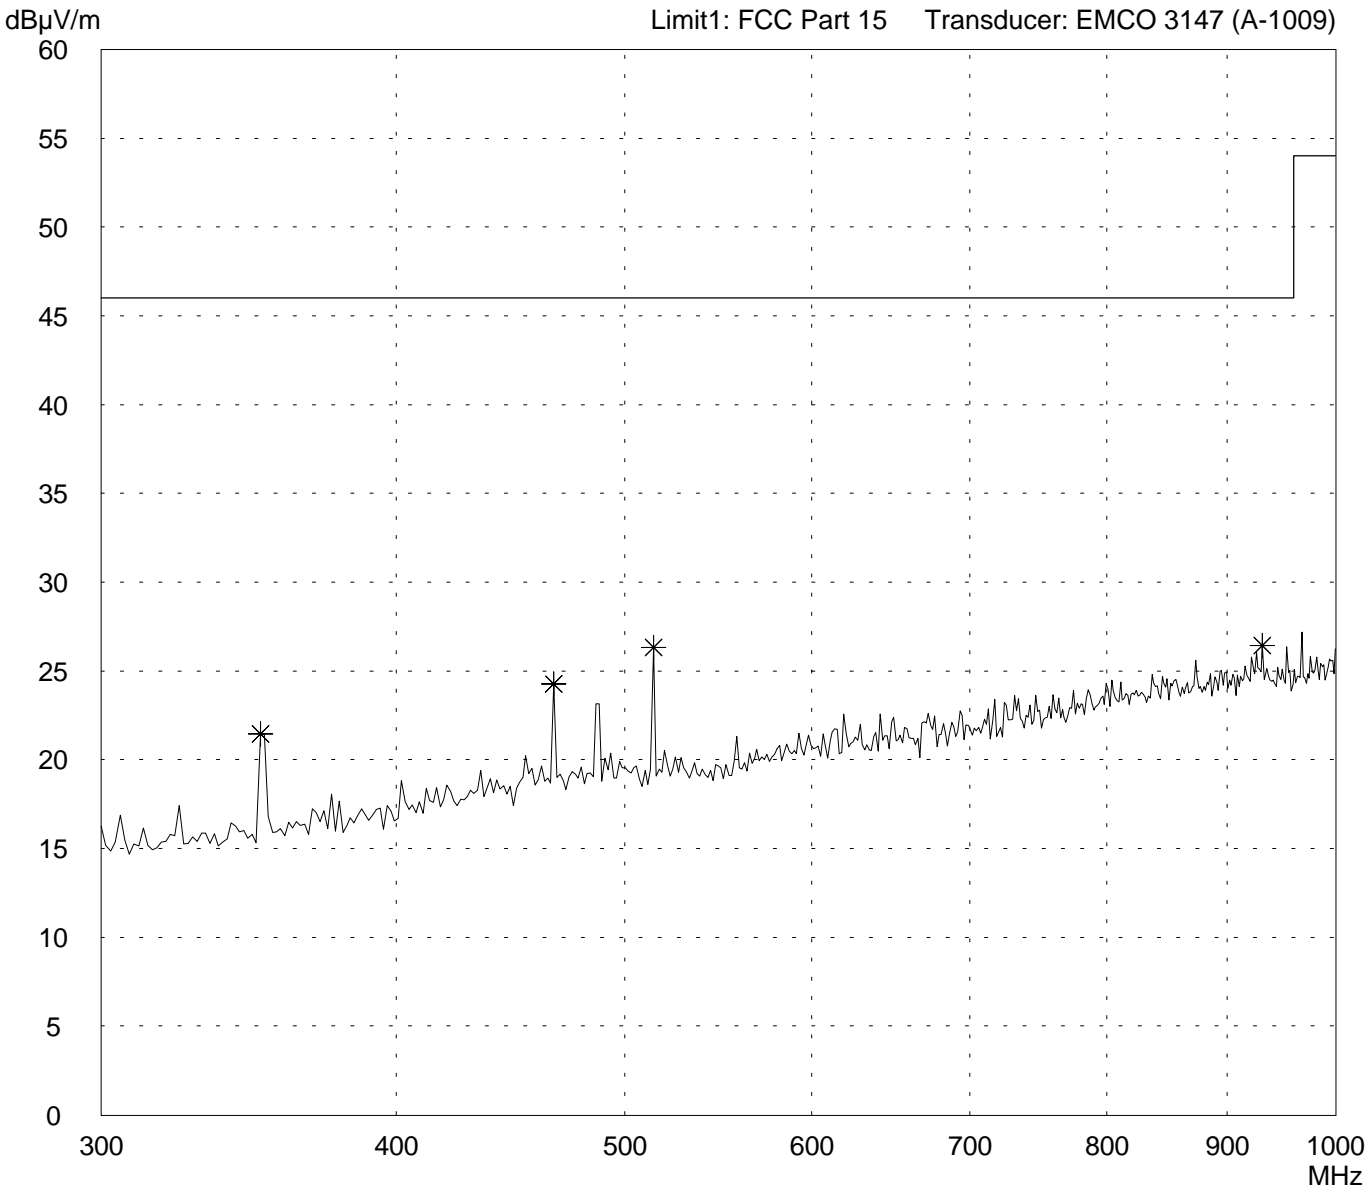


<p><b>Result:</b> Prescan</p>	<p><b>Project file:</b> 50305-30587-2</p> <p style="text-align: right;">Page    of    Pages</p>
-----------------------------------	---

# Radiated Emission Test 300 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

<p>Model: <b>Mouse Modell F-89XX</b></p> <p>Serial no.: <b>Prototyp #2</b></p> <p>Applicant: <b>Cherry GmbH</b></p> <p>Test site: <b>Fully anechoic room, cabin no. 2</b></p> <p>Tested on: <b>Test distance 3 metres Vertical Polarization</b></p> <p>Date of test: <b>09/10/2003</b>      Operator: <b>M. Steindl</b></p> <p>Test performed: <b>automatically</b>      File name: <b>default.emi</b></p>	<p>Comment:</p> <ul style="list-style-type: none"> <li>- 2 x 1.5 V alkaline battery supply</li> <li>- moving mouse</li> <li>- sending continuously</li> </ul>
--	---

<p>Detector: <b>Peak</b></p>	<p>List of values: <b>10 dB Margin                      50 Subranges</b></p>
----------------------------------	--

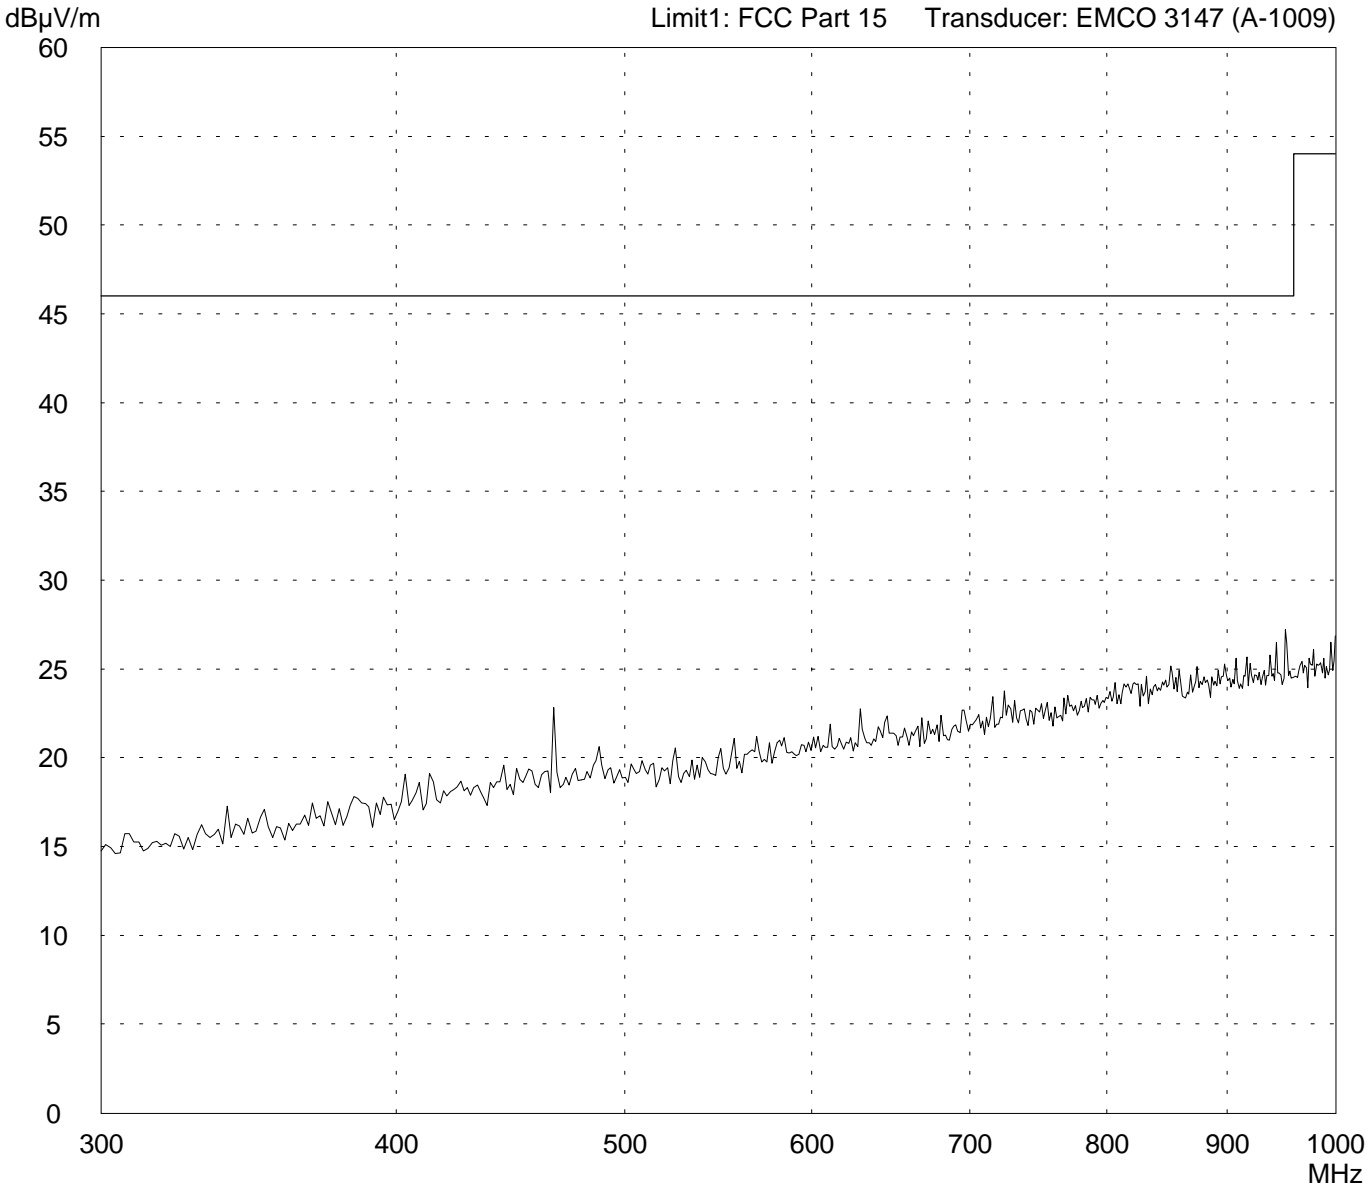

<p>Result: <b>Prescan</b></p>	<p>Project file: <b>50305-30587-2</b></p> <p style="text-align: right;">Page      of      Pages</p>
-----------------------------------	---