



FCC Test Report

FCC Part 22, 24 / RSS 132,133

For the
Psion Teklogix Inc.

Handheld Computer

Model Number: 7505-BTHC25

FCC ID: GM37505BTHC25
IC ID: 2739D-7505BTHC

TEST REPORT #: EMC_PSION_001_07502_FCC22_24_GM37505BTHC25
DATE: 2007-11-21



FCC listed:
A2LA accredited
IC recognized #
3925

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: +1 (408) 586 6200 • Fax: +1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM



Table of Contents

1 ASSESSMENT4

2 ADMINISTRATIVE DATA.....5

2.1 IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT.....5

2.2 IDENTIFICATION OF THE CLIENT5

2.3 IDENTIFICATION OF THE MANUFACTURER.....5

3 EQUIPMENT UNDER TEST (EUT).....6

3.1 SPECIFICATION OF THE EQUIPMENT UNDER TEST6

3.2 IDENTIFICATION OF THE EQUIPMENT UNDER TEST (EUT)6

3.3 IDENTIFICATION OF ACCESSORY EQUIPMENT6

4 SUBJECT OF INVESTIGATION.....7

5 MEASUREMENTS.....8

5.1 RF POWER OUTPUT8

5.1.1 *FCC 2.1046 Measurements required: RF power output.*.....8

5.1.2 *Limits:*8

5.1.2.1 *FCC 22.913 (a) Effective radiated power limits.*8

5.1.2.2 *FCC 24.232 (b)(c) Power limits.*8

5.1.3 *Conducted Output Power Measurement procedure:*.....8

5.1.4 *Radiated Output Power Measurement procedure:*.....9

5.1.5 *ERP Results 850 MHz band:*.....10

5.1.6 *EIRP Results 1900 MHz band:*.....10

5.2 OCCUPIED BANDWIDTH/EMISSION BANDWIDTH29

5.2.1 *FCC 2.1049 Measurements required: Occupied bandwidth.*.....29

5.2.2 *Occupied / emission bandwidth measurement procedure:*.....29

5.2.3 *Occupied / Emission bandwidth results 850 MHz band:*29

5.3 FREQUENCY STABILITY30

5.3.1 *Limit*30

5.3.2 *Test Results Frequency Stability (GSM-850)*.....31

5.3.3 *FREQUENCY STABILITY (PCS-1900)*32

5.4 SPURIOUS EMISSIONS CONDUCTED.....32

5.4.1 *FCC 2.1051 Measurements required: Spurious emissions at antenna terminals.*32

5.4.2 *Limits:*32

5.4.2.1 *FCC 22.917 Emission limitations for cellular equipment.*32

5.4.2.2 *FCC 24.238 Emission limitations for Broadband PCS equipment.*32

5.4.3 *Conducted out of band emissions measurement procedure:*.....33

5.4.4 *Test Results: Conducted Emission:*34

5.5 SPURIOUS EMISSIONS RADIATED34

5.5.1 *FCC 2.1053 Measurements required: Field strength of spurious radiation.*.....34

5.5.2 *Limits:*34

5.5.2.1 *FCC 22.917 Emission limitations for cellular equipment.*34

5.5.2.2 *FCC 24.238 Emission limitations for Broadband PCS equipment.*34

5.5.3 *Radiated out of band measurement procedure:*35

5.5.4 *Radiated out of band emissions results on EUT:*37

5.5.4.1 *Test Results Transmitter Spurious Emission GSM850:*.....37



5.5.4.2	Test Results Transmitter Spurious Emission UMTS FDD5.....	46
5.5.4.3	Test Results Transmitter Spurious Emission PCS-1900:.....	55
5.5.4.4	Test Results Transmitter Spurious Emission UMTS FDD2:.....	65
5.5.5	RECEIVER RADIATED EMISSIONS § 2.1053 / RSS-132 & 133	75
5.5.5.1	Test Results Receiver Spurious Emission GSM850.....	76
5.5.5.2	Test Results Receiver Spurious Emission UMTS FDD5.....	84
5.5.5.3	Test Results Receiver Spurious Emission GSM1900.....	92
5.5.5.4	Test Results Receiver Spurious Emission UMTS FDD2.....	96
5.6	AC POWER LINE CONDUCTED EMISSIONS § 15.107/207	101
5.6.1	<i>Limits</i>	101
5.6.2	<i>Results, TX Transmit Line:</i>	102
5.6.3	<i>TX Transmit Neutral:</i>	104
5.6.4	<i>Results, Idle Line:</i>	106
5.6.5	<i>TX Idle Neutral:</i>	108
6	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	110
7	REFERENCES	111
8	BLOCK DIAGRAMS	112



1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and in compliance with the applicable criteria specified in Industry Canada rules RSS132 and RSS133.

Company	Description	Model #
Psion Teklogix Inc.	Handheld Computer	7505-BTHC25

Technical responsibility for area of testing:

Lothar Schmidt
(Director Regulatory and
Antenna Services)

2007-11-21 EMC & Radio

Date	Section	Name	Signature
------	---------	------	-----------

This report is prepared by:

Peter Mu
(EMC Project Engineer)

2007-11-21 EMC & Radio

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID.



2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt
Responsible Project Leader:	Peter Mu
Date of test:	2007-11-9 to 2007-11-21

2.2 Identification of the Client

Applicant's Name:	Psion Teklogix Inc
Address Line 1:	2100 Meadowvale Boulevard
Address Line 2:	
City/ Zip Code	Mississauga, Ontario, L5N 7J9
Country:	Canada
Contact Person:	Sada Dharwarkar
Phone No.:	905-812-6200 ex 3358
Fax:	905-812-6301
e-mail:	Sada.dharwarkar@psionteklogix.com

2.3 Identification of the Manufacturer

Same as above applicant



3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Marketing Name of EUT (if not same as Model No.)	Handheld Computer
Description	
Model No.	7505-BTHC25
FCC-ID	GM37505BTHC25
IC-ID (Industry Canada)	2739D-7505BTHC
Frequency Range:	824.2MHz – 848.8MHz for GSM 850 1850.2MHz – 1909.8MHz for PCS 1900 826.4MHz – 846.6MHz for UMTS FDD5 1852.4MHz – 1907.6MHz for UMTS FDD2
Type(s) of Modulation:	GMSK, 8PSK, QPSK, Dual BPSK
Number of Channels:	124 for GSM-850, 299 for PCS-1900
Antenna Type:	PIFA 0dBi
Max. Output Power:	Conducted : Tests Conducted not by Cetecom. Radiated : see section 5.1.5 and 5.1.6. 30.87dBm (1.22W) @ GSM 836.6MHz ERP values 27.70dBm (0.589W) @ PCS 1880MHz EIRP values

3.2 Identification of the Equipment Under Test (EUT)

EUT #	TYPE	MANF.	MODEL	SERIAL #
1	EUT	Psion Teklogix Inc	7505-BTHC25	N/A

3.3 Identification of Accessory equipment

AE #	TYPE	MANF.	MODEL	SERIAL #
1	AC/DC ADAPTER	Sino-American	SA115C-05	N/A



4 Subject of Investigation

All testing was performed on the EUT listed in Section 3. The EUT was maximized in the X,Y, Z positions , all data in this report shows the worst case between horizontal and vertical polarization for above 1GHz.

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS132 and RSS133.

This EUT contains an FCC approved module with the FCC ID QIPHC25. This report refers only to the radiated measurements in GSM and WCDMA technology.

5 Measurements

5.1 RF Power Output

5.1.1 FCC 2.1046 Measurements required: RF power output.

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

5.1.2 Limits:

5.1.2.1 FCC 22.913 (a) Effective radiated power limits.

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

5.1.2.2 FCC 24.232 (b)(c) Power limits.


(b) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP).

(c) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

5.1.3 Conducted Output Power Measurement procedure:

Based on TIA-603C 2004

2.2.1 Conducted Carrier Output Power Rating




1. Connect the equipment as shown in the above diagram. A Digital Radiocommunication Tester (DRT) is used to enable the EUT to transmit and to measure the output power.
2. Adjust the settings of the DRT to set the EUT to its maximum power at the required channel.
3. Record the output power level measured by the DRT.
4. Correct the measured level for all losses in the RF path.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

5.1.4 Radiated Output Power Measurement procedure:

Based on TIA-603C 2004

2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)

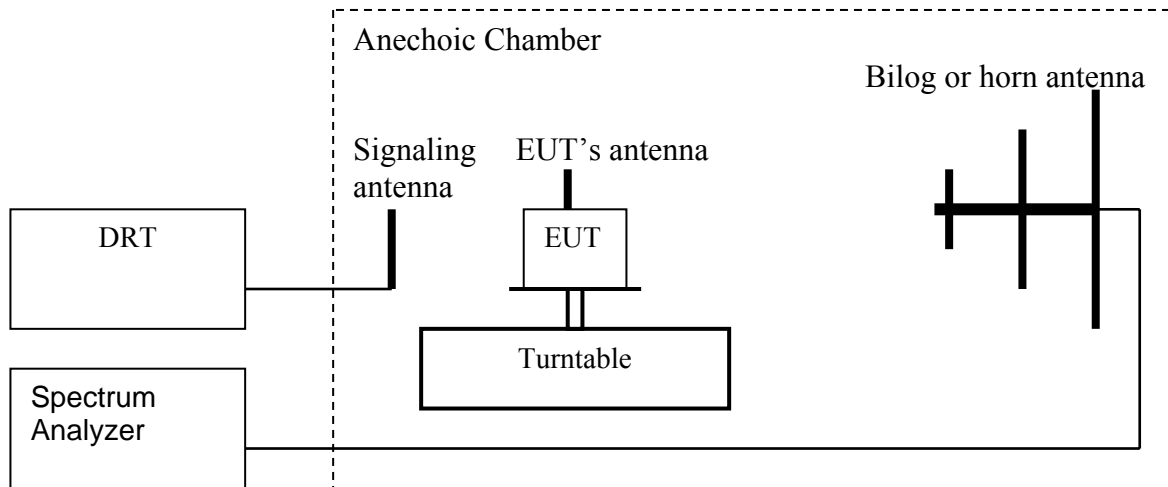

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.
 2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
 3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
 4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
 5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
 6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
 7. Determine the ERP using the following equation:

$$\mathbf{ERP\ (dBm) = LVL\ (dBm) + LOSS\ (dB)}$$
 8. Determine the EIRP using the following equation:

$$\mathbf{EIRP\ (dBm) = ERP\ (dBm) + 2.14\ (dB)}$$
 9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band. **Spectrum analyzer settings = rbw=vbw=3MHz**
- (note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4, 7 and 8 above are performed with test software.)



5.1.5 ERP Results 850 MHz band:

Power Control Level	Burst Peak ERP
5	≤38.45dBm (7W)

Frequency (MHz)	Effective Radiated Power (dBm)	
	GSM	EGPRS
824.2	29.28 (31.42)	27.39 (29.53)
836.6	30.87 (33.01)	28.02 (30.16)
848.8	28.44 (30.58)	25.54 (27.68)

Frequency (MHz)	Effective Radiated Power (dBm)
	UMTS FDD5
826.4	22.29 (24.43)
836.6	22.74 (24.88)
846.6	23.10 (25.24)

*Values reported are ERP and (EIRP) in parentheses.

5.1.6 EIRP Results 1900 MHz band:

Power Control Level	Burst Peak EIRP
0	≤33dBm (2W)

Frequency (MHz)	Effective Isotropic Radiated Power (dBm)	
	GSM	EGPRS
1850.2	26.32	24.08
1880.0	27.70	25.49
1909.8	27.47	25.72

Frequency (MHz)	Effective Radiated Power (dBm)
	UMTS FDD5
1852.4	19.73
1880	22.16
1907.6	20.86




EIRP (GSM 850) CHANNEL 128 §22.913(a)

EUT: 7505
 Customer:: Psion Teklogix Inc
 Test Mode: GSM850
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: PETER
 Voltage: Battery
 Comments: TT227° ANT 126CM

SWEEP TABLE: "EIRP 850 CH 128 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
819.2 MHz	829.2 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM
		MaxPeak			

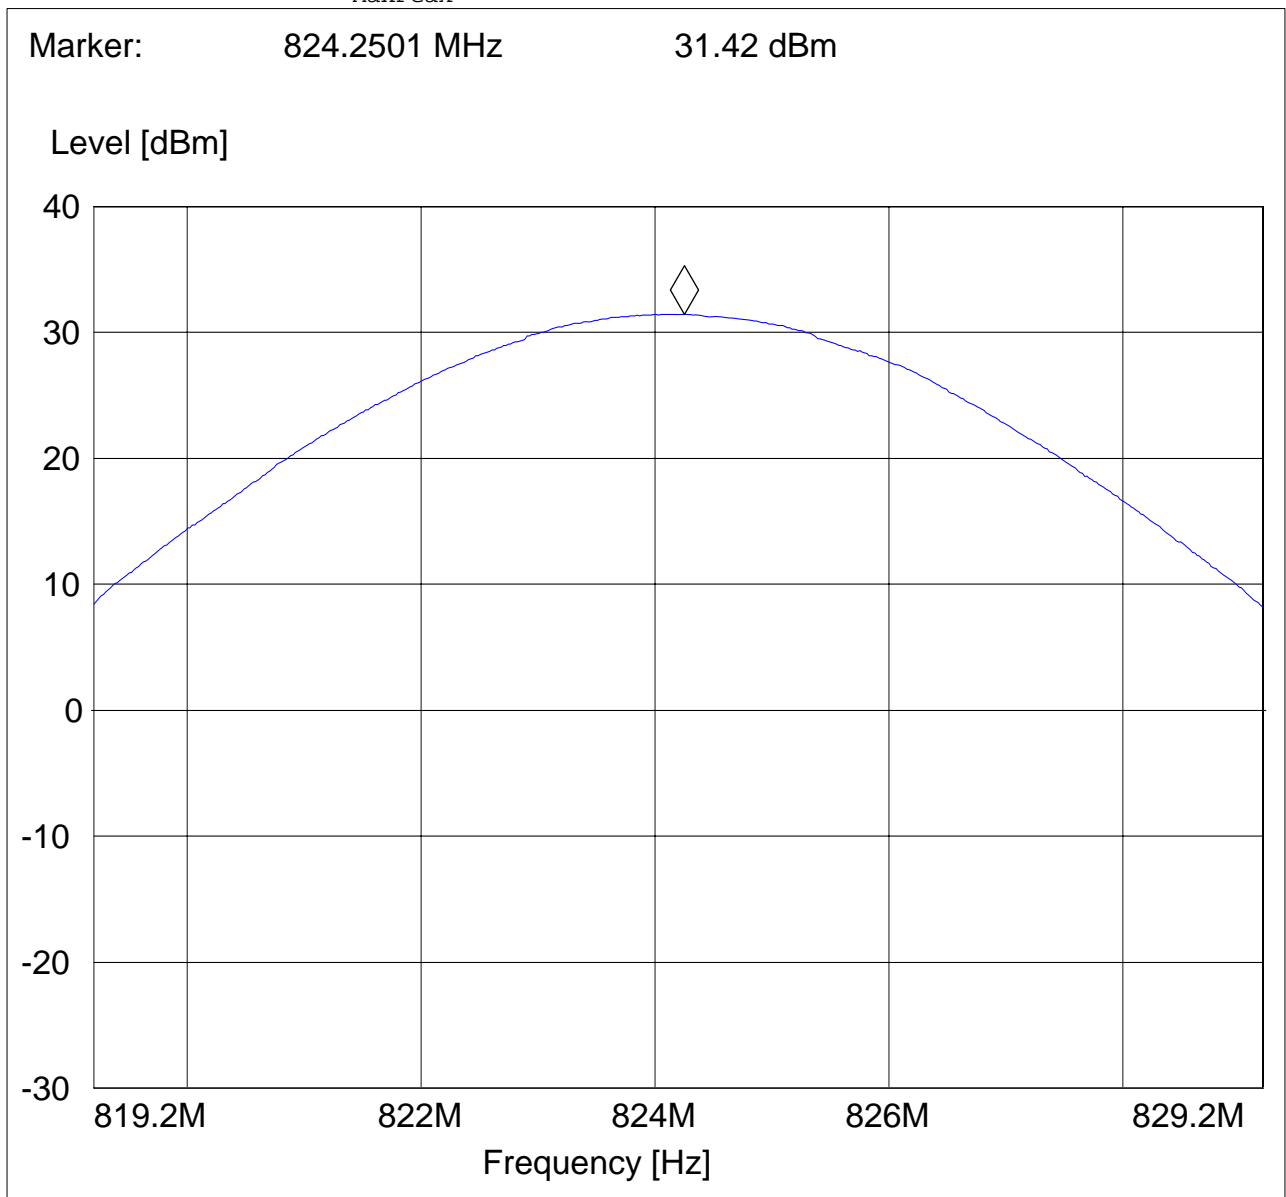




EIRP (GSM 850) CHANNEL 190 §22.913(a)

EUT: 7505
 Customer:: Psion Teklogix Inc
 Test Mode: GSM850
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: PETER
 Voltage: Battery
 Comments: TT227° ANT 126CM

SWEEP TABLE: "EIRP 850 CH 190 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
831.6 MHz	841.6 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM
		MaxPeak			

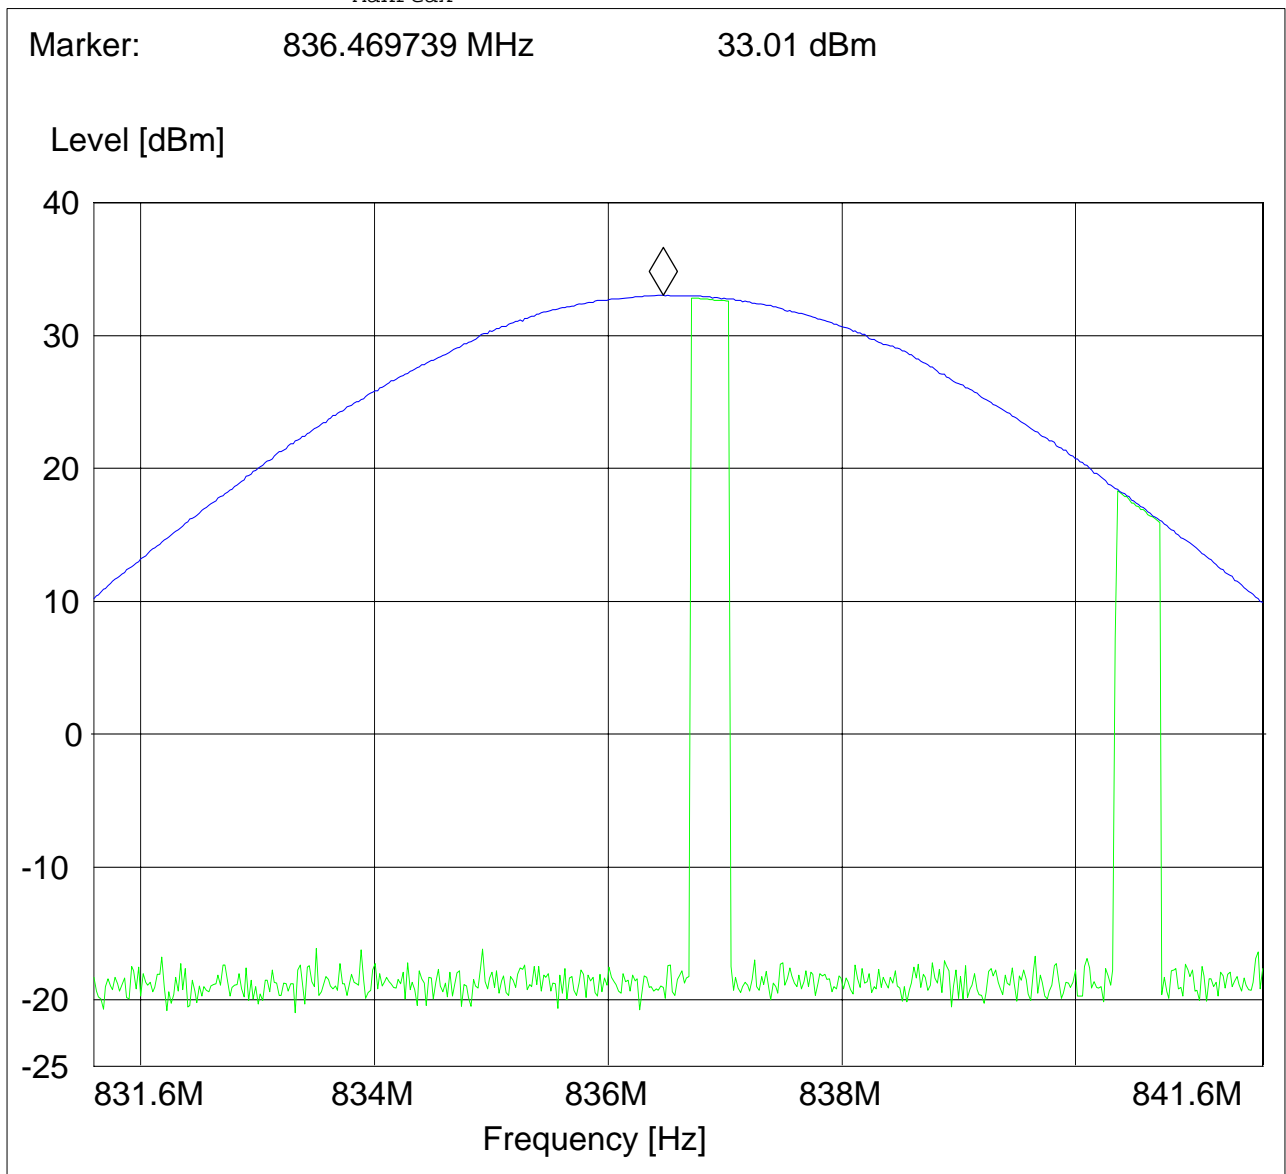




EIRP (GSM 850) CHANNEL 251 §22.913(a)

EUT: 7505
 Customer:: Psion Teklogix Inc
 Test Mode: GSM850
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: PETER
 Voltage: Battery
 Comments: TT227° ANT 126CM

SWEEP TABLE: "EIRP 850 CH 251 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
843.8 MHz	853.8 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

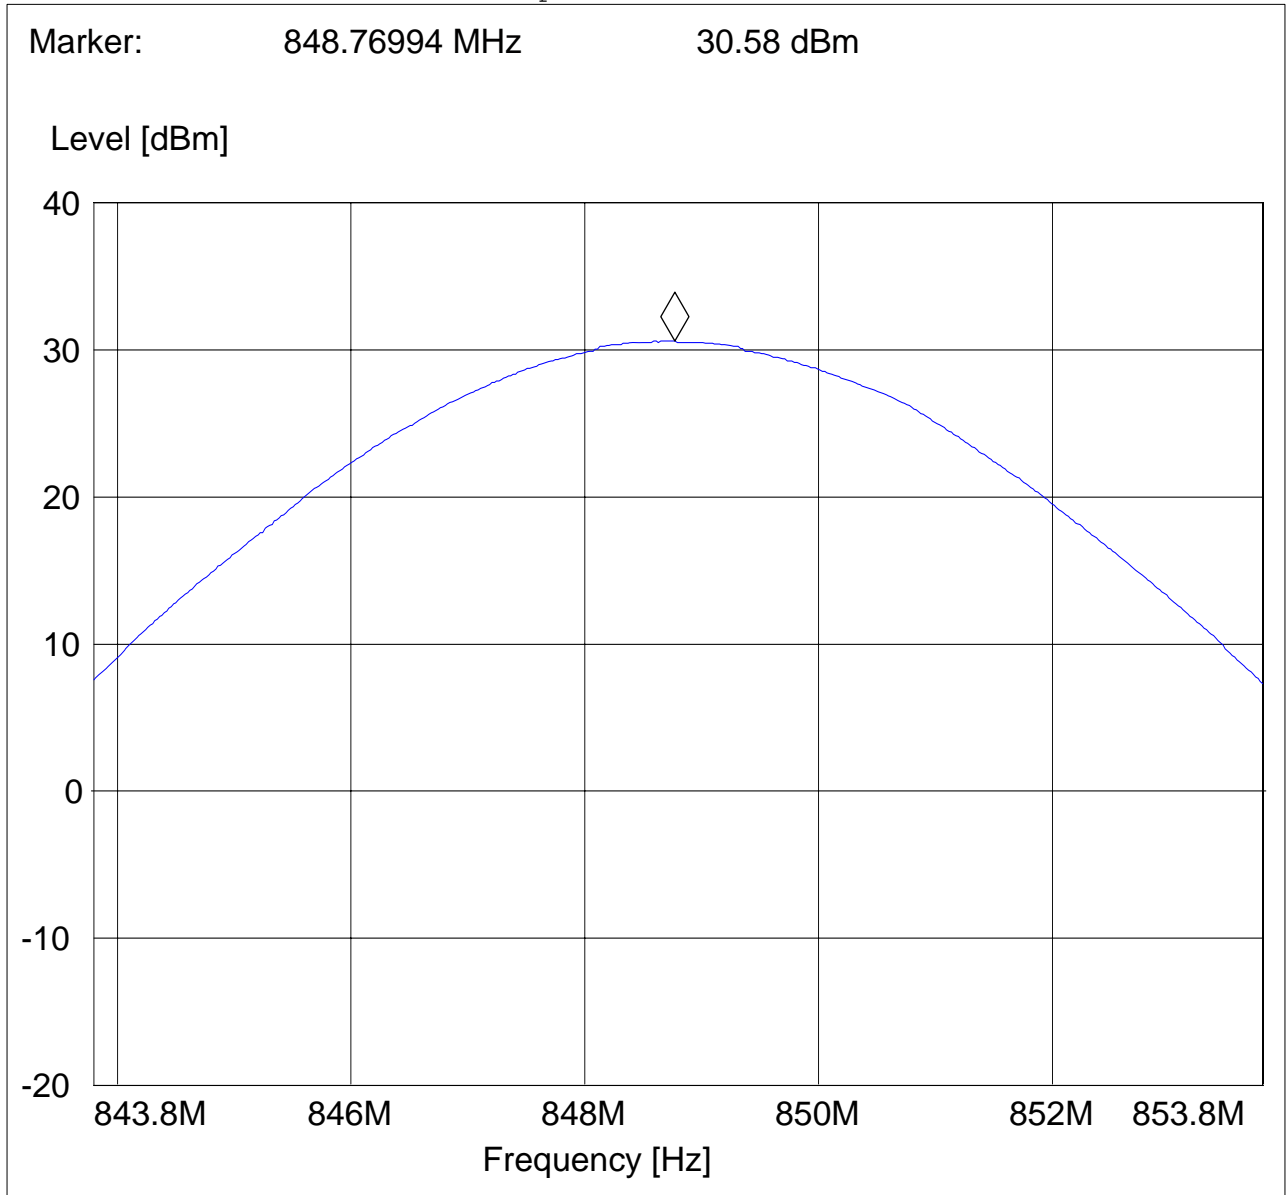




EIRP (EGPRS 850) CHANNEL 128 §22.913(a)

EUT: 7505
 Customer:: PSION
 Test Mode: EGPRS
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: PETER
 Voltage: AC Adaptor
 Comments:

SWEEP TABLE: "EIRP 850 CH 128 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
819.2 MHz	829.2 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM
		MaxPeak			

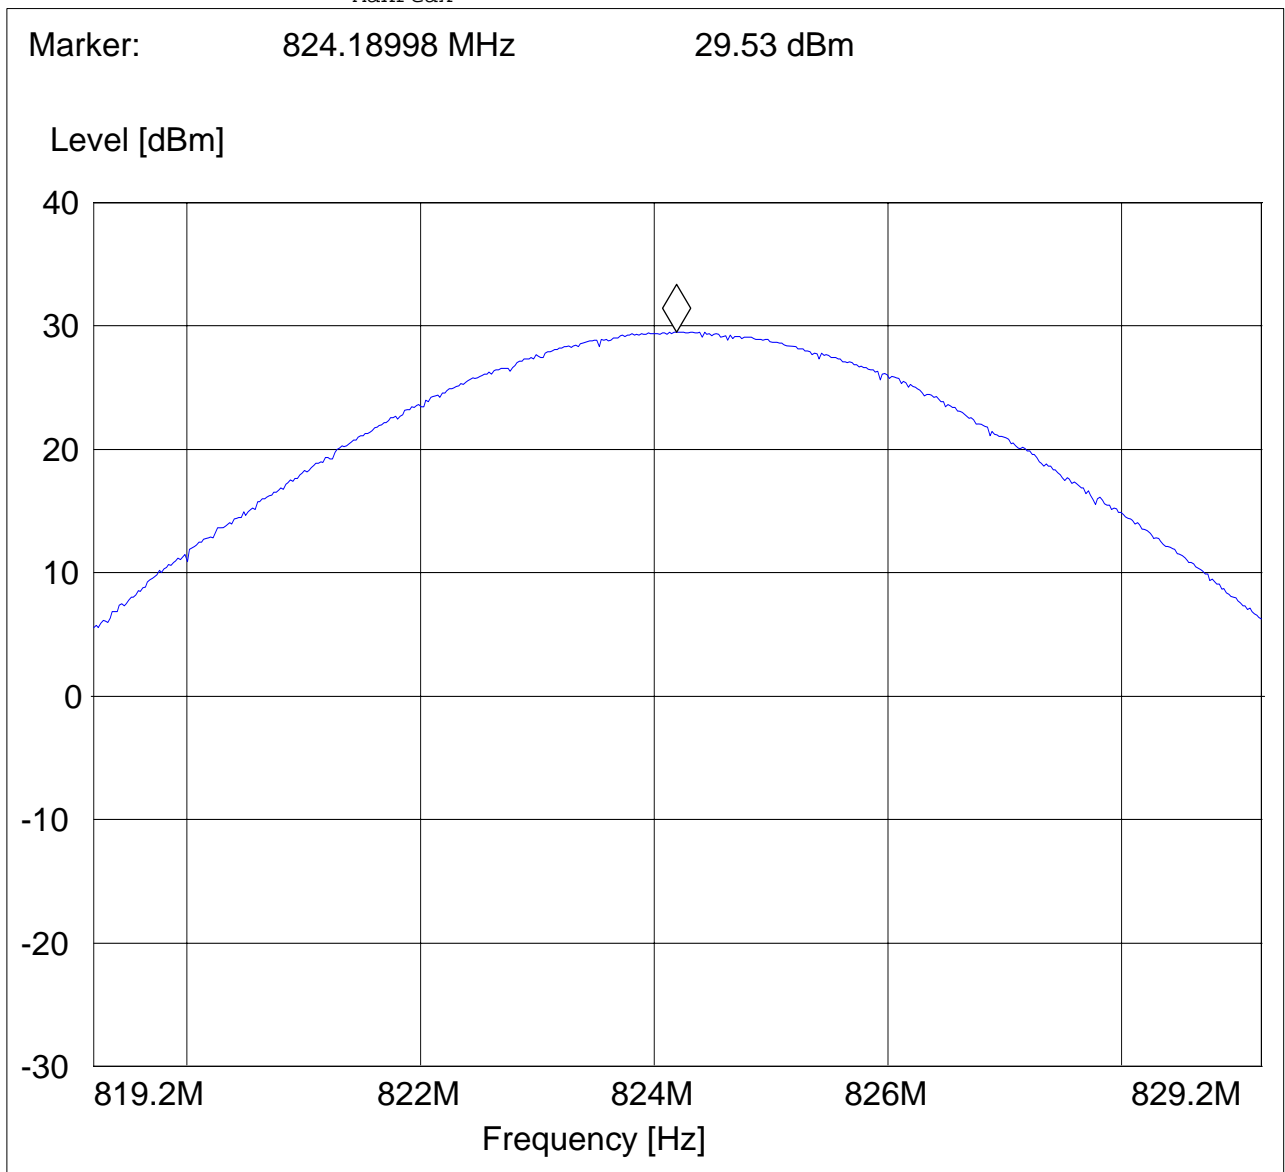




EIRP (EGPRS 850) CHANNEL 190 §22.913(a)

EUT: 7505
 Customer:: Psion Teklogix Inc
 Test Mode: EGPRS850
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: PETER
 Voltage: Battery
 Comments: TT227° ANT 126CM

SWEEP TABLE: "EIRP 850 CH 190 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
831.6 MHz	841.6 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM
		MaxPeak			

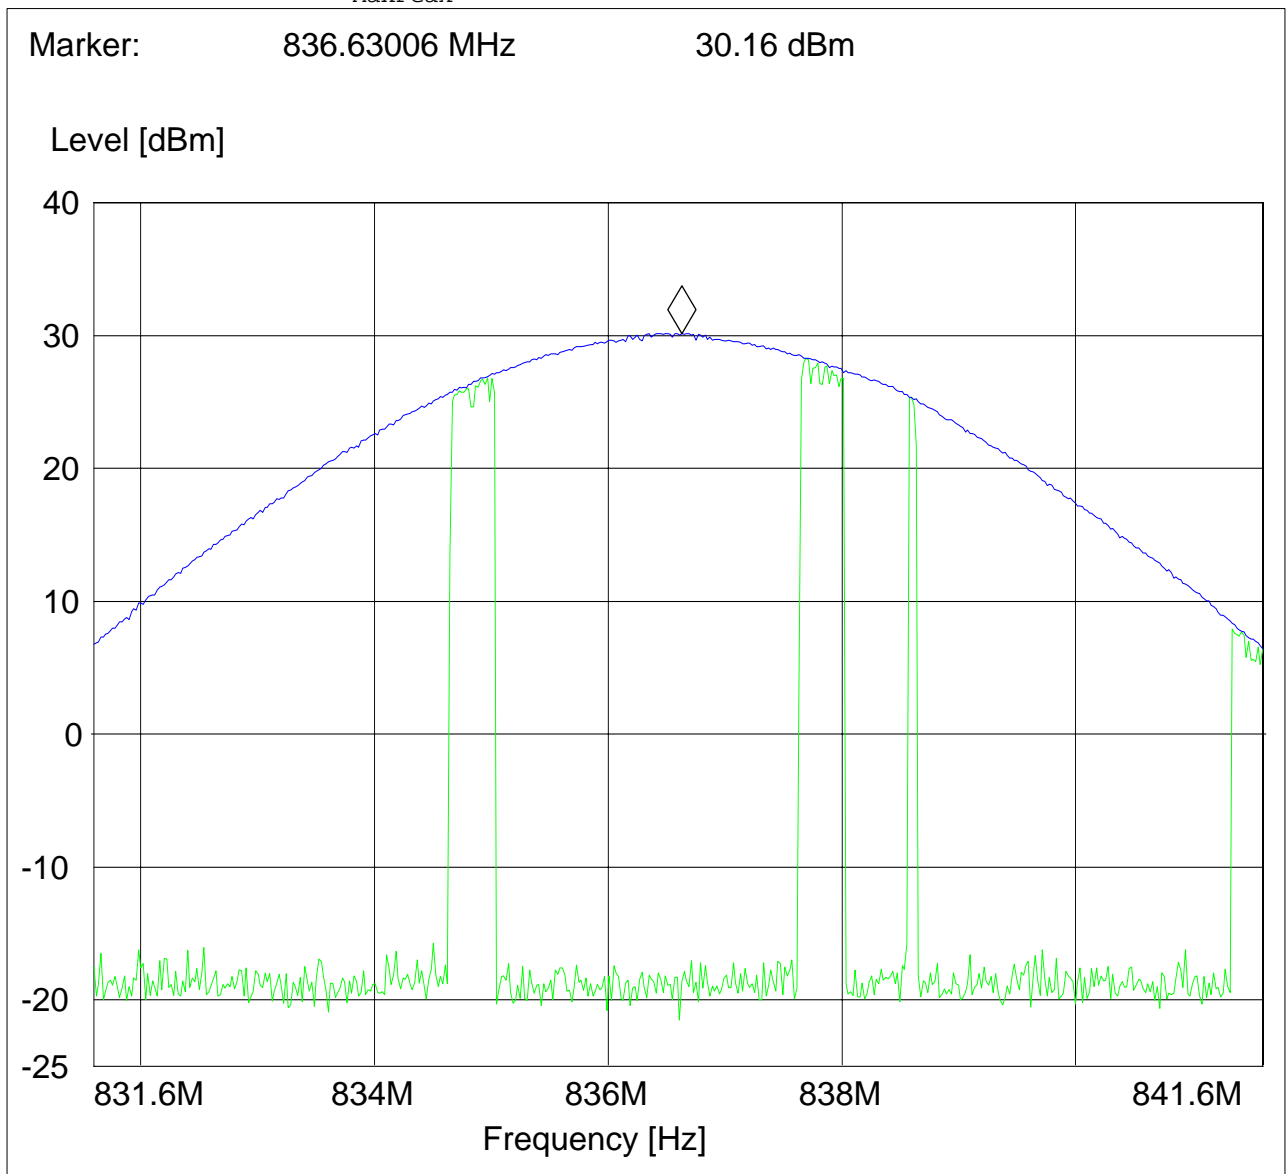




EIRP (EGPRS 850) CHANNEL 251 §22.913(a)

EUT: 7505
 Customer:: Psion Teklogix Inc
 Test Mode: EGPRS850
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: PETER
 Voltage: Battery
 Comments: TT227° ANT 126CM

SWEEP TABLE: "EIRP 850 CH 251 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
843.8 MHz	853.8 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

Marker: 848.83006 MHz 27.68 dBm

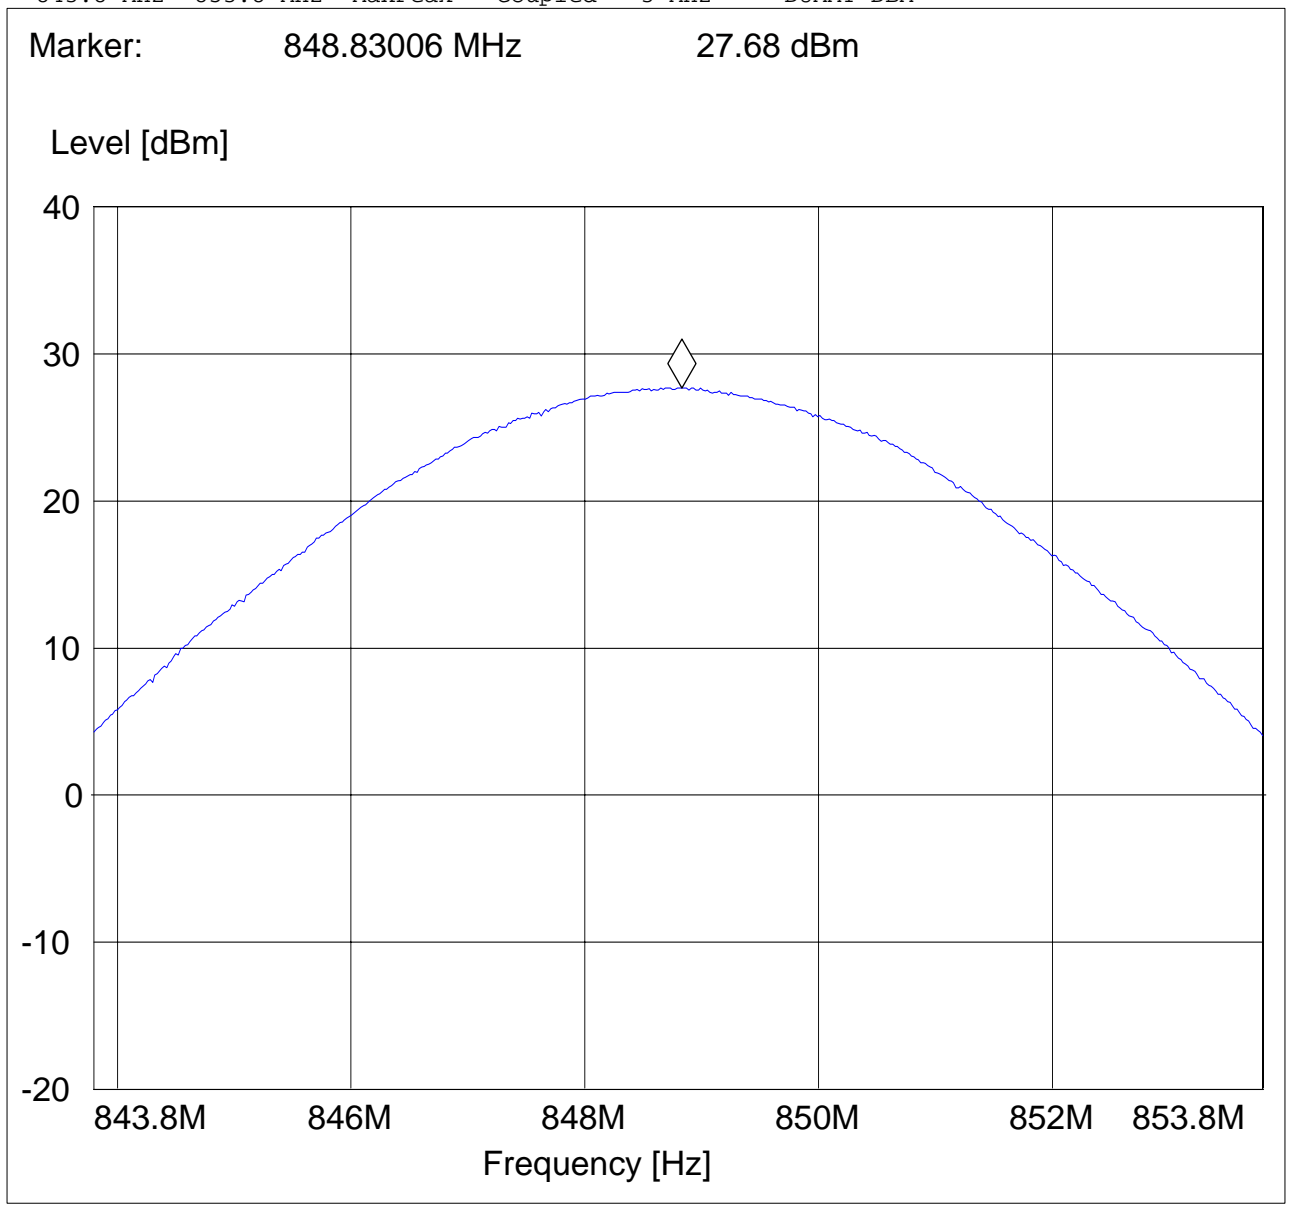




EIRP (UMTS FDD5) CHANNEL 4132 §22.913(a)

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD V
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Sam
 Voltage: AC ADAPTER
 Comments: TT@210° ANT@142

SWEEP TABLE: "EIRP 850 CH 4132H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
816.4 MHz	836.4 MHz	MaxPeak	Coupled	5 MHz	DUMMY-DBM
		MaxPeak			

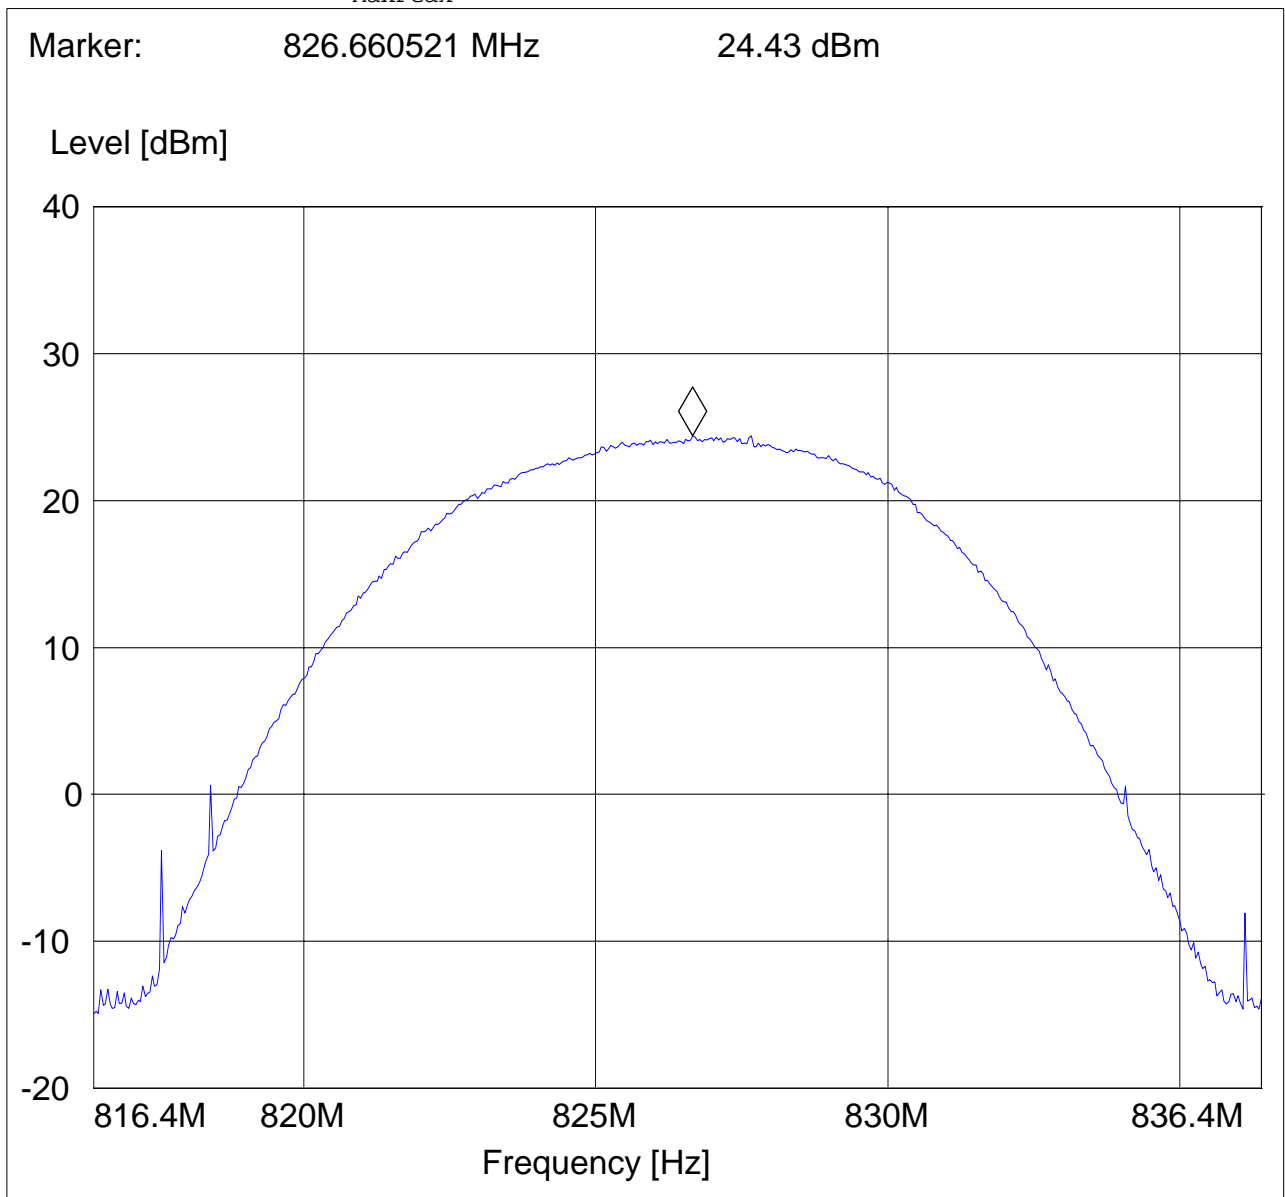




EIRP (UMTS FDD5) CHANNEL 4183 §22.913(a)

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD V
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Sam
 Voltage: AC ADAPTER
 Comments: TT@210° ANT@142

SWEEP TABLE: "EIRP 850 CH 4183 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
826.6 MHz	846.6 MHz	MaxPeak	Coupled	5 MHz	DUMMY-DBM
		MaxPeak			

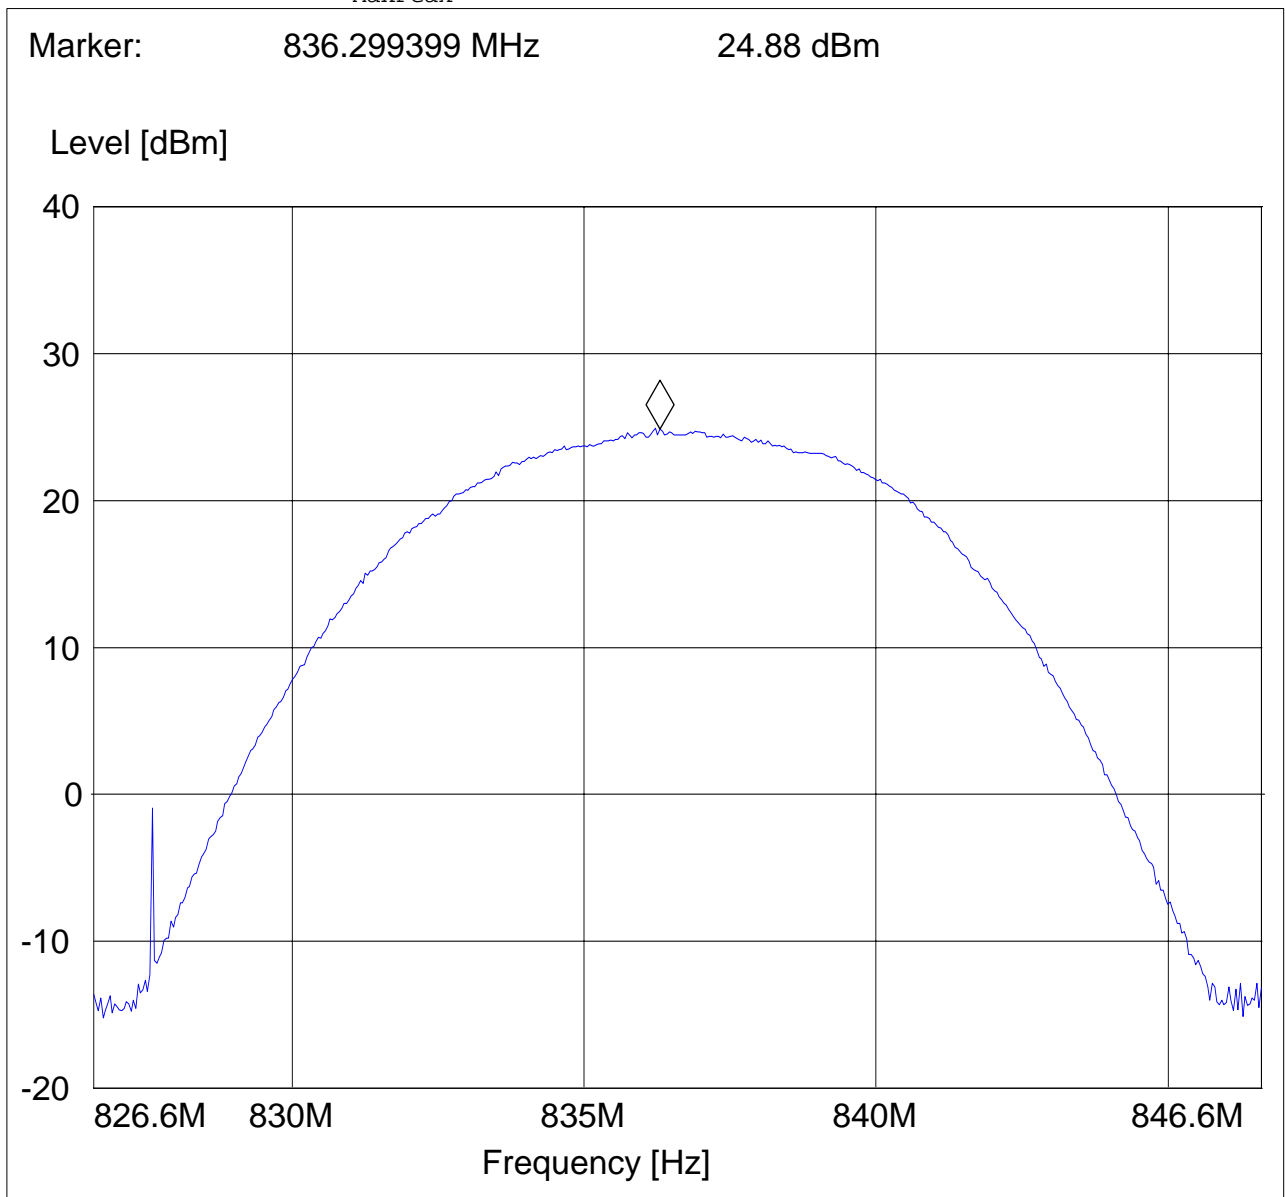




EIRP (UMTS FDD5) CHANNEL 4233 §22.913(a)

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD V
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Sam
 Voltage: AC ADAPTER
 Comments: TT@210° ANT@142

SWEEP TABLE: "EIRP 850 CH 4233H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
836.6 MHz	856.6 MHz	MaxPeak	Coupled	5 MHz	DUMMY-DBM
		MaxPeak			

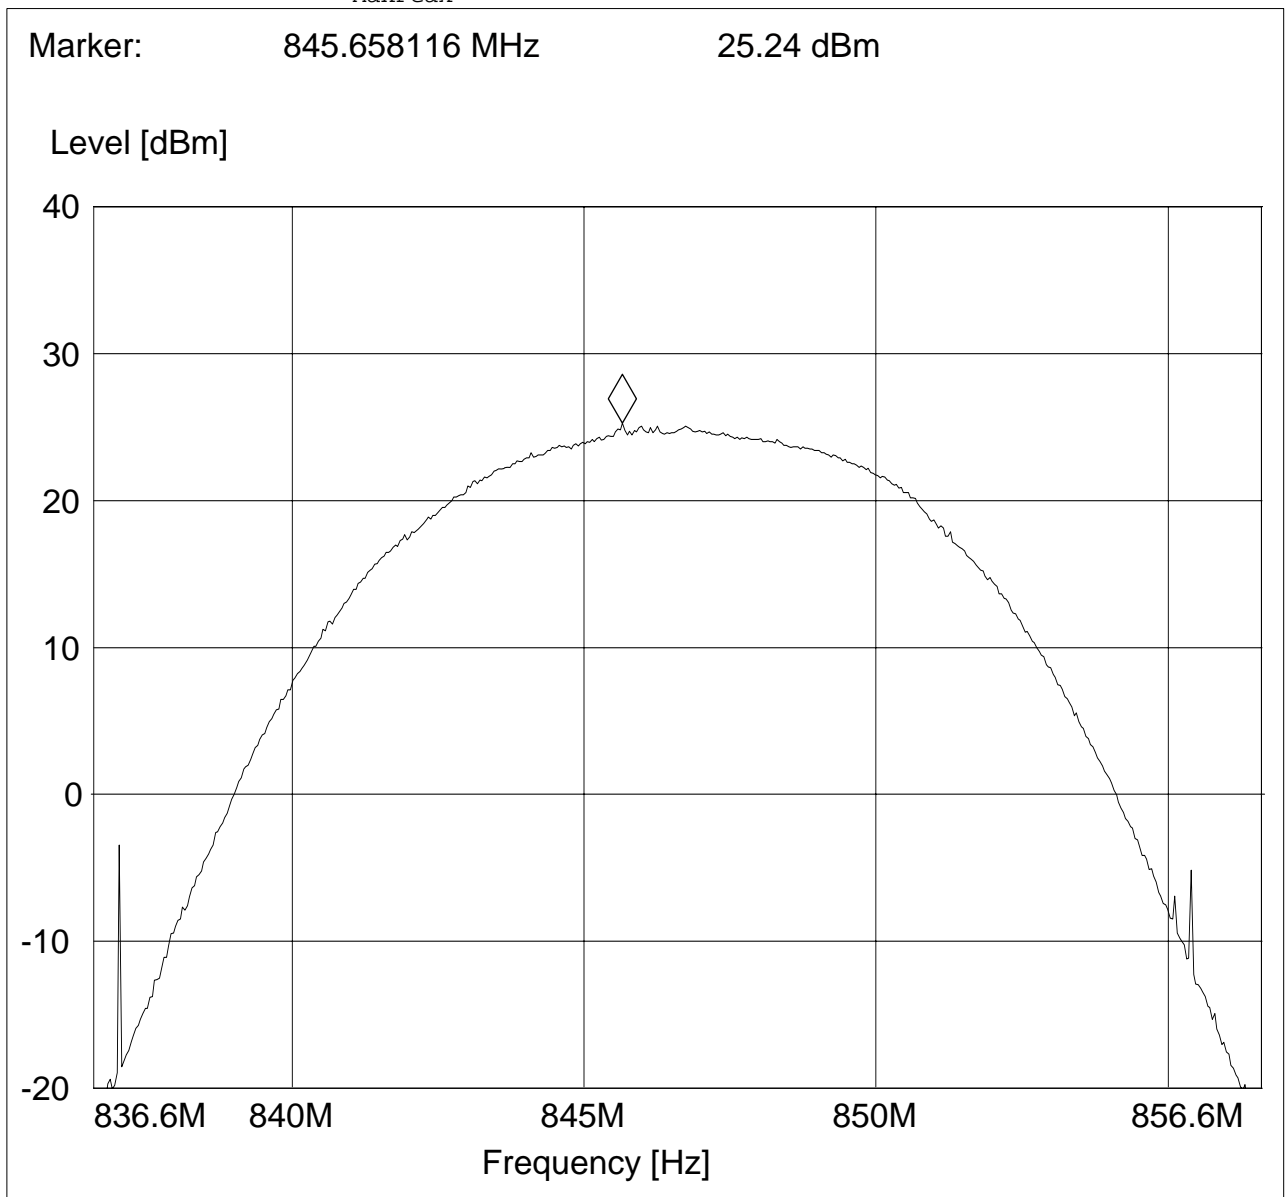




EIRP (PCS-1900) CHANNEL 512 §24.232(b)

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 1900; CH 512
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: Chris
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "EIRP 1900 CH512"

Short Description: EIRP PCS 1900 for channel-512
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 1.8 GHz 1.9 GHz MaxPeak Coupled 3 MHz DUMMY-DBM

Marker: 1.85031022 GHz 26.32 dBm

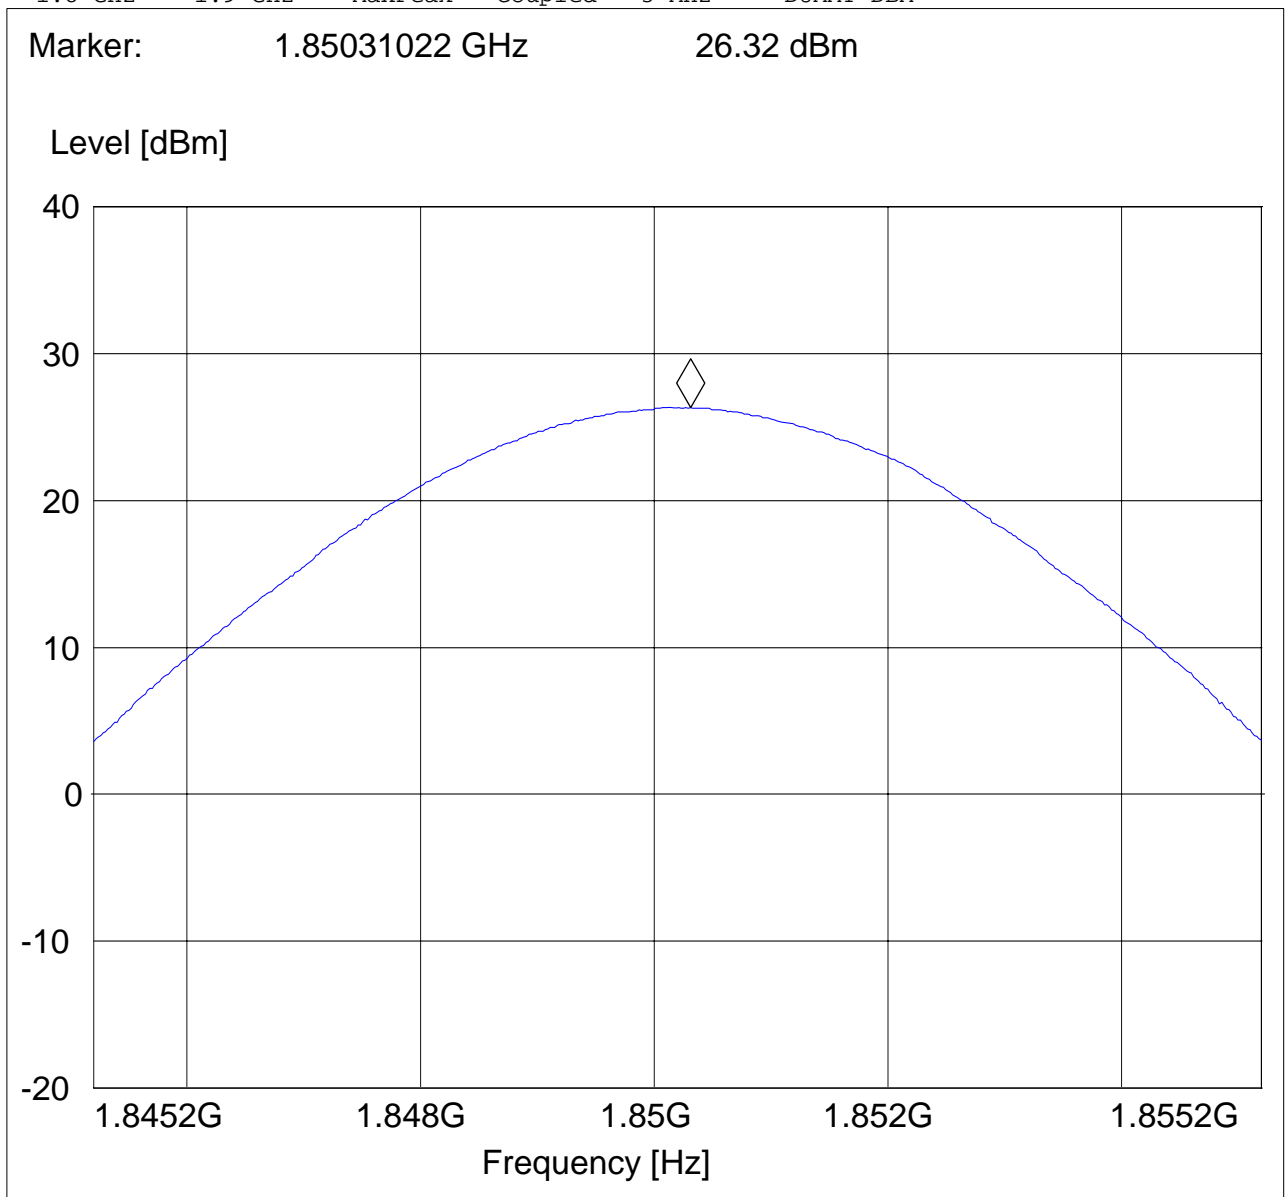




EIRP (PCS-1900) CHANNEL 661 §24.232(b)

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 1900; CH 661
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: Chris
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "EIRP 1900 CH661"

Short Description:		EIRP PCS 1900 for channel-661				
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer	
1.9 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM	
		MaxPeak				

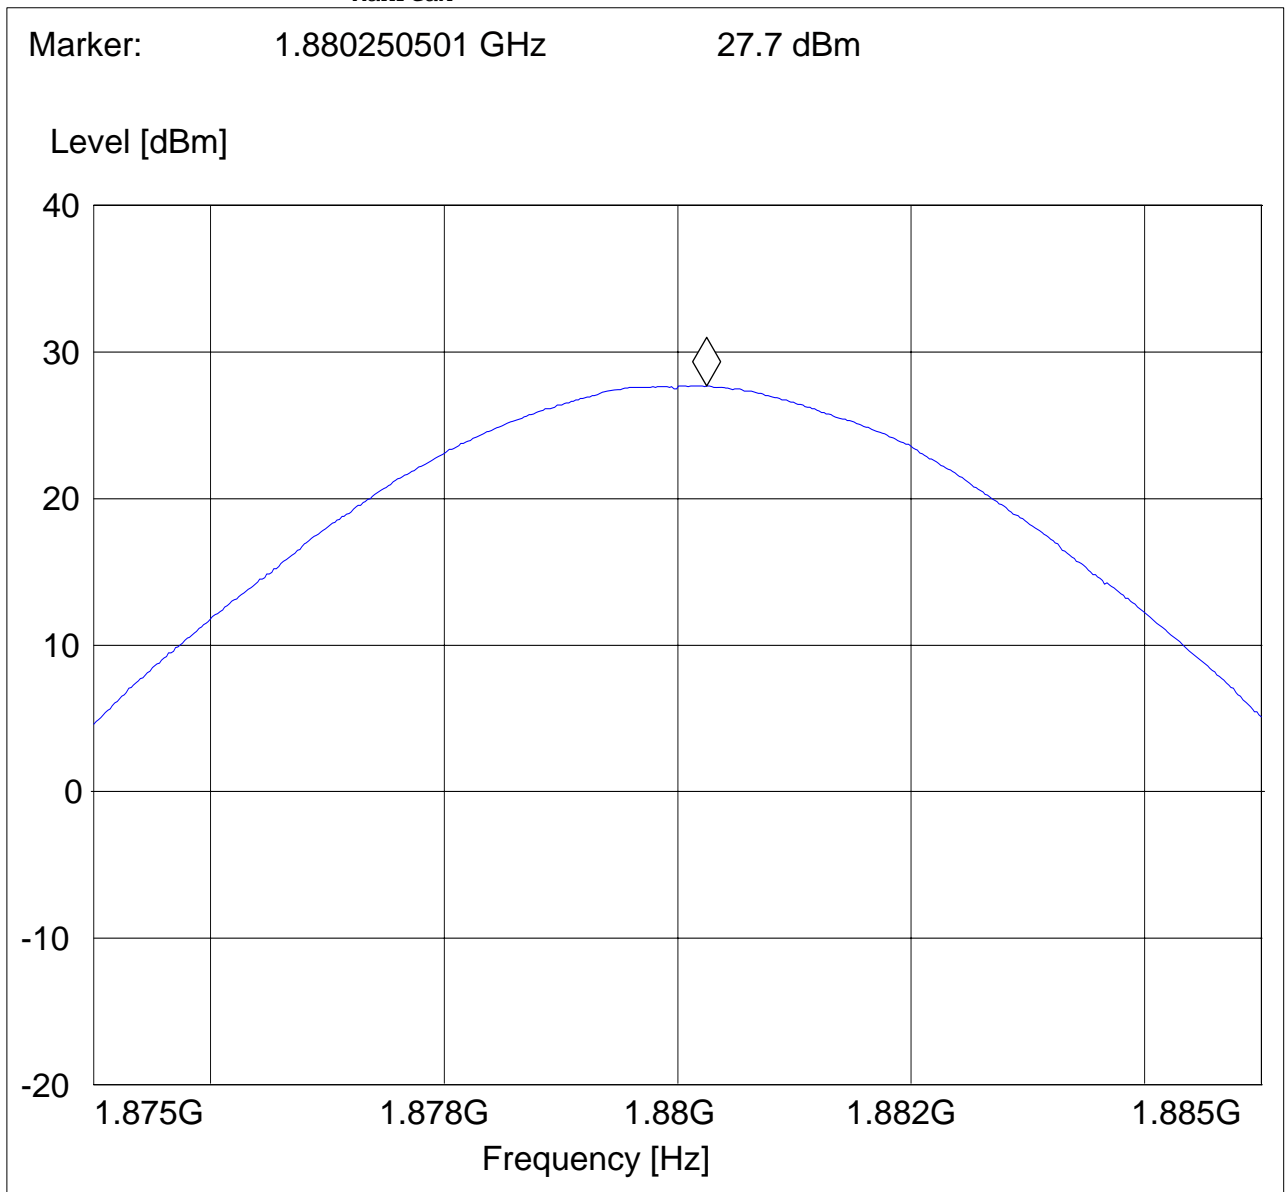




EIRP (PCS-1900) CHANNEL 810 §24.232(b)

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 1900; CH 810
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: Chris
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "EIRP 1900 CH810"

Short Description:		EIRP PCS 1900 for channel-810				
Start	Stop	Detector	Meas.	IF	Transducer	
Frequency	Frequency		Time	Bandw.		
1.9 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM	

Marker: 1.909970341 GHz 27.47 dBm

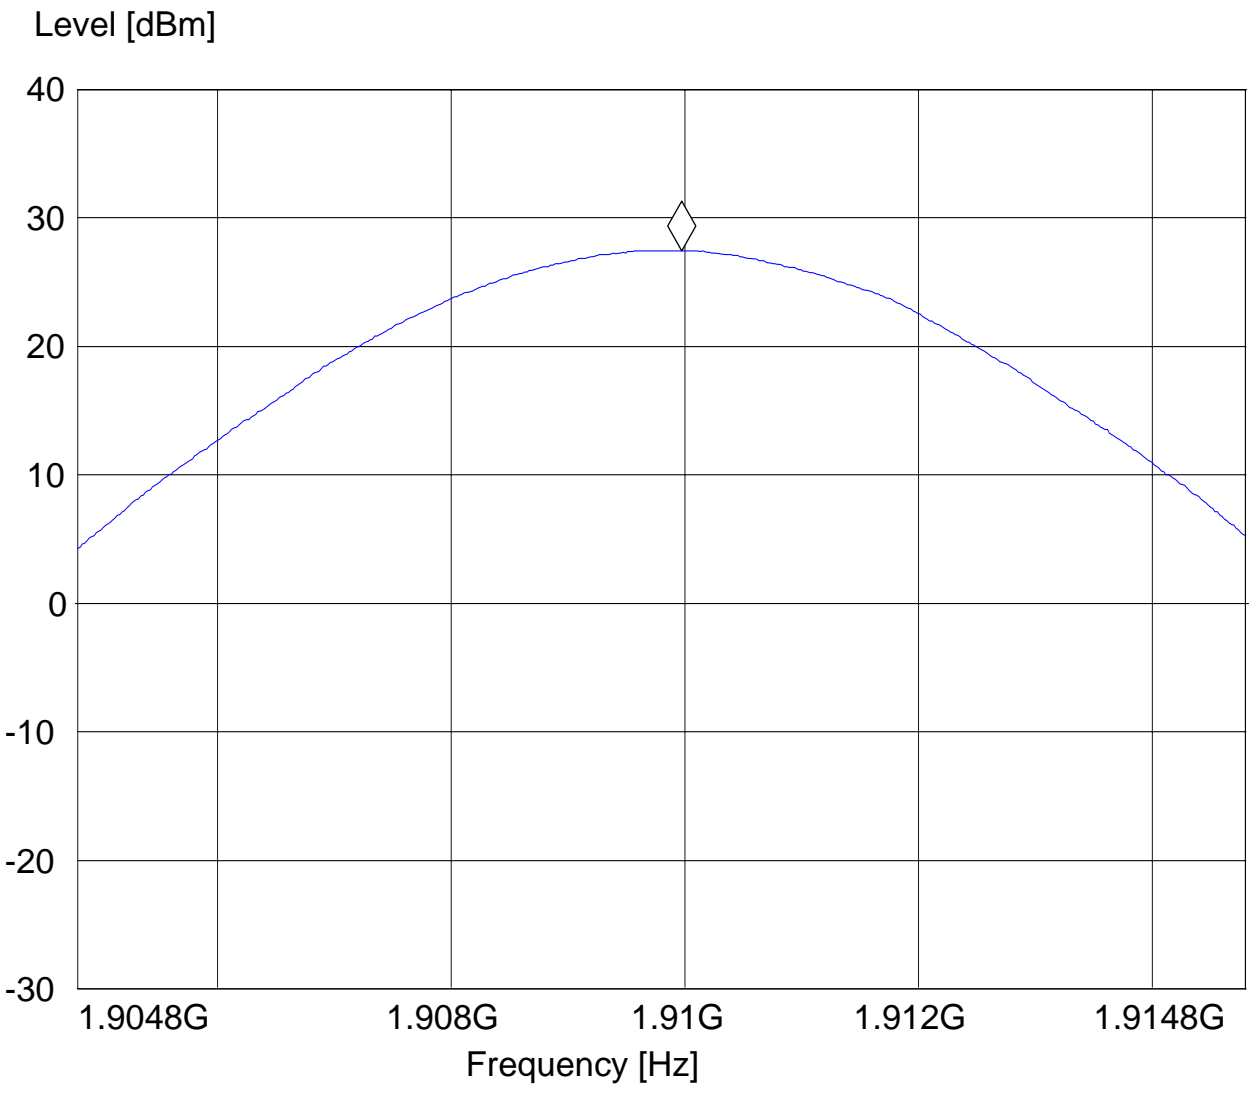




EIRP (EGPRS 1900) CHANNEL 512 §24.232(b)

EUT: 7505
 Customer:: Psion Teklogix Inc
 Test Mode: EGPRS1900
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: PETER
 Voltage: Battery
 Comments: TT270°

SWEEP TABLE: "EIRP 1900 CH512"

Short Description:		EIRP PCS 1900 for channel-512				
Start	Stop	Detector	Meas.	IF	Transducer	
Frequency	Frequency		Time	Bandw.		
1.8 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM	

Marker: 1.85008978 GHz 24.08 dBm

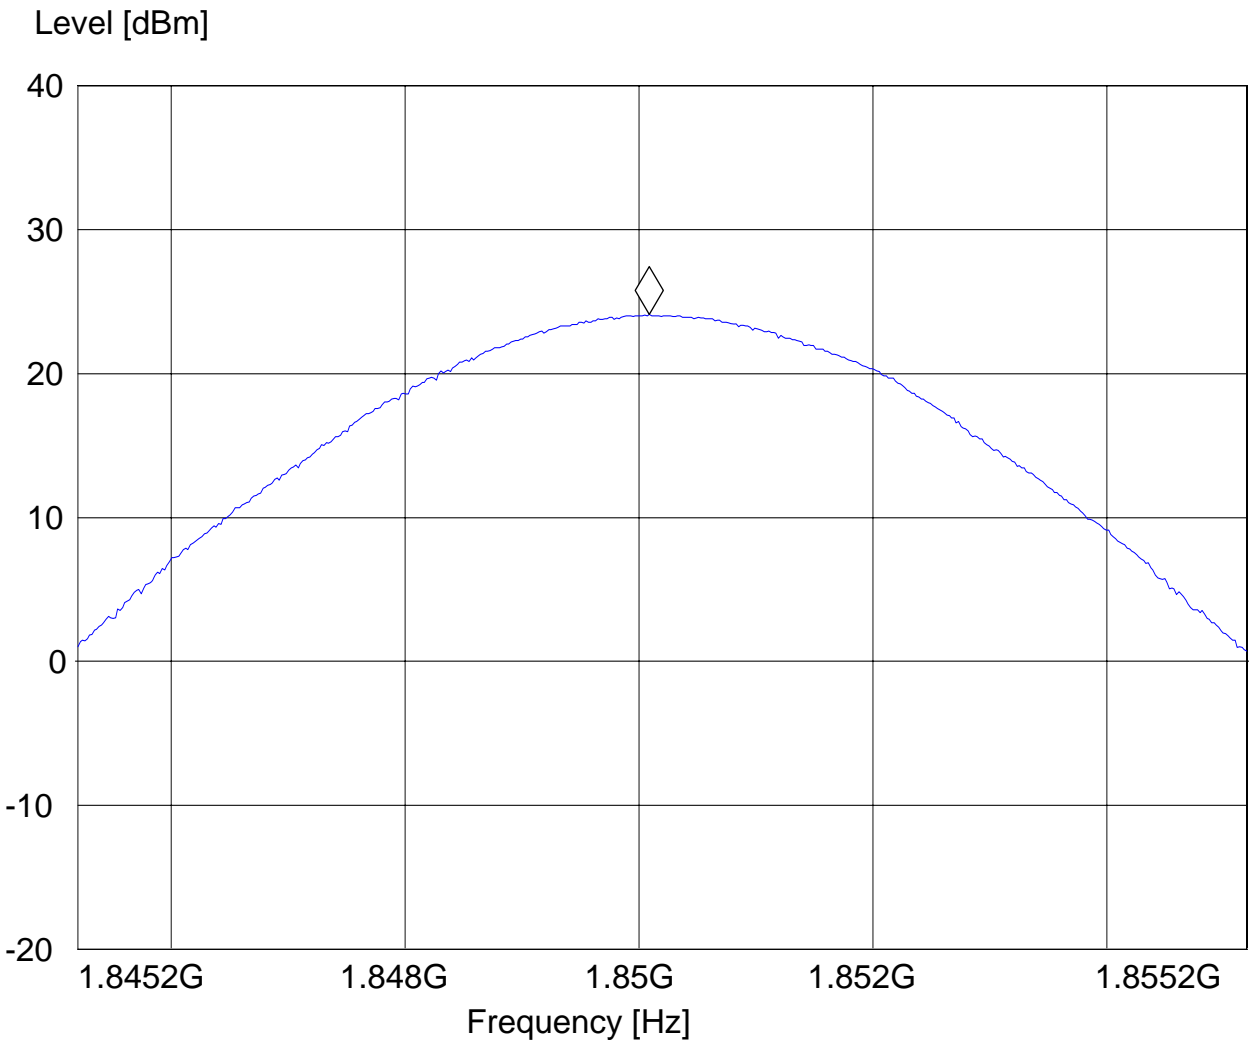




EIRP (EGPRS 1900) CHANNEL 661 §24.232(b)

EUT: 7505
 Customer:: Psion Teklogix Inc
 Test Mode: EGPRS1900
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: PETER
 Voltage: Battery
 Comments: TT270°

SWEEP TABLE: "EIRP 1900 CH661"

Short Description:		EIRP PCS 1900 for channel-661			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.9 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM
		MaxPeak			

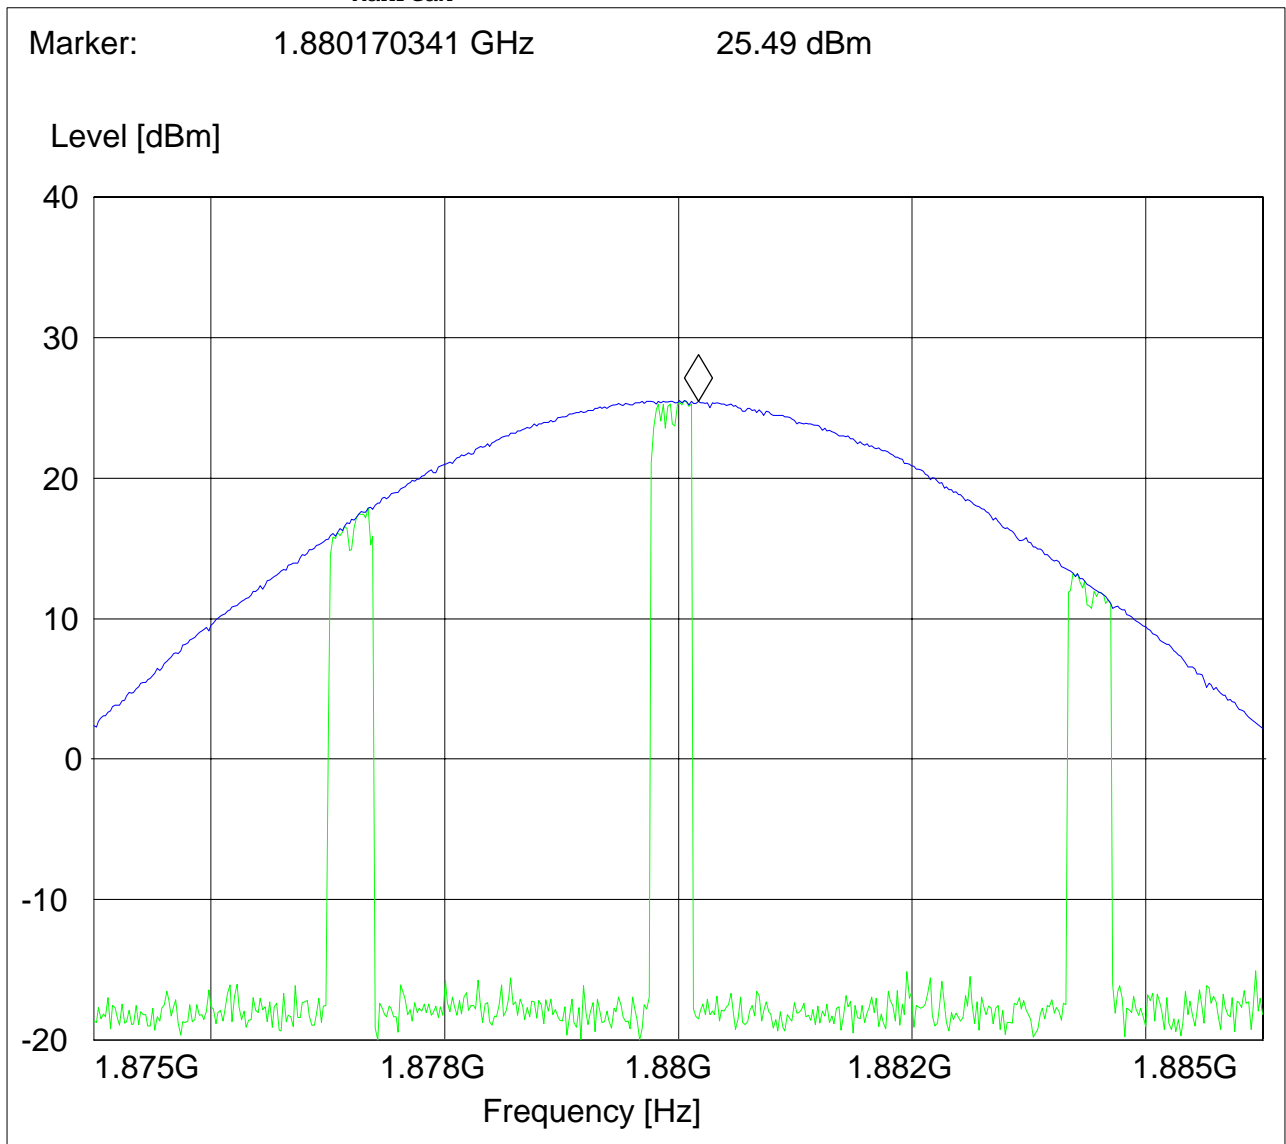




EIRP (EGPRS 1900) CHANNEL 810 §24.232(b)

EUT: 7505
 Customer:: Psion Teklogix Inc
 Test Mode: EGPRS1900
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: PETER
 Voltage: Battery
 Comments: TT270°

SWEEP TABLE: "EIRP 1900 CH810"

Short Description: EIRP PCS 1900 for channel-810
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 1.9 GHz 1.9 GHz MaxPeak Coupled 3 MHz DUMMY-DBM

Marker: 1.90972986 GHz 25.72 dBm

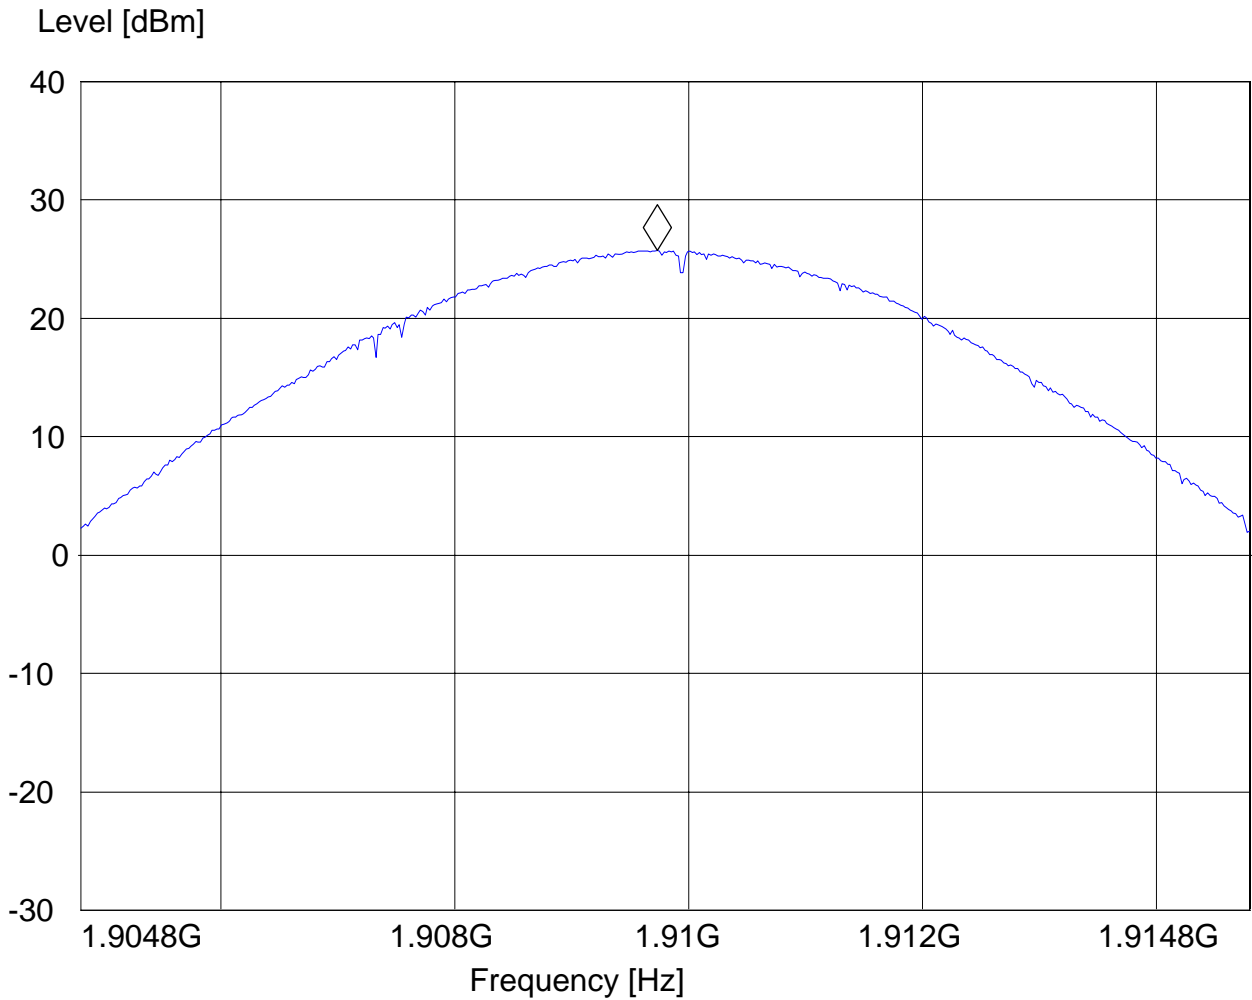




EIRP (UMTS FDD2) CHANNEL 9262 §24.232(b)

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD II
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC ADAPTER
 Comments: TT@0°

SWEEP TABLE: "EIRP 1900 CH 9262"

Short Description:		EIRP PCS 1900 for channel-512				
Start	Stop	Detector	Meas.	IF	Transducer	
Frequency	Frequency		Time	Bandw.		
1.8 GHz	1.9 GHz	MaxPeak	Coupled	5 MHz	DUMMY-DBM	

Marker: 1.853141483 GHz 19.73 dBm

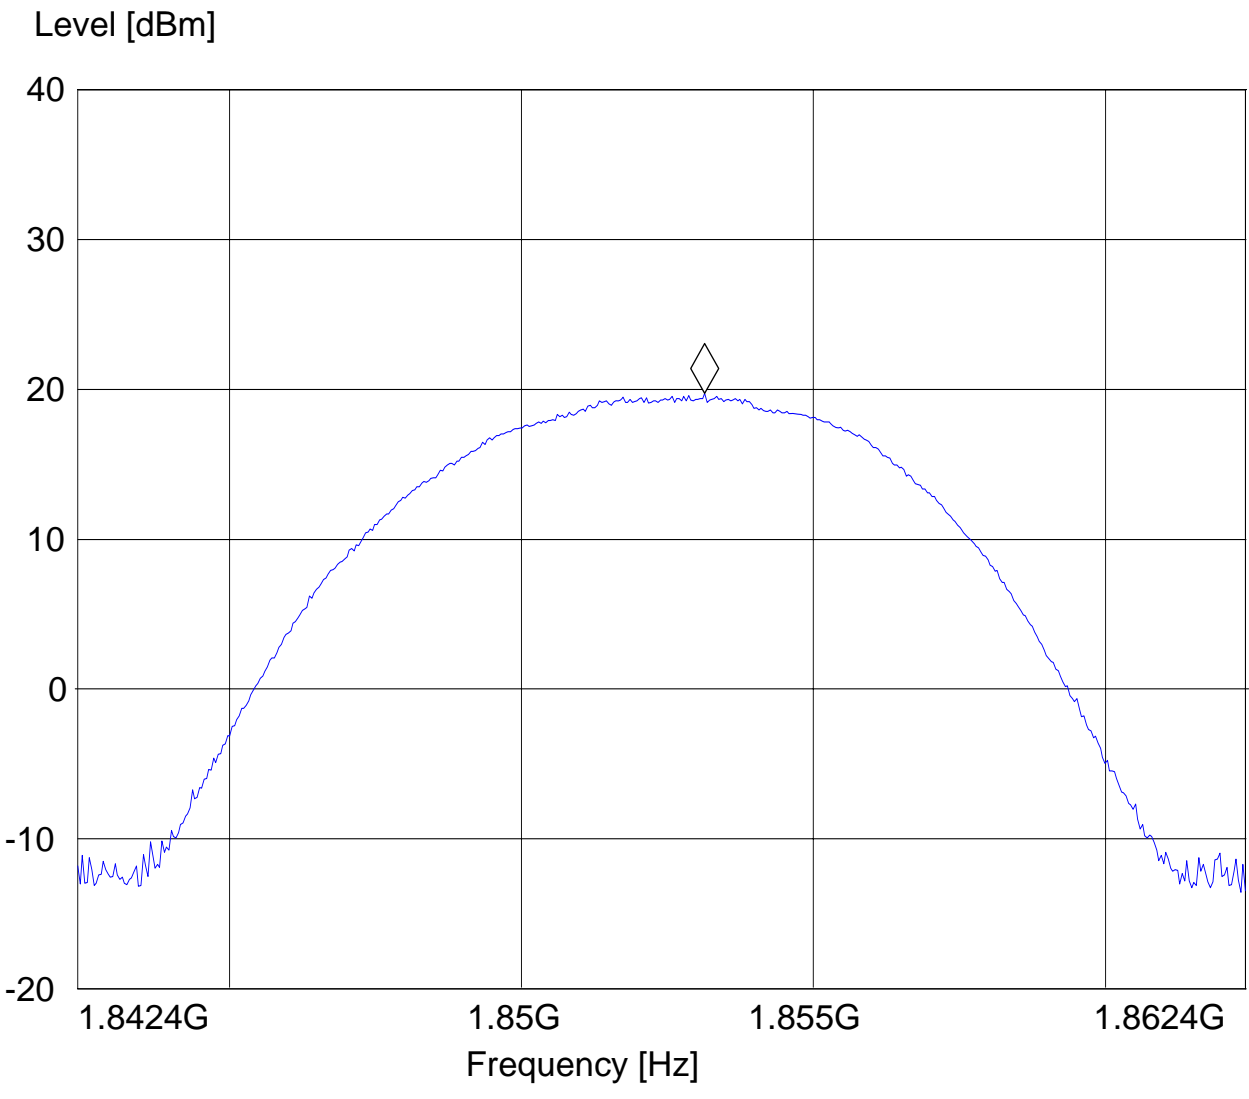




EIRP (UMTS FDD2) CHANNEL 9400 §24.232(b)

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD II
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC ADAPTER
 Comments: TT@0°

SWEEP TABLE: "EIRP 1900 CH 9400"

Short Description:		EIRP PCS 1900 for channel-661			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
1.9 GHz	1.9 GHz	MaxPeak	Coupled	5 MHz	DUMMY-DBM
		MaxPeak			

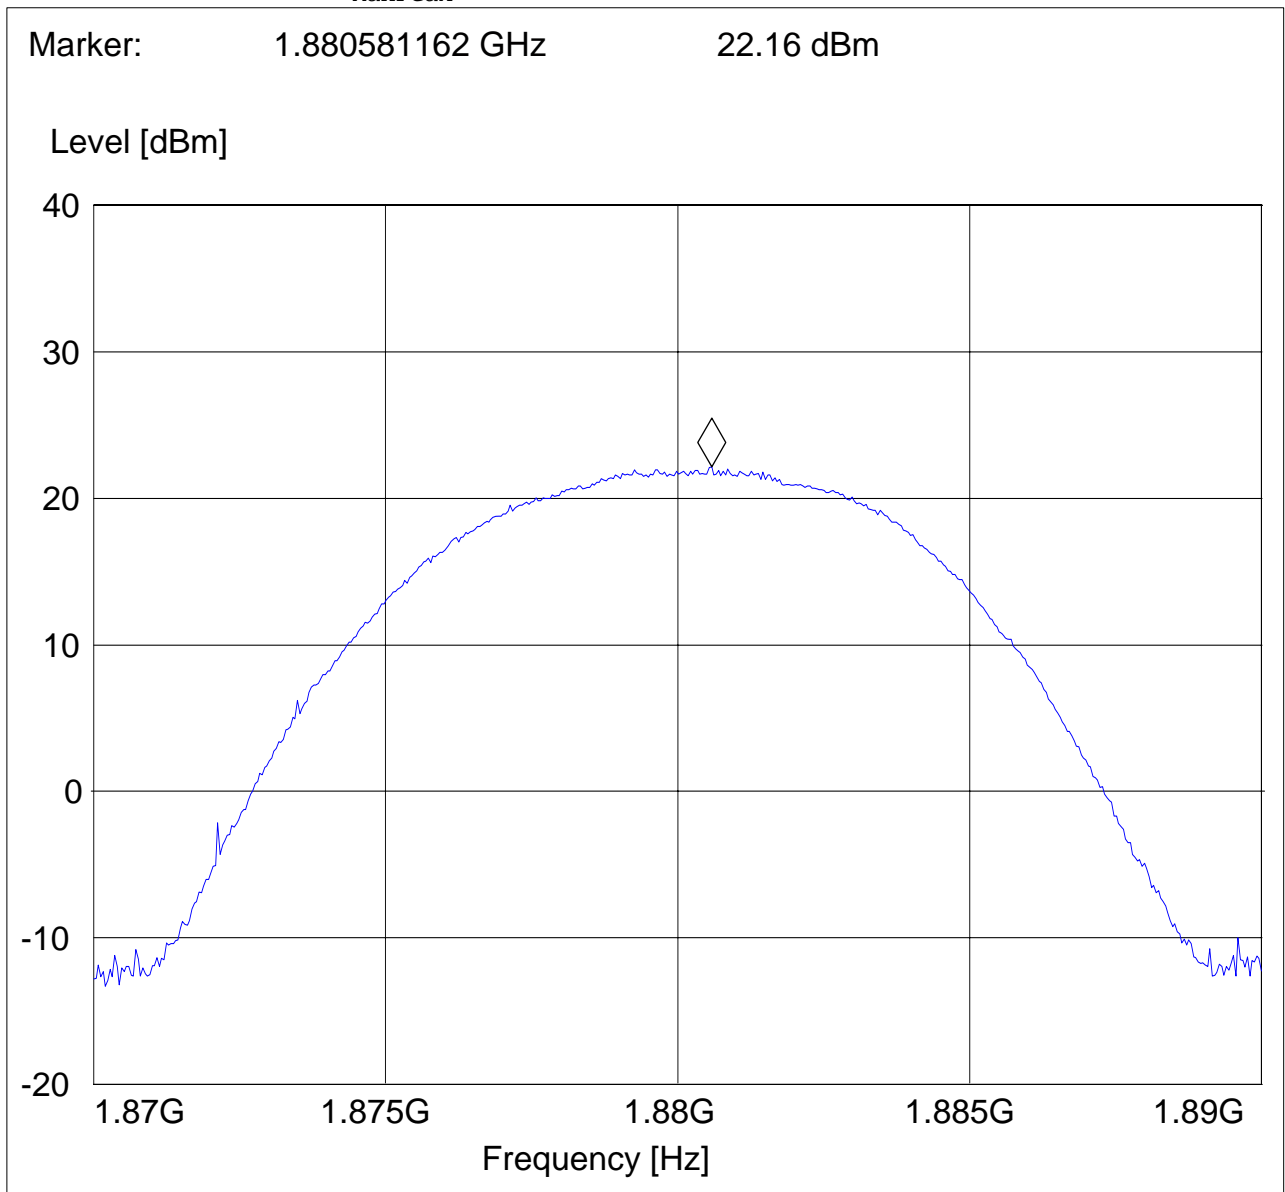




EIRP (UMTS FDD2) CHANNEL 9538 §24.232(b)

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD II
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC ADAPTER
 Comments: TT@0°

SWEEP TABLE: "EIRP 1900 CH 9538"

Short Description:		EIRP PCS 1900 for channel-810				
Start	Stop	Detector	Meas.	IF	Transducer	
Frequency	Frequency		Time	Bandw.		
1.9 GHz	1.9 GHz	MaxPeak	Coupled	5 MHz	DUMMY-DBM	

Marker: 1.907459719 GHz 20.86 dBm

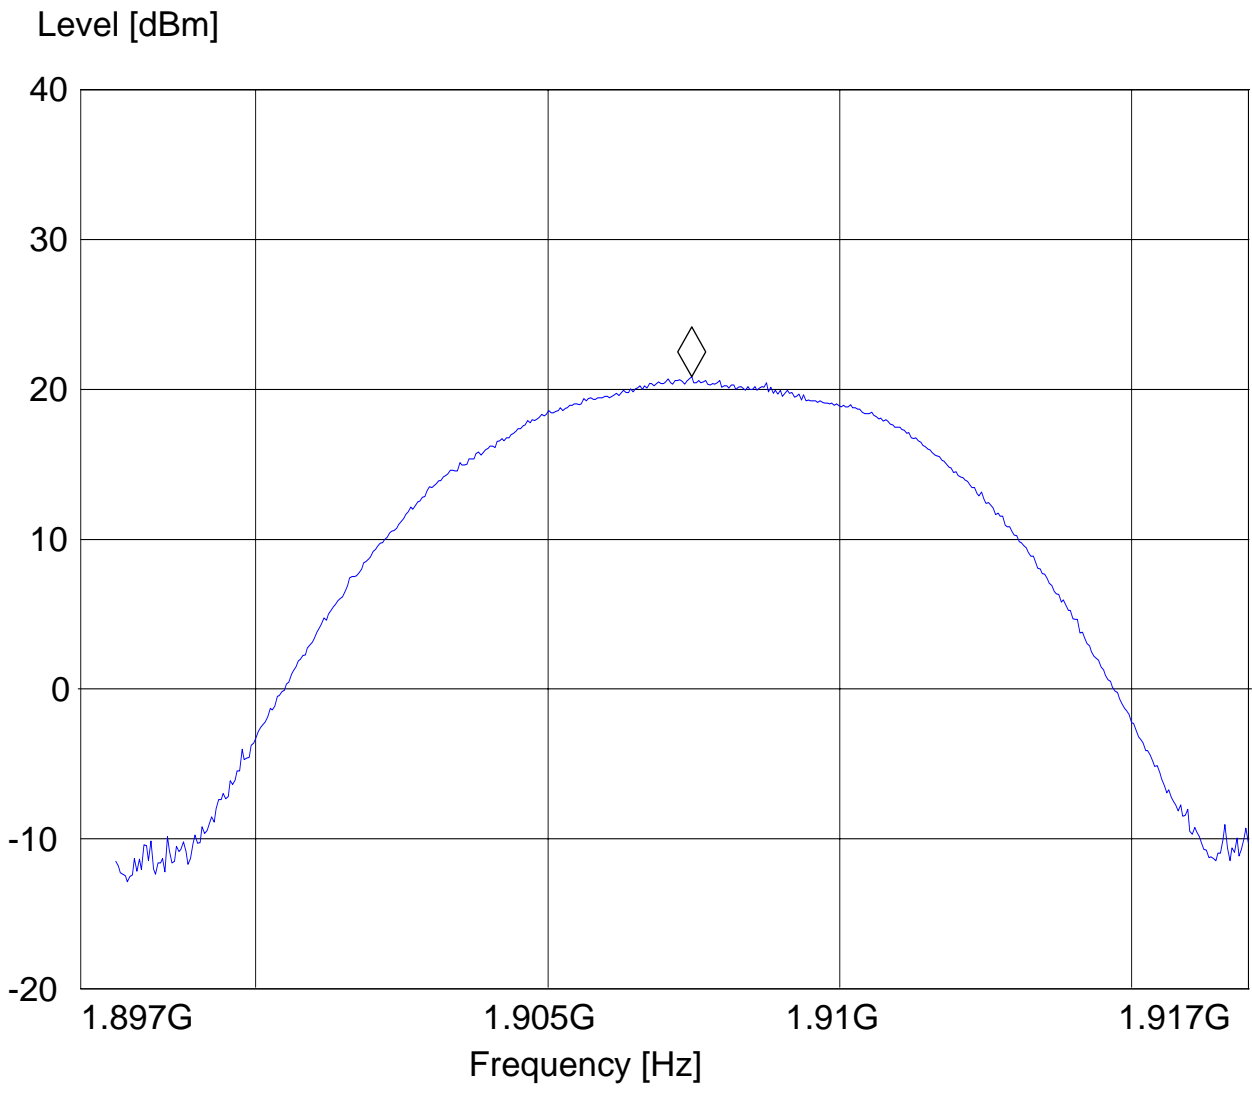


5.2 Occupied Bandwidth/Emission Bandwidth

5.2.1 FCC 2.1049 Measurements required: Occupied bandwidth

The occupied bandwidth, that is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable.

(h) Transmitters employing digital modulation techniques-when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated.

5.2.2 Occupied / emission bandwidth measurement procedure:

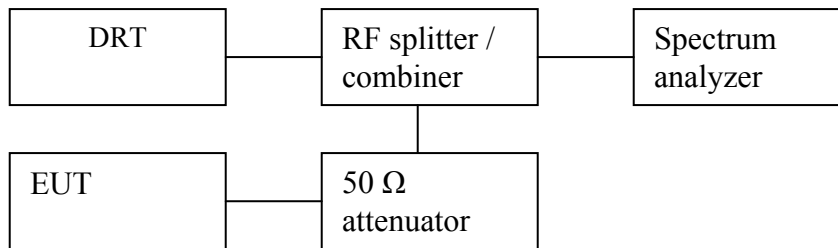

1. Connect the equipment as shown in the above diagram.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure the 99% (-20 dB) occupied bandwidth. Record the value.
4. Set the spectrum analyzer to measure the 99.5% (-26 dB) emission bandwidth. Record the value.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

5.2.3 Occupied / Emission bandwidth results 850 MHz band:

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID. For results of the conducted measurement please refer to the conducted test report.



5.3 Frequency Stability

5.3.1 Limit

For Hand carried battery powered equipment:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.2VDC and 4.5VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -2.7% and +21.62%. For the purposes of measuring frequency stability these voltage limits are to be used.

Method of Measurement:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU 200 UNIVERSAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30 C.
3. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 4183 for FDD5 & 661 for PCS-1900&9400 for FDD2), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10 C increments from -30 C to +50 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours un-powered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50 C.
7. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 4183 for FDD5 & 661 for PCS-1900&9400 for FDD2), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

For equipment powered by primary supply voltage:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

For this EUT section 2.1055(d)(1) applies. This requires to vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.



5.3.2 Test Results Frequency Stability (GSM-850)

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID. For results of the conducted measurement please refer to the conducted test report.



5.3.3 FREQUENCY STABILITY (PCS-1900)

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID. For results of the conducted measurement please refer to the conducted test report.

5.4 Spurious Emissions Conducted

5.4.1 FCC 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in FCC 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

5.4.2 Limits:

5.4.2.1 **FCC 22.917 Emission limitations for cellular equipment.**

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.4.2.2 **FCC 24.238 Emission limitations for Broadband PCS equipment.**

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.


(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.4.3 Conducted out of band emissions measurement procedure:

Based on TIA-603C 2004

2.2.13 Unwanted Emissions: Conducted Spurious

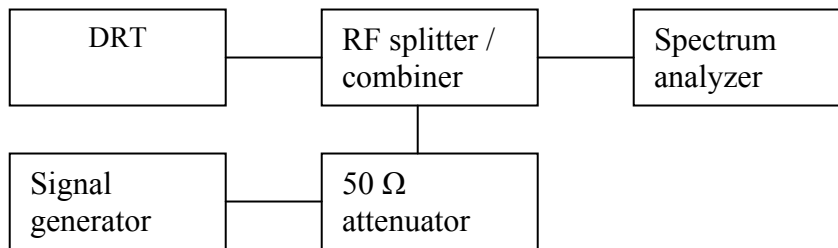

1. Connect the equipment as shown in the above diagram.
2. Set the spectrum analyzer to measure peak hold with the required settings.
3. Set the signal generator to a known output power and record the path loss in dB (**LOSS**) for frequencies up to the tenth harmonic of the EUT's carrier frequency. **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
4. Replace the signal generator with the EUT.
5. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
6. Set the spectrum analyzer to measure peak hold with the required settings. Offset the spectrum analyzer reference level by the path loss measured above.
7. Measure and record all spurious emissions up to the tenth harmonic of the carrier frequency.
8. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
9. If necessary steps 6 and 7 may be performed with the spectrum analyzer set to average detector.

(note: Step 3 above is performed prior to testing and **LOSS** is recorded by test software. Steps 2, 6, and 7 above are performed with test software.)



5.4.4 Test Results: Conducted Emission:

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID. For results of the conducted measurement please refer to the conducted test report.

5.5 Spurious Emissions Radiated

5.5.1 FCC 2.1053 Measurements required: Field strength of spurious radiation.

- (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

5.5.2 Limits:

5.5.2.1 FCC 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.5.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.


- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.5.3 Radiated out of band measurement procedure:

Based on TIA-603C 2004

2.2.12 Unwanted emissions: Radiated Spurious

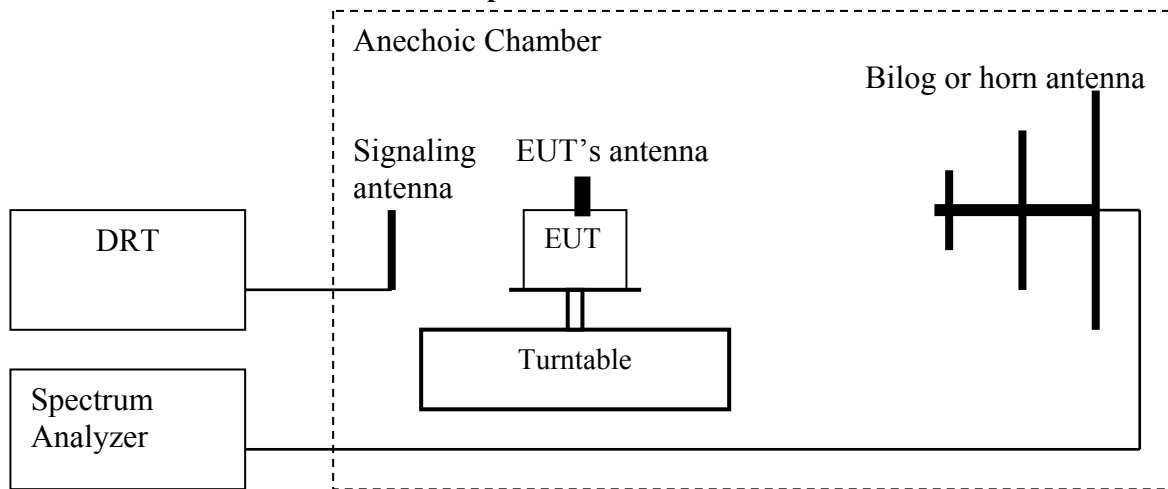

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (**LVL**) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the level of spurious emissions using the following equation:



Spurious (dBm) = LVL (dBm) + LOSS (dB):

8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:

Spurious (dBm) = LVL (dBm) + LOSS (dB):

10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

(note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

Spectrum analyzer settings:

Res B/W: 1 MHz

Vid B/W: 1 MHz

Measurement Survey:

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the GSM-850 & PCS-1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 & PCS-1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

Radiated emission measurements were made only with Circuit Switched mode GMSK modulation because this mode represents the worse case emission for all the modulations for GSM. See section 5.5.4.1 and 5.5.4.3

Radiated emissions measurements were made also with UMTS FDD mode. See section 5.5.4.2 and 5.5.4.4



5.5.4 Radiated out of band emissions results on EUT:

5.5.4.1 Test Results Transmitter Spurious Emission GSM850:

Harmonics	Tx ch-128 Freq. (MHz)	Level (dBm)	Tx ch-190 Freq. (MHz)	Level (dBm)	Tx ch-251 Freq. (MHz)	Level (dBm)
2	1648.4	NF	1673.2	NF	1697.6	NF
3	2472.6	NF	2509.8	NF	2546.4	NF
4	3296.8	NF	3346.4	NF	3395.2	NF
5	4121	NF	4183	NF	4244	NF
6	4945.2	NF	5019.6	NF	5092.8	NF
7	5769.4	NF	5856.2	NF	5941.6	NF
8	6593.6	NF	6692.8	NF	6790.4	NF
9	7417.8	NF	7529.4	NF	7639.2	NF
10	8242	NF	8366	NF	8488	NF
NF = NOISE FLOOR						



RADIATED SPURIOUS EMISSIONS (GSM-850) TX: 30MHz - 1GHz
 Spurious emission limit -13dBm
Antenna: vertical


Note:

1. The peak above the limit line is the carrier freq.
2. This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 850; CH 190
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC Adapter
 Comments: Marker placed on uplink

SWEEP TABLE: "FCC 24 Spur 30M-1G_V"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

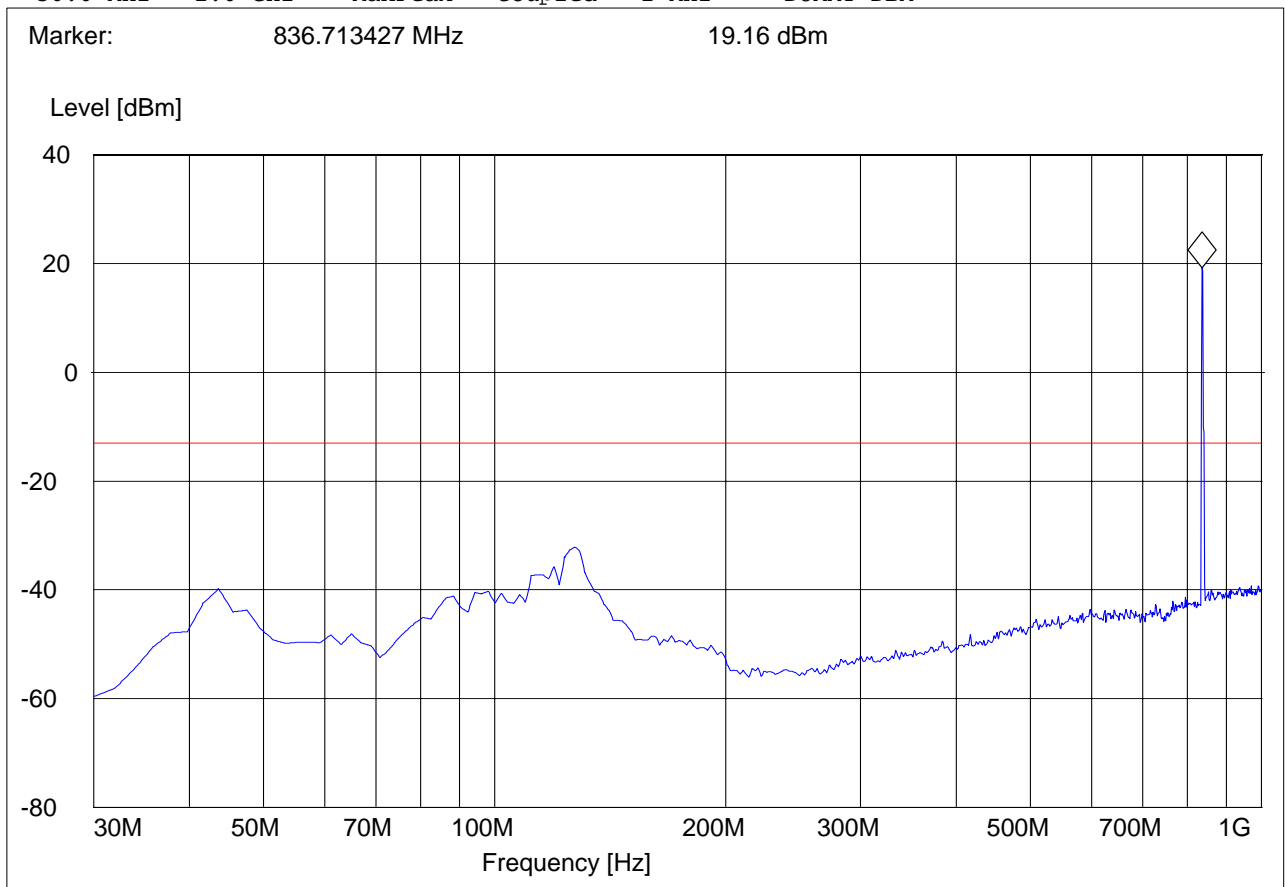



RADIATED SPURIOUS EMISSIONS (GSM-850)TX: 30MHz - 1GHz
Spurious emission limit -13dBm
Antenna: horizontal


Note:

- 1. The peak above the limit line is the carrier freq.
- 2. This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505
Customer:: PSION
Test Mode: GSM 850; CH 190
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adapter
Comments: Marker placed on uplink

SWEEP TABLE: "FCC 24 Spur 30M-1G_H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	DUMMY-DBM

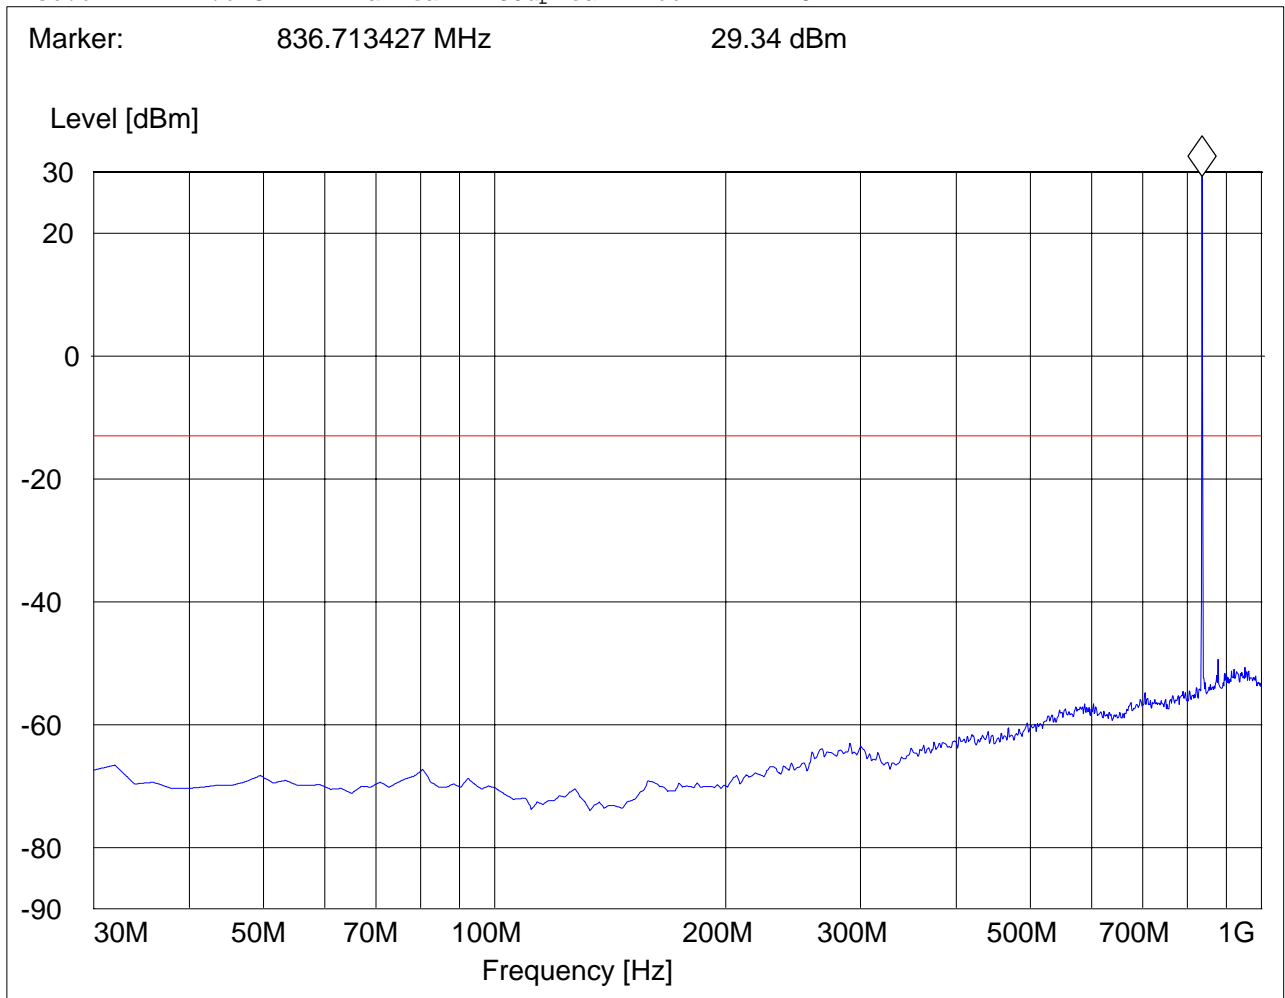




RADIATED SPURIOUS EMISSIONS (GSM-850) CHANNEL 128 Tx : 1GHz – 1.58GHz

EUT: 7505
Customer:: PSION
Test Mode: GSM 850; CH 128
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adapter
Comments:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.554428858 GHz -48.78 dBm

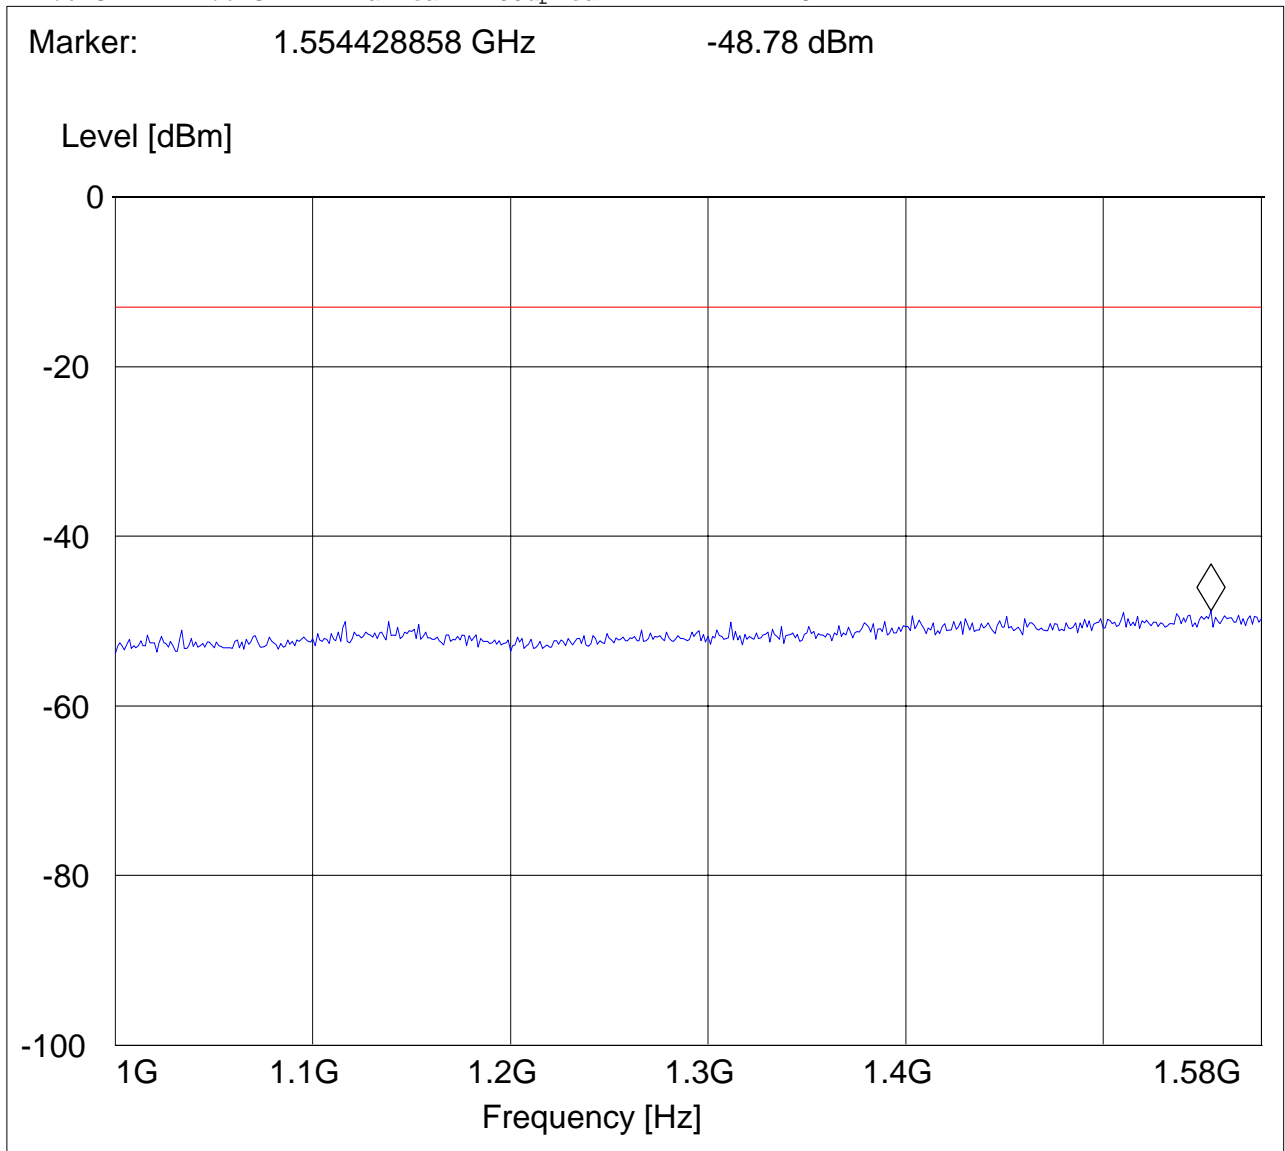




RADIATED SPURIOUS EMISSIONS (GSM-850) Tx CHANNEL 128: 1.58GHz – 9GHz

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 850; CH 128
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "FCC 22Spuri 1.58-9G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.6 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.639478958 GHz -45.87 dBm

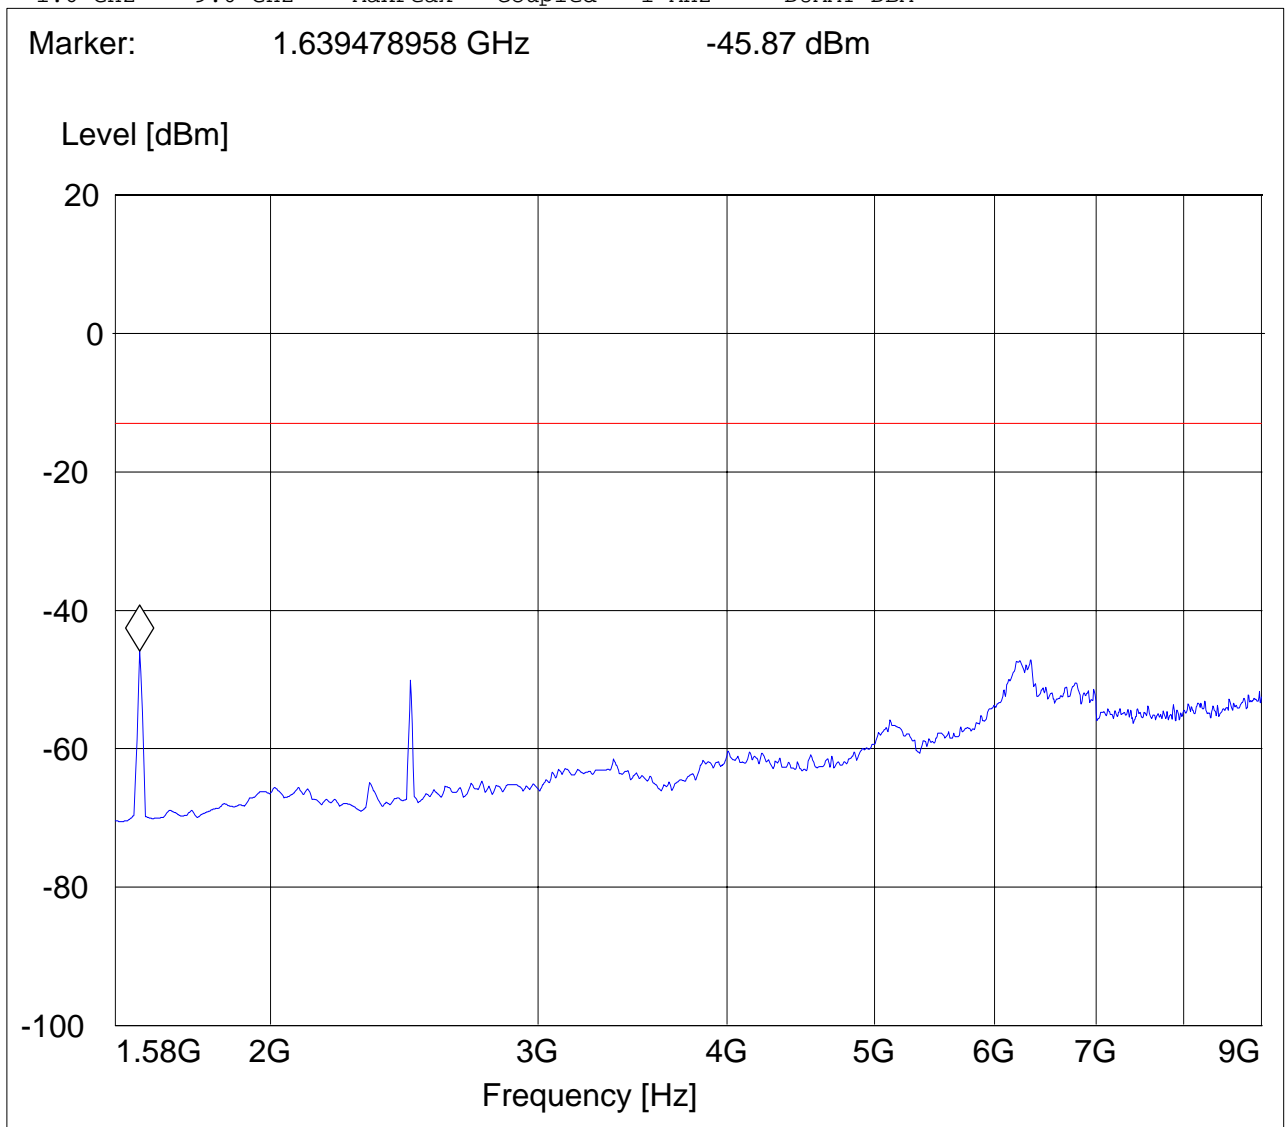




RADIATED SPURIOUS EMISSIONS (GSM-850) Tx CHANNEL 190: 1GHz – 1.58GHz

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 850; CH 190
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

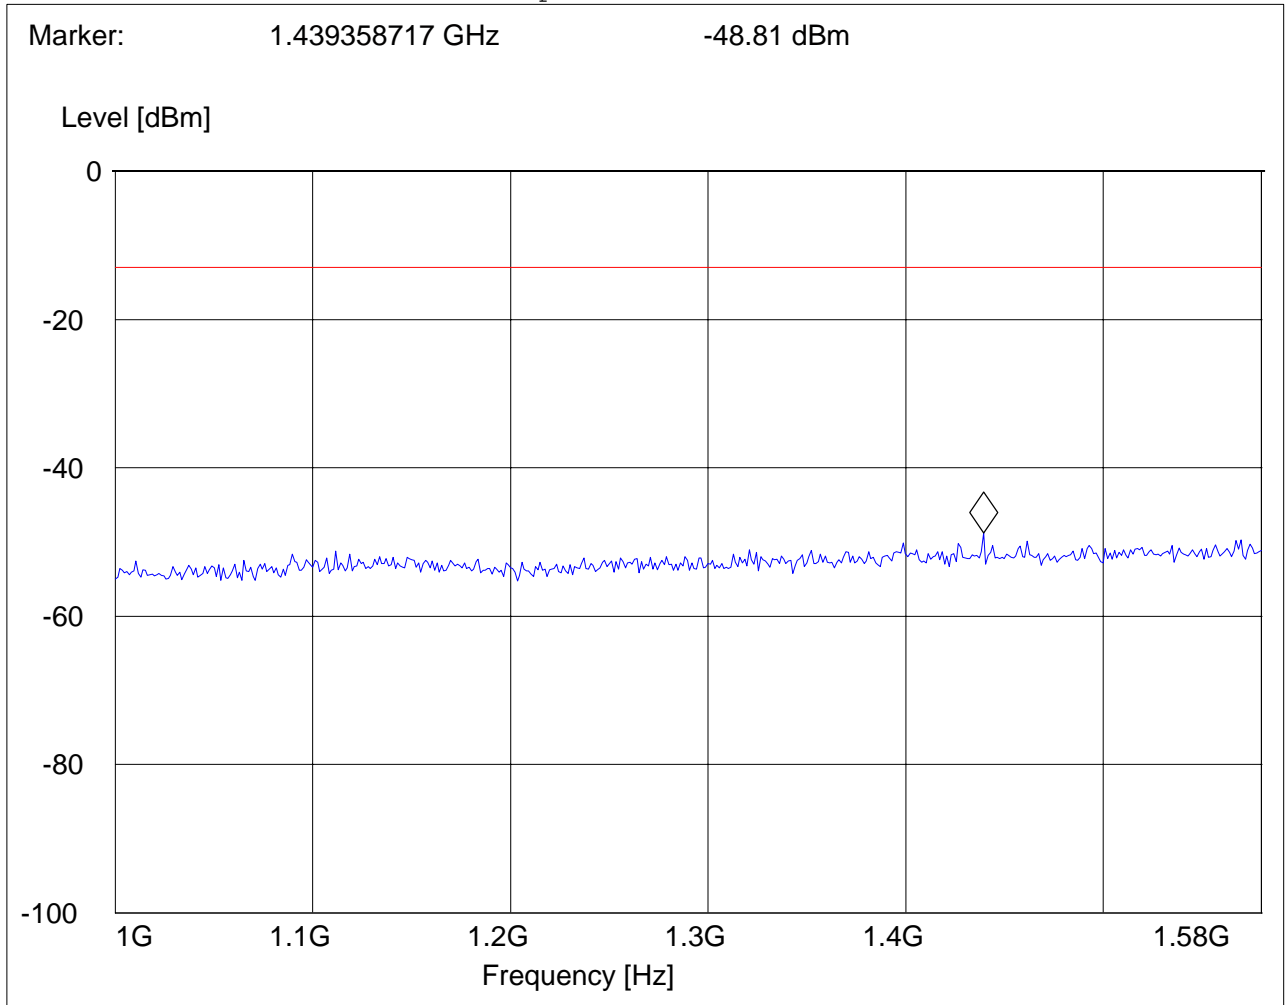




RADIATED SPURIOUS EMISSIONS (GSM-850) Tx CHANNEL 190: 1.58GHz – 9GHz

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 850; CH 190
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "FCC 22Spuri 1.58-9G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.6 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 2.501923848 GHz -45.45 dBm

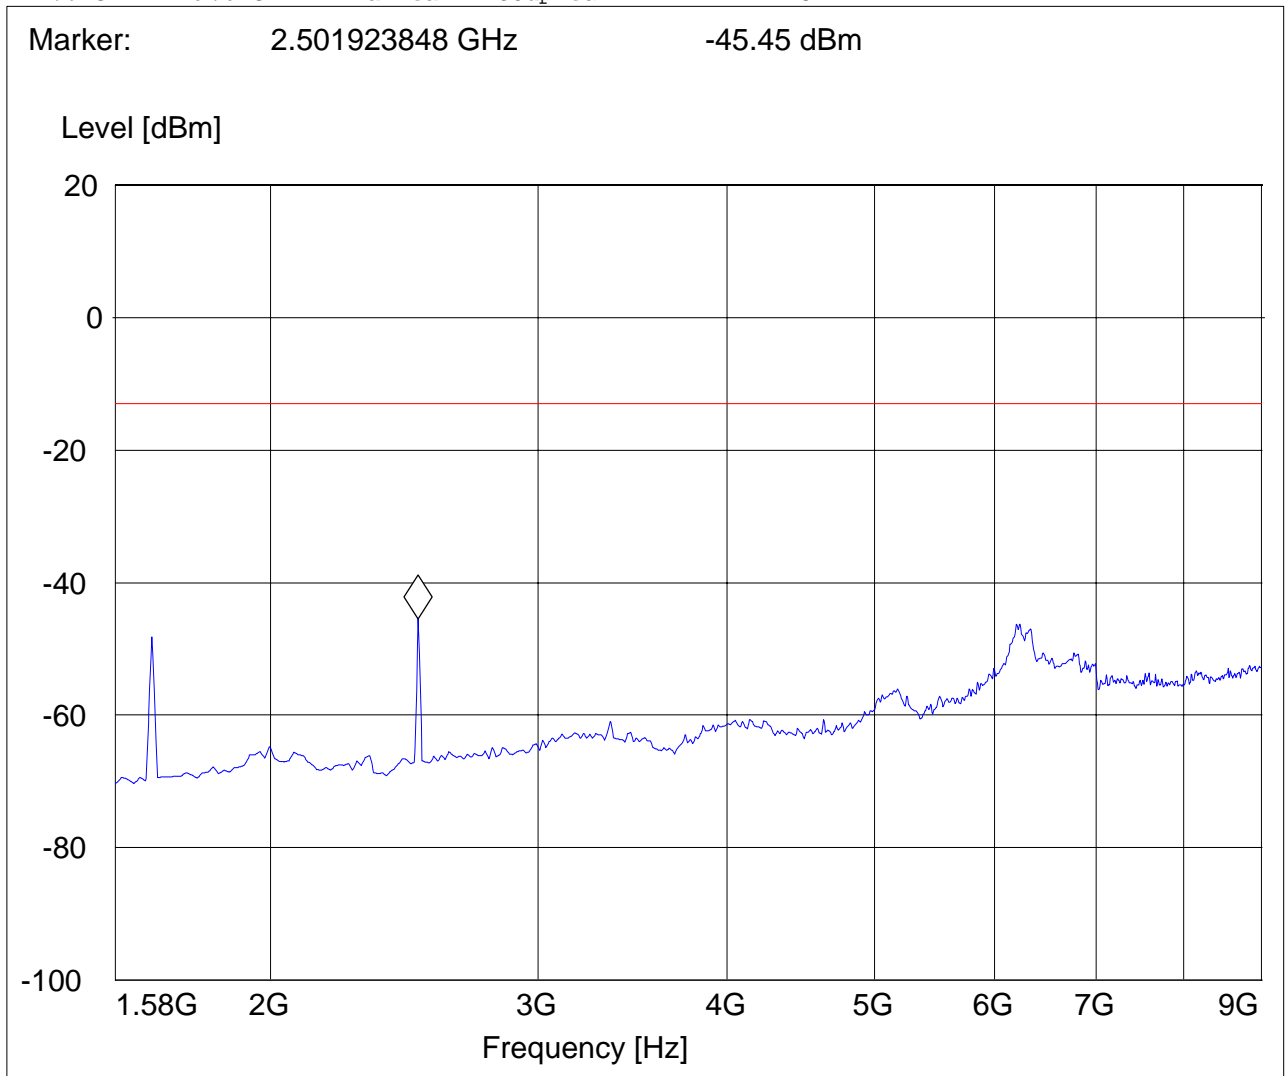




RADIATED SPURIOUS EMISSIONS (GSM-850) Tx CHANNEL 251: 1GHz – 1.58GHz

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 850; CH 251
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.54745491 GHz -49.3 dBm

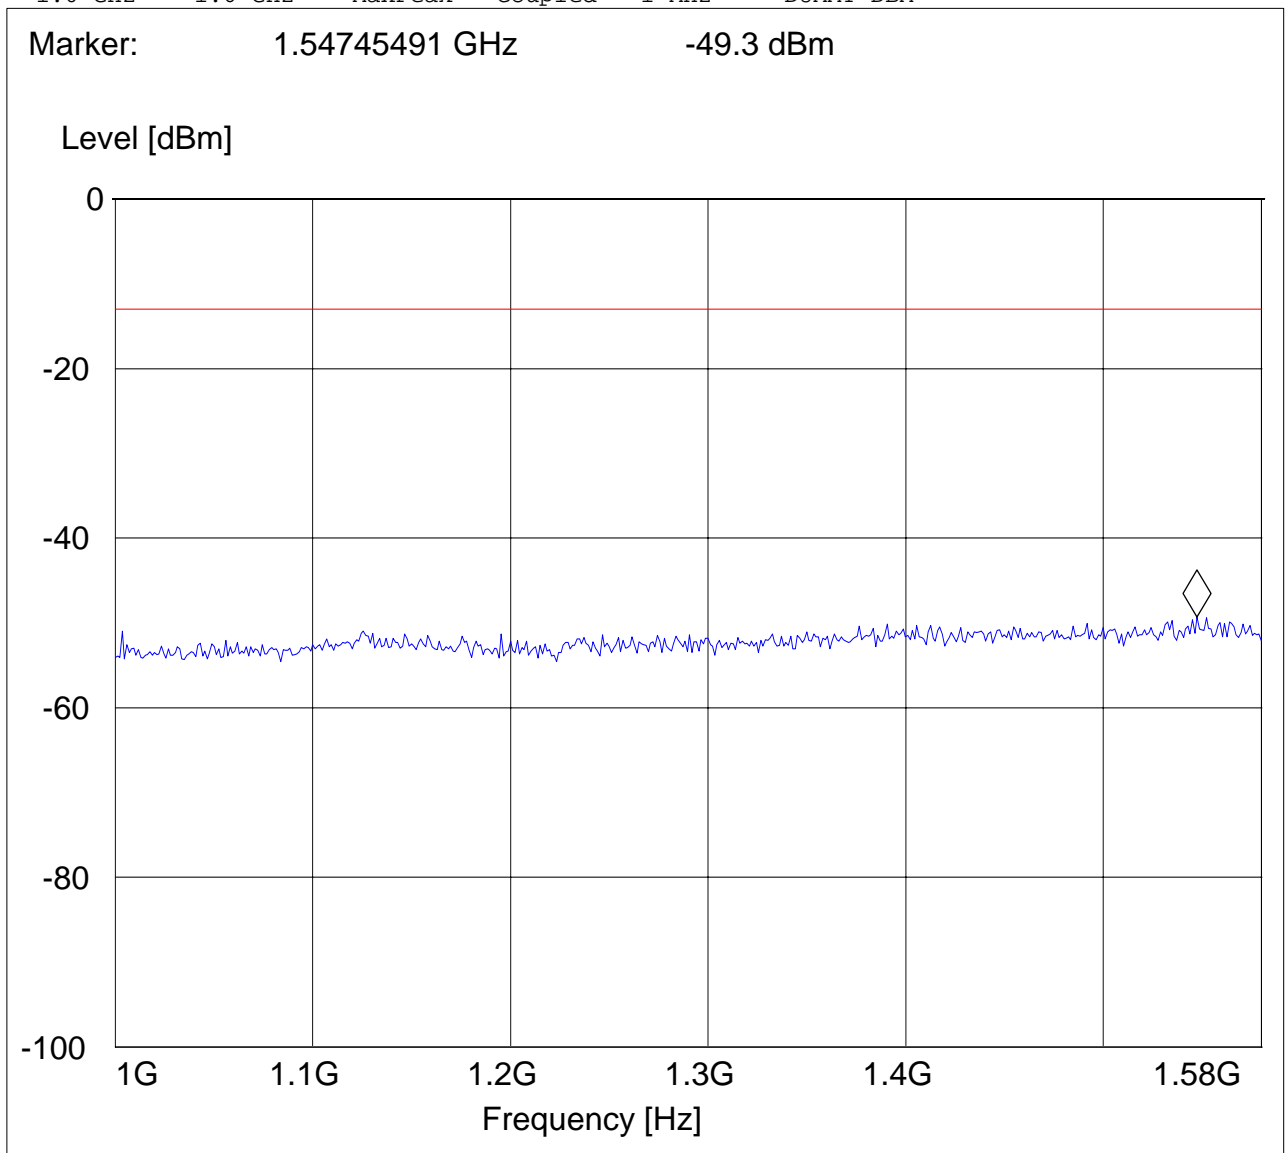




RADIATED SPURIOUS EMISSIONS (GSM-850) Tx CHANNEL 251: 1.58GHz – 9GHz

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 850; CH 251
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "FCC 22Spuri 1.58-9G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.6 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 6.234228457 GHz -46.35 dBm

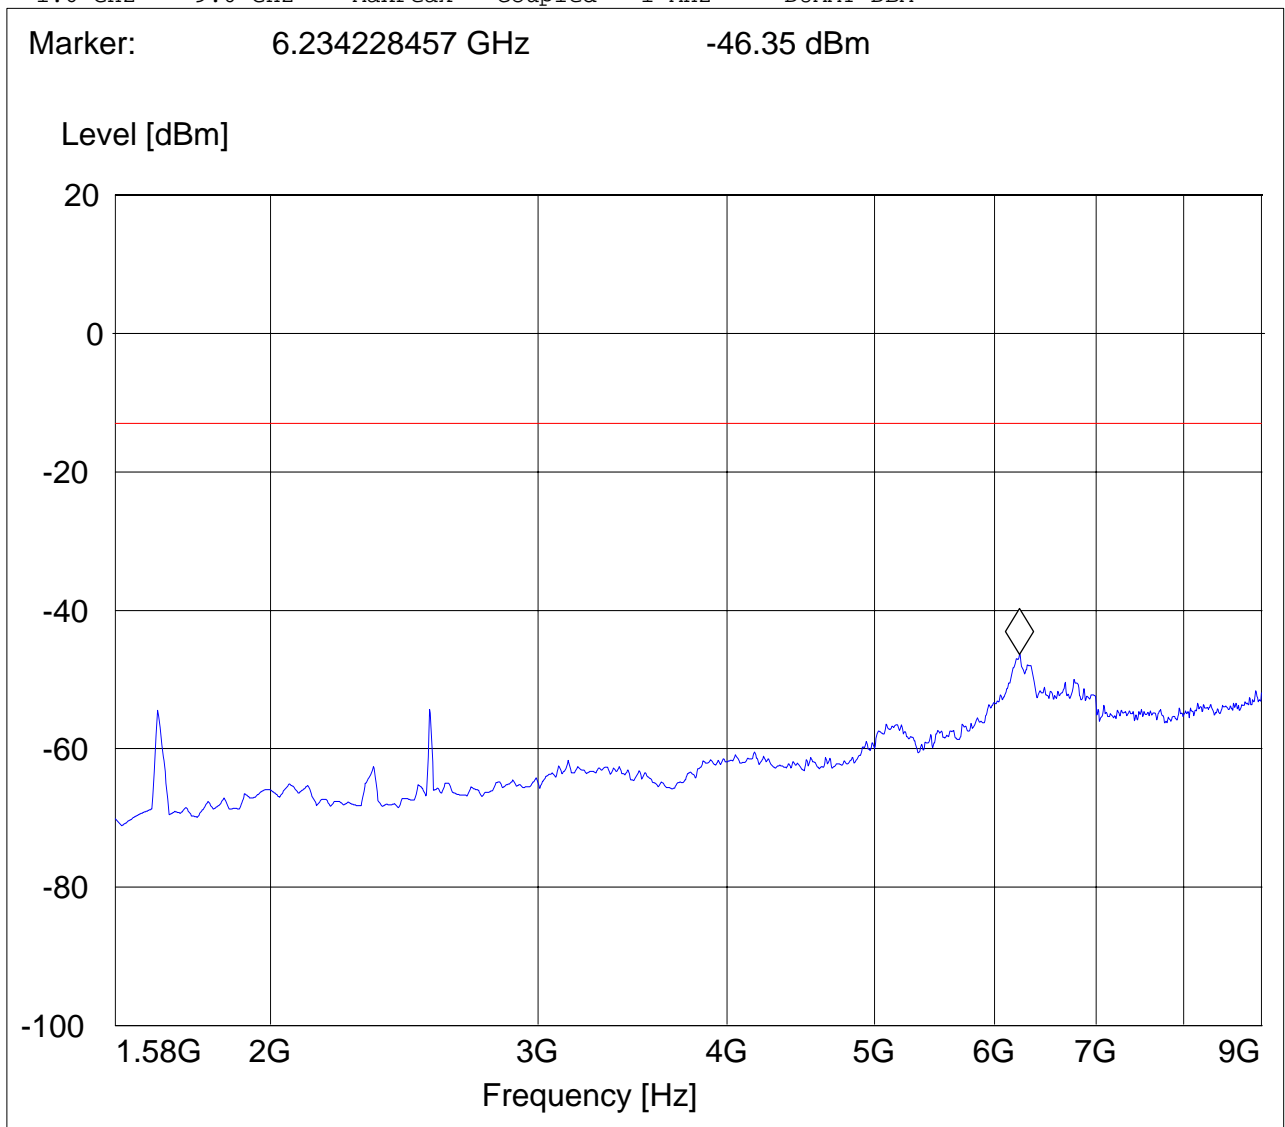

**5.5.4.2 Test Results Transmitter Spurious Emission UMTS FDD5**

Harmonics	Tx ch-4132 Freq. (MHz)	Level(dBm)	Tx ch-4183 Freq. (MHz)	Level(dBm)	Tx ch-4233 Freq. (MHz)	Level(dBm)
2	1652.8	NF	1673.2	NF	1693.2	NF
3	2479.2	NF	2509.8	NF	2539.8	NF
4	3305.6	NF	3346.4	NF	3386.4	NF
5	4132	NF	4183	NF	4233	NF
6	4958.4	NF	5019.6	NF	5079.6	NF
7	5784.8	NF	5856.2	NF	5926.2	NF
8	6611.2	NF	6692.8	NF	6772.8	NF
9	7437.6	NF	7529.4	NF	7619.4	NF
10	8264	NF	8366	NF	8466	NF



RADIATED SPURIOUS EMISSIONS (UMTS FDD5) TX: 30MHz - 1GHz
Spurious emission limit -13dBm
Antenna: vertical


Note:

- 1. The peak above the limit line is the carrier freq.
- 2. This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505
Customer:: PSION
Test Mode: WCDMA FDD V
ANT Orientation: V
EUT Orientation: H
Test Engineer: Sam
Voltage: AC ADAPTER
Comments: TT@210° ANT@142

SWEEP TABLE: "FCC 24 Spur 30M-1G_V"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

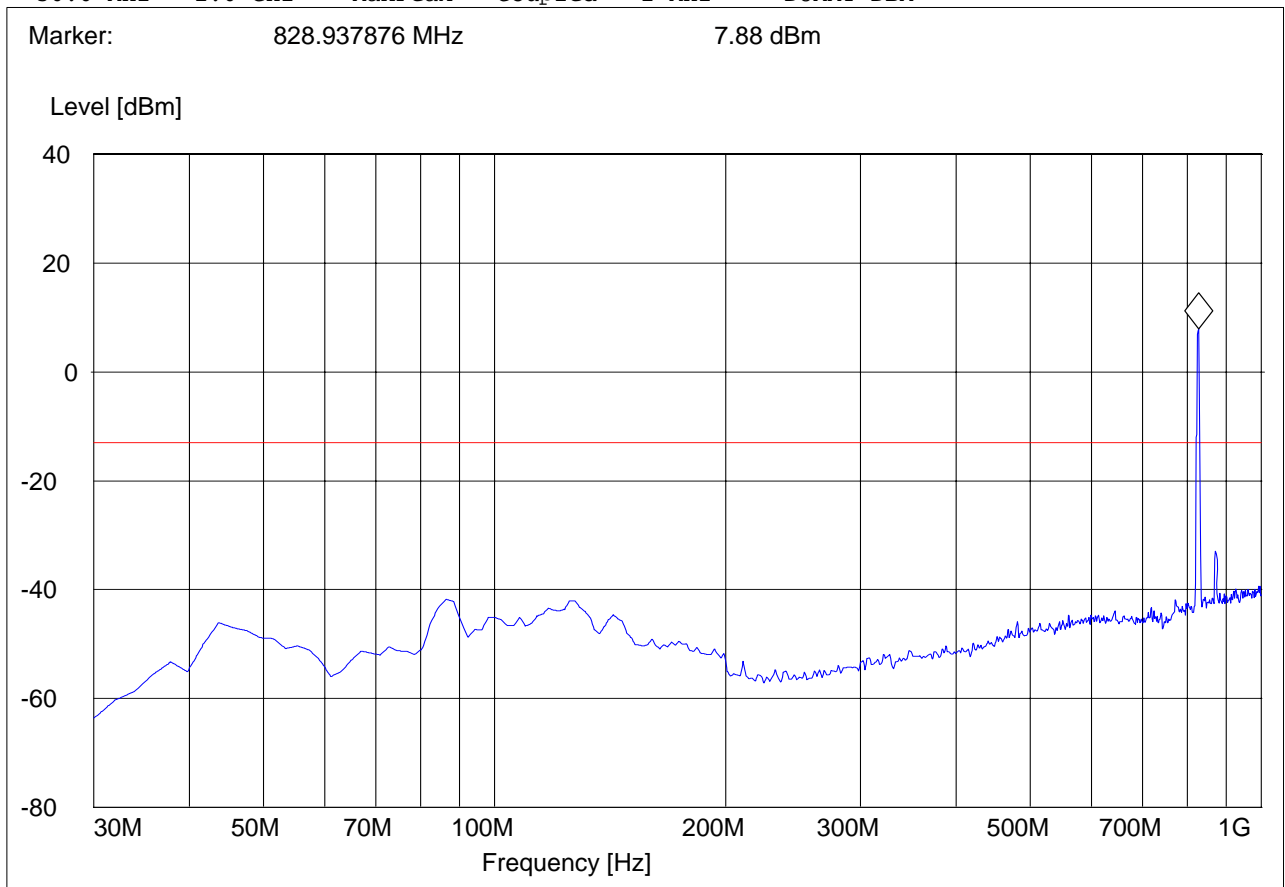



RADIATED SPURIOUS EMISSIONS (UMTS FDD5) TX: 30MHz - 1GHz
Spurious emission limit -13dBm
Antenna: Horizontal


Note:

- 1. The peak above the limit line is the carrier freq.
- 2. This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505
Customer:: PSION
Test Mode: WCDMA FDD V
ANT Orientation: H
EUT Orientation: H
Test Engineer: Sam
Voltage: AC ADAPTER
Comments: TT@210° ANT@142

SWEEP TABLE: "FCC 24 Spur 30M-1G_H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	DUMMY-DBM

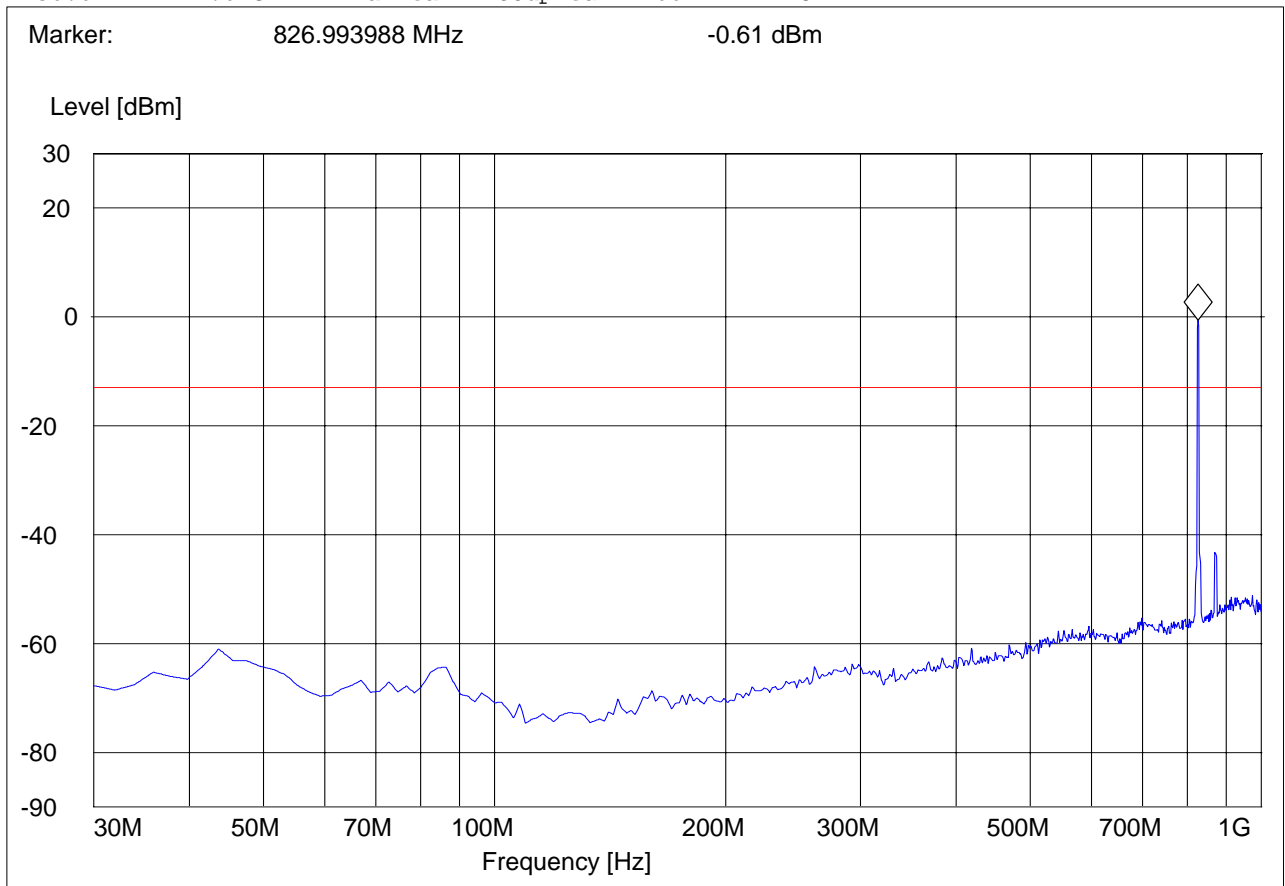




RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4132: 1GHz - 1.58GHz

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD V
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Sam
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.56256513 GHz -49.9 dBm

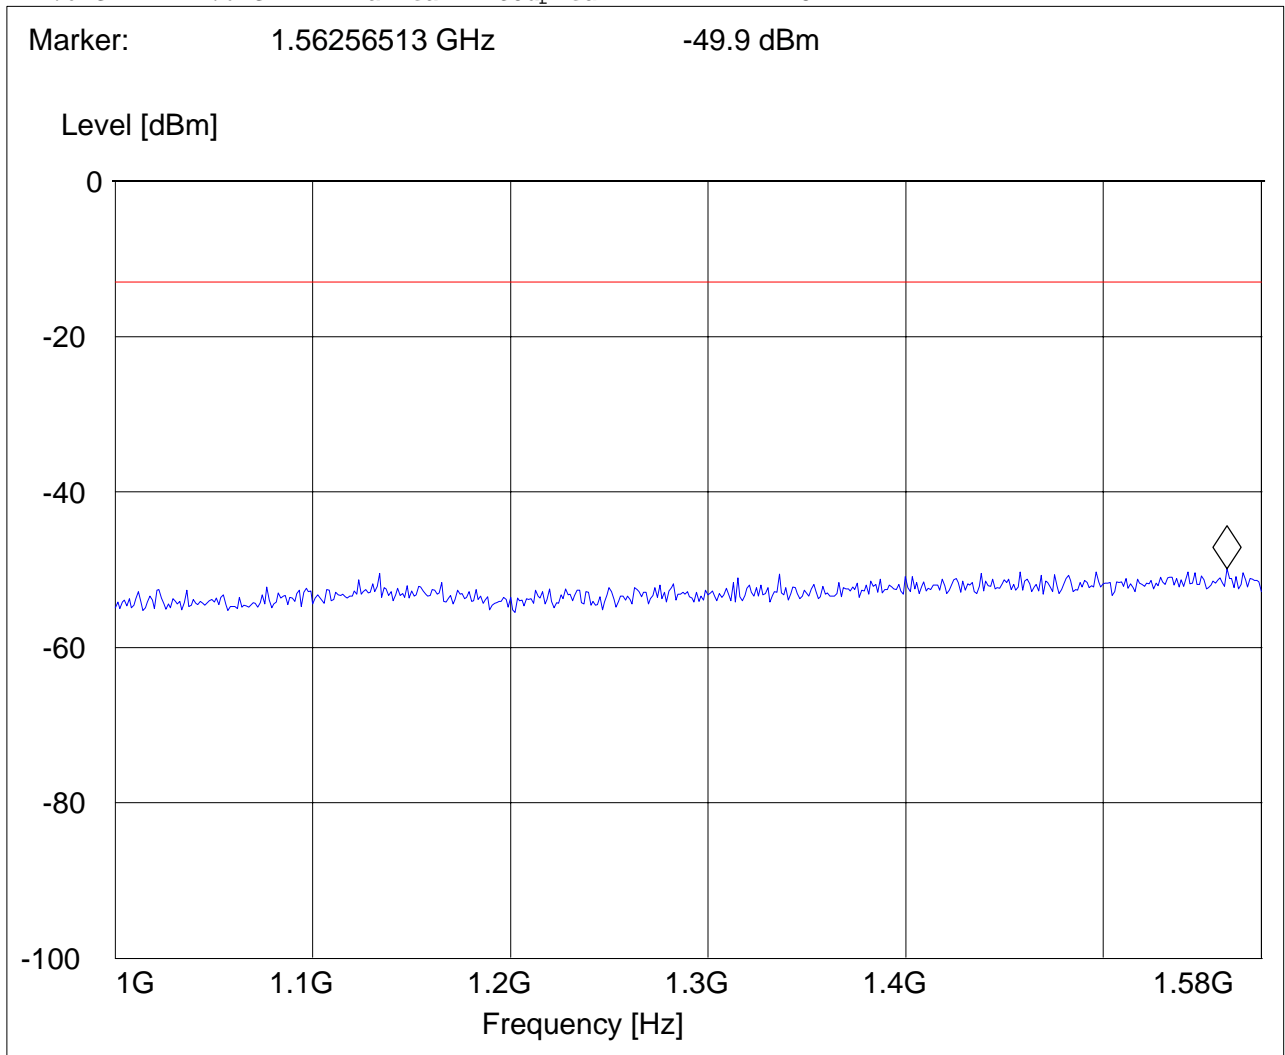




RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4132: 1.58GHz – 9GHz

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD V
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Sam
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "FCC 22Spuri 1.58-9G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.6 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 6.219358717 GHz -47.14 dBm

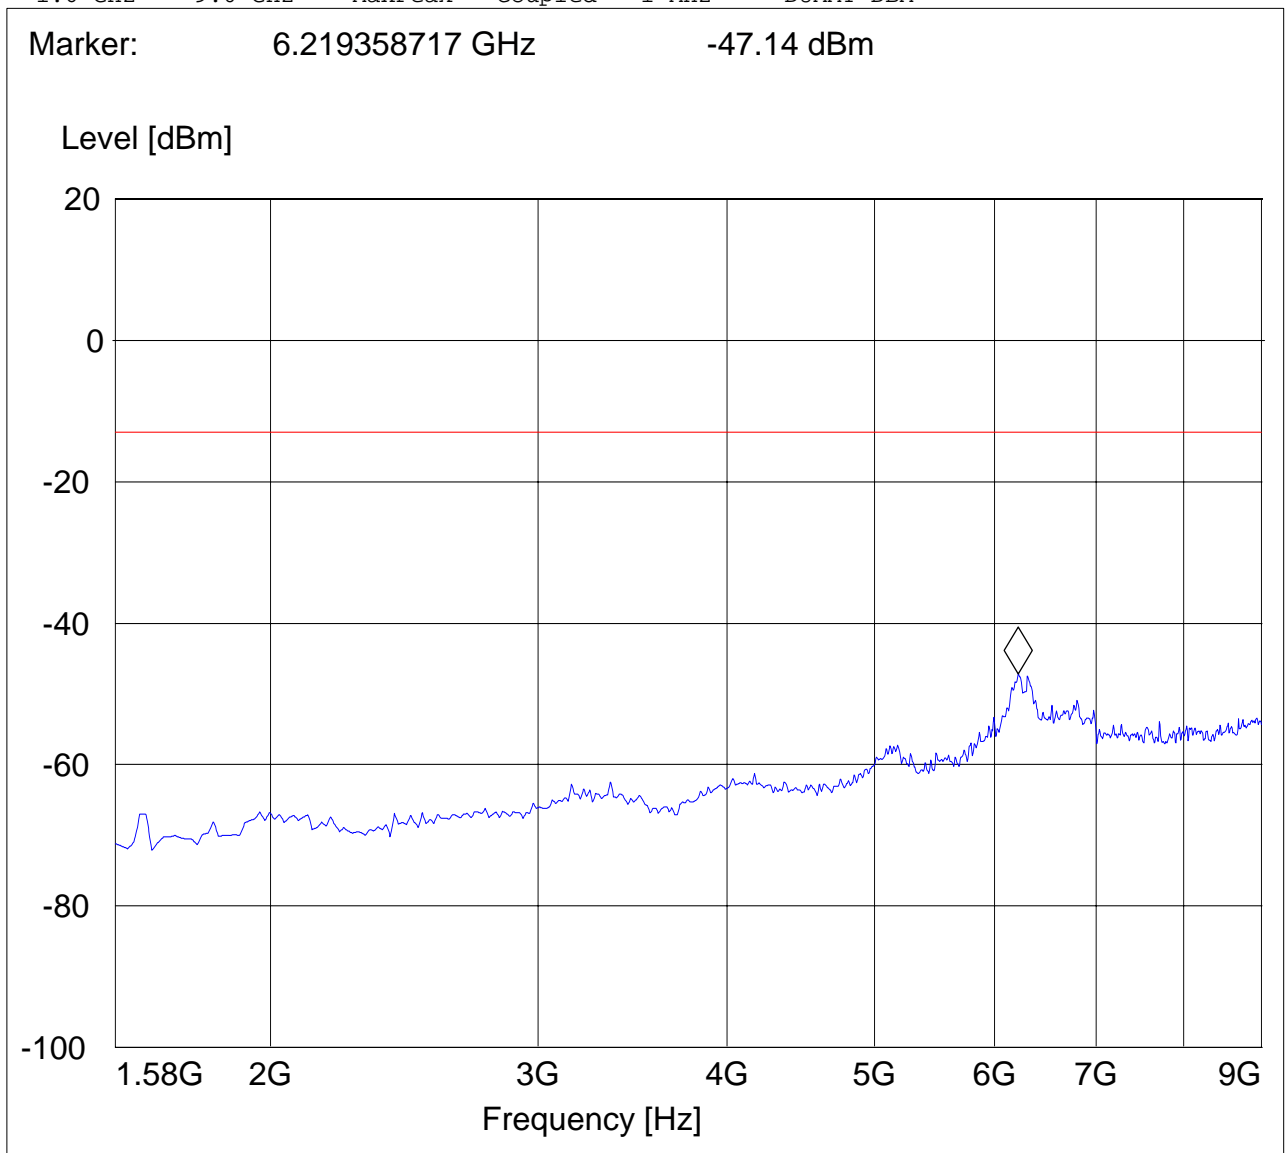




RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4183: 1GHz - 1.58GHz

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD V
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Sam
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.576513026 GHz -49.58 dBm

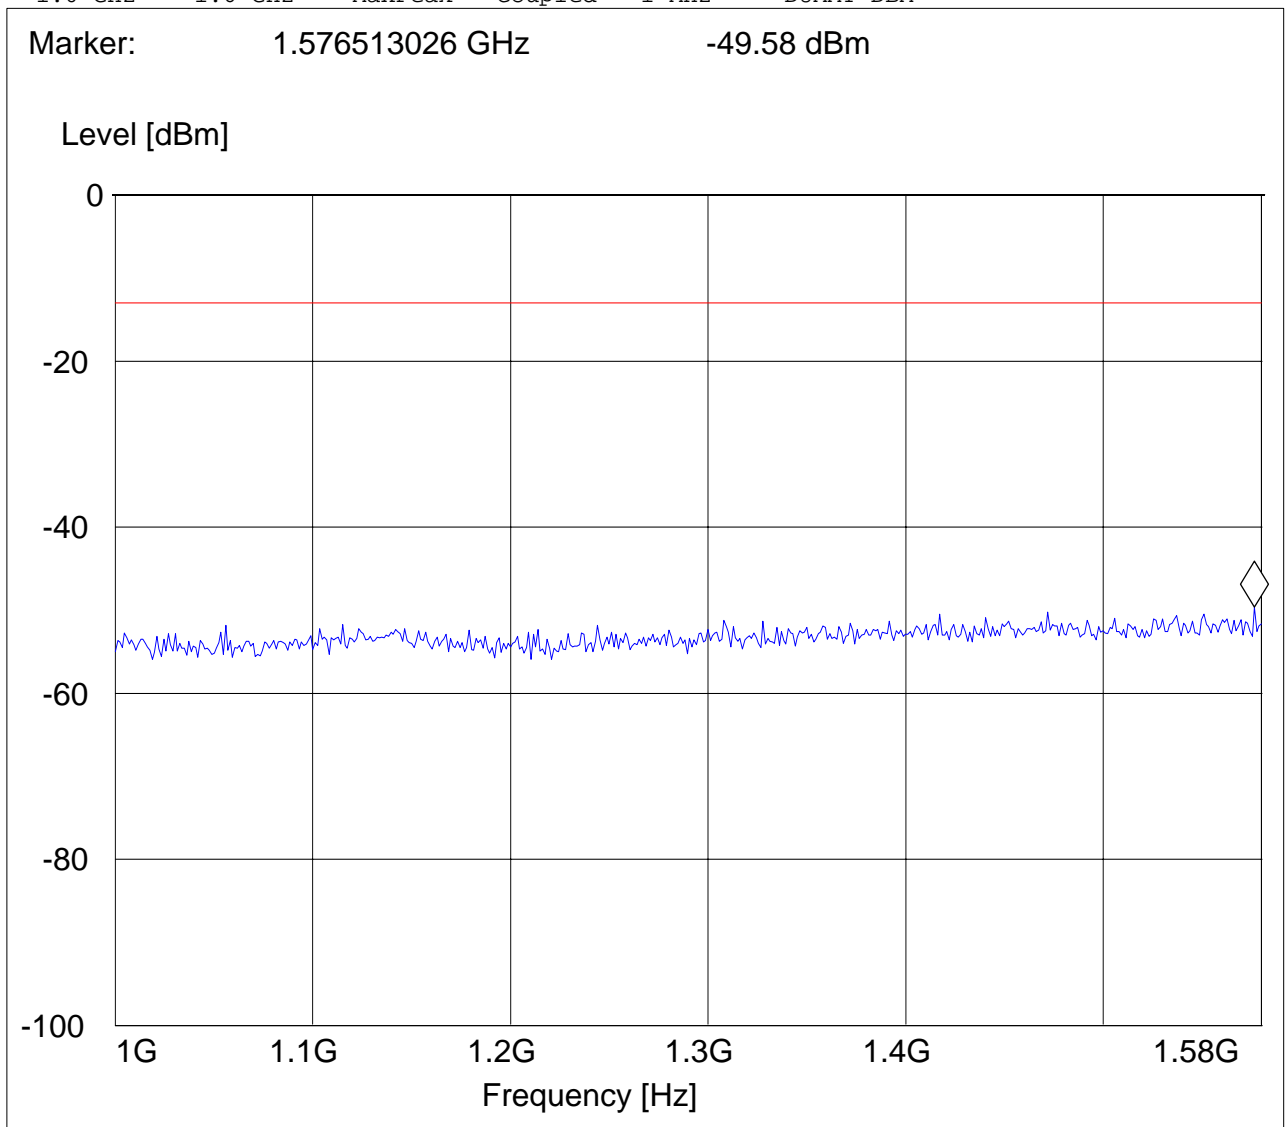




RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4183: 1.58GHz – 9GHz

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD V
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Sam
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "FCC 22Spuri 1.58-9G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.6 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 6.219358717 GHz -47.63 dBm

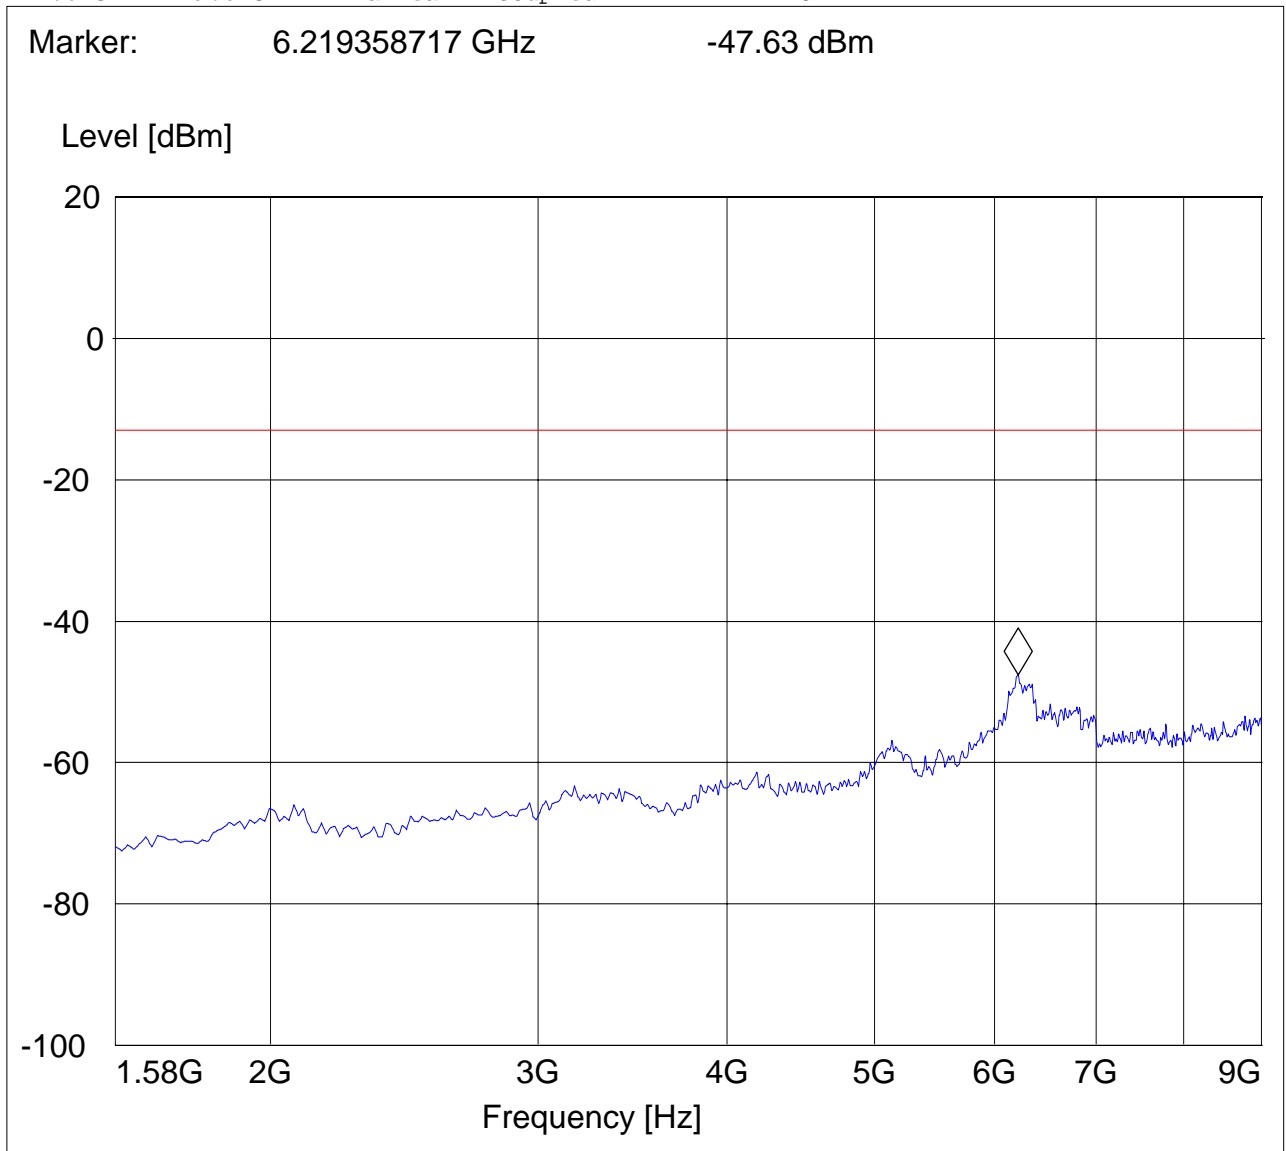




RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4233: 1GHz - 1.58GHz

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD V
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Sam
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.58 GHz -50.66 dBm

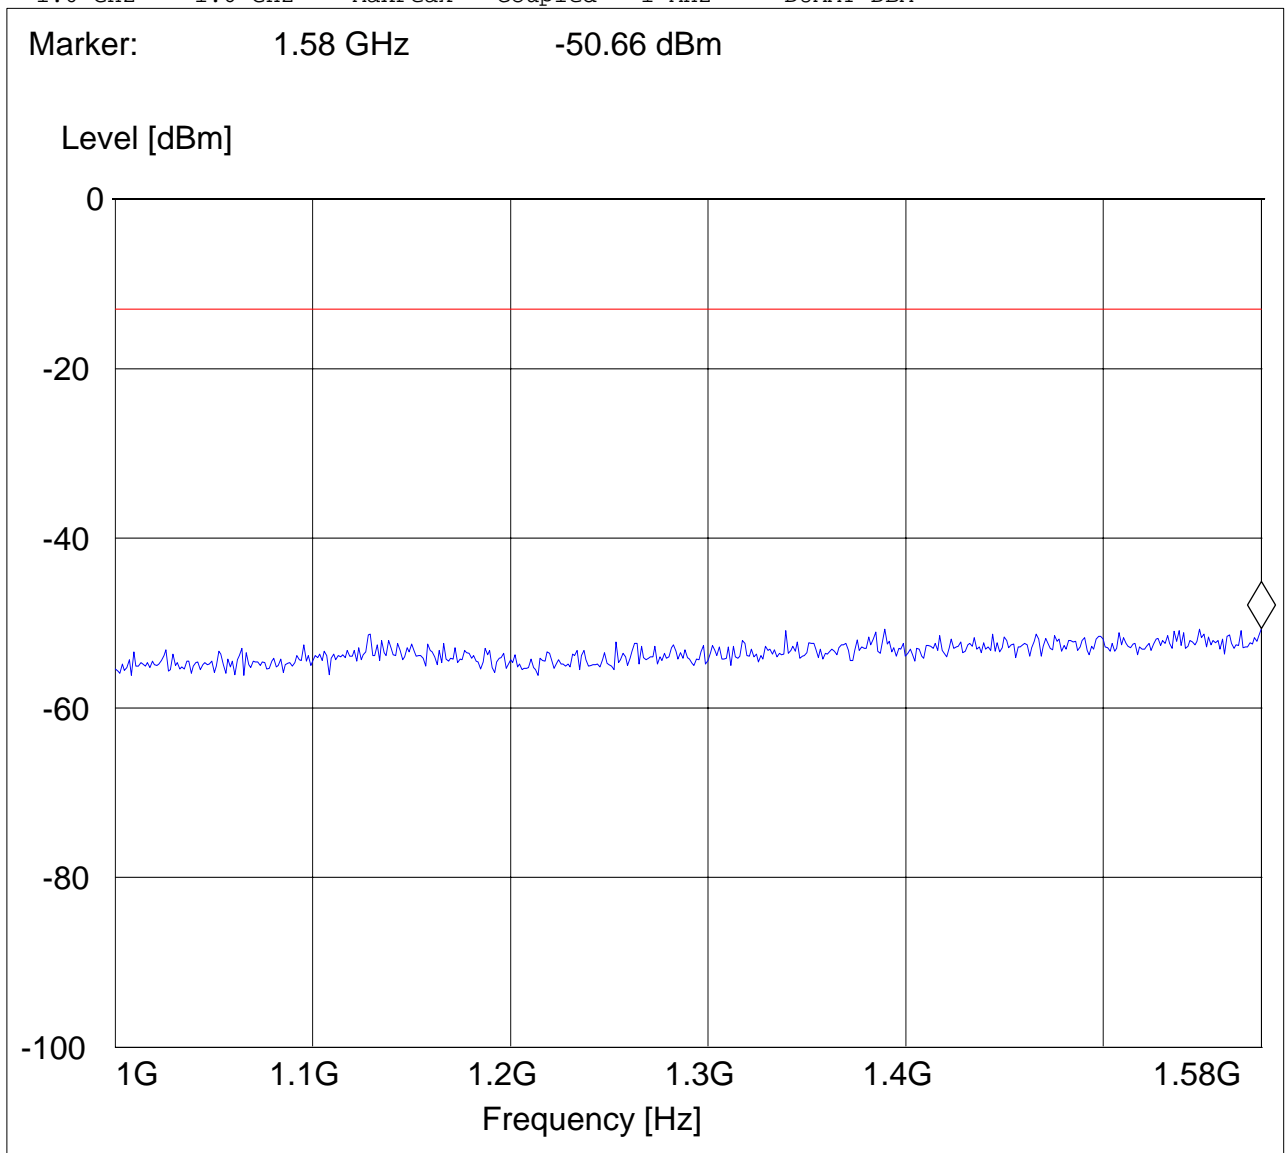




RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4233: 1.58GHz – 9GHz

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD V
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Sam
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "FCC 22Spuri 1.58-9G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.6 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

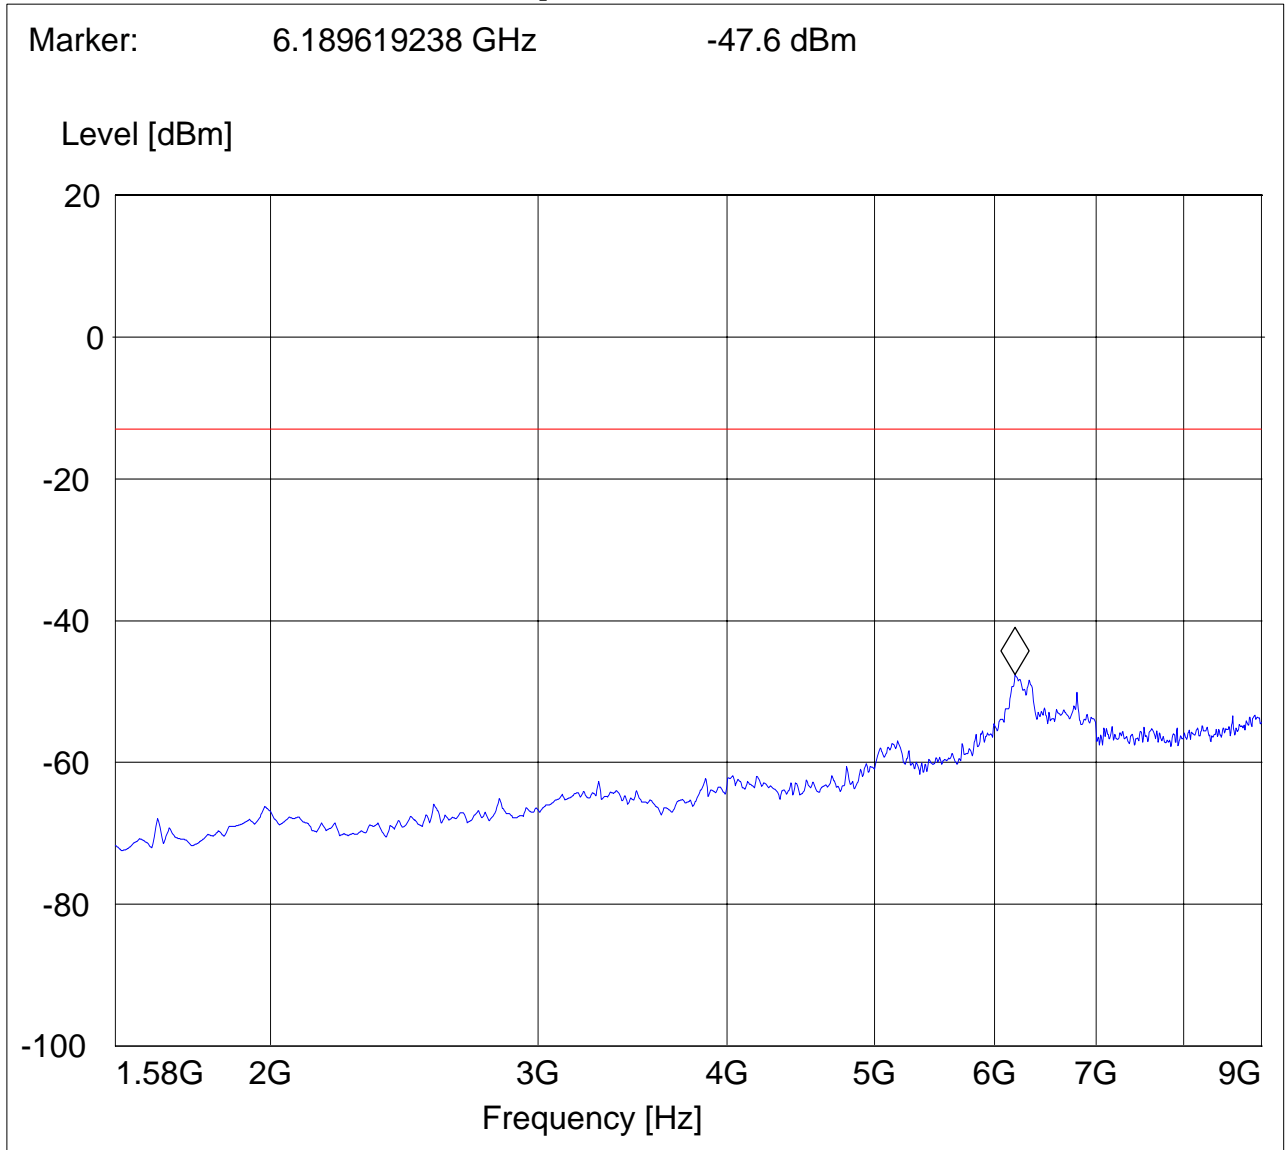



5.5.4.3 Test Results Transmitter Spurious Emission PCS-1900:

Harmonic	Tx ch-512 Freq.(MHz)	Level (dBm)	Tx ch-661 Freq. (MHz)	Level (dBm)	Tx ch-810 Freq. (MHz)	Level (dBm)
2	3700.4	NF	3760	NF	3819.6	NF
3	5550.6	NF	5640	NF	5729.4	NF
4	7400.8	NF	7520	NF	7639.2	NF
5	9251	NF	9400	NF	9549	NF
6	11101.2	NF	11280	NF	11458.8	NF
7	12951.4	NF	13160	NF	13368.6	NF
8	14801.6	NF	15040	NF	15278.4	NF
9	16651.8	NF	16920	NF	17188.2	NF
10	18502	NF	18800	NF	19098	NF
NF = NOISE FLOOR						




RADIATED SPURIOUS EMISSIONS(PCS 1900) TX: 30MHz - 1GHz

Antenna: Vertical

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 1900 CH 512
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "FCC 24 Spur 30M-1G_V"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

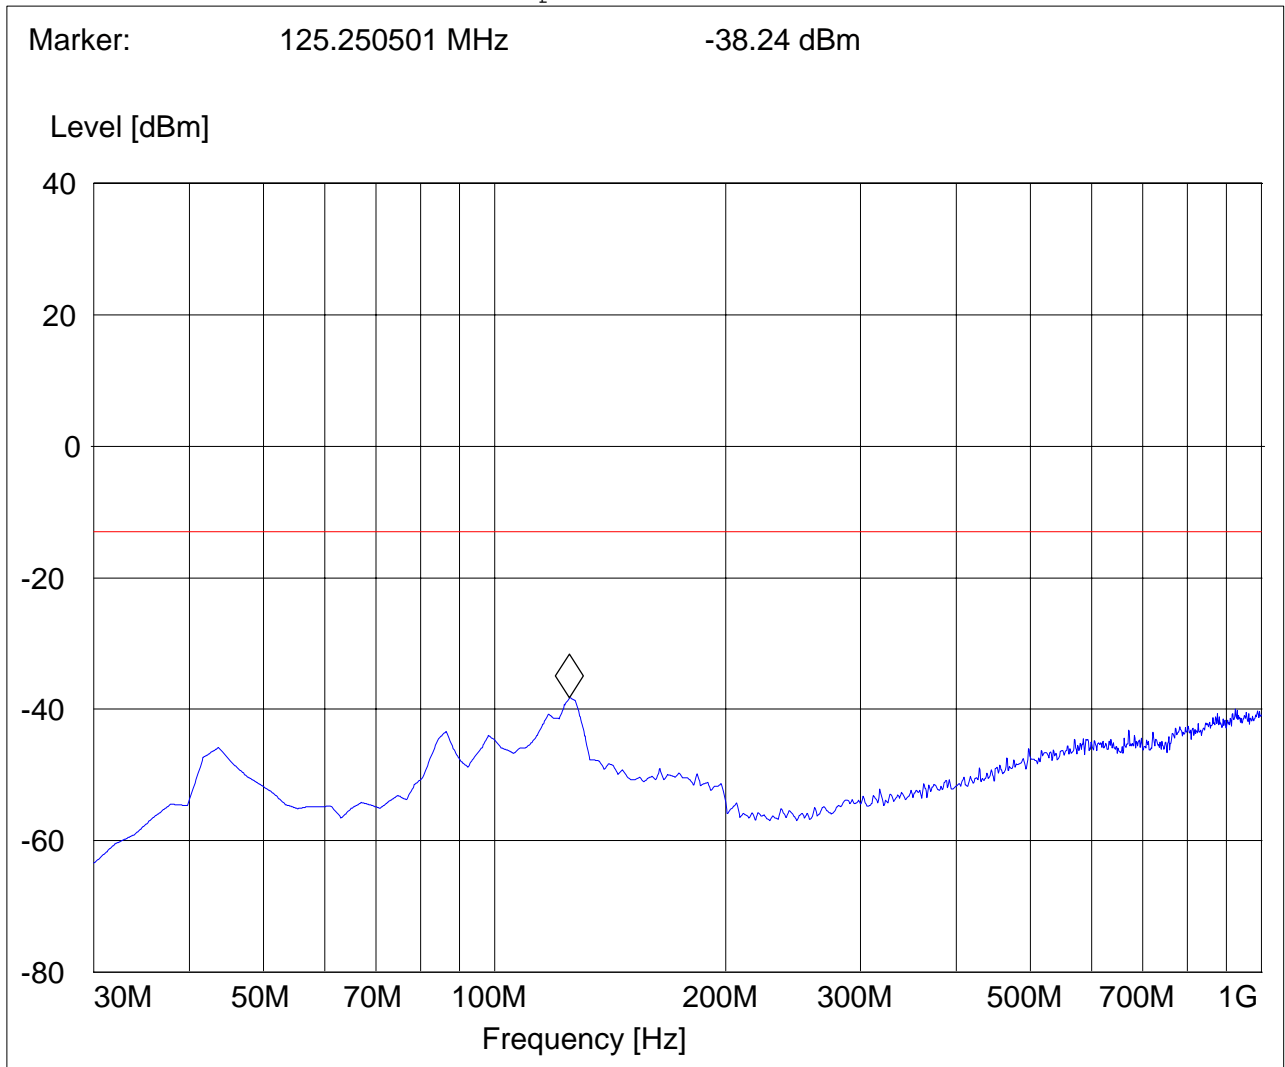




RADIATED SPURIOUS EMISSIONS(PCS 1900) TX: 30MHz - 1GHz

Antenna: Horizontal

EUT: 7505
Customer:: PSION
Test Mode: GSM 1900 CH 512
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adapter
Comments:

SWEEP TABLE: "FCC 24 Spur 30M-1G_H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	DUMMY-DBM

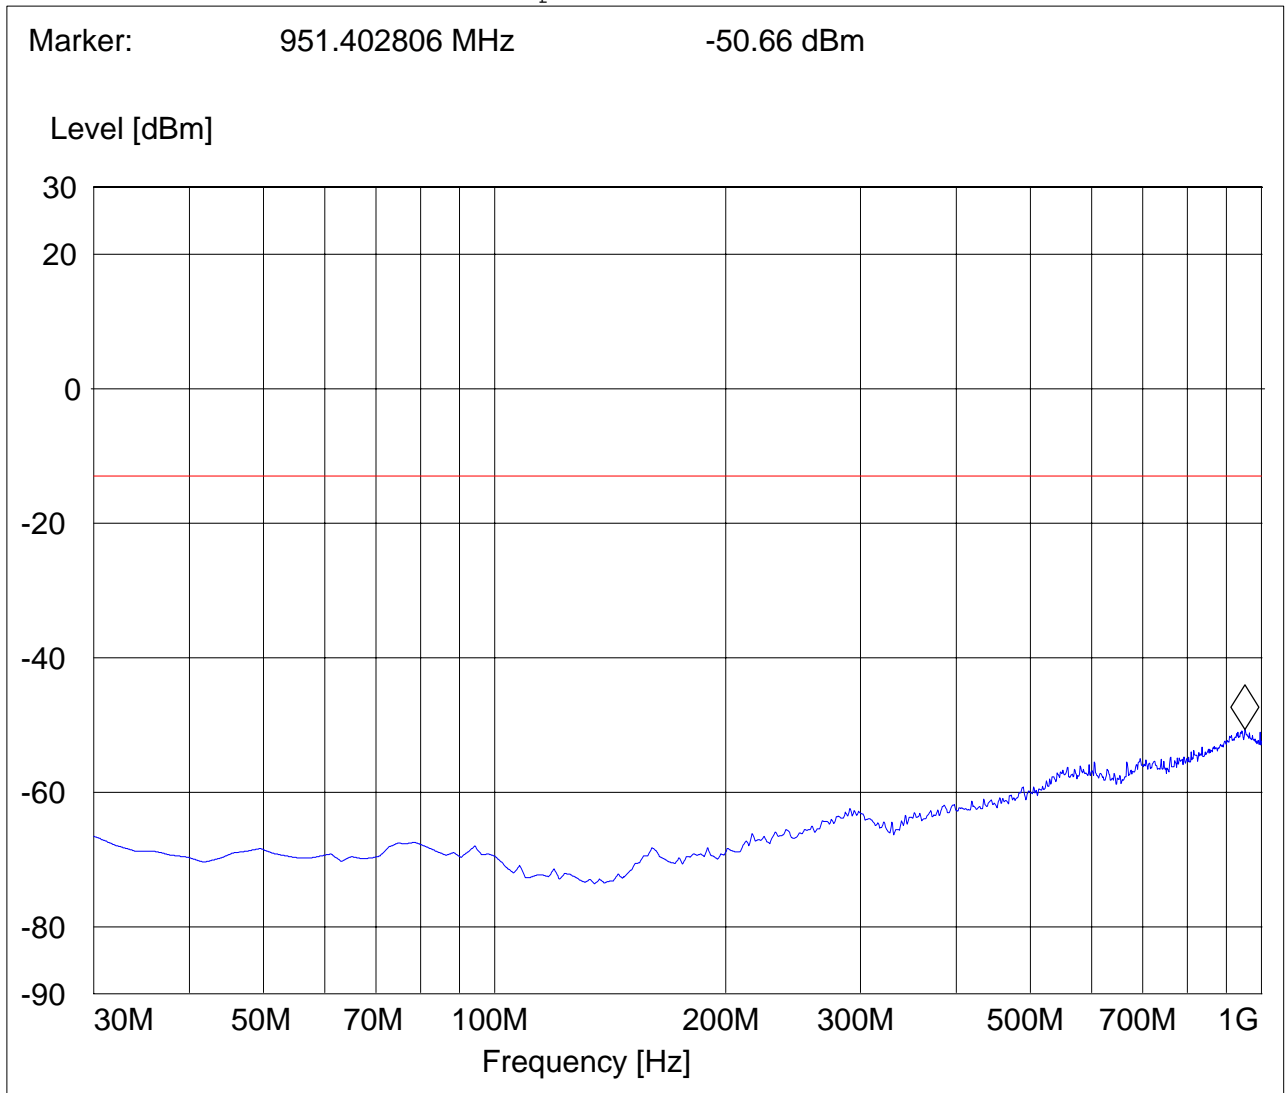




RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx CHANNEL 512: 1GHz – 3GHz

EUT: 7505
 Customer:: Psion
 Test Mode: GSM 1900, CH 512
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: CHRIS
 Voltage: Battery
 Comments: Marker placed on uplink

SWEEP TABLE: "FCC 24Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

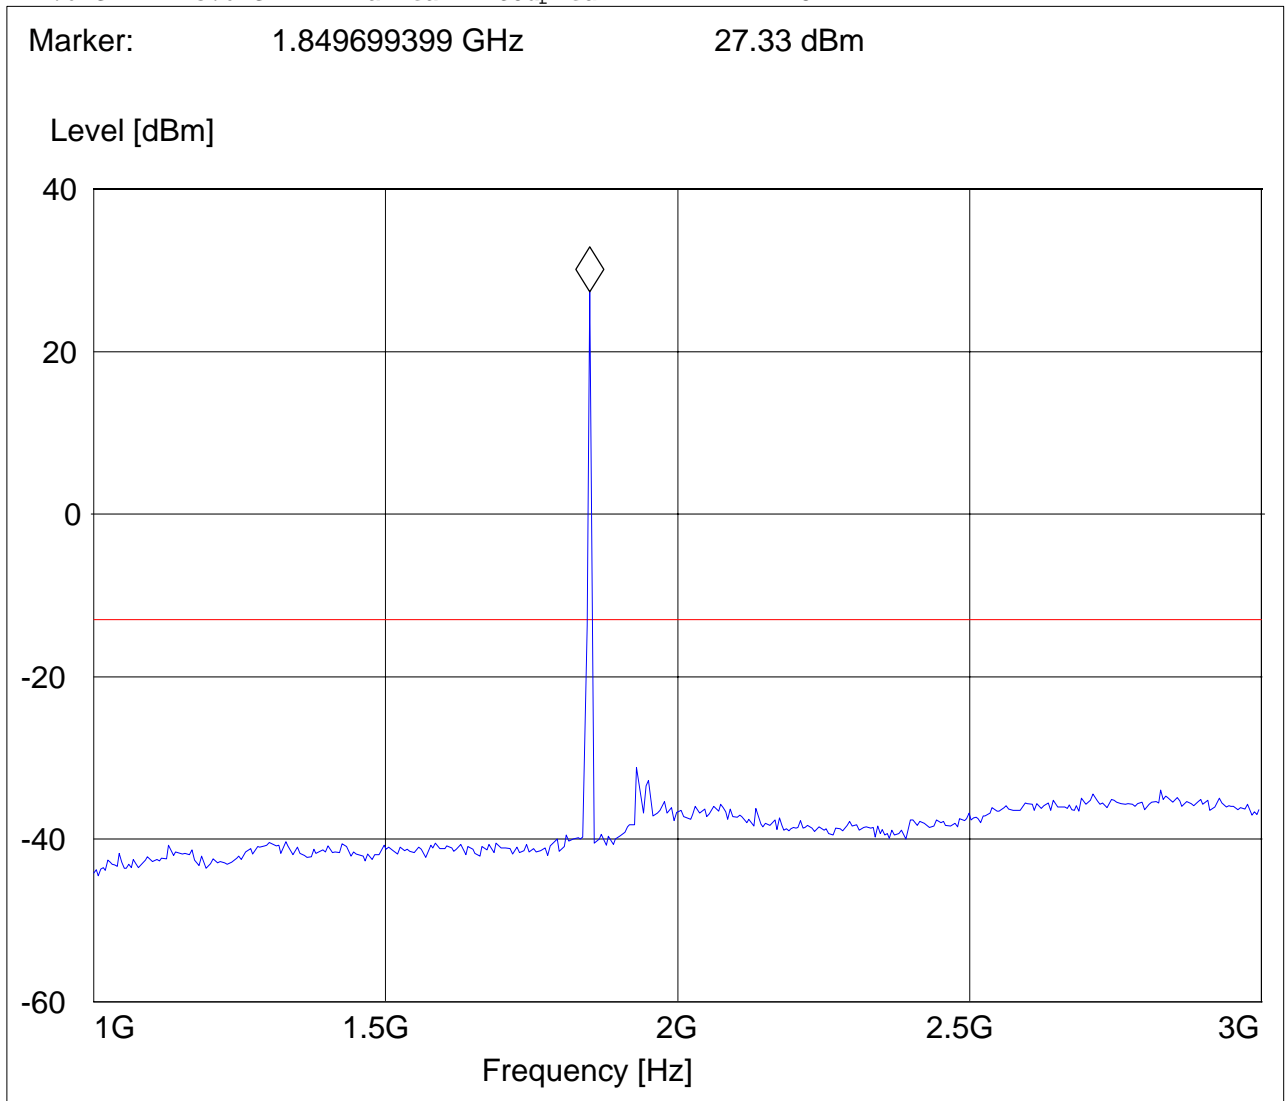




RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx CHANNEL 512: 3GHz – 18GHz

EUT: 7505
 Customer:: Psion
 Test Mode: GSM 1900, CH 512
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: CHRIS
 Voltage: Battery
 Comments:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker: 17.729458918 GHz -50.78 dBm

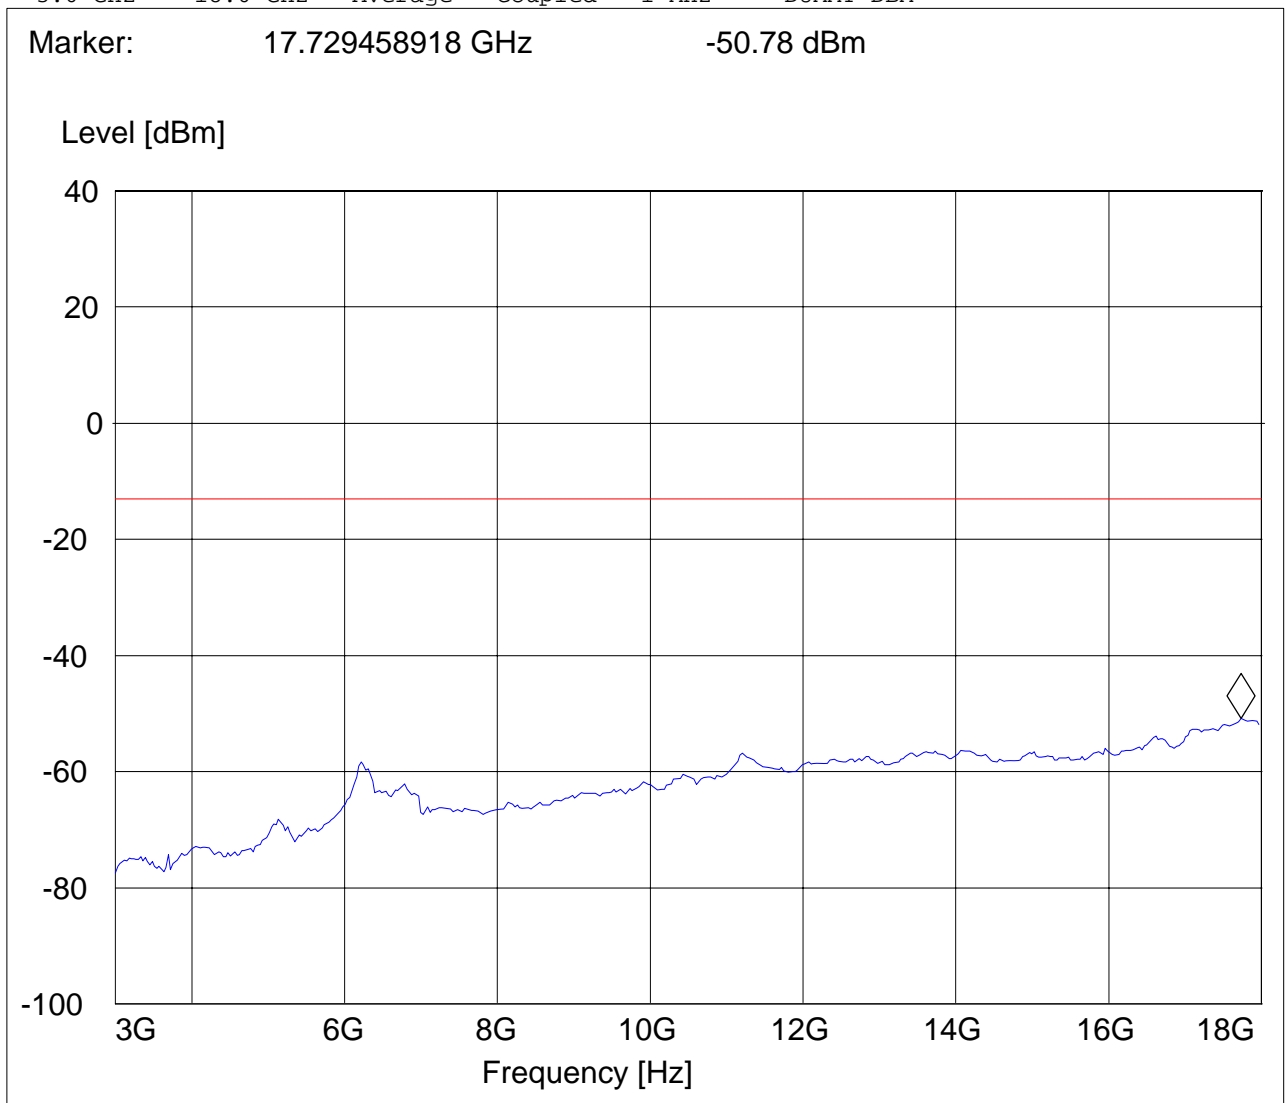




RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx CHANNEL 661: 1GHz – 3GHz

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 1900; CH 661
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: Chris
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "FCC 24Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

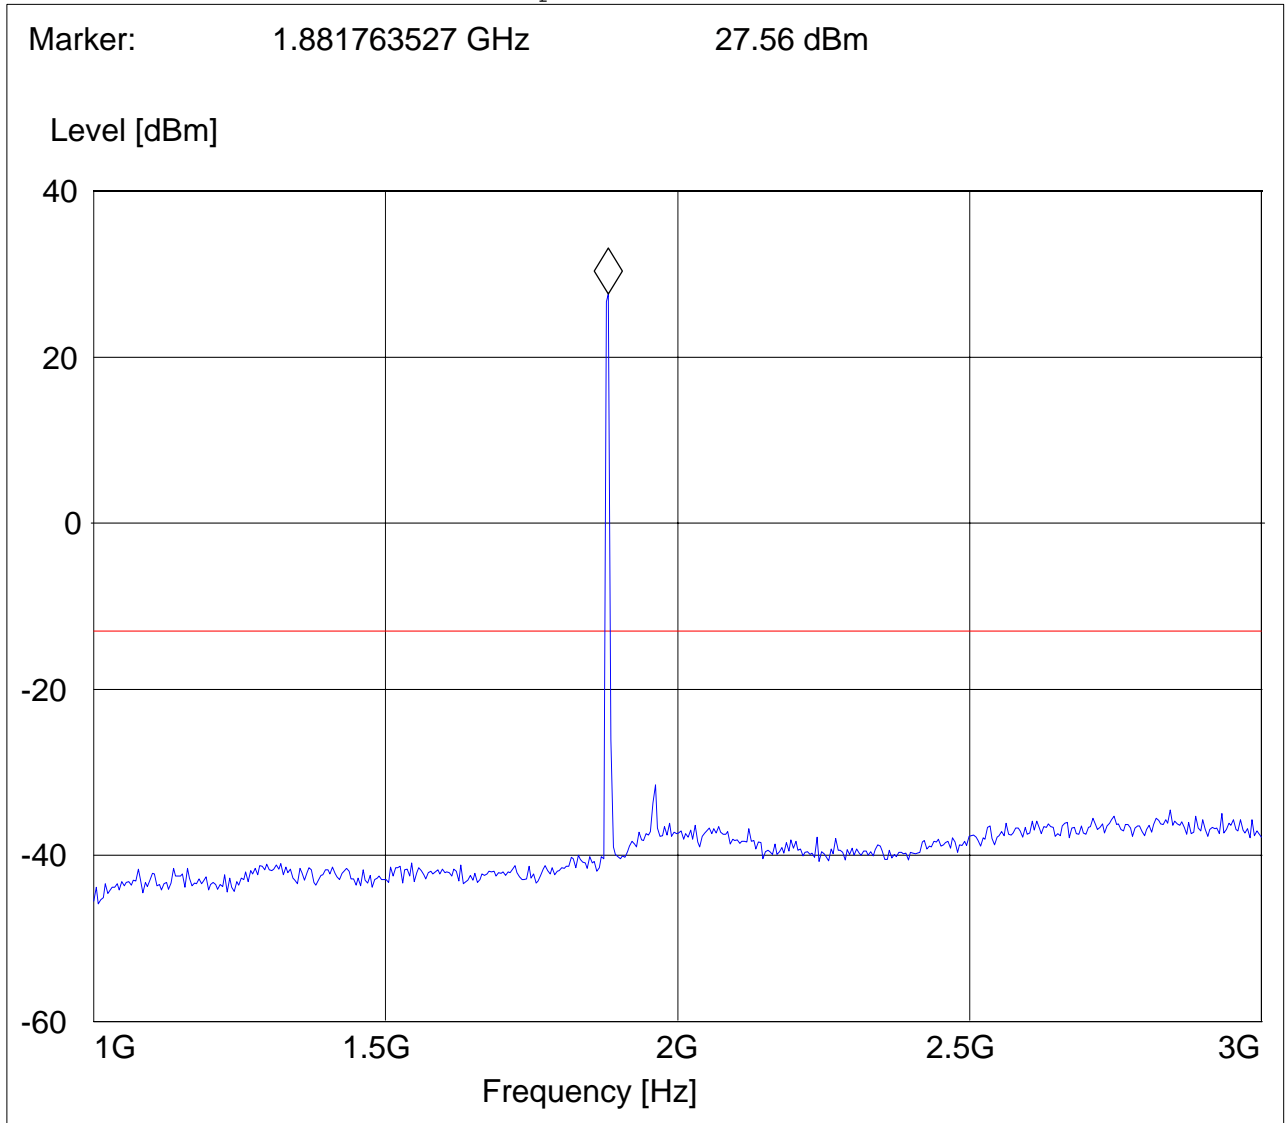




RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx CHANNEL 661: 3GHz – 18GHz

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 1900; CH 661
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: Chris
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker: 17.759519038 GHz -51.26 dBm

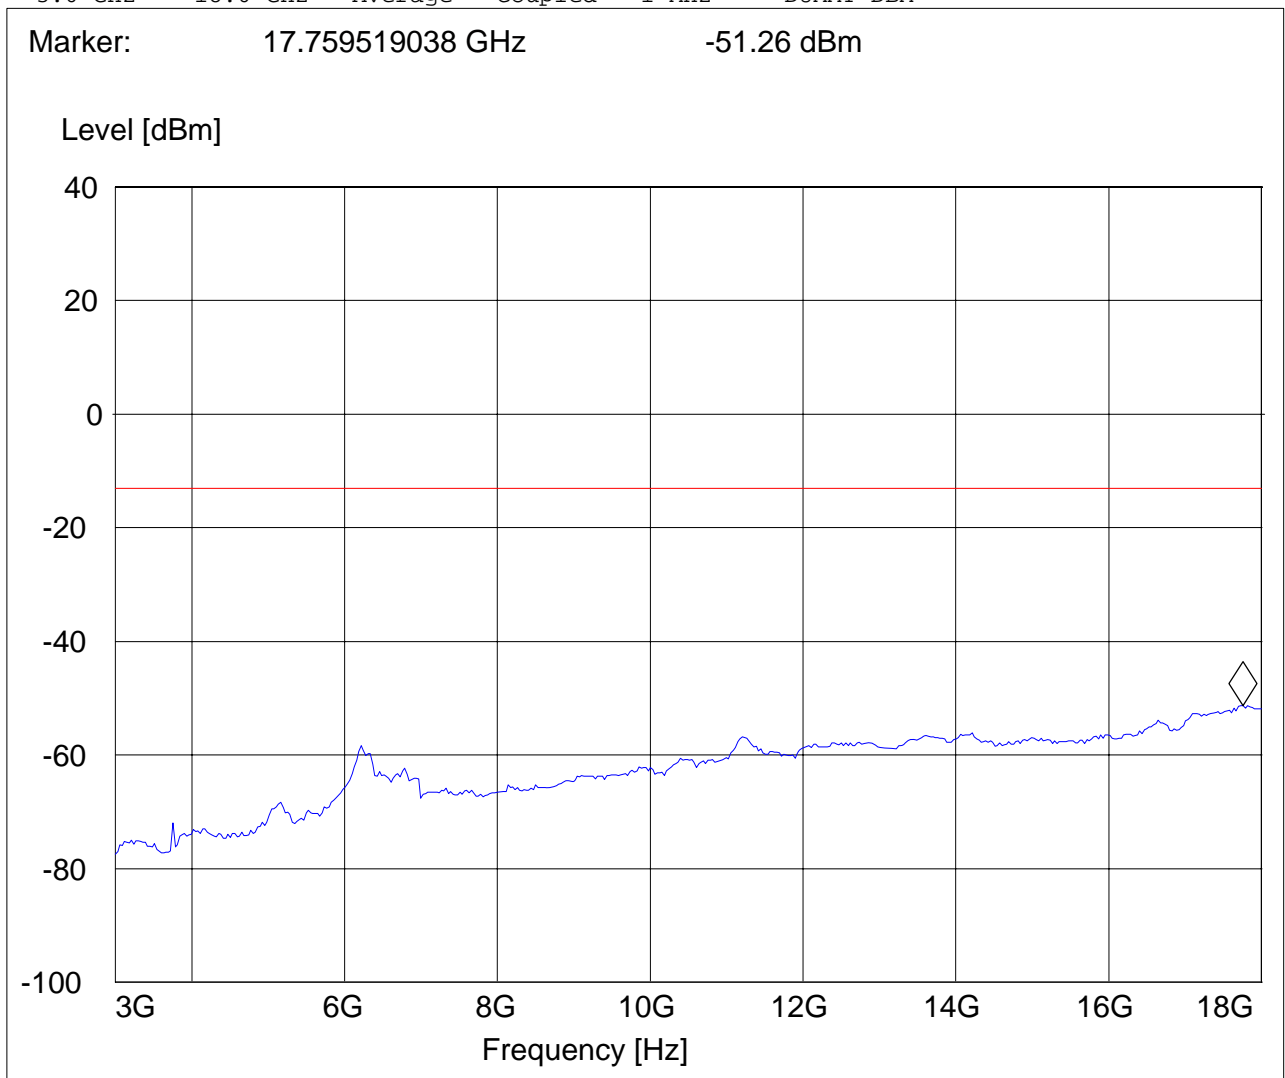




RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx CHANNEL 810: 1GHz – 3GHz

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 1900; CH 810
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: Chris
 Voltage: AC Adapter
 Comments: Marker placed on downlink

SWEEP TABLE: "FCC 24Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

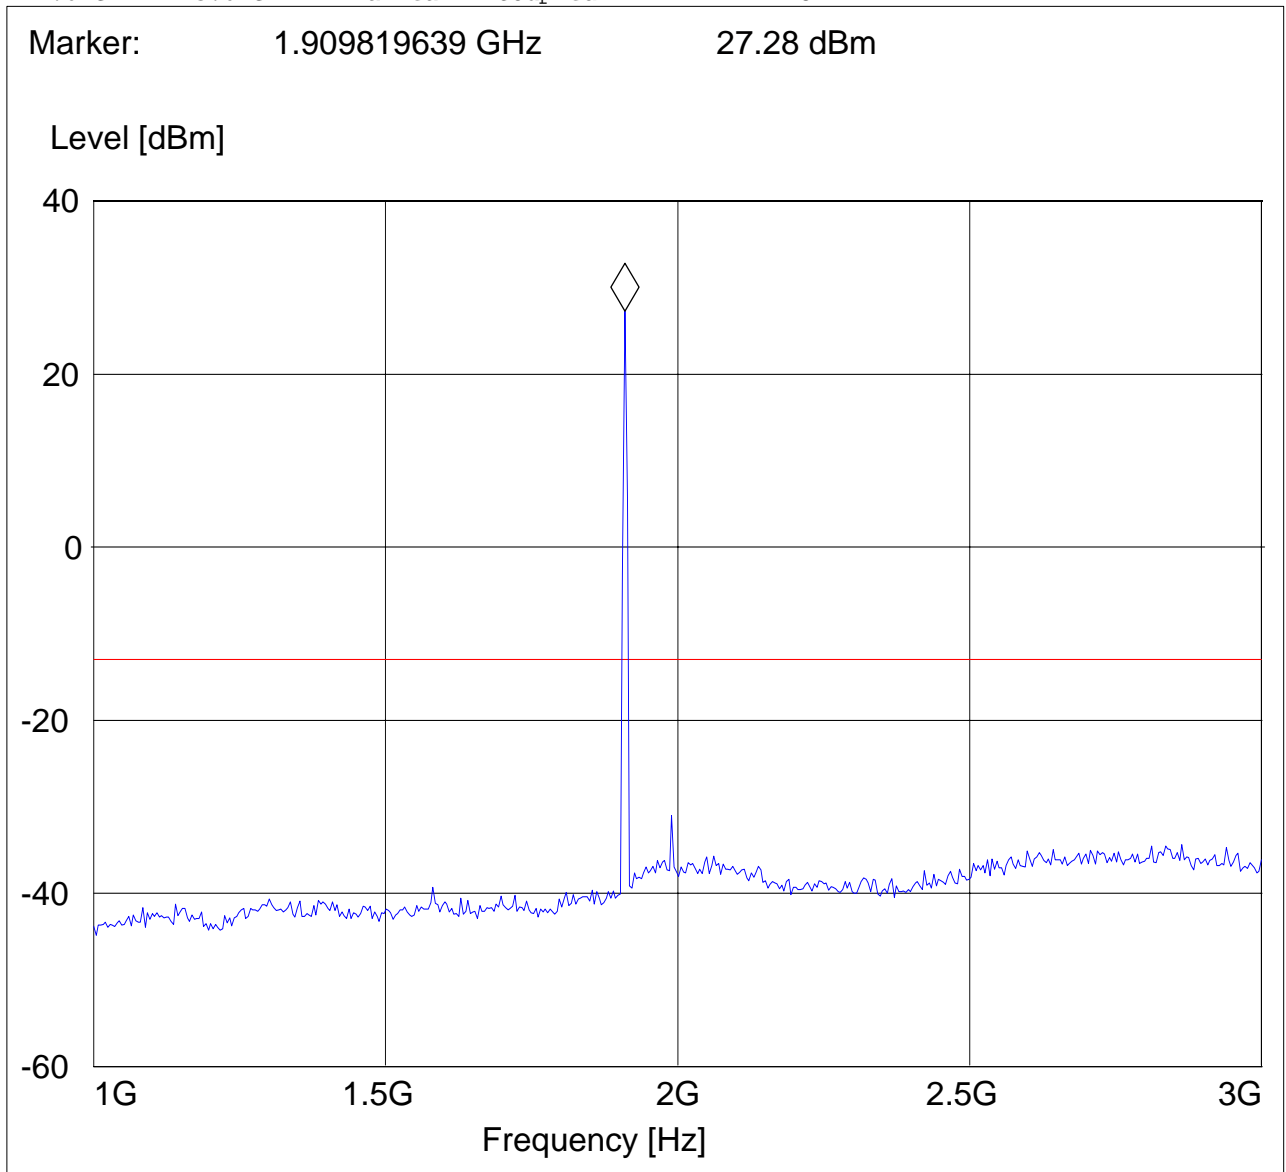




RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx CHANNEL 810: 3GHz – 18GHz

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 1900; CH 810
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: Chris
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker: 17.819639279 GHz -50.74 dBm

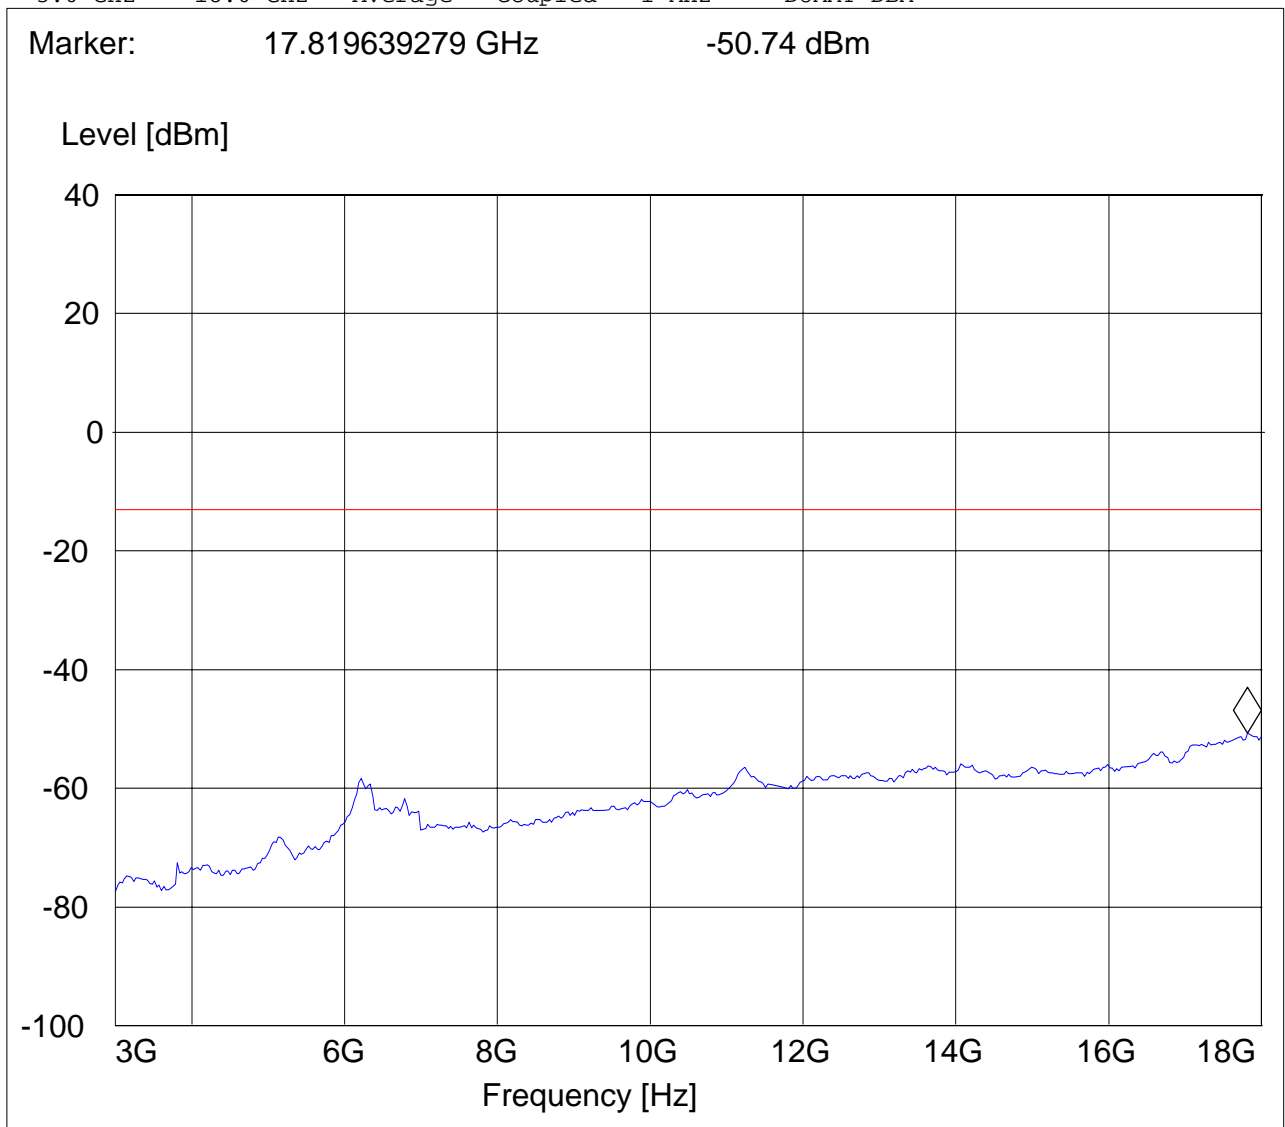




RADIATED SPURIOUS EMISSIONS(PCS 1900) 18GHz – 19.1GHz

Note: This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 1900 CH 512
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "FCC 24spuri 18-19.1G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	19.1 GHz	Average	Coupled	1 MHz	DUMMY-DBM

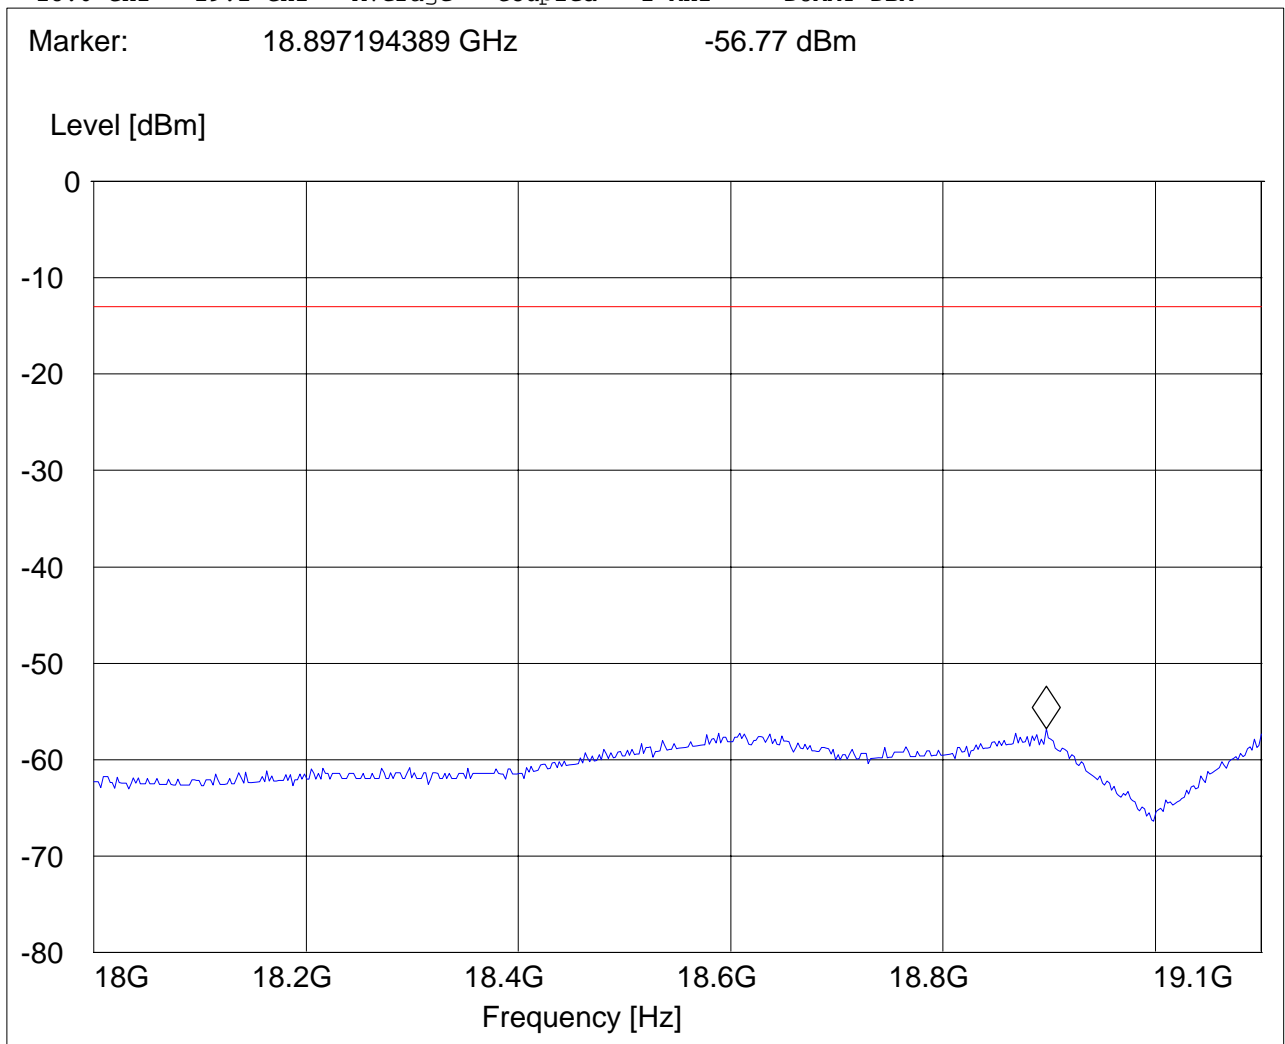

**5.5.4.4 Test Results Transmitter Spurious Emission UMTS FDD2:**

Harmonics	Tx ch-9262 Freq. (MHz)	Level (dBm)	Tx ch-9400 Freq. (MHz)	Level (dBm)	Tx ch-9538 Freq. (MHz)	Level (dBm)
2	3704.8	NF	3760	NF	3815.2	NF
3	5557.2	NF	5640	NF	5722.8	NF
4	7409.6	NF	7520	NF	7630.4	NF
5	9262	NF	9400	NF	9538	NF
6	11114.4	NF	11280	NF	11445.6	NF
7	12966.8	NF	13160	NF	13353.2	NF
8	14819.2	NF	15040	NF	15260.8	NF
9	16671.6	NF	16920	NF	17168.4	NF
10	18524	NF	18800	NF	19076	NF




RADIATED SPURIOUS EMISSIONS(UMTS FDD2) TX: 30MHz - 1GHz

Antenna: Vertical

EUT: 7505
 Customer:: PSION
 Test Mode: FDD2
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "FCC 24 Spur 30M-1G_V"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

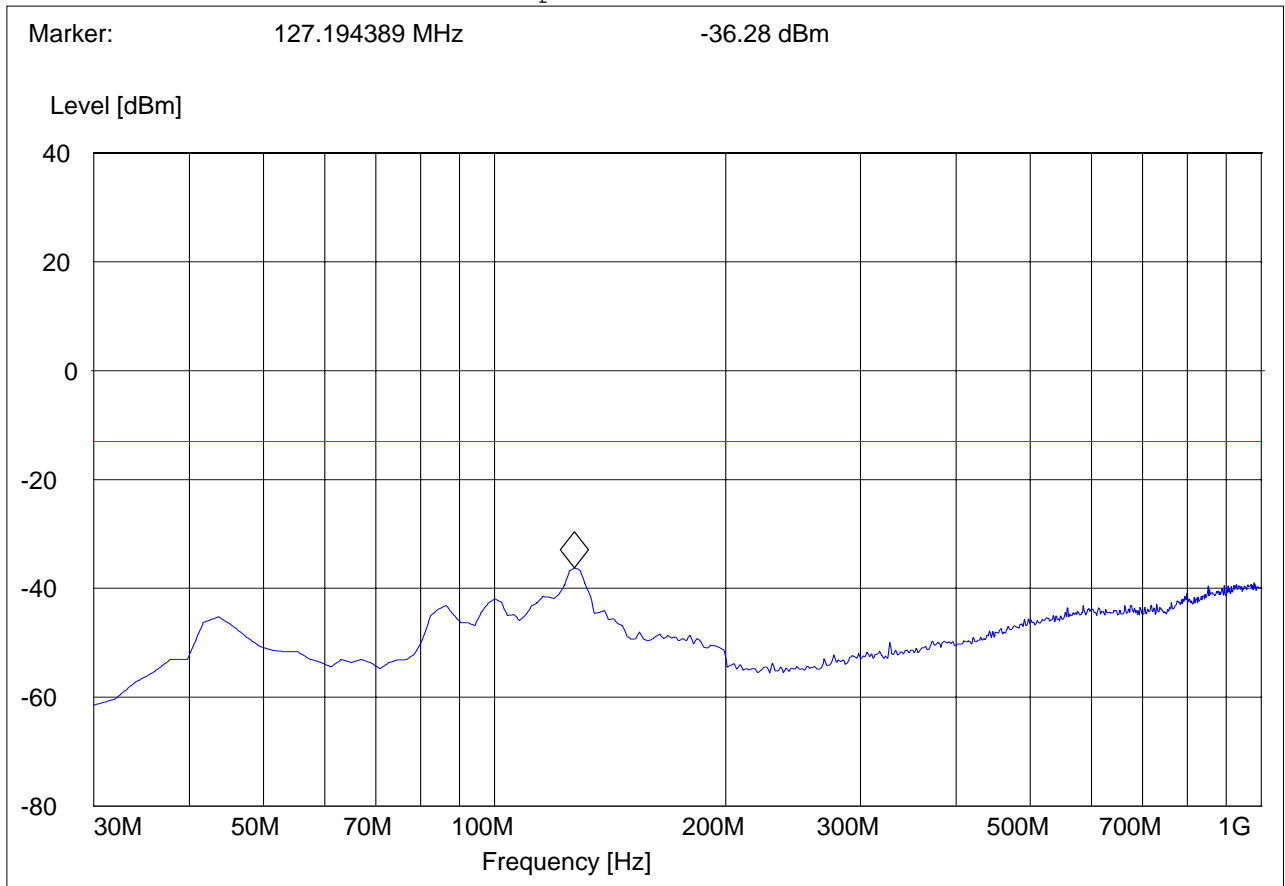




RADIATED SPURIOUS EMISSIONS(UMTS FDD2) TX: 30MHz - 1GHz

Antenna: Horizontal

EUT: 7505
 Customer:: PSION
 Test Mode: FDD2
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "FCC 24 Spur 30M-1G_H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	DUMMY-DBM

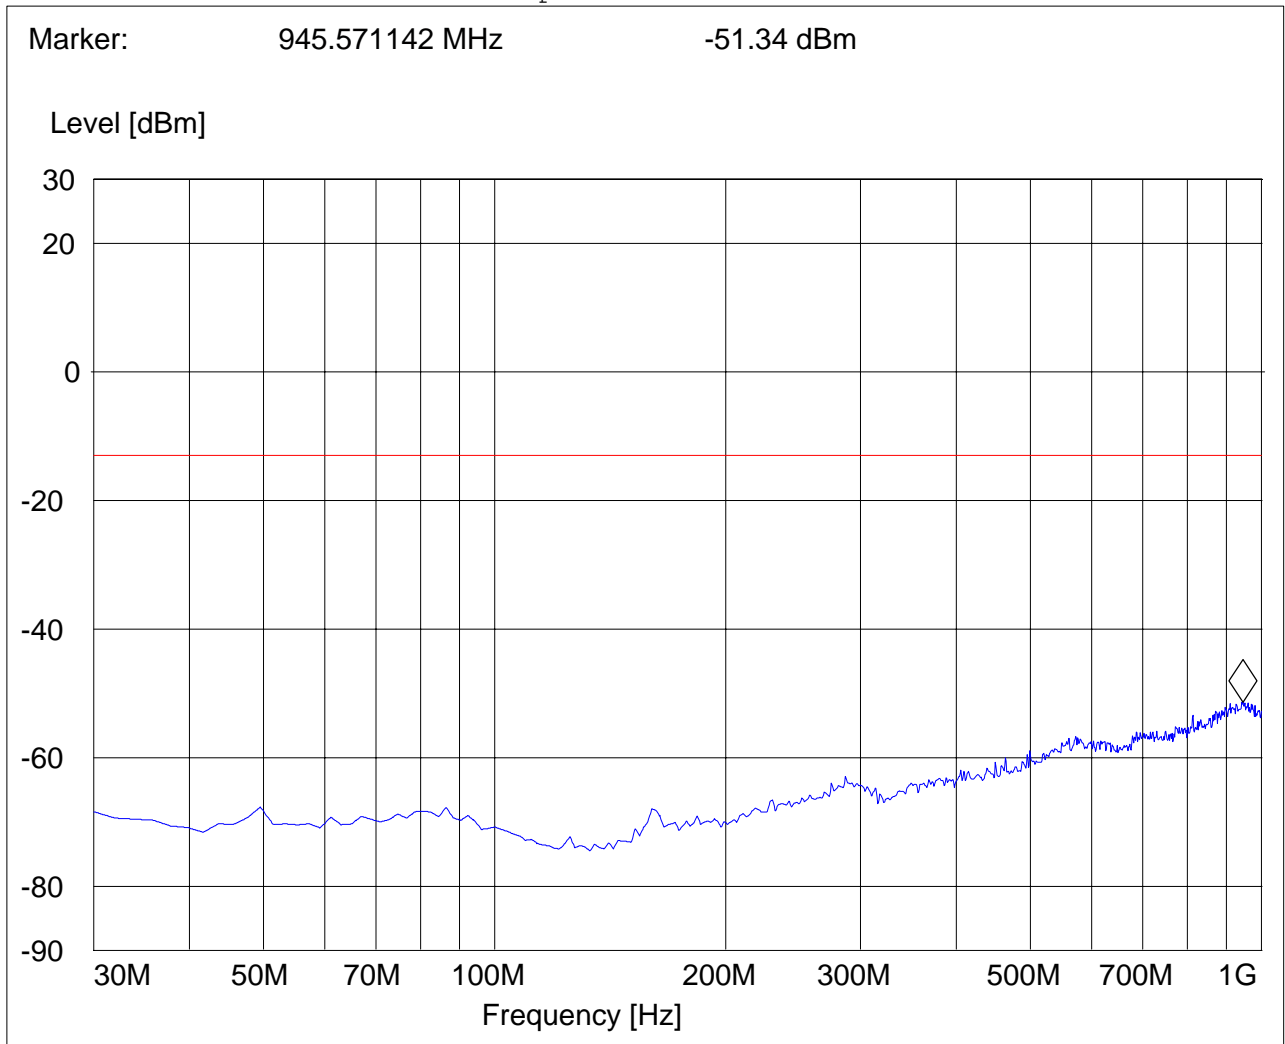




RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL 9262: 1GHz – 3GHz

Note: The peak above the limit line is the carrier freq. at ch-9262.

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD II
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "FCC 24Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

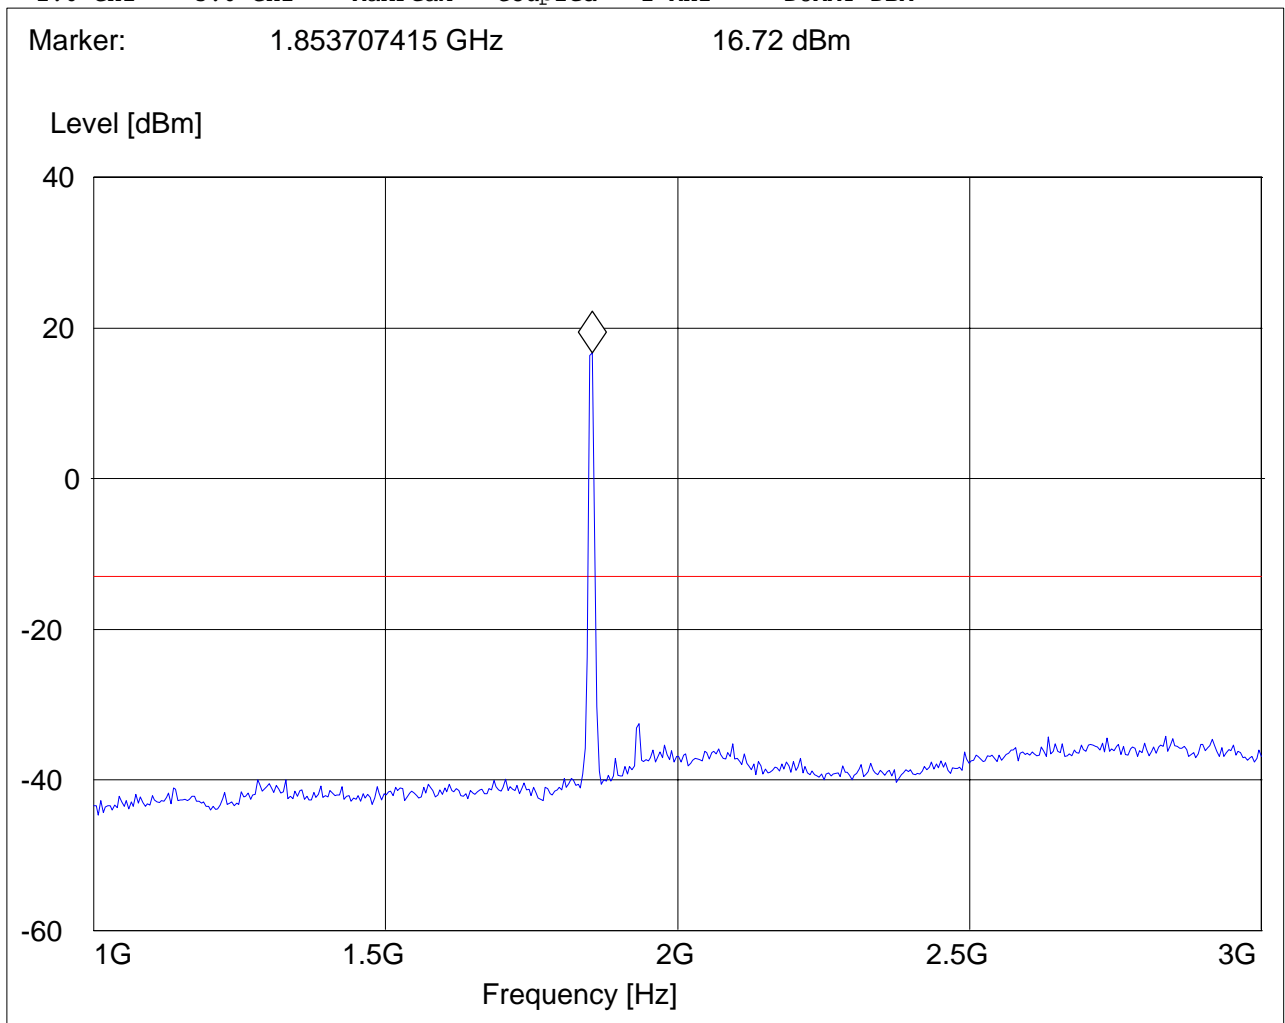




RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL 9262: 3GHz – 18GHz

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD II
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker: 17.849699399 GHz -50.94 dBm

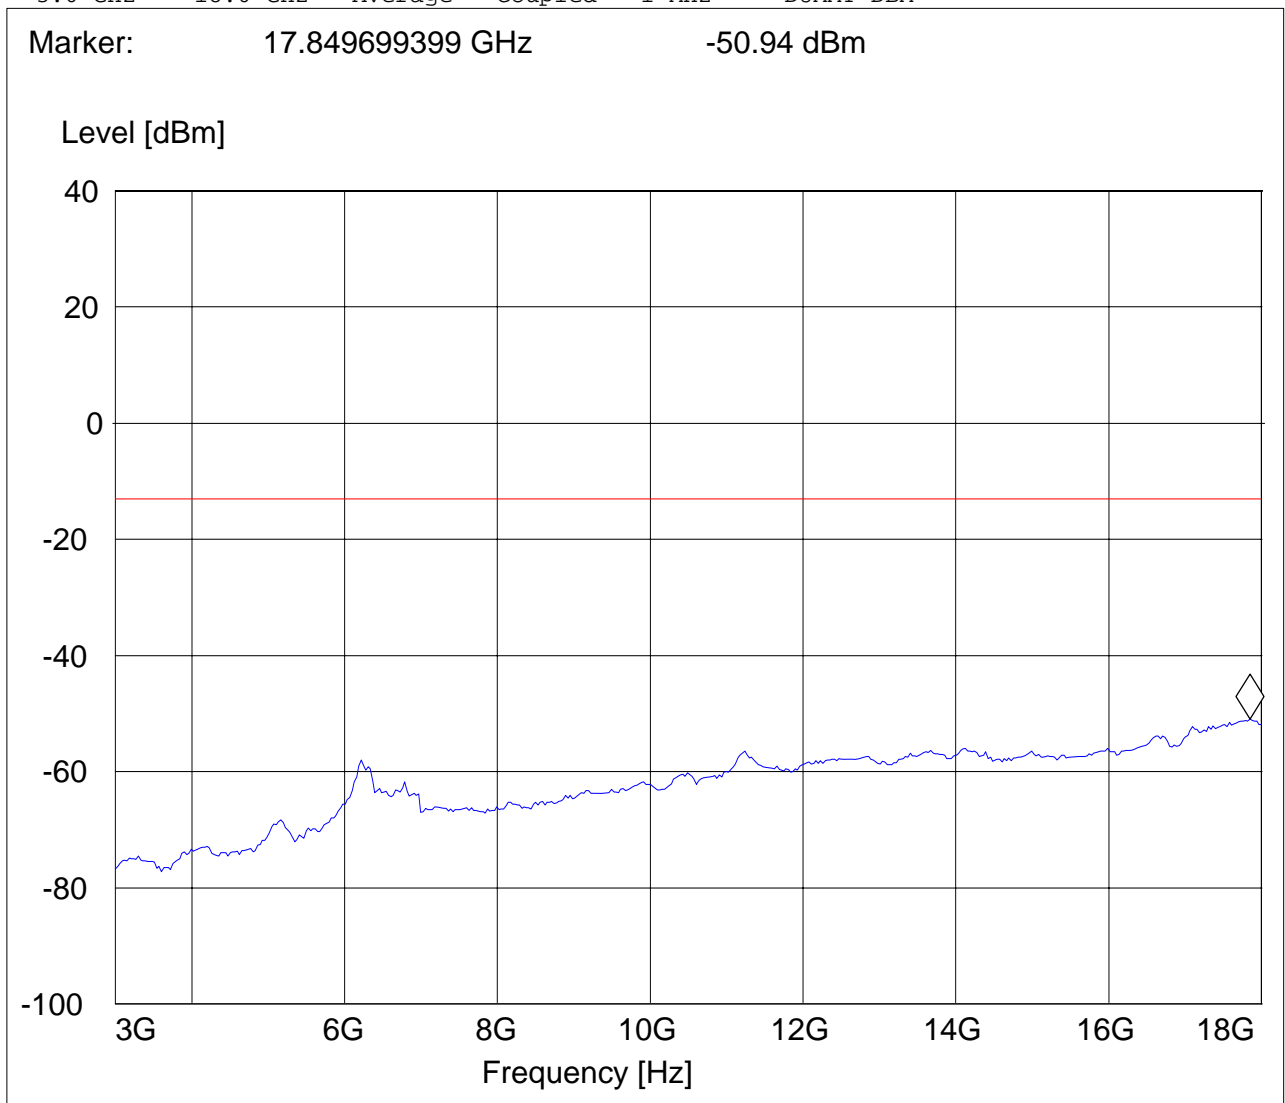




RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL 9400: 1GHz – 3GHz

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD II
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "FCC 24Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

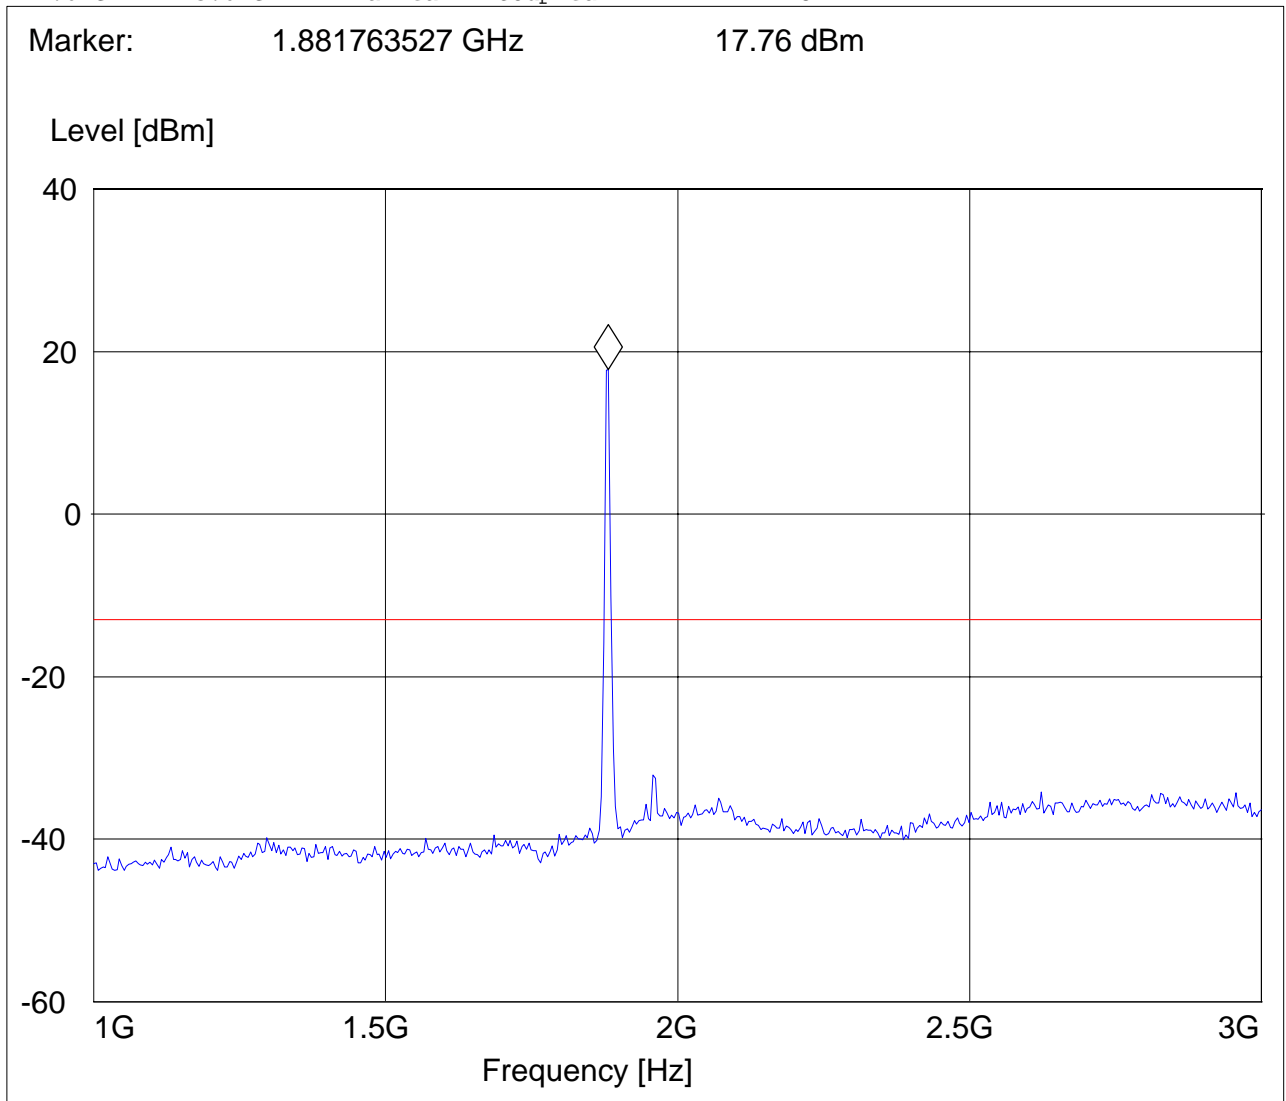




RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL9400: 3GHz – 18GHz

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD II
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	Average	Coupled	1 MHz	DUMMY-

DBM

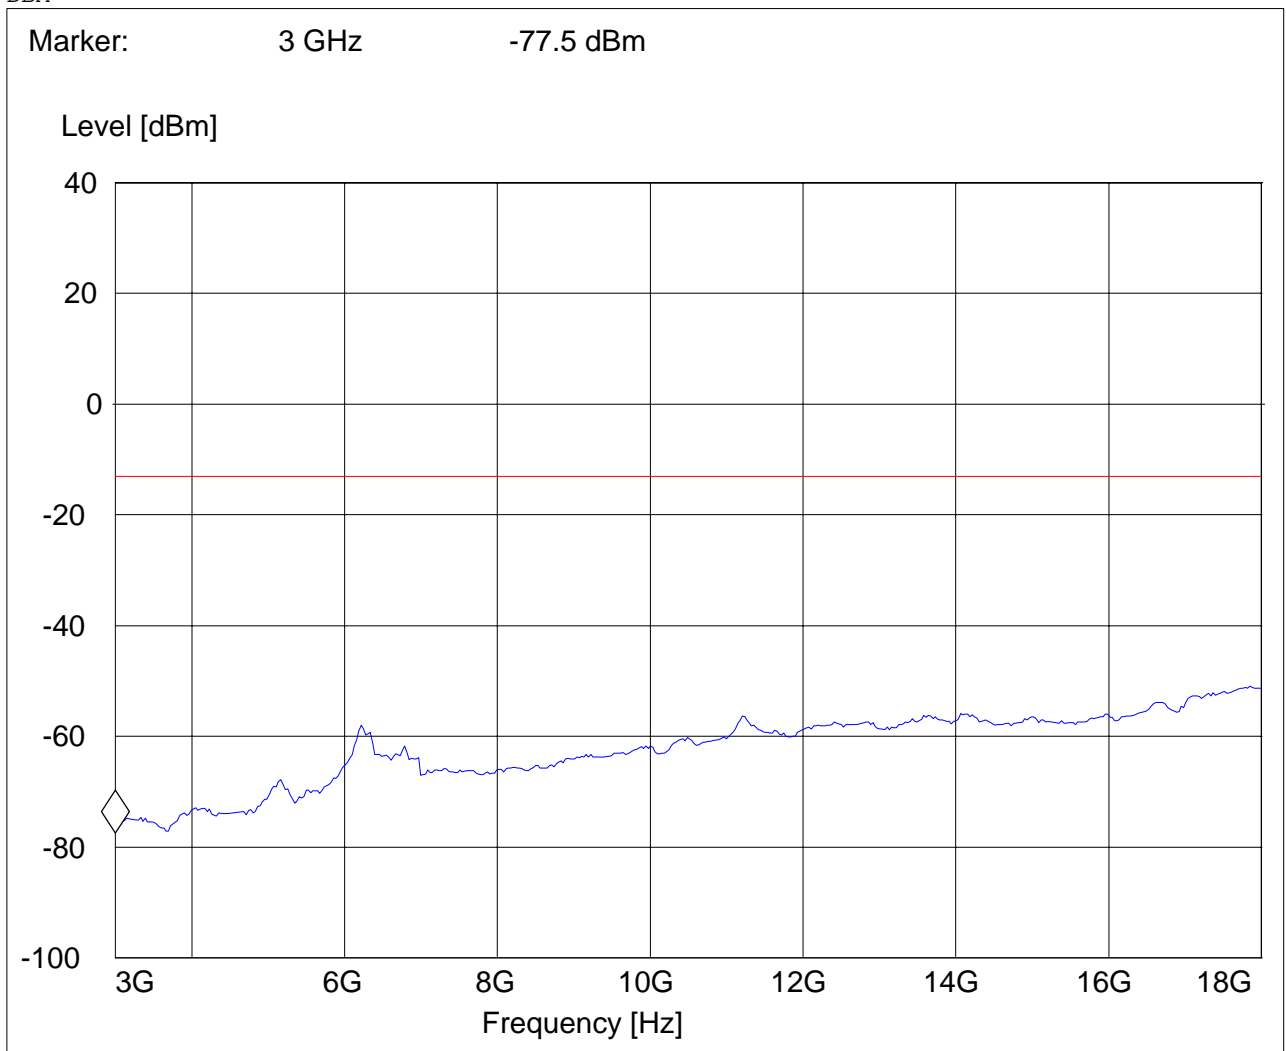




RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL 9538: 1GHz – 3GHz

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD II
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "FCC 24Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.905811623 GHz 17.62 dBm

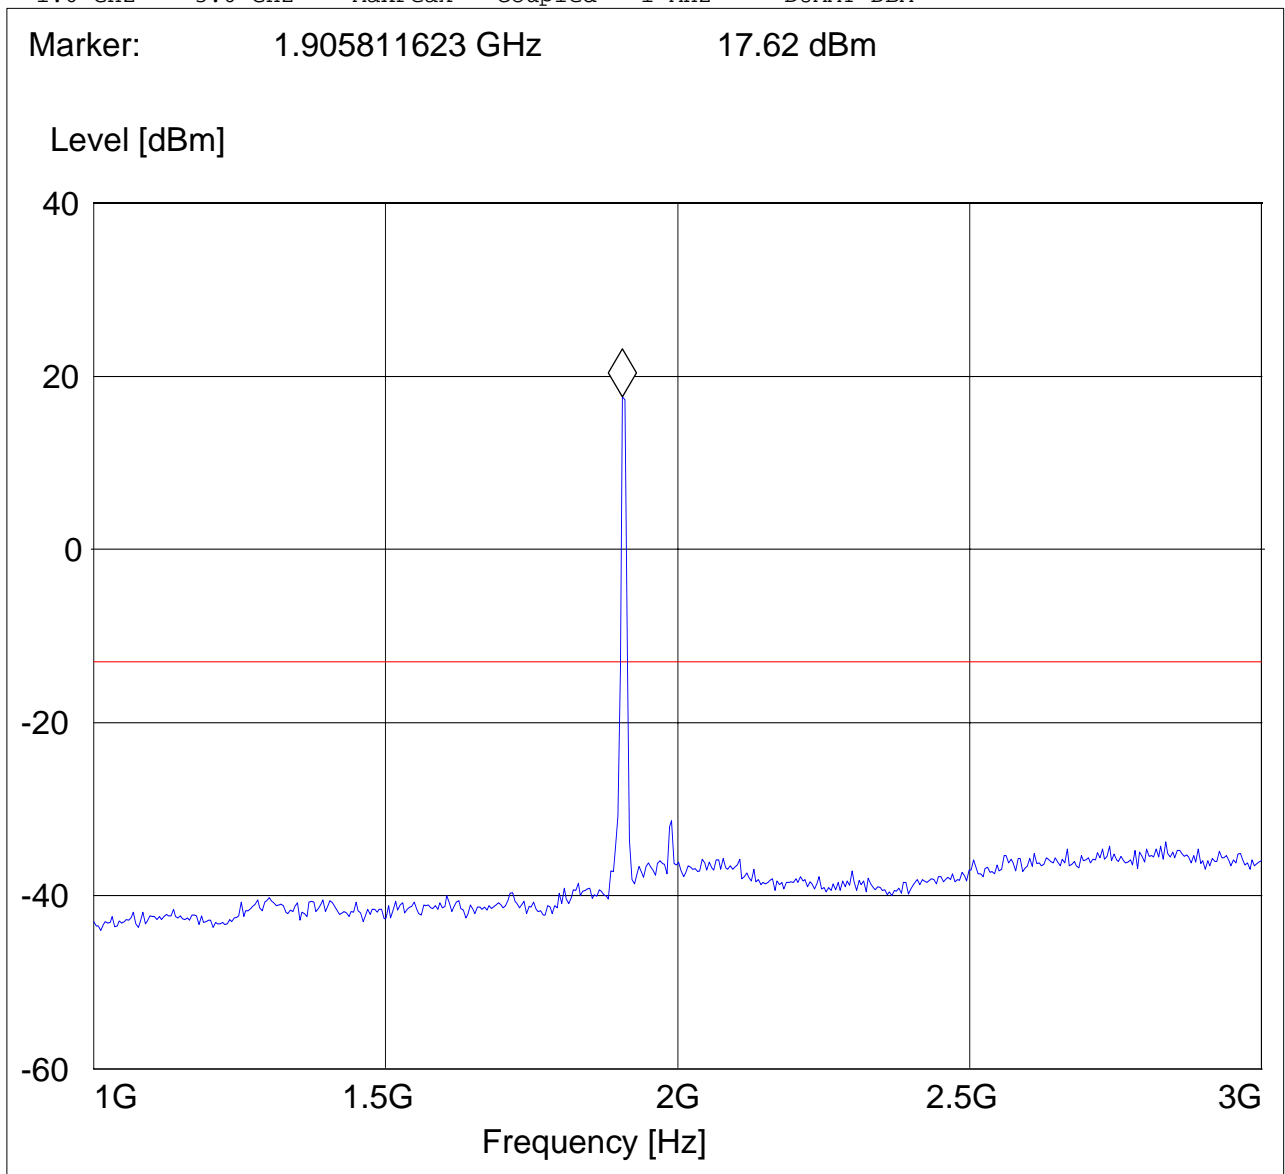




RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL 9538: 3GHz – 18GHz

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD II
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker: 17.819639279 GHz -50.74 dBm

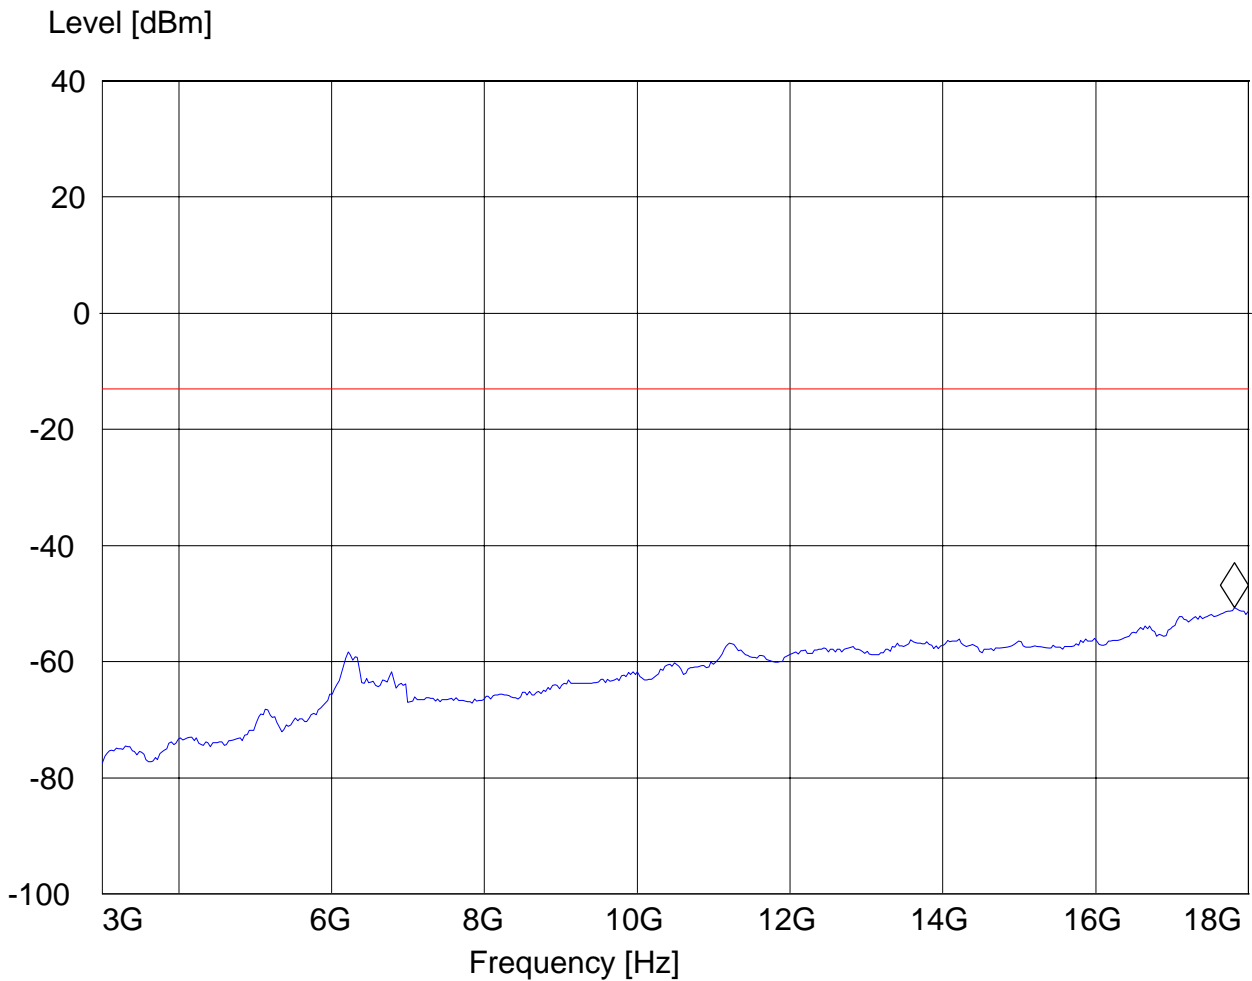




RADIATED SPURIOUS EMISSIONS(UMTS FDD2) 18GHz – 19.1GHz

Note: This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD II
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "FCC 24spuri 18-19.1G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	19.1 GHz	Average	Coupled	1 MHz	DUMMY-DBM

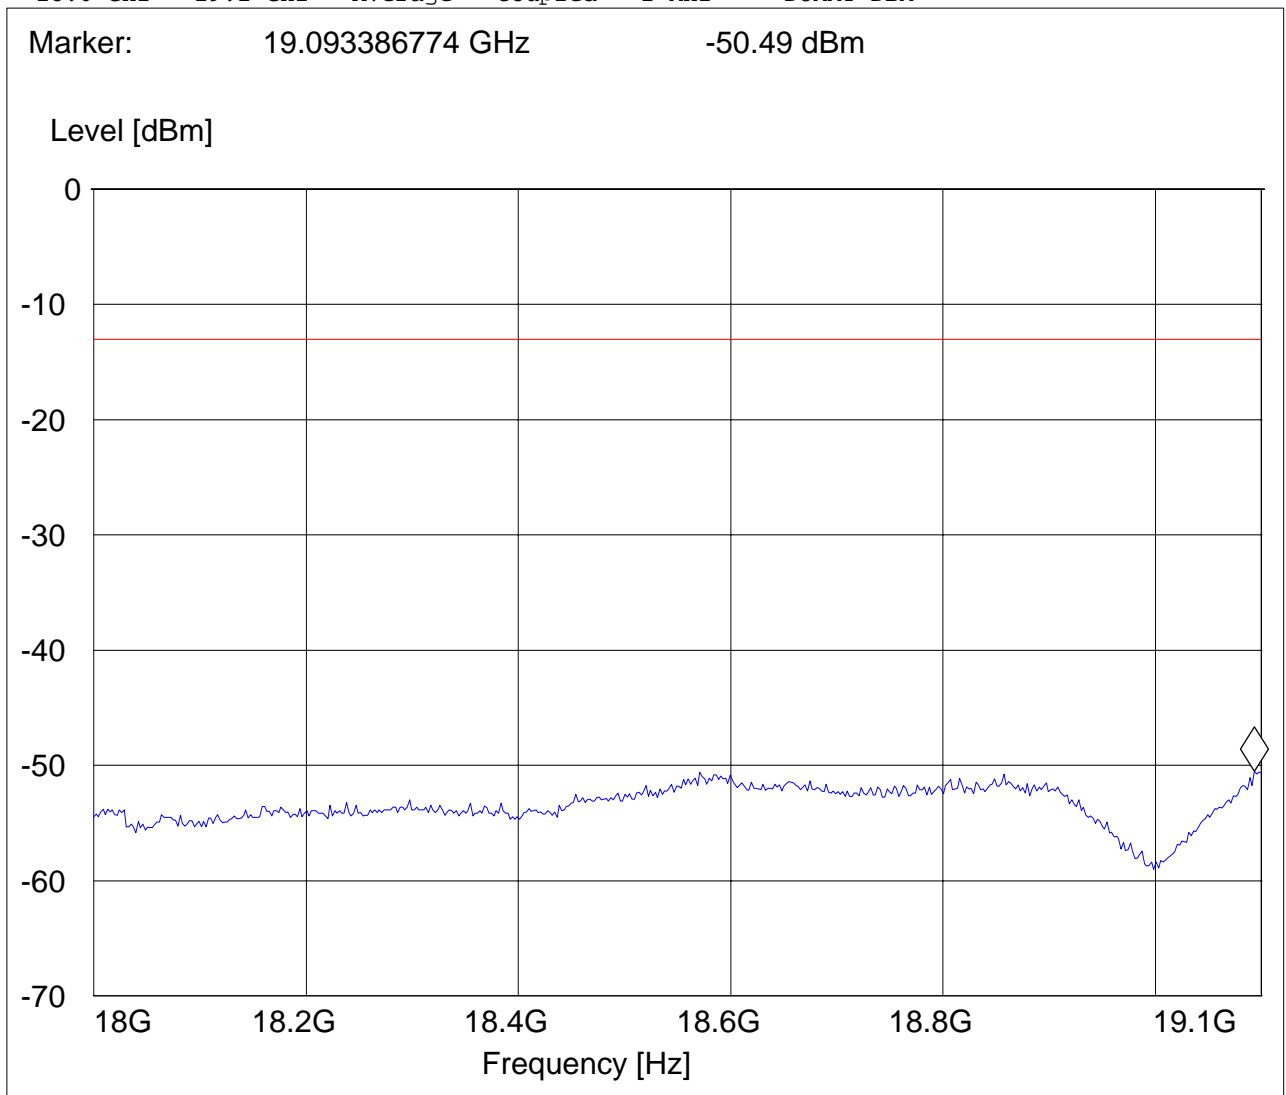

**5.5.5 RECEIVER RADIATED EMISSIONS****§ 2.1053 / RSS-132 & 133****NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 26.5GHz very short cable connections to the antenna was used to minimize the noise level.

Limits**SUBCLAUSE § RSS-133**

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

No significant emissions measurable. Plots reported here represent the worse case emissions.



5.5.5.1 Test Results Receiver Spurious Emission GSM850


30M-1GHz, Antenna Vertical

This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505
Customer: PSION
Test Mode: GSM 850; CH 190
ANT Orientation: V
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adapter
Comments:

SWEEP TABLE: "CANADA RE_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

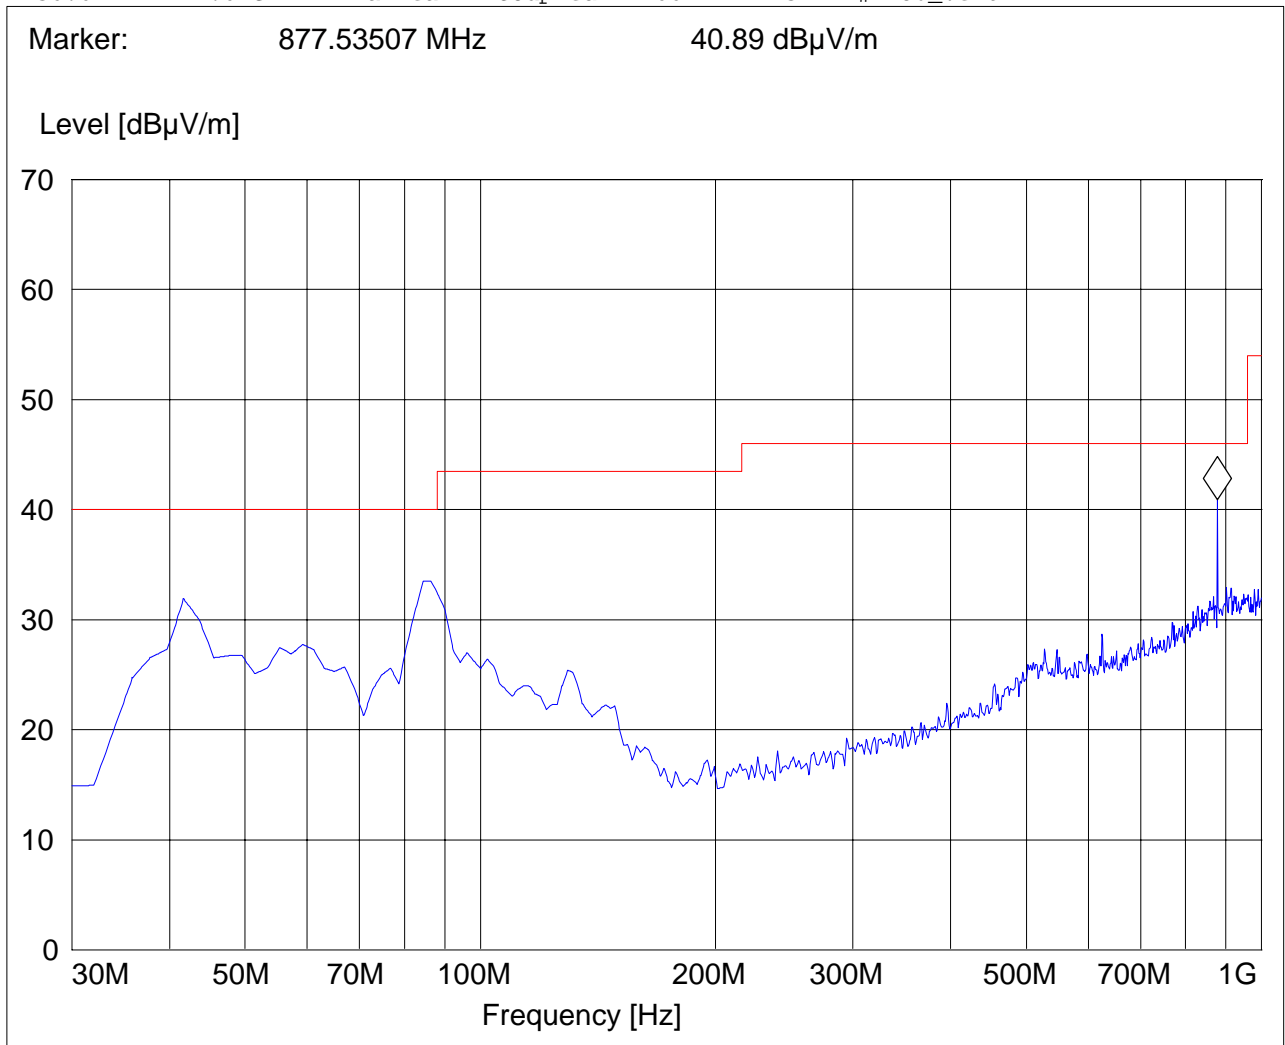




Receiver Spurious Emission GSM850 30M-1GHz, Antenna Horizontal
This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 850; CH 128
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Satya
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "CANDA RE_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

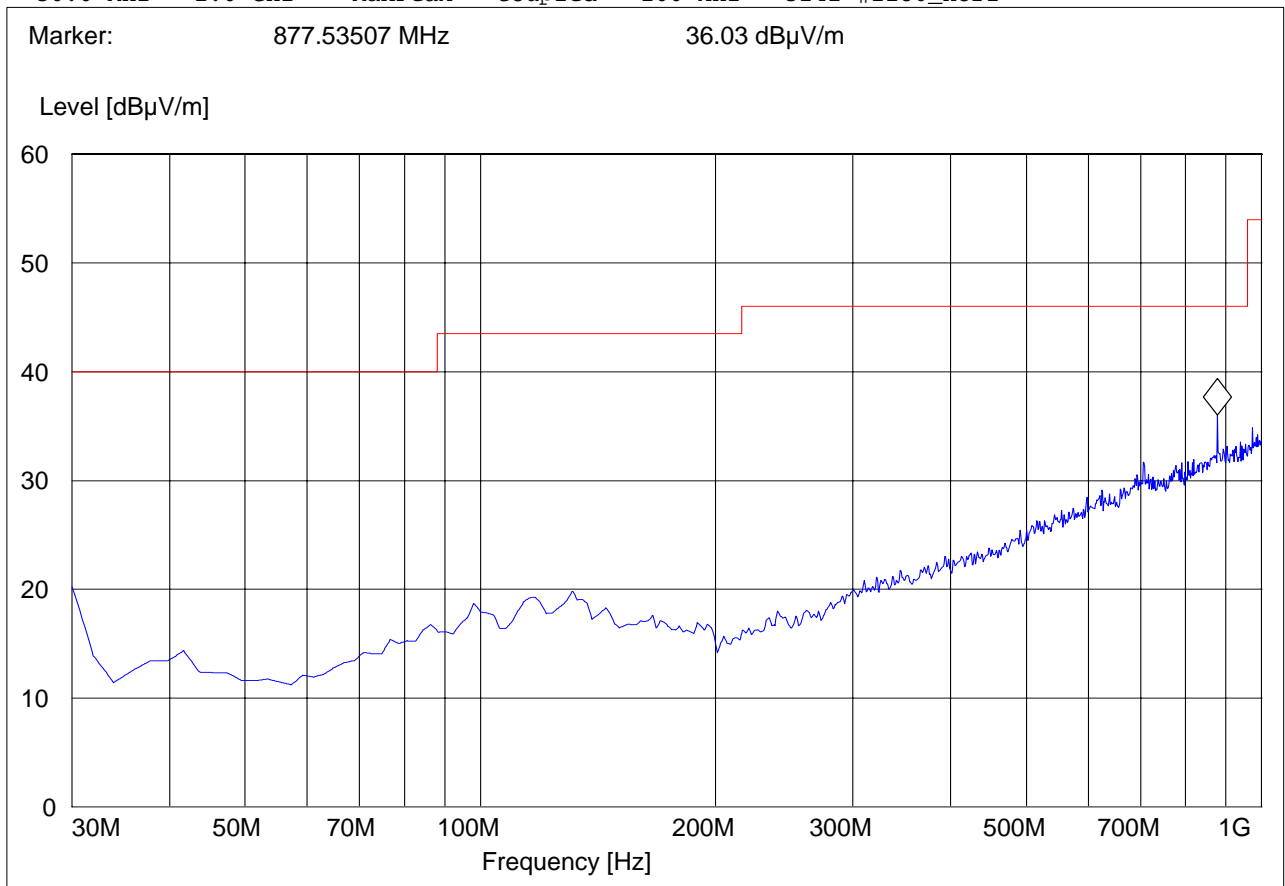




Receiver Spurious Emission GSM850 CHANNEL 128: 1-3GHz

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 850; CH128
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Satya
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "CANADA RE_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

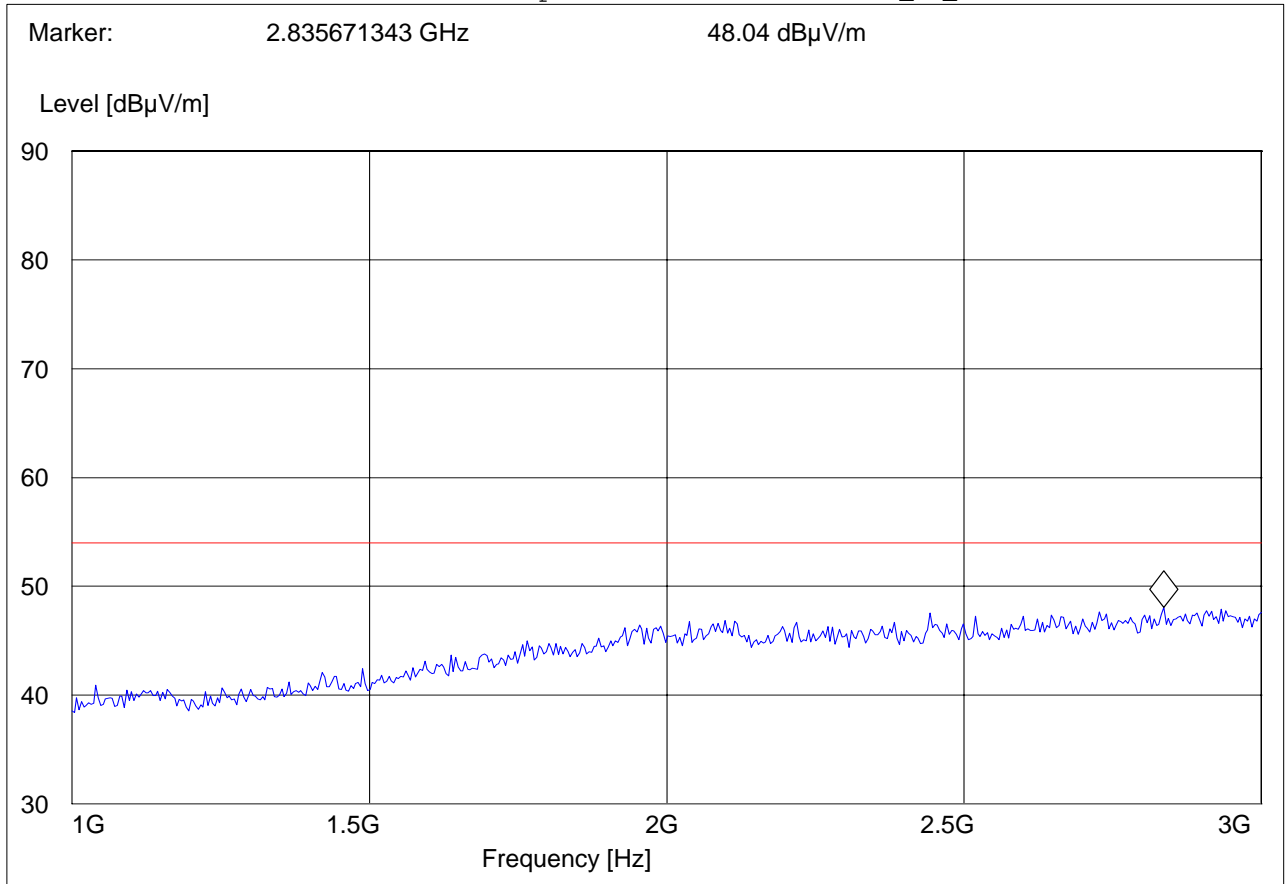




RECEIVER SPURIOUS EMISSION GSM850 CHANNEL190: 1-3GHz

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 850; CH190
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Satya
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "CANADA RE_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

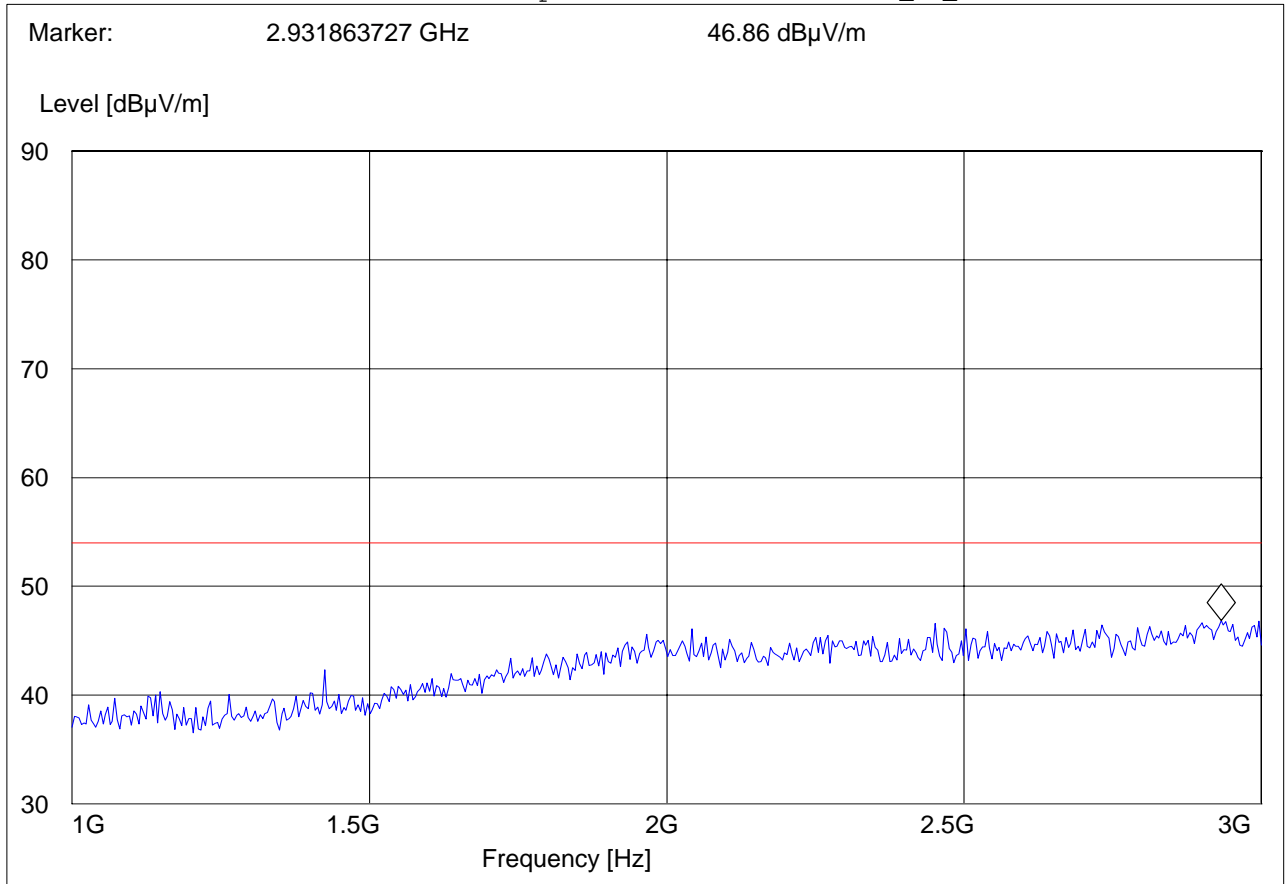




RECEIVER SPURIOUS EMISSION GSM850 CHANNEL 251: 1-3GHz

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 850; CH251
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Satya
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "CANADA RE_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

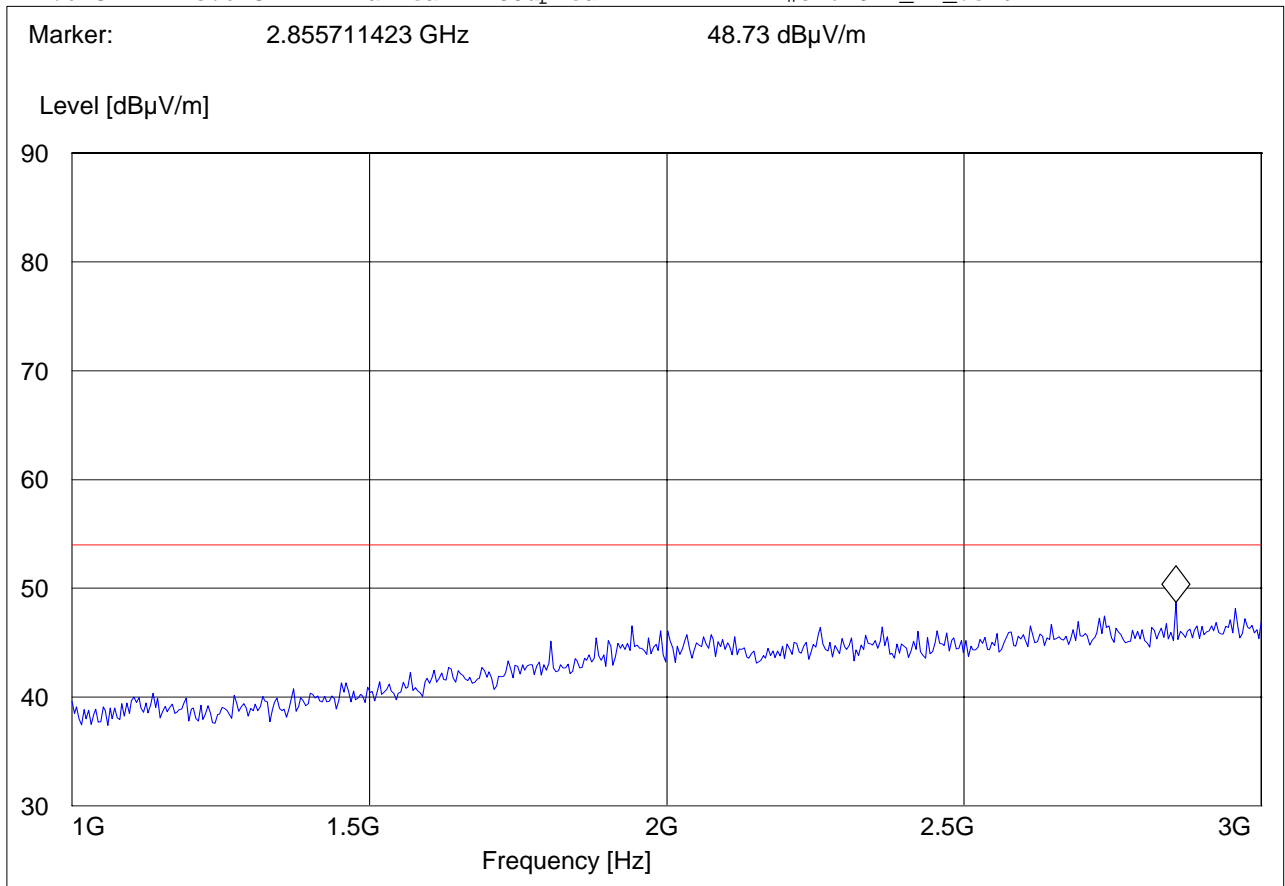




RECEIVER SPURIOUS EMISSION GSM850 CHANNEL 128: 3-9GHz

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 850; CH128
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Satya
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "CANADA RE_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

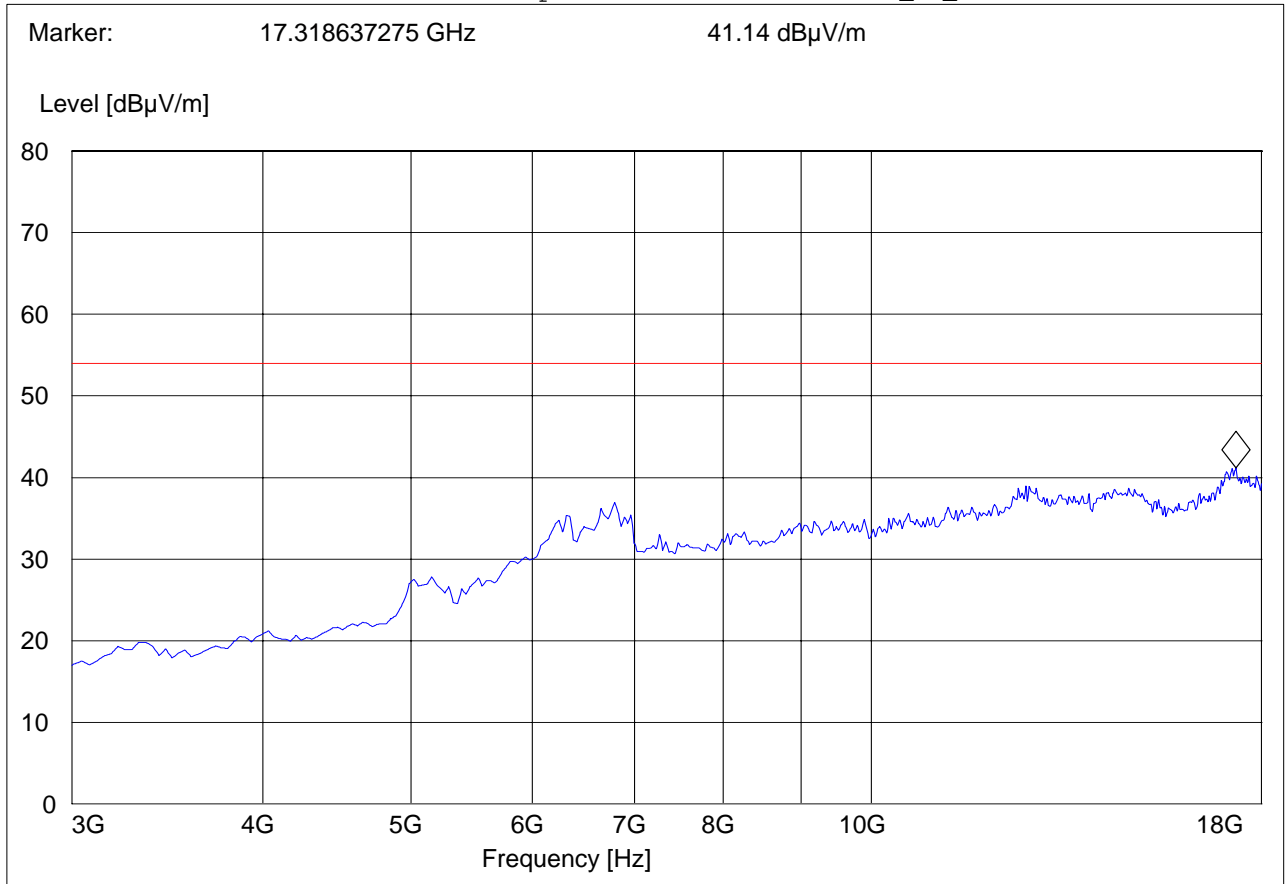




RECEIVER SPURIOUS EMISSION GSM850 CHANNEL 190: 3-9GHz

EUT: 7505
 Customer:: PSION
 Test Mode: GSM 850; CH190
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Satya
 Voltage: AC Adapter
 Comments:

SWEEP TABLE: "CANADA RE_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

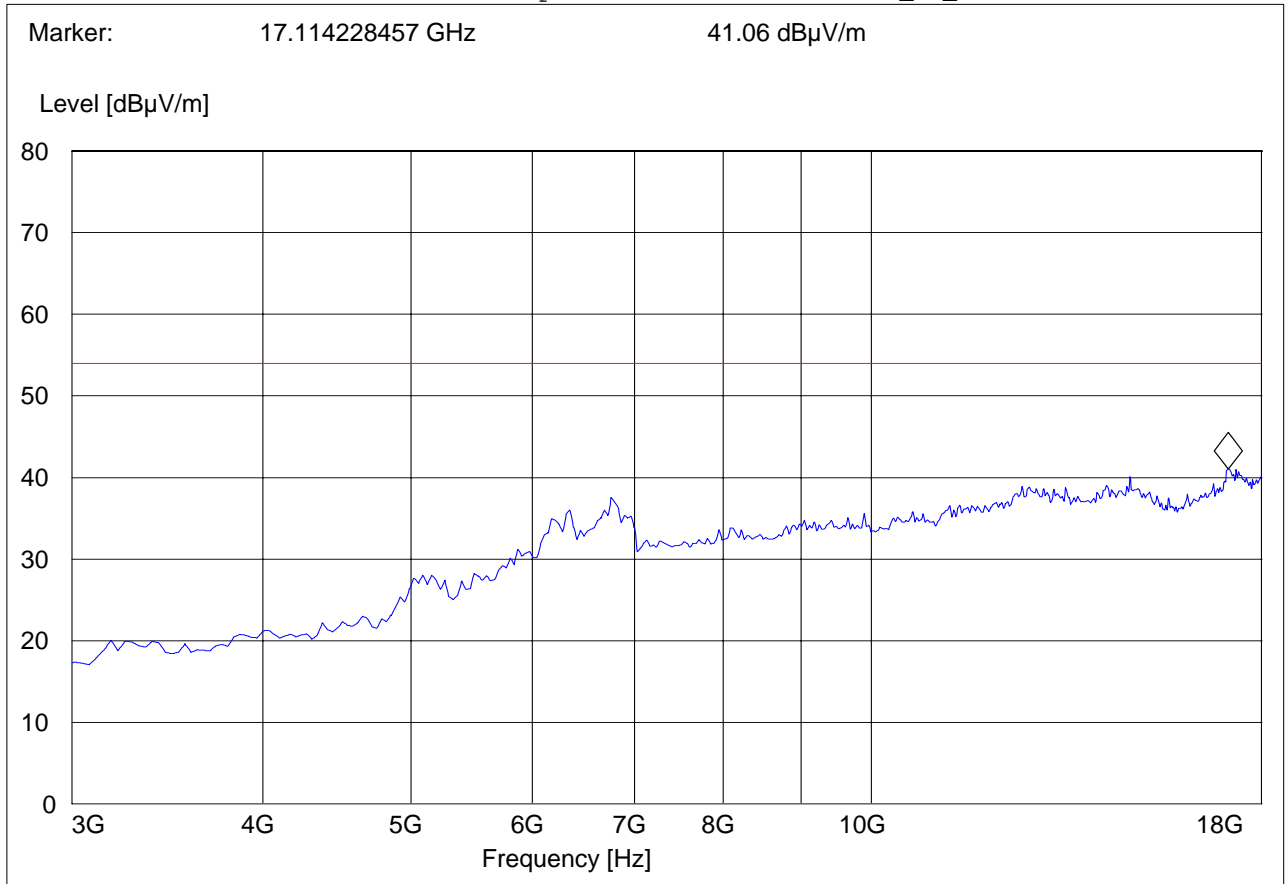




RECEIVER SPURIOUS EMISSION GSM850 CHANNEL 251: 3-9GHz

EUT: 7505
Customer:: PSION
Test Mode: GSM 850; CH251
ANT Orientation: H
EUT Orientation: H
Test Engineer: Satya
Voltage: AC Adapter
Comments:

SWEEP TABLE: "CANADA RE_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

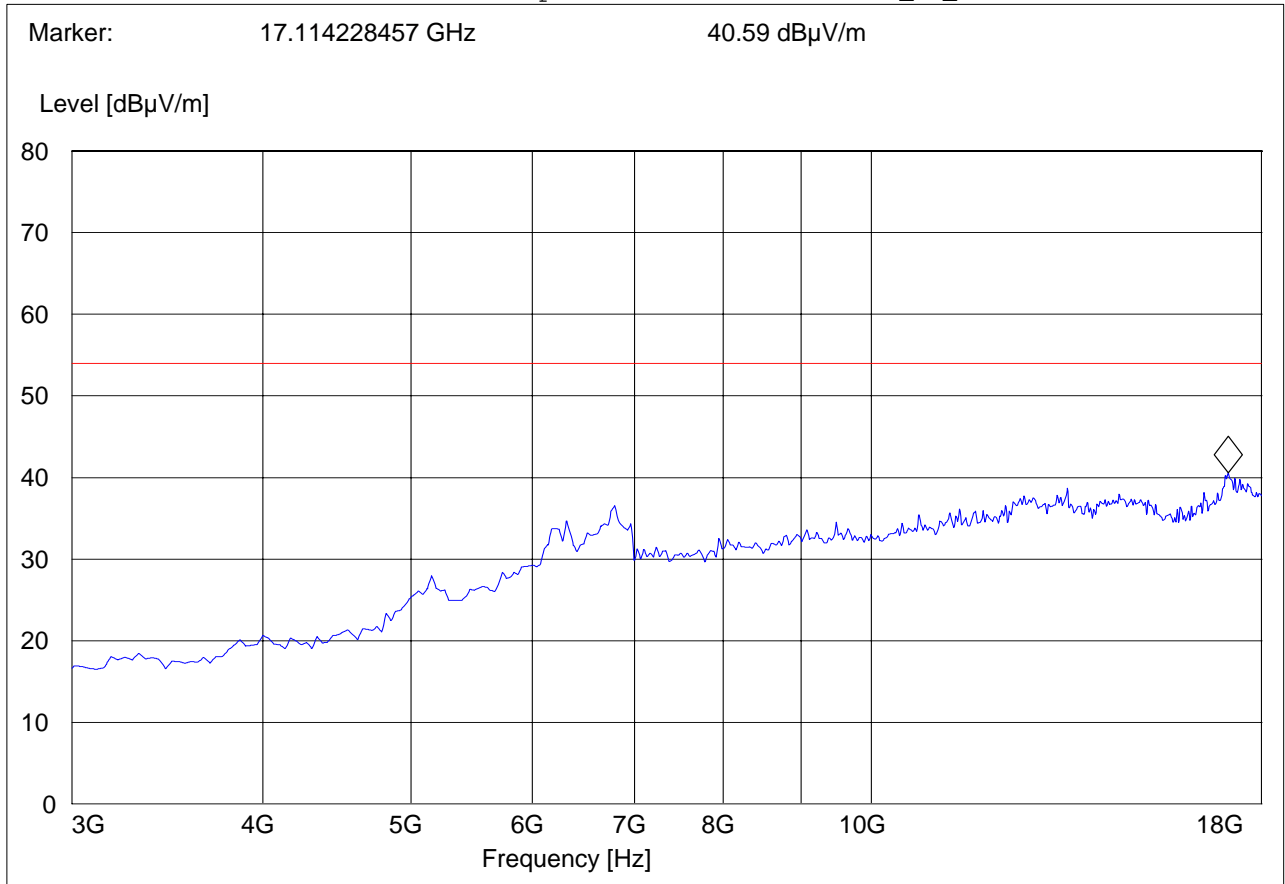



5.5.5.2 Test Results Receiver Spurious Emission UMTS FDD5


30M-1GHz, Antenna Vertical

This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505
 Customer: Psion
 Test Mode: WCDMA FDD V ch.4132
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: CHRIS
 Voltage: Battery
 Comments: Marker placed on downlink

SWEEP TABLE: "CANADA RE_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

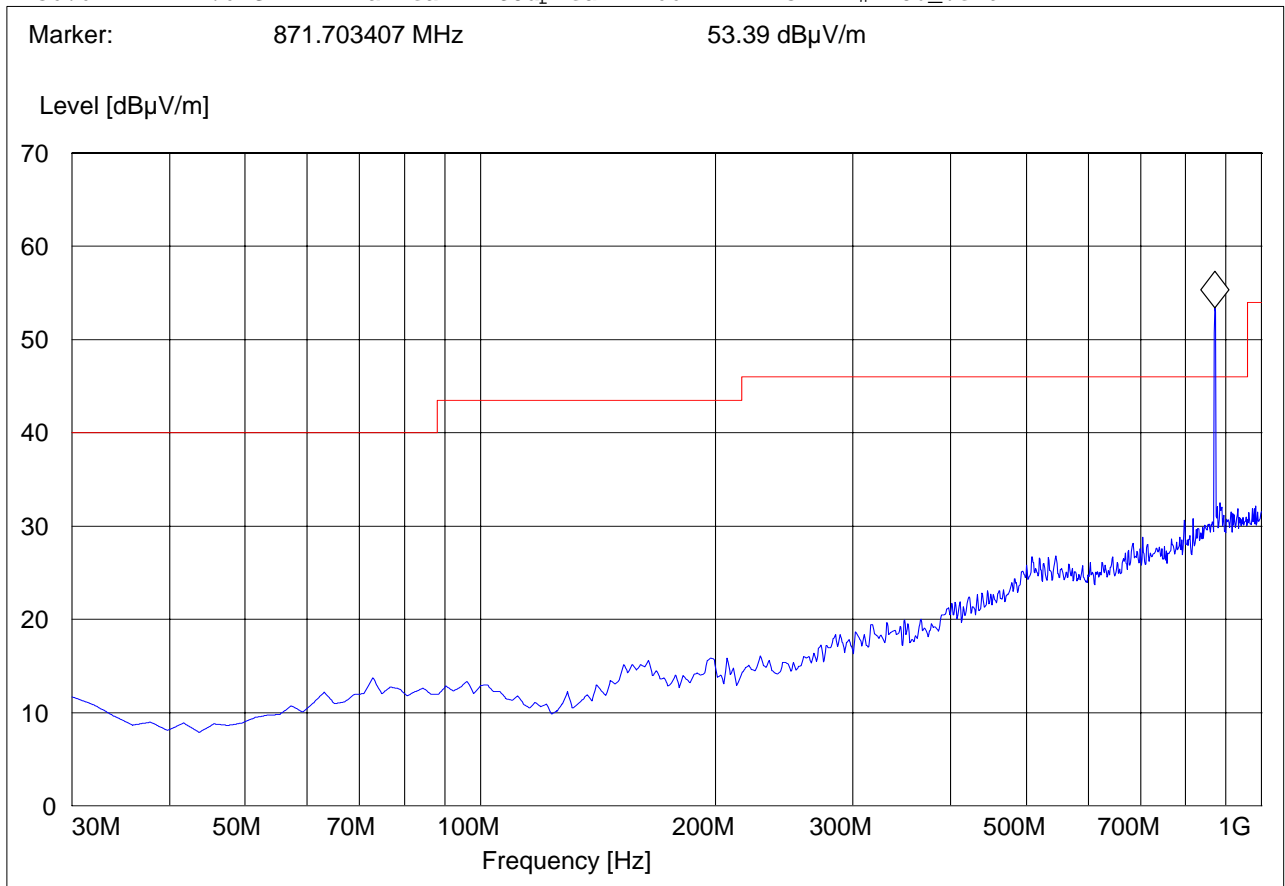




Receiver Spurious Emission UMTS FDD5 30M-1GHz, Antenna Horizontal
This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505
 Customer:: Psion
 Test Mode: WCDMA FDD V ch. 4233
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: CHRIS
 Voltage: Battery
 Comments:

SWEEP TABLE: "CANDA RE_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

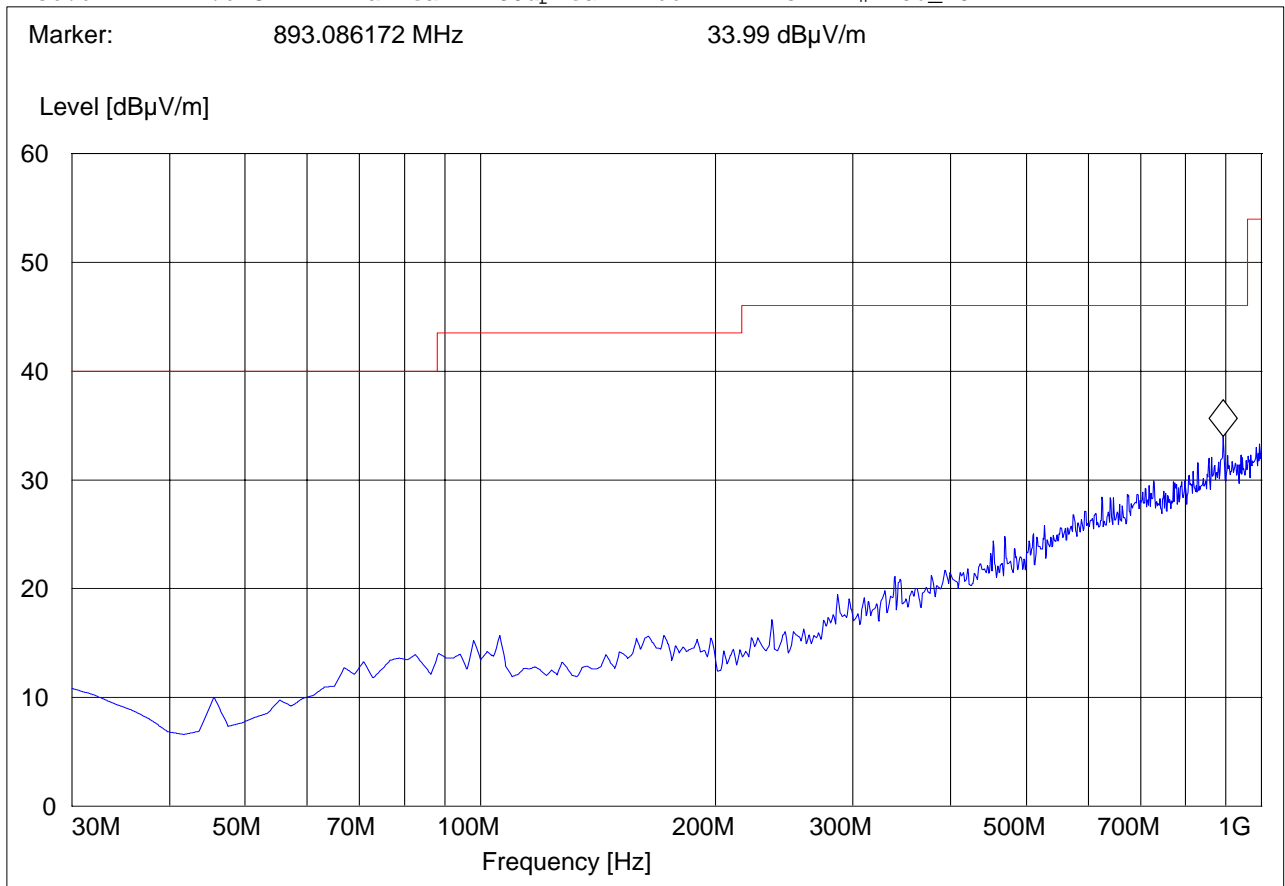




Receiver Spurious Emission UMTS FDD5 CHANNEL 4132: 1-3GHz

EUT: 7505
 Customer:: Psion
 Test Mode: WCDMA FDD V ch. 4132
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: CHRIS
 Voltage: Battery
 Comments:

SWEEP TABLE: "CANADA RE_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

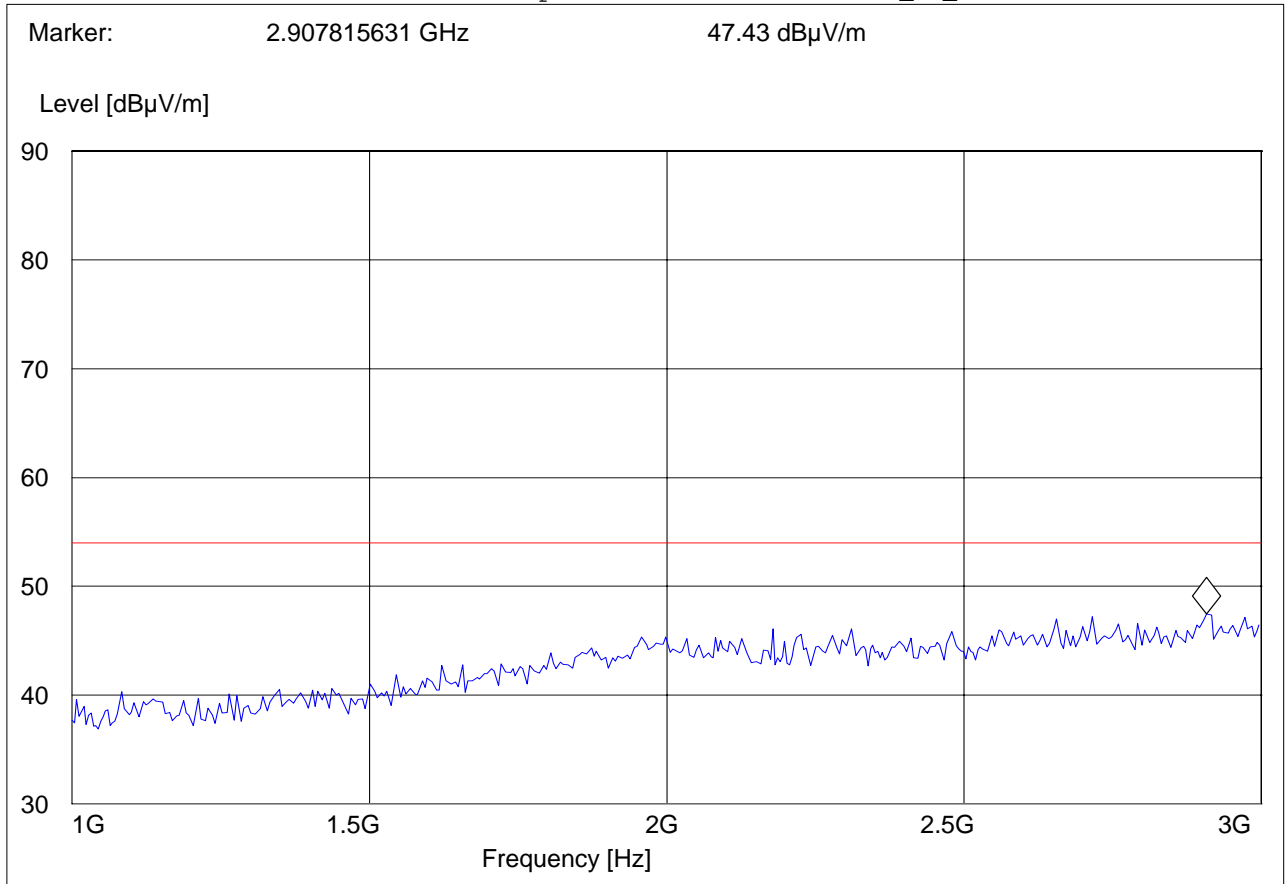




RECEIVER SPURIOUS EMISSION UMTS FDD5 CHANNEL4183: 1-3GHz

EUT: 7505
 Customer:: Psion
 Test Mode: WCDMA FDD V ch. 4183
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: CHRIS
 Voltage: Battery
 Comments:

SWEEP TABLE: "CANADA RE_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

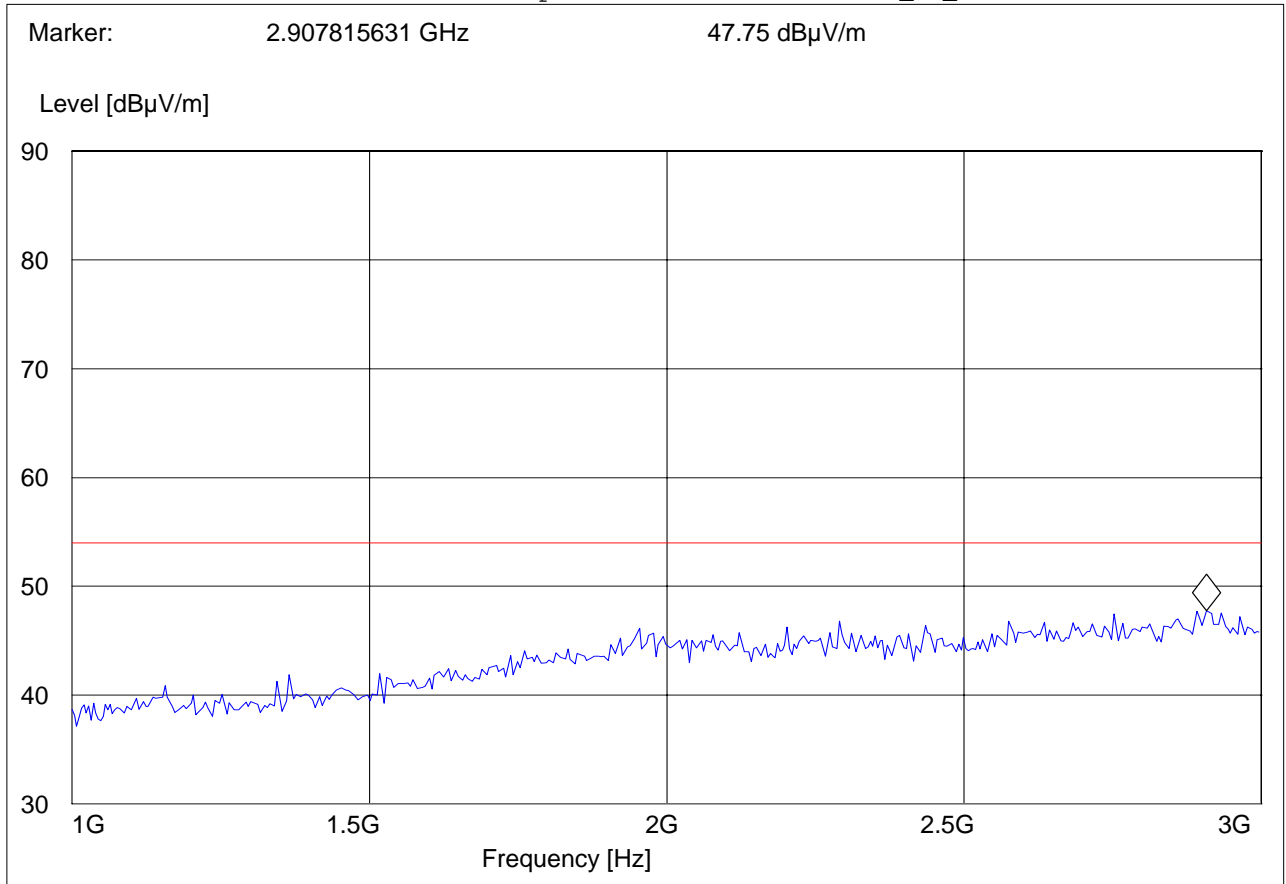




RECEIVER SPURIOUS EMISSION UMTS FDD5CHANNEL 4233: 1-3GHz

EUT: 7505
 Customer:: Psion
 Test Mode: WCDMA FDD V ch. 4233
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: CHRIS
 Voltage: Battery
 Comments:

SWEEP TABLE: "CANADA RE_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

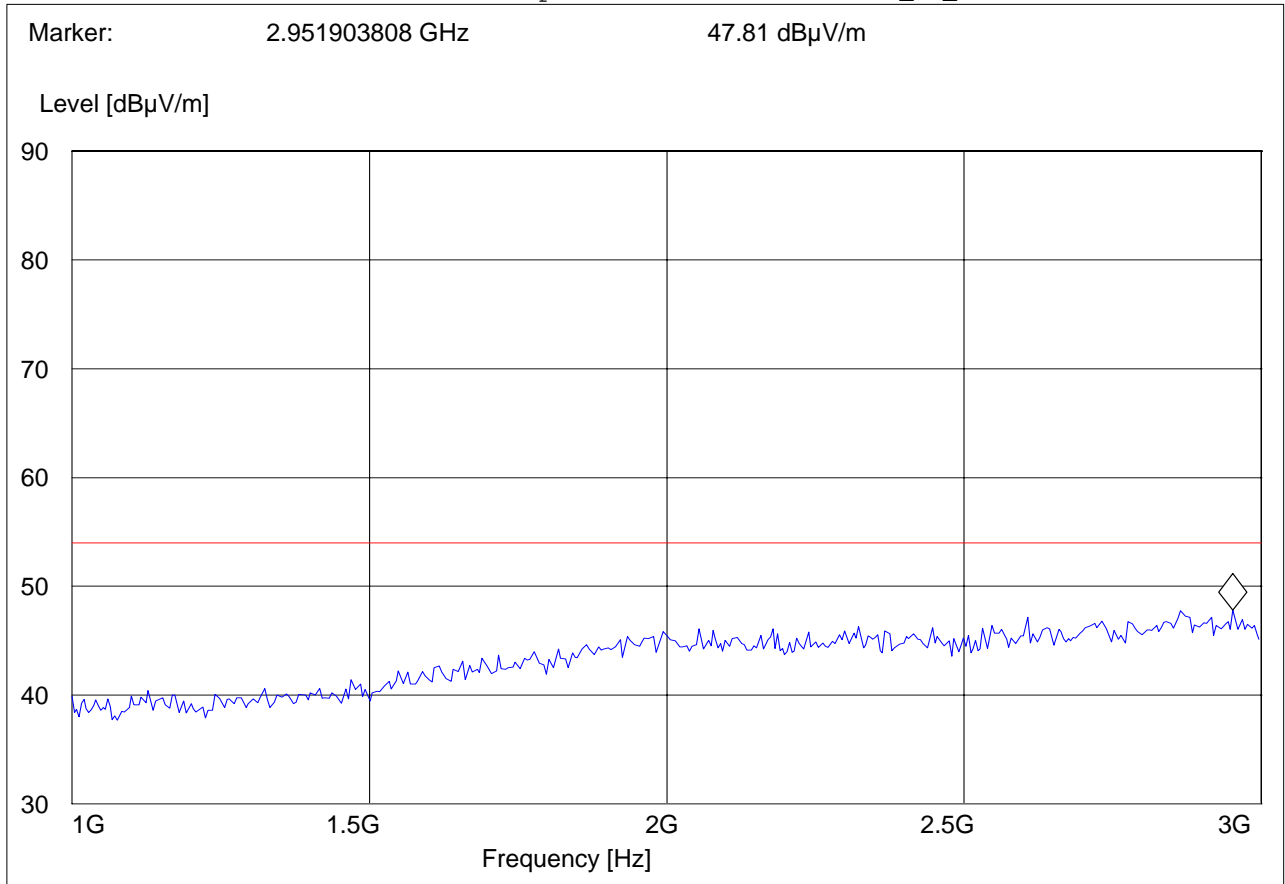




RECEIVER SPURIOUS EMISSION UMTS FDD5CHANNEL 4132: 3-18GHz

EUT: 7505
 Customer:: Psion
 Test Mode: WCDMA FDD V ch. 4132
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: CHRIS
 Voltage: Battery
 Comments:

SWEEP TABLE: "CANADA RE_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 17.352705411 GHz 41.52 dBµV/m

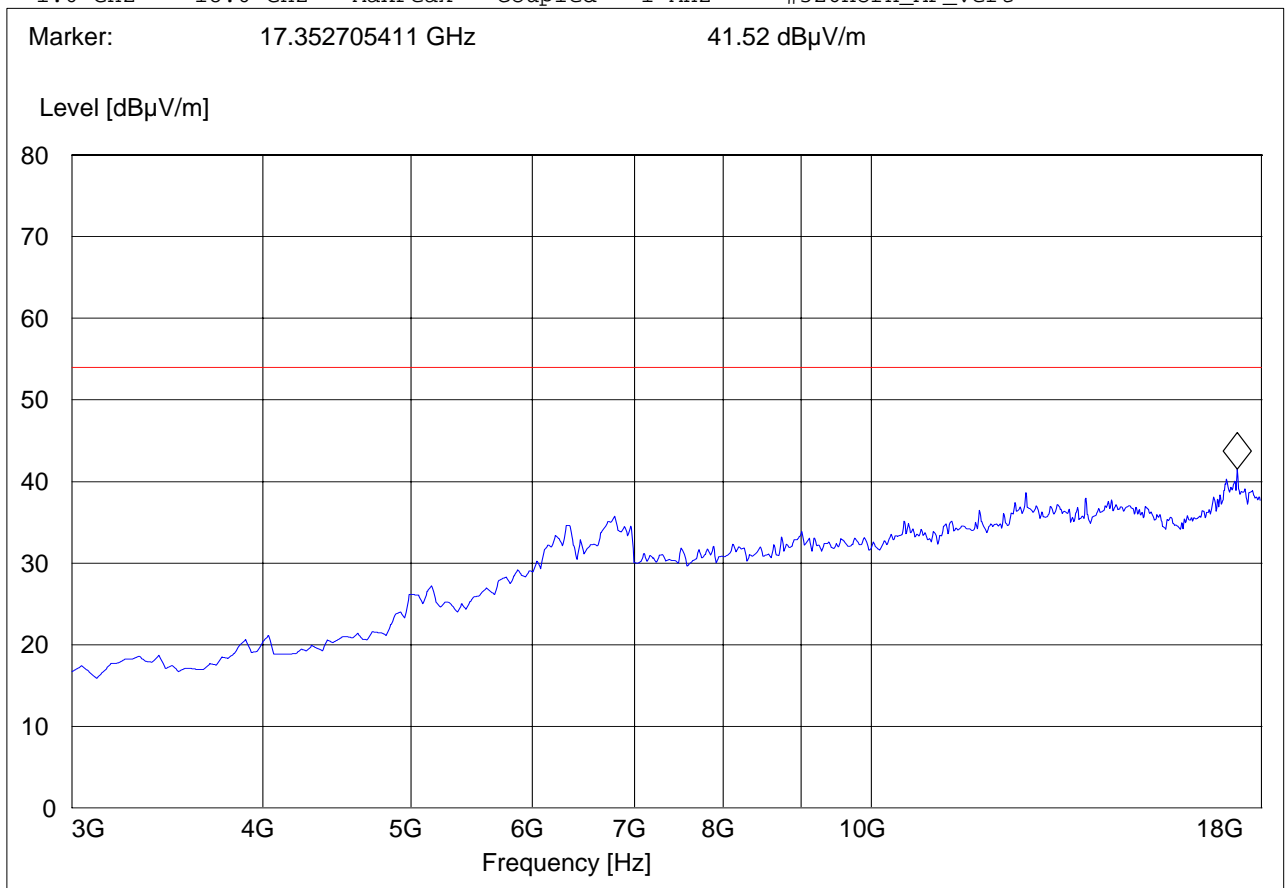




RECEIVER SPURIOUS EMISSION UMTS FDD5CHANNEL 4183: 3-18GHz

EUT: 7505
 Customer:: Psion
 Test Mode: WCDMA FDD V ch. 4183
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: CHRIS
 Voltage: Battery
 Comments:

SWEEP TABLE: "CANADA RE_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 17.352705411 GHz 39.89 dBµV/m

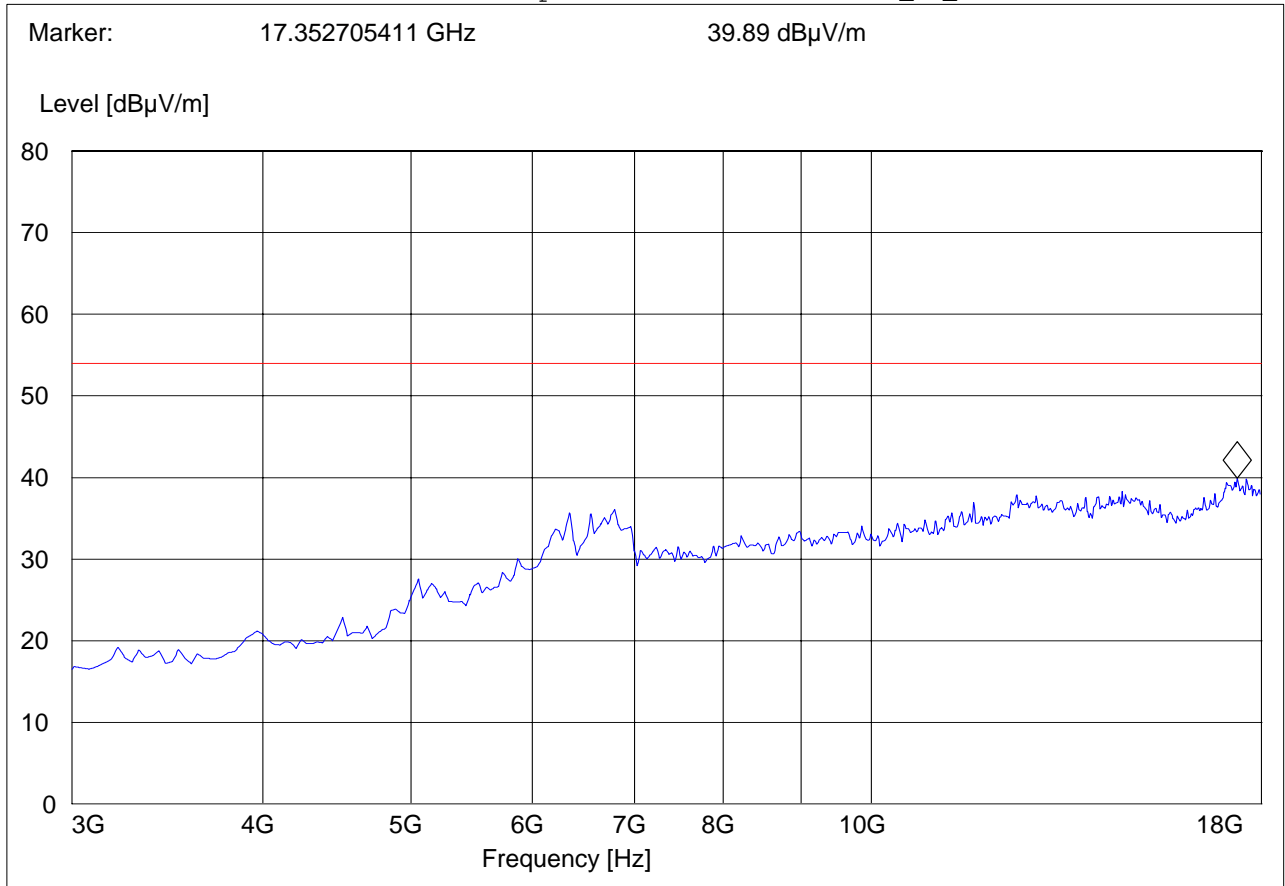




RECEIVER SPURIOUS EMISSION UMTS FDD5CHANNEL 4233: 3-18GHz

EUT: 7505
 Customer:: Psion
 Test Mode: WCDMA FDD V ch. 4233
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: CHRIS
 Voltage: Battery
 Comments:

SWEEP TABLE: "CANADA RE_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

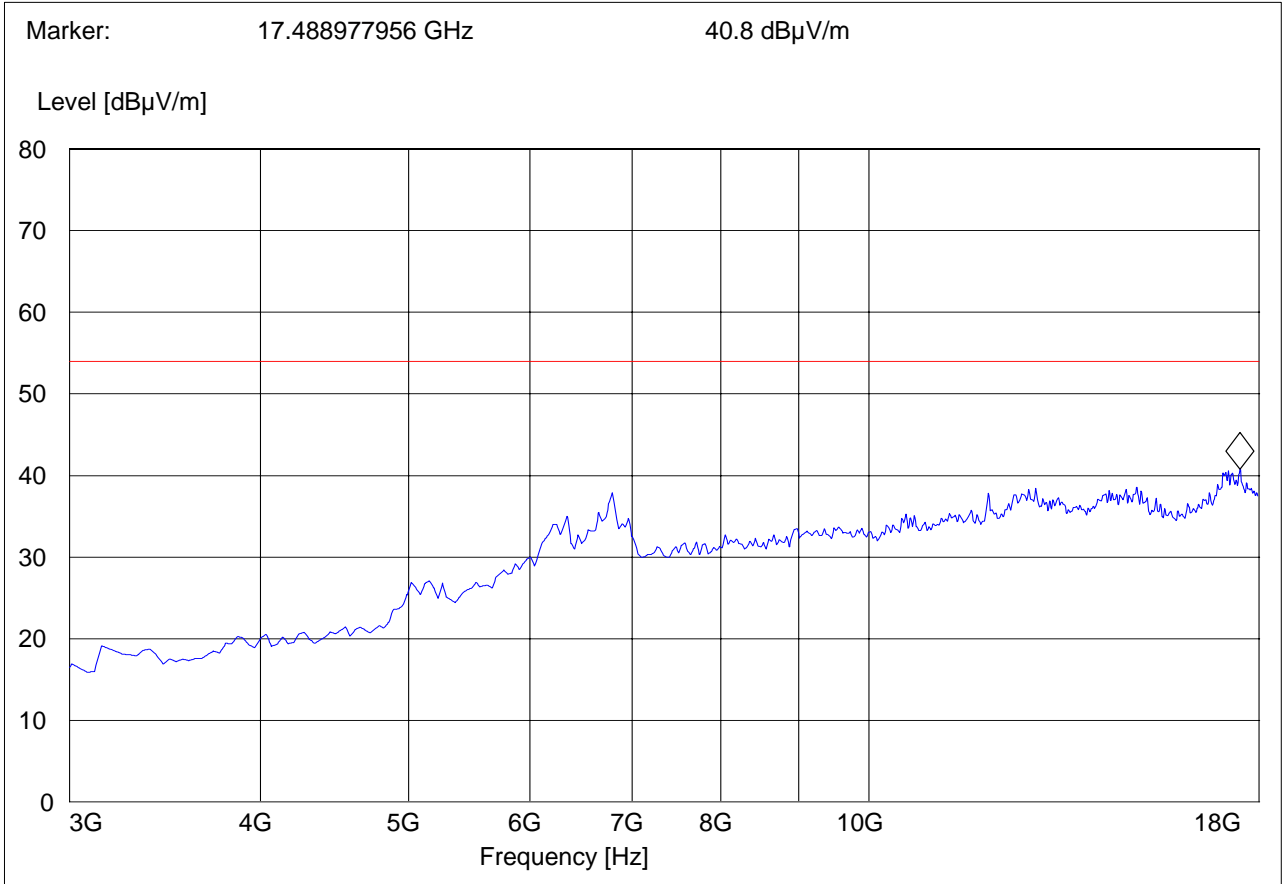




**5.5.5.3 Test Results Receiver Spurious Emission GSM1900
 30M-1GHz, Antenna Vertical**

This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505
 Customer: Psion
 Test Mode: GSM 1900
 ANT Orientation: V
 EUT Orientation: V
 Test Engineer: CHRIS
 Voltage: Battery
 Comments:

SWEEP TABLE: "CANADA RE_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

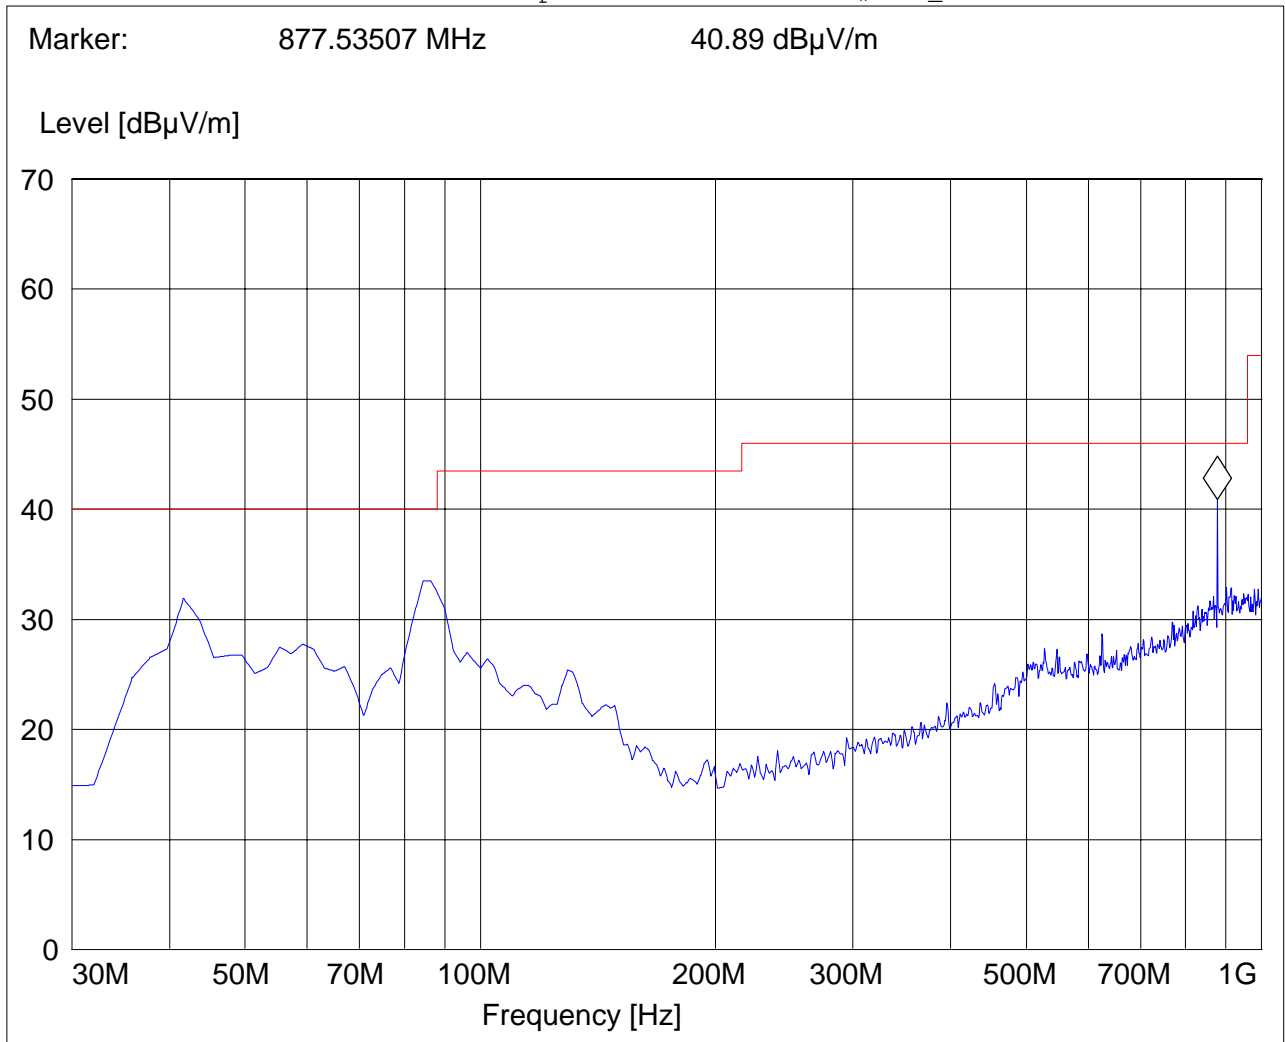




Receiver Spurious Emission GSM1900 30M-1GHz, Antenna Horizontal

This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505
 Customer:: Psion
 Test Mode: GSM 1900
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: CHRIS
 Voltage: Battery
 Comments:

SWEEP TABLE: "CANDA RE_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

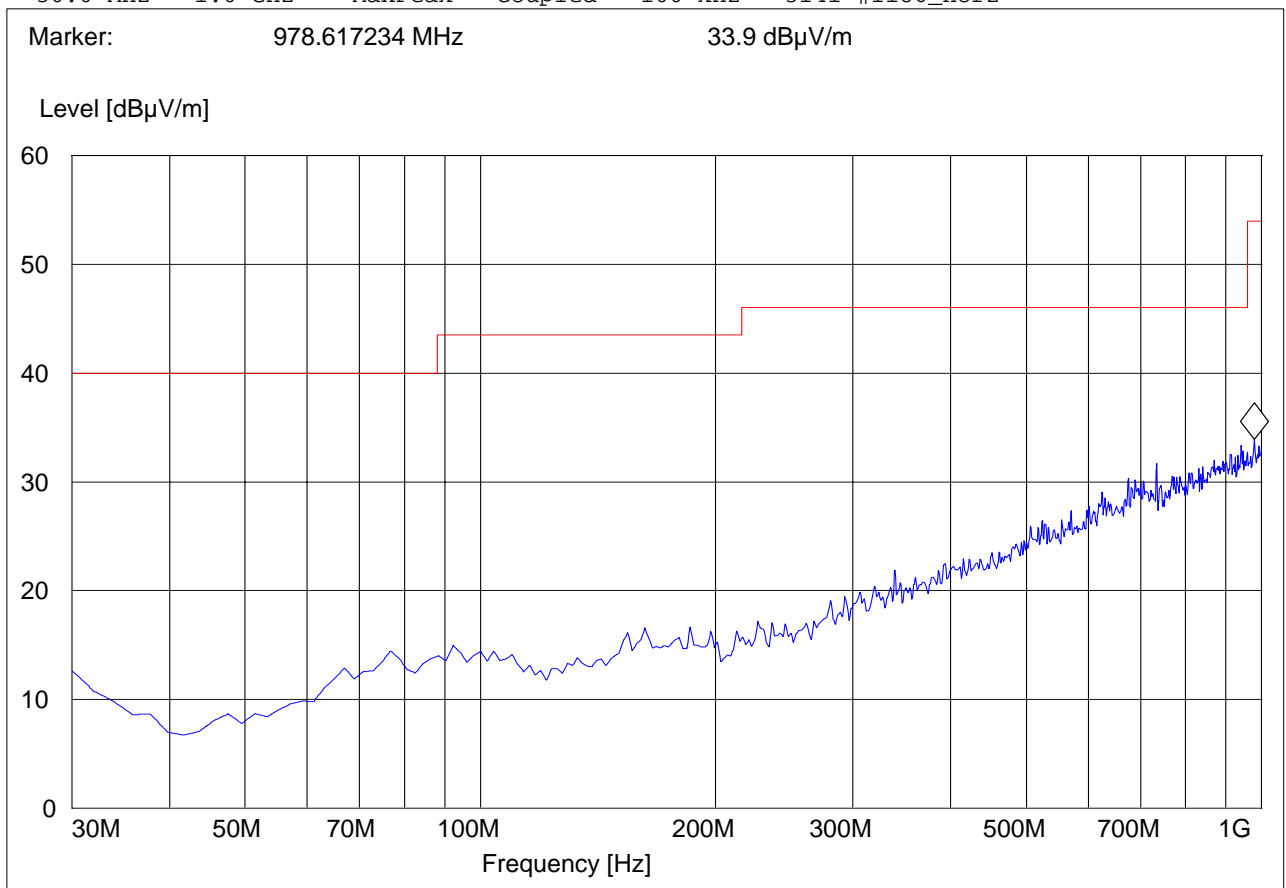




Receiver Spurious Emission GSM1900: 1-3GHz

EUT: 7505
 Customer:: Psion
 Test Mode: GSM 1900
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: CHRIS
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "CANADA RE_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

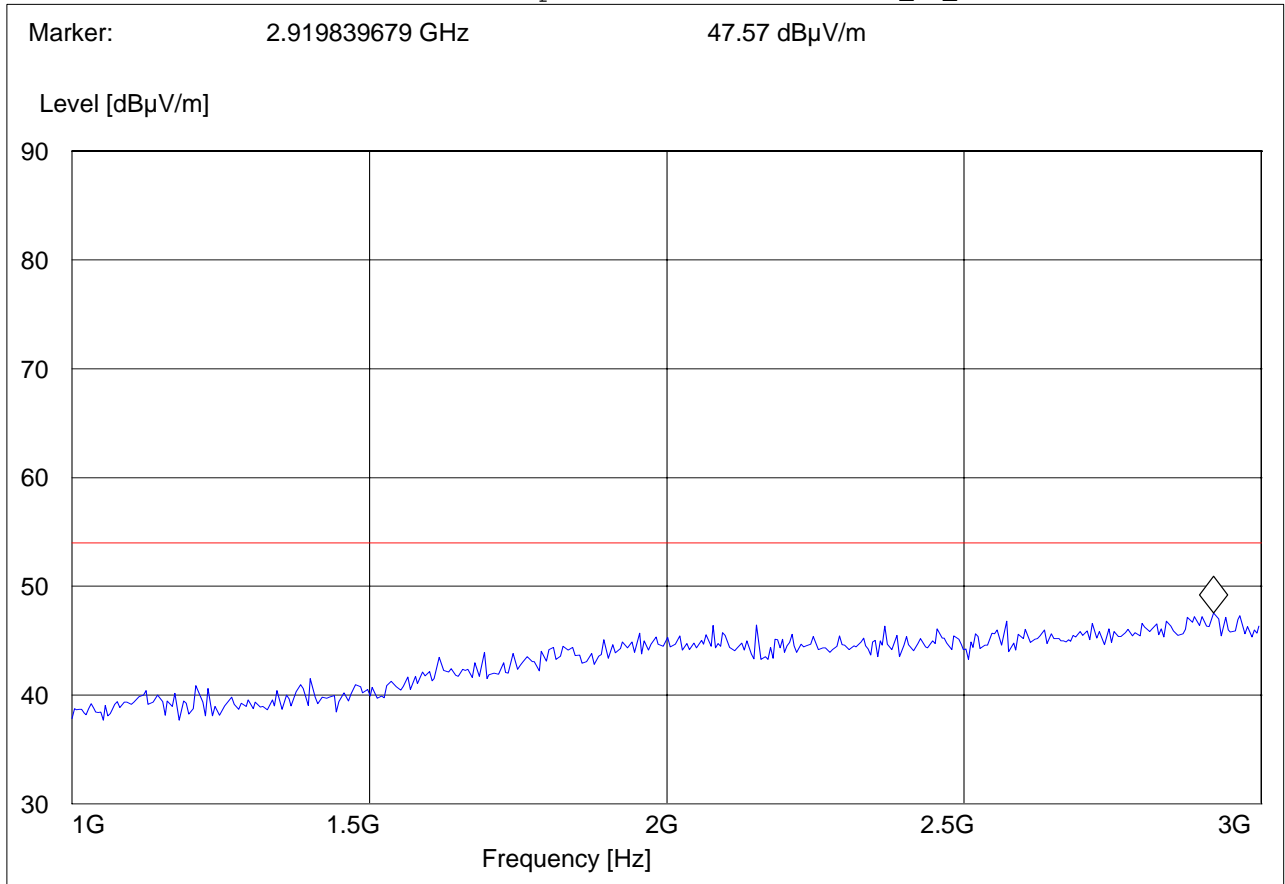




RECEIVER SPURIOUS EMISSION GSM1900: 3-18GHz

EUT: 7505
 Customer:: Psion
 Test Mode: GSM 1900
 ANT Orientation: H
 EUT Orientation: V
 Test Engineer: CHRIS
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "CANADA RE_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

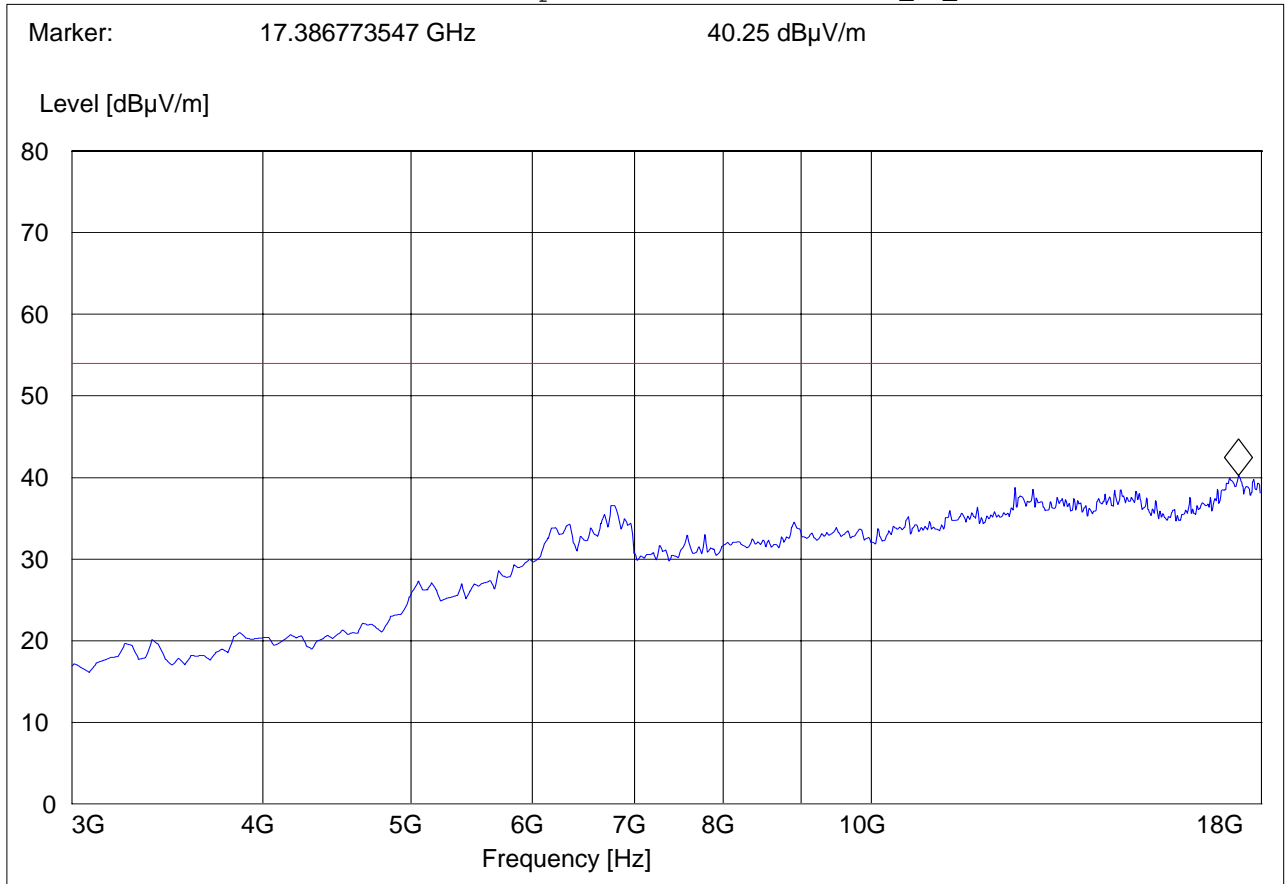



5.5.5.4 Test Results Receiver Spurious Emission UMTS FDD2


30M-1GHz, Antenna Vertical

This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD II
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "CANADA RE_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

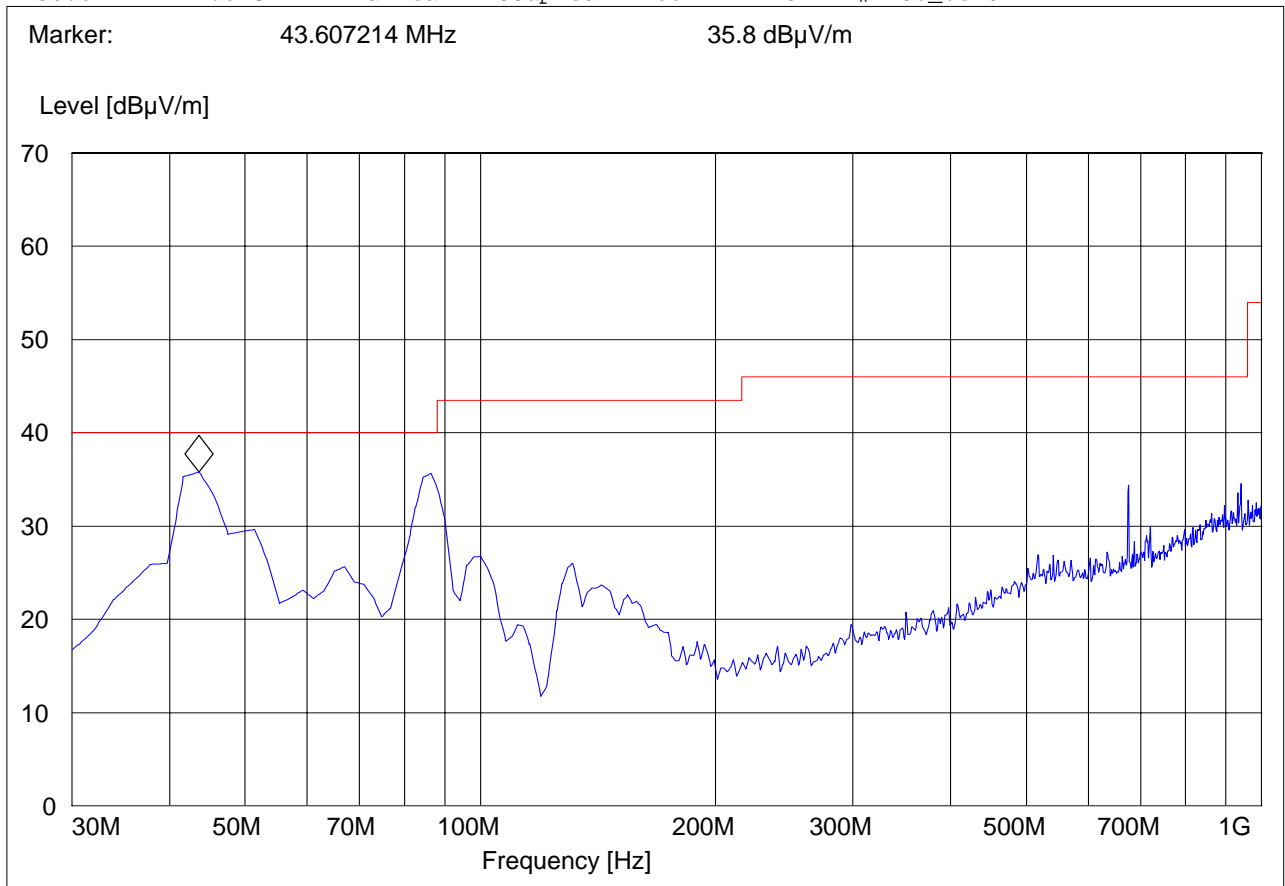




Receiver Spurious Emission UMTS FDD2 30M-1GHz, Antenna Horizontal
This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD II
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "CANDA RE_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

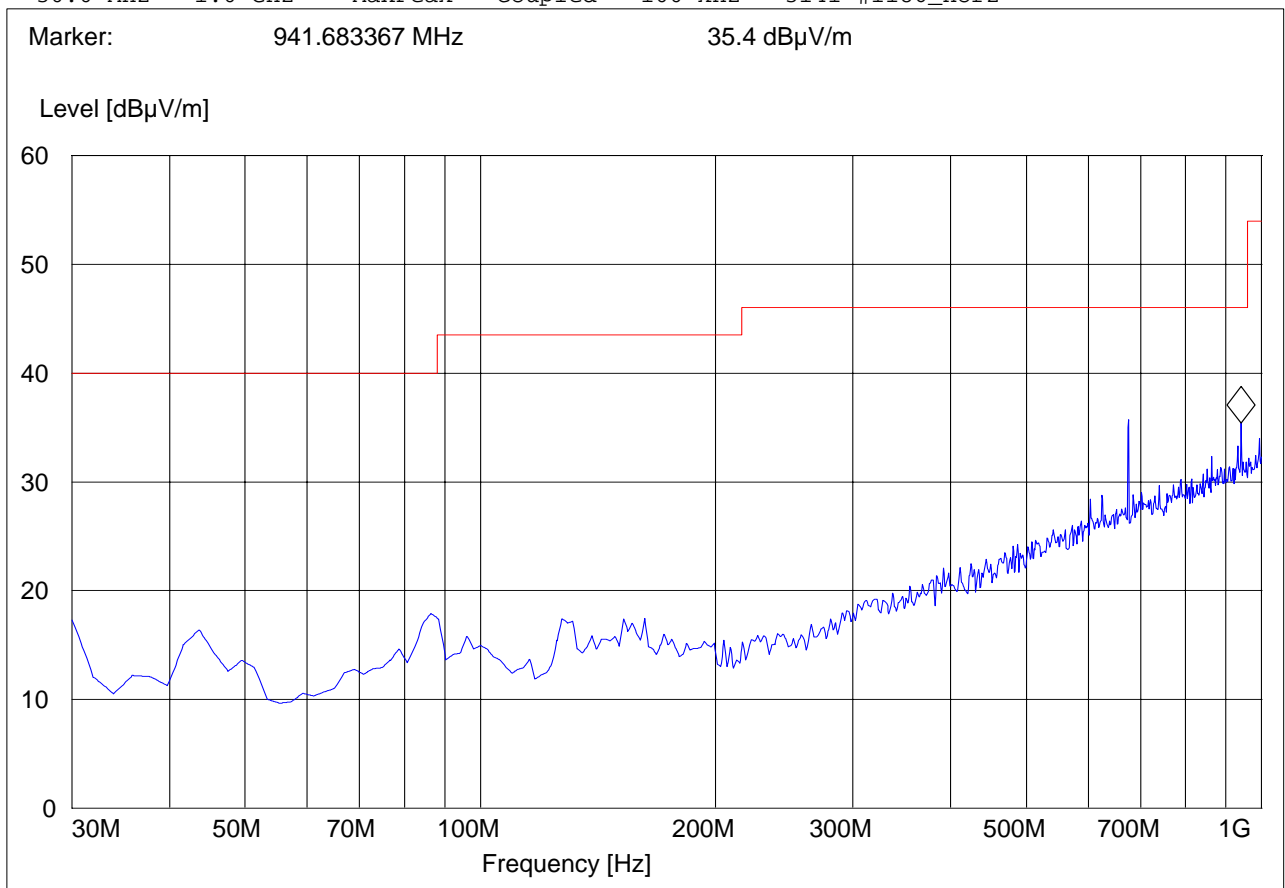




Receiver Spurious Emission UMTS FDD2: 1-3GHz

Marker is base station downlink

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD II
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC ADAPTER
 Comments: Marker placed on downlink

SWEEP TABLE: "CANADA RE_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

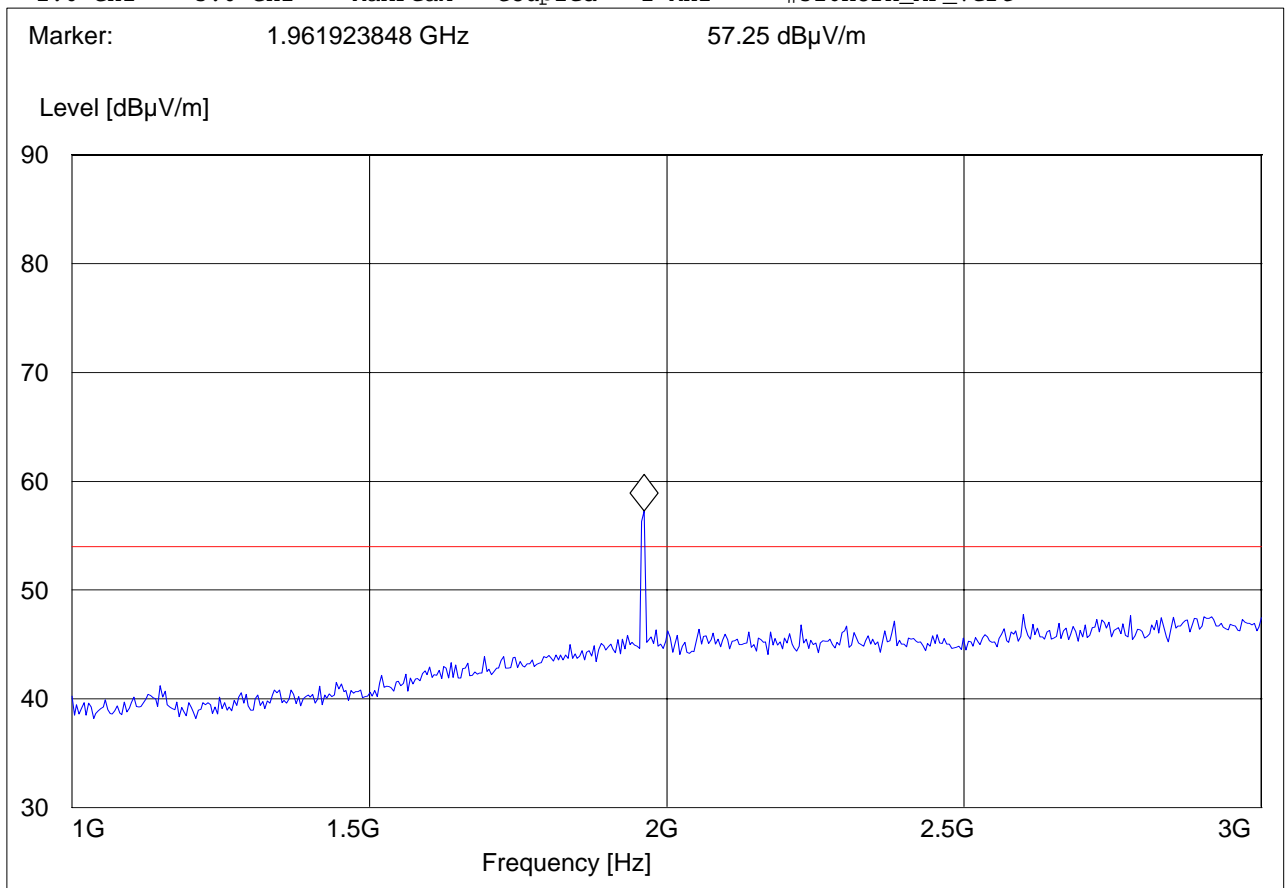




RECEIVER SPURIOUS EMISSION UMTS FDD2: 3-18GHz

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD II
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "CANADA RE_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

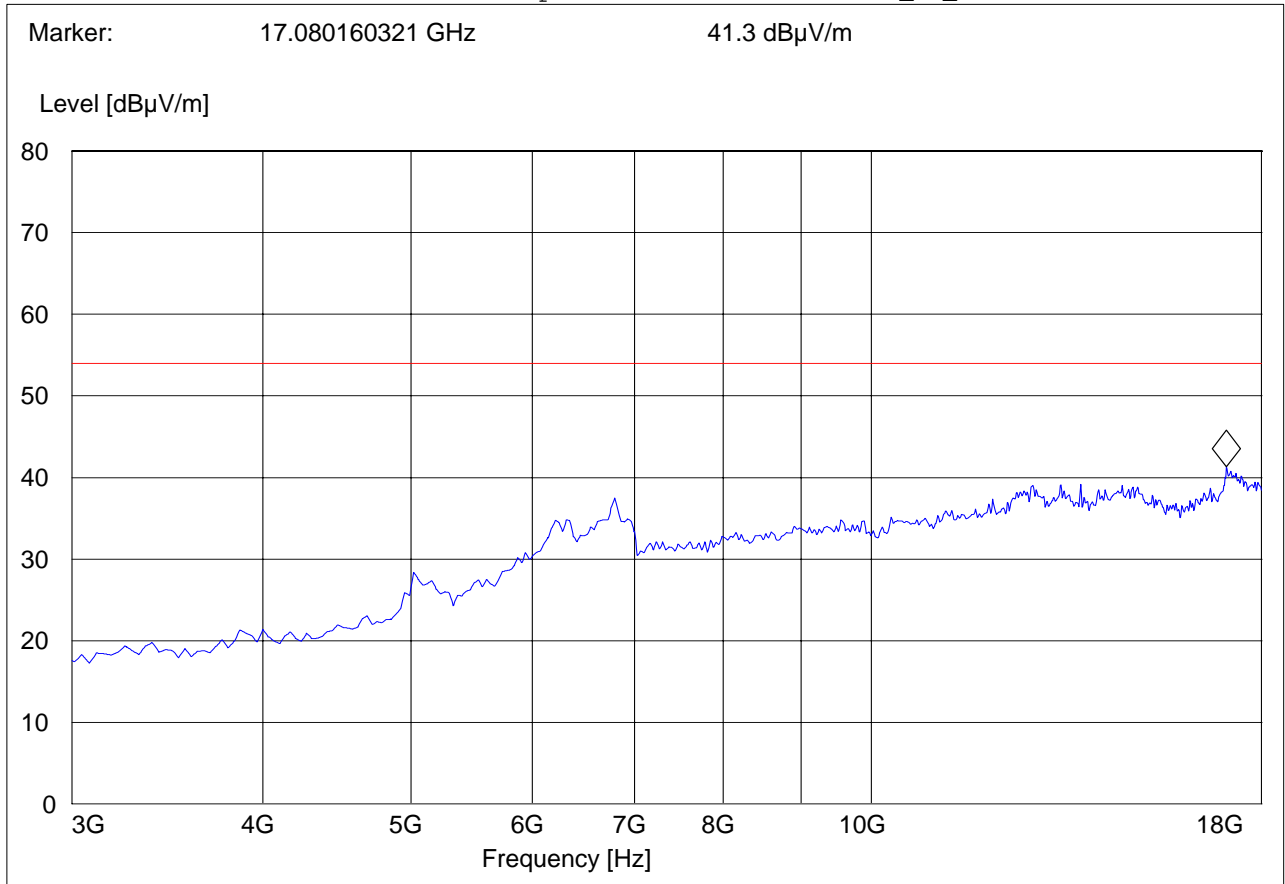




RECEIVER SPURIOUS EMISSION UMTS FDD2: 18.25GHz

EUT: 7505
 Customer:: PSION
 Test Mode: WCDMA FDD II
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC ADAPTER
 Comments:

SWEEP TABLE: "CANADA RE_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.0 GHz	MaxPeak	Coupled	1 MHz	#572 horn AF

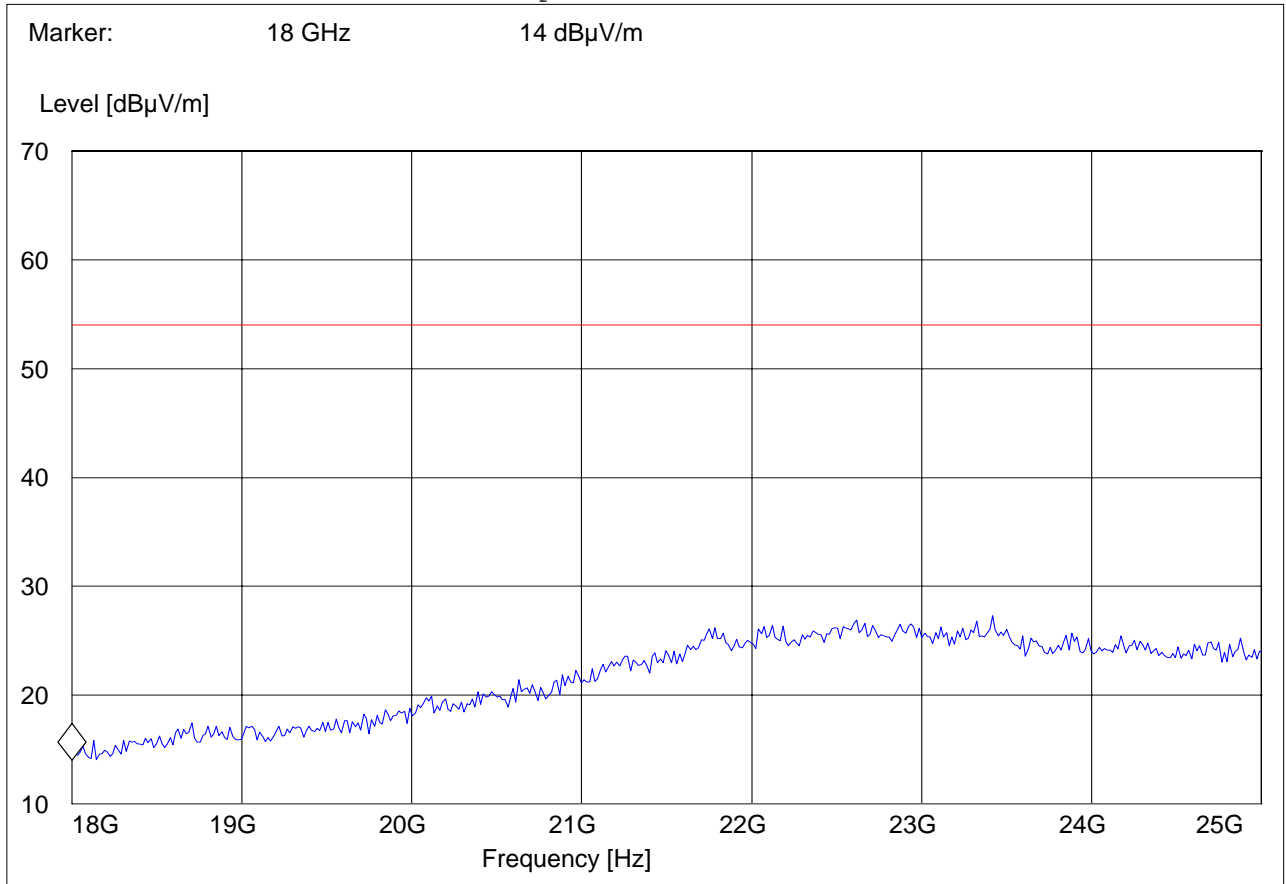



5.6 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207

5.6.1 Limits

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

§15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency


ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz



5.6.2 Results, TX Transmit Line:

EUT: 7505
 Manufacturer: PSION
 Operating Condition: GSM 850 Ch 190; WLAN CH 11; BT 2480MHz
 ANT Orientation:: Conducted
 EUT Orientation:: H
 Test Engineer:: Marc
 Power Supply: : AC Adapter
 Comments: : Line

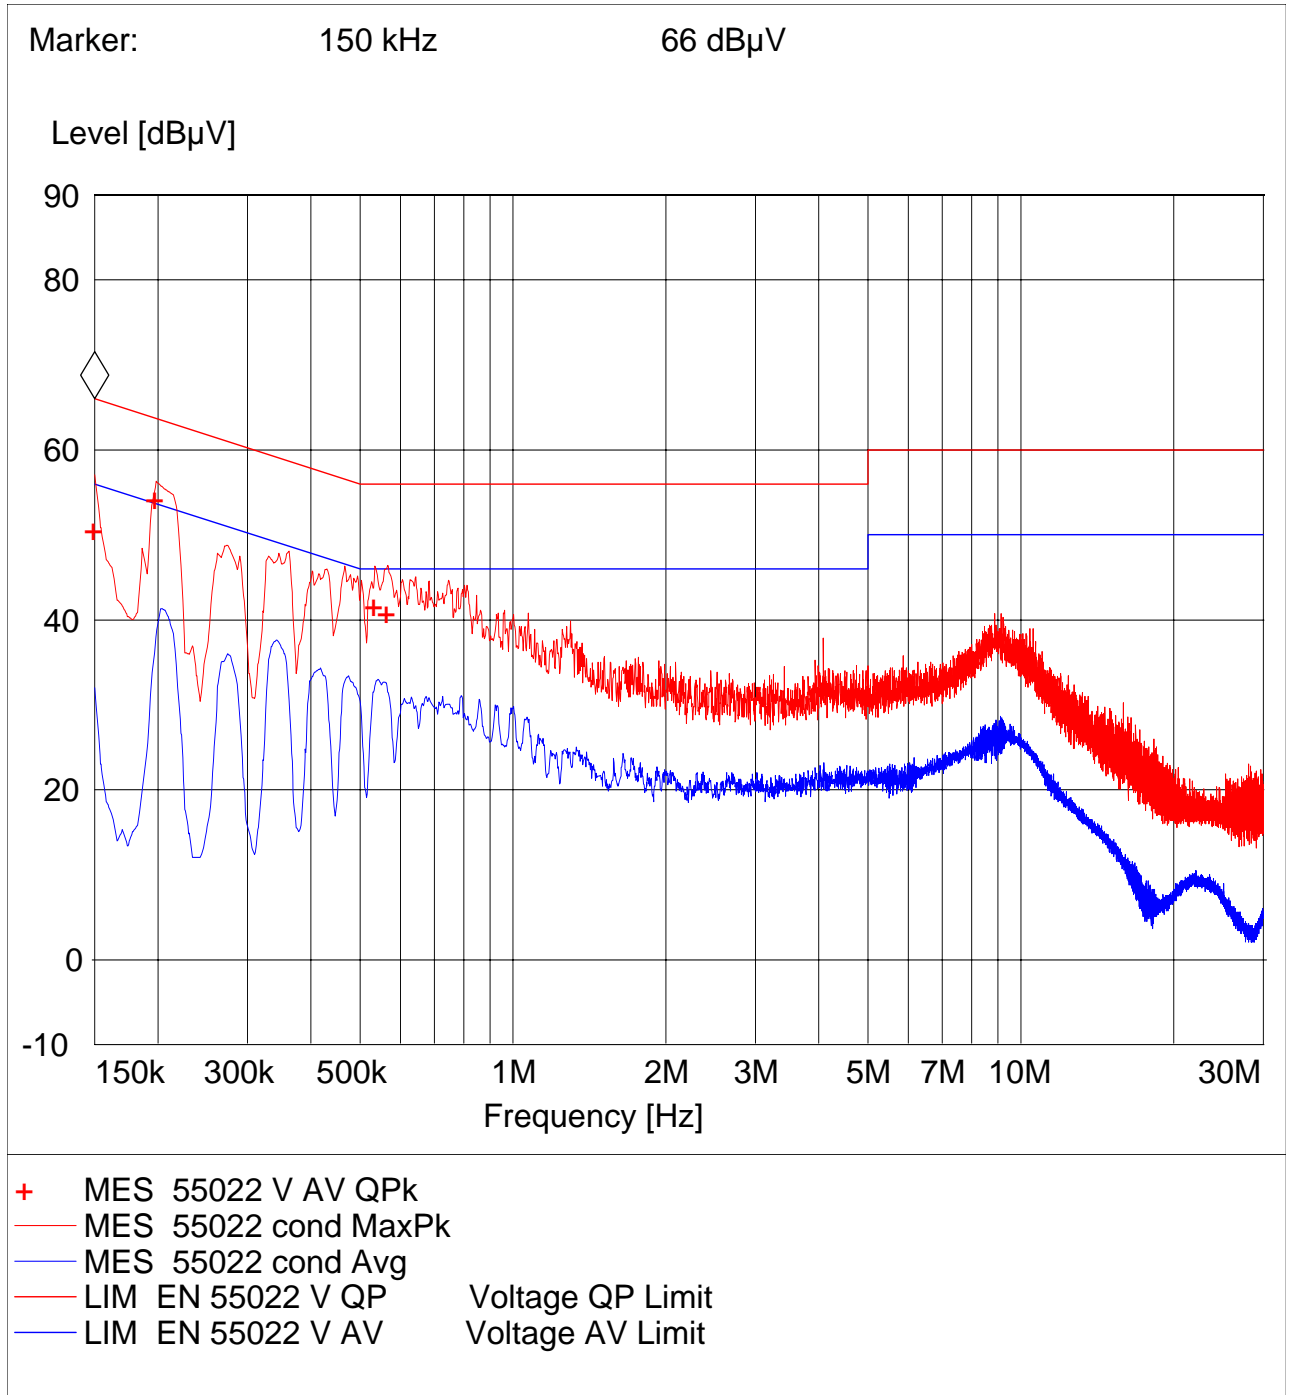



MEASUREMENT RESULT: "55022 V AV QPk"

11/26/2007 10:57AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.150000	50.60	0.0	66	15.4	---	---
0.198000	54.30	0.0	64	9.4	---	---
0.534000	41.70	0.0	56	14.3	---	---
0.566000	40.90	0.0	56	15.1	---	---

LIMIT LINE: "EN 55022 V AV"

Short Description: Voltage AV Limit
4/27/1998 2:24PM

Frequency MHz	Level dBµV
0.150000	56.00
0.500000	46.00
5.000000	46.00
5.000000	50.00
30.000000	50.00

LIMIT LINE: "EN 55022 V QP"


Short Description: Voltage QP Limit
4/27/1998 2:24PM

Frequency MHz	Level dBµV
0.150000	66.00
0.500000	56.00
5.000000	56.00
5.000000	60.00
30.000000	60.00



5.6.3 TX Transmit Neutral:

EUT: 7505
 Manufacturer: PSION
 Operating Condition: GSM 850 Ch 190; WLAN CH 11; BT 2480MHz
 ANT Orientation:: Conducted
 EUT Orientation:: H
 Test Engineer:: Marc
 Power Supply: : AC Adapter
 Comments: : N

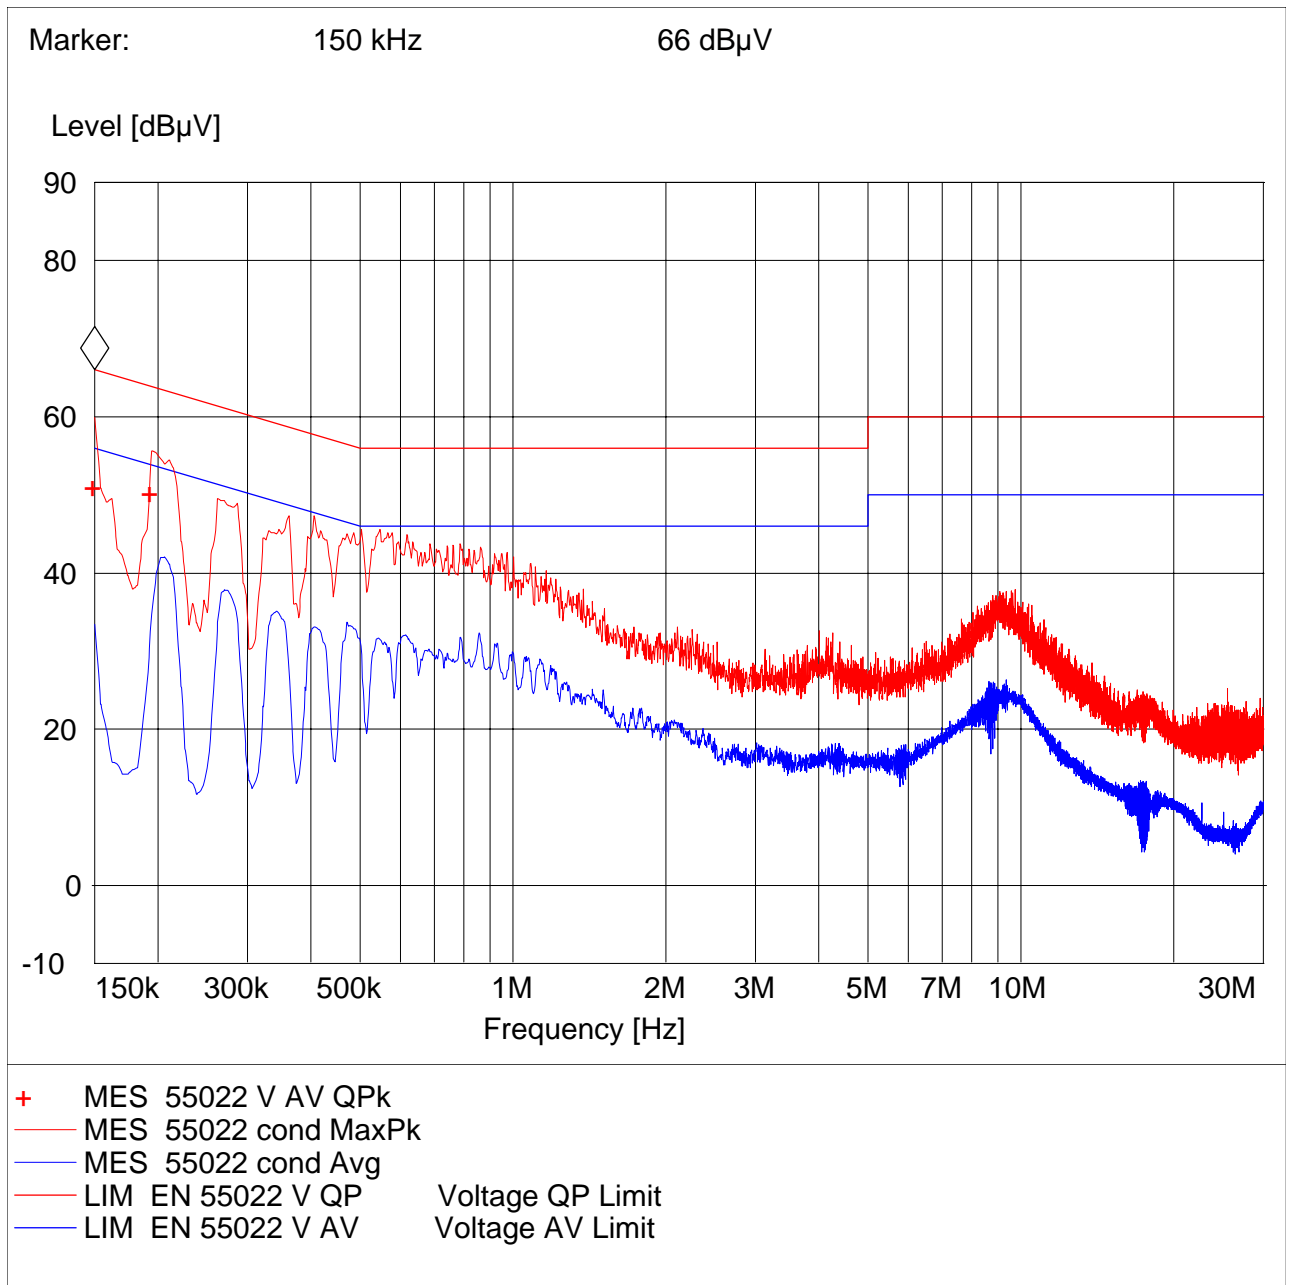



MEASUREMENT RESULT: "55022 V AV QPk"

11/26/2007 10:50AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.150000	51.10	0.0	66	14.9	---	---
0.194000	50.30	0.0	64	13.5	---	---

LIMIT LINE: "EN 55022 V AV"

Short Description: Voltage AV Limit
4/27/1998 2:24PM

Frequency MHz	Level dBµV
0.150000	56.00
0.500000	46.00
5.000000	46.00
5.000000	50.00
30.000000	50.00

LIMIT LINE: "EN 55022 V QP"


Short Description: Voltage QP Limit
4/27/1998 2:24PM

Frequency MHz	Level dBµV
0.150000	66.00
0.500000	56.00
5.000000	56.00
5.000000	60.00
30.000000	60.00



5.6.4 Results, Idle Line:

EUT: 7505
 Manufacturer: PSION
 Operating Condition: IDLE
 ANT Orientation:: Conducted
 EUT Orientation:: H
 Test Engineer:: Marc
 Power Supply: : AC Adapter
 Comments: : line; idle

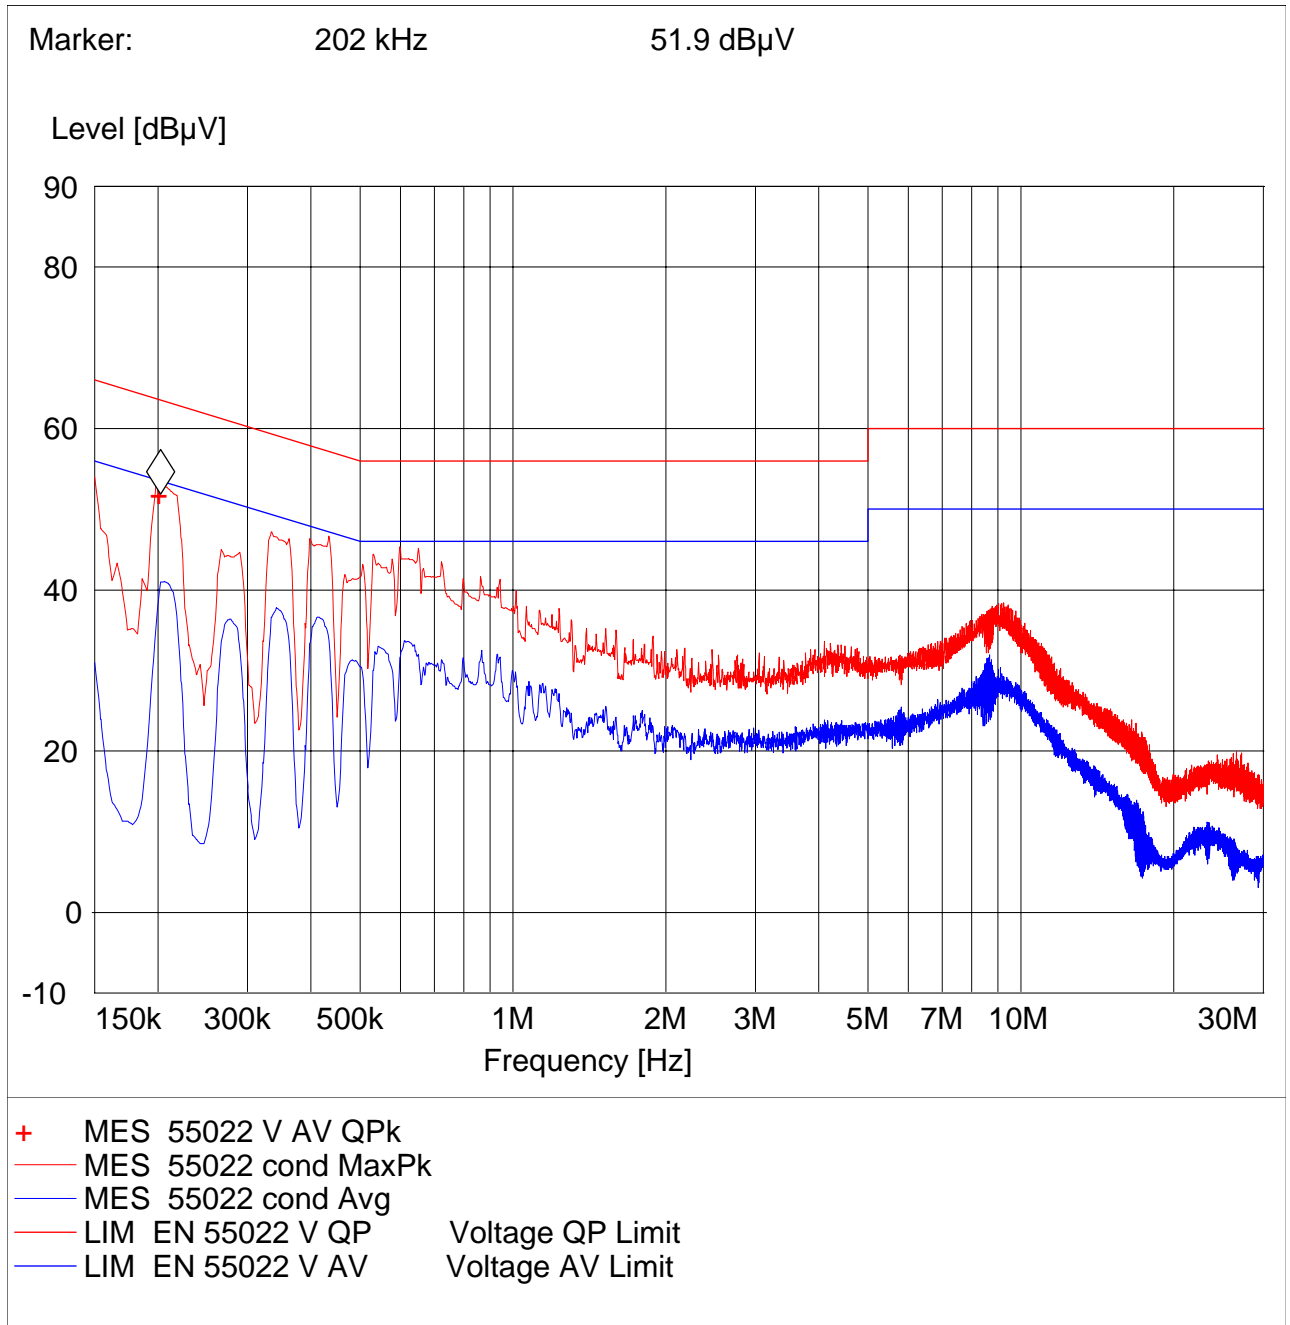



MEASUREMENT RESULT: "55022 V AV QPk"

11/26/2007 12:32PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.202000	51.90	0.0	64	11.6	---	---

LIMIT LINE: "EN 55022 V AV"

Short Description: Voltage AV Limit
4/27/1998 2:24PM

Frequency MHz	Level dBµV
0.150000	56.00
0.500000	46.00
5.000000	46.00
5.000000	50.00
30.000000	50.00

LIMIT LINE: "EN 55022 V QP"


Short Description: Voltage QP Limit
4/27/1998 2:24PM

Frequency MHz	Level dBµV
0.150000	66.00
0.500000	56.00
5.000000	56.00
5.000000	60.00
30.000000	60.00



5.6.5 TX Idle Neutral:

EUT: 7505
 Manufacturer: PSION
 Operating Condition: IDLE
 ANT Orientation:: Conducted
 EUT Orientation:: H
 Test Engineer:: Marc
 Power Supply: : AC Adapter
 Comments: : neutral; idle

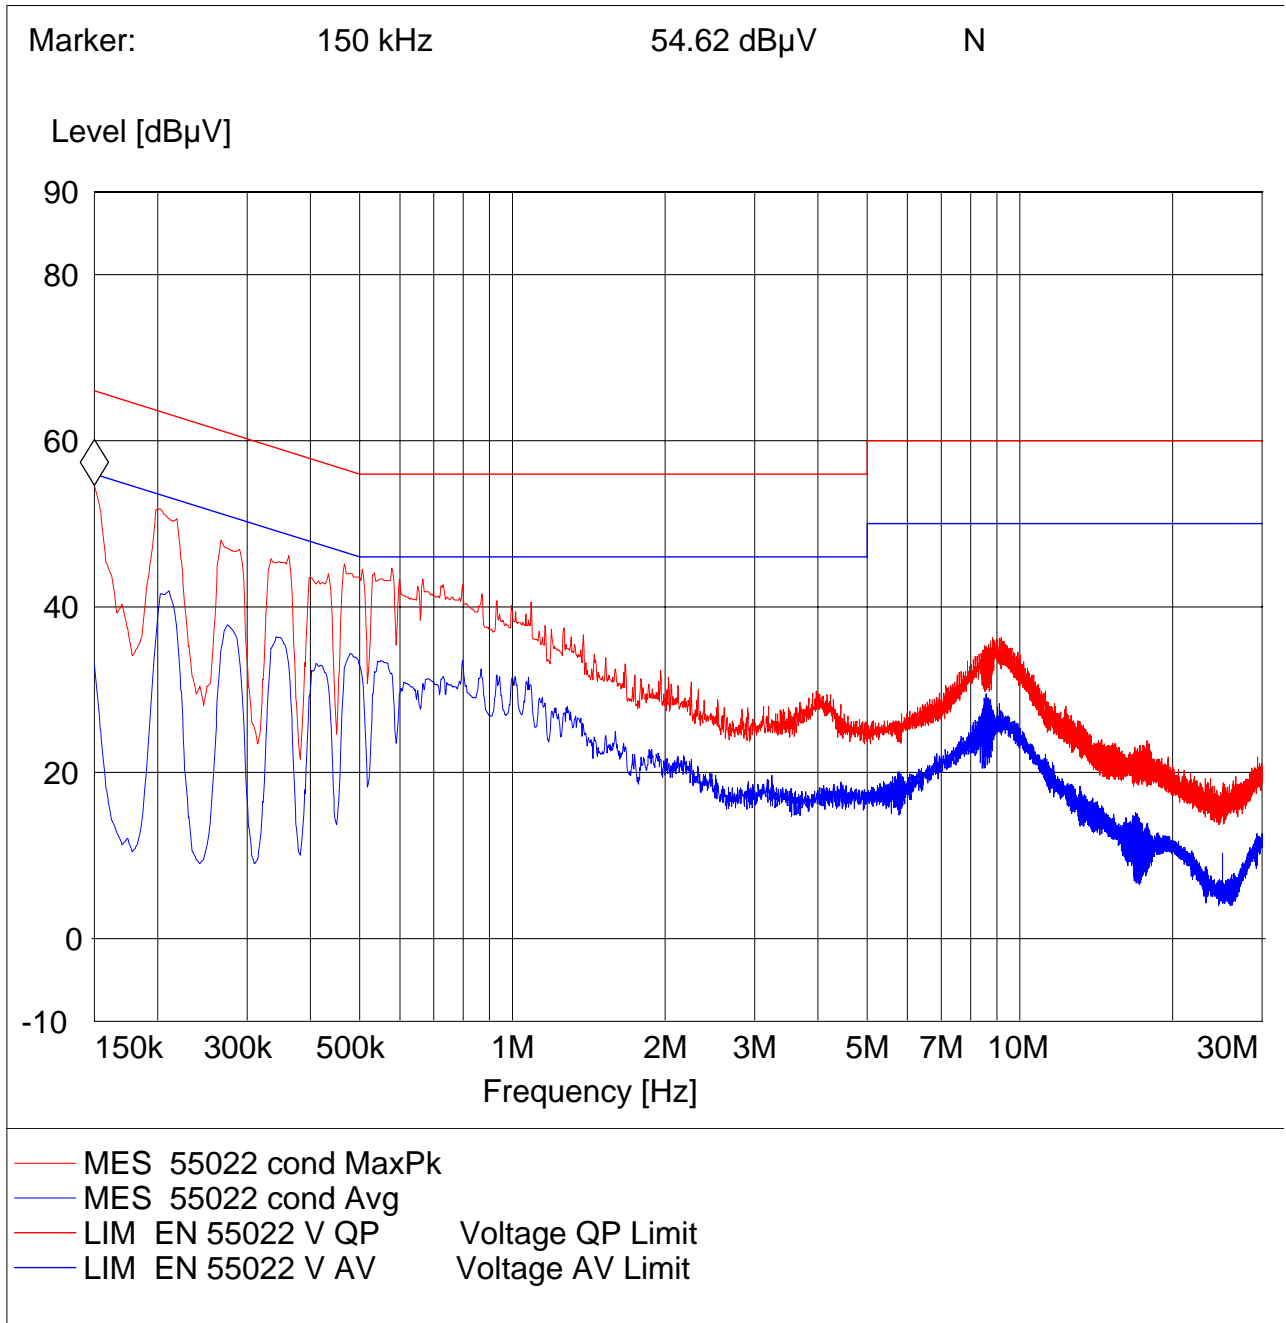



LIMIT LINE: "EN 55022 V AV"

Short Description:	Voltage AV Limit
4/27/1998 2:24PM	
Frequency	Level
MHz	dBµV
0.150000	56.00
0.500000	46.00
5.000000	46.00
5.000000	50.00
30.000000	50.00

LIMIT LINE: "EN 55022 V QP"

Short Description:	Voltage QP Limit
4/27/1998 2:24PM	
Frequency	Level
MHz	dBµV
0.150000	66.00
0.500000	56.00
5.000000	56.00
5.000000	60.00
30.000000	60.00



6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2008	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2008	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2008	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2008	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2008	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2008	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2008	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2008	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2008	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2008	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2008	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2008	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2008	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2008	2 years



7 References

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 2--FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS October 1, 2001.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 22 PUBLIC MOBILE SERVICES October 1, 1998.


FCC Report and order 02-229 September 24, 2002.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 24 PERSONAL COMMUNICATIONS SERVICES October 1, 1998.

ANSI / TIA-603-C-2004 Land Mobile FM or PM Communications Equipment Measurement and Performance Standard November 7, 2002.

8 BLOCK DIAGRAMS

Conducted Testing

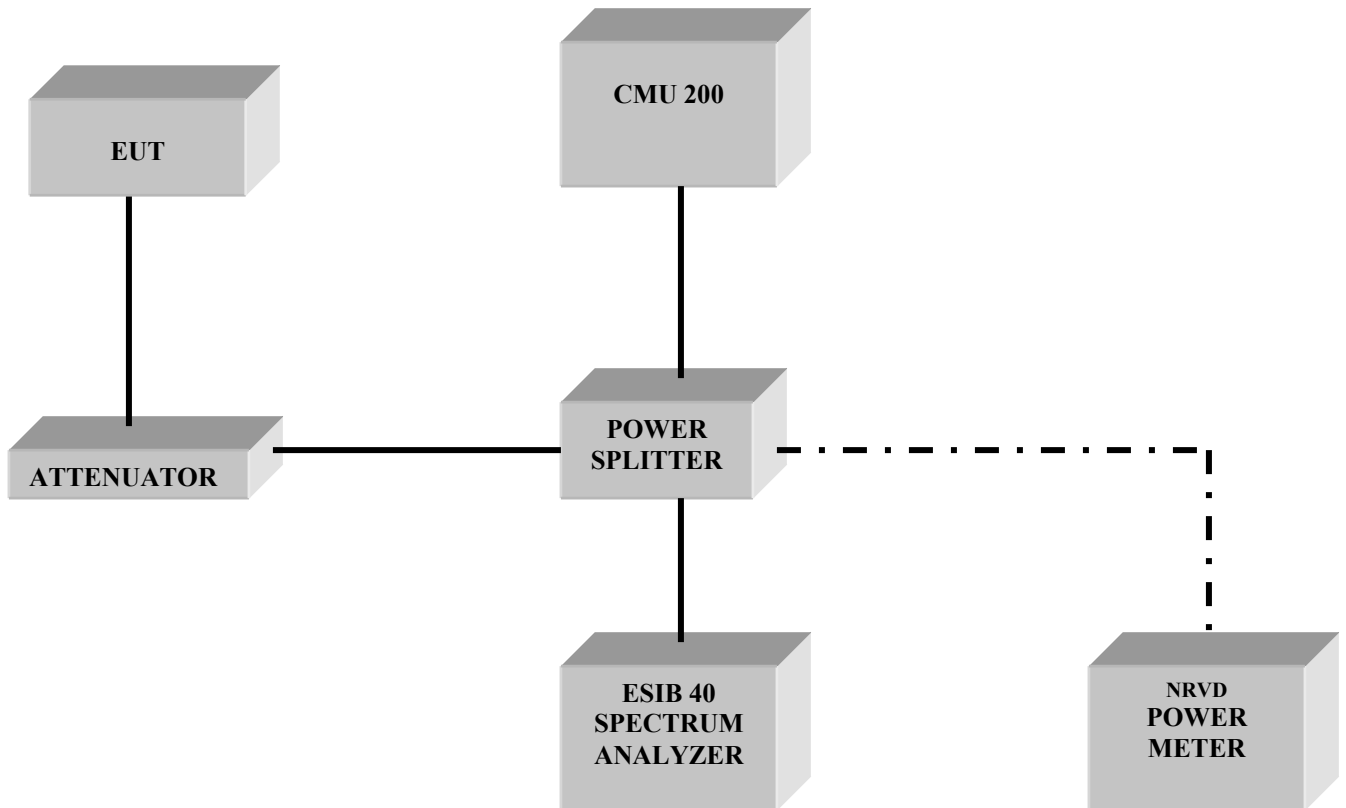

Radiated Testing

ANECHOIC CHAMBER

