


FCC/IC RF Test Report

APPLICANT : PSION INC.
EQUIPMENT : EP10 Hand-Held Computer
BRAND NAME : 
MODEL NAME : 7515
FCC ID : GM37515UB
IC : 2739D-7515UB
STANDARD : FCC Part 15 Subpart C §15.247
IC RSS-210 Issue 8
CLASSIFICATION : (DSS) Spread Spectrum Transmitter
EMISSION DESIGNATOR : 1M20G1D

The product was received on Jun. 02, 2011 and completely tested on Apr. 11, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Manufacturer..... 5

 1.3 Feature of Equipment Under Test 5

 1.4 Testing Site 6

 1.5 Applied Standards 7

 1.6 Ancillary Equipment List 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8

 2.1 RF Output Power 8

 2.2 Test Mode 9

 2.3 Connection Diagram of Test System..... 10

 2.4 RF Utility 11

3 TEST RESULT 12

 3.1 Number of Channel Measurement 12

 3.2 20dB and 99% Bandwidth Measurement 14

 3.3 Hopping Channel Separation Measurement 27

 3.4 Dwell Time Measurement..... 30

 3.5 Peak Output Power Measurement 33

 3.6 Band Edges Measurement 36

 3.7 Spurious Emission Measurement..... 47

 3.8 AC Conducted Emission Measurement..... 51

 3.9 Radiated Emission Measurement..... 55

 3.10 Antenna Requirements 64

4 LIST OF MEASURING EQUIPMENT 65

5 UNCERTAINTY OF EVALUATION..... 66

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.2	-	Gen 4.6.1	99% Bandwidth	-	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	A8.5	Spurious Emission	< 20 dBc	Pass	-
3.8	15.207	Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 13.10 dB at 2.822 MHz
3.9	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.45 dB at 2483.500 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

PSION INC.

2100 Meadowvale Blvd, Mississauga ON L5N 7J9, CANADA

1.2 Manufacturer

PSION INC.

2100 Meadowvale Blvd, Mississauga ON L5N 7J9, CANADA

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	EP10 Hand-Held Computer
Brand Name	PSION
Model Name	7515
FCC ID	GM37515UB
IC	2739D-7515UB
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Channel Spacing	1 MHz
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 8.27 dBm (0.0067 W) Bluetooth EDR (2Mbps) : 8.25 dBm (0.0067 W) Bluetooth EDR (3Mbps) : 8.94 dBm (0.0078 W)
Antenna Type	PIFA Antenna with gain 3.73 dBi
HW Version	3
SW Version	2.2.0.0
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
EUT Stage	Identical Prototype
Type of Emission	1M20G1D

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

List of Accessory:

Specification of Accessory		
AC Adapter 1	Brand Name	Leader
	Model Name	IU18-2050300-WP
AC Adapter 2	Brand Name	Phihong
	Model Name	PSA15R-050P
Battery	Brand Name	PSION / ETI
	Model Name	RV3010 / BP08-000760
Car Charger	Brand Name	AOEM
	Model Name	C15C-0520CD0-C0
Desktop Charger Cradle (Single Dock)	Brand Name	PSION
	Model Name	RV4000
Desktop Charger Cradle (AC Adapter)	Brand Name	FSP
	Model Name	FSP050-DBAB1
Charger Snap Module 1	Brand Name	PSION
	Model Name	RV4001
Charger Snap Module 2	Brand Name	PSION
	Model Name	RV4002
LCD Panel	Brand Name	Sharp
	Model Name	LS037V7DW01
Pouch	Brand Name	Psion
	Model Name	RV6091

Remark: For accessories equipped with this EUT, please refer to Appendix A.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	CO05-HY	03CH07-HY	722060/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC Public Notice DA 00-705
- ANSI C63.4-2003
- IC RSS-210 Issue 8
- IC RSS-Gen Issue 3

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	LCD Monitor	Lenovo	6135-AB1	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
6.	Bluetooth Earphone	Sony Ericsson	MW600	PY70DA2029	N/A	N/A
7.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A

2 Test Configuration of Equipment Under Test

2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Band	Bluetooth RF Output Power		
Channel	00	39	78
Frequency	2402	2441	2480
Peak Power	8.76	8.94	8.91

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
2. The data rate was set in 3Mbps for all the test items due to the highest RF output power.
3. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 KHz to 30 MHz), radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations, laptop / tablet modes.

The following tables are showing the test modes as the worst cases (X plane) and recorded in this report.


Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated TCs	N/A	N/A	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz
AC Conducted Emission	Mode 1 :GSM850 Idle + WLAN (2.4G) Link + Bluetooth Link + MP3 + Camera + Sleeve (USB Port) + USB Cable (Data Link with Notebook) + Adapter 1 + Battery		
Remark:			
<ol style="list-style-type: none"> TC stands for Test Configuration, and consists of Sleeve, Battery, USB Cable, and adapter 2 for Radiation test. For radiated TCs, the data rate was set in 3Mbps due to the highest RF output power; only the data of these modes was reported. 			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

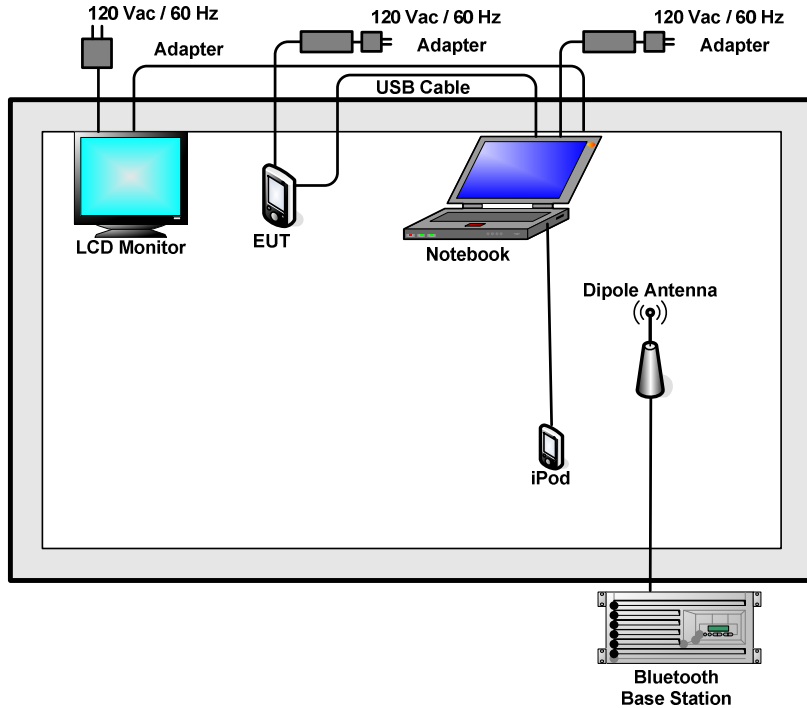

<AC Conducted Emission Mode>

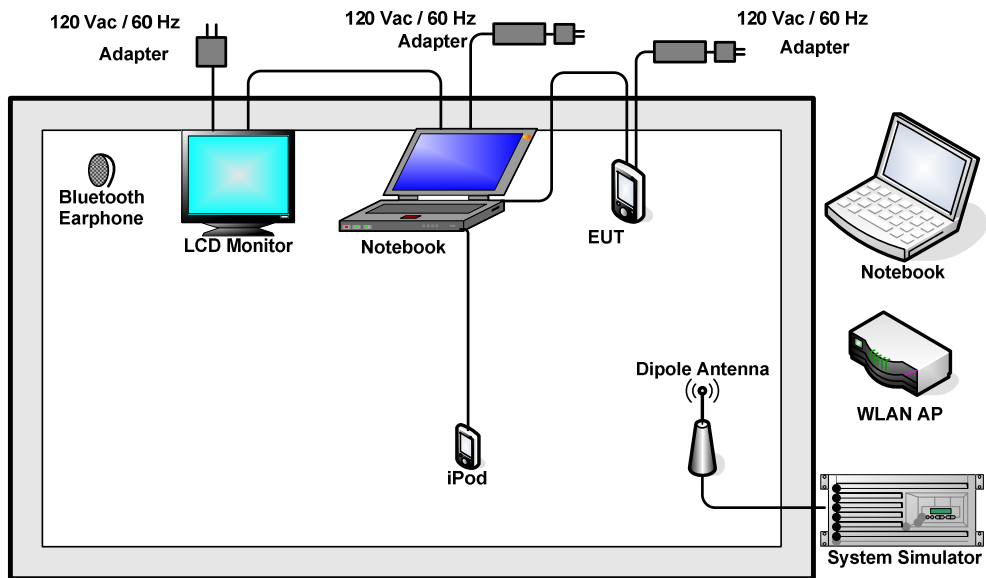



2.4 RF Utility

For Bluetooth function, the RF utility, "BTTest" was installed in EUT which was programmed in order to make the EUT into the engineering modes to contact with Bluetooth base station for transmitting and receiving continuous signals.

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = the frequency band of operation; RBW \geq 1% of the span; VBW \geq RBW; Sweep = auto;
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.

3.1.4 Test Setup

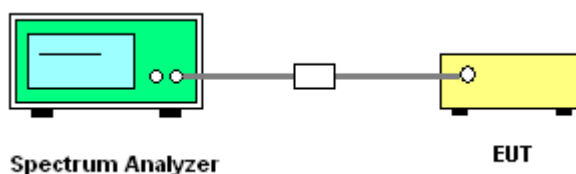


3.1.5 Test Result of Number of Hopping Frequency


Test Mode :	Mode 7~9	Temperature :	24~26°C
Test Engineer :	Book Lin	Relative Humidity :	50~53%
Number of Hopping Channels (Channel)		Limits (Channel)	Pass/Fail
79		> 15	Pass



Number of Hopping Channel Plot on Channel 00 - 78

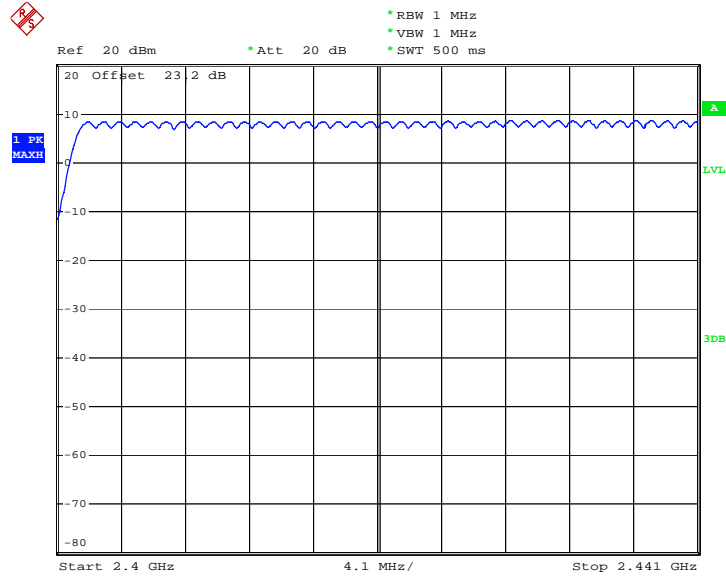

Date: 10.APR.2012 21:27:55

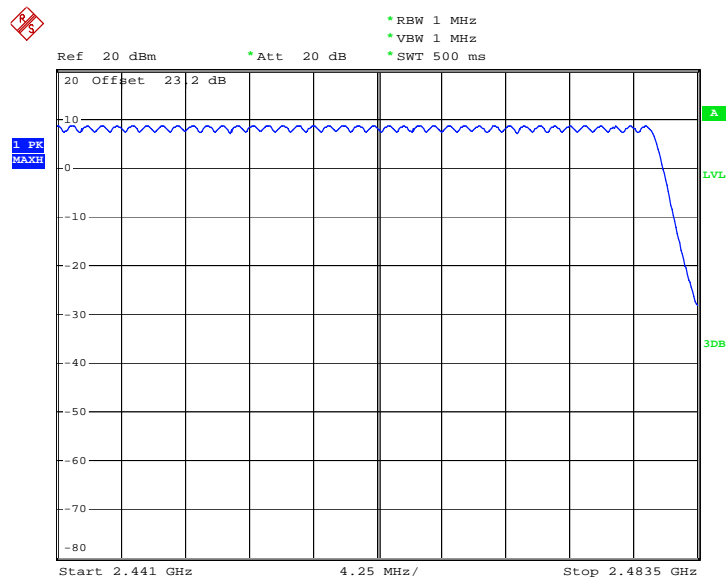

Date: 10.APR.2012 21:32:42

3.2 20dB and 99% Bandwidth Measurement

3.2.1 Limit of 20dB Bandwidth

N/A


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

3.2.4 Test Setup

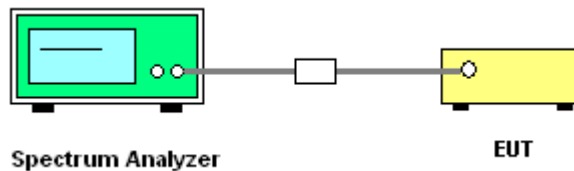




3.2.5 Test Result of 20dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	24~26°C
Test Engineer :	Book Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.856
39	2441	0.896
78	2480	0.940


20 dB Bandwidth Plot on Channel 00

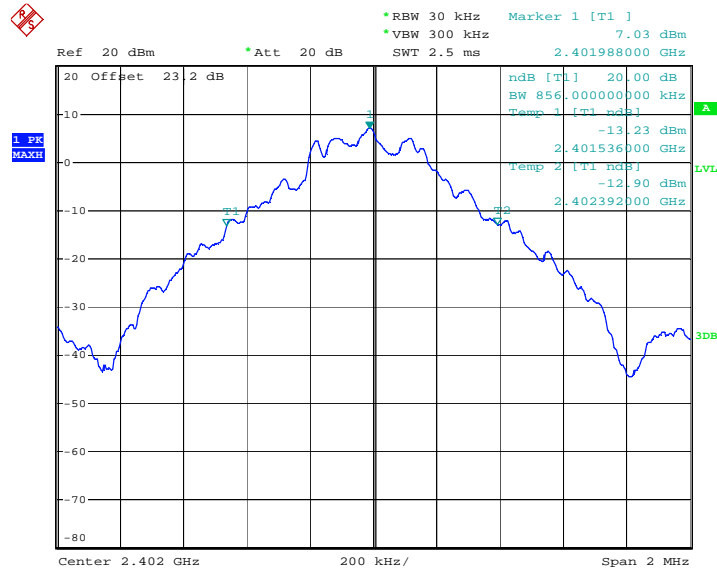

Date: 10.APR.2012 20:53:29




20 dB Bandwidth Plot on Channel 39

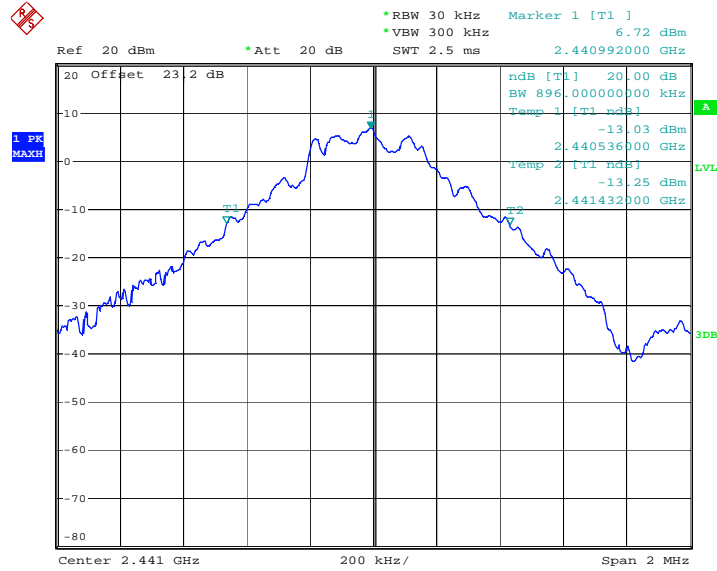

Date: 10.APR.2012 20:53:46

20 dB Bandwidth Plot on Channel 78

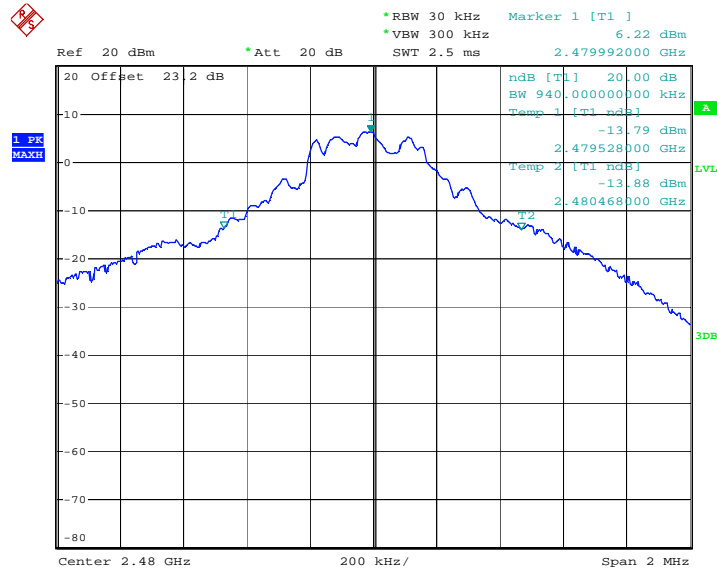


Date: 10.APR.2012 20:54:18



Test Mode :	Mode 4, 5, 6	Temperature :	24~26°C
Test Engineer :	Book Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.302
39	2441	1.326
78	2480	1.326


20 dB Bandwidth Plot on Channel 00

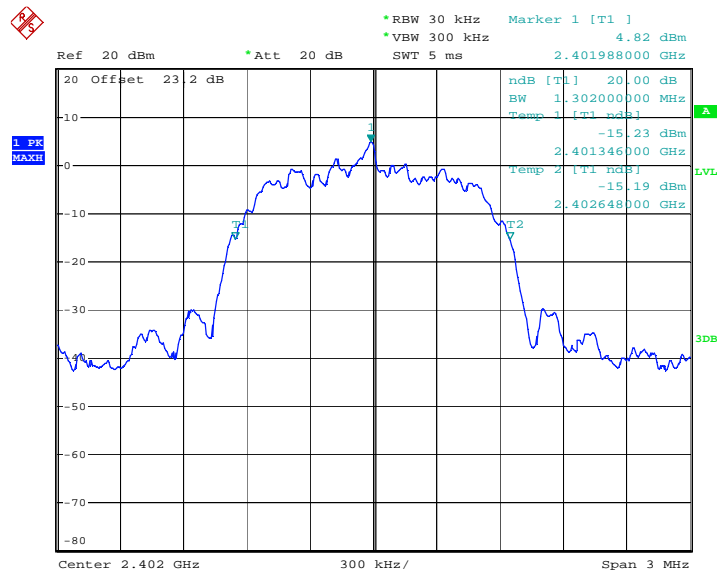

Date: 10.APR.2012 20:54:48




20 dB Bandwidth Plot on Channel 39

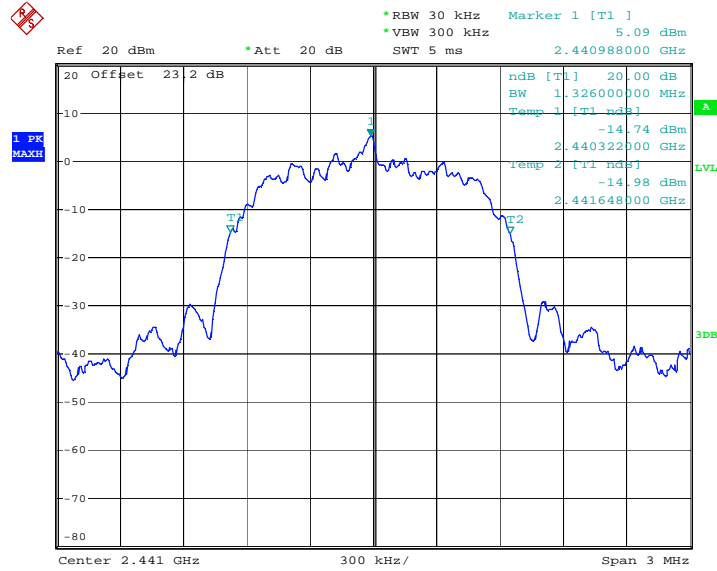

Date: 10.APR.2012 20:55:16

20 dB Bandwidth Plot on Channel 78

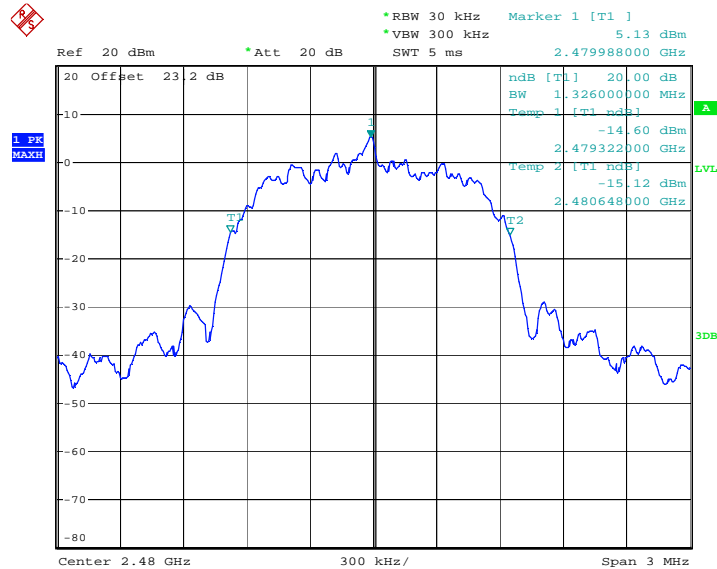


Date: 10.APR.2012 20:55:58



Test Mode :	Mode 7, 8, 9	Temperature :	24~26°C
Test Engineer :	Book Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.260
39	2441	1.266
78	2480	1.266


20 dB Bandwidth Plot on Channel 00

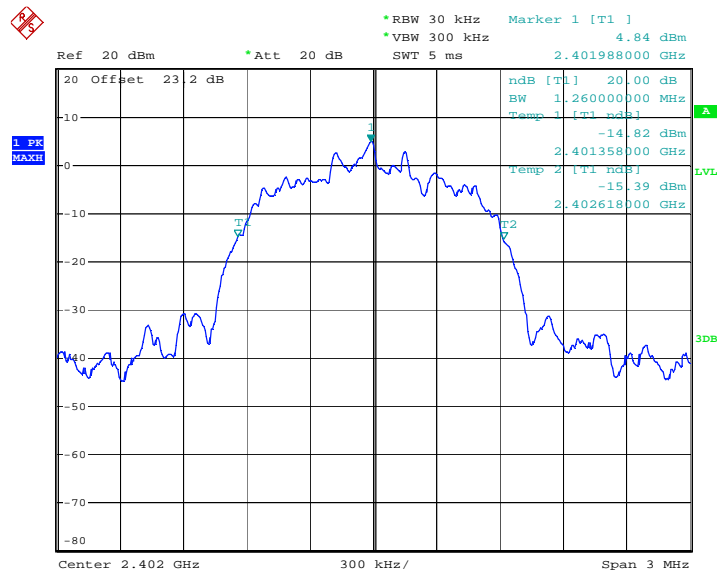

Date: 10.APR.2012 20:56:38




20 dB Bandwidth Plot on Channel 39

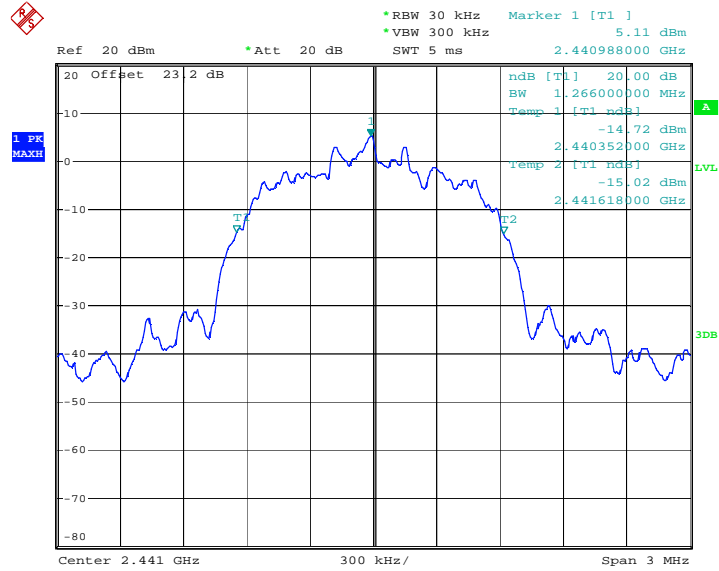

Date: 10.APR.2012 20:58:25

20 dB Bandwidth Plot on Channel 78

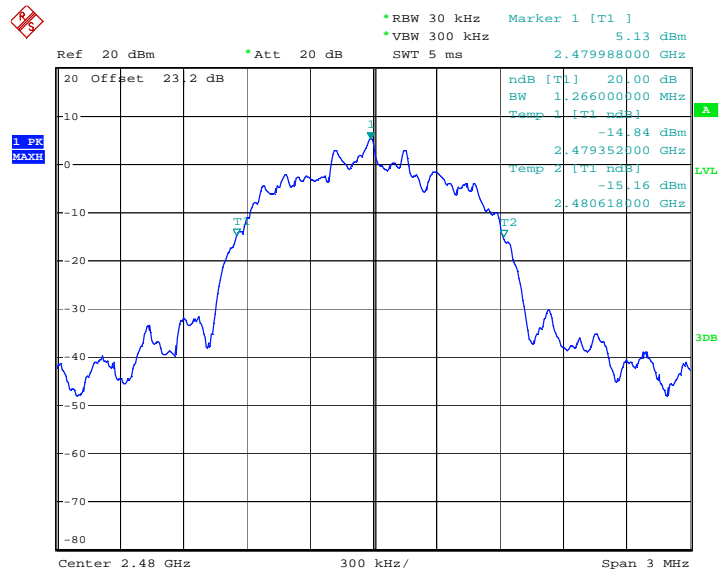

Date: 10.APR.2012 20:58:50




3.2.6 Test Result of 99% Occupied Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	24~26°C
Test Engineer :	Book Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.792
39	2441	0.828
78	2480	0.972


99% Bandwidth Plot on Channel 00

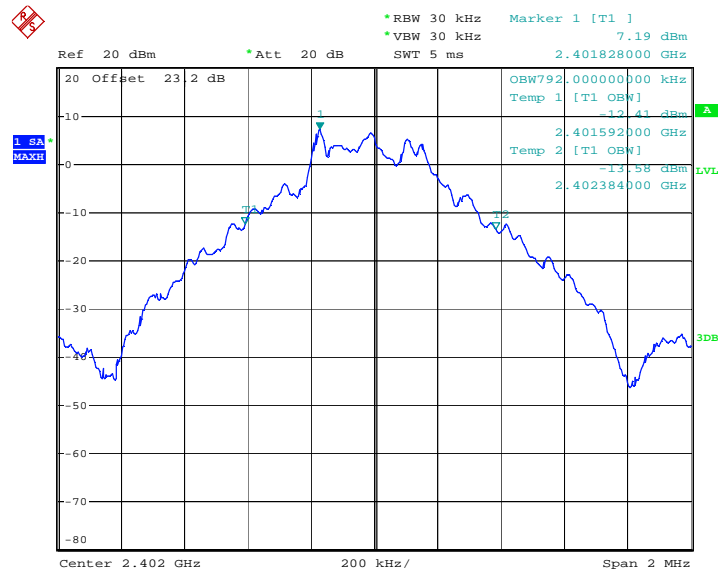

Date: 10.APR.2012 21:14:07




99% Occupied Bandwidth Plot on Channel 39

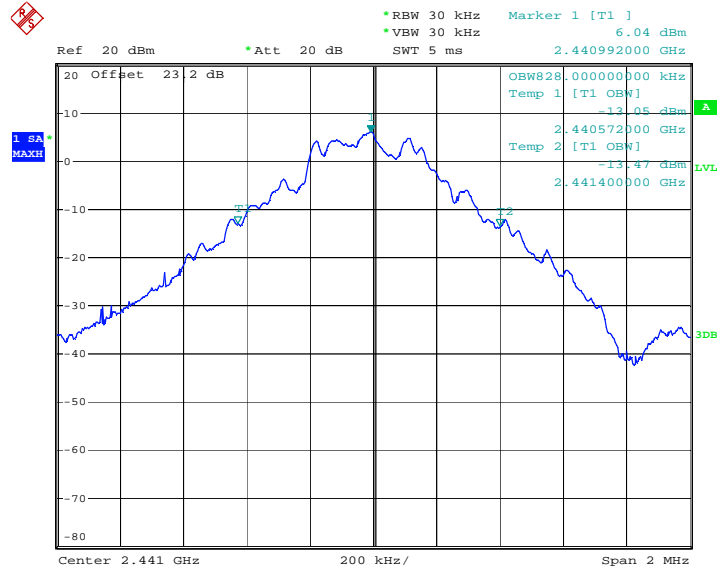

Date: 10.APR.2012 21:14:44

99% Occupied Bandwidth Plot on Channel 78

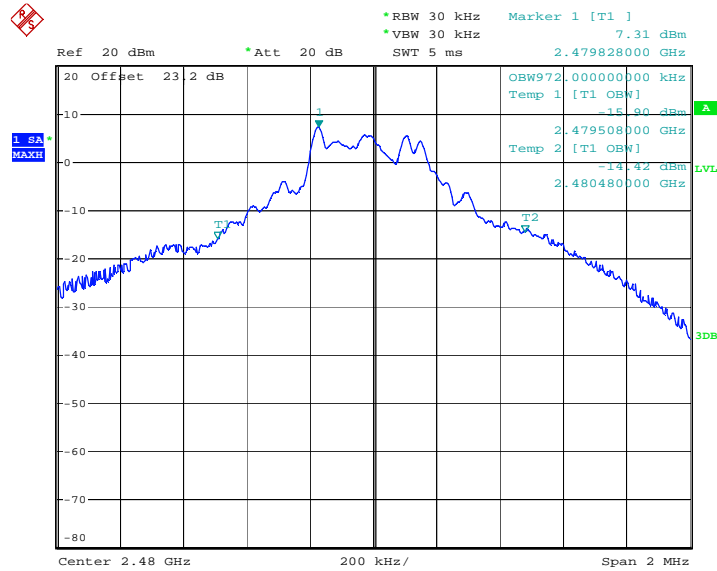


Date: 10.APR.2012 21:21:00



Test Mode :	Mode 4, 5, 6	Temperature :	24~26°C
Test Engineer :	Book Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.192
39	2441	1.200
78	2480	1.188


99% Bandwidth Plot on Channel 00

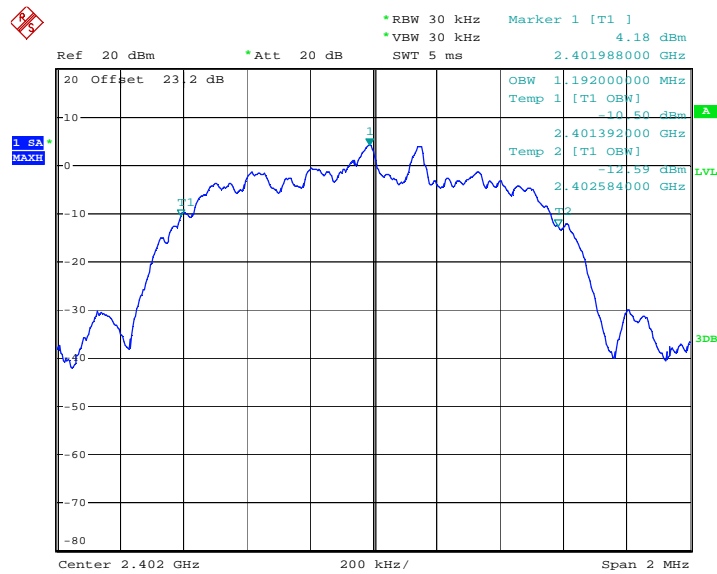

Date: 10.APR.2012 21:15:57




99% Occupied Bandwidth Plot on Channel 39

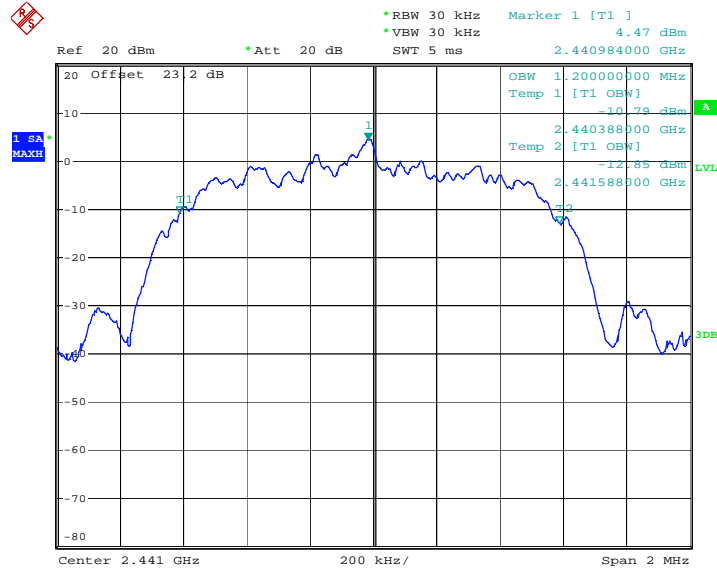

Date: 10.APR.2012 21:16:33

99% Occupied Bandwidth Plot on Channel 78

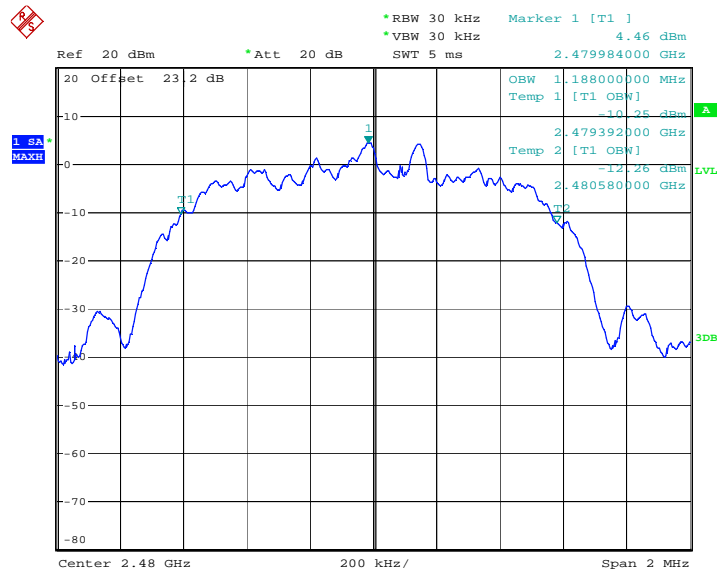


Date: 10.APR.2012 21:20:23



Test Mode :	Mode 7, 8, 9	Temperature :	24~26°C
Test Engineer :	Book Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.168
39	2441	1.168
78	2480	1.168


99% Bandwidth Plot on Channel 00

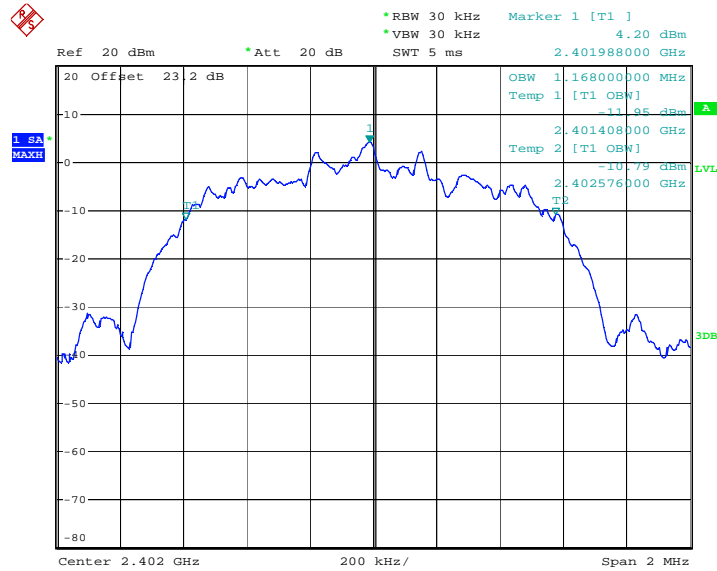

Date: 10.APR.2012 21:17:47




99% Occupied Bandwidth Plot on Channel 39

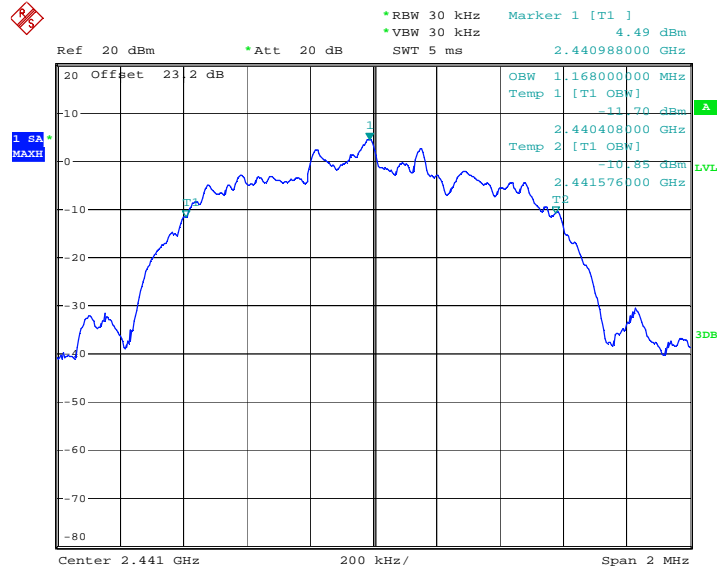

Date: 10.APR.2012 21:18:23

99% Occupied Bandwidth Plot on Channel 78

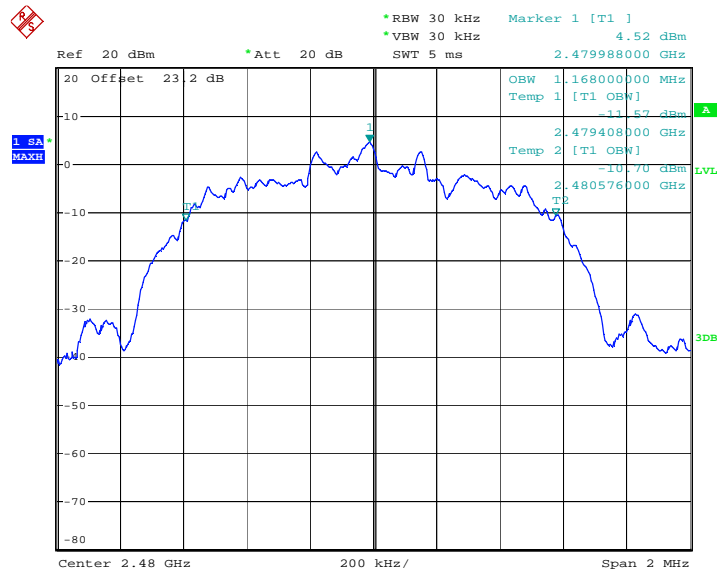

Date: 10.APR.2012 21:19:42

3.3 Hopping Channel Separation Measurement

3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.3.4 Test Setup

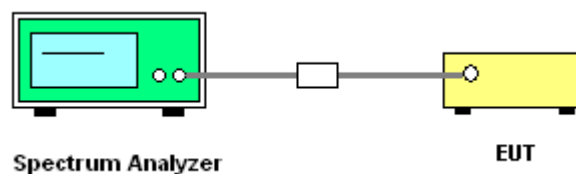




3.3.5 Test Result of Hopping Channel Separation

Test Mode :	Mode 7, 8, 9	Temperature :	24~26°C
Test Engineer :	Book Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8400	Pass
39	2441	1.002	0.8440	Pass
78	2480	1.002	0.8440	Pass


Channel Separation Plot on Channel 00 - 01

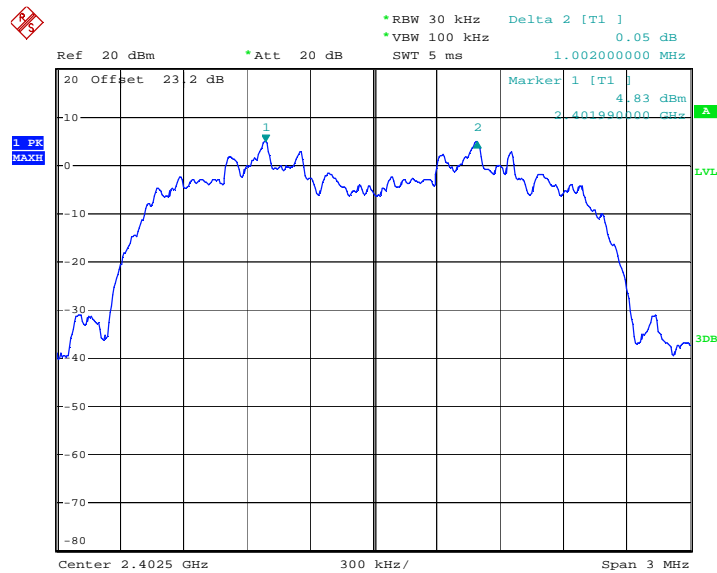

Date: 10.APR.2012 20:45:37




Channel Separation Plot on Channel 39 - 40

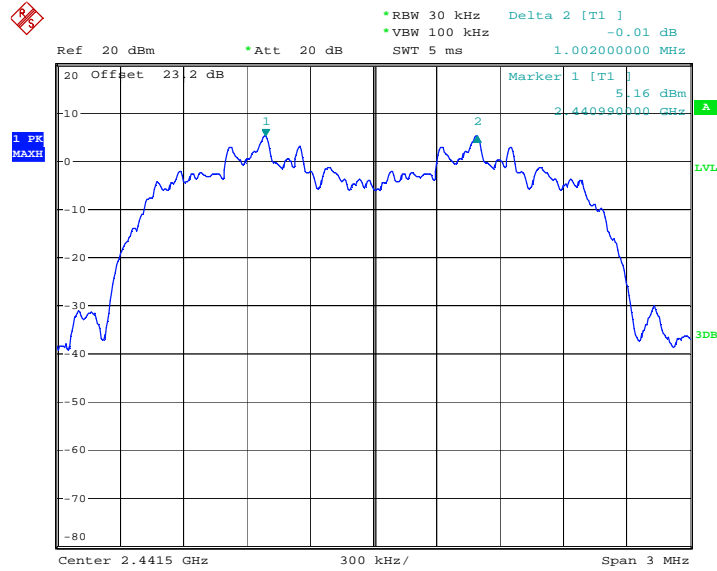

Date: 10.APR.2012 20:49:29

Channel Separation Plot on Channel 77 - 78

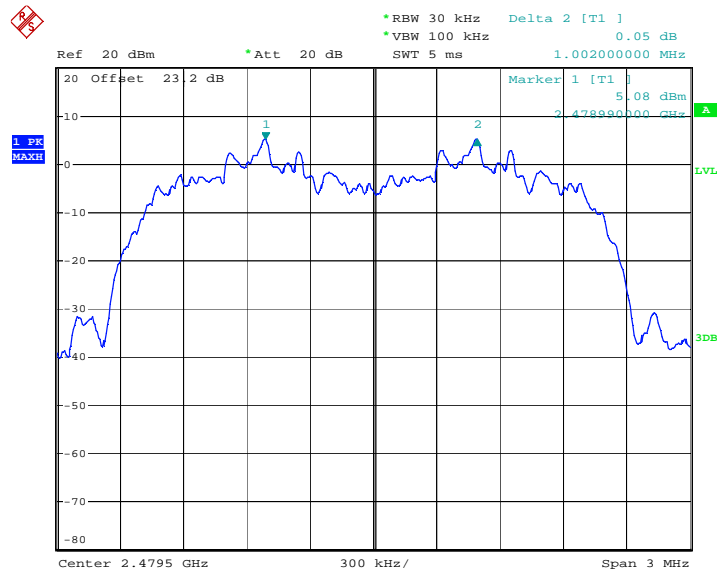

Date: 10.APR.2012 21:07:22

3.4 Dwell Time Measurement

3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

3.4.4 Test Setup

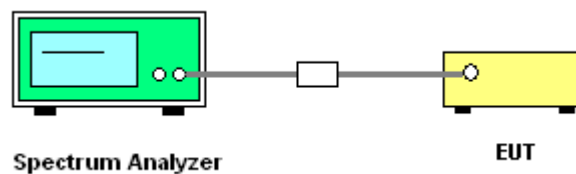



3.4.5 Test Result of Dwell Time

Test Mode :	Mode 8	Temperature :	24~26°C
Test Engineer :	Book Lin	Relative Humidity :	50~53%


Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
3DH5	3.70	2980.00	0.35	0.4	Pass

Remark:

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)




3DH5 Dwell Time (One Pulse) Plot on Channel 39

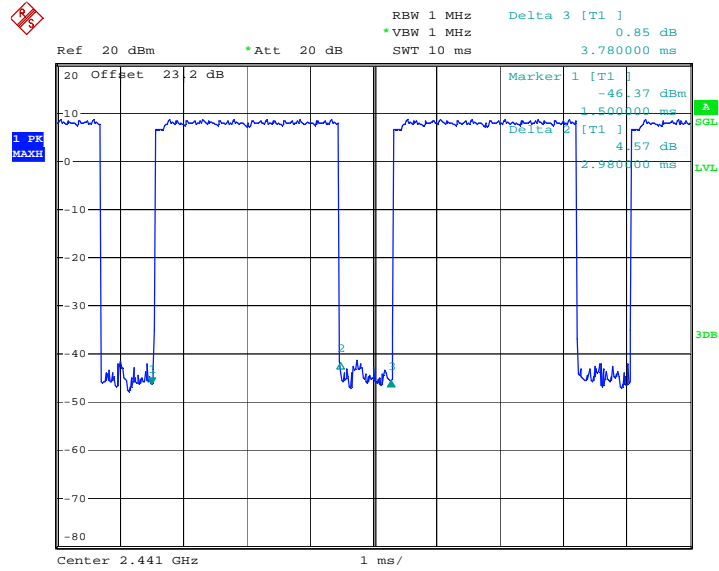

Date: 10.APR.2012 22:21:17

3DH5 Dwell Time (Count Pulses) Plot on Channel 39

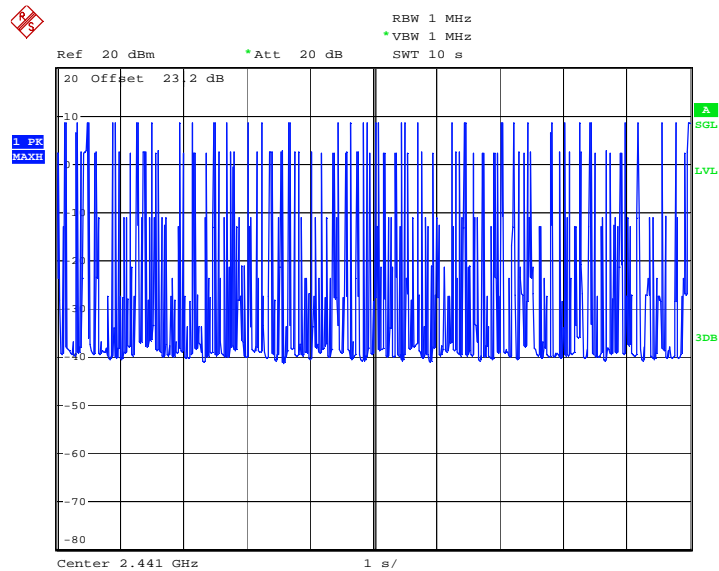

Date: 10.APR.2012 20:52:55

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, and 3Mbps are 0.125 watts.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.

3.5.4 Test Setup

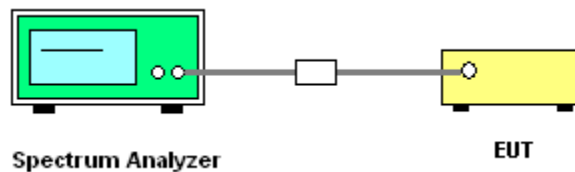


3.5.5 Test Result of Peak Output Power

Test Mode :	Mode 7, 8, 9	Temperature :	24~26°C
Test Engineer :	Book Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	8.76	20.97	Pass
39	2441	8.94	20.97	Pass
78	2480	8.91	20.97	Pass




Peak Output Power Plot on Channel 00

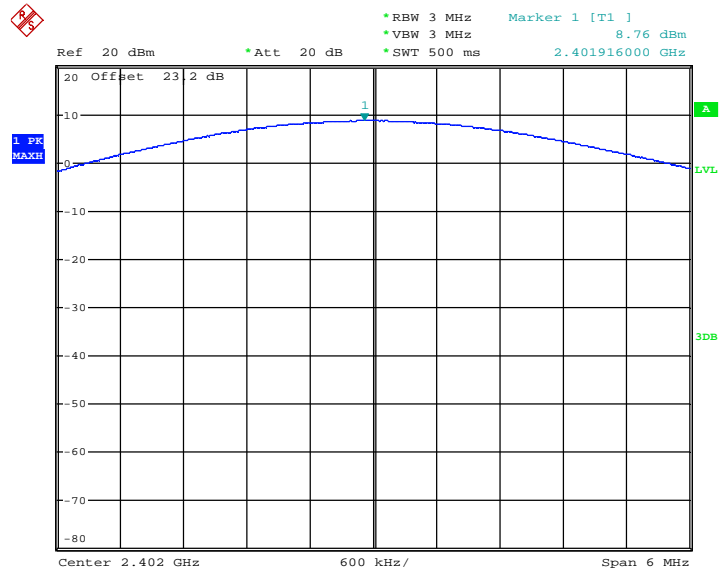

Date: 5.APR.2012 19:25:23


Peak Output Power Plot on Channel 39

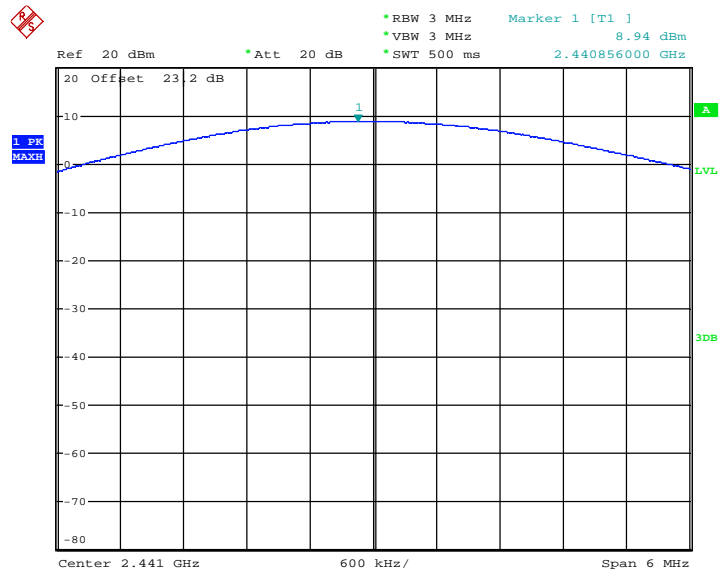

Date: 5.APR.2012 19:33:23



Peak Output Power Plot on Channel 78

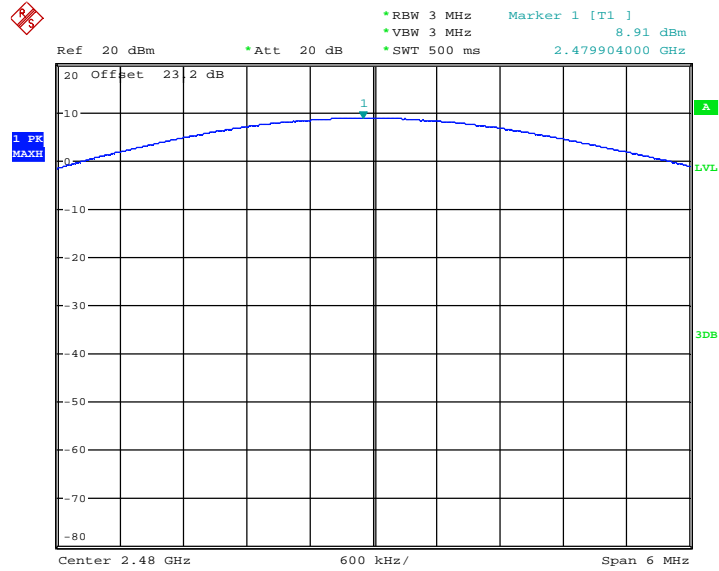

Date: 5.APR.2012 19:28:02



3.6 Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.6.2 Measuring Instruments


See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 300KHz, Video bandwidth (VBW) \geq RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300k Hz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep: Auto for Peak; set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto for Average. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).
4. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

3.6.4 Test Setup

<Radiated Band Edges>

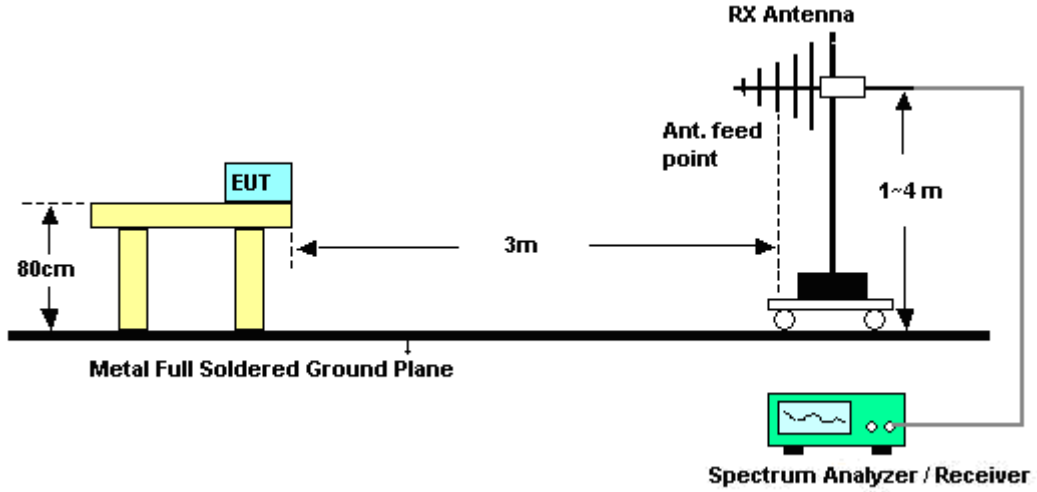

<Conducted Band Edges>

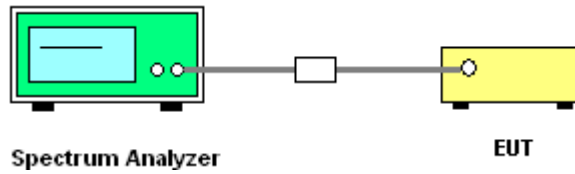



3.6.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	21~25°C
Test Channel :	00	Relative Humidity :	49~54%
		Test Engineer :	Kyle Jhuang, Ivan Chiang, and David Yang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.09	60.24	-13.76	74	55.88	32.18	6.03	33.85	174	326	Peak
2388.09	35.76	-18.24	54	31.4	32.18	6.03	33.85	174	326	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.09	59.76	-14.24	74	55.4	32.18	6.03	33.85	100	322	Peak
2388.09	35.62	-18.38	54	31.26	32.18	6.03	33.85	100	322	Average



Test Mode :	Mode 3	Temperature :	21~25°C
Test Channel :	78	Relative Humidity :	49~54%
		Test Engineer :	Kyle Jhuang, Ivan Chiang, and David Yang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	70.55	-3.45	74	66.19	32.18	6.18	34	100	16	Peak
2483.5	38.8	-15.2	54	34.44	32.18	6.18	34	100	16	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBµV/m)	Delta Result (dB)	Average Result (dBµV/m)	Average Limit (dBµV/m)	Margin (dB)	Result
Single Carrier Mode	87.79	49.94	37.85	54	-16.15	Pass
Hopping Mode	87.79	48.99	38.8	54	-15.2	Pass

Note : Average result = Maximum field strength – Delta result

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	68.87	-5.13	74	64.51	32.18	6.18	34	130	36	Peak
2483.5	37.65	-16.35	54	33.29	32.18	6.18	34	130	36	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBµV/m)	Delta Result (dB)	Average Result (dBµV/m)	Average Limit (dBµV/m)	Margin (dB)	Result
Single Carrier Mode	87.29	49.64	37.65	54	-16.35	Pass
Hopping Mode	87.29	51.81	35.48	54	-18.52	Pass

Note : Average result = Maximum field strength – Delta result




Test Mode :	Mode 3	Temperature :	21~25°C
Test Channel :	78	Relative Humidity :	49~54%
Test Engineer :	Kyle Jhuang, Ivan Chiang, and David Yang	Polarization :	Horizontal





Test Mode :	Mode 3	Temperature :	21~25°C
Test Channel :	78	Relative Humidity :	49~54%
Test Engineer :	Kyle Jhuang, Ivan Chiang, and David Yang	Polarization :	Horizontal

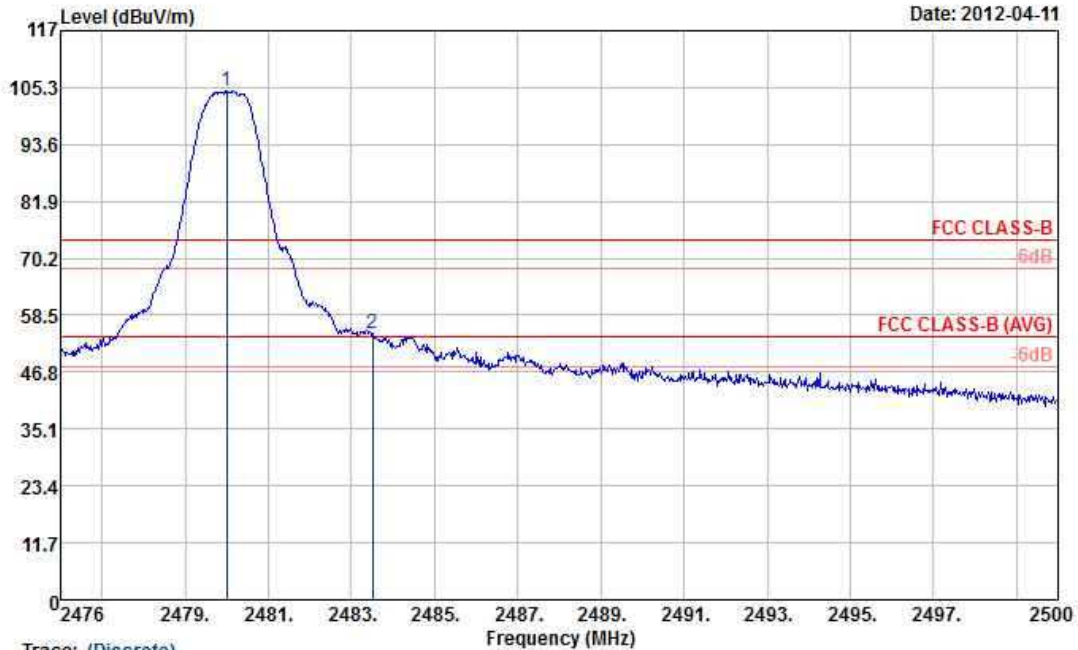

Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC CLASS-B 3m HF-ANT_110816 HORIZONTAL


Mode : Mode 3

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2480.00	104.54	30.54	74.00	100.18	32.18	6.18	34.00	100	16	Peak
2	2483.51	54.60	-19.40	74.00	50.24	32.18	6.18	34.00	100	16	Peak

* Marker-Delta Method (RBW/VBW=100KHz): 49.94 dB , single carrier Mode



Test Mode :	Mode 3	Temperature :	21~25°C
Test Channel :	78	Relative Humidity :	49~54%
Test Engineer :	Kyle Jhuang, Ivan Chiang, and David Yang	Polarization :	Horizontal

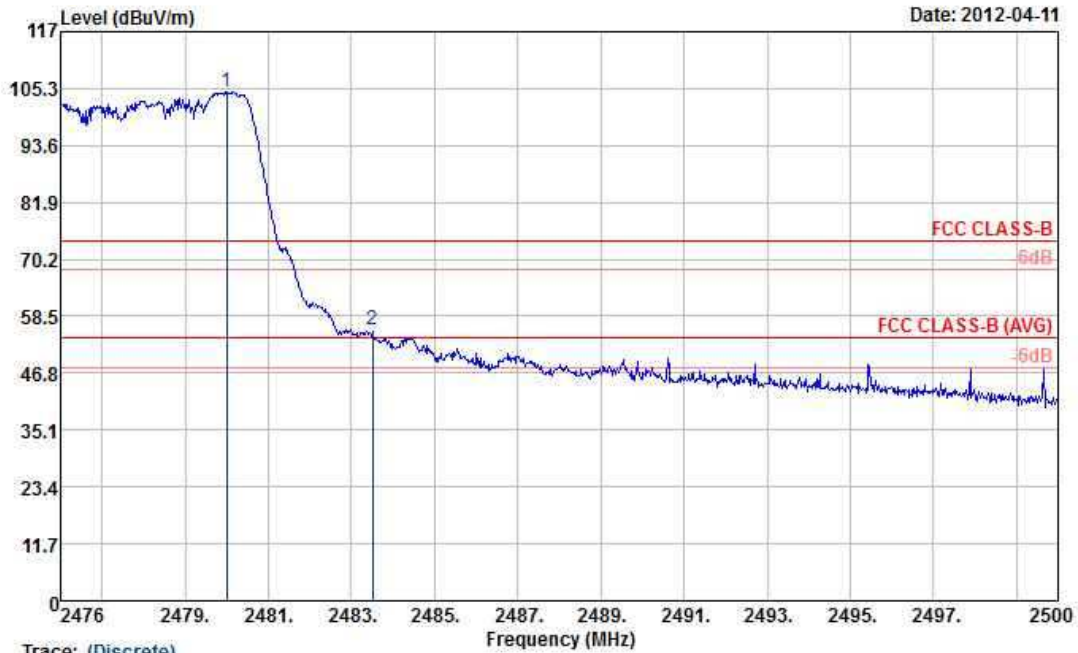


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC CLASS-B 3m HF-ANT_110816 HORIZONTAL

Mode	Mode 3										
Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		
1 *	2480.00	104.62	30.62	74.00	100.26	32.18	6.18	34.00	100	16	Peak
2	2483.51	55.63	-18.37	74.00	51.27	32.18	6.18	34.00	100	16	Peak

* Marker-Delta Method (RBW/VBW=100KHz): 48.99 dB , Hopping Mode



Test Mode :	Mode 3	Temperature :	21~25°C
Test Channel :	78	Relative Humidity :	49~54%
Test Engineer :	Kyle Jhuang, Ivan Chiang, and David Yang	Polarization :	Vertical

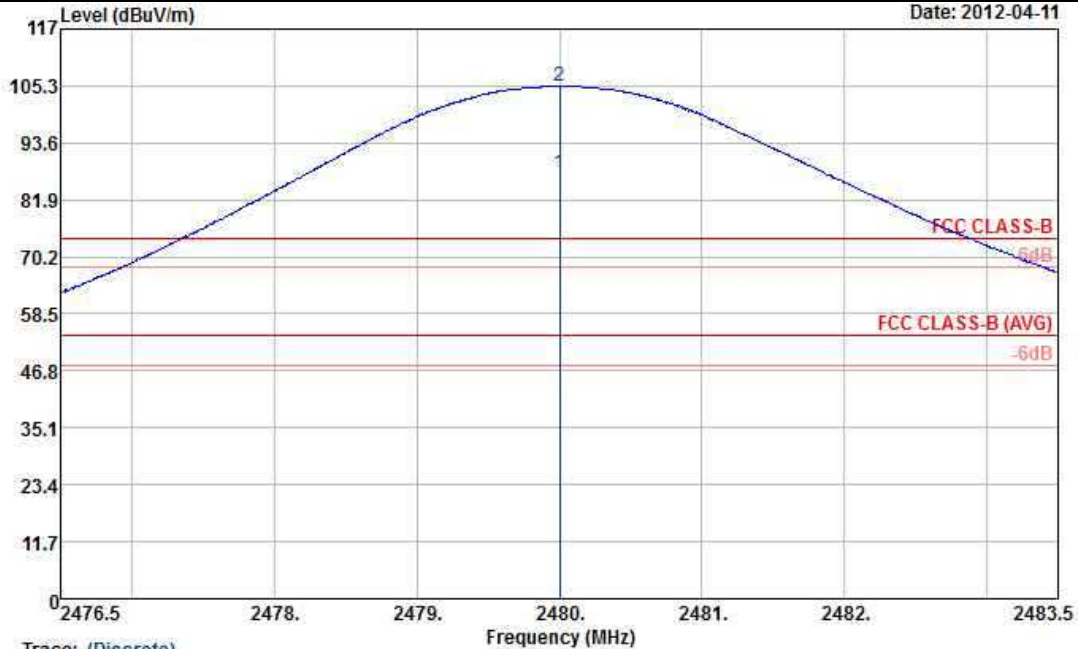

Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC CLASS-B 3m HF-ANT_110816 VERTICAL


Mode : Mode 3

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2480.00	87.29	33.29	54.00	82.93	32.18	6.18	34.00	130	36	Average
2 *	2480.00	105.30	31.30	74.00	100.94	32.18	6.18	34.00	130	36	Peak

* Maximum field strength of the fundamental emission




Test Mode :	Mode 3	Temperature :	21~25°C
Test Channel :	78	Relative Humidity :	49~54%
Test Engineer :	Kyle Jhuang, Ivan Chiang, and David Yang	Polarization :	Vertical

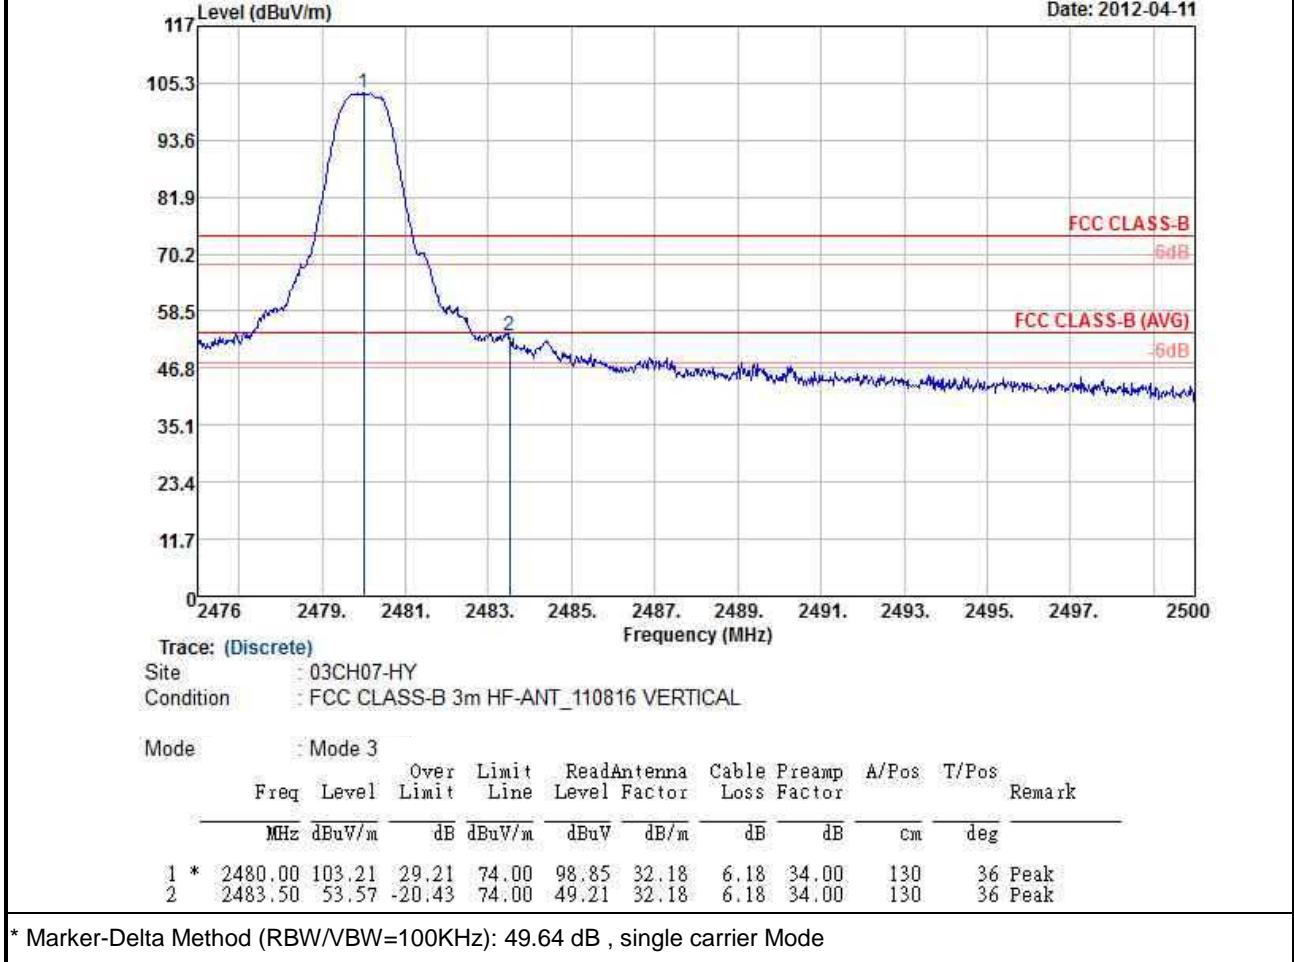



Test Mode :	Mode 3	Temperature :	21~25°C
Test Channel :	78	Relative Humidity :	49~54%
Test Engineer :	Kyle Jhuang, Ivan Chiang, and David Yang	Polarization :	Vertical

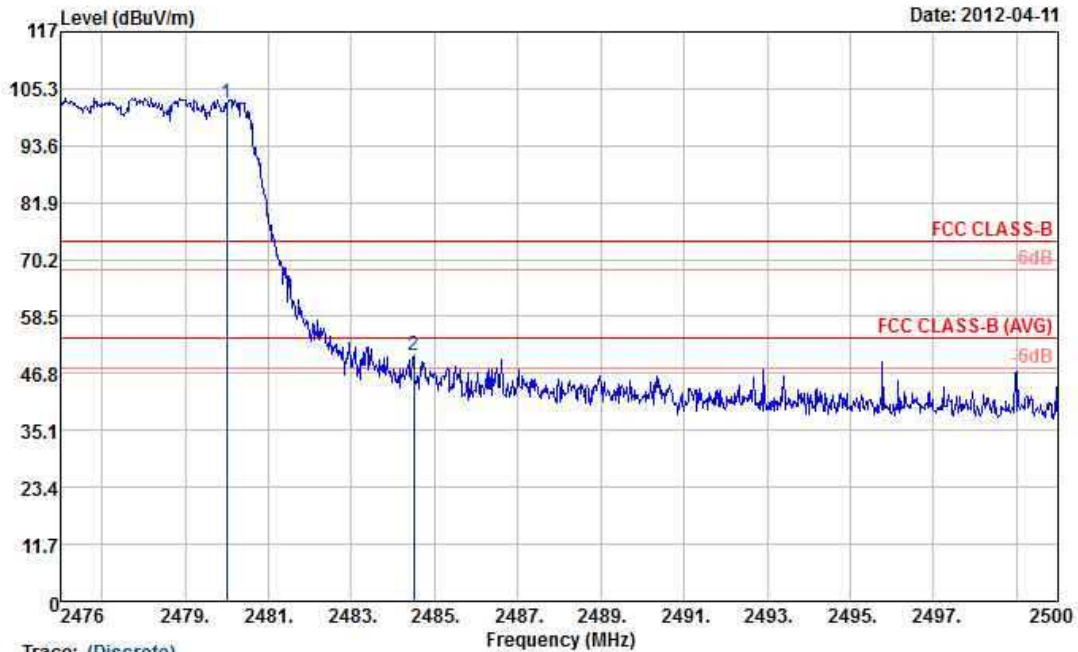

Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC CLASS-B 3m HF-ANT_110816 VERTICAL

Mode	Mode 3										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		
1 *	2480.00	102.49	28.49	74.00	98.13	32.18	6.18	34.00	130	36 Peak	
2	2484.50	50.68	-23.32	74.00	46.32	32.18	6.18	34.00	130	36 Peak	


* Marker-Delta Method (RBW/VBW=100KHz): 51.81 dB , Hopping Mode



3.6.6 Test Result of Conducted Band Edges


Test Mode :	Mode 7 and 9	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Book Lin

Low Band Edge Plot on Channel 00

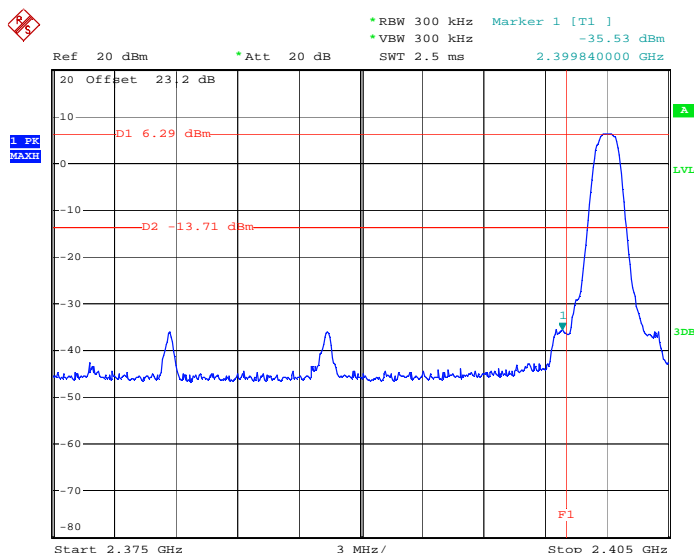

Date: 10.APR.2012 21:12:27

High Band Edge Plot on Channel 78

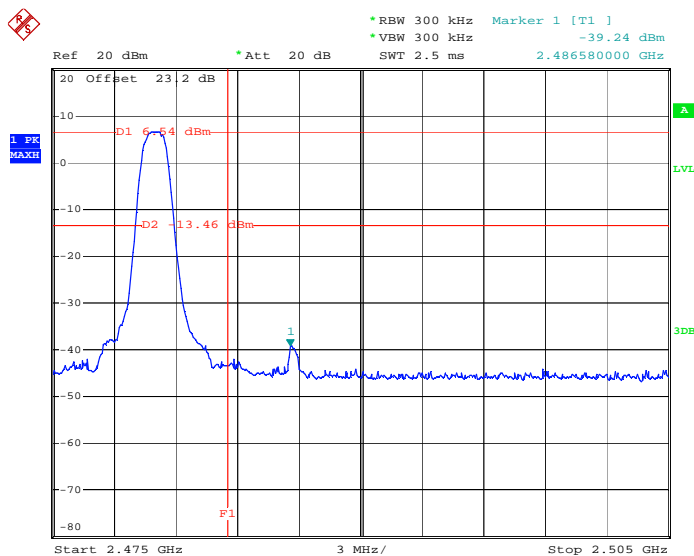

Date: 10.APR.2012 21:13:30

3.7 Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 KHz, Video bandwidth (VBW) \geq RBW, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 KHz RBW.

3.7.4 Test Setup

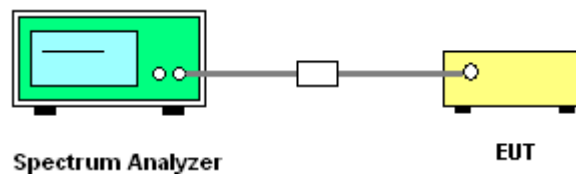




3.7.5 Test Result


Test Mode :	Mode 7	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Book Lin

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

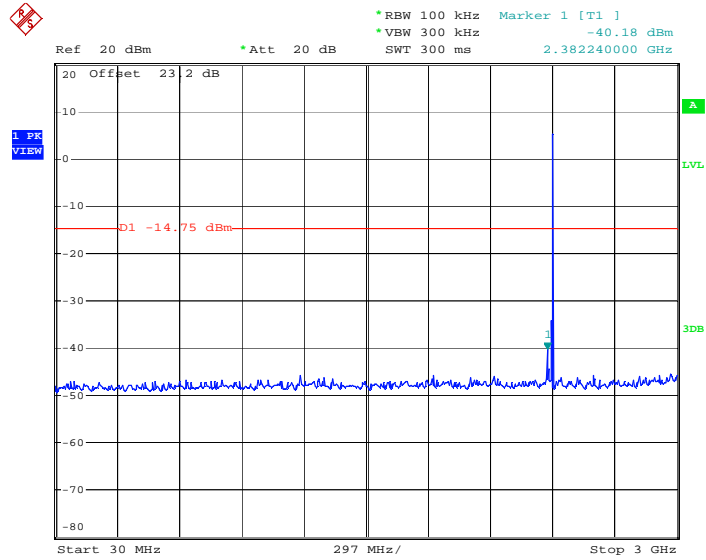

Date: 10.APR.2012 22:28:01

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

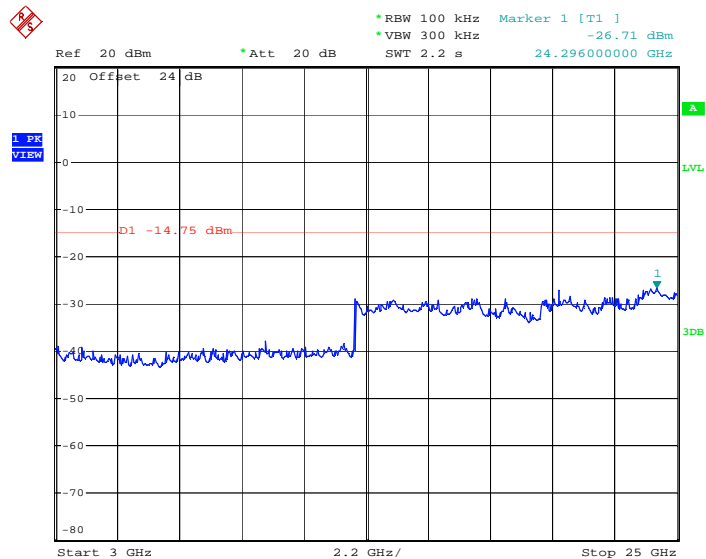


Date: 10.APR.2012 22:28:24




Test Mode :	Mode 8	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Book Lin

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

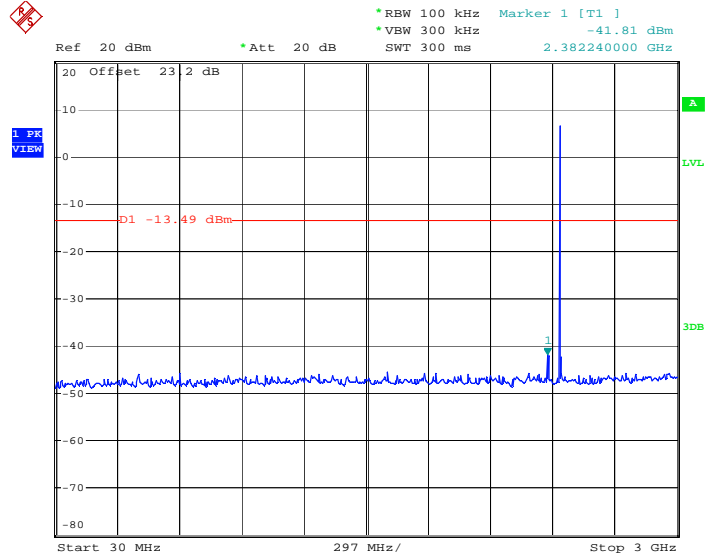

Date: 10.APR.2012 22:03:14

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

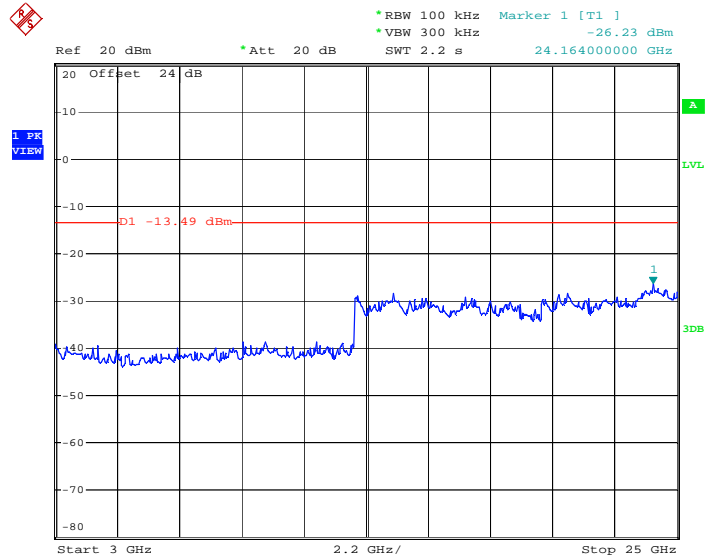


Date: 10.APR.2012 22:03:28




Test Mode :	Mode 9	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Book Lin

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

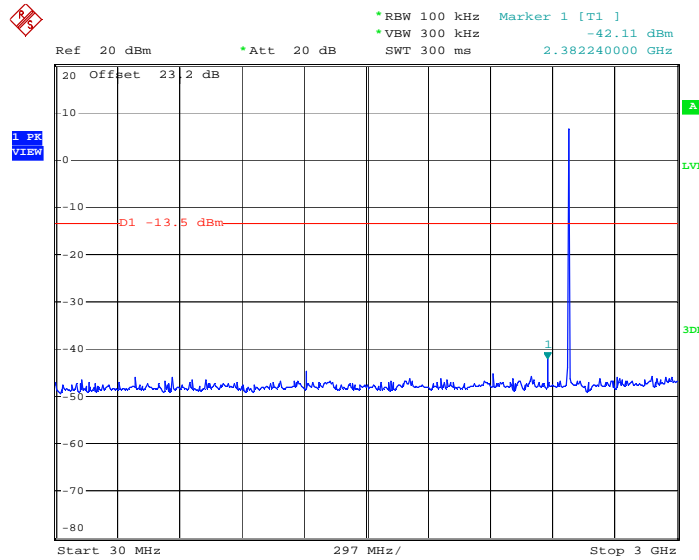

Date: 10.APR.2012 22:14:43

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

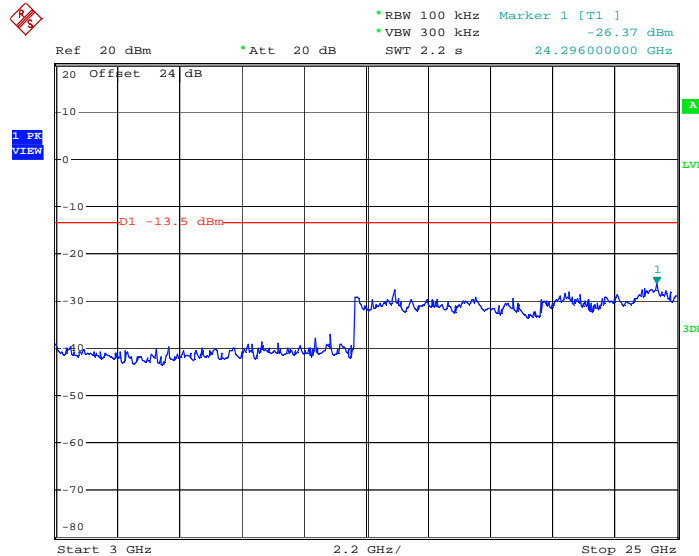

Date: 10.APR.2012 22:15:06

3.8 AC Conducted Emission Measurement

3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

3.8.3 Test Procedures


1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.8.4 Test Setup

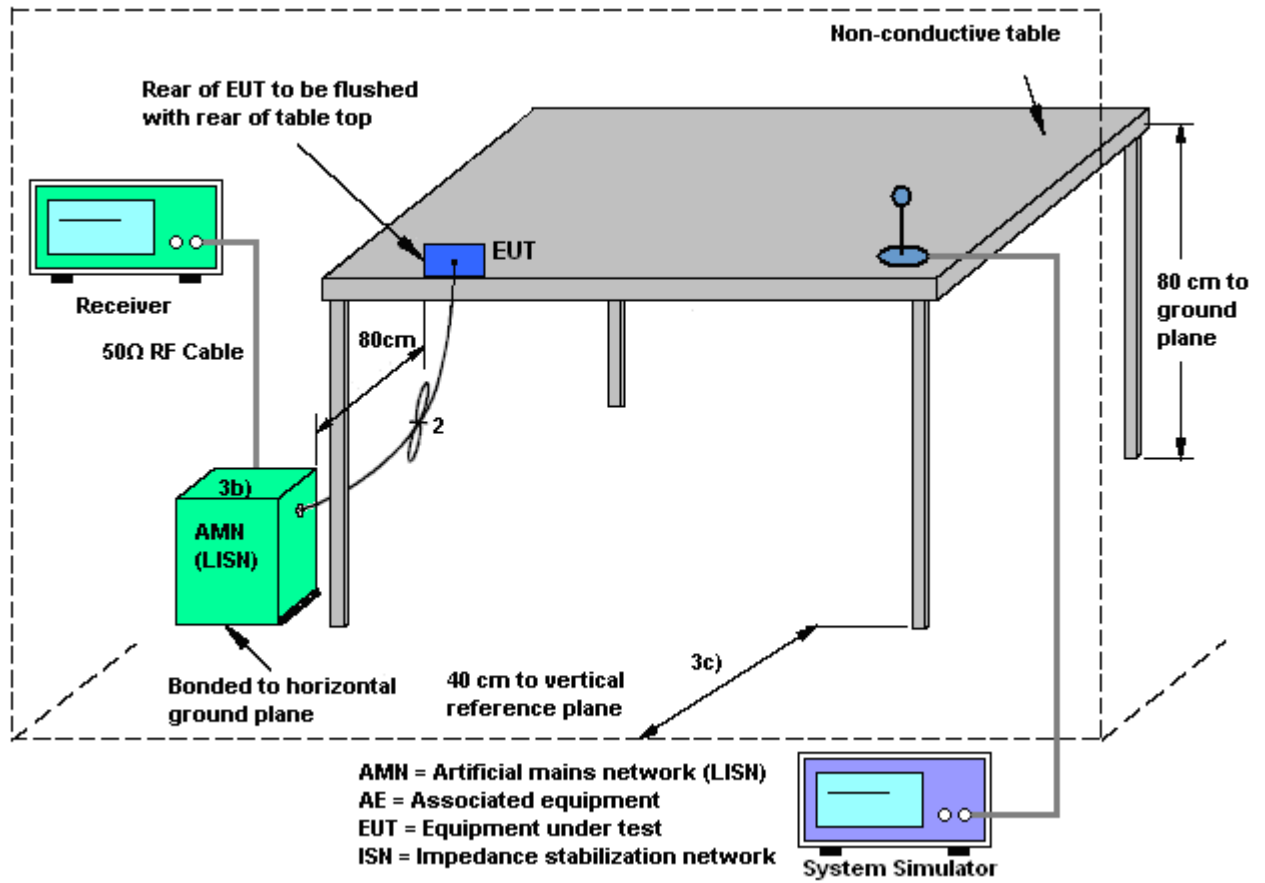

3.8.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~23°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	48~49%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + WLAN (2.4G) Link + Bluetooth Link + MP3 + Camera + Sleeve (USB Port) + USB Cable (Data Link with Notebook) + Adapter 1 + Battery		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

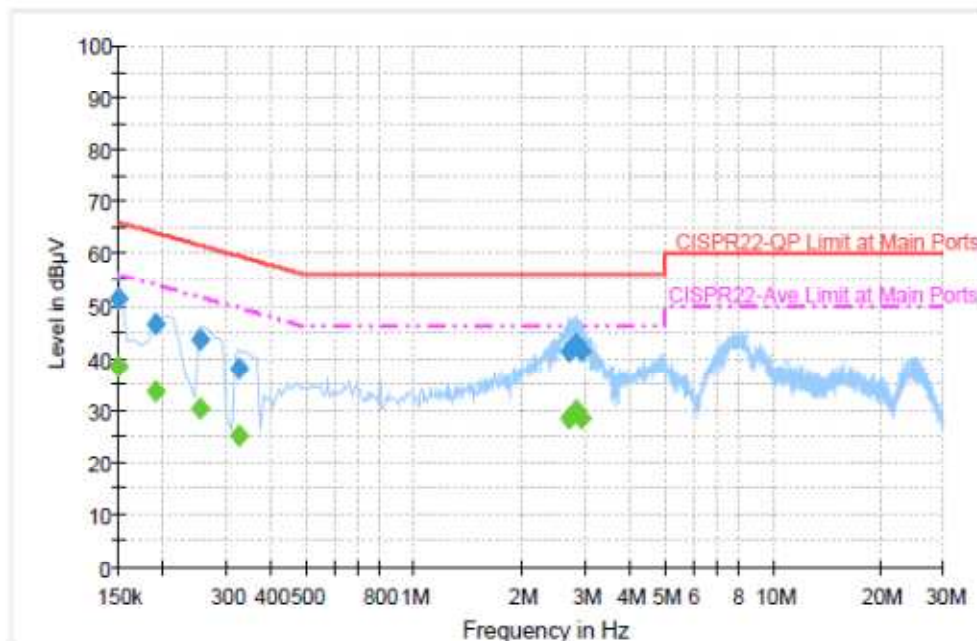


Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	51.4	Off	L1	19.4	14.6	66.0
0.190000	46.6	Off	L1	19.4	17.4	64.0
0.254000	43.6	Off	L1	19.4	18.0	61.6
0.326000	38.0	Off	L1	19.4	21.6	59.6
2.718000	41.3	Off	L1	19.4	14.7	56.0
2.822000	42.9	Off	L1	19.4	13.1	56.0
2.950000	41.5	Off	L1	19.4	14.5	56.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	38.5	Off	L1	19.4	17.5	56.0
0.190000	33.5	Off	L1	19.4	20.5	54.0
0.254000	30.4	Off	L1	19.4	21.2	51.6
0.326000	25.2	Off	L1	19.4	24.4	49.6
2.718000	28.4	Off	L1	19.4	17.6	46.0
2.822000	29.8	Off	L1	19.4	16.2	46.0
2.950000	28.3	Off	L1	19.4	17.7	46.0

Test Mode :	Mode 1	Temperature :	22~23°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	48~49%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + WLAN (2.4G) Link + Bluetooth Link + MP3 + Camera + Sleeve (USB Port) + USB Cable (Data Link with Notebook) + Adapter 1 + Battery		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

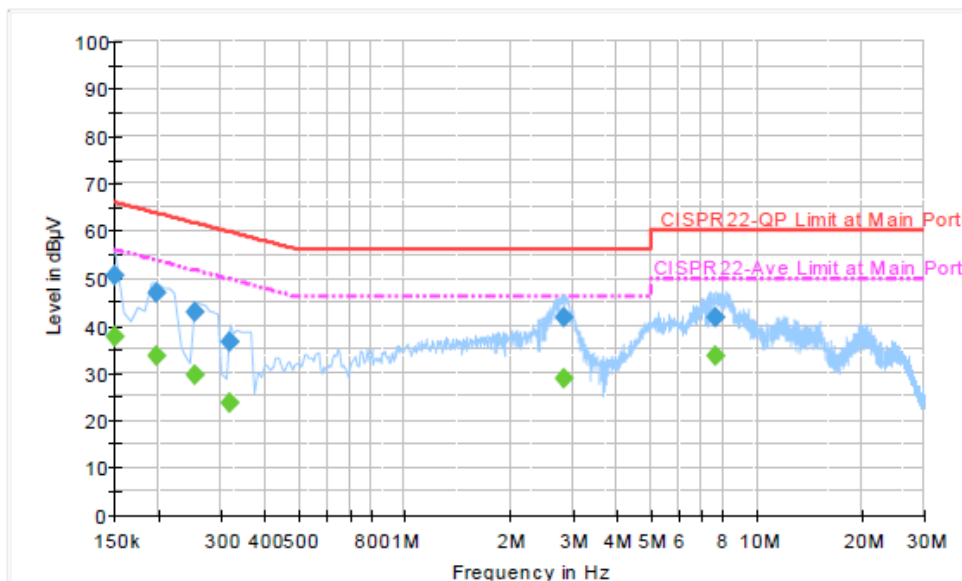

Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	50.5	Off	N	19.4	15.5	66.0
0.198000	46.8	Off	N	19.4	16.9	63.7
0.254000	42.7	Off	N	19.4	18.9	61.6
0.318000	36.7	Off	N	19.4	23.1	59.8
2.846000	41.6	Off	N	19.5	14.4	56.0
7.686000	41.7	Off	N	19.6	18.3	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	37.6	Off	N	19.4	18.4	56.0
0.198000	33.6	Off	N	19.4	20.1	53.7
0.254000	29.7	Off	N	19.4	21.9	51.6
0.318000	23.8	Off	N	19.4	26.0	49.8
2.846000	28.7	Off	N	19.5	17.3	46.0
7.686000	33.6	Off	N	19.6	16.4	50.0

3.9 Radiated Emission Measurement

3.9.1 Limit of Radiated Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.9.2 Measuring Instruments


See list of measuring instruments of this test report.

3.9.3 Test Procedures


1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. Use the following spectrum analyzer settings:
 - (1) Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 KHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
 - (2) Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.
 Distance extrapolation factor = $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$ (dB)
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.
4. Measured average value for the peak value is greater than 54 dBuV/m

3.9.4 Test Setup


For radiated emissions below 30MHz

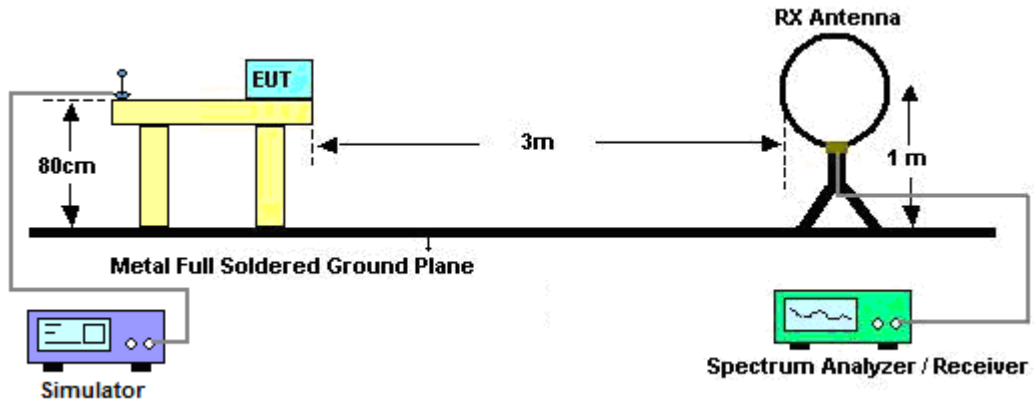

For radiated emissions from 30MHz to 1GHz

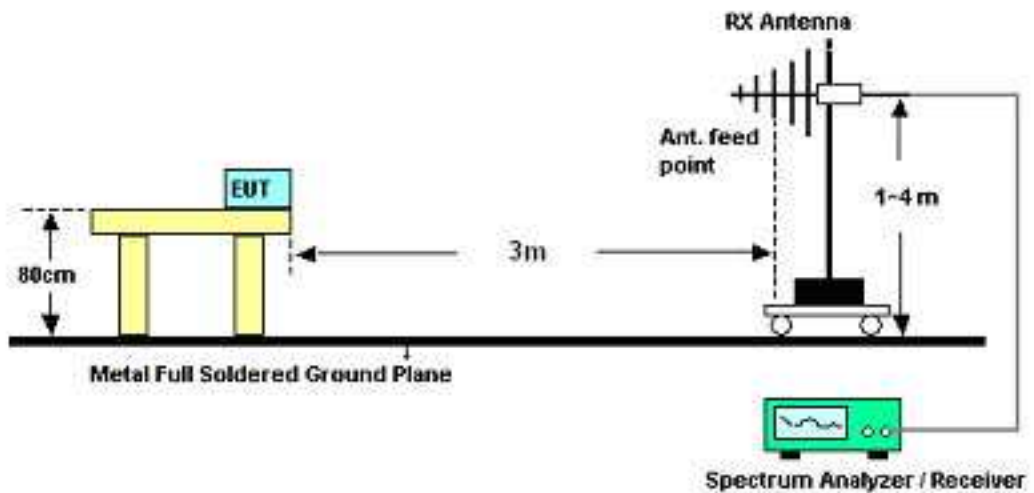

For radiated emissions above 1GHz

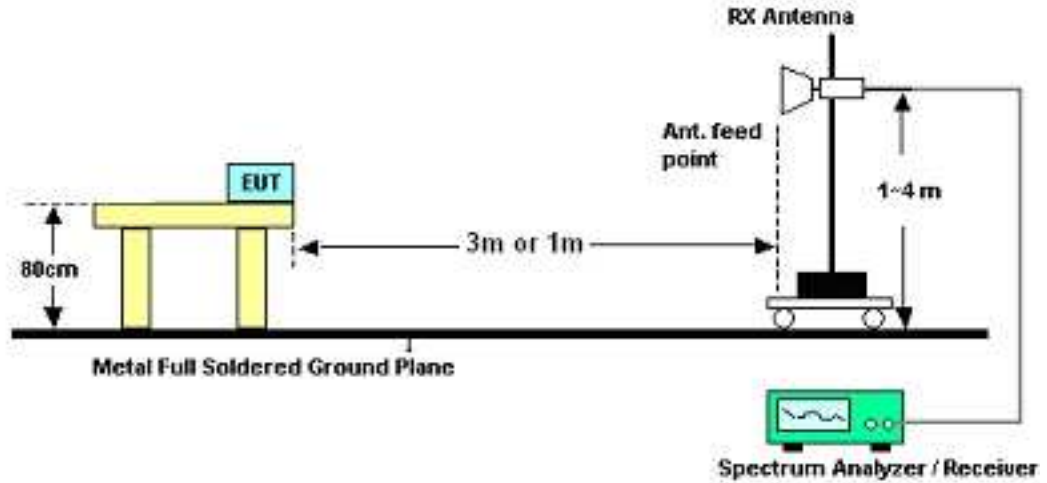

3.9.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.9.6 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	21~25°C
Test Channel :	00	Relative Humidity :	49~54%
Test Engineer :	Kyle Jhuang, Ivan Chiang, and David Yang	Polarization :	Horizontal
Remark :	2402 MHz is fundamental signals which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.7	19.98	-20.02	40	35.09	15.8	0.56	31.47	-	-	Peak
238.17	26.3	-19.7	46	44.35	11.85	1.52	31.42	-	-	Peak
264.09	29.13	-16.87	46	46.03	12.89	1.61	31.4	-	-	Peak
358.1	33.48	-12.52	46	47.44	15.27	2.04	31.27	137	245	Peak
383.3	27.31	-18.69	46	40.38	16.05	2.11	31.23	-	-	Peak
646.5	22.07	-23.93	46	29.82	20.29	2.83	30.87	-	-	Peak
2372	59.5	-14.5	74	55.19	32.16	5.99	33.84	174	326	Peak
2372	34.51	-19.49	54	30.2	32.16	5.99	33.84	174	326	Average
2388.09	60.24	-13.76	74	55.88	32.18	6.03	33.85	174	326	Peak
2388.09	35.76	-18.24	54	31.4	32.18	6.03	33.85	174	326	Average
2402	88.88	-	-	84.52	32.18	6.03	33.85	174	326	Average
2402	106.76	-	-	102.38	32.2	6.03	33.85	174	326	Peak
2500	44.43	-29.57	74	39.85	32.3	6.18	33.9	174	326	Peak
2500	32.96	-21.04	54	28.38	32.3	6.18	33.9	174	326	Average
4804	50.38	-23.62	74	66.34	34.06	9.12	59.14	100	0	Peak



Test Mode :	Mode 1	Temperature :	21~25°C
Test Channel :	00	Relative Humidity :	49~54%
Test Engineer :	Kyle Jhuang, Ivan Chiang, and David Yang	Polarization :	Vertical
Remark :	1. 2402 MHz is fundamental signals which can be ignored. 2. 7206 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 104.93 dBuV/m - 20dB = 84.93 dBuV/m.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
33.78	30.28	-9.72	40	45.61	15.57	0.57	31.47	100	44	Peak
51.33	24.68	-15.32	40	47.49	8.02	0.71	31.54	-	-	Peak
122.34	24.5	-19	43.5	43.41	11.54	1.11	31.56	-	-	Peak
358.1	23.33	-22.67	46	37.29	15.27	2.04	31.27	-	-	Peak
505.8	20.88	-25.12	46	31.16	18.32	2.46	31.06	-	-	Peak
769.7	24	-22	46	29.61	21.99	3.09	30.69	-	-	Peak
2372	58.27	-15.73	74	53.96	32.16	5.99	33.84	100	322	Peak
2372	34.36	-19.64	54	30.05	32.16	5.99	33.84	100	322	Average
2388.09	59.76	-14.24	74	55.4	32.18	6.03	33.85	100	322	Peak
2388.09	35.62	-18.38	54	31.26	32.18	6.03	33.85	100	322	Average
2402	87.23	-	-	82.87	32.18	6.03	33.85	100	322	Average
2402	104.93	-	-	100.55	32.2	6.03	33.85	100	322	Peak
2500	44.93	-29.07	74	40.35	32.3	6.18	33.9	100	322	Peak
2500	32.87	-21.13	54	28.29	32.3	6.18	33.9	100	322	Average
4804	46.1	-27.9	74	62.06	34.06	9.12	59.14	100	0	Peak
7206	45.25	-39.68	84.93	57.79	35.53	10.02	58.09	100	0	Peak



Test Mode :	Mode 2	Temperature :	21~25°C
Test Channel :	39	Relative Humidity :	49~54%
Test Engineer :	Kyle Jhuang, Ivan Chiang, and David Yang	Polarization :	Horizontal
Remark :	2441 MHz is fundamental signals which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
33.78	20.21	-19.79	40	35.54	15.57	0.57	31.47	-	-	Peak
264.09	30.34	-15.66	46	47.24	12.89	1.61	31.4	-	-	Peak
287.85	33.35	-12.65	46	49.73	13.27	1.68	31.33	-	-	Peak
358.1	35.42	-10.58	46	49.38	15.27	2.04	31.27	142	176	Peak
430.9	26.42	-19.58	46	38.23	17.07	2.25	31.13	-	-	Peak
687.8	24.12	-21.88	46	31.29	20.75	2.91	30.83	-	-	Peak
2390	54.04	-19.96	74	49.68	32.18	6.03	33.85	176	325	Peak
2390	34.07	-19.93	54	29.71	32.18	6.03	33.85	176	325	Average
2441	106.52	-	-	102.05	32.24	6.11	33.88	176	325	Peak
2441	88.77	-	-	84.3	32.24	6.11	33.88	176	325	Average
2492	49.69	-24.31	74	45.11	32.3	6.18	33.9	176	325	Peak
2492	33.36	-20.64	54	28.78	32.3	6.18	33.9	176	325	Average
4882	49.73	-24.27	74	65.55	34.08	9.14	59.04	100	0	Peak



Test Mode :	Mode 2	Temperature :	21~25°C
Test Channel :	39	Relative Humidity :	49~54%
Test Engineer :	Kyle Jhuang, Ivan Chiang, and David Yang	Polarization :	Vertical
Remark :	2441 MHz is fundamental signals which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.7	30.08	-9.92	40	45.19	15.8	0.56	31.47	103	326	Peak
51.06	24.54	-15.46	40	47.35	8.02	0.71	31.54	-	-	Peak
204.42	28.48	-15.02	43.5	49.18	9.44	1.34	31.48	-	-	Peak
358.1	26.52	-19.48	46	40.48	15.27	2.04	31.27	-	-	Peak
533.8	19.99	-26.01	46	29.74	18.74	2.52	31.01	-	-	Peak
772.5	23.12	-22.88	46	28.68	22.03	3.1	30.69	-	-	Peak
2372	56.84	-17.16	74	52.53	32.16	5.99	33.84	100	324	Peak
2372	33.53	-20.47	54	29.22	32.16	5.99	33.84	100	324	Average
2388	58.56	-15.44	74	54.2	32.18	6.03	33.85	100	324	Peak
2388	33.87	-20.13	54	29.51	32.18	6.03	33.85	100	324	Average
2441	87.04	-	-	82.57	32.24	6.11	33.88	100	324	Average
2441	104.97	-	-	100.5	32.24	6.11	33.88	100	324	Peak
2492	33.12	-20.88	54	28.54	32.3	6.18	33.9	100	324	Average
2492	44.96	-29.04	74	40.38	32.3	6.18	33.9	100	324	Peak
4882	44.2	-29.8	74	60.02	34.08	9.14	59.04	100	0	Peak
7323	44.75	-29.25	74	57.39	35.44	10.06	58.14	100	0	Peak



Test Mode :	Mode 3	Temperature :	21~25°C
Test Channel :	78	Relative Humidity :	49~54%
Test Engineer :	Kyle Jhuang, Ivan Chiang, and David Yang	Polarization :	Horizontal
Remark :	2480 MHz is fundamental signals which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.27	31.54	-8.46	40	42.65	20	0.53	31.64	110	168	Peak
45.93	30.19	-9.81	40	50.95	10.1	0.66	31.52	-	-	Peak
96.69	16.59	-26.91	43.5	37.6	9.44	0.98	31.43	-	-	Peak
384	24.36	-21.64	46	37.71	15.58	2.11	31.04	-	-	Peak
419.7	24.36	-21.64	46	36.79	16.42	2.21	31.06	-	-	Peak
540.1	24.63	-21.37	46	34.29	18.78	2.53	30.97	-	-	Peak
2366	32.58	-21.42	54	28.53	32.01	5.99	33.95	100	16	Average
2366	54.48	-19.52	74	50.43	32.01	5.99	33.95	100	16	Peak
2386	33.2	-20.8	54	29.07	32.06	6.03	33.96	100	16	Average
2386	56.79	-17.21	74	52.66	32.06	6.03	33.96	100	16	Peak
2480	88.04	-	-	83.68	32.18	6.18	34	100	16	Average
2480	106.54	-	-	102.18	32.18	6.18	34	100	16	Peak
2483.5	38.8	-15.2	54	34.44	32.18	6.18	34	100	16	Average
2483.5	70.55	-3.45	74	66.19	32.18	6.18	34	100	16	Peak
4960	46.12	-27.88	74	62.3	34.1	9.16	59.44	100	0	Peak



Test Mode :	Mode 3	Temperature :	21~25°C
Test Channel :	78	Relative Humidity :	49~54%
Test Engineer :	Kyle Jhuang, Ivan Chiang, and David Yang	Polarization :	Vertical
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.81	32.02	-7.98	40	43.84	19.28	0.54	31.64	-	-	Peak
43.77	35.09	-4.91	40	54.89	11.1	0.64	31.54	106	214	Peak
52.14	33.08	-6.92	40	56.13	7.7	0.71	31.46	-	-	Peak
540.1	29.89	-16.11	46	39.55	18.78	2.53	30.97	-	-	Peak
660.5	29.61	-16.39	46	36.6	20.28	2.86	30.13	-	-	Peak
836.9	32.91	-13.09	46	36.92	22.47	3.24	29.72	-	-	Peak
2364	32.78	-21.22	54	28.73	32.01	5.99	33.95	130	36	Average
2364	56.3	-17.7	74	52.25	32.01	5.99	33.95	130	36	Peak
2386	33.17	-20.83	54	29.04	32.06	6.03	33.96	130	36	Average
2386	56.74	-17.26	74	52.61	32.06	6.03	33.96	130	36	Peak
2480	87.14	-	-	82.78	32.18	6.18	34	130	36	Average
2480	105.21	-	-	100.85	32.18	6.18	34	130	36	Peak
2483.5	37.65	-16.35	54	33.29	32.18	6.18	34	130	36	Average
2483.5	68.87	-5.13	74	64.51	32.18	6.18	34	130	36	Peak
4960	48.57	-25.43	74	64.75	34.1	9.16	59.44	100	0	Peak



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 13, 2011	Apr. 05, 2012 ~ Apr. 10, 2012	Jun. 12, 2012	Conducted (TH02-HY)
Bluetooth Base Station	R&S	CBT32	100519	N/A	Jun. 01, 2011	Apr. 05, 2012 ~ Apr. 10, 2012	May 31, 2012	Conducted (TH02-HY)
EMI Test Receive	R&S	ESCS 30	100356	9KHz ~ 2.75GHz	Oct. 27, 2011	Mar. 27, 2012	Oct. 26, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz ~ 30MHz	Dec. 09, 2011	Mar. 27, 2012	Dec. 08, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz ~ 30MHz	Dec. 06, 2011	Mar. 27, 2012	Dec. 05, 2012	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	Mar. 27, 2012	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	117995	N/A	Jul. 28, 2011	Mar. 27, 2012	Jul. 27, 2012	Conduction (CO05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 22, 2011	Jun. 02, 2011 ~ Apr. 11, 2012	Oct. 21, 2012	Radiation (03CH07-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 31, 2010	Jun. 02, 2011 ~ Apr. 11, 2012	Oct. 30, 2011	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP30	101067	9KHz ~ 30GHz	Dec. 06, 2011	Jun. 02, 2011 ~ Apr. 11, 2012	Dec. 05, 2012	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9KHz ~ 30GHz	Dec. 03, 2010	Jun. 02, 2011 ~ Apr. 11, 2012	Dec. 02, 2011	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 10, 2011	Jun. 02, 2011 ~ Apr. 11, 2012	Aug. 09, 2012	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2010	Jun. 02, 2011 ~ Apr. 11, 2012	Aug. 18, 2011	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz ~ 26.5GHz	Dec. 05, 2011	Jun. 02, 2011 ~ Apr. 11, 2012	Dec. 04, 2012	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec. 06, 2010	Jun. 02, 2011 ~ Apr. 11, 2012	Dec. 05, 2011	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32dB.GAIN	Feb. 27, 2012	Jun. 02, 2011 ~ Apr. 11, 2012	Feb. 26, 2013	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32dB.GAIN	Mar. 29, 2011	Jun. 02, 2011 ~ Apr. 11, 2012	Mar. 28, 2012	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 29, 2010	Jun. 02, 2011 ~ Apr. 11, 2012	Jul. 28, 2012	Radiation (03CH07-HY)
Bluetooth Base Station	R&S	CBT32	100522	N/A	Jan.13, 2011	Jun. 02, 2011 ~ Apr. 11, 2012	Jan.13, 2013	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty Uc(y)	2.36				
Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.72				



Appendix A. Photographs of EUT

Please refer to Sporton report number EP1D0814 as below.