



FCC TEST REPORT

for

47 CFR Part 22H, 24E

Equipment : Hand-held Micro-computer
Trade Name : WORKABOUT PRO
Model No. : 7525C Series / 7525M-E Series
FCC ID : GM37525RADA
IC ID : 2739D-7525RADA
Tx Frequency Range : GSM 850: 824.2~848.8MHz
PCS 1900: 1850.2~1909.8MHz
Max. ERP/EIRP Power : GSM 850: 0.84W
PCS 1900: 1.10W
Emission Designator : 300 KGXW
Applicant : Psion Teklogix Inc.
2100 Meadowvale Blvd., Mississauga, Ontario, L5N 7J9,
Canada

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**
- The data shown in this test report were carried out on Jan. 20, 2006 at **Sporton International Inc. LAB.**
- Report No.: FG611121, Report Version: Rev. 03.

Dr. Daniel Lee
EMC/SAR Director

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

Report Version: Rev. 03



Table of Contents

History of this test report.....ii

1. General Information 1

 1.1. Applicant1

 1.2. Manufacturer1

 1.3. Basic Description of Equipment under Test.....1

 1.4. Feature of Equipment under Test2

 1.5. Details of Model Name.....3

 1.6. Report Date.....3

2 Test Configuration of Equipment under Test 4

 2.1 Test Manner4

 2.2 Test Mode4

 2.3 Connection Diagram of Test System4

 2.4 Ancillary Equipment List.....4

3. General Information of Test Site 5

 3.1 Test Voltage5

 3.2 Test in Compliance with5

 3.3 Frequency Range Investigated5

 3.4 Test Distance5

4. Test Data and Test Result..... 6

 4.1 List of Measurements and Examinations6

 4.2 RF Output Power7

 4.3 ERP / EIRP Measurement8

 4.4 Occupied Bandwidth and Band Edge Measurement 11

 4.5 Conducted Emission20

 4.6 Field Strength of Spurious Radiation30

 4.7 Frequency Stability (Temperature Variation)39

 4.8 Frequency Stability (Voltage Variation).....41

5 List of Measurement Equipments 42

6 Uncertainty Evaluation..... 43

Appendix A. Photographs of EUT External

Appendix B. Photographs of EUT Internal

Appendix C. Photographs of Setup



1. General Information

1.1. Applicant

Psion Teklogix Inc.

2100 Meadowvale Blvd., Mississauga, Ontario, L5N 7J9, Canada

1.2 Manufacturer

Askey Computer Corp.

10F, No. 119, CHIENKANG RD., CHUNG-HO, TAIPEI, TAIWAN, R.O.C.

1.3 Basic Description of Equipment under Test

Equipment : Hand-held Micro-computer
Trade Name : WORKABOUT PRO
Model No. : 7525C Series / 7525M-E Series
FCC ID : GM37525RADA
IC ID : 2739D-7525RADA
Power Supply Type : From Battery 3.8V

**1.4 Feature of Equipment under Test**

DUT Type :	Hand-held Micro-computer
Trade Name :	WORKABOUT PRO
Model Name :	7525C Series / 7525M-E Series
FCC ID :	GM37525RADA
IC ID :	2739D-7525RADA
Tx Frequency :	GSM 850: 824 ~ 849 MHz PCS 1900: 1850 ~1910 MHz Bluetooth: 2400~2483.5 MHz
Rx Frequency :	GSM 850: 869 ~ 894 MHz PCS 1900: 1930 ~ 1990 MHz Bluetooth: 2400~2483.5 MHz
Antenna Type :	Fixed Internal
Maximum Output Power to Antenna :	GSM 850: 32.05 dBm PCS 1900: 29.35 dBm BT : 3.28 dBm
Maximum ERP/EIRP :	GSM 850: 0.84 W (29.25 dBm) PCS 1900: 1.10 W (30.42 dBm)
HW Version :	B 2.4
SW Version :	02.001 (SV10)
Power Rating (DC/AC, Voltage) :	3.8V / 810mA
Digital Modulation Emission :	GMSK
Type of Emission :	300 KGXW
DUT Stage :	Production Unit



1.5 Details of Model Name

7525C series	RA3025-G1	RA2040-G1	BTL040	Model no.
7525C			Embedded	7525C
	Embedded		Embedded	7525C+RA3025-G1
		Embedded	Embedded	7525C+RA2040-G1
	Embedded	Embedded	Embedded	7525C+RA3025-G1+RA2040-G1
7525C-G1			Embedded	7525C-G1
	Embedded		Embedded	7525C-G1+RA3025-G1
		Embedded	Embedded	7525C-G1+RA2040-G1
	Embedded	Embedded	Embedded	7525C-G1+RA3025-G1+RA2040-G1

7525M-E series	RA3025-G1	RA2040-G1	BTL040	Model no.
7525M-E				7525M-E
	Embedded			7525M-E+RA3025-G1
		Embedded		7525M-E+RA2040-G1
	Embedded	Embedded		7525M-E+RA3025-G1+RA2040-G1
7525M-E-G1				7525M-E-G1
	Embedded			7525M-E-G1+RA3025-G1
		Embedded		7525M-E-G1+RA2040-G1
	Embedded	Embedded		7525M-E-G1+RA3025-G1+RA2040-G1

Remark:

1. RA3025-G1 is a Quad-band GSM module which operates in the 850/900/1800/1900 bands.
2. RA2040-G1 is a WLAN 802.11b/g CF card.
3. BTL040 is a class 2 Bluetooth radio module, and its FCC ID is GM37525BTB.
4. Software ensures that WLAN and GSM can not transmit simultaneously.

1.6 Report Date

EUT Received : Jan. 11, 2006

Report Date : Mar. 10, 2006

2 Test Configuration of Equipment under Test


2.1 Test Manner

- a. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range.
- b. During all testings, EUT is in link mode with base station emulator at maximum power level. (PCL=5 for GSM 850 or PCL=0 for PCS 1900)
- c. Frequency range investigated: radiated emission 30 MHz to 9000 MHz for GSM850; 30MHz to 19000 MHz for PCS 1900.

2.2 Test Mode

Application	GSM 850	PCS 1900
Radiated Emission	<input checked="" type="checkbox"/> Mode 1: CH 189 <input checked="" type="checkbox"/> Mode 3: CH 189+Bluetooth CH39	<input checked="" type="checkbox"/> Mode 2: CH 661
Conducted Measurement	<input checked="" type="checkbox"/> Mode 1: CH 128	<input checked="" type="checkbox"/> Mode 2: CH 661

2.3 Connection Diagram of Test System

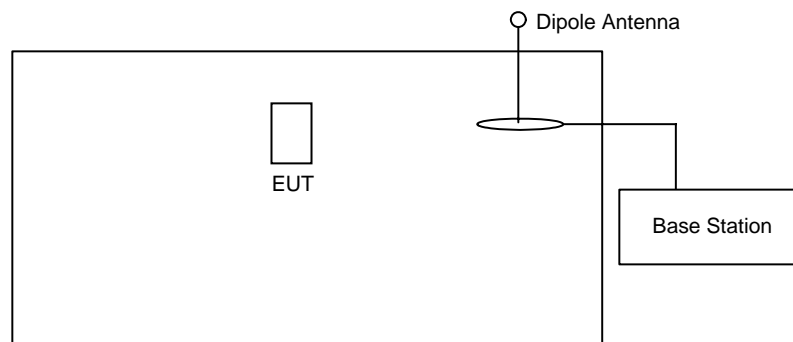

2.4 Ancillary Equipment List

Item	Equipment	Model No.	Serial No.
1.	Base Station(R&S)	CMU200	N/A



3. General Information of Test Site

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055

Test Site No : 03CH06-HY

The chamber meets the characteristics of ANSI C63.4-2003. This site is on file with the FCC. The Industry Canada file number for this site is IC 4088.

3.1 Test Voltage

DC 3.8V

3.2 Test in Compliance with

47 CFR Part 22H, 24E and Part 2.

3.3 Frequency Range Investigated

- a. Radiation: from 30MHz to 9000MHz for GSM 850.
- b. Radiation: from 30 MHz to 19000 MHz for PCS 1900.

3.4 Test Distance

The test distance of radiated emission from antenna to EUT is 3 m.



4. Test Data and Test Result

4.1 List of Measurements and Examinations

FCC Rule	IC Rule	DESCRIPTION OF TEST	Result	Section
§2.1046	RSS-128 §7.1 RSS-133 §6.2	RF Output Power	Passed	4.2
§ 22.913 §24.232	RSS-128 §7.1 RSS-133 §6.2	ERP / EIRP	Passed	4.3
§2.1049, § 22.917, § 24.238(b)	RSS-128 §7.4 RSS-133 §6.3	Occupied Bandwidth & Band Edge Measurement	Passed	4.4
§2.1051	RSS-128 §7.4 RSS-133 §6.3	Conducted Emission	Passed	4.5
§2.1053	RSS-128 §7.4 RSS-133 §6.3	Field Strength of Spurious Radiation	Passed	4.6
§2.1055, § 22.355, §24.235	RSS-128 §9 RSS-133 §7	Frequency Stability vs. Temperature	Passed	4.7
§2.1055, §22.355, §24.235	RSS-128 §9 RSS-133 §7	Frequency Stability vs. Voltage	Passed	4.8

4.2 RF Output Power


4.2.1 Measurement Instruments :

As described in chapter 5 of this test report.

4.2.2 Test Procedure :

1. The transmitter output was connected to power meter and base station through power divider.
2. Set EUT at PCL=5 for GSM 850 and/or PCL=0 for PCS 1900 through base station.
3. Select lowest, middle, and highest channels for each band.

4.2.3 Test Setup Layout :

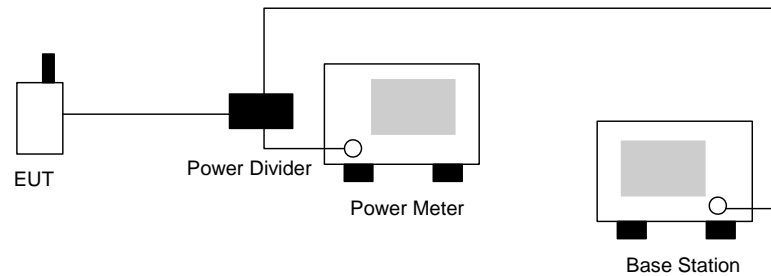

4.2.4 Test Result :

Bands	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM 850	128	824.2 (Low)	32.05	1.603
	189	836.4 (Mid)	32.02	1.592
	251	848.8 (High)	31.98	1.578

Bands	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
PCS 1900	512	1850.2 (Low)	29.35	0.861
	661	1880.0 (Mid)	29.13	0.818
	810	1909.8 (High)	28.92	0.780



4.3 ERP / EIRP Measurement

Equivalent isotropic radiated power measurements by substitution method according to ANSI/TIA/EIA-603-A.

4.3.1 Measurement Instruments

As described in chapter 5 of this test report.

4.3.2 Test Procedure

1. The EUT was placed on a rotatable table with 1.0 meter height in an fully anechoic chamber.
2. The EUT was set 1.2 meters from the receiving antenna which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiated power.
4. The height of the receiving antenna is also kept at 1.0M height.
5. Taking the record of maximum ERP/EIRP.
6. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
7. The conducted power at the terminal of the dipole antenna is measured.
8. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
9. $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

P_s (dBm): Input power to substitution antenna.

G_s (dBi or dBd): Substitution antenna Gain.


$E_t = R_t + AF$

$E_s + R_s + AF$

AF (dB/m): Receive antenna factor

10. R_t : the highest received signal in Spectrum Analyzer for EUT.

4.3.3 Test Setup Layout of ERP/EIRP

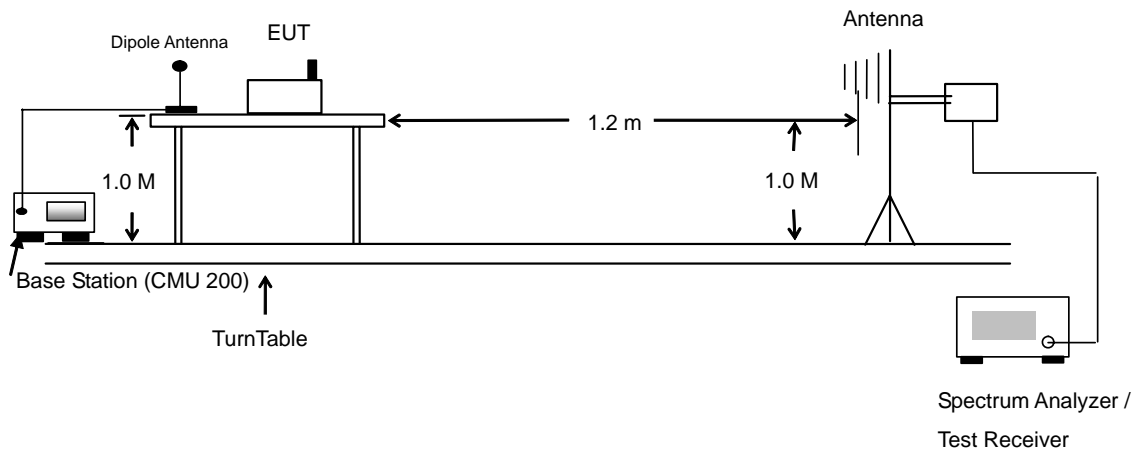



4.3.4 Test Result

GSM 850 Radiated Power ERP					
H Polarization			V Polarization		
Frequency (MHz)	ERP (dBm)	ERP (Watts)	Frequency (MHz)	ERP (dBm)	ERP (Watts)
824.27	28.12	0.65	824.24	26.08	0.41
836.42	28.96	0.79	836.44	26.91	0.49
848.89	29.25	0.84	848.87	27.33	0.54

PCS 1900 Radiated Power EIRP					
H Polarization			V Polarization		
Frequency (MHz)	EIRP (dBm)	EIRP (Watts)	Frequency (MHz)	EIRP (dBm)	EIRP (Watts)
1850.14	29.63	0.92	1850.27	26.56	0.45
1879.94	29.92	0.98	1879.94	26.01	0.40
1909.77	30.42	1.10	1909.77	26.01	0.40

4.4 Occupied Bandwidth and Band Edge Measurement


4.4.1 Measurement Instruments

As described in chapter 5 of this test report.

4.4.2 Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The occupied bandwidth of middle channel for the highest and lowest RF powers were measured.
3. The bandedge of low and high channels for the highest RF powers within the transmitting frequency band were measured. Setting RBW as roughly $BW/100$.


4.4.3 Test Setup Layout

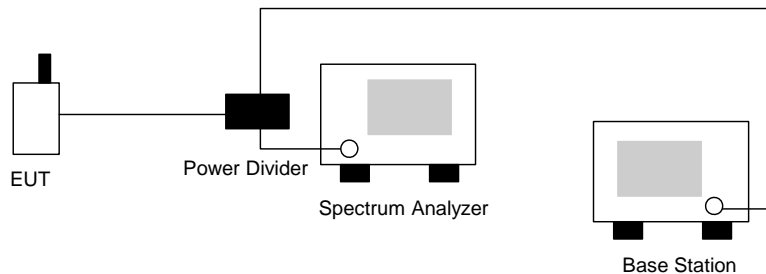



4.4.4 Test Result

- Test Mode : GSM 850 CH128 Lower Band Edge
- Power State : High

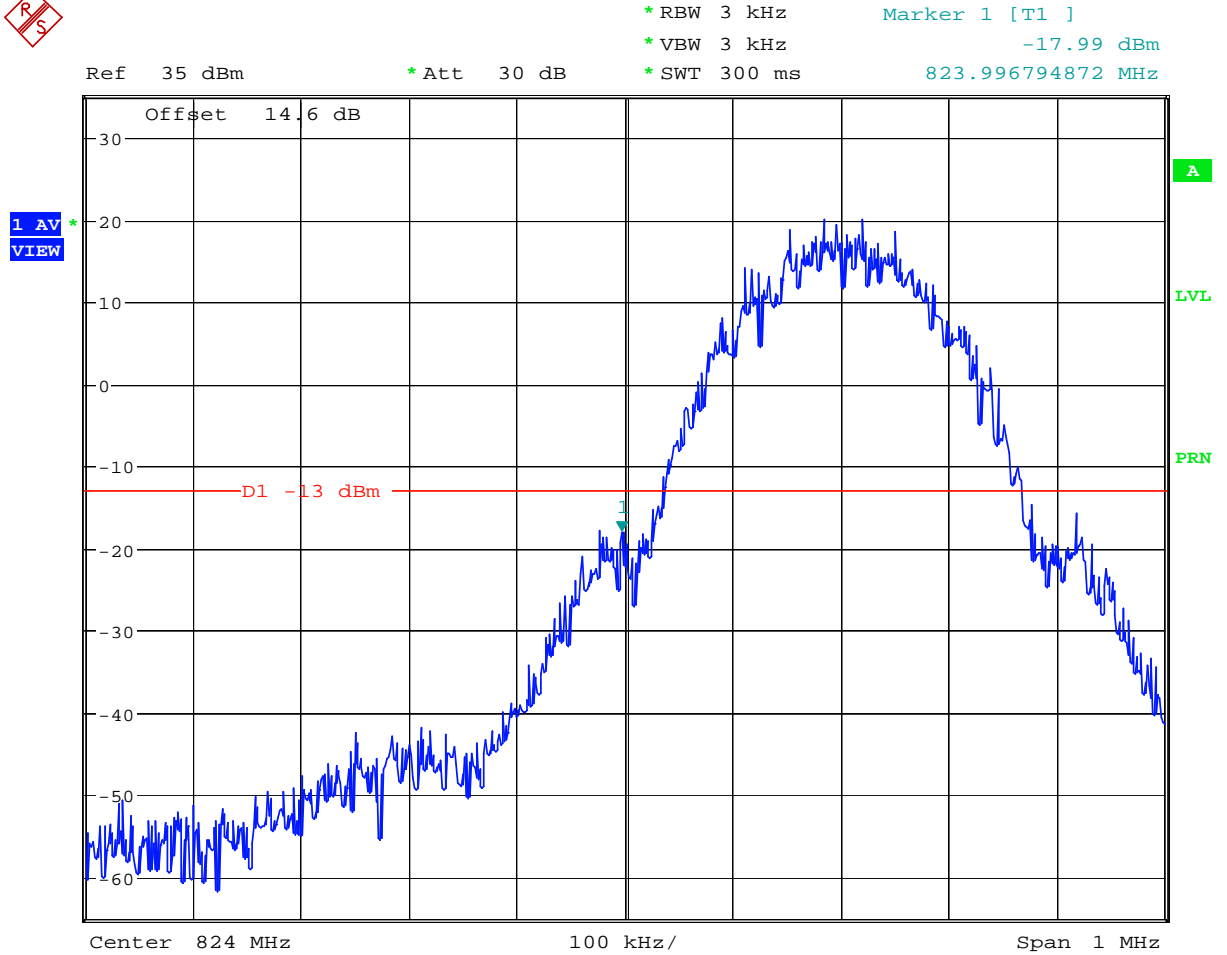

Date: 19.JAN.2006 21:43:07




- Test Mode : GSM 850 CH189 99% Occupied Bandwidth
- Power State : Low



Ref 30 dBm *Att 30 dB *RBW 3 kHz *VBW 3 kHz *SWT 300 ms Marker 1 [T1] -57.58 dBm 836.900000000 MHz


1 PK VIEW

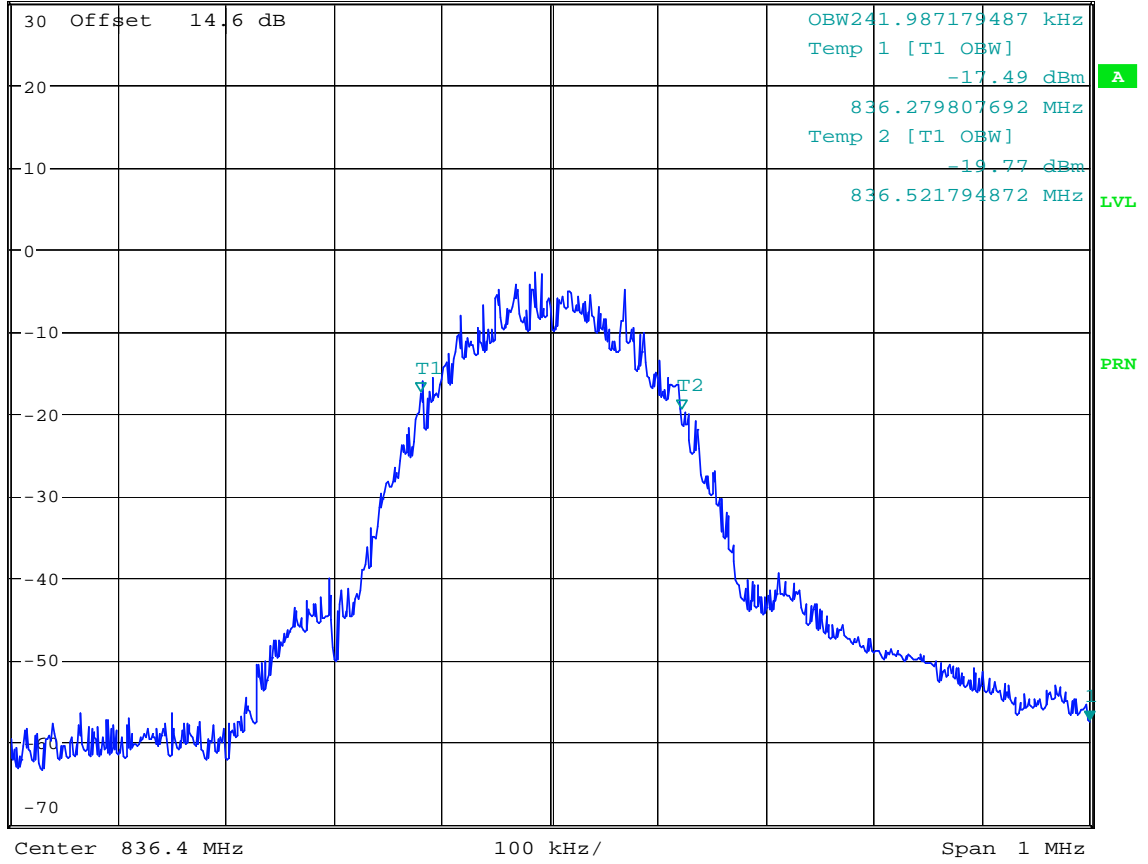

Date: 19.JAN.2006 21:38:20



- Test Mode : GSM 850 CH189 99% Occupied Bandwidth
- Power State : High

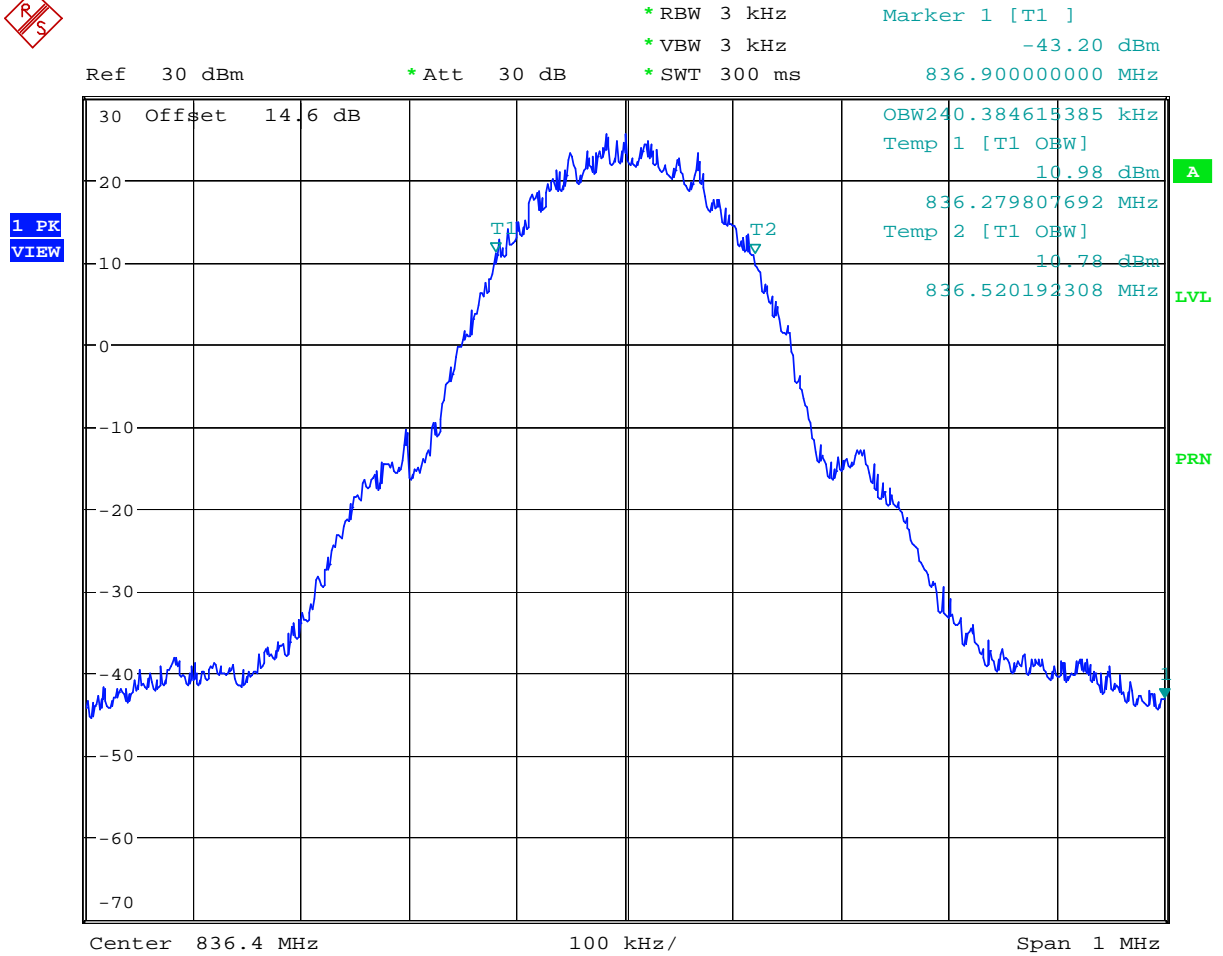


Date: 19.JAN.2006 21:37:26



- Test Mode : GSM 850 CH251 Higher Band Edge
- Power State : High




Ref 35 dBm *Att 30 dB *RBW 3 kHz Marker 1 [T1]
 *VBW 3 kHz -15.01 dBm
 *SWT 300 ms 849.020833333 MHz

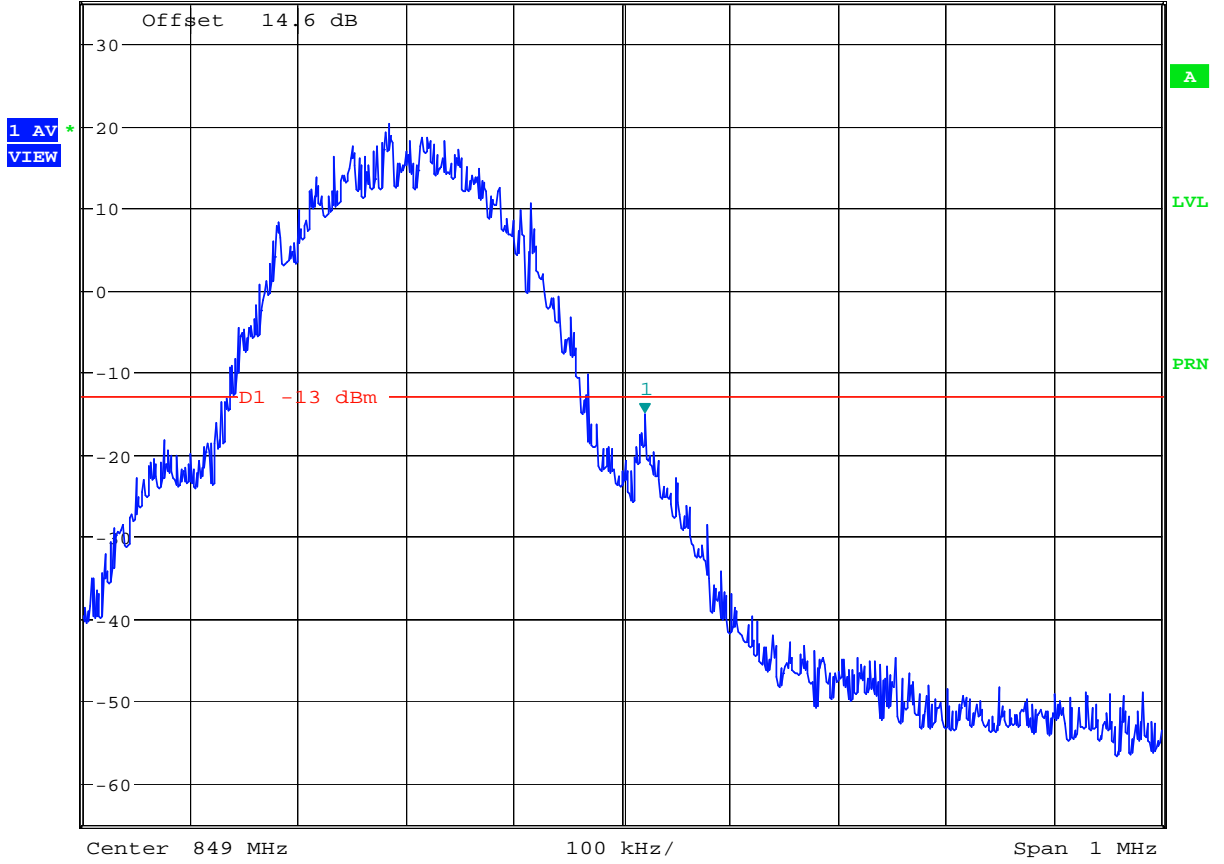

Date: 19.JAN.2006 21:42:20




- Test Mode : PCS 1900 CH512 Lower Band Edge
- Power State : High

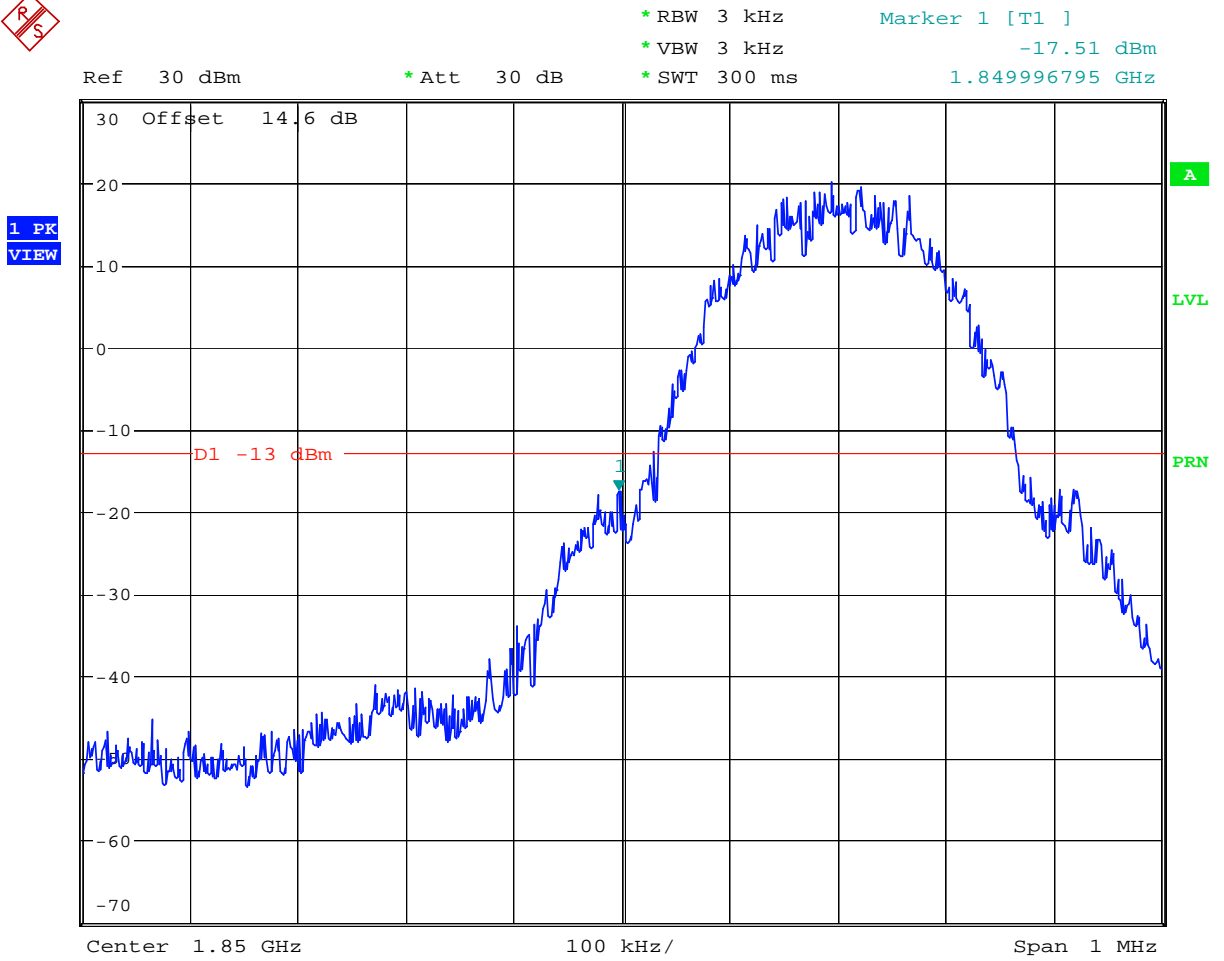

Date: 19.JAN.2006 21:16:19




- Test Mode : PCS 1900 CH661 99% Occupied Bandwidth
- Power State : Low

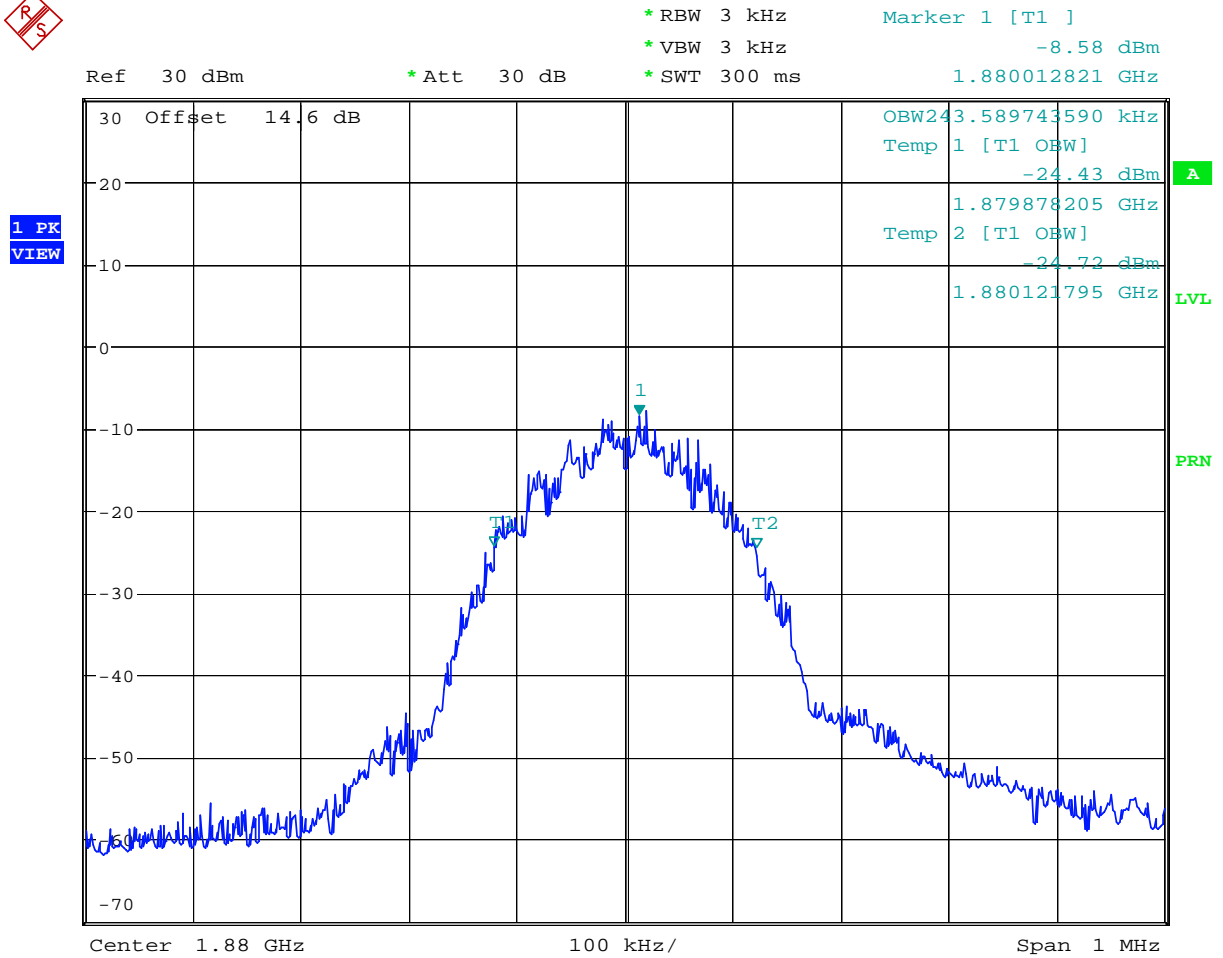

Date: 19.JAN.2006 21:14:26



- Test Mode : PCS 1900 CH661 99% Occupied Bandwidth
- Power State : High

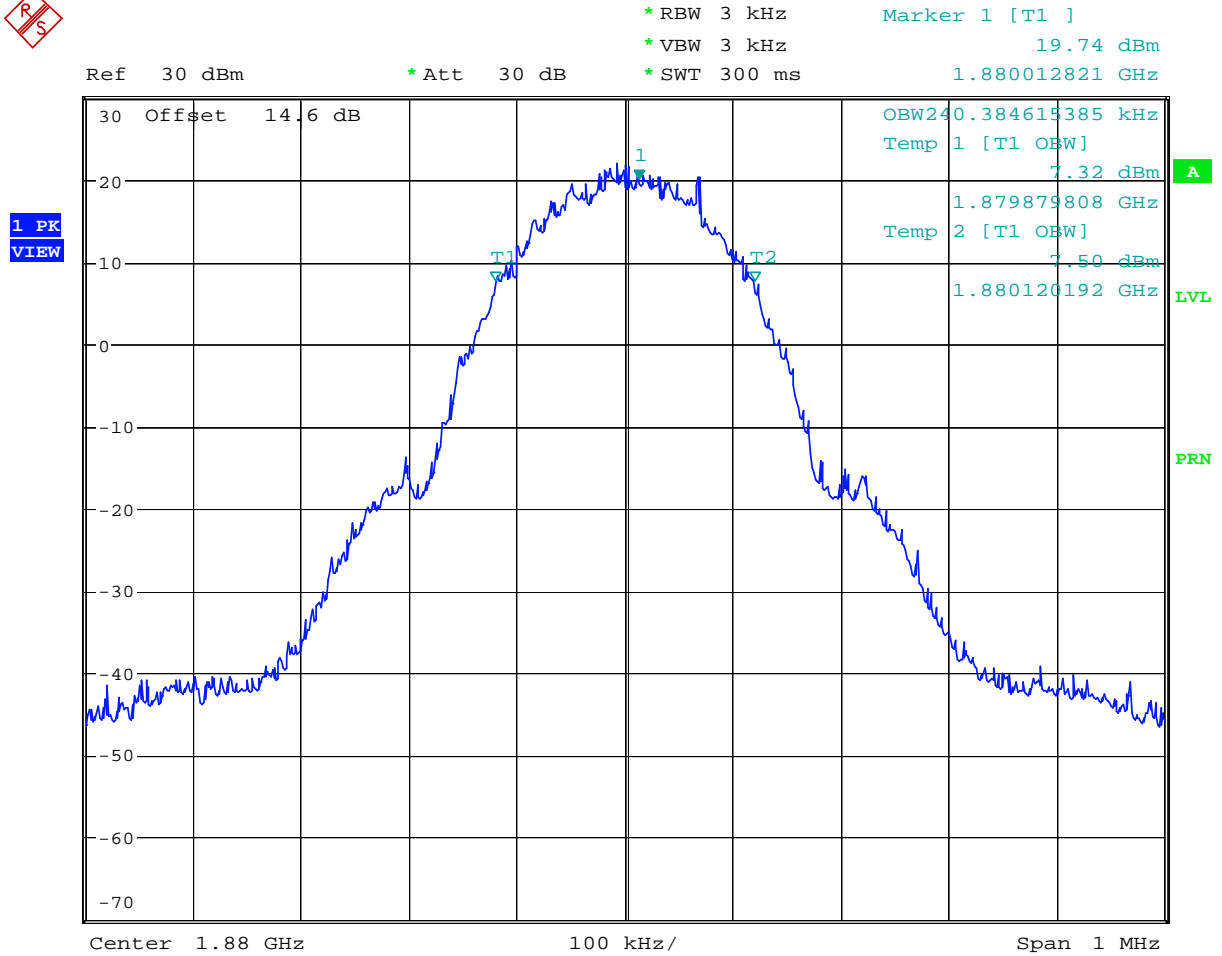


Date: 19.JAN.2006 21:13:26



- Test Mode : PCS 1900 CH810 Higher Band Edge
- Power State : High



Ref 30 dBm *Att 30 dB *RBW 3 kHz Marker 1 [T1] -18.71 dBm
*VBW 3 kHz 1.910017628 GHz
*SWT 300 ms

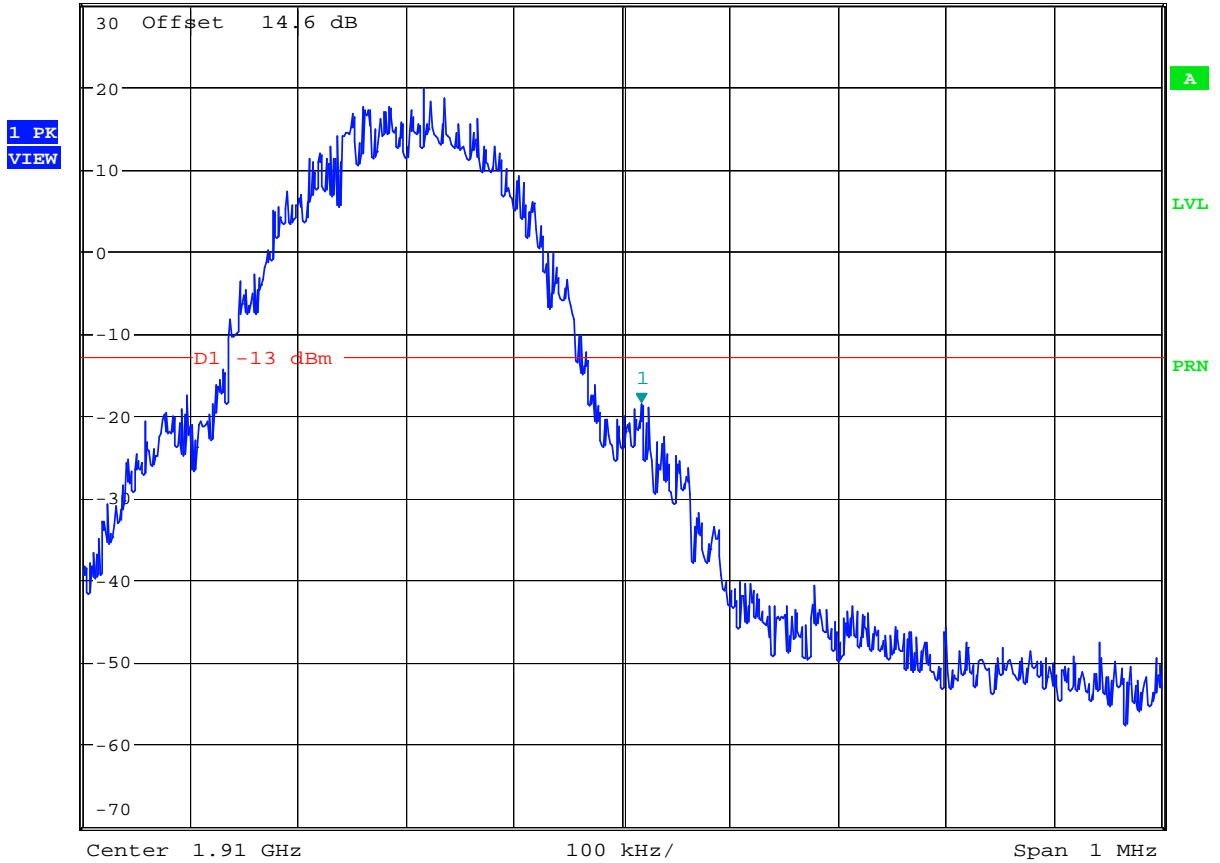

Date: 19.JAN.2006 21:16:57

4.5 Conducted Emission


4.5.1 Measurement Instruments

As described in chapter 5 of this test report.

4.5.2 Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.


4.5.3 Test Setup Layout

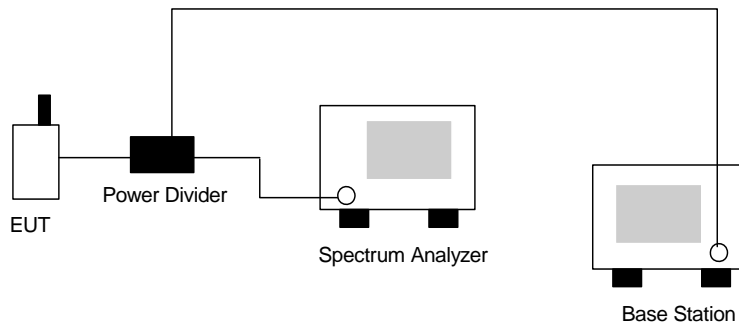



4.5.4 Test Result


- Test Mode : GSM 850 CH189
- Frequency Range : 30M-1G

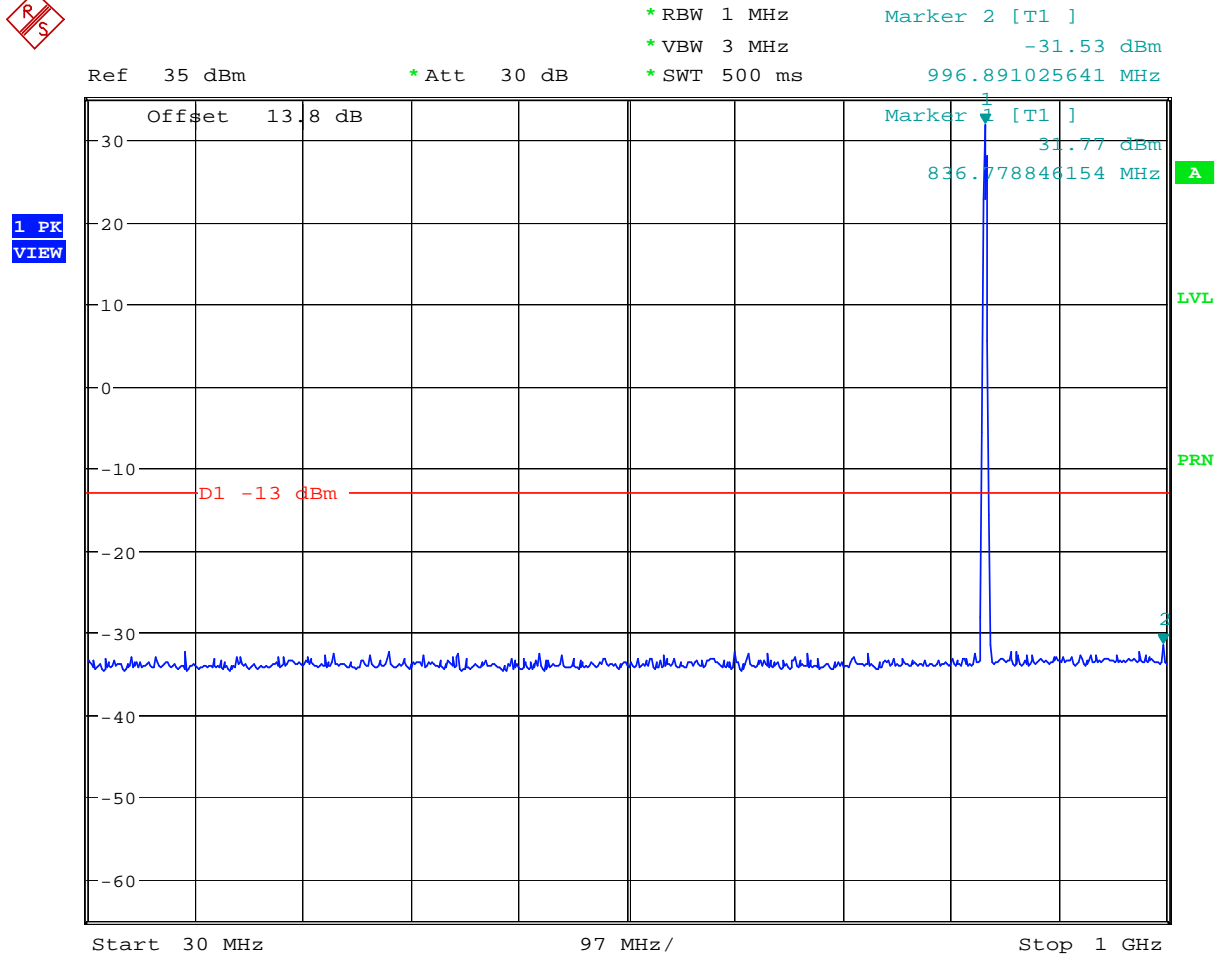

Date: 19.JAN.2006 23:14:28




- Test Mode : GSM 850 CH189
- Frequency Range : 1G-3G

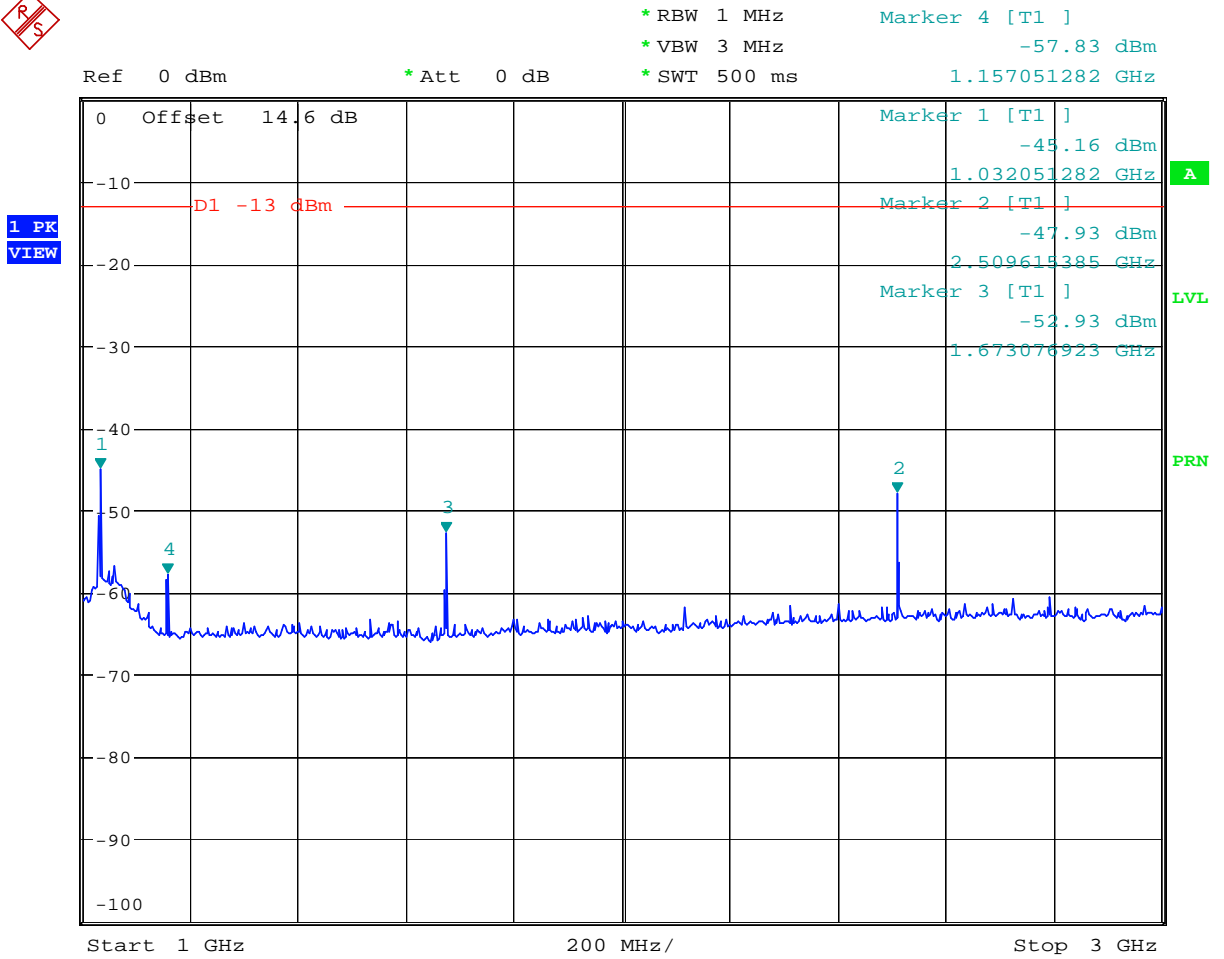

Date: 19.JAN.2006 23:11:21




- Test Mode : GSM 850 CH189
- Frequency Range : 3G-7G

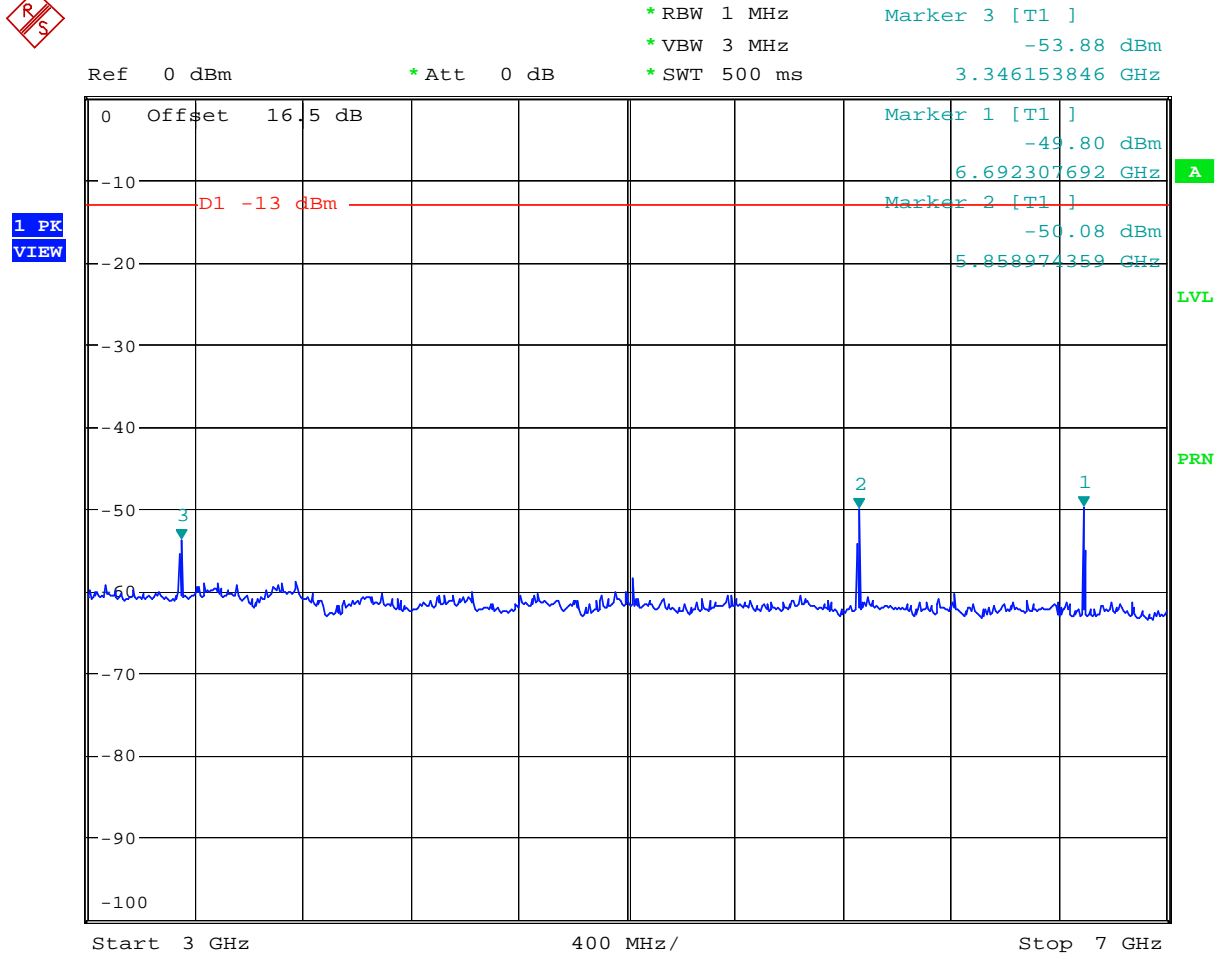

Date: 19.JAN.2006 23:10:07




- Test Mode : GSM 850 CH189
- Frequency Range : 7G-9G

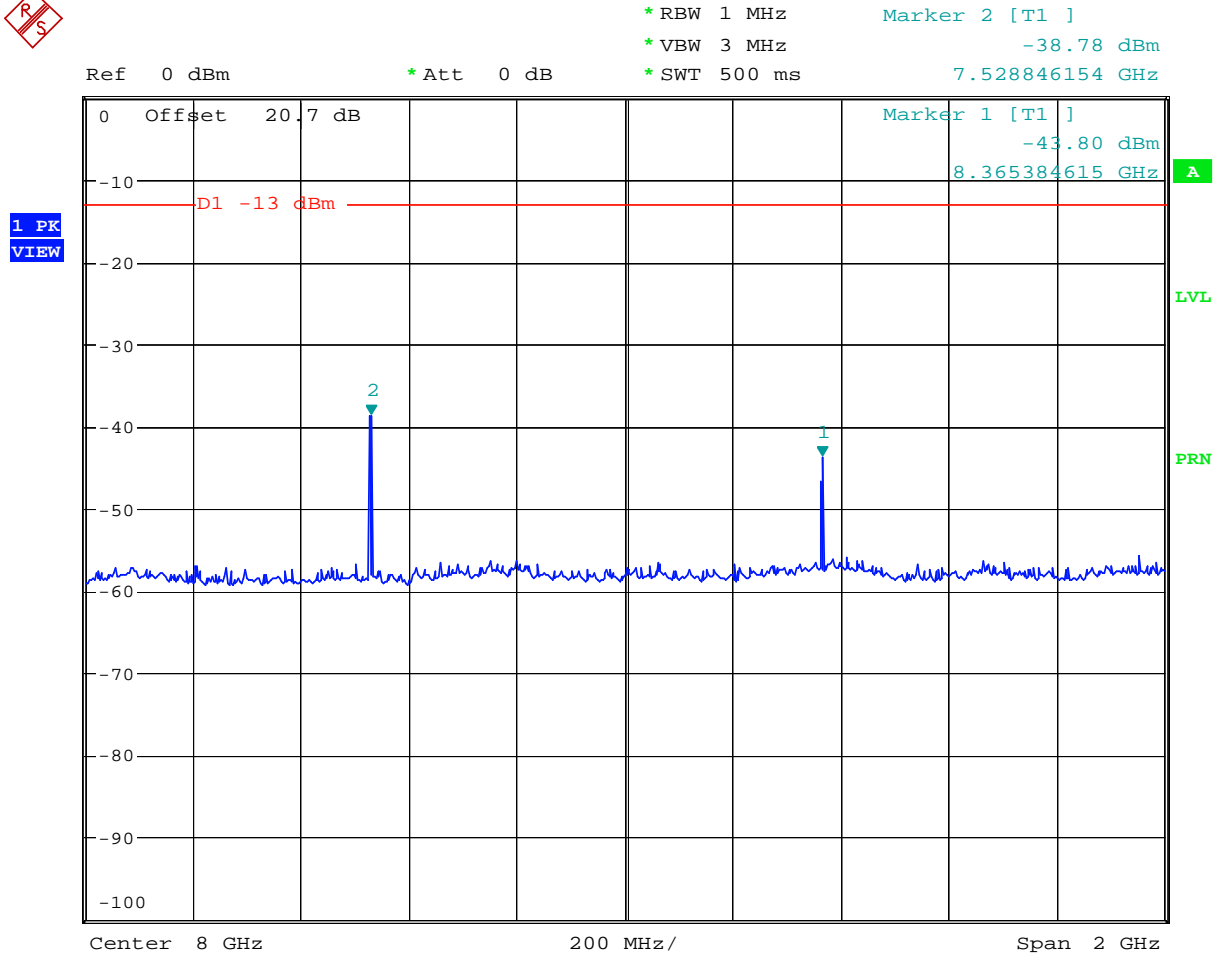

Date: 19.JAN.2006 23:08:21




- Test Mode : PCS 1900 CH661
- Frequency Range : 1G-3G

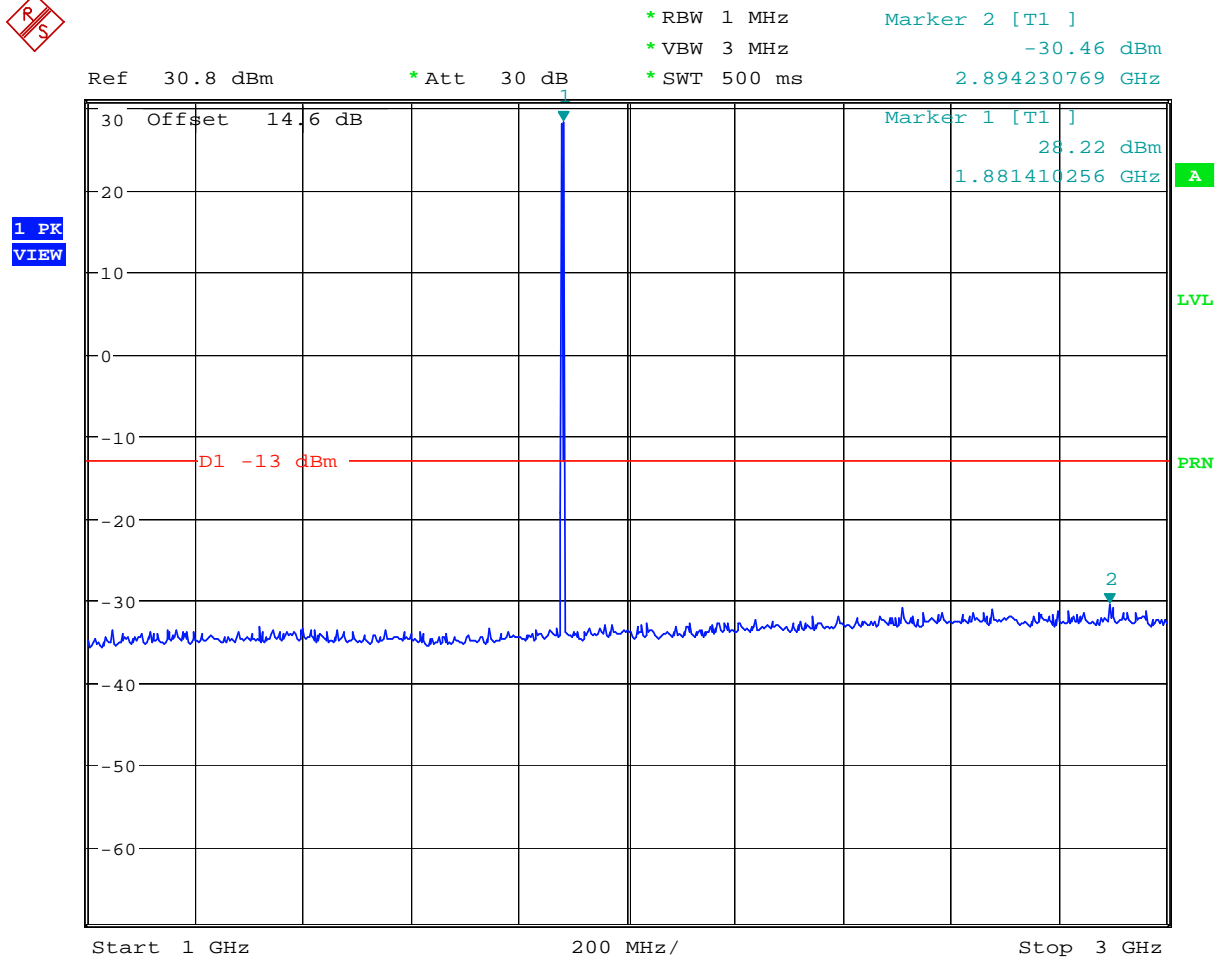

Date: 19.JAN.2006 21:24:33




- Test Mode : PCS 1900 CH661
- Frequency Range : 3G-7G

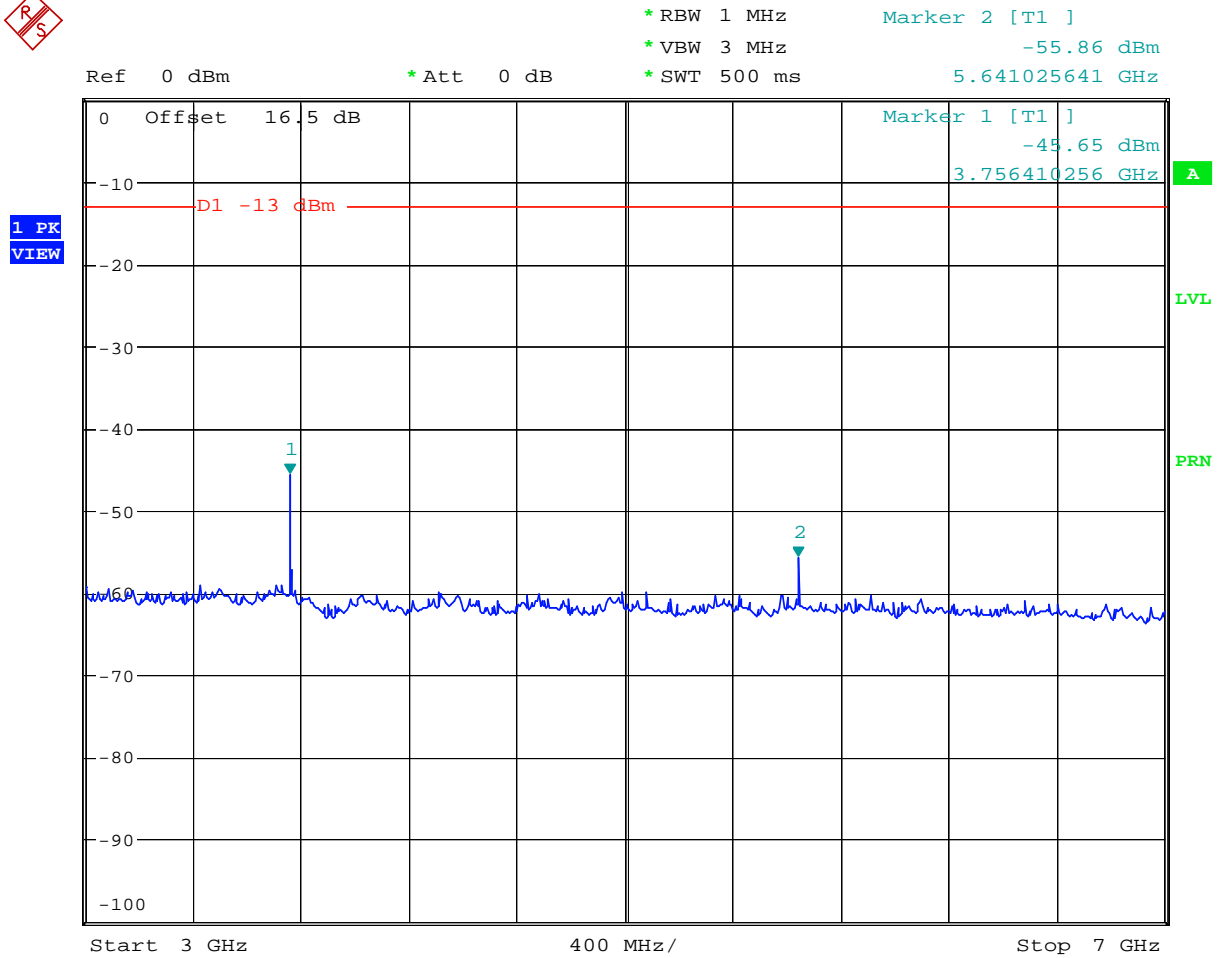

Date: 19.JAN.2006 21:26:39




- Test Mode : PCS 1900 CH661
- Frequency Range : 7G-13.6G

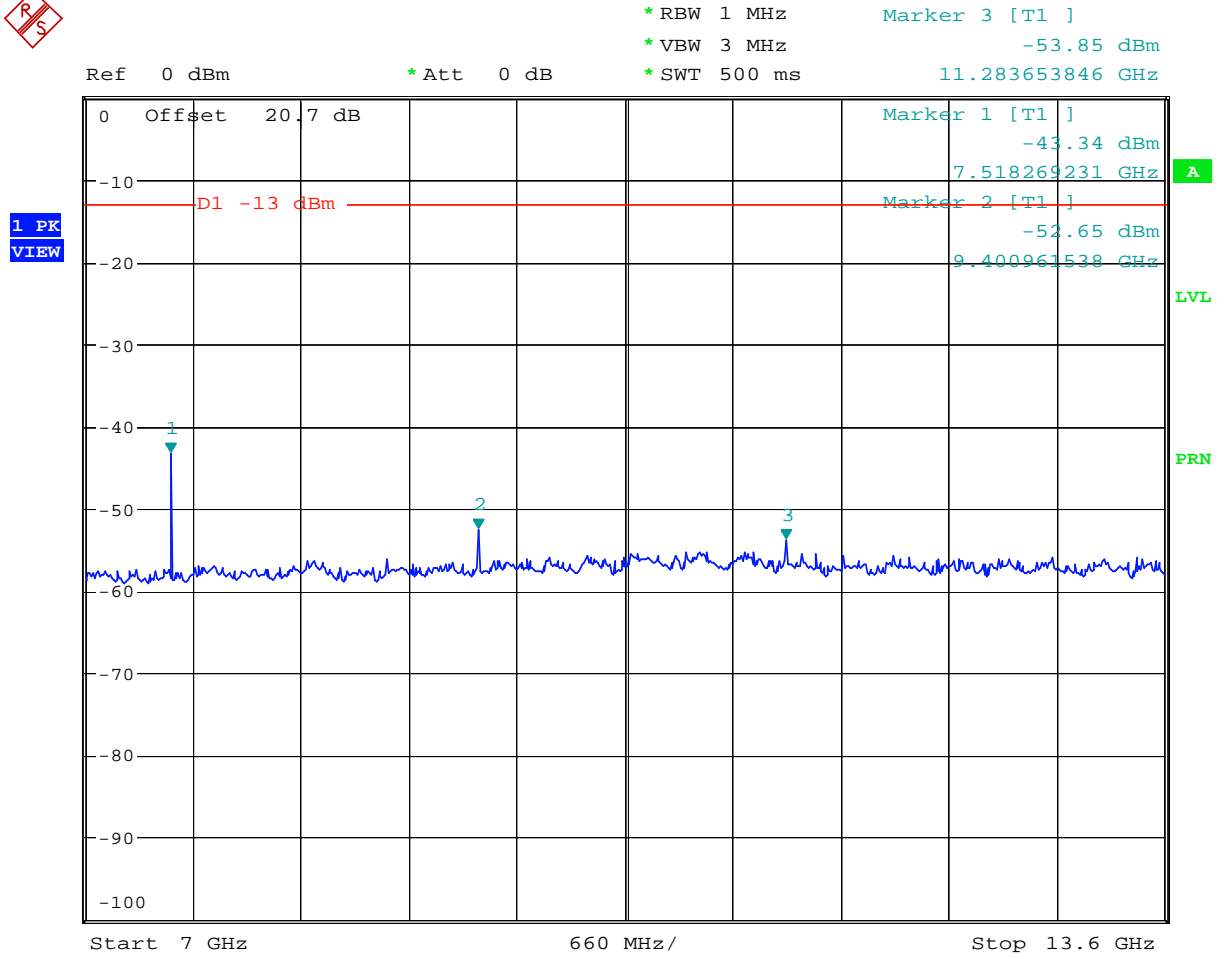

Date: 19.JAN.2006 21:28:23



- Test Mode : PCS 1900 CH661
- Frequency Range : 13.6G-19.1G

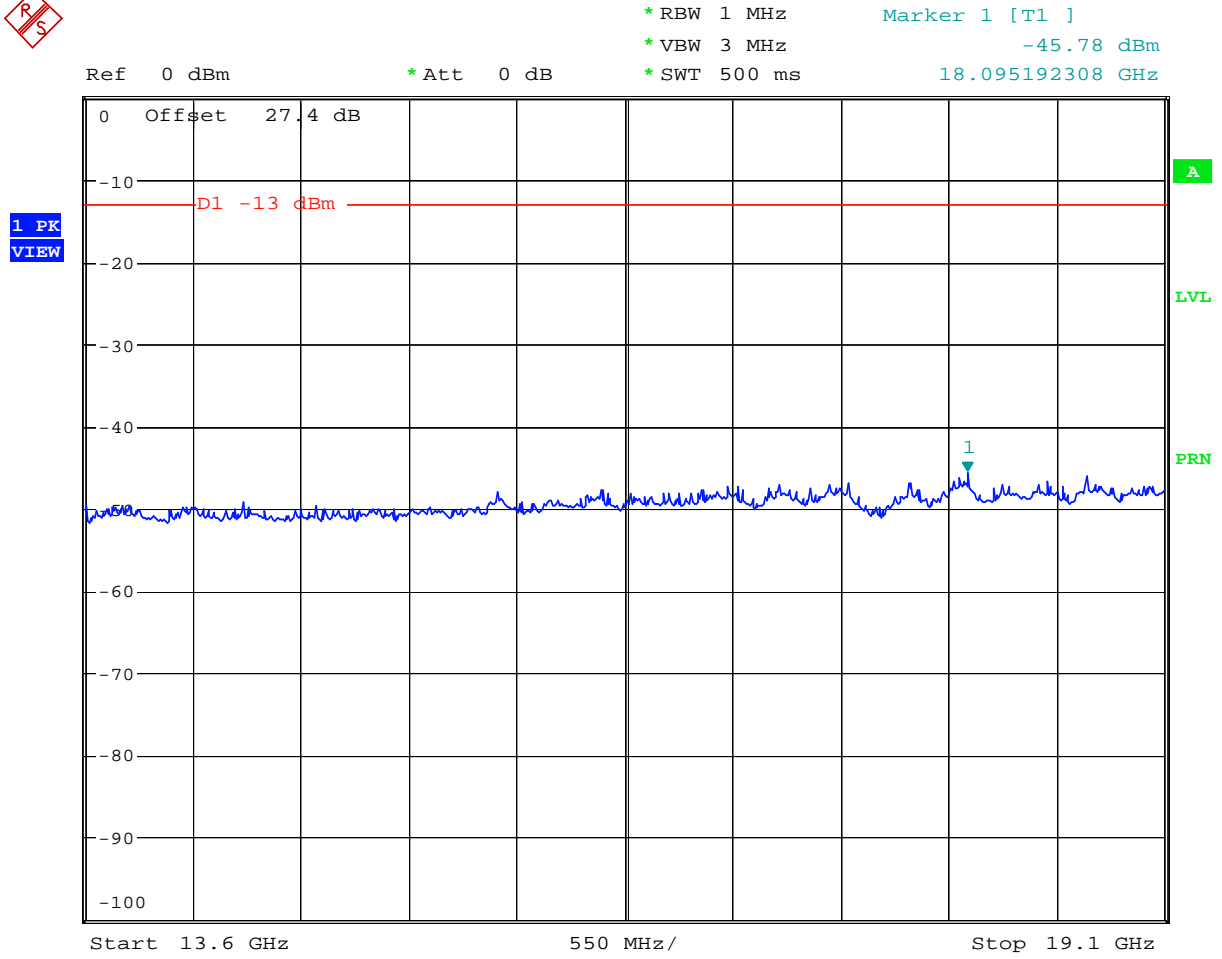

Date: 19.JAN.2006 21:29:40

4.6 Field Strength of Spurious Radiation

Equivalent isotropic radiated Power Measurements by substitution method according to ANSI/TIA/EIA-603-A.


4.6.1 Measurement Instruments

As described in chapter 5 of this test report.

4.6.2 Test Procedure

1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to reach the maximum spurious emission for both horizontal and vertical polarizations.
5. Taking the record of maximum spurious emission.
6. A Horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. Emission level (dBm) = output power + substitution Gain.

4.6.3 Test Setup Layout

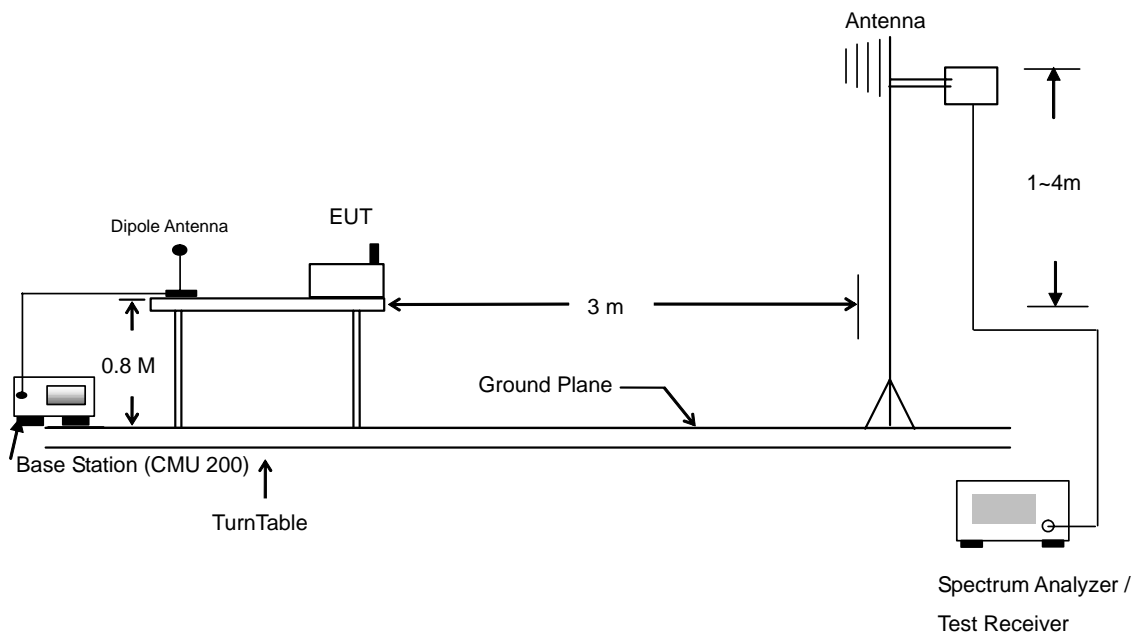



4.6.4 Test Result

- Test Mode : Mode 1

GSM 850 Radiated Spurious ERP							
H Polarization				V Polarization			
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)
30.00	-60.12	-13	-47.12	30.00	-69.70	-13	-56.70
81.84	-72.57	-13	-59.57	83.19	-69.05	-13	-56.05
295.68	-67.94	-13	-54.94	284.88	-66.51	-13	-53.51
638.80	-59.57	-13	-46.57	638.80	-60.98	-13	-47.98
675.90	-59.81	-13	-46.81	675.90	-61.39	-13	-48.39
995.80	-53.46	-13	-40.46	995.80	-56.65	-13	-43.65
1034.00	-49.49	-13	-36.49	1034.00	-55.74	-13	-42.74
1674.00	-47.36	-13	-34.36	1674.00	-56.75	-13	-43.75
2508.00	-43.00	-13	-30.00	2508.00	-46.15	-13	-33.15
3344.00	-54.85	-13	-41.85	5018.00	-52.29	-13	-39.29
5854.00	-52.00	-13	-39.00	5854.00	-48.57	-13	-35.57
6688.00	-49.46	-13	-36.46	6688.00	-45.84	-13	-32.84
				7528.00	-41.91	-13	-28.91

- Test Mode : Mode 2

PCS 1900 Radiated Spurious EIRP							
H Polarization				V Polarization			
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)
30.00	-57.03	-13	-44.03	30.00	-67.29	-13	-54.29
231.69	-68.24	-13	-55.24	75.63	-63.08	-13	-50.08
299.19	-62.94	-13	-49.94	210.09	-65.48	-13	-52.48
300.00	-63.77	-13	-50.77	497.40	-64.55	-13	-51.55
497.40	-65.11	-13	-52.11	696.90	-62.07	-13	-49.07
966.40	-62.16	-13	-49.16	997.90	-61.61	-13	-48.61
1718.00	-51.75	-13	-38.75	1718.00	-58.47	-13	-45.47
2038.00	-57.18	-13	-44.18	2038.00	-55.51	-13	-42.51
3758.00	-31.52	-13	-18.52	3758.00	-40.69	-13	-27.69
5638.00	-47.58	-13	-34.58	5638.00	-48.12	-13	-35.12
7518.00	-33.18	-13	-20.18	7518.00	-37.44	-13	-24.44
9398.00	-39.49	-13	-26.49	9398.00	-36.62	-13	-23.62
				13164.00	-46.09	-13	-33.09



Test Mode : Mode 3

GSM 850 with Bluetooth Co-location Radiated Spurious ERP							
H Polarization				V Polarization			
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)
30.00	-60.35	-13	-47.35	105.33	-68.90	-13	-55.90
81.84	-72.55	-13	-59.55	199.83	-67.13	-13	-54.13
290.28	-68.14	-13	-55.14	295.14	-66.46	-13	-53.46
497.40	-65.99	-13	-52.99	638.80	-62.36	-13	-49.36
640.90	-60.94	-13	-47.94	675.90	-63.25	-13	-50.25
675.90	-61.23	-13	-48.23	995.80	-58.75	-13	-45.75
995.80	-53.63	-13	-40.63	1034.00	-54.15	-13	-41.15
1034.00	-49.25	-13	-36.25	1674.00	-52.06	-13	-39.06
1674.00	-46.91	-13	-33.91	2508.00	-43.73	-13	-30.73
2508.00	-44.21	-13	-31.21	3344.00	-53.67	-13	-40.67
4884.00	-49.84	-13	-36.84	4884.00	-45.43	-13	-32.43
5854.00	-50.44	-13	-37.44	5018.00	-51.54	-13	-38.54
6688.00	-47.33	-13	-34.33	5854.00	-50.56	-13	-37.56
7528.00	-42.60	-13	-29.60	6688.00	-45.39	-13	-32.39



4.6.5 Test Data

4.6.5.1 Mode 1

Horizontal Polarization

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	30.00	-57.97	-44.97	-13.00	-58.33	0.36	Peak
2	81.84	-70.42	-57.42	-13.00	-58.10	-12.31	Peak
3	295.68	-65.79	-52.79	-13.00	-55.71	-10.08	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	638.80	-57.42	-44.42	-13.00	-54.08	-3.34	Peak
2 @	675.90	-57.66	-44.66	-13.00	-54.69	-2.96	Peak
3 @	836.90	-28.06			-26.72	-1.33	Peak
4 @	995.80	-51.31	-38.31	-13.00	-51.51	0.20	Peak

Remark:

- #3: MS TCH Signal.

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	1034.00	-47.34	-34.34	-13.00	-49.11	1.78	Peak
2 @	1674.00	-45.21	-32.21	-13.00	-45.43	0.22	Peak
3 @	2508.00	-40.85	-27.85	-13.00	-42.05	1.20	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	3344.00	-52.70	-39.70	-13.00	-58.11	5.41	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	5854.00	-49.85	-36.85	-13.00	-60.07	10.22	Peak
2 @	6688.00	-47.31	-34.31	-13.00	-60.45	13.14	Peak



Vertical Polarization

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	30.00	-67.55	-54.55	-13.00	-58.48	-9.07	Peak
2	83.19	-66.90	-53.90	-13.00	-56.83	-10.07	Peak
3	284.88	-64.36	-51.36	-13.00	-57.59	-6.77	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	638.80	-58.83	-45.83	-13.00	-57.48	-1.35	Peak
2	675.90	-59.24	-46.24	-13.00	-58.44	-0.79	Peak
3 @	836.90	-26.06			-27.42	1.36	Peak
4	880.30	-58.20			-59.91	1.71	Peak
5 @	995.80	-54.50	-41.50	-13.00	-57.13	2.63	Peak

Remark:

- #3: MS TCH Signal.
- #4: BS TCH Signal.

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	1034.00	-53.59	-40.59	-13.00	-52.86	-0.73	Peak
2 @	1674.00	-54.60	-41.60	-13.00	-54.12	-0.48	Peak
3 @	2508.00	-44.00	-31.00	-13.00	-46.27	2.27	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	5018.00	-50.14	-37.14	-13.00	-58.99	8.85	Peak
2 @	5854.00	-46.42	-33.42	-13.00	-55.23	8.81	Peak
3 @	6688.00	-43.69	-30.69	-13.00	-55.22	11.53	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	7528.00	-39.76	-26.76	-13.00	-53.13	13.37	Peak

Remark : There is no more obvious emission except the listings above.



4.6.5.2 Mode 2
Horizontal Polarization

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	30.00	-57.03	-44.03	-13.00	-57.39	0.36	Peak
2	231.69	-68.24	-55.24	-13.00	-55.96	-12.29	Peak
3	299.19	-62.94	-49.94	-13.00	-53.00	-9.95	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	300.00	-63.77	-50.77	-13.00	-53.82	-9.95	Peak
2	497.40	-65.11	-52.11	-13.00	-59.95	-5.15	Peak
3	966.40	-62.16	-49.16	-13.00	-62.07	-0.09	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	1718.00	-51.75	-38.75	-13.00	-51.83	0.08	Peak
2	1884.00	-50.50			-49.82	-0.68	Peak
3	1958.00	-57.75			-56.64	-1.11	Peak
4	2038.00	-57.18	-44.18	-13.00	-56.45	-0.73	Peak

Remark:

- #2: MS TCH Signal.
- #3: BS TCH Signal.

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	3758.00	-31.52	-18.52	-13.00	-39.44	7.92	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	5638.00	-47.58	-34.58	-13.00	-57.54	9.97	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	7518.00	-33.18	-20.18	-13.00	-48.99	15.80	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	9398.00	-39.49	-26.49	-13.00	-57.71	18.22	Peak



Vertical Polarization

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	30.00	-67.29	-54.29	-13.00	-58.22	-9.07	Peak
2	75.63	-63.08	-50.08	-13.00	-51.90	-11.19	Peak
3	210.09	-65.48	-52.48	-13.00	-57.12	-8.36	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	497.40	-64.55	-51.55	-13.00	-61.39	-3.16	Peak
2	696.90	-62.07	-49.07	-13.00	-61.59	-0.47	Peak
3	997.90	-61.61	-48.61	-13.00	-64.25	2.64	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	1718.00	-58.47	-45.47	-13.00	-58.05	-0.42	Peak
2	1878.00	-48.55			-48.15	-0.40	Peak
3	2038.00	-55.51	-42.51	-13.00	-55.47	-0.04	Peak

Remark:

- 1. #2: MS TCH Signal.

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	3758.00	-40.69	-27.69	-13.00	-47.33	6.64	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	5638.00	-48.12	-35.12	-13.00	-56.78	8.65	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	7518.00	-37.44	-24.44	-13.00	-50.81	13.37	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	9398.00	-36.62	-23.62	-13.00	-53.82	17.20	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	13164.00	-46.09	-33.09	-13.00	-61.88	15.79	Peak

Remark: There is no more obvious emission except the listings above.



4.6.5.3 Mode 3
Horizontal Polarization

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	30.00	-58.20	-45.20	-13.00	-58.56	0.36	Peak
2	81.84	-70.40	-57.40	-13.00	-58.09	-12.31	Peak
3	290.28	-65.99	-52.99	-13.00	-55.71	-10.28	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	497.40	-63.84	-50.84	-13.00	-58.69	-5.15	Peak
2	640.90	-58.79	-45.79	-13.00	-55.47	-3.32	Peak
3	675.90	-59.08	-46.08	-13.00	-56.11	-2.96	Peak
4 @	836.90	-35.65			-34.32	-1.33	Peak
5	880.30	-60.32			-59.41	-0.91	Peak
6 @	995.80	-51.48	-38.48	-13.00	-51.68	0.20	Peak

Remark:

- #4: MS TCH Signal.
- #5: BS TCH Signal.

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	1034.00	-47.10	-34.10	-13.00	-48.88	1.78	Peak
2 @	1674.00	-44.76	-31.76	-13.00	-44.98	0.22	Peak
3 @	2438.00	-4.54			-5.54	1.00	Peak
4 @	2508.00	-42.06	-29.06	-13.00	-43.26	1.20	Peak

Remark:

- #2: BT Signal.

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	4884.00	-47.69	-34.69	-13.00	-58.88	11.19	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	5854.00	-48.29	-35.29	-13.00	-58.51	10.22	Peak
2 @	6688.00	-45.18	-32.18	-13.00	-58.31	13.14	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	7528.00	-40.45	-27.45	-13.00	-56.26	15.80	Peak



Vertical Polarization

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	105.33	-66.75	-53.75	-13.00	-59.01	-7.74	Peak
2	199.83	-64.98	-51.98	-13.00	-56.39	-8.59	Peak
3	295.14	-64.31	-51.31	-13.00	-57.74	-6.56	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	638.80	-60.21	-47.21	-13.00	-58.86	-1.35	Peak
2	675.90	-61.10	-48.10	-13.00	-60.31	-0.79	Peak
3 @	836.90	-30.81			-32.17	1.36	Peak
4 @	880.30	-51.46			-53.17	1.71	Peak
5 @	995.80	-56.60	-43.60	-13.00	-59.23	2.63	Peak

Remark:

- 1. #3: MS TCH Signal.
- 2. #4: BS TCH Signal.

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	1034.00	-52.00	-39.00	-13.00	-51.26	-0.73	Peak
2 @	1674.00	-49.91	-36.91	-13.00	-49.43	-0.48	Peak
3 @	2438.00	-1.63			-3.65	2.01	Peak
4 @	2508.00	-41.58	-28.58	-13.00	-43.85	2.27	Peak

Remark:

- 1. #2: BT Signal.

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	3344.00	-51.52	-38.52	-13.00	-55.99	4.47	Peak
2 @	4884.00	-43.28	-30.28	-13.00	-53.12	9.85	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	5018.00	-49.39	-36.39	-13.00	-58.24	8.85	Peak
2 @	5854.00	-48.41	-35.41	-13.00	-57.22	8.81	Peak
3 @	6688.00	-43.24	-30.24	-13.00	-54.77	11.53	Peak

Remark: There is no more obvious emission except the listings above.

4.7 Frequency Stability (Temperature Variation)


4.7.1 Measurement Instrument

As described in chapter 5 of this test report.

4.7.2 Test Procedure

1. The EUT and test equipment were set up as shown on the following section.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. Test data was recorded.

4.7.3 Test Setup Layout

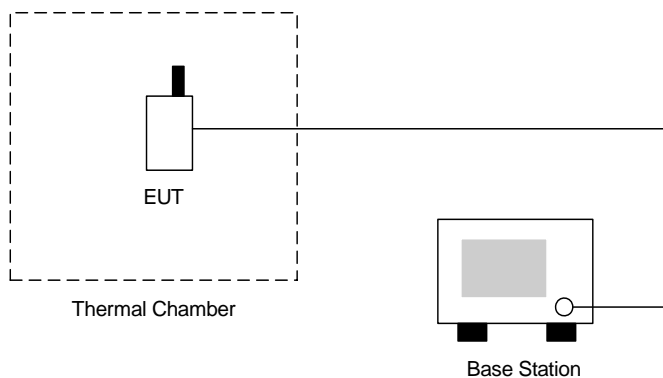

**4.7.4 Test Result**

- Test Mode : GSM 850 CH189

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	X	X	2.5	Passed
-20	44	0.02		
-10	24	0.01		
0	-24	-0.01		
10	15	0.01		
20	-26	-0.01		
30	-32	-0.02		
40	15	0.01		
50	-9	0.00		

- Test Mode : PCS 1900 CH661

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	X	X	2.5	Passed
-20	-33	-0.02		
-10	22	0.01		
0	17	0.01		
10	-18	-0.01		
20	20	0.01		
30	-19	-0.01		
40	37	0.02		
50	40	0.02		

4.8 Frequency Stability (Voltage Variation)


4.8.1 Measurement Instrument

As described in chapter 5 of this test report.

4.8.2 Test Procedure

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected as the following section.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

4.8.3 Test Setup Layout

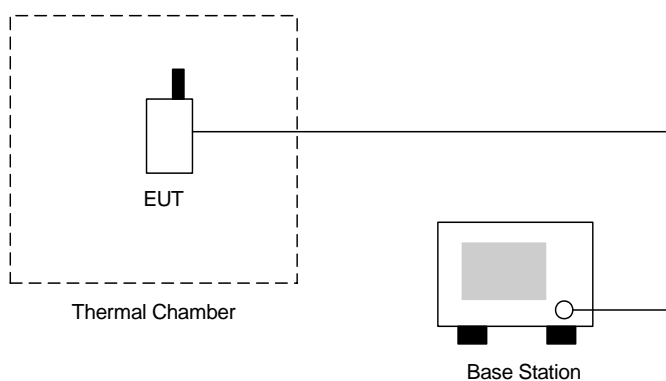

4.8.4 Test Result

- Test Mode : GSM 850 CH189

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
3.7	-22	-0.01	2.5	Passed
BEP	-65	-0.03		
4.3	33	0.02		

- Test Mode : PCS 1900 CH661

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
3.7	21	0.01	2.5	Passed
BEP	38	0.02		
4.3	-24	-0.01		

Remark:

1. Normal Voltage=3.7V.
2. Battery End Point (BEP)=3.2 V.



5 List of Measurement Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum analyzer	Agilent	E4408B	MY44211030	9KHz-26.5GHz	Jul. 25, 2005	Jul. 24, 2006	Radiation (03CH06-HY)
Receiver	R&S	ESCS30	100356	9KHz-2.75GHz	Jun. 28, 2005	Jun. 27, 2006	Radiation (03CH06-HY)
Controller	CT	SC100	N/A	N/A	N/A	N/A	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Nov. 22, 2004	Nov. 22, 2006	Radiation (03CH06-HY)
Horn Antenna	Com-Power	AH118	071025	1G-18G	Feb. 22, 2005	Feb. 22, 2006	Radiation (03CH06-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	9170-249	14G - 40G	Jul. 21, 2005	Jul. 20, 2006	Radiation (03CH06-HY)
HF Amplifier	MITEQ	AFS44	973248	0.1G - 26.5G	Dec. 17, 2005	Dec. 17, 2006	Radiation (03CH06-HY)
Amplifier	MITEQ	AMF-6F	997165	26G - 40G	Jul. 21, 2005	Jul. 20, 2006	Radiation (03CH06-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	N/A	Radiation (03CH06-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	N/A	Radiation (03CH06-HY)



6 Uncertainty Evaluation

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
combined standard uncertainty $U_c(y)$	1.27		
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$	2.54		

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1= 0.197$ Antenna VSWR $\Gamma_2= 0.194$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2*\Gamma_3)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty $U_c(y)$	2.36				
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$	4.72				

END OF TEST REPORT

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID : GM37525RADA

IC ID : 2739D-7525RADA

Page No. : 43 of 43

Report Issued Date : Mar. 10, 2006

Report Version : Rev. 03