

# FCC TEST REPORT

**REPORT NO.:** RF920626R01  
**MODEL NO.:** 64328 , 64329  
**RECEIVED:** June 19, 2003  
**TESTED:** June 28 ~ July 08, 2003

**APPLICANT:** Acco Brands Inc

**ADDRESS:** 2855 Campus Drive San Mateo, CA 94403  
United States

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** 47 14th Lin, Chia Pau Tsuen, Linkou Hsiang,  
Taipei, Taiwan, R.O.C.

This test report consists of 15 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528  
ILAC MRA



Lab Code: 200102-0

## Table of Contents


1	CERTIFICATION.....	3
2	SUMMARY OF TEST RESULTS .....	4
3	GENERAL INFORMATION .....	5
3.1	GENERAL DESCRIPTION OF EUT.....	5
3.2	DESCRIPTION OF TEST MODES.....	6
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	6
3.4	DESCRIPTION OF SUPPORT UNITS.....	6
4	TEST PROCEDURE AND RESULT.....	7
4.1	CONDUCTED EMISSION MEASUREMENT.....	7
4.2	RADIATED EMISSION MEASUREMENT.....	7
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	7
4.2.2	TEST INSTRUMENT .....	8
4.2.3	TEST PROCEDURE .....	9
4.2.4	TEST SETUP .....	10
4.2.5	EUT OPERATING CONDITION .....	10
4.2.6	TEST RESULT.....	11
4.3	ANTENNA REQUIREMENT .....	13
4.3.1	STANDARD APPLICABLE .....	13
4.3.2	ANTENNA CONNECTED CONSTRUCTION .....	13
5	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	14
6	INFORMATION ON THE TESTING LABORATORIES.....	15




## 1 CERTIFICATION

**PRODUCT :** Turbo Mouse Wireless  
**BRAND NAME :** Kensington  
**MODEL NO :** 64328 , 64329  
**TEST ITEM:** ENGINEERING SAMPLE  
**APPLICANT :** Acco Brands Inc  
**STANDARDS :** 47 CFR Part 15, Subpart C(15.227)  
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from June 28 ~ July 08, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

**PREPARED BY:**  , **DATE:** July 9, 2003  
Rennie Wang

**APPROVED BY:**  , **DATE:** July 9, 2003  
Dr. Alan Lane, JVP

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	N/A	Power supply is 3VDC from batteries
15.227	Radiated Emission Test	PASS	Minimum passing margin is -14.60dBuV at 163.19MHz

**NOTE:** The receiver part to communicate with the EUT has been verified to comply with FCC Part 15, Subpart B, Class B (DoC). The test report can be provided upon request.

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Turbo Mouse Wireless
<b>MODEL NO.</b>	64328 , 64329
<b>POWER SUPPLY</b>	3VDC from battery
<b>MODULATION TYPE</b>	FSK
<b>CARRIER FREQUENCY OF EACH CHANNEL</b>	26.995MHz , 27.195 MHz
<b>BANDWIDTH OF EACH CHANNEL</b>	NA
<b>NUMBER OF CHANNEL</b>	2
<b>ANTENNA TYPE</b>	Printed Antenna
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	NA
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:**

1. The EUT is the transmitter part of a Wireless Mouse.
2. The difference between the two models is the color of their covers. The model 64328's cover is black and the model 64329's cover is white.
3. For more detailed feature description of the EUT, please refer to user's manual.

### 3.2 DESCRIPTION OF TEST MODES

Two channel was provided to this EUT.

Channel	Frequency
1	26.995 MHz
2	27.195 MHz

**Note:** Channel 2 was chosen for final test.

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is the transmitter part of a Turbo Mouse Wireless. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 15, Subpart C (15.227)**

**ANSI C63.4-1992**

All tests have been performed and recorded as per the above standards.

### 3.4 DESCRIPTION OF SUPPORT UNITS

NA

## 4 TEST PROCEDURE AND RESULT

### 4.1 CONDUCTED EMISSION MEASUREMENT

NA

### 4.2 RADIATED EMISSION MEASUREMENT

#### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.227 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
26.96-27.28	100	80

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.2.2 TEST INSTRUMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	June 10, 2004
Spectrum Analyzer	8593E	3926A04191	Mar. 24, 2004
* HP Preamplifier	8447D	2944A08485	May 01, 2004
HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
* Spectrum Analyzer	8593E	3926A04191	Mar. 24, 2004
*Test Receiver	ESI7	838496/016	Feb. 23, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
*ANTENNA (Large Biconical)	VHBA9123	449	Dec. 22, 2003
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 02, 2003
SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Jul. 03, 2003
EMCO Horn Antenna	3115	9312-4192	Mar. 23, 2004
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	ADT_Radiated_V5.09	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Feb. 27, 2004
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jul. 11, 2003

**NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "\*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.
5. The VCCI Site Registration No. is R-1039.




### 4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

#### 4.2.4 TEST SETUP

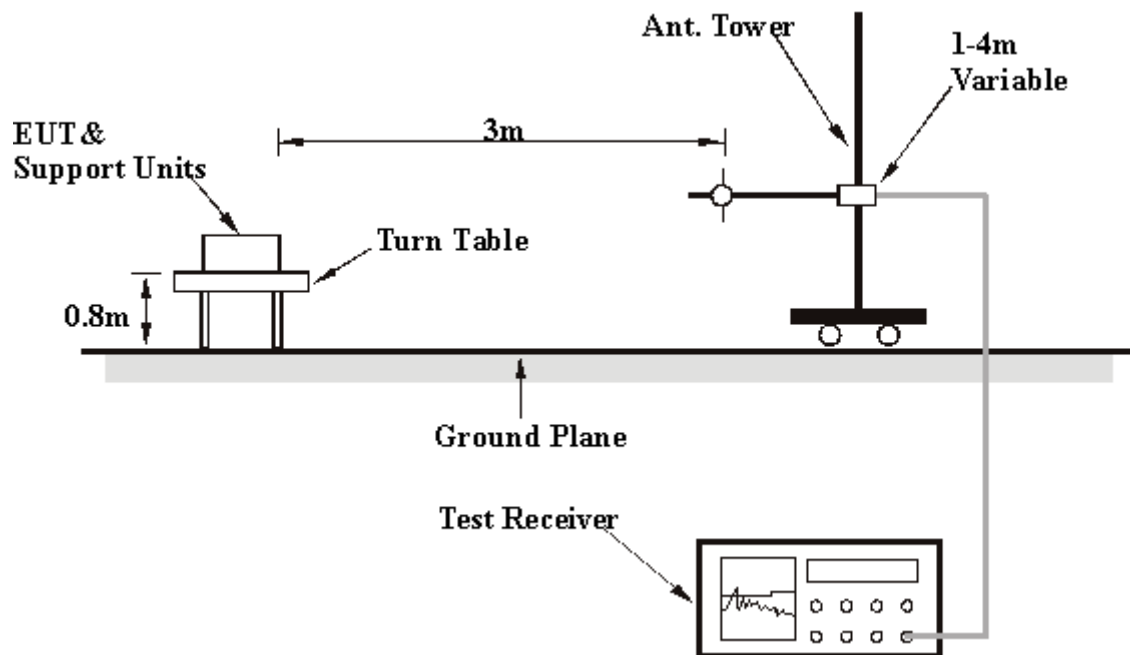

For the actual test configuration, please refer to the related item in this test report - Photographs of the Test Configuration.

#### 4.2.5 EUT OPERATING CONDITION

Set the EUT under transmission condition continuously at specific channel frequency.

**4.2.6 TEST RESULT**

<b>EUT</b>	Turbo Mouse Wireless	<b>MODEL</b>	64328 , 64329
<b>MODE</b>	TX	<b>FREQUENCY RANGE</b>	Below 1000 MHz
<b>INPUT POWER</b>	3VDC	<b>DETECTOR FUNCTION</b>	Peak / Quasi-Peak / Average
<b>ENVIRONMENTAL CONDITIONS</b>	30 deg. C, 60 % RH, 991 hPa	<b>TESTED BY:</b> HARDAWAY LEE	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.19	31.5 AV	80.00	-48.50	1.73 H	172	24.90	6.60
2	*27.19	45.1 PK	100.00	-54.90	1.73 H	172	38.50	6.60
3	108.78	23.8 QP	43.50	-19.70	1.88 H	155	11.10	12.70
4	135.98	19.8 QP	43.50	-23.70	1.29 H	72	7.40	12.40
5	163.12	22.4 QP	43.50	-21.10	1.48 H	43	11.60	10.80
6	190.37	18.4 QP	43.50	-25.10	1.38 H	123	7.60	10.80
7	217.59	24.2 QP	46.00	-21.80	1.51 H	114	11.70	12.60
8	244.73	24.0 QP	46.00	-22.00	1.70 H	87	8.90	15.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency.

<b>EUT</b>	Turbo Mouse Wireless	<b>MODEL</b>	64328 , 64329
<b>MODE</b>	TX	<b>FREQUENCY RANGE</b>	Below 1000 MHz
<b>INPUT POWER</b>	3VDC	<b>DETECTOR FUNCTION</b>	Peak / Quasi-Peak / Average
<b>ENVIRONMENTAL CONDITIONS</b>	30 deg. C, 60 % RH, 991 hPa	<b>TESTED BY:</b> HARDAWAY LEE	

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.19	26.7 AV	80.00	-53.30	1.00 V	133	20.10	6.60
2	*27.19	45.3 PK	100.00	-54.90	1.00 V	133	38.70	6.60
3	108.80	25.9 QP	43.50	-17.60	1.32 V	88	13.10	12.70
4	136.00	20.9 QP	43.50	-22.60	1.01 V	63	8.50	12.40
5	163.19	28.9 QP	43.50	-14.60	1.36 V	109	18.10	10.80
6	190.42	22.1 QP	43.50	-21.40	1.01 V	173	11.40	10.80
7	217.54	24.4 QP	46.00	-21.60	1.32 V	132	11.80	12.60
8	244.69	29.6 QP	46.00	-16.40	1.20 V	55	14.50	15.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency.



## **4.3 ANTENNA REQUIREMENT**

### **4.3.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **4.3.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used in this product is printed antenna, and the antenna connector is designed to be soldered permanently on the PC board, so no consideration of replacement.

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

### RADIATED EMISSION TEST



## 6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

<b>USA</b>	FCC, NVLAP
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>New Zealand</b>	MoC
<b>Norway</b>	NEMKO
<b>R.O.C.</b>	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).  
If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC Lab:**

Tel: 886-35-935343

Fax: 886-35-935342

**Lin Kou Safety Lab:**

Tel: 886-2-26093195

Fax: 886-2-26093184

**Lin Kou RF&Telecom Lab:**

Tel: 886-3-3270910

Fax: 886-3-3270892

**Email:** [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.