

FCC TEST REPORT

for

CISPR PUB. 22 Class B

Equipment : PS/2 Keyboard
Model No. : SK-2800C
FCC ID : GYUR79SK
Filing Type : Original Grant
Applicant : **SILITEK CORPORATION**
10F, No. 25, Sec. 1, Tung Hwa S. Rd.,
Taipei, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

CERTIFICATE OF COMPLIANCE	3
1. General Description of Equipment under Test	4
1.1. Applicant	4
1.2. Manufacturer	4
1.3. Basic Description of Equipment under Test	4
1.4. Feature of Equipment under Test	4
2. Test Configuration of Equipment under Test	5
2.1. Test Manner	5
2.2. Description of Test System	5
2.3. Connection Diagram of Test System	7
3. Test Software	9
4. General Information of Test	10
4.1. Test Facility	10
4.2. Standard for Methods of Measurement	10
4.3. Test in Compliance with	10
4.4. Frequency Range Investigated	10
4.5. Test Distance	10
5. Test of Conducted Powerline	11
5.1. Major Measuring Instruments	11
5.2. Test Procedures	12
5.3. Typical Test Setup Layout of Conducted Powerline	13
5.4. Test Result of AC Powerline Conducted Emission	14
5.5. Photographs of Conducted Powerline Test Configuration	16
6. Test of Radiated Emission	20
6.1. Major Measuring Instruments	20
6.2. Test Procedures	21
6.3. Typical Test Setup Layout of Radiated Emission	22
6.4. Test Result of Radiated Emission	23
6.5. Photographs of Radiated Emission Test Configuration	25
7. Antenna Factor & Cable Loss	27
8. List of Measuring Equipments Used	28

CERTIFICATE OF COMPLIANCE

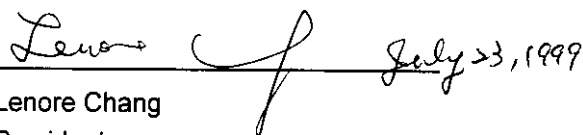
for

CISPR PUB. 22 Class B

Equipment : PS/2 Keyboard
Model No. : SK-2800C
FCC ID : GYUR79SK
Applicant : **SILITEK CORPORATION**
10F, No. 25, Sec. 1, Tung Hwa S. Rd.,
Taipei, Taiwan, R.O.C.

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was **passed CISPR PUB. 22** both radiated and conducted emission class B limits. Testing was carried out on Jul. 16, 1999 at **SPORTON International Inc. LAB.** in Lin Kou.


Lenore Chang
President

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

SILITEK CORPORATION
10F, No. 25, Sec. 1, Tung Hwa S. Rd.,
Taipei, Taiwan, R.O.C.

1.2. Manufacturer

Same as 1.1.

1.3. Basic Description of Equipment under Test

Equipment : PS/2 Keyboard
Model No. : SK-2800C
FCC ID : GYUR79SK
Trade Name : SILITEK
DATA CABLE : Shielded, 1.75m
Power Supply Type : N/A
Power Cord : N/A

1.4. Feature of Equipment under Test

- This keyboard is one of the SK-2800C series products, which are 104/105/106/107/109 keys enhanced keyboards for IBM PC/AT, PS/2 and its compatibles.
- Input Power : +5 VDC, 80 mA max.
- Power Consumption : 0.4 watts max.

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The HITACHI Monitor, PRIMAX PS/2 Mouse, HP Printer, ACEEX Modem and EUT were connected to the FIC PC for EMI test.
- c. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 1000MHz.

2.2. Description of Test System

Support Unit 1. -- Monitor (HITACHI)

FCC ID	: N/A
Model No.	: CM753ET
Serial No.	: SP0176
Data Cable	: Shielded, 360 degree via metal backshells, 1.15m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. -- PS/2 Mouse (PRIMAX)

FCC ID	: EMJMUSJQ
Model No.	: MUS9J
Serial No.	: SP0045
Data Cable	: Shielded, 360 degree via metal backshells, 1.7m

Support Unit 3. -- Printer (HP)

FCC ID	: B94C2642X
Model No.	: DeskJet 400
Power Supply Type	: Linear
Power Cord	: Non-Shielded
Serial No.	: SP0048
Data Cable	: Braided-Shielded, 360 degree via metal backshells, 1.35m

FCC TEST REPORT**Report No. : F971401****Support Unit 4. -- Modem (ACEEX)**

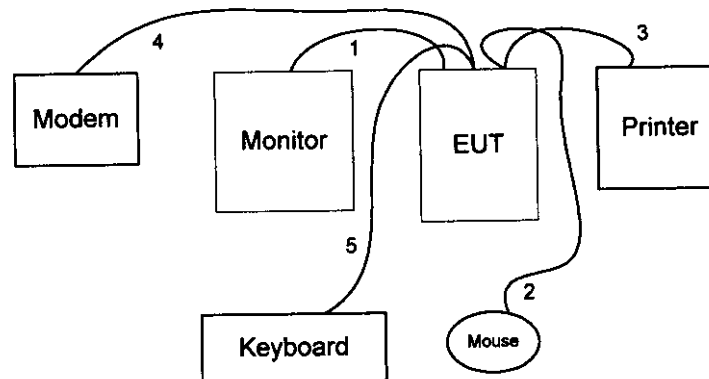
FCC ID : IFAXDM1414
Model No. : DM1414
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0015
Data Cable : Shielded, 360 degree via metal backshells, 1.15m

Support Unit 5. -- Personal Computer (DELL) -- for PS/2 mode

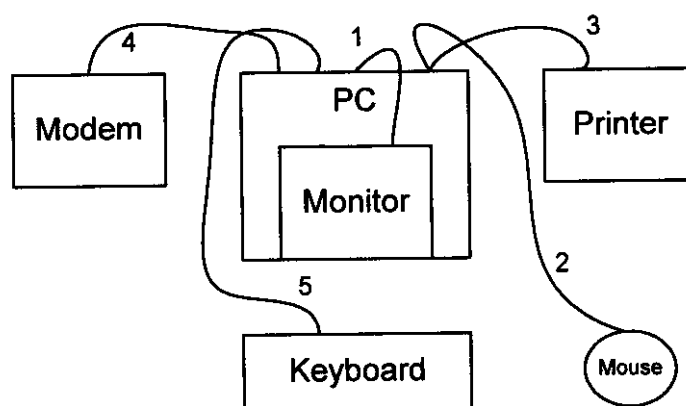
FCC ID : N/A
Model No. : DCS
Power Supply Type : Switching
Power Cord : Non-Shielded
Serial No. : SP0038
Data Cable : Shielded, 360 degree via metal backshells
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 6. -- Personal Computer (FIC) -- for AT mode

FCC ID : N/A
Model No. : P55T2P4
Power Supply Type : Switching
Power Cord : Non-Shielded
Serial No. : SP0007
Data Cable : Shielded, 360 degree via metal backshells
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

2.3. Connection Diagram of Test System**<AT Mode>**

1. The I/O cable is connected to the support unit 1.
2. The I/O cable is connected to the support unit 2.
3. The I/O cable is connected to the support unit 3.
4. The I/O cable is connected to the support unit 4.
5. The I/O cable is connected from EUT to the support unit 6.

<PS/2 Mode>

1. The I/O cable is connected to the support unit 1.
2. The I/O cable is connected to the support unit 2.
3. The I/O cable is connected to the support unit 3.
4. The I/O cable is connected to the support unit 4.
5. The I/O cable is connected from EUT to the support unit 5.

3. Test Software

An executive program, EMITEST.EXE under WIN98, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

4. General Information of Test

4.1. Test Facility

This test was carried out by SPORTON International Inc. in an openarea test site.

Openarea Test Site Location: No. 30-2, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,

Taipei Hsien, Taiwan, R.O.C.

TEL : 886-2-2601-1640

FAX : 886-2-2601-1695

4.2. Standard for Methods of Measurement

ANSI C63.4-1992

4.3. Test in Compliance with

CISPR PUB. 22 Class B

4.4. Frequency Range Investigated

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation : from 30 MHz to 1,000 MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 10 M.

5. Test of Conducted Powerline

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 5.3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

5.1. Major Measuring Instruments

Test Receiver	HP 8591EM
Attenuation	0 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 kHz

5.2. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be retested one by one using the quasi-peak method and reported.

5.4. Test Result of AC Powerline Conducted Emission**5.4.1. Test mode : AT Mode**

- Temperature : 27°C
- Relative Humidity : 64 %
- Test Date : Jul. 16, 1999

The Conducted Emission test was passed at minimum margin

NEUTRAL 21.930 MHz / 34.10 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.184	L	35.10	19.90	56.89	9.89	64.30	54.30	1641.18	518.99	-29.20	-34.40
0.344	L	30.30	28.20	32.73	25.70	59.11	49.11	902.20	285.30	-28.81	-20.91
21.912	L	27.50	23.20	23.71	14.45	60.00	50.00	1000.00	316.23	-32.50	-26.80
0.180	N	35.70	21.90	60.95	12.45	64.49	54.49	1676.04	530.01	-28.79	-32.59
0.346	N	30.10	27.50	31.99	23.71	59.06	49.06	897.22	283.73	-28.96	-21.56
21.930	N	34.10	29.50	50.70	29.85	60.00	50.00	1000.00	316.23	-25.90	-20.50

Test Engineer :

Kenny Chuang
KENNY CHUANG

FCC TEST REPORT

Report No. : F971401

5.4.2. Test mode : PS/2 Mode

- Temperature : 27°C
- Relative Humidity : 64 %
- Test Date : Jul. 16, 1999

The Conducted Emission test was passed at minimum margin

LINE 22.570 MHz / 37.20 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.165	L	40.50	38.80	105.93	87.10	65.21	55.21	1821.46	575.99	-24.71	-16.41
22.570	L	37.20	35.80	72.44	61.66	60.00	50.00	1000.00	316.23	-22.80	-14.20
0.164	N	38.40	36.60	83.18	67.61	65.26	55.26	1832.07	579.35	-26.86	-18.66
0.548	N	31.90	30.40	39.36	33.11	56.00	46.00	630.96	199.53	-24.10	-15.60
2.583	N	33.20	31.90	45.71	39.36	56.00	46.00	630.96	199.53	-22.80	-14.10
22.570	N	37.20	35.50	72.44	59.57	60.00	50.00	1000.00	316.23	-22.80	-14.50

Test Engineer :


KENNY CHUANG

6. Test of Radiated Emission

Radiated emissions from 30 MHz to 1,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1. Major Measuring Instruments

- Amplifier (HP 8447D)
 - Attenuation 0 dB
 - RF Gain 25 dB
 - Signal Input 0.1 MHz to 1.3 GHz

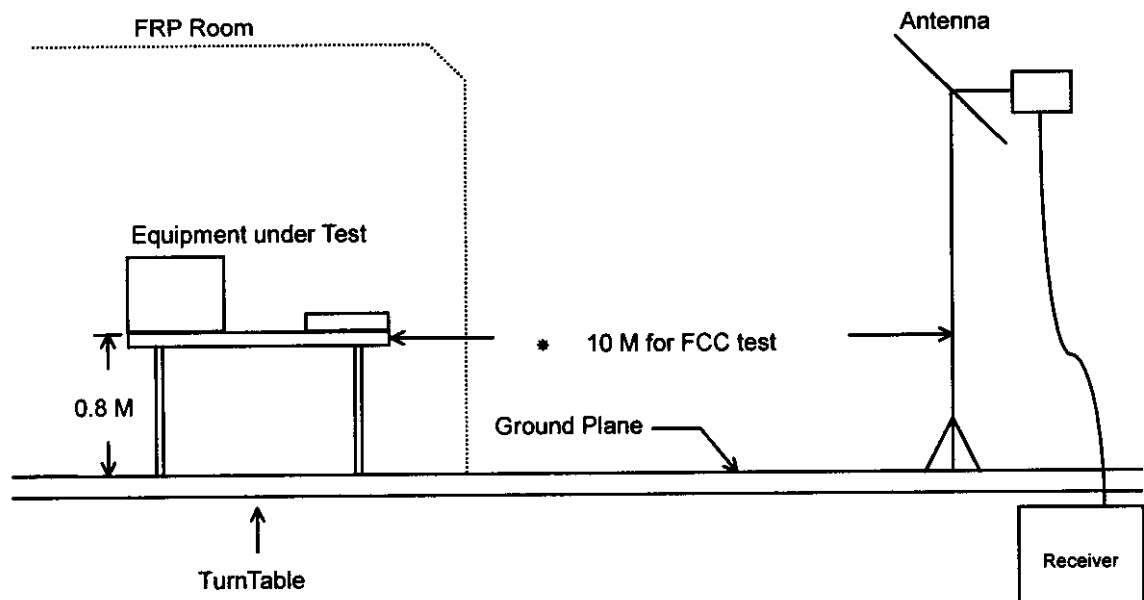
- Spectrum Analyzer (HP 8568B)
 - Attenuation 0 dB
 - Start Frequency 30 MHz
 - Stop Frequency 1000 MHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 100 Hz to 1.5 GHz

- Quasi-Peak Adapter (HP 85650A)
 - Resolution Bandwidth 120 KHz
 - Frequency Band 9 KHz to 1 GHz
 - Quasi-Peak Detector ON for Quasi-Peak Mode
OFF for Peak Mode

6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. Typical Test Setup Layout of Radiated Emission



6.4. Test Result of Radiated Emission

6.4.1. Test mode : AT Mode

- Test Distance : 10 M
- Temperature : 33°C
- Relative Humidity : 48 %
- Test Date : Jul. 14, 1999
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

67.740 MHz / 22.94 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 69 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level		Margin (dB)
					(dBuV/m)	(uV/m)		(uV/m)		
67.740	V	5.55	0.90	16.49	30.00	31.62	22.94	14.03		-7.06
135.060	V	11.83	1.30	9.25	30.00	31.62	22.38	13.15		-7.62
595.200	V	19.36	2.76	5.69	37.00	70.79	27.81	24.58		-9.19
134.720	H	11.83	1.30	8.65	30.00	31.62	21.78	12.27		-8.22
264.000	H	13.14	1.80	10.34	37.00	70.79	25.28	18.37		-11.72
595.200	H	19.36	2.76	4.09	37.00	70.79	26.21	20.44		-10.79

Test Engineer : Mark Chen
MARK CHEN

6.4.2. Test mode : PS/2 Mode

- Test Distance : 10 M
- Temperature : 33°C
- Relative Humidity : 48 %
- Test Date : Jul. 14, 1999
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

67.740 MHz / 23.64 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 69 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level		Margin (dB)
					(dBuV/m)	(uV/m)		(uV/m)	(dB)	
48.020	V	8.93	0.73	9.22	30.00	31.62	18.88	8.79	-11.12	
67.740	V	5.55	0.90	17.19	30.00	31.62	23.64	15.21	-6.36	
135.230	V	11.83	1.30	6.25	30.00	31.62	19.38	9.31	-10.62	
210.400	V	9.69	1.56	7.57	30.00	31.62	18.82	8.73	-11.18	
659.200	V	19.92	2.90	3.12	37.00	70.79	25.94	19.82	-11.06	
264.000	H	13.14	1.80	10.74	37.00	70.79	25.68	19.23	-11.32	

Test Engineer : Mark Chen
MARK CHEN

7. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	17.9	0.6
35	16.1	0.7
40	14.0	0.7
45	10.5	0.8
50	7.9	0.7
55	6.7	0.8
60	5.5	1.0
65	5.5	0.9
70	5.6	0.9
75	6.5	1.0
80	7.5	0.9
85	8.5	1.0
90	9.4	1.0
95	10.4	1.1
100	11.5	1.1
110	12.1	1.2
120	12.6	1.2
130	12.0	1.3
140	11.6	1.3
150	10.5	1.3
160	10.5	1.4
170	9.8	1.4
180	9.2	1.5
190	9.0	1.6
200	8.8	1.4
220	10.5	1.7
240	12.2	1.5
260	13.1	1.8
280	13.2	1.8
300	13.4	1.9
320	13.4	1.9
340	13.4	2.0
360	13.9	2.2
380	14.9	2.1
400	15.6	2.1
450	16.4	2.3
500	16.6	2.5
550	19.7	2.4
600	19.3	2.8
650	20.0	2.9
700	19.5	2.9
750	18.5	2.7
800	17.8	3.5
850	18.3	3.3
900	20.5	3.2
950	21.4	4.5
1000	21.2	3.5

8. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver (site 2)	HP	8591EM	3710A01187	9 KHz – 1.8 GHz	Sep. 15, 1998	Conduction
LISN (EUT) (site 2)	Telemeter	NNB-2/16Z	98009	50 ohm / 50 uH	Jan. 21, 1999	Conduction
LISN (Support Unit) (site 2)	EMCO	3810/2NM	9703-1839	50 ohm / 50 uH	Jul. 05, 1999	Conduction
Quasi-peak Adapter (site 5)	HP	85650A	2521A00821	9KHz -1 GHz	Nov. 14, 1998	Radiation
Spectrum Analyzer (Site 5)	HP	8568B	2634A03000	100Hz - 1.5GHz	Nov. 14, 1998	Radiation
Amplifier (Site 5)	HP	8447D	2944A09073	0.1MHz -1.3GHz	Nov. 13, 1998	Radiation
Bilog Antenna (Site 5)	CHASE	CBL6112A	2287	30MHz -2GHz	Jan. 07, 1999	Radiation
Half-wave dipole antenna (Site 5)	EMCO	3121C	9705-1285	28 M - 1GHz	May 18, 1999	Radiation
Turn Table (site 5)	EMCO	2080	9711-2021	0 ~ 360 degree	N/A	Radiation
Antenna Mast (site 5)	EMCO	2075	9711-2115	1 m- 4 m	N/A	Radiation