

FCC PART 15 SUBPART C TEST REPORT

for

TRE901AM

Model No.: CAT1TW6

FCC ID: H5OTR74

of

Applicant: Advance Security Inc.

Address: 3F, 48, Ta An Street, Hsi Chih, Taipei, Taiwan

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1477, TW0020, TW1072

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1

A2LA Accredited No.: 2732.01




Report No.: W6M21809-18449-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com



TABLE OF CONTENTS

1	GENERAL INFORMATION	2
1.1	Notes	2
1.2	Testing laboratory	3
1.2.1	Location	3
1.2.2	Details of accreditation status	3
1.3	Details of approval holder	3
1.4	Application details	4
1.5	General information of Test item	4
1.6	Test standards	5
2	TECHNICAL TEST	6
2.1	Summary of test results	6
2.2	Test environment	6
2.3	Test Equipment List	6
2.4	General Test Procedure	10
3	TEST RESULTS (ENCLOSURE)	12
3.1	Peak Output Power (transmitter)	13
3.2	RF Exposure Compliance Requirements	17
3.3	Out of Band Radiated Emissions	17
3.4	Transmitter Radiated Emissions in restricted Bands	18
3.5	Spurious emissions (tx)	19
3.6	Carrier Frequency Separation	21
3.7	Number of Hopping Frequencies	24
3.7.1	Pseudorandom Frequency Hopping Sequence	25
3.7.2	Coordination of hopping sequences to other transmitters	25
3.7.3	System Receiver Hopping Capability	26
3.7.4	Equal Hopping Frequency Use	26
3.8	Time of Occupancy (Dwell Time)	27
3.9	20dB Bandwidth	31
3.10	Band-edge Compliance of RF Emissions	34
3.11	Radiated Emissions from Receiver Section of Transceiver	37
3.12	Power Line Conducted Emission	38



Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.


Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Tester:

November 19, 2018	Spencer Yang	<i>Spencer</i>
_____	_____	_____
Date	WTS-Lab. Name	Signature

Technical responsibility for area of testing:

November 19, 2018	Kevin Wang	<i>Kevin Wang</i>
_____	_____	_____
Date	WTS Name	Signature



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

1.2 Testing laboratory

1.2.1 Location

OATS

No.5-1, Lishui, Shuang Sing Village,
Wanli Dist., New Taipei City 207,
Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228

FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. TW1477, TW0020, TW1072

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: ./.

Accredited number: ./.

Street: ./.

Town: ./.

Country: ./.

Telephone: ./.

Fax: ./.

1.3 Details of approval holder

Name : Advance Security Inc.

Street : 3F, 48, Ta An Street, Hsi Chih,

Town : Taipei,

Country : Taiwan

Telephone : +886-2-86481688

Fax : +886-2-86481689



Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

1.4 Application details

Date of receipt of test item : October 4, 2018
Date of test : from October 4, 2018 to November 19, 2018

1.5 General information of Test item

Type of test item : TRE901AM
Model Number : CAT1TW6
Multi-listing model number : ./.
Photos : see Appendix

Technical data

Frequency band : 908.30-923.783 MHz
Frequency (ch A) : 908.30 MHz
Frequency (ch B) : 917.233 MHz
Frequency (ch C) : 923.783 MHz

Transmitter Unom

Peak Power
Power (ch A or ch 1) : Conducted: 16.96 dBm
Power (ch B or ch 16) : Conducted: 16.97 dBm
Power (ch C or ch 25) : Conducted: 17.03 dBm

Average Power
Power (ch A or ch 1) : Conducted: 12.77 dBm
Power (ch B or ch 16) : Conducted: 12.92 dBm
Power (ch C or ch 25) : Conducted: 12.96 dBm


Power supply : 3Vd.c. (CR2450)

Operation modes : Duplex

Modulation Type : FHSS

Antenna Type : Helical antenna

Antenna gain : -3 dBi



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

Host device : none

Classification :

Fixed Device	<input type="checkbox"/>
Mobile Device (Human Body distance > 20cm)	<input checked="" type="checkbox"/>
Portable Device (Human Body distance < 20cm)	<input type="checkbox"/>

Manufacturer:
(if applicable)

Name : ./.
Street : ./.
Town : ./.
Country : ./.

1.6 Test standards

Technical standard : FCC RULES PART 15 SUBPART C § 15.247 (2017-10)



Registration number: W6M21809-18449-C-1
 FCC ID: H50TR74

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

or

The deviations as specified in 3 were ascertained in the course of the tests performed.

2.2 Test environment

Relative humidity content : 20 ... 75 %

Air pressure : 86 ... 103 kPa

Details of power supply : 3Vd.c. (CR2450)

Extreme conditions parameters : test voltage : -- extreme
 min :-- V
 max :-- V

Description of Tested System : ./.

Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Emission	Expanded Uncertainty : 1.54 dB
Estimation Result of Uncertainty of Radiated Emission(3M)	Expanded Uncertainty : 0.009-30 MHz : 2.17 dB 30-1000 MHz : 3.57 dB 1-18 GHz : 2.60 dB 18-40 GHz : 2.58 dB
Estimation Result of Uncertainty of Bandwidth Measurement 20 dB Bandwidth, Occupied bandwidth, Channel bandwidth, Necessary Bandwidth	Expanded Uncertainty : 0.45 kHz
Estimation Result of Uncertainty of Conducted Output Power Measurement Output power	Expanded Uncertainty : 1.01 dB
Estimation Result of Uncertainty of Power Density Measurement Power density	Expanded Uncertainty : 1.73 dB
Estimation Result of Uncertainty of Band Edge Measurement	Expanded Uncertainty : 0.98 dBc
Estimation Result of Uncertainty of Frequency Separation Measurement Hopping channel separation	Expanded Uncertainty : 552.91 Hz
Estimation Result of Uncertainty of Duty Cycle Measurement Dwell time	Expanded Uncertainty : 0.099 ms



Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

2.3 Test Equipment List


No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2018/5/30	2019/5/29
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V- NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2018/11/1	2019/10/31
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2018/8/21	2019/8/20
ETSTW-CE 008	HF-EICHELITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2018/7/13	2019/7/12
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2018/9/25	2019/9/24
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2018/7/16	2019/7/15
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2018/5/30	2019/5/29
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2018/5/21	2019/5/20
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2018/7/13	2019/7/12
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2018/7/12	2019/7/11
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2018/3/26	2019/3/25
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2018/1/23	2019/1/22
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2018/4/13	2019/4/12
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2018/4/26	2019/4/25
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2018/3/1	2019/2/28
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2018/3/1	2019/2/28
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2018/3/1	2019/2/28
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2018/3/6	2019/3/5
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2018/3/1	2019/2/28
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2018/3/30	2019/3/29
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2018/9/17	2019/9/16
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2018/9/18	2019/9/17
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2018/4/16	2019/4/15
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2018/2/23	2019/2/22
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2018/1/15	2019/1/14
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Function test	
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2018/5/29	2019/5/28
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2018/8/8	2019/8/7
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2018/8/8	2019/8/7
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2018/2/27	2019/2/26
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2018/8/8	2019/8/7
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2018/8/8	2019/8/7
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2018/3/30	2019/3/29
ETSTW-RE 147	Bi-log Hybrid Antenna	MCTD 2786B	BLB16M04005	ETC	2018/3/23	2019/3/22
ETSTW-RE 151	Thermohygrometer	608-h1	45104376	TESTO	2018/8/17	2019/8/16
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2018/5/10	2019/5/9
ETSTW-EMS 008	Exposure Level Tester	ELT-400	G-0009	Narda	2018/7/17	2019/7/16
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2018/2/27	2019/2/26
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2018/3/2	2019/3/1
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2018/10/19	2019/10/18
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2018/1/11	2019/1/10
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2018/1/11	2019/1/10
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2018/1/11	2019/1/10
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2018/1/11	2019/1/10
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2018/9/12	2019/9/11
ETSTW-GSM 024	Radio Communication Analyzer	MT8821C	None	Anritsu	2018/3/7	2019/3/6
ETSTW-GSM 025	Band Reject Filter	BRM19835	001	Micro-Tronics	2018/8/9	2019/8/8
ETSTW-Cable 011	SMA to N type Cable	RGU-400	None	THERMAX	Pre-test Use NCR	
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2018/2/22	2019/2/21
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2018/2/22	2019/2/21
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2018/2/22	2019/2/21
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2018/2/22	2019/2/21
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2018/7/2	2019/7/1
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2018/2/27	2019/2/26
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2018/5/14	2019/5/13
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2018/9/18	2019/9/17
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2018/9/18	2019/9/17
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S Cable 9)	279067	HUBER+SUHNER	2018/2/27	2019/2/26
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S Cable 10)	238092	HUBER+SUHNER	2018/3/30	2019/3/29



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21809-18449-C-1
 FCC ID: H50TR74

ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2018/3/30	2019/3/29
ETSTW-Cable 048	Microwave Cable	SUCOFLEX 104	325519	HUBER+SUHNER	2018/3/30	2019/3/29
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2018/6/9	2019/6/8
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2018/3/30	2019/3/29
ETSTW-Cable 066	SMA type cable	32022	None	ASTROLAB	2018/8/30	2019/8/29
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM-NM-25000	170239	EMCI	2018/6/9	2019/6/8
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	



Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 23°C with a humidity of 40 %.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBμV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.


Example:

Freq (MHz) METER READING + ACF + CABLE LOSS (to the receiver) = FS
33 20 dBμV + 10.36 dB + 6 dB = 36.36 dBμV/m @3m

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.10-2013 6.2.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.



Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:


Average = Peak + Duty Factor

Duty Factor = $20 \log(\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB


ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Registration number: W6M21809-18449-C-1
 FCC ID: H50TR74

3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Equivalent isotropically radiated Power	15.247(b)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions radiated – Transmitter operating	15.247(c)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions conducted – Transmitter operating	15.247	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Carrier Frequency Separation	15.247(a) (1)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Number of Hopping Frequencies	15.247(a) (1)(i)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Time of Occupancy (Dwell Time)	15.247(a) (1)(i)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
20 dB Bandwidth	15.247(a) (1)(i)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Band-edge Compliance of RF Emission	15.247(c)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Emission from Receiver L.O.	15.109	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Power Line Conducted Emission	15.207(a)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>



Registration number: W6M21809-18449-C-1
FCC ID: H50TR74


3.1 Peak Output Power (transmitter)

FCC Rule: 15.247


This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

Peak Power

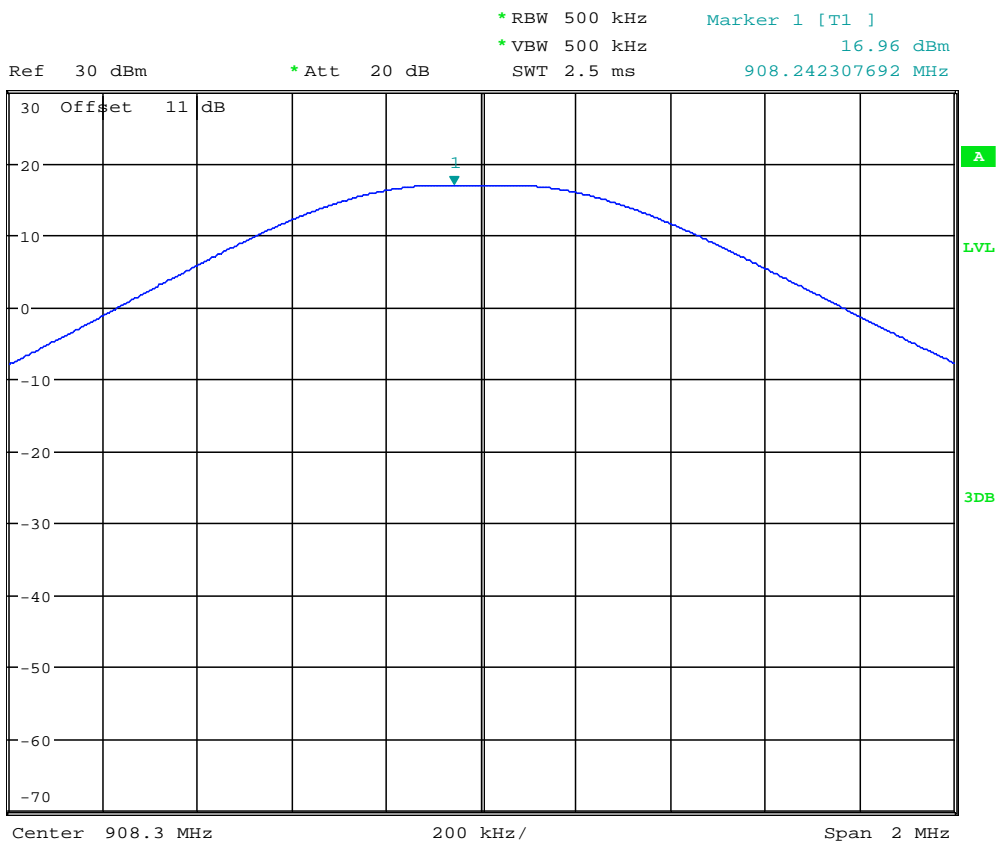


MAX OUTPUT POWER 908.3MHZ
Date: 4.OCT.2018 11:07:20




Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

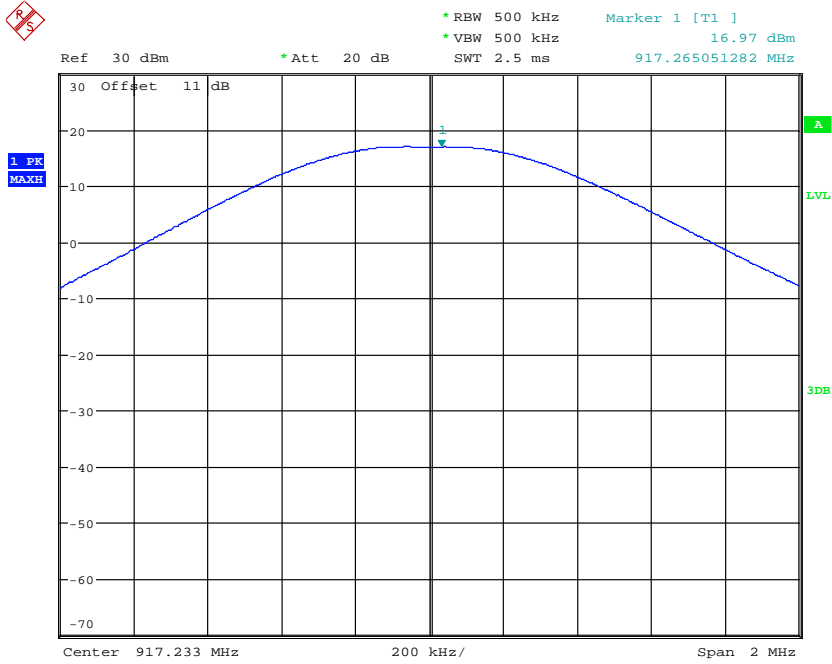

MAX OUTPUT POWER 917.233MHZ
Date: 4.OCT.2018 11:09:07

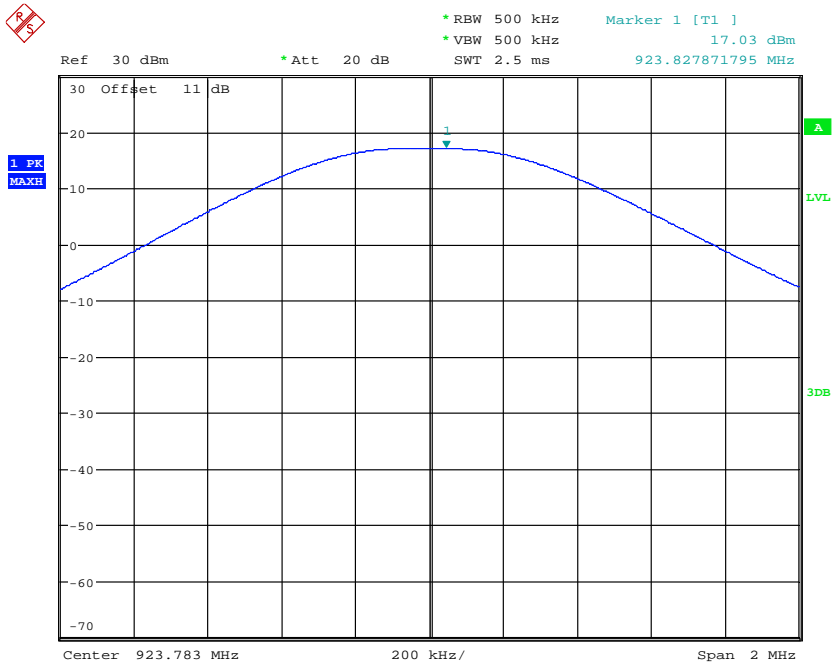


MAX OUTPUT POWER 923.783MHZ
Date: 4.OCT.2018 11:10:01




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21809-18449-C-1
FCC ID: H50TR74


Average Power

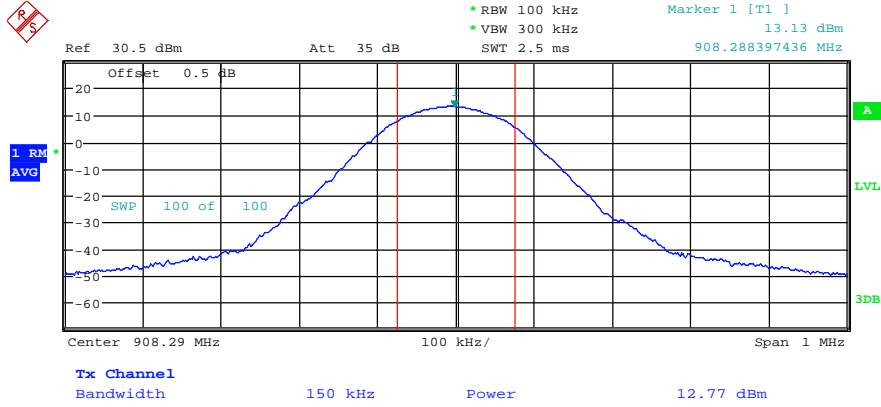


Date: 19.NOV.2018 17:36:23

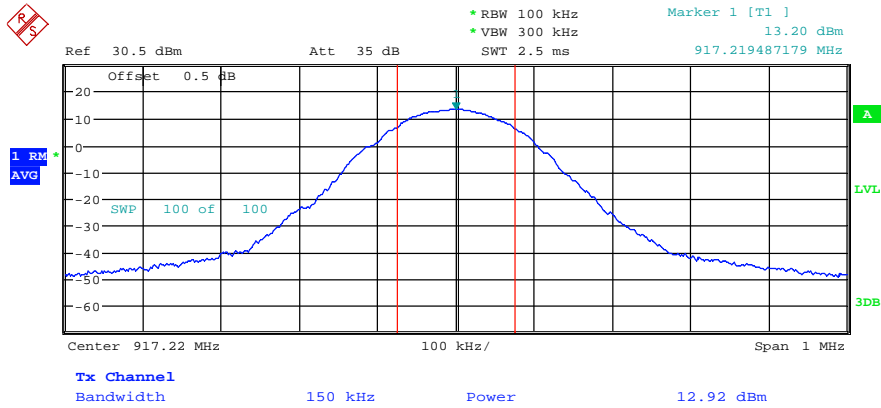

Date: 19.NOV.2018 17:37:32



Registration number: W6M21809-18449-C-1
 FCC ID: H50TR74

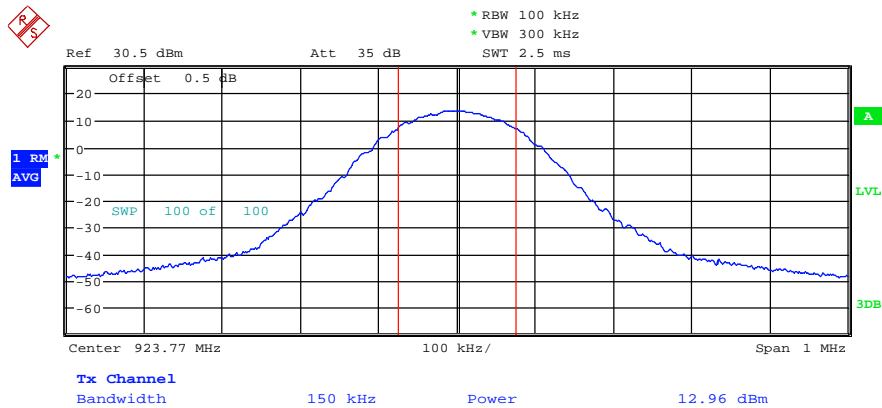

Date: 19.NOV.2018 17:38:21

Measurement uncertainty: $\leq \pm 1.01$ dB


Maximum Peak Output Power

Limits:

Frequency MHz	Number of hopping channels			
	≥ 75	≥ 50	$49 \geq 25$	$74 \geq 15$
902-928		30 dBm	24 dBm	
2400-2483.5 MHz	30 dBm	-		21 dbm
5725-5850 MHz	30 dBm	-		

In case of employing transmitter antennas having antenna gain $> \text{dBi}$ and using fixed point-to point operation consider §15.247 (b)(4).

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

3.2 RF Exposure Compliance Requirements

According to Supplement C, Edition 01-01 to OET Bulletin 65, Edition 97-01 this spread spectrum transmitter is categorically excluded from routine environmental evaluation because of the low power level, where there is a high likelihood of compliance with RF exposure standards.

3.3 Out of Band Radiated Emissions

FCC Rule: 15.247(c) , 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies below 1GHz :

Max. reading – 20 dB

Guidance on Measurement of FHSS Systems:

“If the emission is pulsed, modify the unit for continuous operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.” Here the correction was added to the limit instead subtracted from the reading.

Duty Cycle correction = $20 \log (\text{dwell time}/100\text{ms})$

For frequencies above 1GHz (Peak measurements).


Limit = max. aver. reading-20dB +20dB(because Peak detector is used)

For frequencies above 1GHz (Average measurements).

Max. reading – 20 dB - duty cycle correction:

No duty cycle correction was added to the reading

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 042,
ETSTW-RE 043, ETSTW-RE 044, ETSTW-RE 064



Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

3.4 Transmitter Radiated Emissions in restricted Bands

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26000 MHz.

For radiated emission tests, the analyzer setting was as followings:

RES BW VID BW

Frequency <1 GHz 100 kHz 100 kHz (Peak measurements)

Frequency >1 GHz 1 MHz 1 MHz (Peak measurements)

1 MHz 1 MHz (Average measurements)

Limits:

For frequencies below 1GHz :

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of FHSS Systems:

“If the emission is pulsed, modify the unit for continues operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.” Here the correction was added to the limit instead subtracted from the reading.

Duty cycle correction = 20 log (dwell time/100ms)

For frequencies above 1GHz (Average measurements).

Limit – duty cycle correction

No duty cycle correction was added to the reading.

54.0dBμV/m

For frequencies above 1GHz (Peak measurements).

Limit + 20dB

54.0dBμV/m + 20 dB= 74 dBμV/m

Note: See attached diagrams.

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 042,
ETSTW-RE 043, ETSTW-RE 044, ETSTW-RE 064



Registration number: W6M21809-18449-C-1
 FCC ID: H50TR74

3.5 Spurious emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance to point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value an exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Marker-Delta-Method" or the „Duty-Cycle Correction Factor“.

Model: CAT1TW6 Date: --
 Mode: -- Temperature: -- °C Engineer: --
 Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV/m)		Limit (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21809-18449-C-1
 FCC ID: H50TR74

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV/m)		Limit (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--


Note

1. Correction Factor = Antenna factor + Cable loss - Preamplifier
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Measurement uncertainty above 1GHz: 30-1000 MHz = ± 3.57 dB, 1-18 GHz = ± 2.60 dB, 18-40 GHz = ± 2.58 dB ; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2. The decision rule is “false acceptance”.
6. Up Line: PK Limit Line, Down Line: Ave Limit Line.

All other not noted test plots do not contain significant test results in relation to the limits.

TEST RESULT (Transmitter): The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 042, ETSTW-RE 043, ETSTW-RE 044, ETSTW-RE 064




Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

3.6 Carrier Frequency Separation


Carrier Frequency Separation was measured with modulation (declared by manufacturer).

According to FCC rules part 15 subpart C §15.247 frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater.

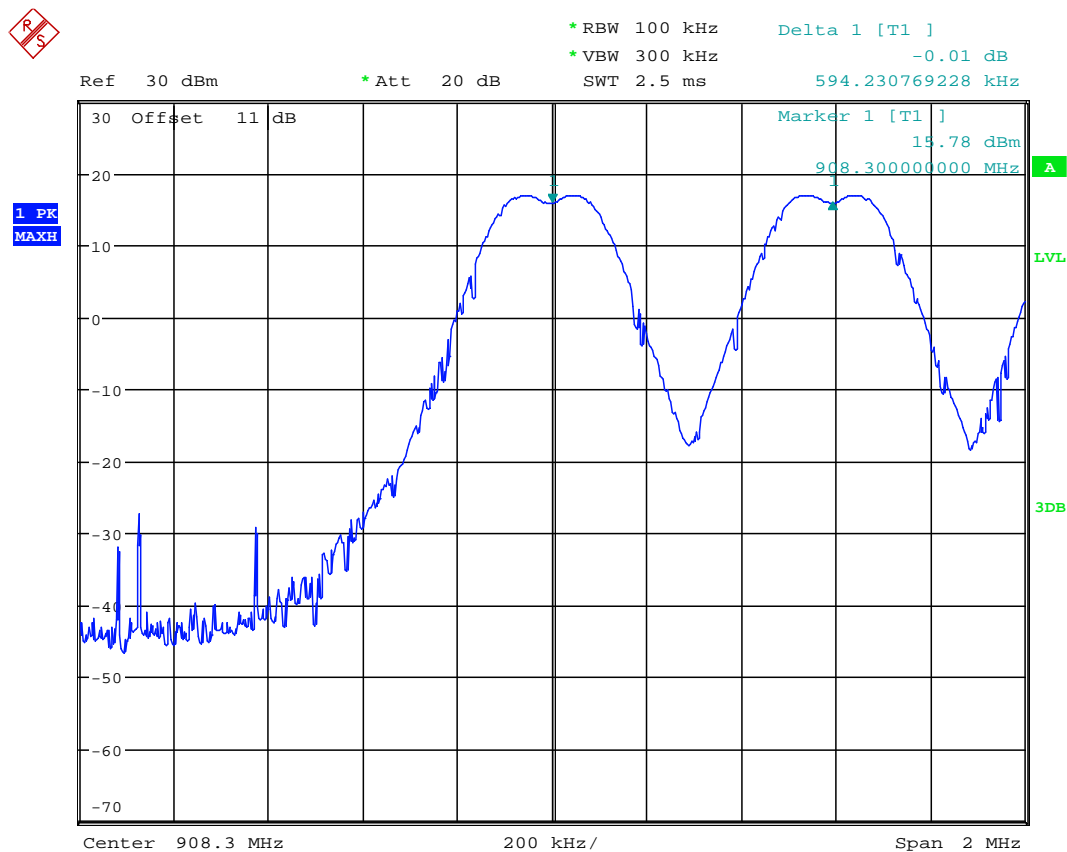


FREQUENCY SEPARATION


Date: 4.OCT.2018 11:51:34




Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

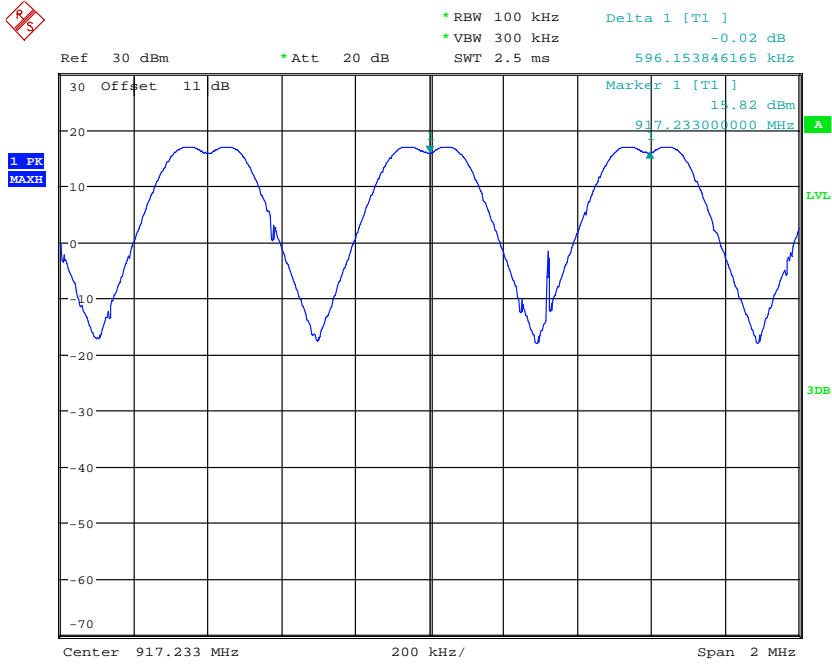

FREQUENCY SEPARATION
Date: 4.OCT.2018 11:55:49

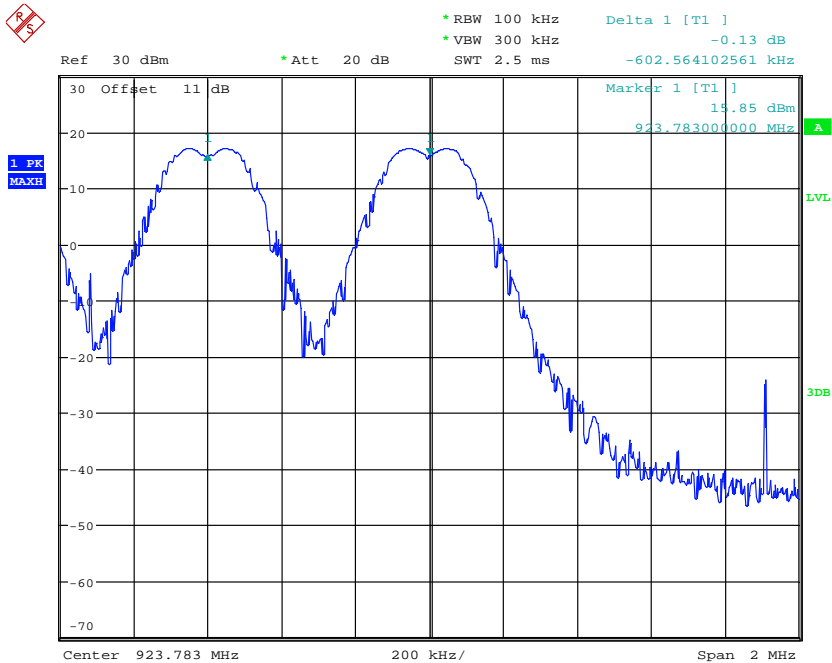

FREQUENCY SEPARATION
Date: 4.OCT.2018 11:58:44




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

Limits:

Frequency Range MHz	Limits	
	20 dB bandwidth < 25 kHz	20 dB bandwidth > 25 kHz
902-928	25 kHz	20 dB bandwidth
2400-2483.5 5725-5850.0	25 kHz	20 dB bandwidth

Test equipment used: ETSTW-RE 055, ETSTW-RE 064




Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

3.7 Number of Hopping Frequencies

According to FCC rules part 15 subpart C §15.247 frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies. Frequency hopping systems in 5725-5850 MHz bands shall use least 75 hopping frequencies.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20dB bandwidth of the hopping channel 250 kHz or greater, the system shall use at least 25 hopping frequencies.

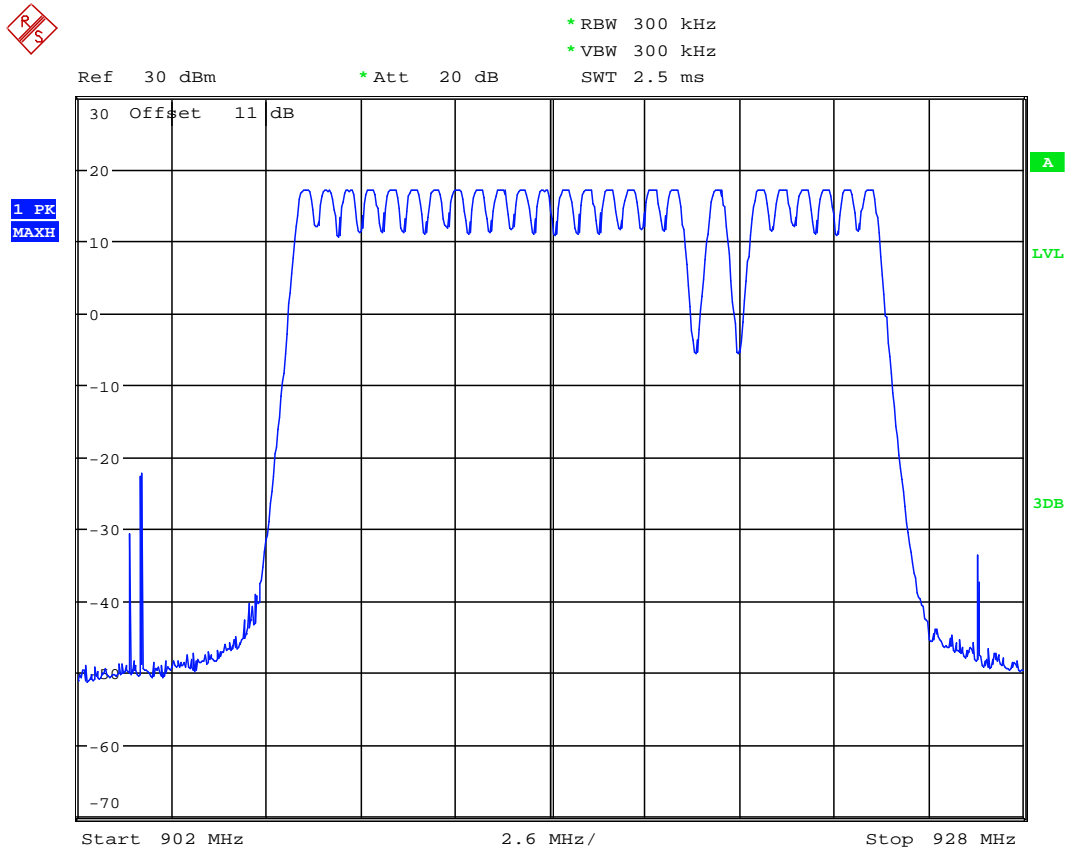

NUMBER OF HOPPING

Date: 4.OCT.2018 13:10:57



Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

Limits:

Frequency Range MHz	Limit	
	20dB Bandwidth	Number of Channels
902-928 MHz	Bandwidth < 250 kHz	≥ 50
	Bandwidth ≥ 250 kHz	≥ 25
2400-2483.5	not defined	15
5725-5850.0 MHz	1 MHz	75

Test equipment used: ETSTW-RE 055, ETSTW-RE 064


3.7.1 Pseudorandom Frequency Hopping Sequence

This FHSS transmitter is controlled by a microchip to generate the Pseudorandom Frequency Hopping Sequence. There are three hopping sequences listed below:

908.300, 908.895, 909.490, 910.085, 910.680, 911.277, 911.872, 912.467, 913.063, 913.658, 914.255, 914.850, 915.444, 916.040, 916.635, 917.233, 917.825, 918.422, 919.612, 920.805, 921.400, 921.995, 922.590, 923.188, 923.783MHz

3.7.2 Coordination of hopping sequences to other transmitters

This transmitter does not have the ability of being coordinated with other FHSS system for as soon as the transmitter is in operation, the hopping frequency will follow the selected hopping sequence to transmit independently and no coordination is possible. Especially, this transmitter is used as a duplex car alarm system, so no coordination of hopping frequency is required.



Registration number: W6M21809-18449-C-1
FCC ID: H50TR74


3.7.3 System Receiver Hopping Capability

There are two steps to make the receiver to shift the frequencies in synchronization with the transmitted signals:

First, the Transmitter will emit a preamble signal of 150 ms and the receiver will scan this signal by 2ms sweeping until the preamble signal is caught. Second, the preamble signal is coded with the information of hopping sequence and the next transmitting frequency.

3.7.4 Equal Hopping Frequency Use

Due to each hopping frequency will be transmitted in accordance to the frequency tables described above, there is no any frequency will be able to hop more times than others. Therefore each frequency will be used equally.




Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

3.8 Time of Occupancy (Dwell Time)


Frequency hopping systems operating in the 5725-5850 MHz band shall use an average time of occupancy on any frequency not greater than 0.4 seconds within a 30 second period.
In 2400-2483.5 MHz band the average time of occupancy on any channel shall not be greater than 0.4 seconds multiplied by the number of hopping channels employed.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

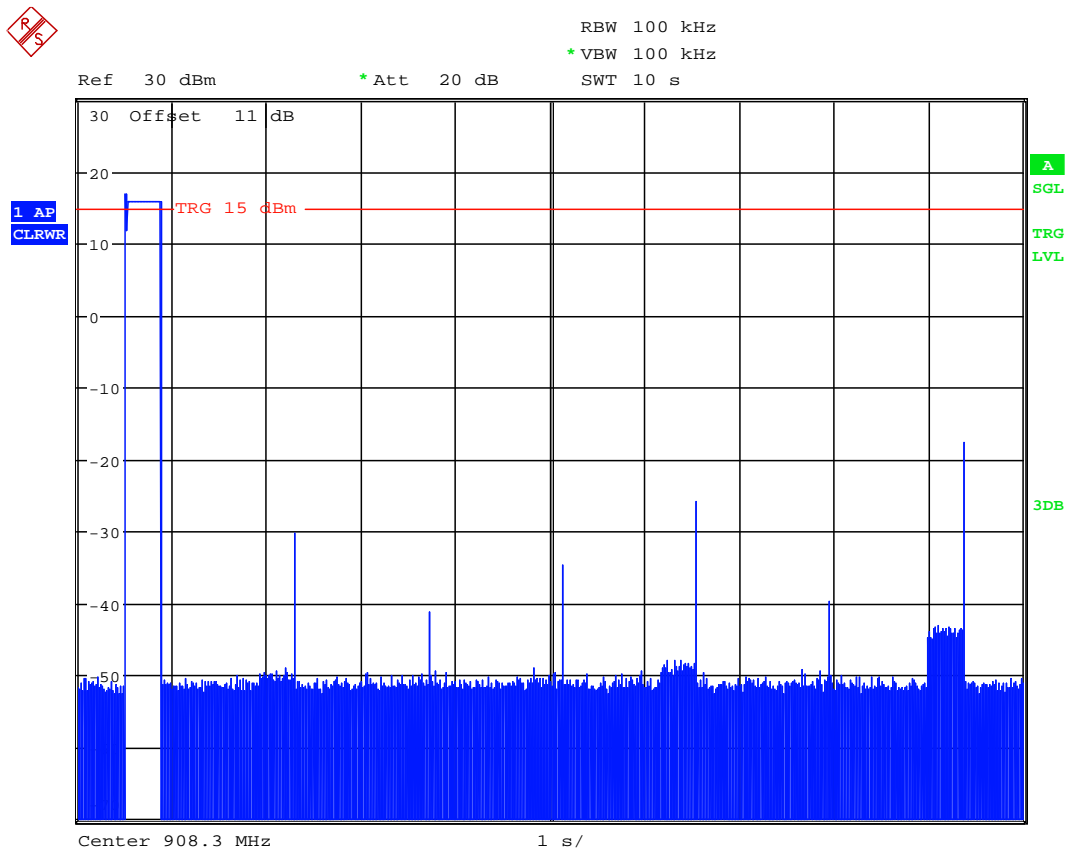


DWELL TIME 908.3MHZ

Date: 4.OCT.2018 13:16:39




Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

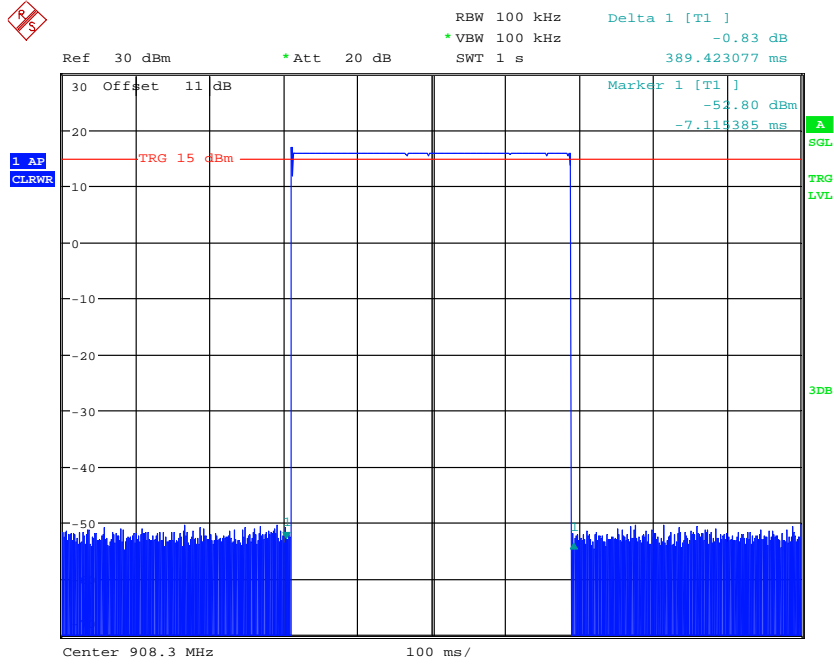


DWELL TIME 908.3MHZ
Date: 4.OCT.2018 13:22:48

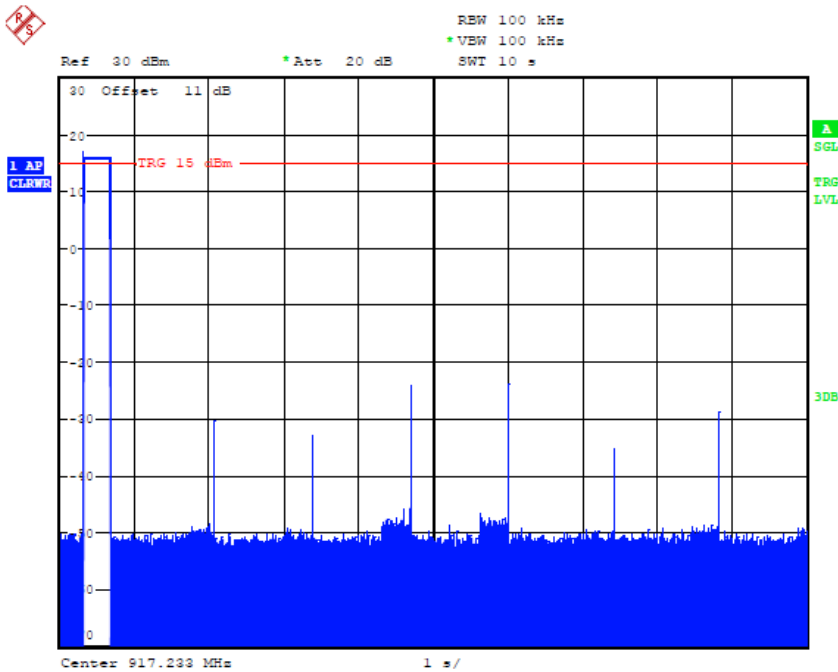


DWELL TIME 917.233MHZ
Date: 4.OCT.2018 13:31:45




Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

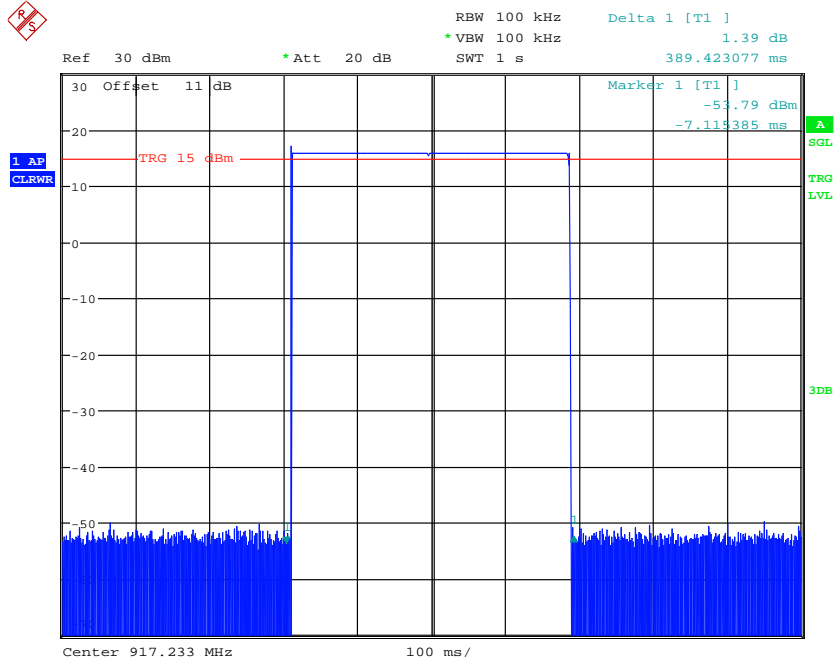


DWELL TIME 917.233MHZ
Date: 4.OCT.2018 13:25:08

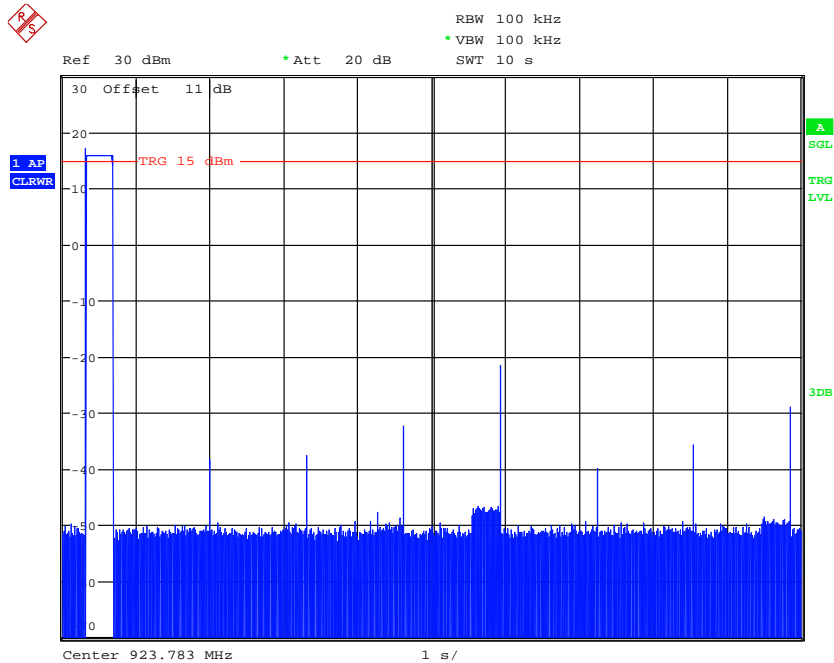

DWELL TIME 923.783MHZ
Date: 4.OCT.2018 13:29:53



Registration number: W6M21809-18449-C-1
 FCC ID: H50TR74

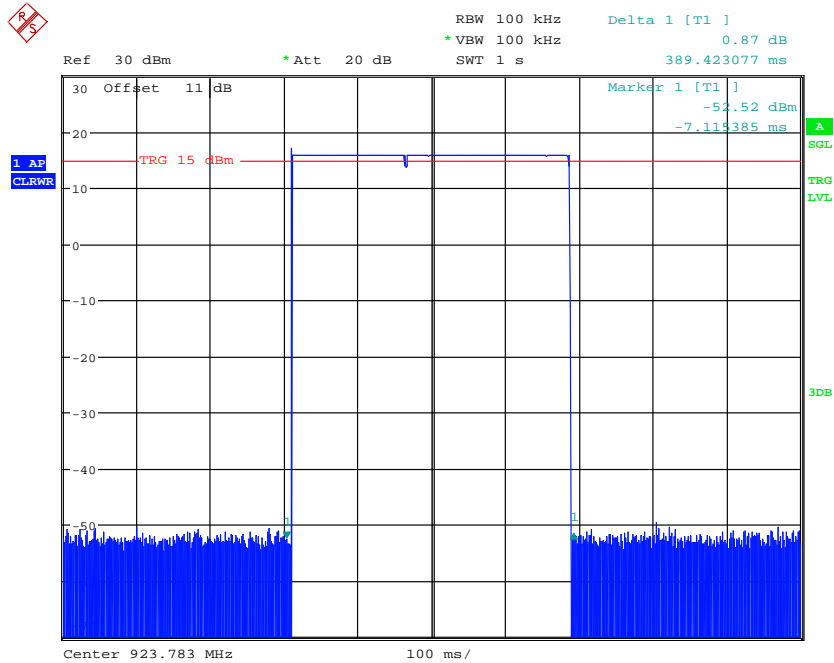


DWELL TIME 923.783MHZ
 Date: 4.OCT.2018 13:28:03

Limits and measurement periods:

Frequency MHz	Number of channels	Measurement Period	Limit
902 – 928	≥50	20 s	0.4 s
	49 ≥ 25	10 s	0.4 s
2400 – 2483.5	≥ 15	0.4 s * number of used channels	0.4 s
5725- 5850	≥ 75	30 s	0.4s

Test equipment used: ETSTW-RE 055, ETSTW-RE 064




Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

3.9 20dB Bandwidth

Frequency hopping systems operating in the 5725-5850 MHz bands shall use a maximum 20dB bandwidth of 1 MHz.


The 20dB bandwidth is measured on the lowest, middle and highest hopping channel.

For frequency hopping systems operating in the 902-928 MHz band the maximum 20dB bandwidth of the hopping channel is 500 kHz.

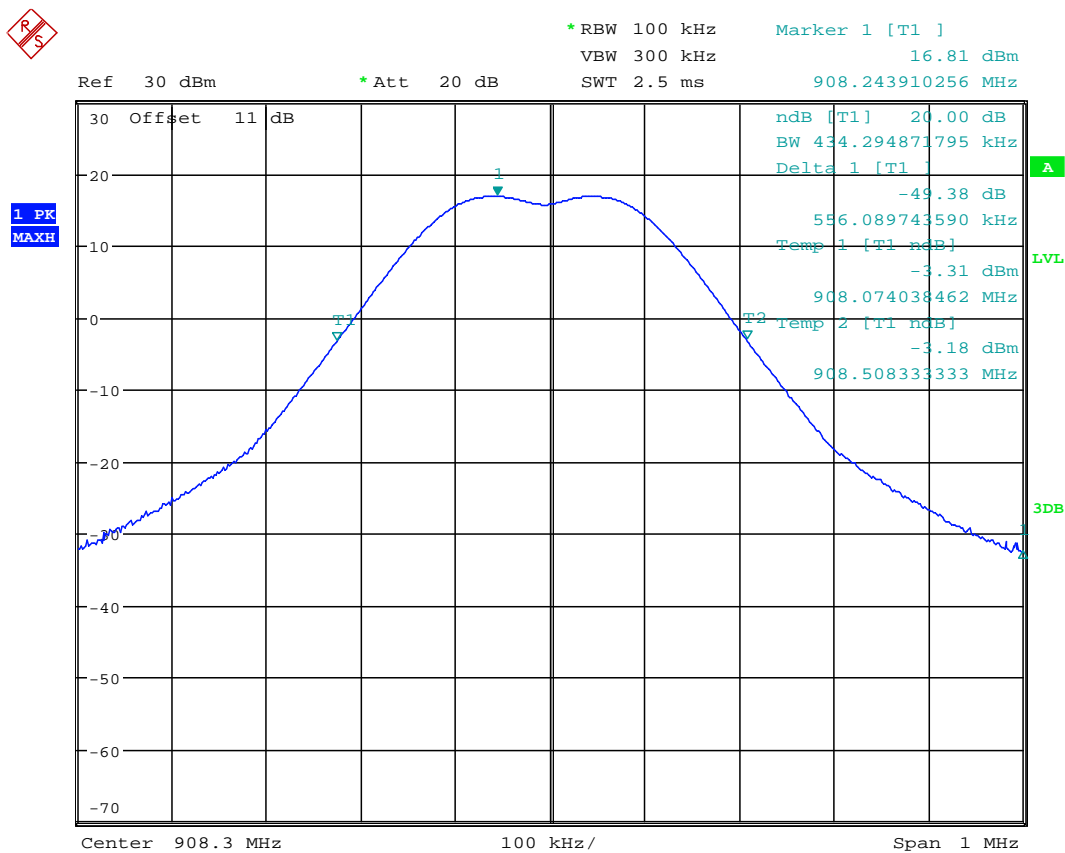


20DB BANDWIDTH 908.3MHZ

Date: 4.OCT.2018 10:48:08




Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21809-18449-C-1
 FCC ID: H50TR74

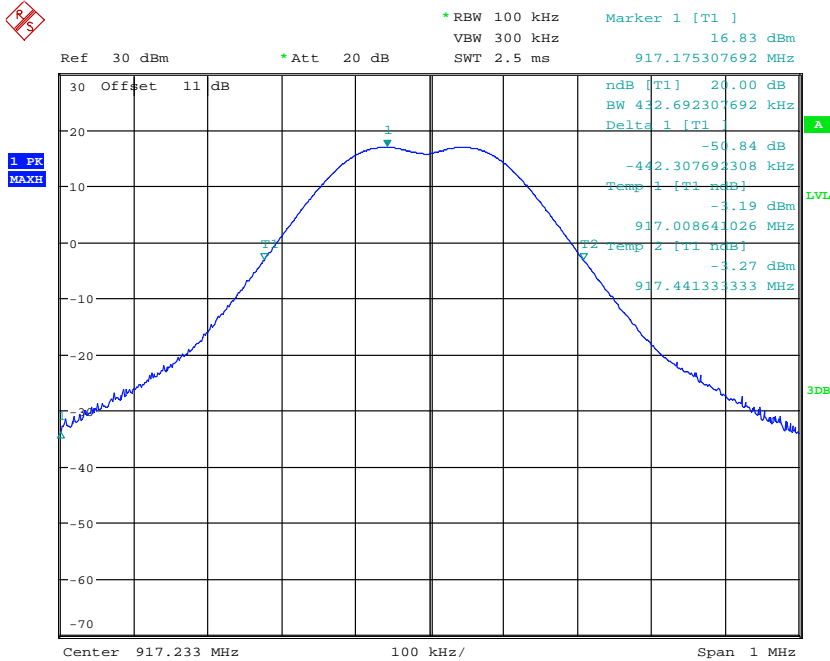

20DB BANDWIDTH 917.233MHZ
 Date: 4.OCT.2018 10:48:48

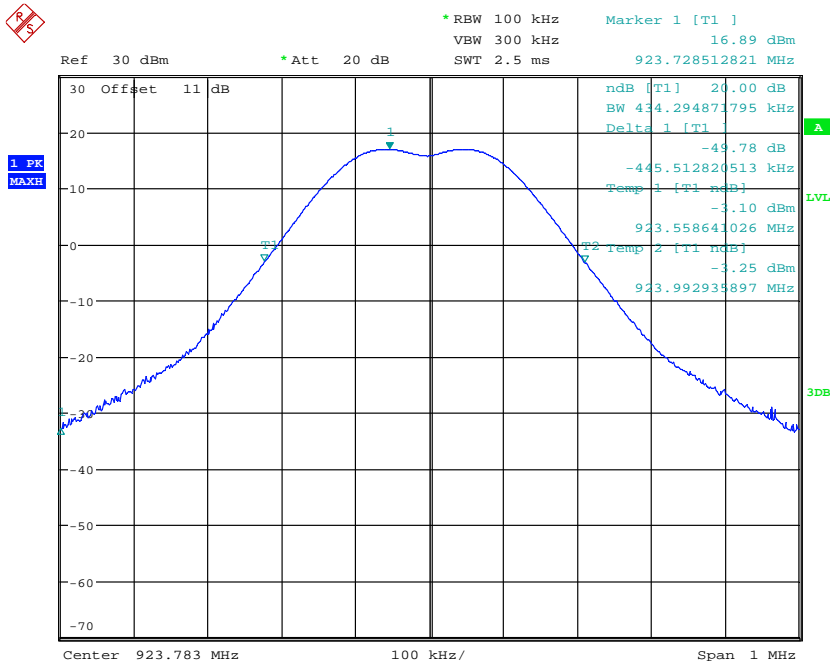

20DB BANDWIDTH 923.783MHZ
 Date: 4.OCT.2018 10:49:38




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

Limits:

Frequency Range / MHz	Limit
902-928	≤ 500 kHz
2400-2483.5	not defined
5725-5850	≤ 1 MHz

Test equipment used: ETSTW-RE 055, ETSTW-RE 064




Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

3.10 Band-edge Compliance of RF Emissions

According to FCC rules part 15 subpart C §15.247(c) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

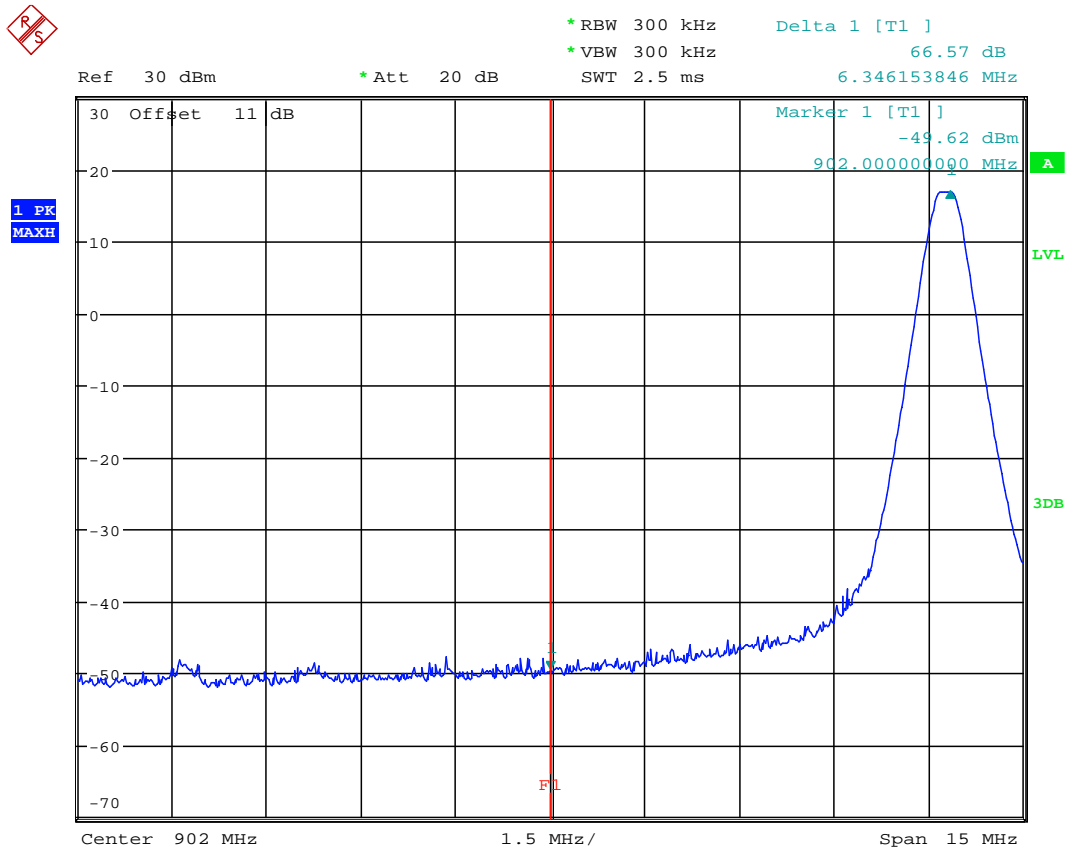


BANDEDGE 908.3MHZ

Date: 4.OCT.2018 10:53:18




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

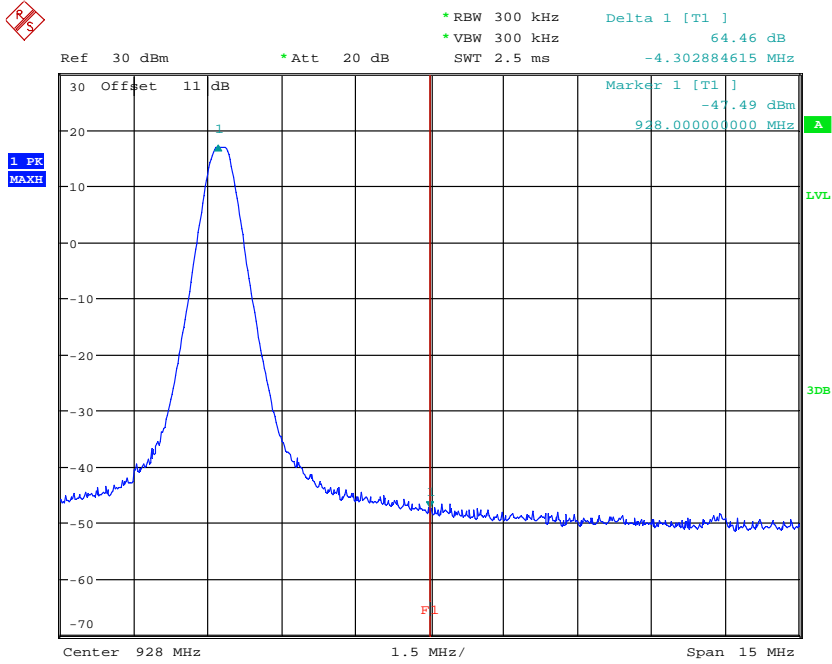

BANDEDGE 923.783MHZ
Date: 4.OCT.2018 10:51:57

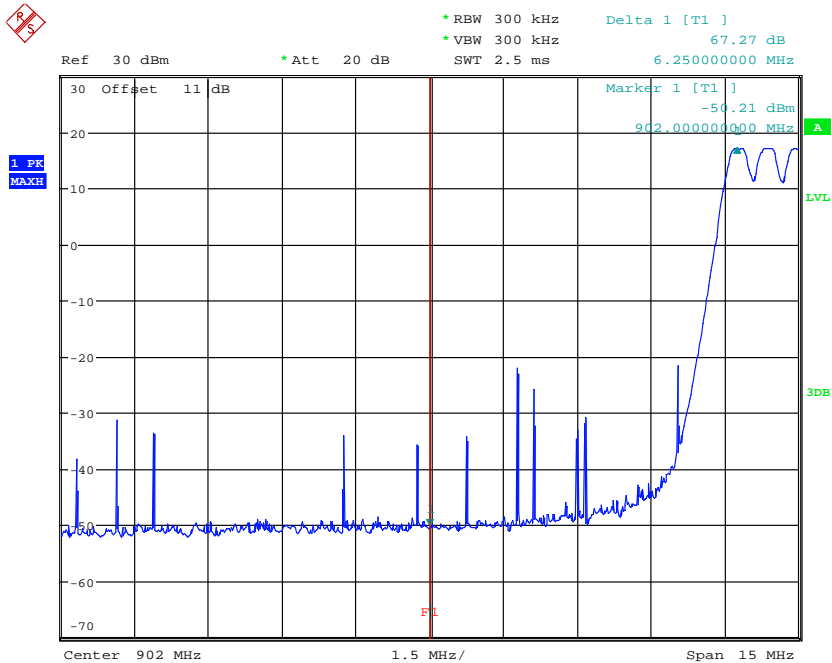


BANDEDGE HOPPING MODE 908.3MHZ
Date: 4.OCT.2018 11:14:05



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21809-18449-C-1
 FCC ID: H5OTR74

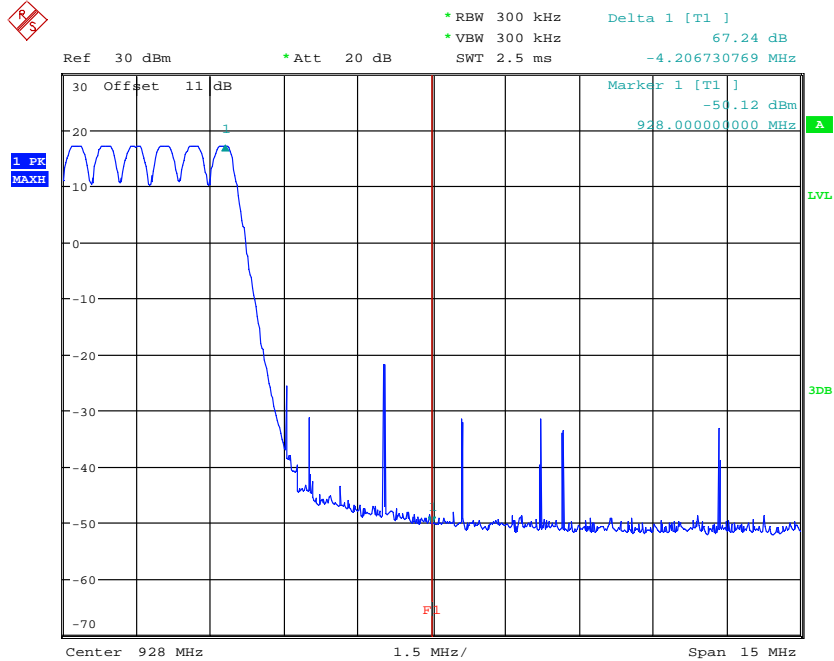

BANDEDGE HOPPING MODE 923.783MHZ
 Date: 4.OCT.2018 11:15:37

Limits:

Frequency Range / MHz	Limit
902 – 928	- 20 dB
2400 – 2483.5	
5725 - 5850	

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

3.11 Radiated Emissions from Receiver Section of Transceiver

FCC Rule: 15.109

Summary table with radiated data of the test plots

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Explanation: The test results are listed in the separated test report no.: W6M21809-18449-P-15B.

Test equipment used: ETSTW-RE 055, ETSTW-RE 064, ETSTW-RE 004, ETSTW-RE 030
ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147



Registration number: W6M21809-18449-C-1
 FCC ID: H50TR74

3.12 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Frequency	Level (dBμV)	
	quasi-peak	average
150 kHz	lower limit line	Lower limit line

Model: CAT1TW6 Date: --
 Mode: -- Temperature: -- °C Engineer: --
 Polarization: N Humidity: -- %

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV)		Limit (dBuV)		Margin (dB)
	QP	Ave.		QP	Ave.	QP	Ave.	
--	--	--	--	--	--	--	--	--

Polarization: L1

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV)		Limit (dBuV)		Margin (dB)
	QP	Ave.		QP	Ave.	QP	Ave.	
--	--	--	--	--	--	--	--	--


Note

1. The formula of measured value as: **Test Result = Reading + Correction Factor**
2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Measurement uncertainty = ±1.54 dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2. The decision rule is “false acceptance”.
6. Up Line: QP Limit Line, Down Line: Ave Limit Line.
7. This test is not required.

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-CE 028



Registration number: W6M21809-18449-C-1
FCC ID: H50TR74

Appendix

Measurement diagrams

Spurious Emissions radiated_TX



Radiated Emission Measurement

Operator: Vincent

File :1

Data :#1


Date: 10/15/2018

Temperature:23 °C

80.0 dBuV/m

Time: 11:47:10 AM

Humidity:74.2 %

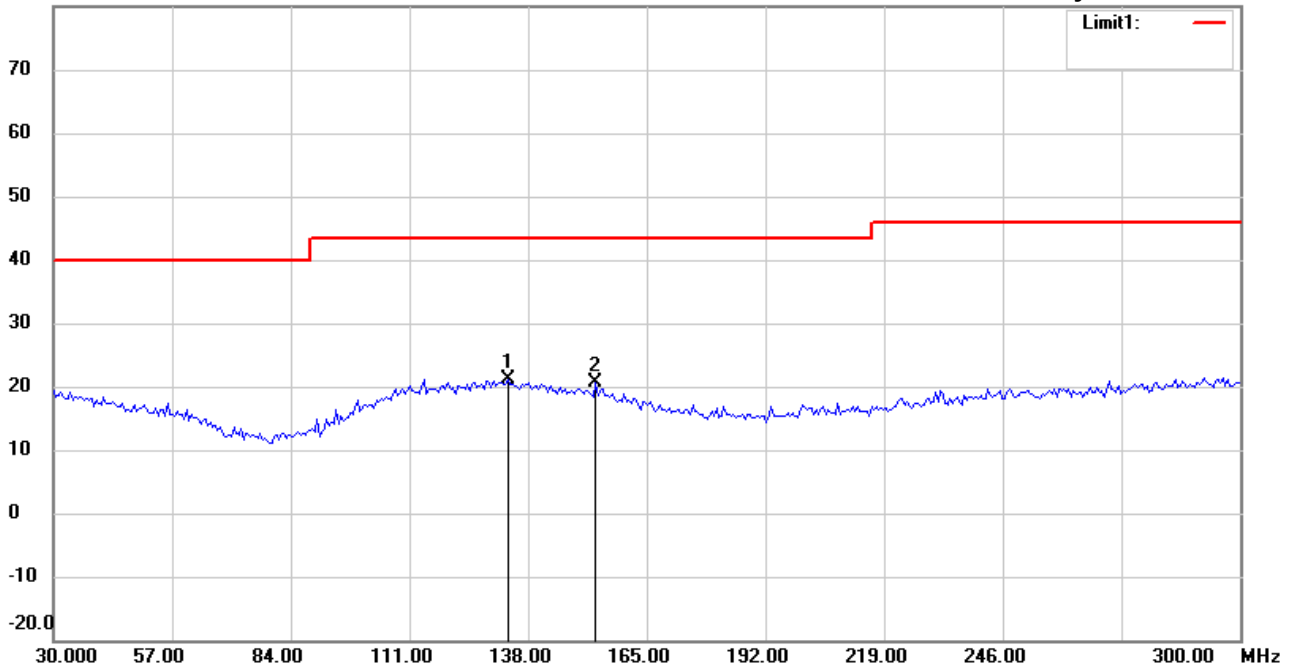

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.30MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	133.3466	27.56	peak	-6.36	21.20	43.50	100	155	-22.30	
	153.3667	28.35	peak	-7.73	20.62	43.50	100	87	-22.88	



Radiated Emission Measurement

Operator: Vincent

File :1

Data :#2


Date: 10/15/2018

Temperature:23 °C

80.0 dBuV/m

Time: 11:48:21 AM

Humidity:74.2 %

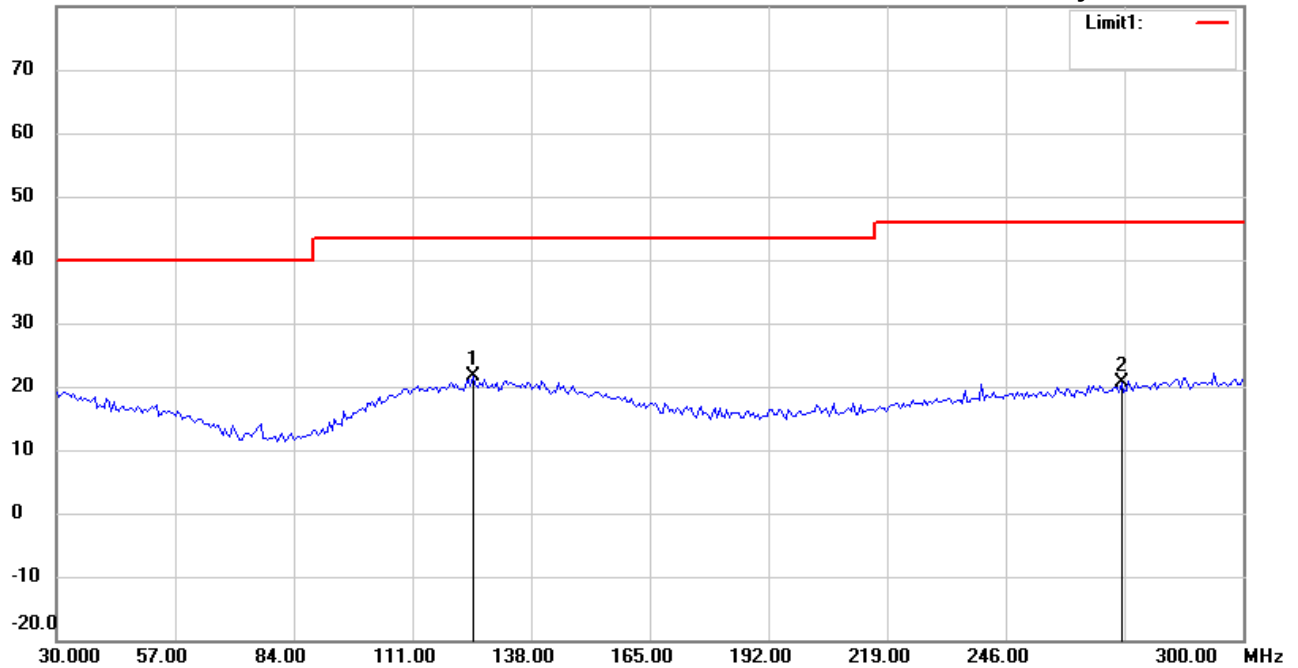

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21809-18449

M/N:

Test Mode : TX 908.30MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	124.6894	28.06	peak	-6.46	21.60	43.50	100	255	-21.90	
	272.4048	26.93	peak	-6.38	20.55	46.00	100	140	-25.45	



Radiated Emission Measurement

Operator: Vincent

File :2

Data :#1


Date: 10/15/2018

Temperature:23 °C

80.0 dBuV/m

Time: 11:49:34 AM

Humidity:74.2 %

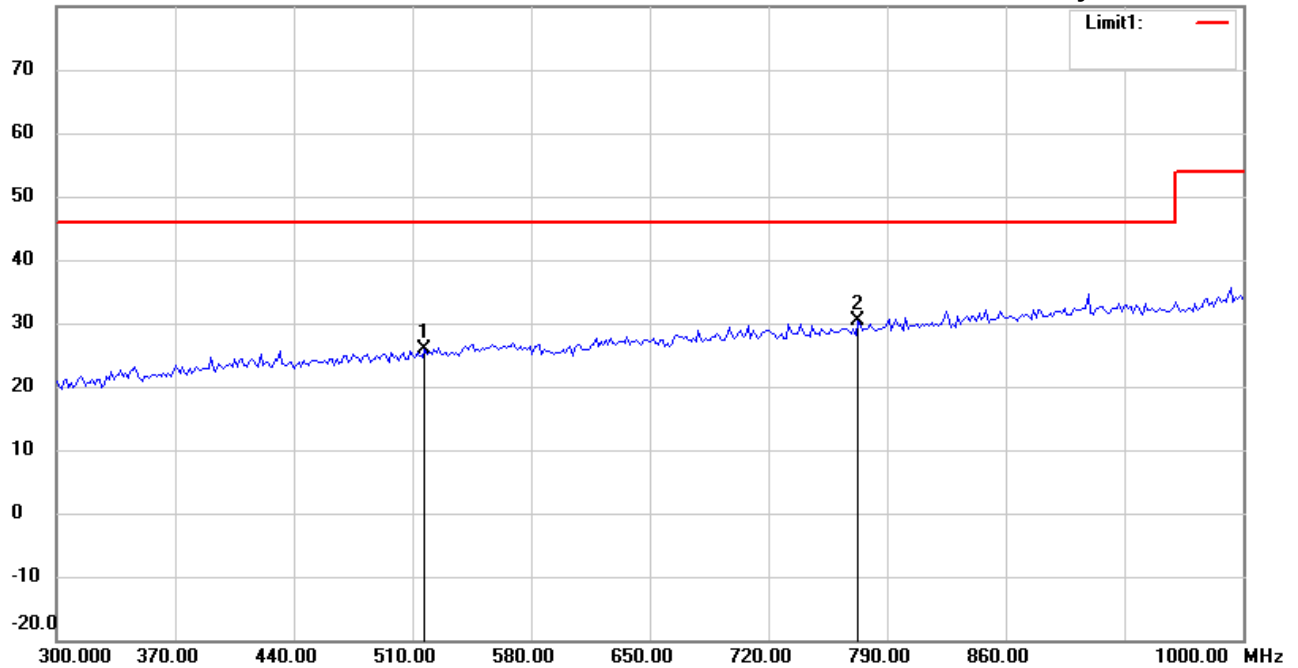

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.30MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	517.4348	27.60	peak	-1.84	25.76	46.00	100	120	-20.24	
*	772.7454	28.41	peak	2.06	30.47	46.00	100	250	-15.53	



Radiated Emission Measurement

Operator: Vincent

File :2

Data :#2


Date: 10/15/2018

Temperature:23 °C

80.0 dBuV/m

Time: 11:50:38 AM

Humidity:74.2 %

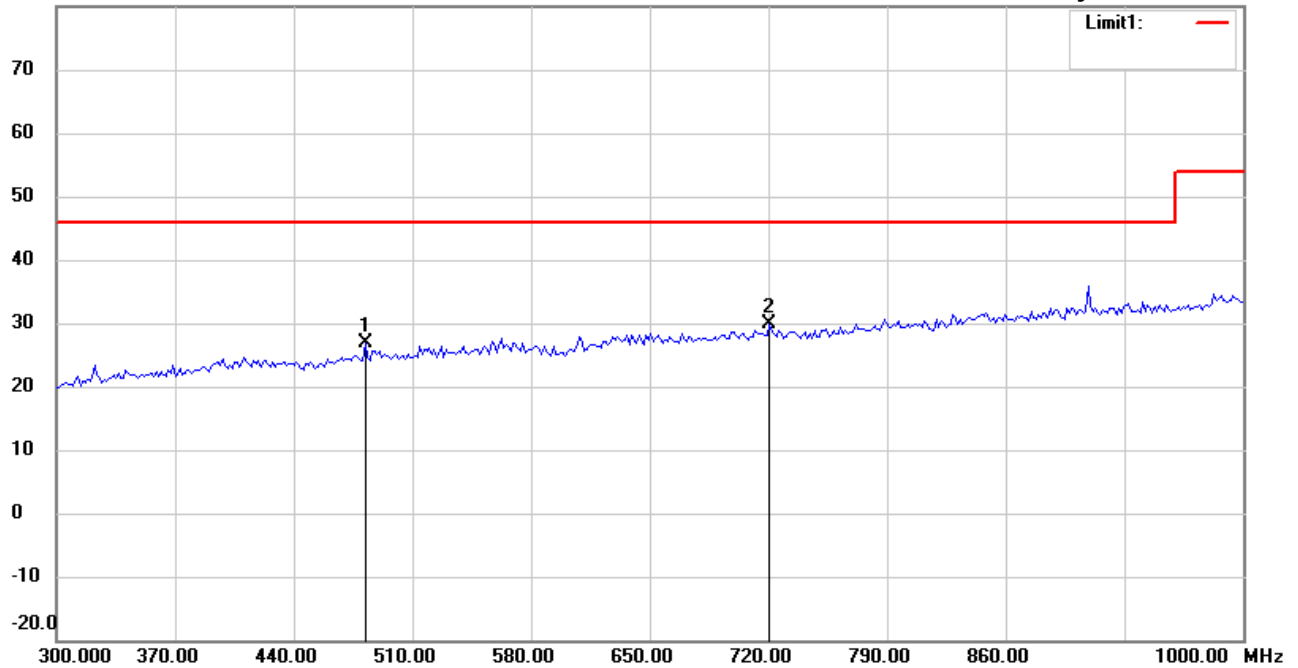

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: **Vertical**

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.30MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	482.3647	29.24	peak	-2.47	26.77	46.00	100	175	-19.23	
*	720.8416	28.76	peak	1.17	29.93	46.00	100	230	-16.07	



Radiated Emission Measurement

Operator: Sky

File :3

Data :#1


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 8:58:20 PM

Humidity:74.7 %

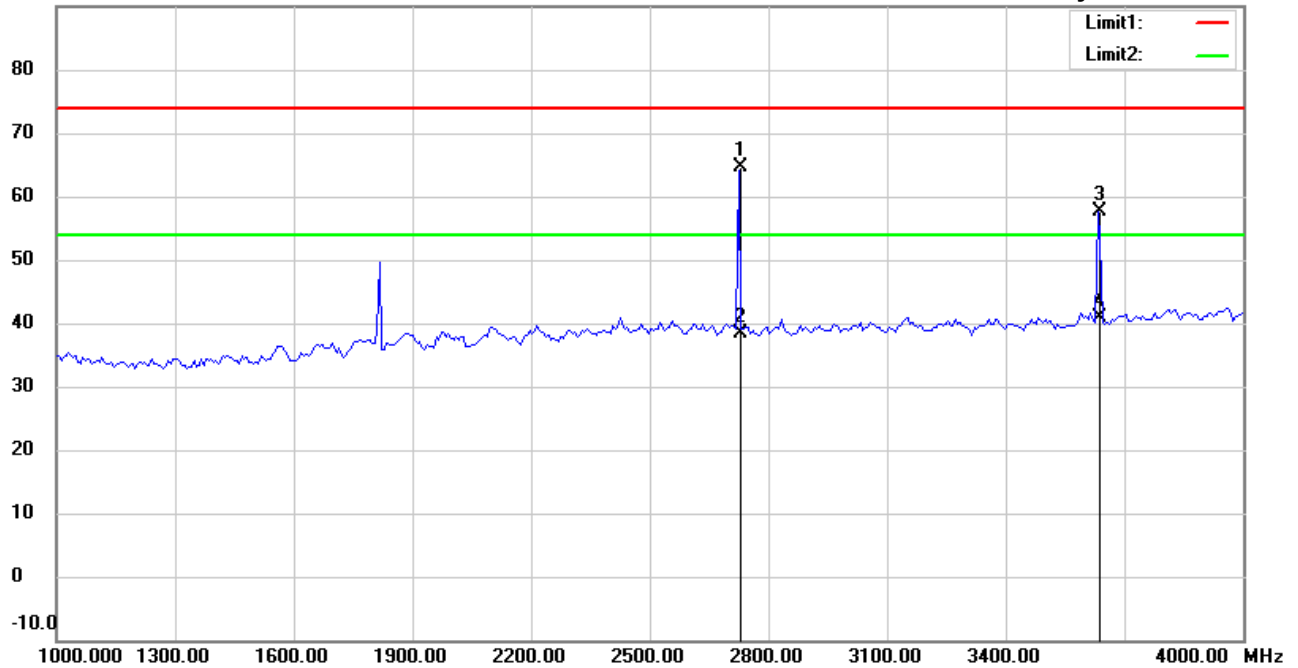

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.30MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2725.451	68.46	peak	-3.84	64.62	74.00	150	304	-9.38	
	2725.451	42.11	AVG	-3.84	38.27	54.00	150	304	-15.73	
	3633.267	58.79	peak	-1.19	57.60	74.00	150	225	-16.40	
	3633.267	42.07	AVG	-1.19	40.88	54.00	150	225	-13.12	



Radiated Emission Measurement

Operator: Sky

File :3

Data :#4


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 8:59:27 PM

Humidity:74.7 %

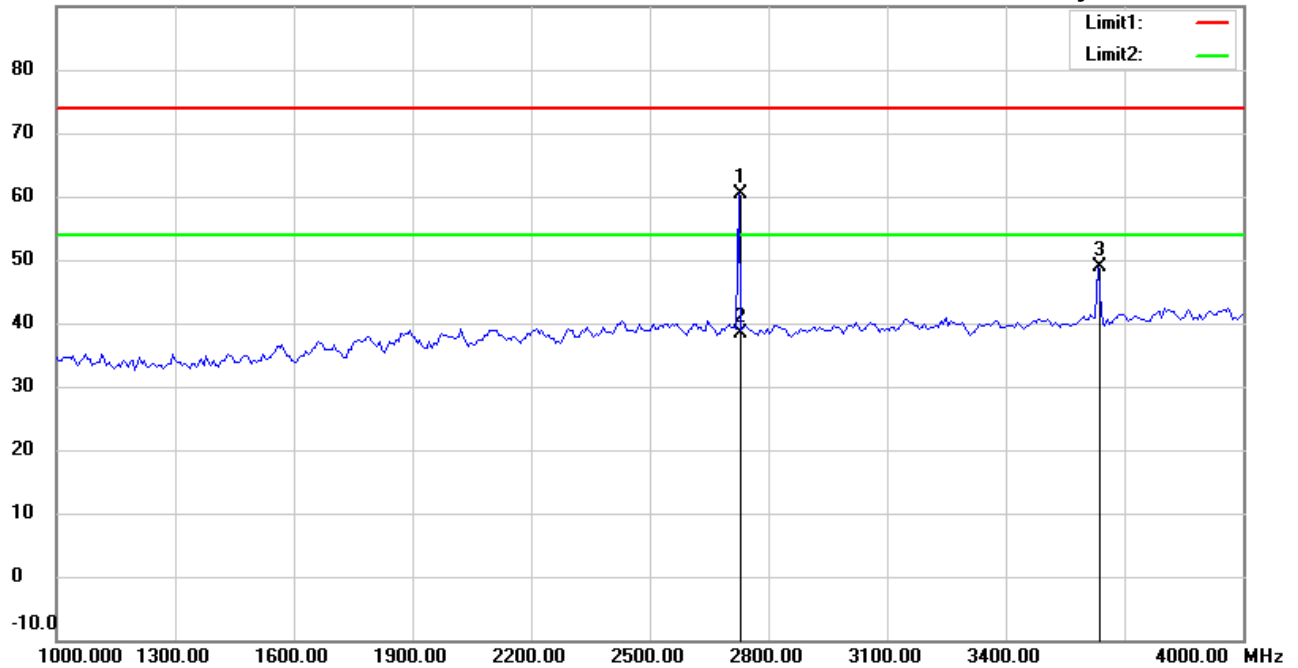

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.30MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2725.451	64.27	peak	-3.84	60.43	74.00	150	271	-13.57	
	2725.451	42.19	AVG	-3.84	38.35	54.00	150	271	-15.65	
	3633.267	50.04	peak	-1.19	48.85	74.00	150	119	-25.15	



Radiated Emission Measurement

Operator: Sky

File :3

Data :#2


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 9:00:45 PM

Humidity:74.7 %

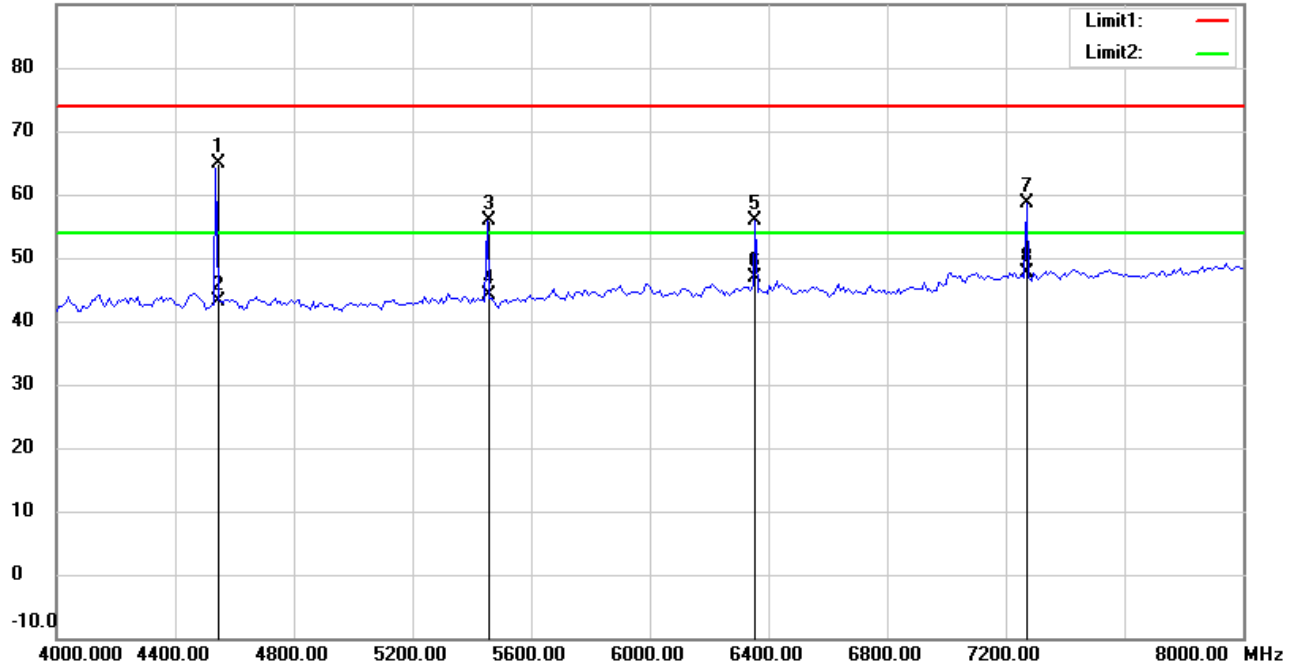

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.30MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4541.257	64.11	peak	0.77	64.88	74.00	150	360	-9.12	
	4541.257	42.25	AVG	0.77	43.02	54.00	150	360	-10.98	
	5450.902	53.40	peak	2.36	55.76	74.00	150	117	-18.24	
	5450.902	41.73	AVG	2.36	44.09	54.00	150	117	-9.91	
	6356.713	51.65	peak	4.31	55.96	74.00	150	260	-18.04	
	6356.713	42.50	AVG	4.31	46.81	54.00	150	260	-7.19	
	7270.541	53.24	peak	5.47	58.71	74.00	150	136	-15.29	
*	7270.541	42.08	AVG	5.47	47.55	54.00	150	136	-6.45	



Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 9:01:47 PM

Humidity:74.7 %

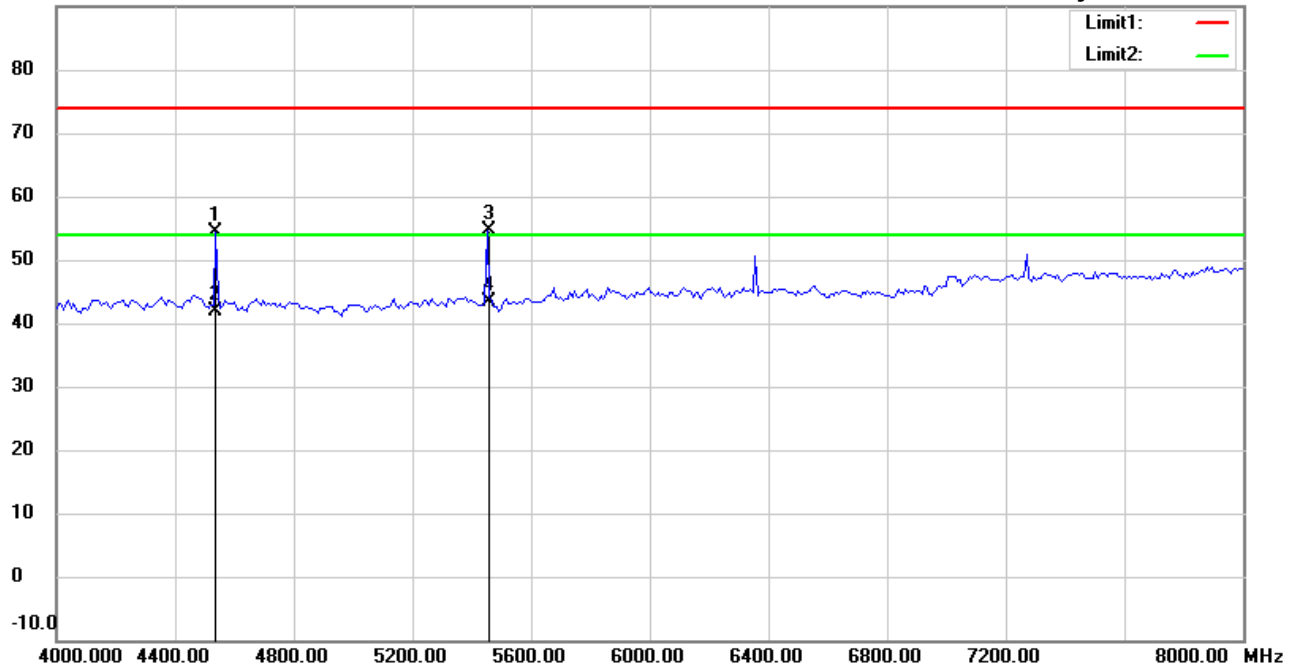

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: **Vertical**

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.30MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4537.074	53.52	peak	0.78	54.30	74.00	150	137	-19.70	
	4537.074	41.15	AVG	0.78	41.93	54.00	150	137	-12.07	
	5450.902	52.16	peak	2.36	54.52	74.00	150	250	-19.48	
*	5450.902	40.91	AVG	2.36	43.27	54.00	150	250	-10.73	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 9:03:32 PM

Humidity:74.7 %

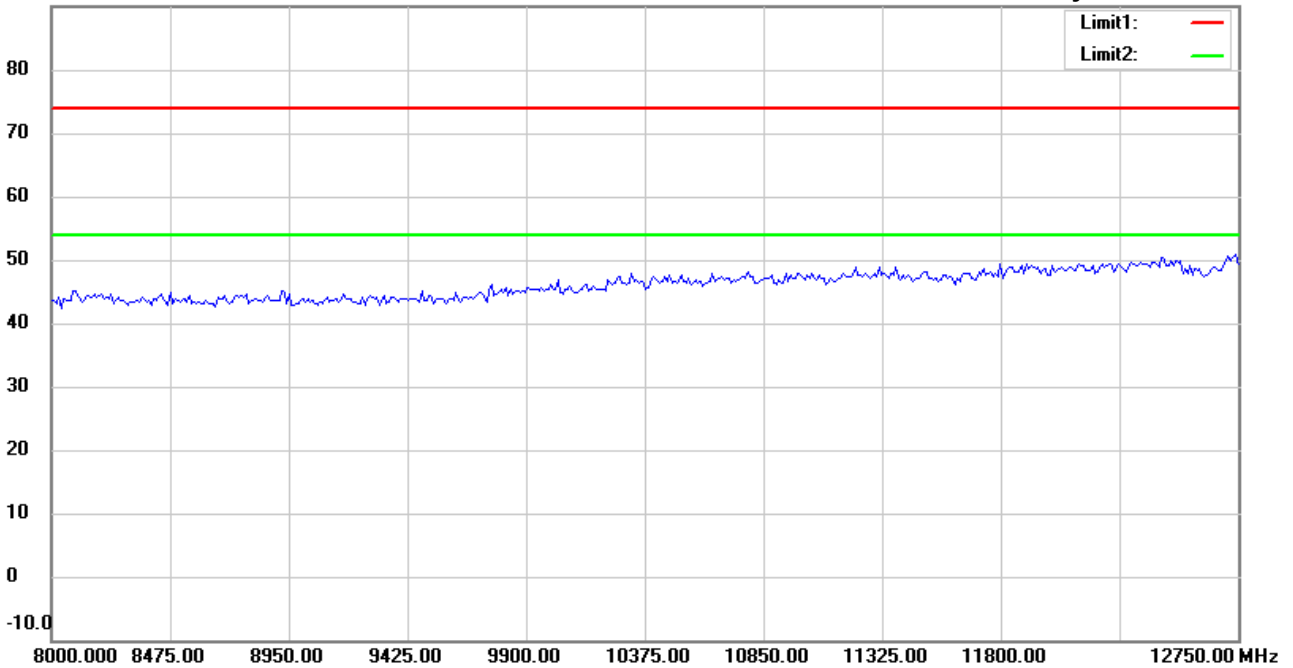

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.30MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#6


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 9:04:36 PM

Humidity:74.7 %

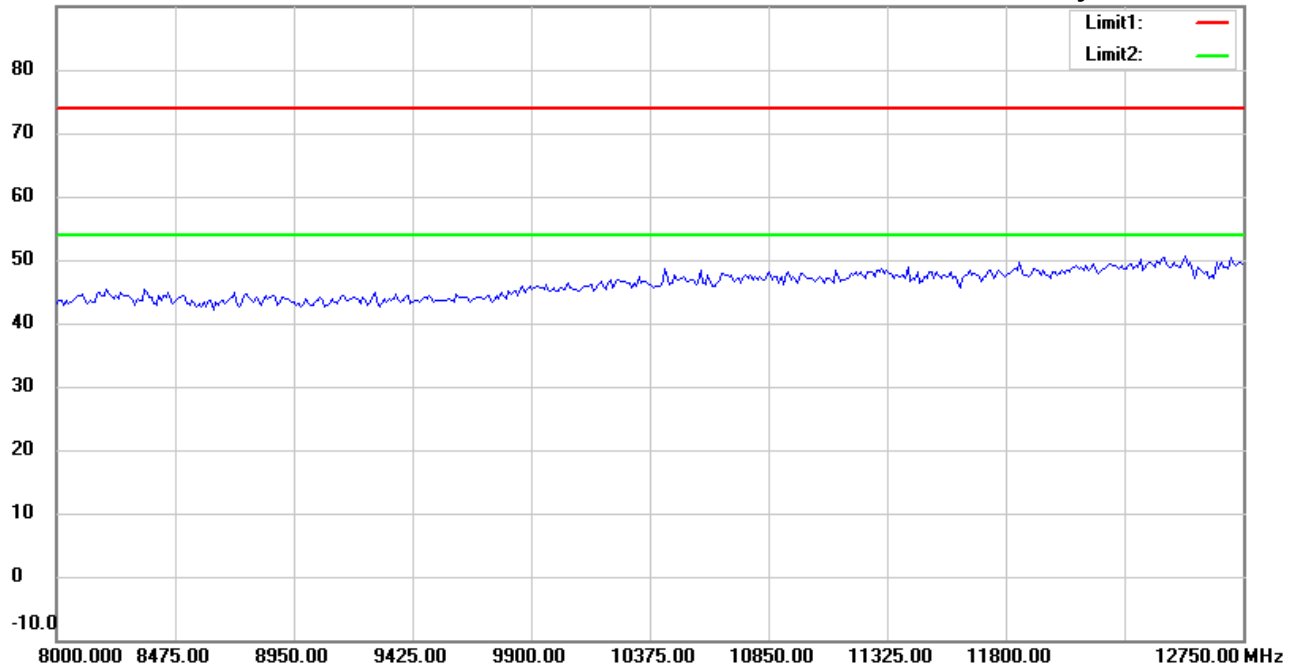

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 908.30MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Vincent

File :1

Data :#1


Date: 10/15/2018

Temperature:23 °C

80.0 dBuV/m

Time: 11:54:16 AM

Humidity:74.2 %

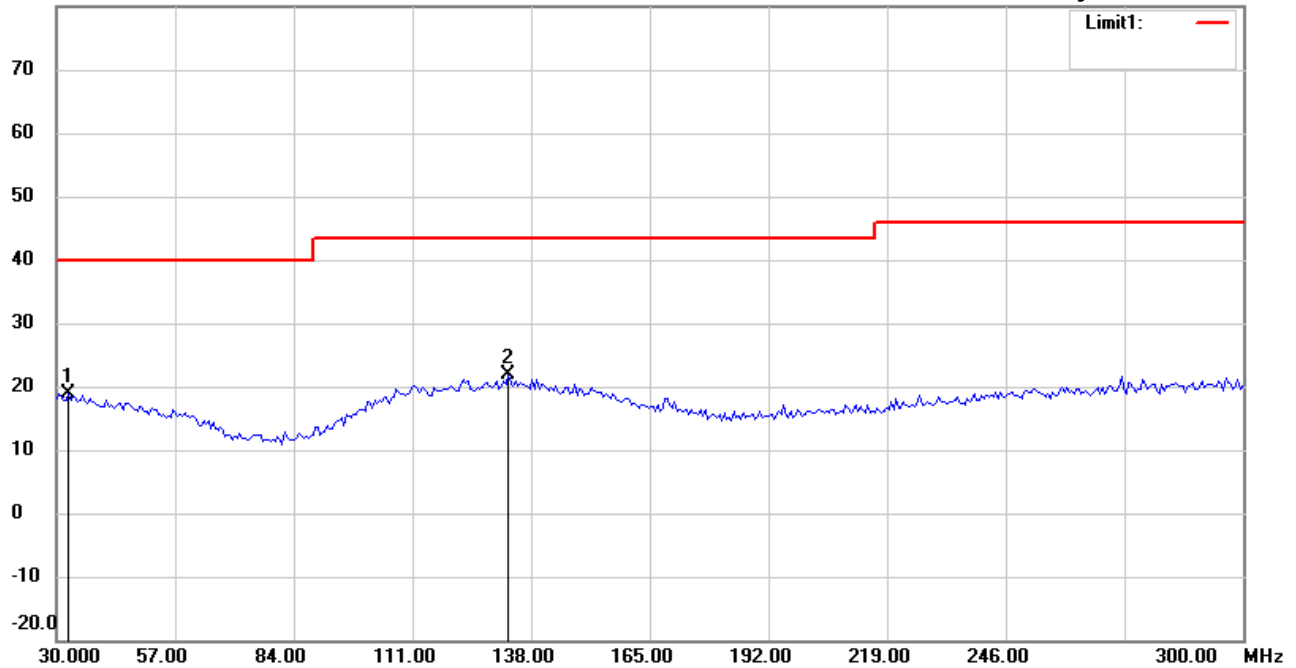

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 917.233MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	32.7053	27.33	peak	-8.37	18.96	40.00	100	35	-21.04	
	132.8054	28.12	peak	-6.35	21.77	43.50	100	17	-21.73	



Radiated Emission Measurement

Operator: Vincent

File :1

Data :#2


Date: 10/15/2018

Temperature:23 °C

80.0 dBuV/m

Time: 11:55:27 AM

Humidity:74.2 %

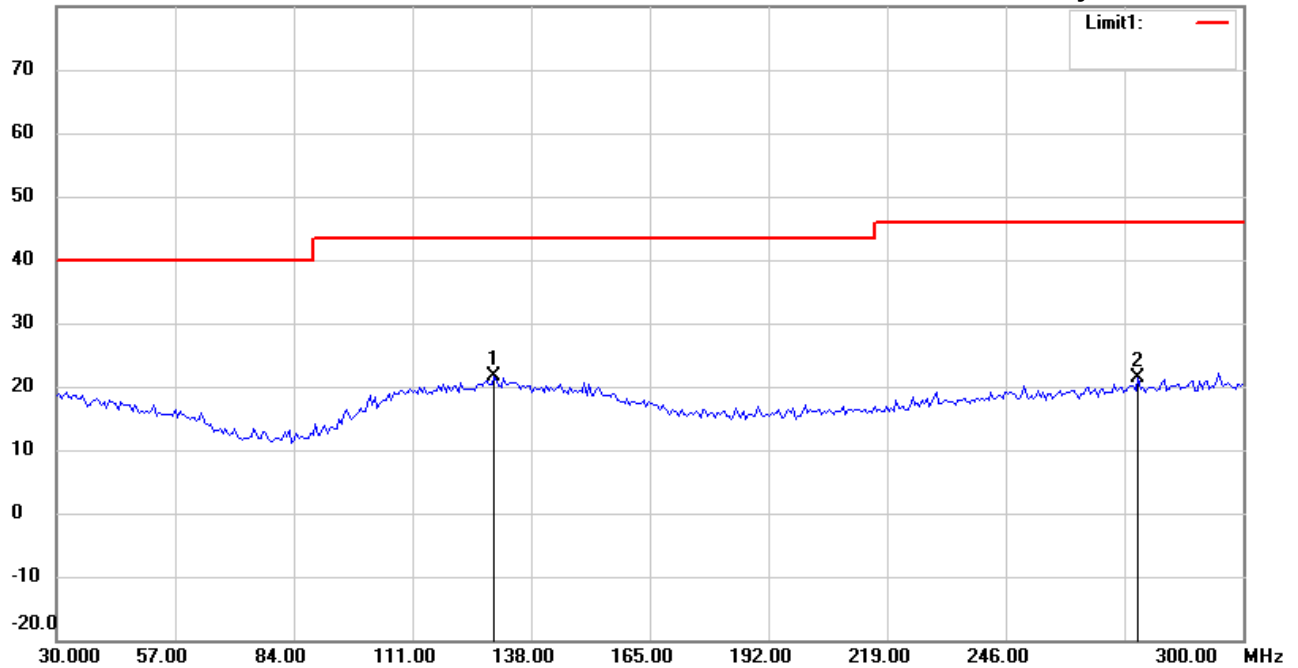

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21809-18449

M/N:

Test Mode : TX 917.233MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	129.5591	28.02	peak	-6.32	21.70	43.50	100	254	-21.80	
	276.1923	27.52	peak	-6.21	21.31	46.00	100	179	-24.69	



Radiated Emission Measurement

Operator: Vincent

File :2

Data :#1


Date: 10/15/2018

Temperature:23 °C

80.0 dBuV/m

Time: 11:59:27 AM

Humidity:74.2 %

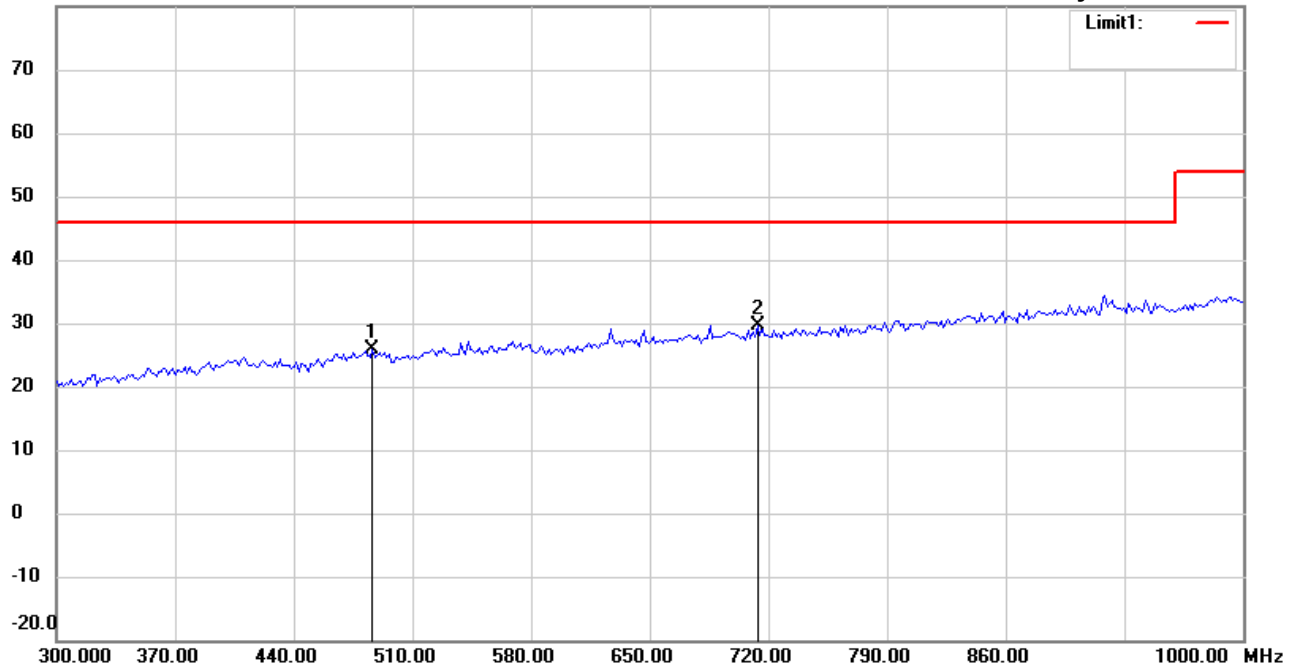

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 917.233MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	486.5731	28.22	peak	-2.41	25.81	46.00	100	145	-20.19	
*	713.8277	28.51	peak	1.06	29.57	46.00	100	160	-16.43	



Radiated Emission Measurement

Operator: Vincent

File :2

Data :#2


Date: 10/15/2018

Temperature:23 °C

80.0 dBuV/m

Time: 12:00:33 PM

Humidity:74.2 %

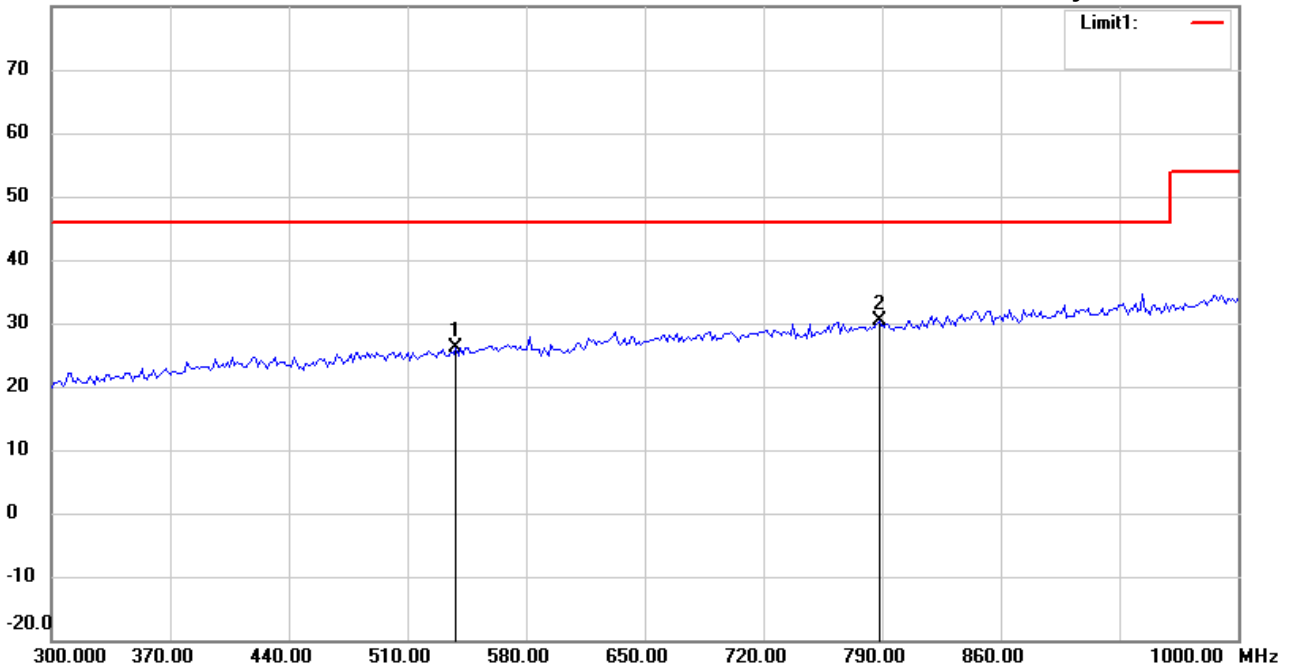

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Vertical*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 917.233MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	538.4770	27.52	peak	-1.37	26.15	46.00	100	295	-19.85	
*	788.1763	27.93	peak	2.36	30.29	46.00	100	105	-15.71	



Radiated Emission Measurement

Operator: Sky

File :3

Data :#1


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 9:22:47 PM

Humidity:74.7 %

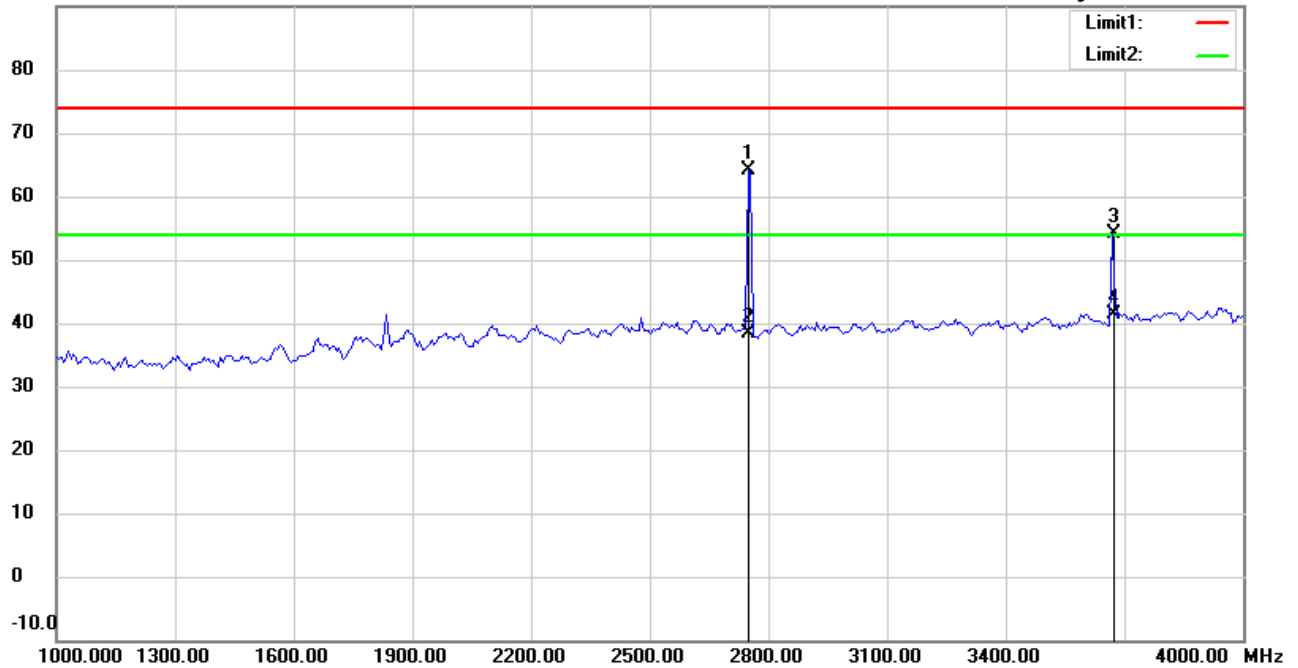

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 917.233MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2749.499	68.01	peak	-3.84	64.17	74.00	150	235	-9.83	
	2749.499	42.17	AVG	-3.84	38.33	54.00	150	235	-15.67	
	3669.339	55.34	peak	-1.11	54.23	74.00	150	177	-19.77	
	3669.339	42.56	AVG	-1.11	41.45	54.00	150	177	-12.55	



Radiated Emission Measurement

Operator: Sky

File :3

Data :#4


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 9:25:27 PM

Humidity:74.7 %

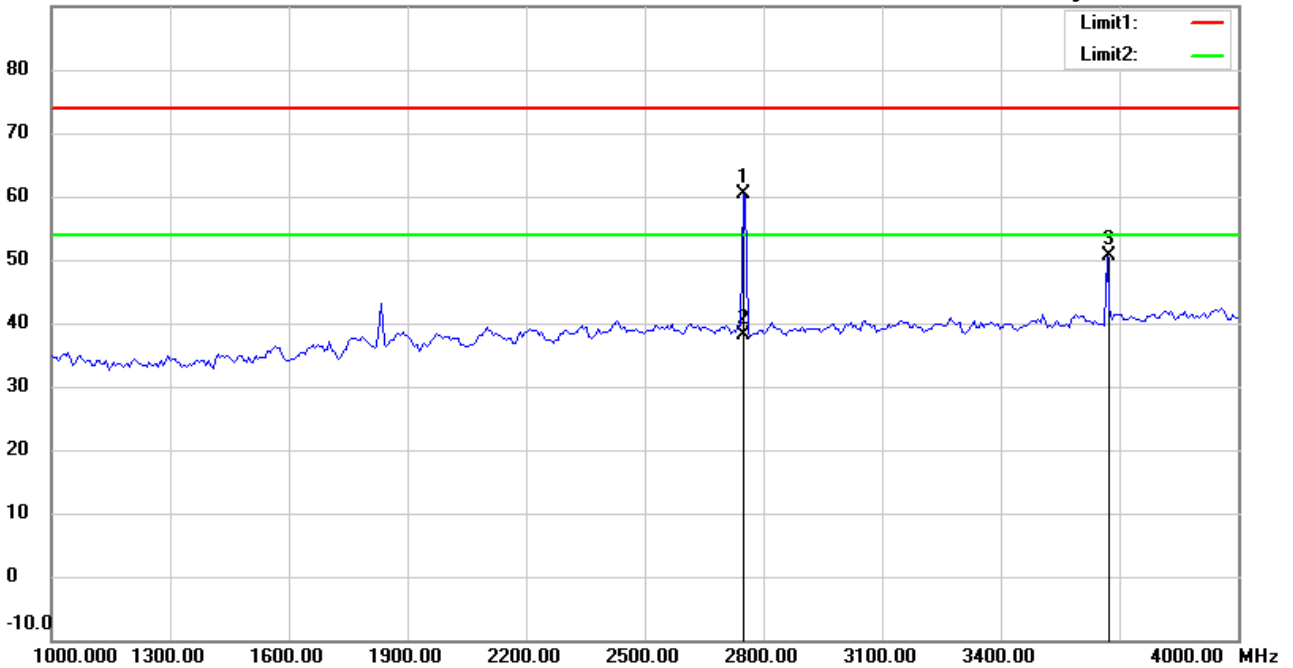

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21809-18449

M/N:

Test Mode : TX 917.233MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2749.499	64.16	peak	-3.84	60.32	74.00	150	27	-13.68	
	2749.499	41.93	AVG	-3.84	38.09	54.00	150	27	-15.91	
	3669.339	51.83	peak	-1.11	50.72	74.00	150	158	-23.28	



Radiated Emission Measurement

Operator: Sky

File :3

Data :#2


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 9:27:56 PM

Humidity:74.7 %

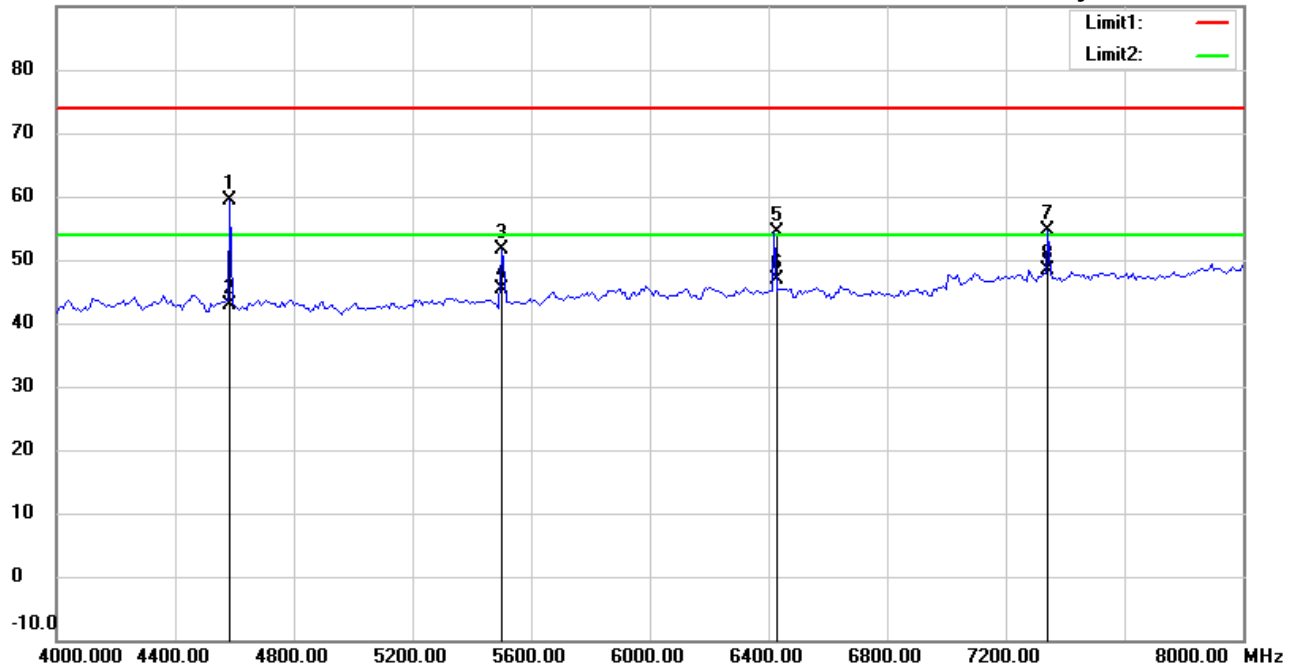

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 917.233MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4585.170	58.75	peak	0.64	59.39	74.00	150	231	-14.61	
	4585.170	42.31	AVG	0.64	42.95	54.00	150	231	-11.05	
	5498.998	49.48	peak	2.19	51.67	74.00	150	170	-22.33	
	5498.998	43.17	AVG	2.19	45.36	54.00	150	170	-8.64	
	6420.842	50.18	peak	4.29	54.47	74.00	150	299	-19.53	
	6420.842	42.62	AVG	4.29	46.91	54.00	150	299	-7.09	
	7342.685	48.81	peak	5.75	54.56	74.00	150	156	-19.44	
*	7342.685	42.69	AVG	5.75	48.44	54.00	150	156	-5.56	



Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 9:30:44 PM

Humidity:74.7 %

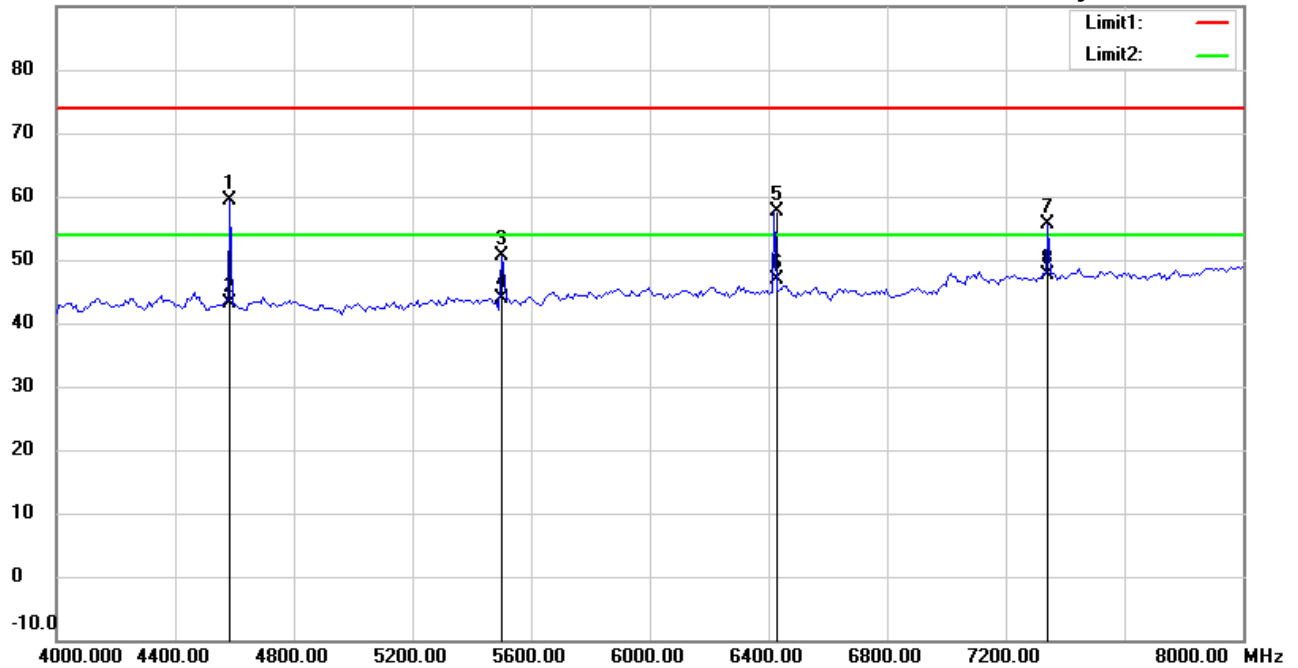

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21809-18449

M/N:

Test Mode : TX 917.233MHz

Note :

Polarization: *Vertical*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4585.170	58.69	peak	0.64	59.33	74.00	150	273	-14.67	
	4585.170	42.41	AVG	0.64	43.05	54.00	150	273	-10.95	
	5498.998	48.56	peak	2.19	50.75	74.00	150	180	-23.25	
	5498.998	41.73	AVG	2.19	43.92	54.00	150	180	-10.08	
	6420.842	53.34	peak	4.29	57.63	74.00	150	250	-16.37	
	6420.842	42.59	AVG	4.29	46.88	54.00	150	250	-7.12	
	7342.685	49.99	peak	5.75	55.74	74.00	150	126	-18.26	
*	7342.685	41.77	AVG	5.75	47.52	54.00	150	126	-6.48	



Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 9:34:34 PM

Humidity:74.7 %

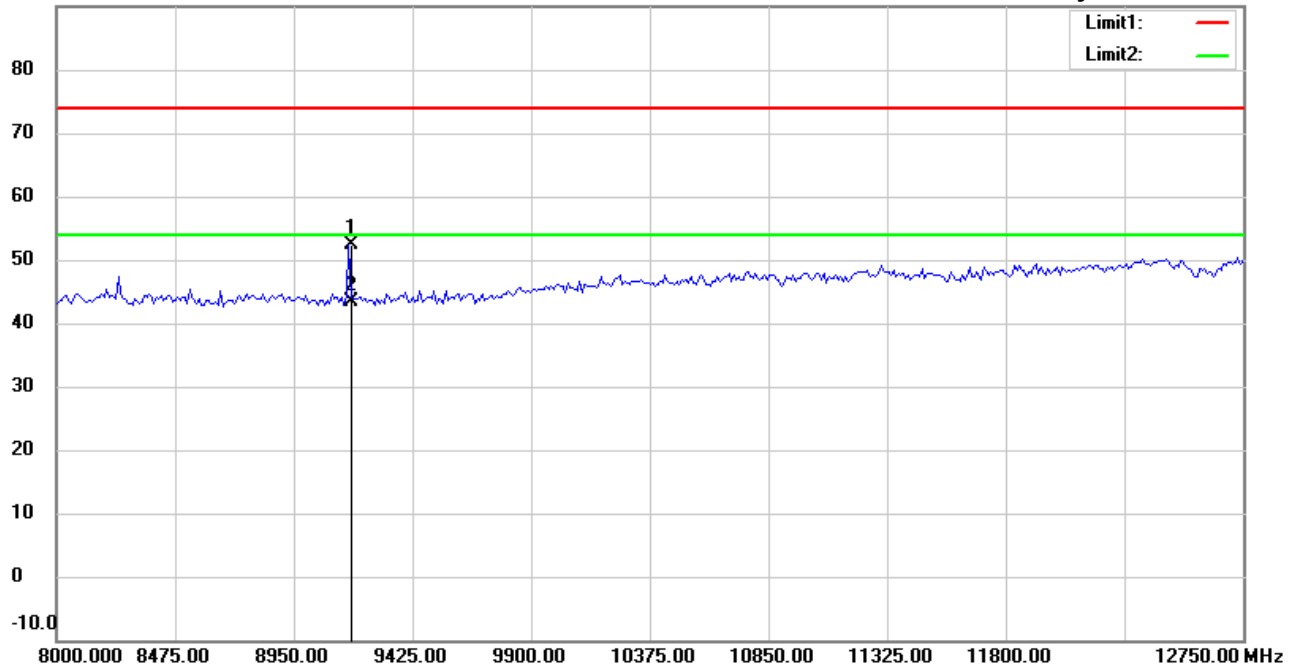

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 917.233MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9170.842	44.74	peak	7.62	52.36	74.00	150	316	-21.64	
*	9170.842	35.85	AVG	7.62	43.47	54.00	150	316	-10.53	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#6


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 9:37:40 PM

Humidity:74.7 %

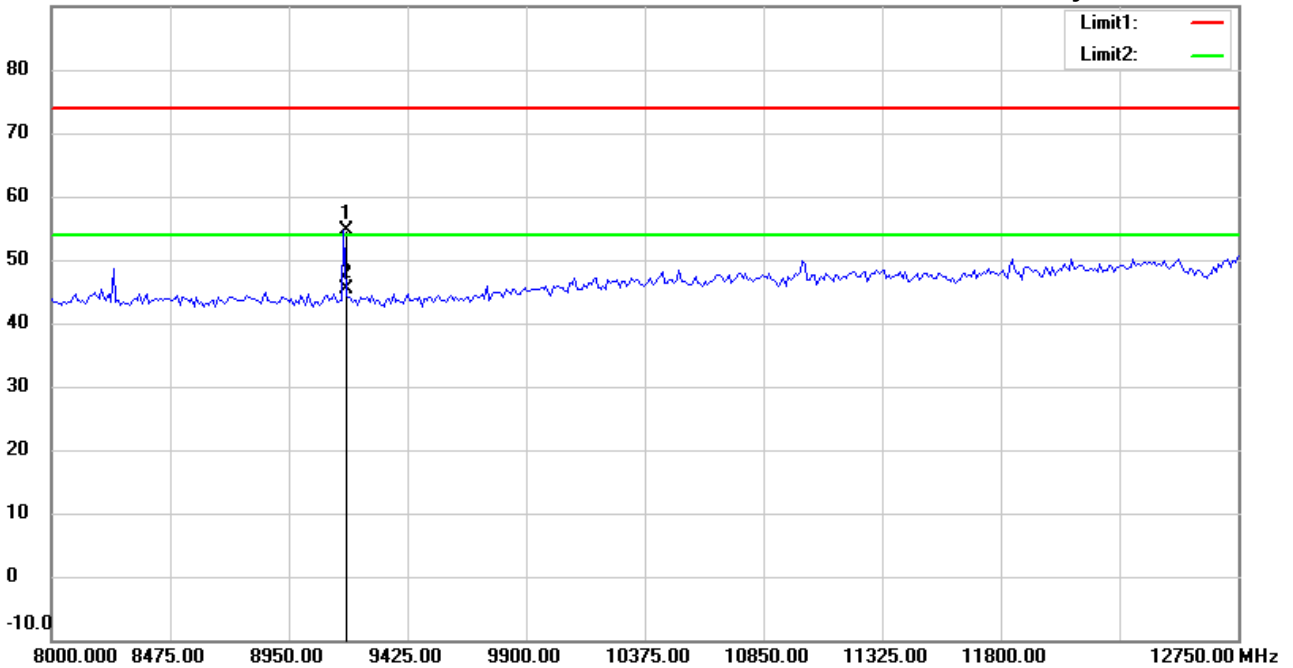

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 917.233MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9170.842	47.00	peak	7.62	54.62	74.00	150	38	-19.38	
*	9170.842	37.66	AVG	7.62	45.28	54.00	150	38	-8.72	

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Vincent

File :1

Data :#1


Date: 10/15/2018

Temperature:23 °C

80.0 dBuV/m

Time: 12:02:13 PM

Humidity:74.2 %

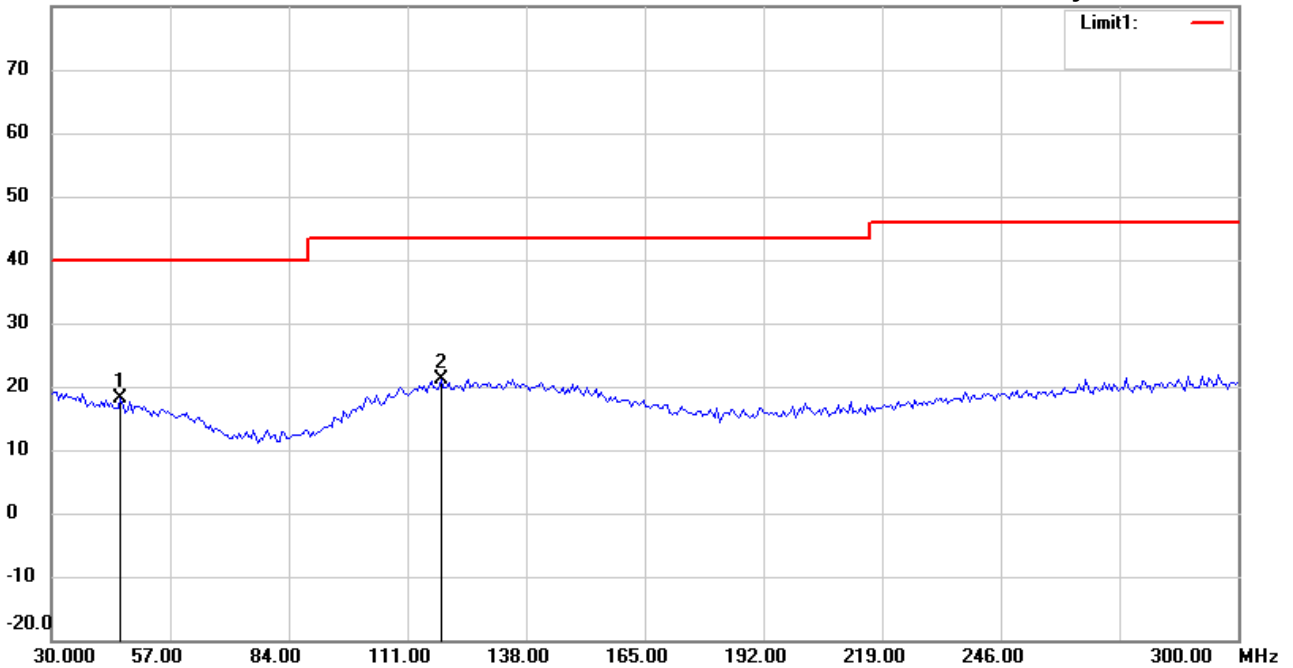

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21809-18449

M/N:

Test Mode : TX 923.783MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	45.6914	27.75	peak	-9.73	18.02	40.00	100	73	-21.98	
	118.7374	27.81	peak	-6.69	21.12	43.50	100	25	-22.38	



Radiated Emission Measurement

Operator: Vincent

File :1

Data :#2


Date: 10/15/2018

Temperature:23 °C

80.0 dBuV/m

Time: 12:03:25 PM

Humidity:74.2 %

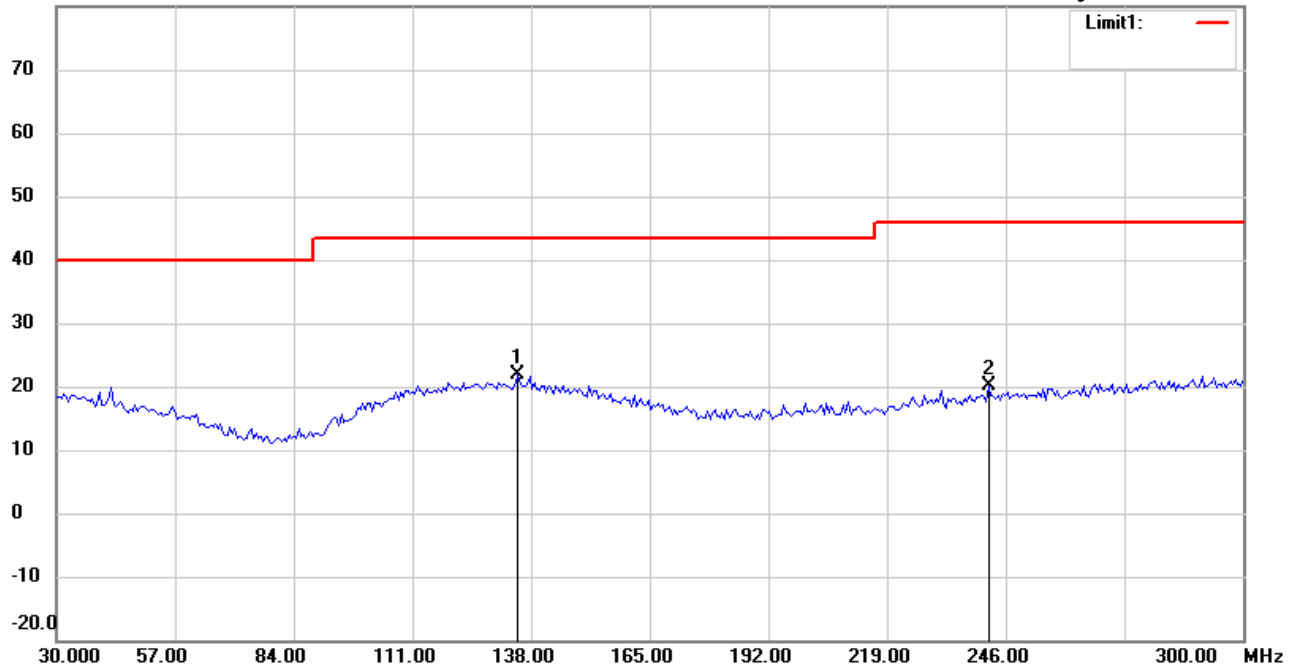

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: Vertical

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 923.783MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	134.9698	28.22	peak	-6.38	21.84	43.50	100	254	-21.66	
	242.1041	27.87	peak	-7.76	20.11	46.00	100	117	-25.89	



Radiated Emission Measurement

Operator: Vincent

File :2

Data :#1


Date: 10/15/2018

Temperature:23 °C

80.0 dBuV/m

Time: 12:05:49 PM

Humidity:74.2 %

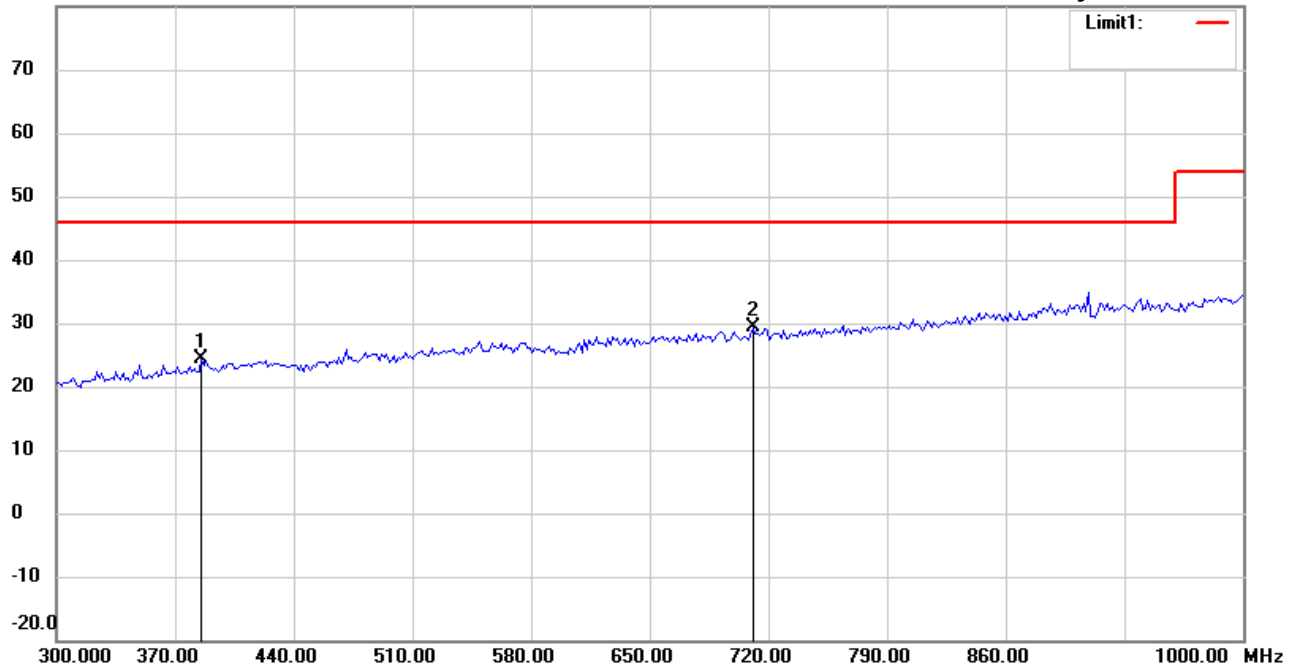

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 923.783MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	385.5711	27.93	peak	-3.60	24.33	46.00	100	230	-21.67	
*	711.0220	28.30	peak	1.02	29.32	46.00	100	215	-16.68	



Radiated Emission Measurement

Operator: Vincent

File :2

Data :#2


Date: 10/15/2018

Temperature:23 °C

80.0 dBuV/m

Time: 12:07:08 PM

Humidity:74.2 %

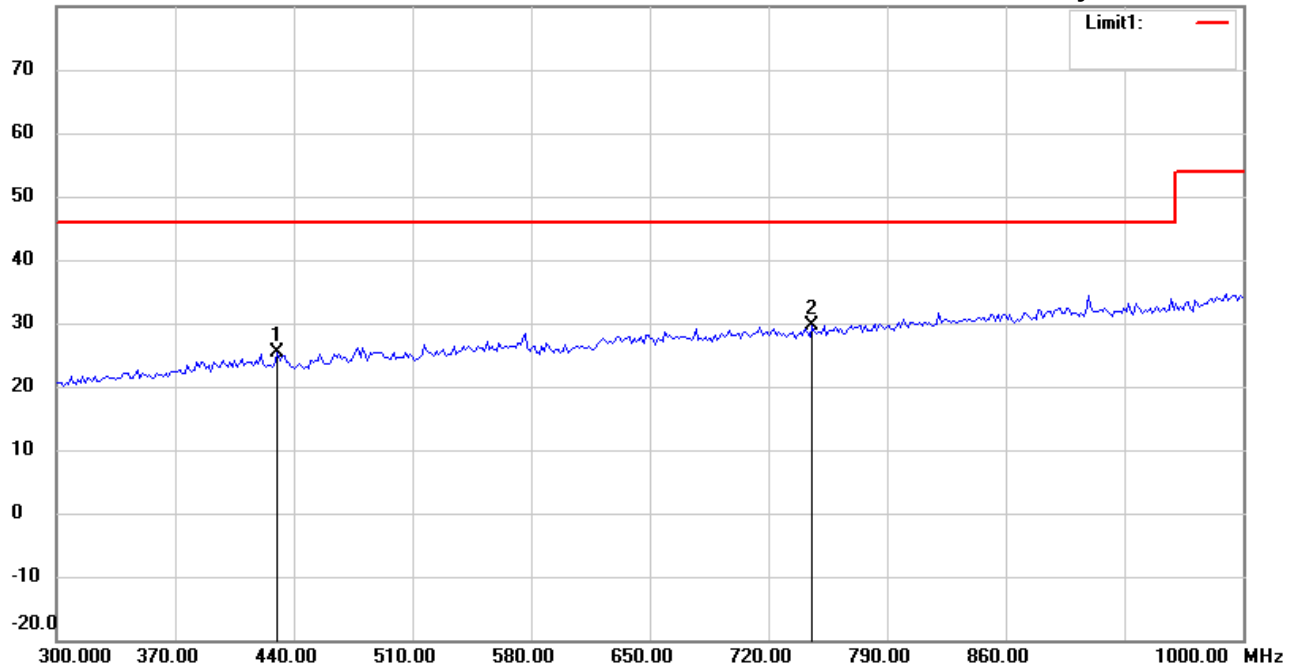

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Vertical*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 923.783MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	430.4608	28.70	peak	-3.20	25.50	46.00	100	110	-20.50	
*	746.0922	28.08	peak	1.56	29.64	46.00	100	285	-16.36	



Radiated Emission Measurement

Operator: Vincent

File :3

Data :#1


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 1:50:03 PM

Humidity:74.7 %

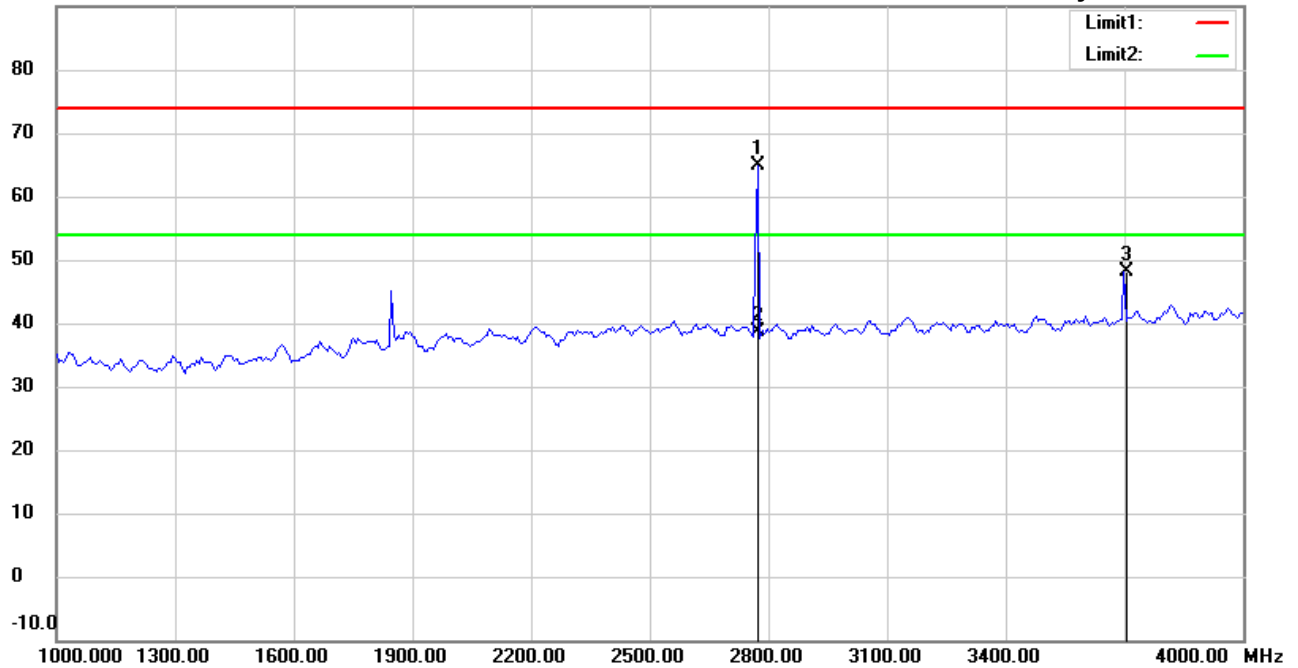

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 923.783MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2773.547	68.63	peak	-3.85	64.78	74.00	150	316	-9.22	
	2773.547	42.56	AVG	-3.85	38.71	54.00	150	316	-15.29	
	3699.399	49.24	peak	-1.04	48.20	74.00	150	255	-25.80	



Radiated Emission Measurement

Operator: Vincent

File :3

Data :#4


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 1:57:07 PM

Humidity:74.7 %

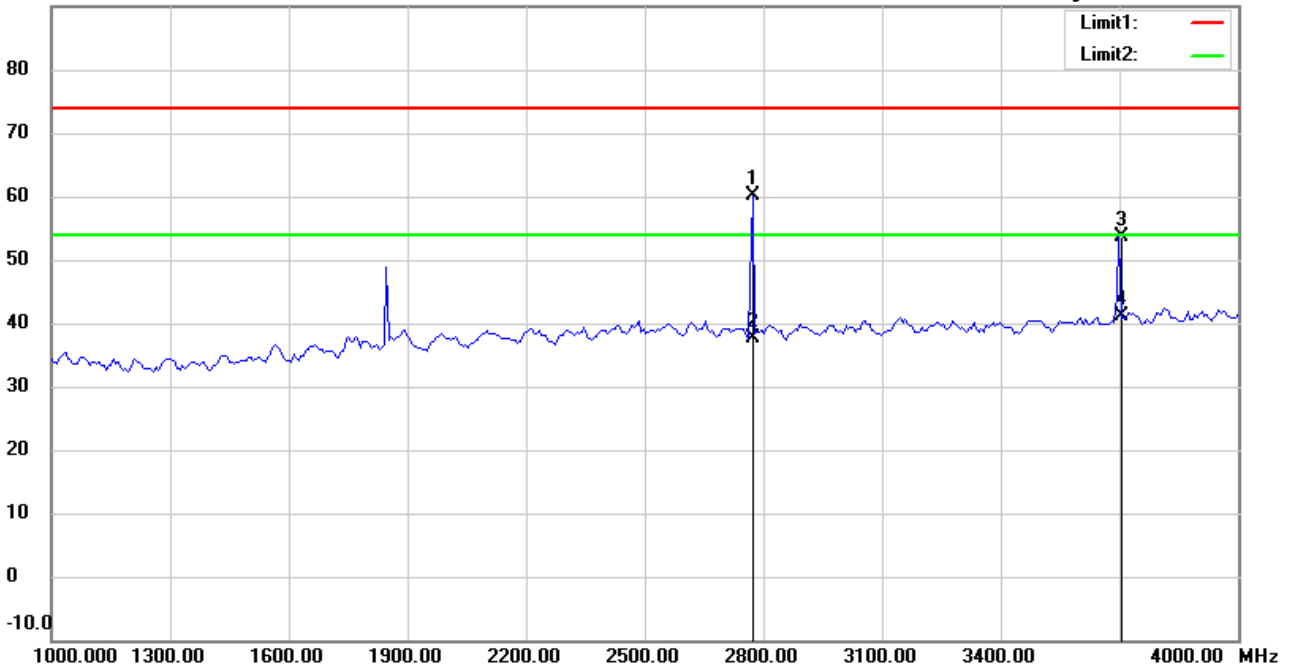

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 923.783MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2773.547	63.97	peak	-3.85	60.12	74.00	150	257	-13.88	
	2773.547	41.55	AVG	-3.85	37.70	54.00	150	257	-16.30	
	3699.399	54.73	peak	-1.04	53.69	74.00	150	118	-20.31	
*	3699.399	42.17	AVG	-1.04	41.13	54.00	150	118	-12.87	



Radiated Emission Measurement

Operator: Vincent

File :3

Data :#2


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 1:54:35 PM

Humidity:74.7 %

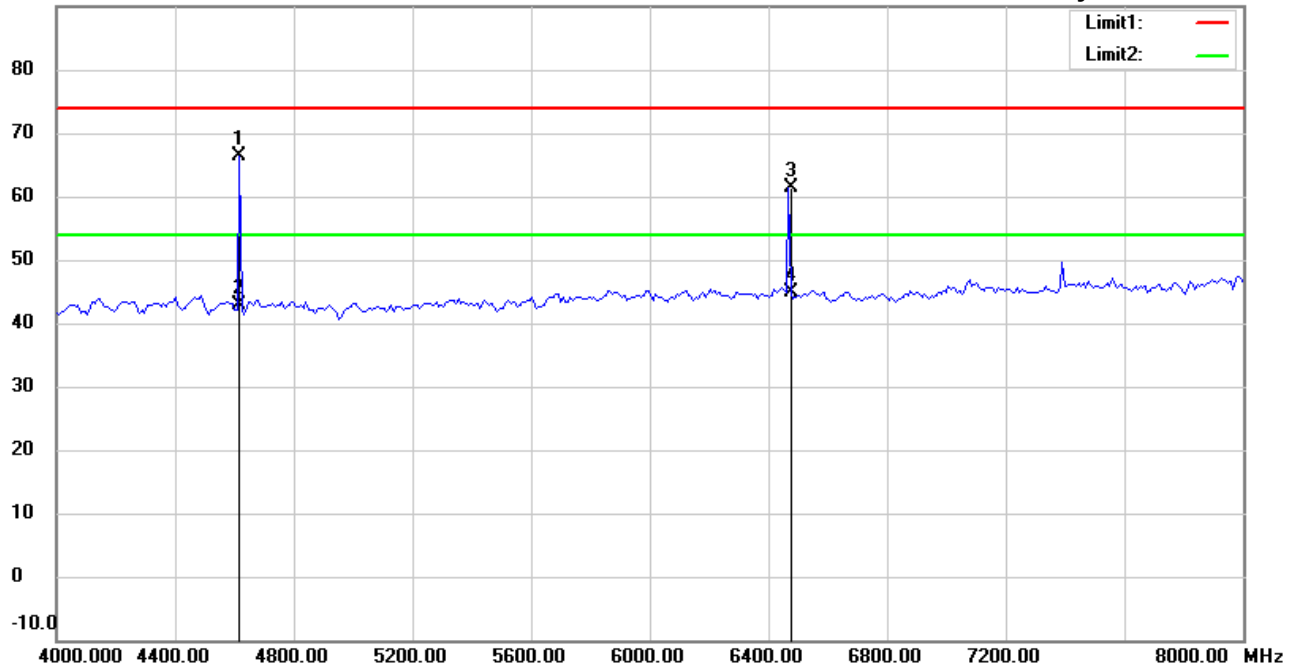

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 923.783MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4617.234	65.68	peak	0.59	66.27	74.00	150	156	-7.73	
	4617.234	42.17	AVG	0.59	42.76	54.00	150	156	-11.24	
	6468.938	57.29	peak	4.13	61.42	74.00	150	73	-12.58	
	6468.938	40.68	AVG	4.13	44.81	54.00	150	73	-9.19	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#5


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 1:59:08 PM

Humidity:74.7 %

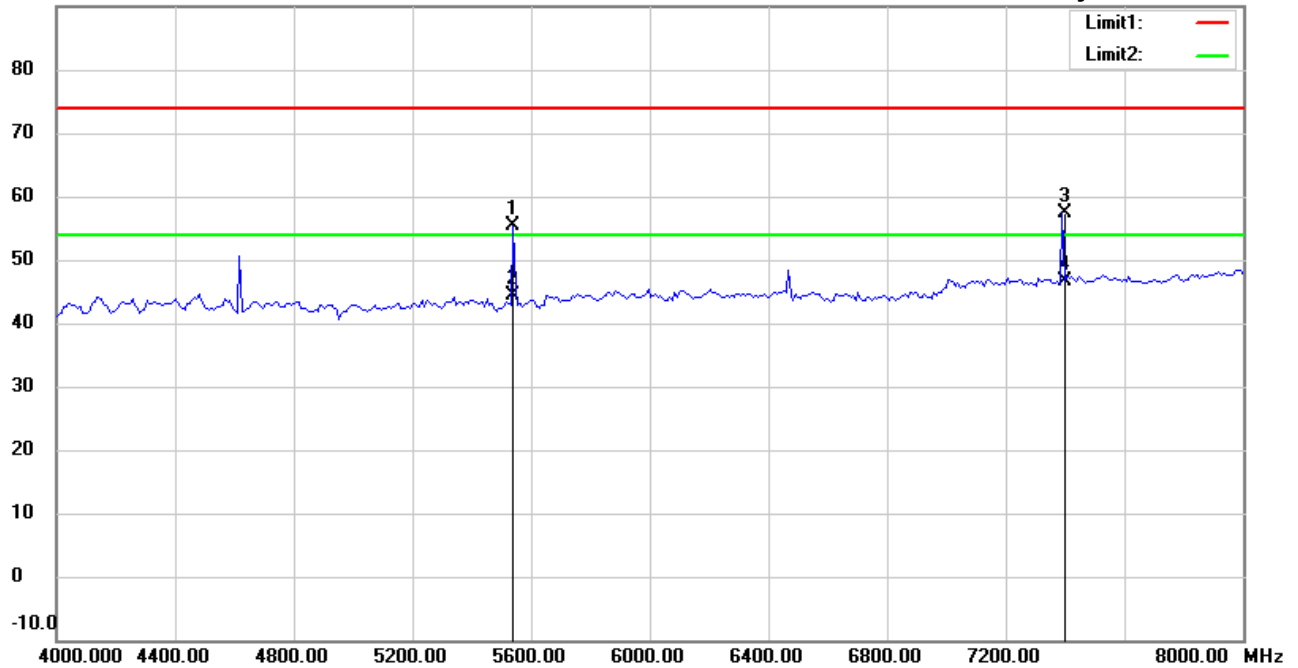

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: **Vertical**

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 923.783MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	5539.078	53.09	peak	2.31	55.40	74.00	150	267	-18.60	
	5539.078	42.18	AVG	2.31	44.49	54.00	150	267	-9.51	
	7390.782	51.27	peak	6.02	57.29	74.00	150	154	-16.71	
*	7390.782	40.53	AVG	6.02	46.55	54.00	150	154	-7.45	

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Vincent

File :3

Data :#3


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 1:55:52 PM

Humidity:74.7 %

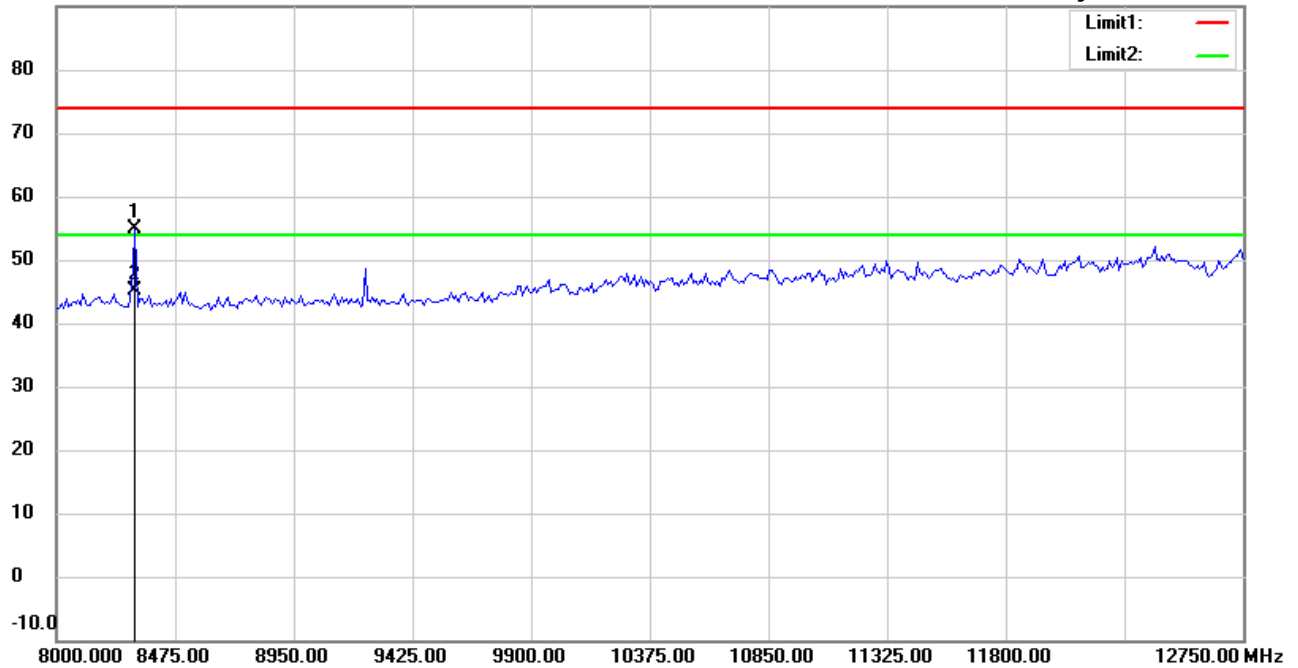

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 923.783MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	8314.128	48.03	peak	6.89	54.92	74.00	150	263	-19.08	
*	8314.128	38.27	AVG	6.89	45.16	54.00	150	263	-8.84	



Radiated Emission Measurement

Operator: Vincent

File :3

Data :#6


Date: 10/17/2018

Temperature:20.3 °C

90.0 dBuV/m

Time: 2:01:50 PM

Humidity:74.7 %

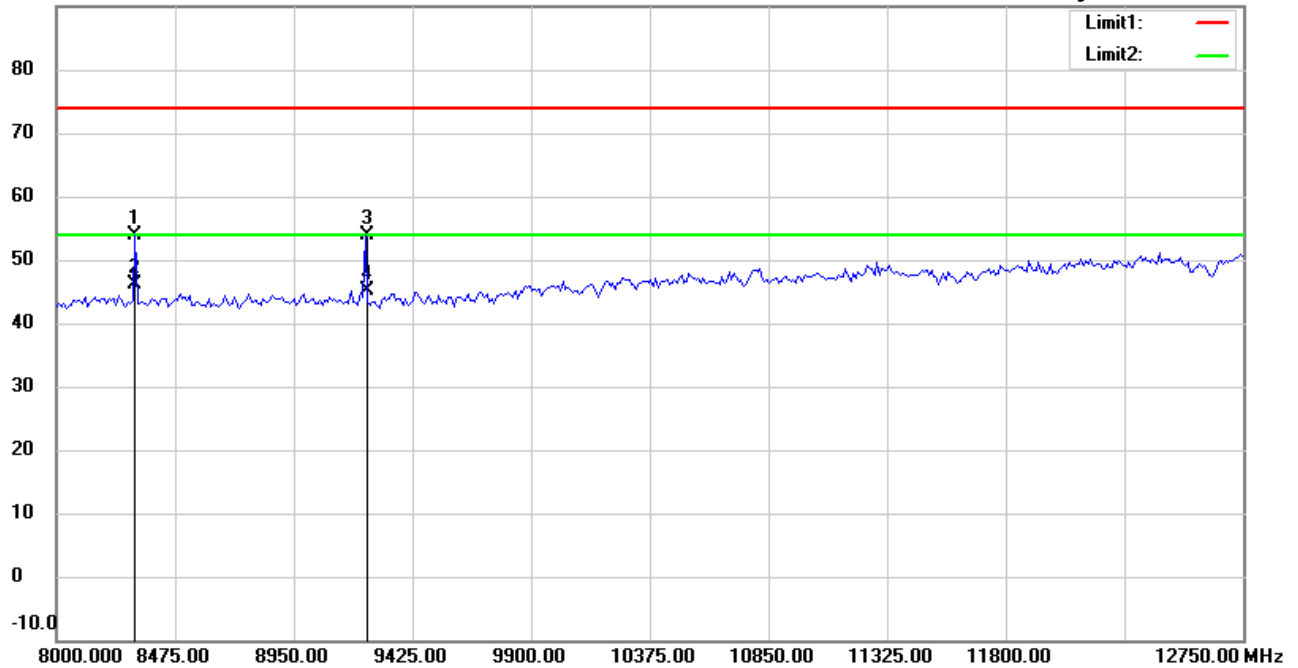

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21809-18449

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 923.783MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	8314.128	46.99	peak	6.89	53.88	74.00	150	218	-20.12	
*	8314.128	39.16	AVG	6.89	46.05	54.00	150	218	-7.95	
	9237.475	46.39	peak	7.61	54.00	74.00	150	175	-20.00	
	9237.475	37.55	AVG	7.61	45.16	54.00	150	175	-8.84	