



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

FCC PART 90 TEST REPORT

APPLICANT	KP ELECTRONIC SYSTEMS LTD.
	P.O. BOX 42
	TEFEN INDUSTRIAL PARK 24959 ISRAEL
FCC ID	H78KPBSR100N
MODEL NUMBER	BSR100
PRODUCT DESCRIPTION	BASE STATION RADIO
DATE SAMPLE RECEIVED	6/4/2012
DATE TESTED	6/22/2012
TESTED BY	Joe Scoglio
APPROVED BY	Mario R. de Aranzeta
TIMCO REPORT NO.	1423AUT12TestReport.doc
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate # 0955-01



TABLE OF CONTENTS

GENERAL REMARKS.....	3
GENERAL INFORMATION	4
EQUIPMENT LIST	5
TEST PROCEDURE	6
RF POWER OUTPUT.....	7
MODULATION CHARACTERISTICS.....	8
VOICE MODULATED COMMUNICATION EQUIPMENT	8
OTHER MODULATION CHARACTERISTICS	9
OCCUPIED BANDWIDTH	10
OCCUPIED BANDWIDTH PLOTS.....	12
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED).....	18
FIELD STRENGTH OF SPURIOUS EMISSIONS.....	20
FREQUENCY STABILITY.....	21
FREQUENCY STABILITY.....	22

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
 not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, Fl 32669



Authorized Signatory Name:

Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: June/22/2012

GENERAL INFORMATION

DUT Specification

DUT Description	BASE STATION RADIO
FCC ID	H78KPBSR100N
Model Number	BSR100
Type of Emission	11K0F1D & 6K0F1D
Modulation	FM
DUT Power Source	<input type="checkbox"/> 110-120Vac/50- 60Hz
	<input checked="" type="checkbox"/> DC Power 12.5V
	<input type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
Type of Equipment	<input checked="" type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input type="checkbox"/> Portable
Test Conditions	Temperature: 26°C Relative humidity: 50%.
Modification to the DUT	None
Test Exercise	The DUT was placed in continuous transmit mode.
Applicable Standards	ANSI/TIA 603-C:2004, FCC CFR 47 Part 90
Test Facility	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA.

EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Analyzer Silver Tower Spectrum Analyzer	HP	8566B Opt 462	3552A22064 3638A08608	11/10/10	11/10/12
Antenna: Biconnical	Electro- Metrics	BIA-25	1171	06/13/12	06/13/14
Antenna: Biconnical	Eaton	94455-1	1096	05/04/11	05/04/13
Antenna: Log- Periodic	Electro- Metrics	LPA-25	1122	05/04/11	05/04/13
Frequency Counter	HP	5352B	2632A00165	06/22/11	06/22/13
Frequency Counter	HP	5385A	2730A03025	08/17/11	08/17/13
Signal Generator	HP	8640B	2308A21464	02/23/12	02/23/14
Hygro- Thermometer	Extech	445703	0602	06/15/11	06/15/13
Digital Multimeter	Fluke	77	35053830	09/09/11	09/09/13
Analyzer Silver Tower RF Preselector	HP	85685A	2926A00983	11/10/10	11/10/12
Modulation Analyzer	HP	8901A	3435A06868	07/18/11	07/18/13
Analyzer Silver Tower Quasi-Peak Adapter	HP	85650A	3303A01844	11/23/10	11/23/12
Temperature Chamber	Tenney Engineering	TTRC	11717-7	07/03/12	07/03/14
Frequency Counter	HP	5385A	3242A07460	06/22/11	06/22/13
3-Meter Semi- Anechoic Chamber	Panashield	N/A	N/A	12/31/11	12/31/13

TEST PROCEDURE

Power Line Conducted Interference: The procedure used was ANSI/TIA 603-C: 2004, using a 50uH LISN. Both lines were observed with the DUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

Bandwidth 20 dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

Power Output: The RF power output was measured at the antenna feed point using a peak power meter.

Antenna Conducted Emissions: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

Radiation Interference: The test procedure used was ANSI/TIA 603-C: 2004, using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum ANSI/TIA 603-C: 2004, receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.


RF POWER OUTPUT

Rule Part No.: Part 2.1046(a), Part 90

Test Requirements:

Method of Measurement: RF power is measured by connecting a 50-ohm, resistive wattmeter to the RF output connector. With a nominal voltage, and the transmitter properly adjusted the RF output measures:

Test Setup Diagram:

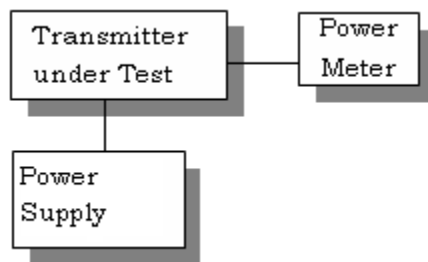

Test Data:

FREQUENCY MHz	OUTPUT POWER dBm	OUTPUT POWER WATTS
136.0 MHz	39.9 dBm	9.8 Watts
155.0 MHz	40 dBm	10 Watts
174.0 MHz	39.9 dBm	9.8 Watts

Part 2.1033 (C)(8) DC Input into the final amplifier

FOR HIGH POWER SETTING INPUT POWER: $(12.5V)(2.0A) = 25.0Watts$

MODULATION CHARACTERISTICS

Rule Part No.: Part 2.1047(a)(b)

Test Requirements:

Method of Measurement:

Audio frequency response

The audio frequency response was measured in accordance with ANSI/TIA 603-C: 2004 with no exception. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 – 5000Hz shall be submitted. The audio frequency response curve is shown below.

Not applicable Data Radio

VOICE MODULATED COMMUNICATION EQUIPMENT

Part 2.1047(a): For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

Not applicable. Data radio

AUDIO INPUT VERSUS MODULATION

Rule Part No.: Part 2.1047(b) & 90

Test Requirements:

Method of Measurement: Modulation cannot exceed 100%, The audio input level needed for a particular percentage of modulation was measured in accordance with ANSI/TIA 603-C: 2004. The audio input curves versus modulation are shown below. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.

Not applicable. Data radio

OTHER MODULATION CHARACTERISTICS

Part 2.1033(c)

Part 2.1033(c) (4) Type of Emission: 11K2F1D

Part 90.209

Part 90.207 $B_n = 2M + 2DK$

$$M = B/2 = 9600/2 = 4800$$

$$D = 800$$

$$K=1$$

$$B_n = 2(4800) + 2(800) = 11.2k$$

Type of Emission: 6K0F1D

Part 90.207 $B_n = 2M + 2DK$

$$M = B/2 = 4800/2 = 2400$$

$$D = 400$$

$$K=1$$

$$B_n = 2(2400) + 2(600) = 6k$$

The modulation is MFSK.

OCCUPIED BANDWIDTH

Part 2.1049(c) EMISSION BANDWIDTH:

Part 90.210(b) 25 kHz Channel Spacing

Data in the plots show that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35 dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least $43 + 10\log(P)$ dB.

Part 90.210(c) 25 kHz Channel Spacing Not Equipped with a Low Pass Filter

For transmitters that are not equipped with an audio low pass filter pursuant to S90.211 (b), the power of any emission must be attenuated below the un-modulated carrier output power as follows; (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5 kHz but not more than 10 kHz: At least $83 \log(f_d/5)$ dB; (2) ON any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 10 kHz, but not more than 250% of the authorized bandwidth: At least $29 \log(f_d^2/11)$ dB or 50 dB, whichever is the lesser attenuation; (3) On any frequency removed from the center of the authorized bandwidth by more than 250% of the authorized bandwidth: At least $43+10 \log(P_o)$ dB.

Part 90.210(d) Emission Mask D - 12.5 kHz channel BW equipment.

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27 (f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10\log(P)$ dB or 70 dB, whichever is the lesser attenuation.


Part 90.210(e) Emission Mask E – 6.25 kHz channel BW equipment.

For transmitters designed to operate with a 6.25 kHz bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 3.0 kHz removed from f_0 : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least $30 + 16.67(f_d - 3.0 \text{ kHz})$ or $55 + 10 \text{ Log}(P)$ or 65, whichever us the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6kHz: At least $55 + 10\log(P)$ dB or 65 dB, whichever is the lesser attenuation.

Method of Measurement: ANSI/TIA 603-C: 2004

Test Setup Diagram:

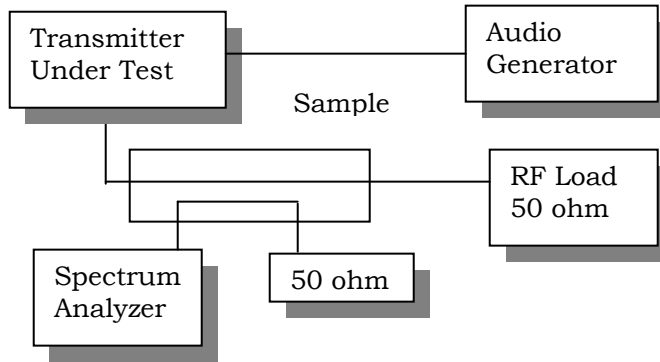


Test Data: See the plots below

OCCUPIED BANDWIDTH PLOTS


NOTES:

FCC 90.210 Mask D

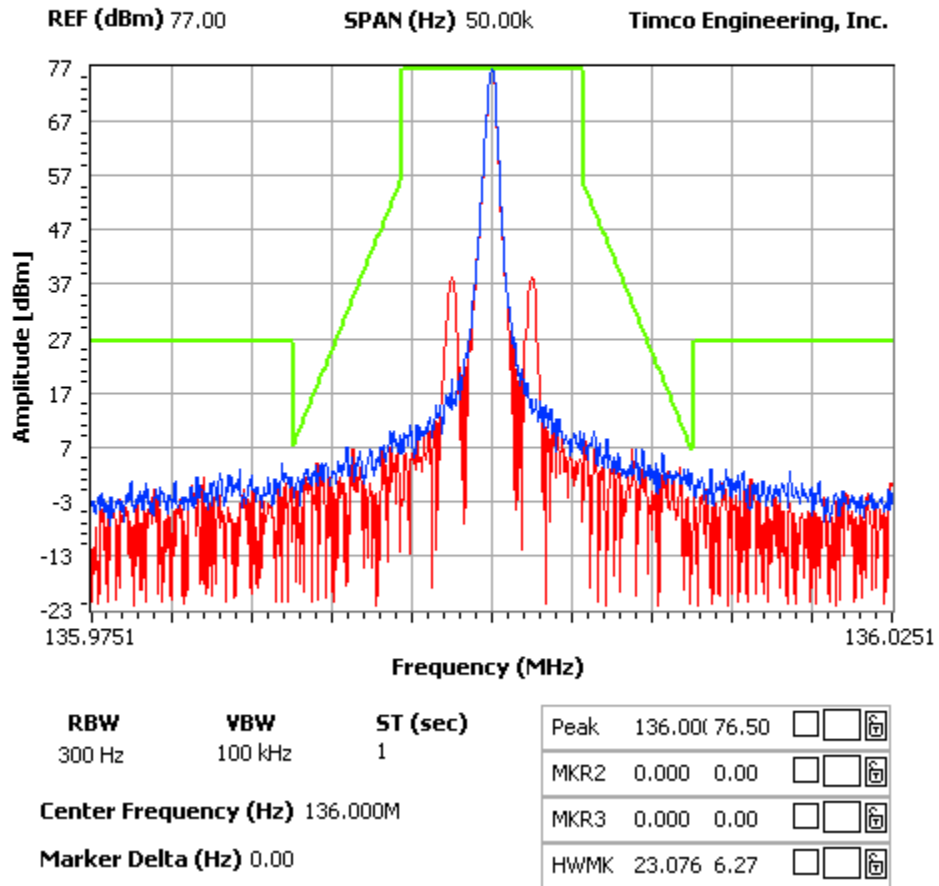


NOTES:

FCC 90.210 Mask D

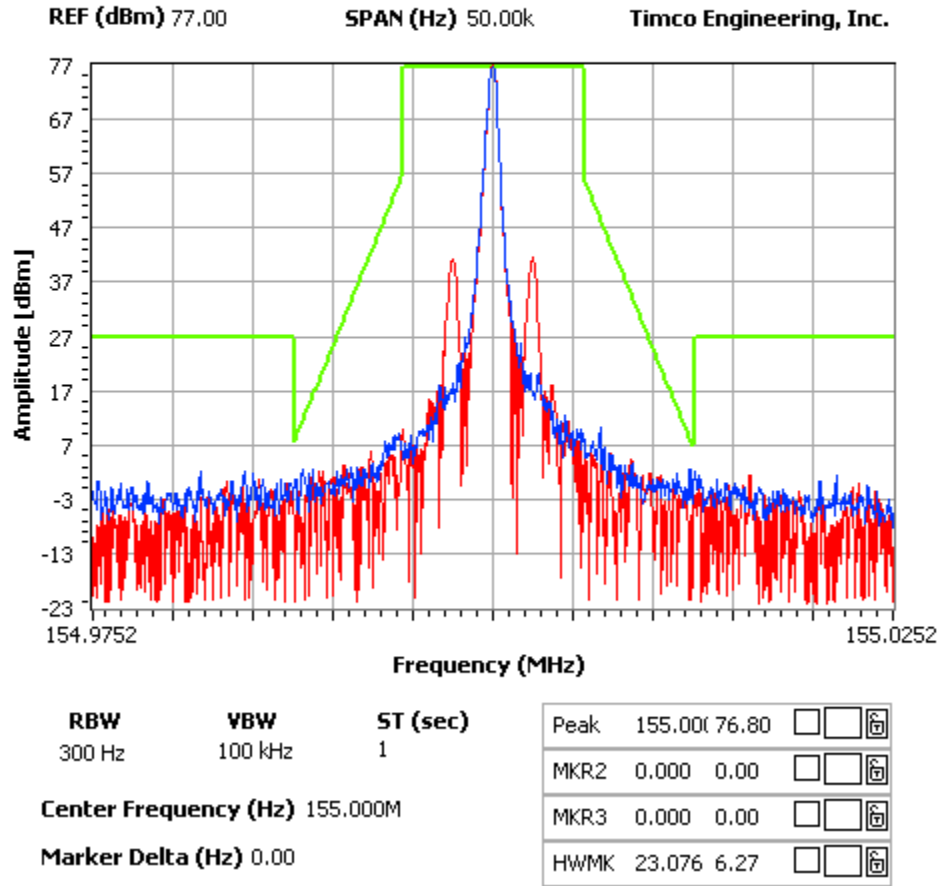


NOTES:

FCC 90.210 Mask D

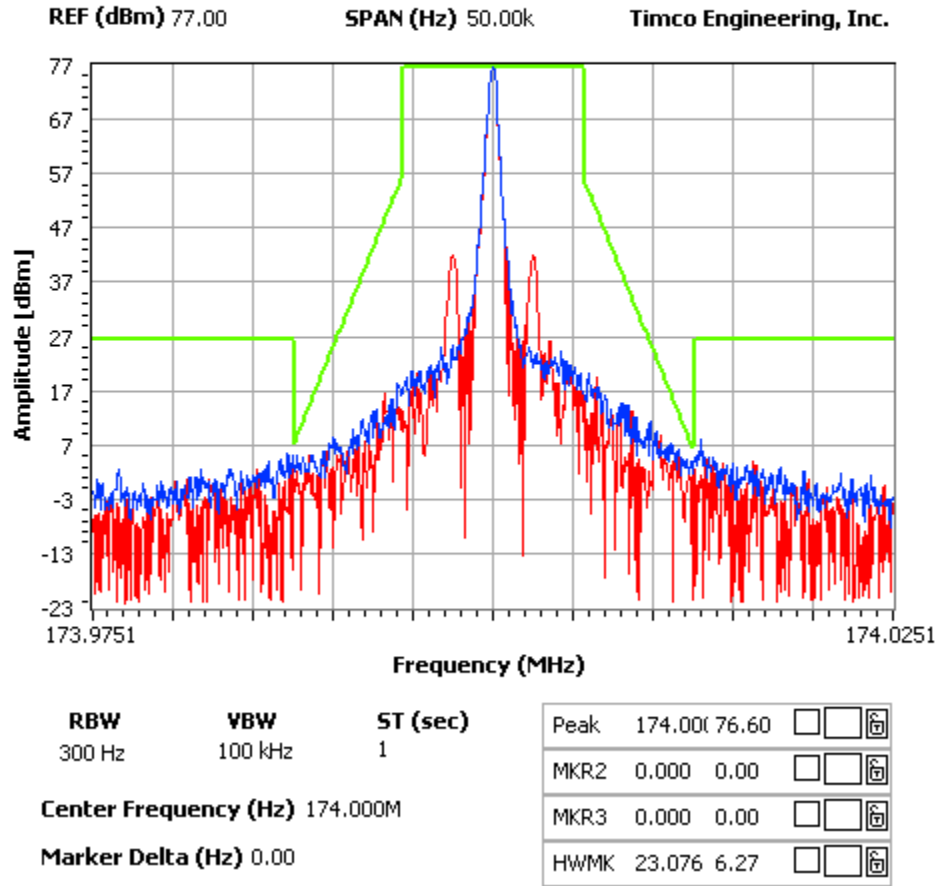


NOTES:

FCC 90.210 Mask E

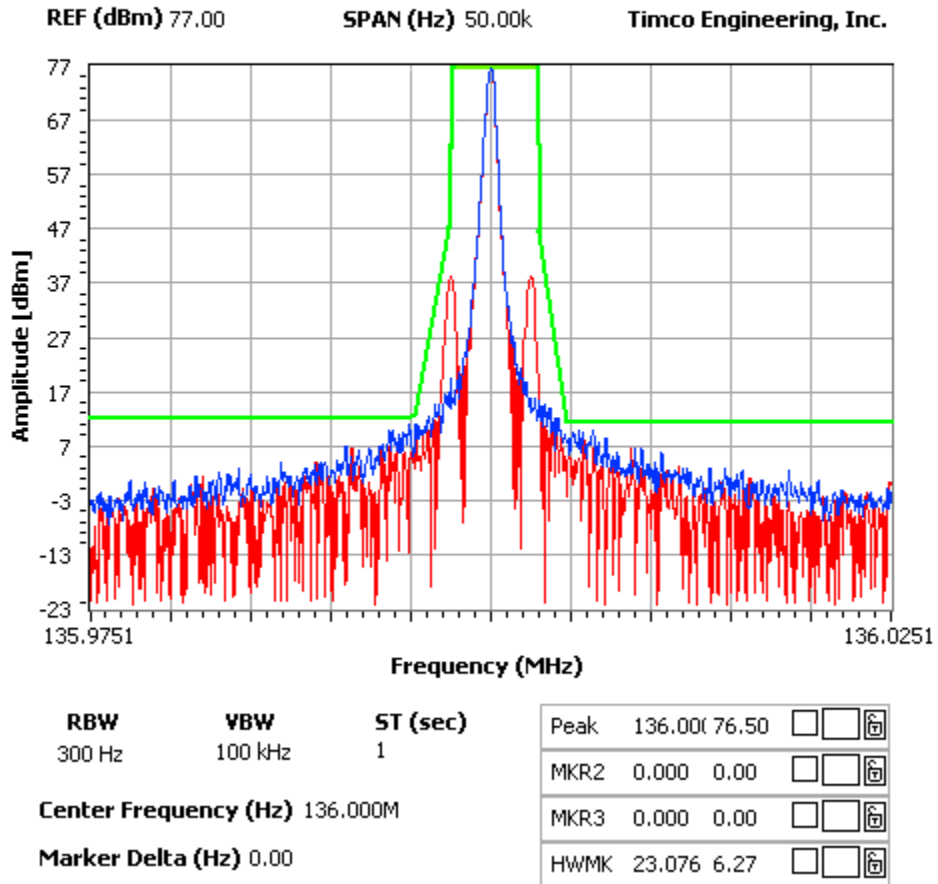


NOTES:

FCC 90.210 Mask E

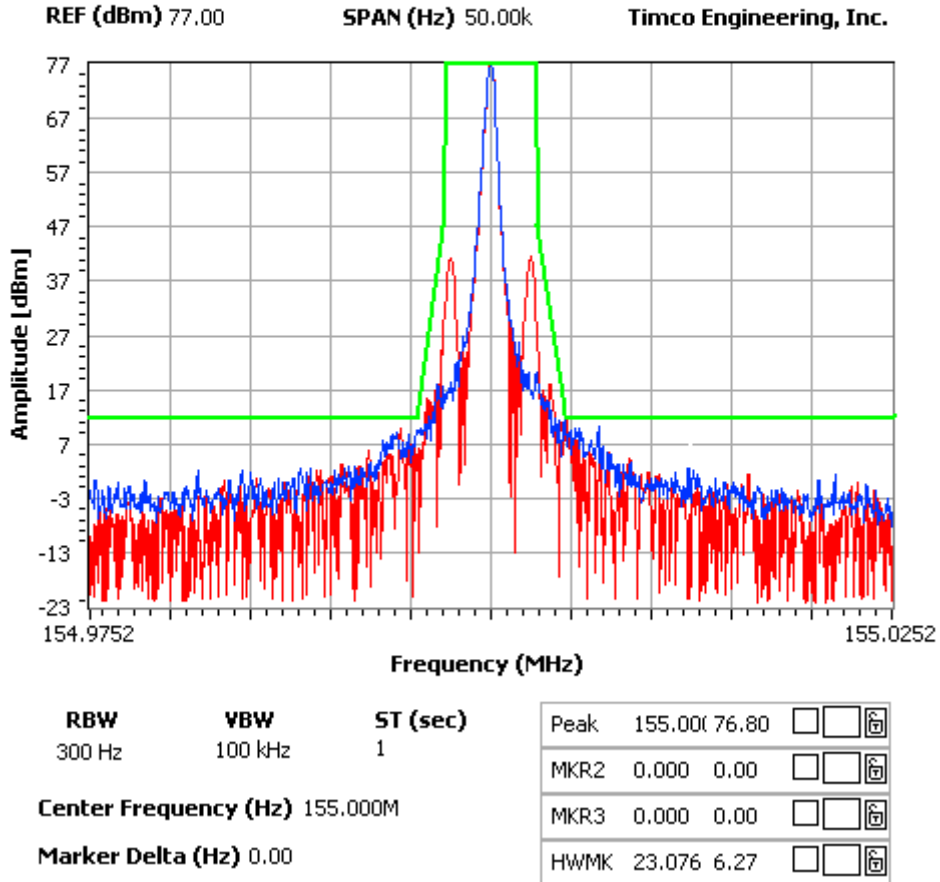

NOTES:

FCC 90.210 Mask E

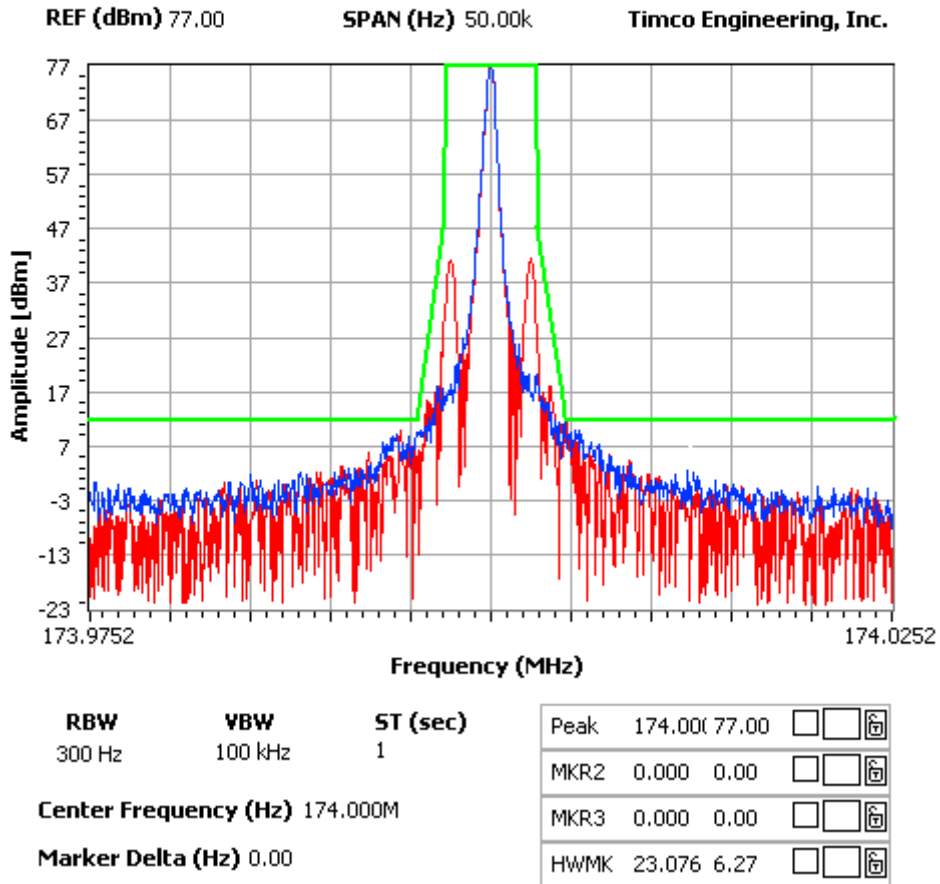

SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

Rule Part No.: Part 2.1051(a)

Requirements:

12.5 kHz Channel Spacing = $50 + 10 \log(10) = 60$ dBc
 6.25 kHz channel spacing = $55 + 10 \log(10) = 65$ dBc


Method of Measurement: The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard ANSI/TIA 603-C: 2004.

Test Data:

TF	EF	dB below carrier		TF	EF	dB below carrier
136	136	0		155	155	0
	272	79.8			310	91.9
	408	89			465	94.4
	544	89.9			620	76.8
	680	68.1			775	70.6
	816	81.1			930	67.4
	952	87.7			1085	84.6
	1088	95.8			1240	76.2
	1224	80.7			1395	95.3
	1360	112.7			1550	106.9

TF	EF	dB below carrier				
174	174	0				
	348	86.3				
	522	100.5				
	696	72.4				
	870	76.6				
	1044	80.9				
	1218	89.7				
	1392	110.7				
	1566	112				
	1740	111.2				

Method of Measuring Conducted Spurious Emissions

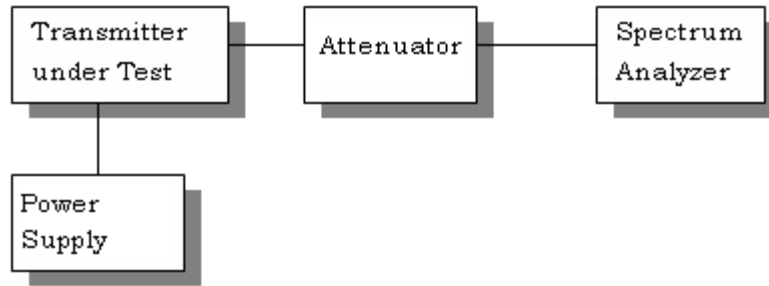

FIELD STRENGTH OF SPURIOUS EMISSIONS


Rule Parts. No.: Part 2.1053

Requirements:

12.5kHz Channel Spacing = $50+10\log(10) = 60$ dBc
 6.25 kHz channel spacing = $55+10\log(10) = 65$ dBc

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C: 2004 using the substitution method. Measurements were made at the test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

Test Setup Diagram:

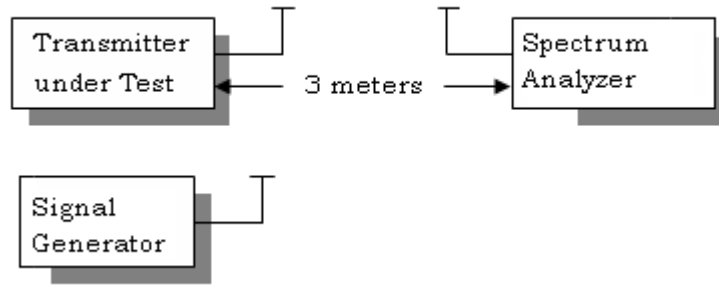

Test Data:

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
136.00	V	0
272.00	V	84.0
408.00	H	74.8
544.00	H	65.3
680.00	H	66.1
816.00	H	65.5
952.00	H	65.6
1088.00	H	89.7
1224.00	H	73.4
1360.00	H	88.3

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
155.00		0
310.00		84.0
465.00		74.8
620.00		65.3
775.00		66.1
930.00		65.5
1085.00		65.6
1240.00		89.7
1395.00		73.4
1550.00		88.3

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
174.00		0
348.00		84.0
522.00		74.8
696.00		65.3
870.00		66.1
1044.00		65.5
1218.00		65.6
1392.00		89.7
1566.00		73.4
1740.00		88.3

FREQUENCY STABILITY

Rule Parts. No.: Part 2.1055, Part 90.213

Requirements: Temperature range requirements: -30 to +50° C.
Voltage Variation +, -15%
±2.5 PPM

Method of Measurements: ANSI/TIA 603-C: 2004.

Test Data:

Assigned Frequency (Ref. Frequency) (MHz)		
Temperature (°C)	Frequency (MHz)	Frequency Stability (PPM)
-30	136.000273	1.38
-20	136.000147	0.46
-10	136.000086	0.01
0	136.000026	-0.43
+10	136.000028	-0.42
+20	136.000061	-0.18
+30	136.000083	-0.01
+40	136.000042	-0.32
+50	136.000021	-0.47

Assigned Frequency (Ref. Frequency) (MHz)		
% Battery	Frequency (MHz)	Frequency Stability (PPM)
-15%	136.000085	0.00
0	136.000085	0.00
+15%	136.000085	0.00

FREQUENCY STABILITY

Part 90.214 Transient Frequency Behavior

REQUIREMENTS: Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time Intervals	Maximum frequency difference	All Equipment	
		150-174 MHz	421-512 MHz

Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels

Time Intervals	Maximum frequency difference	150-174 MHz	421-512 MHz
t_1^4	± 25.0 kHz	5.0 ms	10.0 ms
t_2	± 12.5 kHz	20.0 ms	25.0 ms
t_3^4	± 25.0 kHz	5.0 ms	10.0 ms

Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels


Time Intervals	Maximum frequency difference	150-174 MHz	421-512 MHz
t_1^4	± 12.5 kHz	5.0 ms	10.0 ms
t_2	± 6.25 kHz	20.0 ms	25.0 ms
t_3^4	± 12.5 kHz	5.0 ms	10.0 ms

Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels

Time Intervals	Maximum frequency difference	150-174 MHz	421-512 MHz
t_1^4	± 6.25 kHz	5.0 ms	10.0 ms
t_2	± 3.125 kHz	20.0 ms	25.0 ms
t_3^4	± 6.25 kHz	5.0 ms	10.0 ms


TEST PROCEEDURE: ANSI/TIA 603-C: 2004, the levels were set as follows:

1. Using the variable attenuator the transmitter level was set to 40 dB below the test receivers maximum input level, then the transmitter was turned off.
2. With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30 dB.
4. With the levels set as above, the transient frequency behavior was observed and recorded.

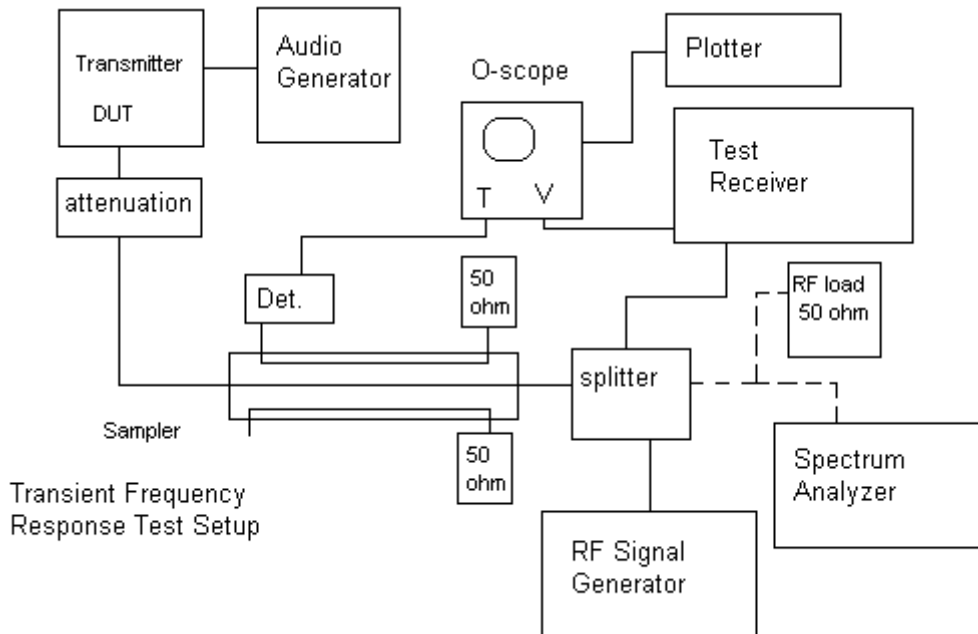


3 places in the band were checked and the worst case presented.


TRANSIENT FREQUENCY RESPONSE PLOT – ON

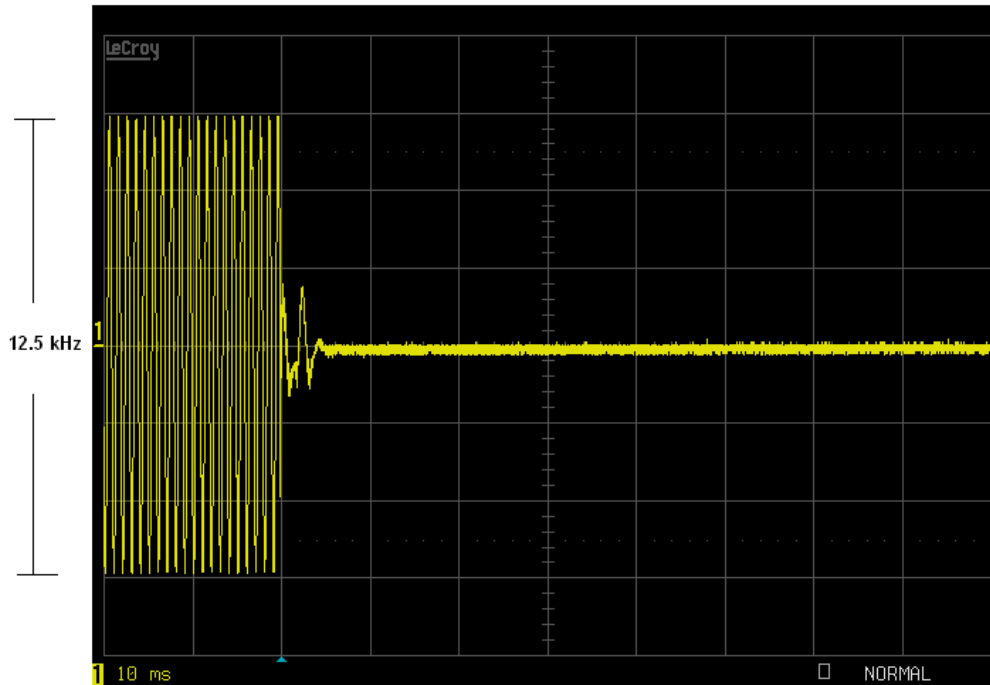

TRANSIENT FREQUENCY RESPONSE PLOT – OFF

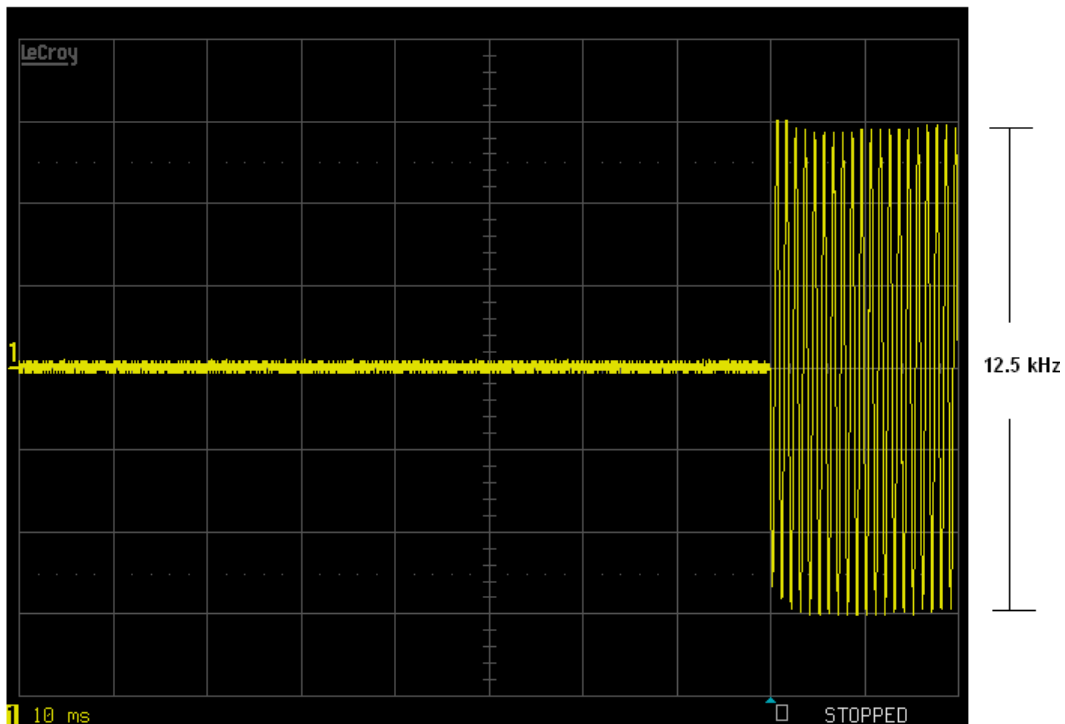

TRANSIENT FREQUENCY RESPONSE PLOT – ON

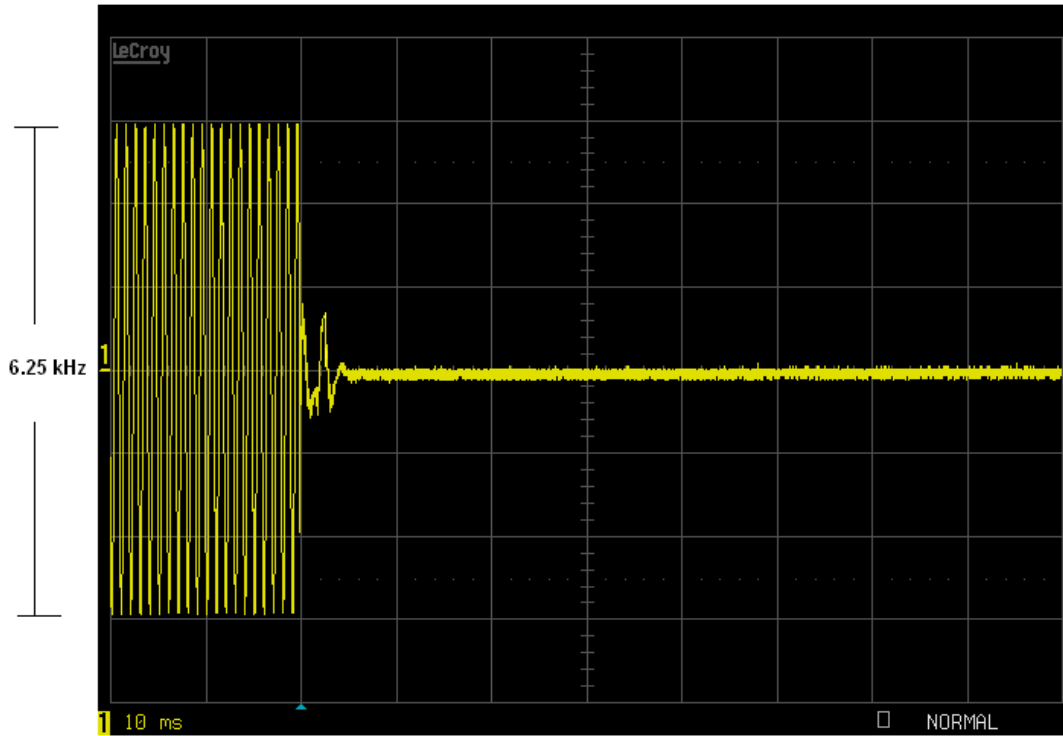

TRANSIENT FREQUENCY RESPONSE - OFF

