



Network Partner

**Nemko**

Qualified Independent Laboratory

Agent of



Accredited Laboratory

F C C - TEST REPORT

REPORT NO.: 23577/0/400F



Network Partner

**Nemko**

Qualified Independent Laboratory

Agent of



Accredited Laboratory

FCC – Test ReportDate: 2000-08-02

No. 23577/0/400F

Page 2 of 12

FCC listed testlab
acc. to Section 2.948 of the FCC - Rules
in compliance with the requirements of
ANSI C63.4 - 1992

Product : BMX Trek -- 27 MHz Transmitter**Model** : 25T27 (27MHZ)**Applicant** : ECHO TOYS LTD**Manufacturer** : ECHO TOYS LTD



Network Partner

**Nemko**

Qualified Independent Laboratory

Agent of



Accredited Laboratory

FCC – Test Report**No. 23577/0/400F****Date: 2000-08-02****Page 3 of 12****TABLE OF CONTENTS**

- 1. Cover sheet**
- 2. Introduction**
- 3. Table of Contents**
- 4. Laboratory Report**
- 5. Summary of Testresults**
- 6. Test Equipment List**
- 7. Radiated Emission Testprocedure**
- 8. Radiated Emission Testprocedure**
- 9. Interference Radiation (Datasheet)**
- 10. Notes for Radiation Measurement (acc. to ANSI C63.4 - 1992)**
- 11. Measurement of Emissions within Band Edges (Datasheet)**
- 12. Notes for Measurement of Emissions within Band Edges**



Network Partner



Nemko

Qualified Independent Laboratory

Agent of



Accredited Laboratory

FCC – Test Report

Date: 2000-08-02

No. 23577/0/400F

Page 4 of 12

LABORATORY - REPORT

APPLICANT: ECHO TOYS LTD
ADDRESS: 8 A&B, Block 1, Tai Ping Industrial Centre
57 Ting Kok Road
Taipo, NT
HONG KONG

DATE OF SAMPLE RECEIVED: 2000-07-20

DATE OF TESTING: 2000-08-02

DESCRIPTION OF SAMPLE:

Product: BMX Trek – 27 MHz Transmitter
Manufacturer: ECHO TOYS LTD
Model number: 25T27 (27MHZ)
Rating: DC 9V ('6F22' Size Battery x 1)
Country of Origin: P.R. CHINA

INVESTIGATIONS REQUESTED: Measurements to the relevant clauses of F.C.C. Rules and Regulations
Part 15 Subpart C - Intentional Radiators

RESULTS: See the attached test sheets

CONCLUSIONS From the measurement data obtained, the tested sample was considered to have **COMPLIED** with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.



Authorized Signature

Remark: Purpose of those tests in this report is to provide the applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under the FCC Equipment Authorization Program. The tests themselves are not Approval Tests



Network Partner

**Nemko**

Qualified Independent Laboratory



Accredited Laboratory

FCC – Test Report

No. 23577/0/400F

Date: 2000-08-02

Page 5 of 12

Summary of Test Results**Interference Radiation:**

Test result: O.K.
Test data: See attached data sheet

Interference Voltage:

Test result: N.A.
Test data: N.A.

Measurement of Emissions within Band Edges

Test result: O.K.
Test data: See attached data sheet



Network Partner



Nemko
Qualified Independent Laboratory



Accredited Laboratory

FCC – Test Report

No. 23577/0/400F

Date: 2000-08-02


Page 6 of 12

TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Remark
Test Receiver	Rohde & Schwarz	ESH 3	863497/015	10KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVP	860688/022	25MHz – 1,300 MHz
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	--	2 x 10A, 50Ω, 50μH 10KHz-30MHz
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107	--	30MHz – 1000MHz
Antenna Mast System	Schwarzbeck	AM9104	--	Max. 4 meters height
Spectrum Analyzer with Q. Peak	Tektronix	2712	B023006	9KHz – 1.8GHz
Interface for Spectrum 2712	Tektronix	TD3F14A	--	
Loop Antenna	Rohde & Schwarz	HFH2-Z2	871336/48	9KHz-30MHz
Test Receiver	Rohde & Schwarz	ESH 3	892580/006	10KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVP	863512/012	25MHz – 1,300 MHz
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2	--	
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107	--	30MHz – 1000MHz
Signal Generator	Rohde & Schwarz	SWS 2	879113/42	100KHz – 1040 MHz
Digital Multimeter	Tektronix	DM2510G	DM- 2510GTW10555	10KHz – 30MHz
Turntable with Controller	Drehtisch	DT312	--	φ120 cm



Network Partner

Nemko
Qualified Independent Laboratory

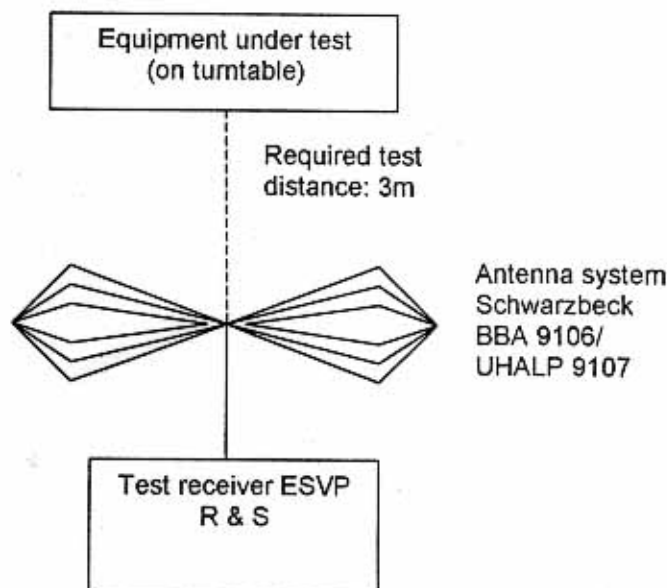
Accredited Laboratory

FCC – Test Report

No. 23577/0/400F


Date: 2000-08-02

Page 7 of 12

Radiated Emission Test Procedure



Network Partner

Nemko
Qualified Independent Laboratory

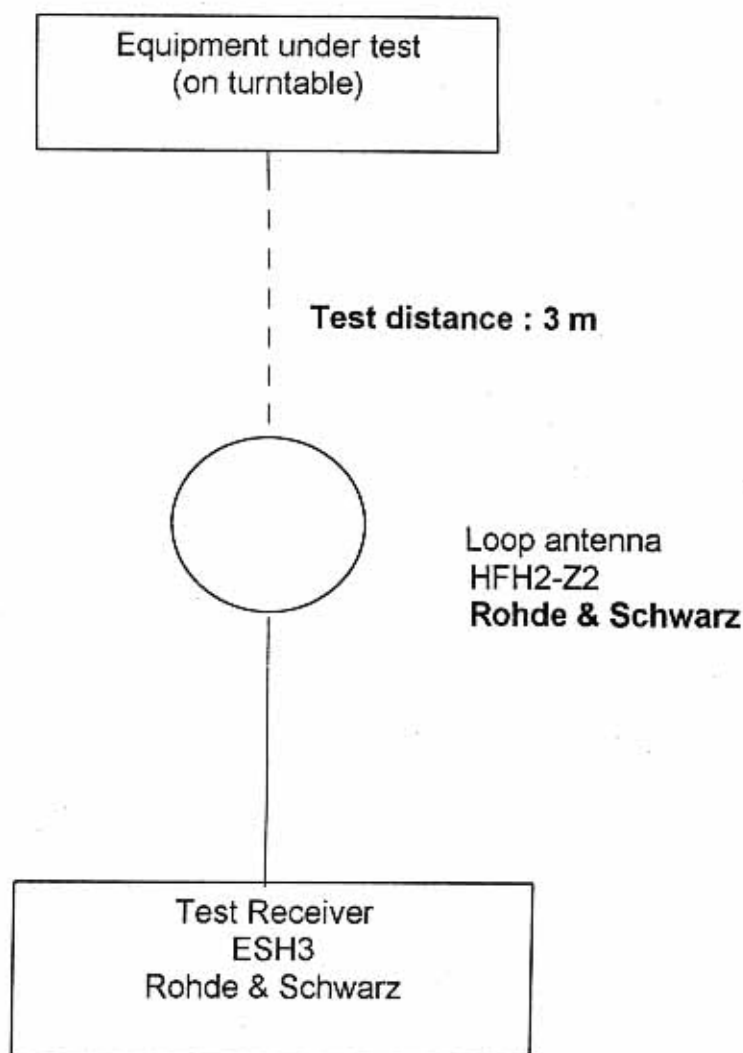
Accredited Laboratory

FCC – Test Report

No. 23577/0/400F

Date: 2000-08-02

Page 8 of 12

Radiated Emission Test Procedure (Measurement below 30 MHz)




Network Partner

Nemko
Qualified Independent Laboratory

Interference Radiation

Measurement of Radiated Emissions (27MHz-1000MHz)

Acc: FCC Part 15 Subpart C



Accredited Laboratory

IECC Ref: 23577/D/400F
 Model: 25T27 (27MHZ)
 Applicant: ECHO TOYS LTD
 Ser.Nr.: 1
 Set under test: BMX Trek
 Connected sets: -
 Operating mode: Power On

Test Equipment
 Receiver: ESVP Rohde & Schwarz
 Antenna: Schwarzbeck BBA 9106
 and UHALP 9107

	Frequency (MHz)	Horz. Reading dB(μV)	Vert. Reading dB(μV)	Antenna Factor (dB)	Horiz. Test Result (μV/m)	Vert. Test Result (μV/m)	Limit (μV/m)
Harm. 2	54.28	< 16	18	10.2	< 20	26	100
Harm. 3	81.42	19	17	7.1	20	16	100
Harm. 4	108.56	19	18	11.6	34	30	150
Harm. 5	135.7	< 16	< 16	14.3	< 33	< 33	150
Harm. 6	162.84	< 16	< 16	15.6	< 38	< 38	150
Harm. 7	189.98	< 16	< 16	16.3	< 41	< 41	150
Harm. 8	217.12	< 16	< 16	16.9	< 44	< 44	200
Harm. 9	244.26	< 16	< 16	17.6	< 48	< 48	200
Harm. 10	271.4	< 16	< 16	18.5	< 53	< 53	200
Harm. 11	298.54	< 16	< 16	19.9	< 62	< 62	200
Harm. 12	325.68	< 16	< 16	16.8	< 44	< 44	200
Harm. 13	352.82	< 16	< 16	17.5	< 47	< 47	200
Harm. 14	379.96	< 16	< 16	18.0	< 50	< 50	200
Harm. 15	407.1	< 16	< 16	18.4	< 53	< 53	200
Harm. 16	434.24	< 16	< 16	18.8	< 55	< 55	200
Harm. 17	461.38	< 16	< 16	19.2	< 57	< 57	200
Harm. 18	488.52	< 16	< 16	19.5	< 60	< 60	200
Harm. 19	515.66	< 16	< 16	19.9	< 62	< 62	200
Harm. 20	542.8	< 16	< 16	20.1	< 64	< 64	200
Harm. 21	569.94	< 16	< 16	20.5	< 67	< 67	200
Harm. 22	597.08	< 16	< 16	20.9	< 70	< 70	200
Harm. 23	624.22	< 16	< 16	21.2	< 73	< 73	200
Harm. 24	651.36	< 16	< 16	21.6	< 76	< 76	200
Harm. 25	678.5	< 16	< 16	22.1	< 80	< 80	200
Harm. 26	705.64	< 16	< 16	22.5	< 84	< 84	200
Harm. 27	732.78	< 16	< 16	22.8	< 88	< 88	200
Harm. 28	759.92	< 16	< 16	23.2	< 91	< 91	200
Harm. 29	787.06	< 16	< 16	23.5	< 95	< 95	200
Harm. 30	814.2	< 16	< 16	23.9	< 99	< 99	200
Harm. 31	841.34	< 16	< 16	24.3	< 103	< 103	200
Harm. 32	868.48	< 16	< 16	24.6	< 107	< 107	200
Harm. 33	895.62	< 16	< 16	24.9	< 112	< 112	200
Harm. 34	922.76	< 16	< 16	25.4	< 117	< 117	200
Harm. 35	949.9	< 16	< 16	25.8	< 123	< 123	200
Harm. 36	977.04	< 16	< 16	26.2	< 128	< 128	500

Radiation Measurement below 30 MHz (Using Loop Antenna)

Frequency	Maximum Test Result (dBμV/m)		Limit (dBμV/m)	
	Peak	Average	Peak	Average
27.14	45	42	100	80

Note: The measured radiation outside the operation band and below 30 MHz were negligible

Test result:

☒ O.K.
☐ Not O.K.

Date: 02 AUG 2000


Operator:



Network Partner

**Nemko**

Qualified Independent Laboratory

Agent of
Accredited Laboratory**FCC – Test Report**

Date: 2000-08-02

No. 23577/0/400F

Page 10 of 12

Notes for Radiation Measurement**1. Measurement facility:**

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

2. Distance between the EUT and measuring antenna:

3 meters.

3. Measuring instrumentations:

Rohde & Schwarz ESVP Test Receiver (20 - 1300 MHz) with a CISPR weighting QP detector, 6 dB bandwidth set at 120 KHz.

In the frequency range above 1000 MHz Spectrum Analyzer FMSM26 and Analyzer Display Unit FSA-D are used, bandwidth set at 100 kHz.

4. Measuring antenna:

Broad-band antenna for the frequency range 30 - 300 MHz and frequency range 300 - 1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the Antenna Factor for measurement data. The antennas are capable of measuring both horizontal and vertical polarizations.

Loop antenna for the frequency range 9KHz – 30MHz, connected with 10meters coaxial cable. Cable loss of the coaxial cable included in the measurement data. The center of the loop 1 m above the ground plane, positioned with its plane vertical at the specified distance and rotated about its vertical axis and placed horizontal for maximum response at each azimuth about the EUT.

In the frequency range above 1 GHz horn-antenna RGA 50/60 is used.

5. Frequency range scanned:

The frequency range 30 - 5000 MHz has been scanned. Readings of the highest emissions relating to the limit were reported as above.

6. Arrangement of EUT:

During the test, the sample was operated at rated supply voltage and arranged for maximum emissions.

7. Measuring Procedure:

In accordance with the relevant sections of the American National Standards Institute (ANSI) C63.4-1992 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.



Network Partner




Nemko

Qualified independent Laboratory

Interference Radiation

Measurement of Emissions within Band Edges

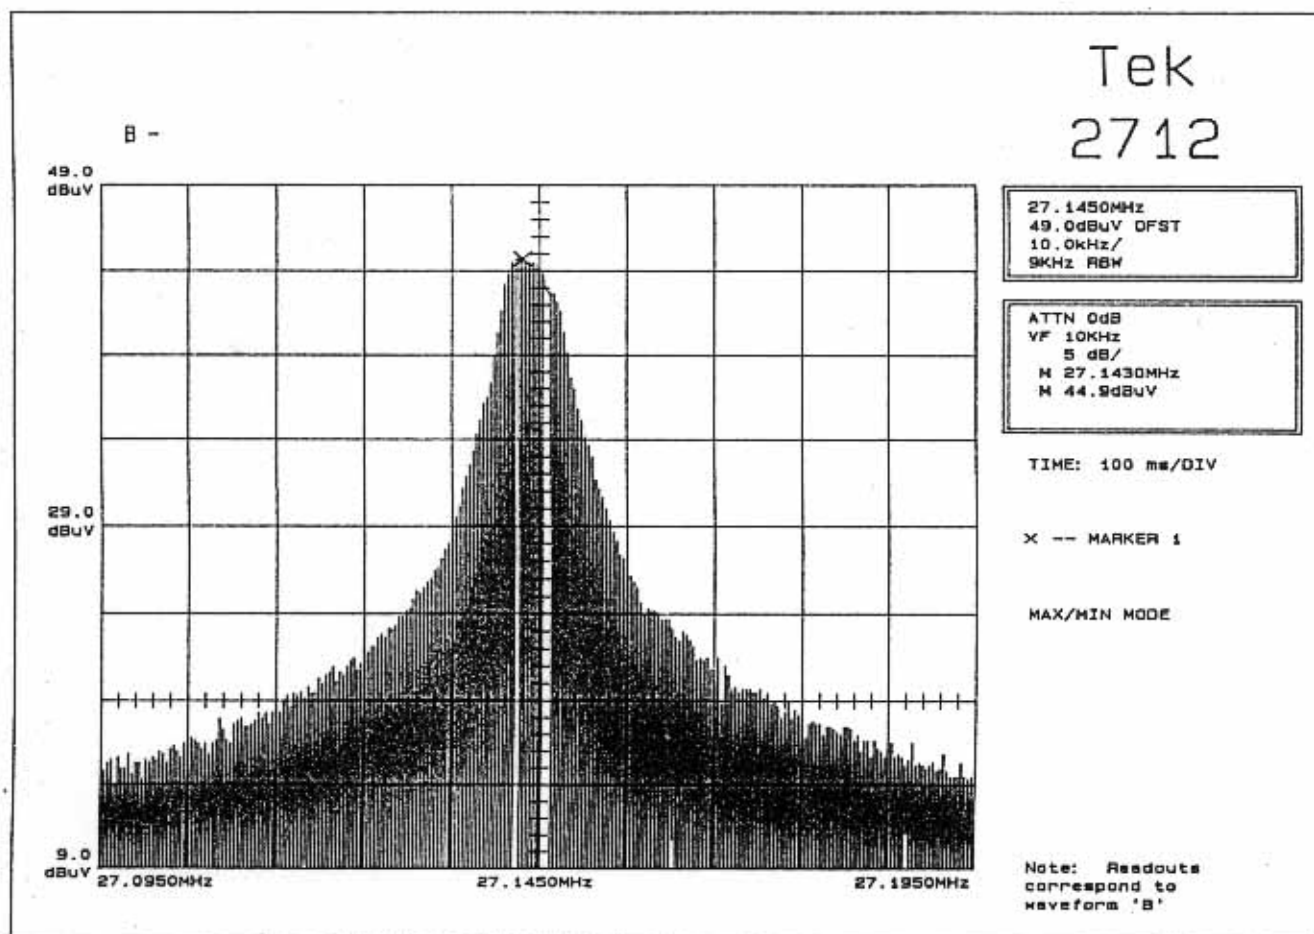
Acc: FCC Part 15 Subpart C



Accredited Laboratory

IECC Ref: 23577/0/400F
 Model: 25T27 (27MHz)
 Applicant: ECHO TOYS LTD
 Ser.Nr.: 1
 Set under test: BMX Trek
 Connected sets: -
 Operating mode: Power On

Test Equipment
 Spectrum Analyzer : Tektronix 2712



Test result:

☒ O.K.
☐ Not O.K.

Date: 02 AUG 2000


Operator: QJ



Network Partner

**Nemko**

Qualified Independent Laboratory

Agent of
Accredited Laboratory**FCC – Test Report**

No. 23577/0/400F

Date: 2000-08-02

Page 12 of 12

Notes for Measurement of Emissions within Band Edges

1. Measurement facility:

Measurement facility located at Fanling (Hong Kong) placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

2. Measuring instrumentations:

Spectrum Analyzer: Tektronix 2712

3. Frequency range scanned:

The frequency range acc. to FCC rules and regulations part 15 subpart C - Intentional Radiators.

4. Arrangement of EUT:

During the test, the sample was operated.

5. Measuring Procedure:

In accordance with the relevant sections of American National Standards Institute (ANSI) C63.4 - 1992 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz'.