



Engineering Test Report No. 2102572-01	
Report Date	July 21, 2021
Manufacturer Name	Chamberlain
Manufacturer Address	300 Windsor Dr Oak Brook, IL 60523
Model No.	KLIK2U-P2, Universal Wireless Keypad
Date Received	June 6, 2021
Test Dates	June 6, 2021 through June 8, 2021
Specifications	FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231(b) Innovation, Science, and Economic Development Canada, RSS-210 Innovation, Science, and Economic Development Canada, RSS-GEN
Test Facility	Elite Electronic Engineering, Inc. 1516 Centre Circle, Downers Grove, IL 60515
	FCC Reg. Number: 269750 IC Reg. Number: 2987A CAB Identifier: US0107
Signature	MARK E. LONGINOTTI
	<i>Nathaniel Bouchie</i>
Tested by	Mark Longinotti, Nathaniel Bouchie
Signature	<i>Raymond J Klouda</i>
Approved by	Raymond J. Klouda, Registered Professional Engineer of Illinois – 44894
PO Number	4900077402

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

This report shall not be reproduced, except in full, without the written approval of Elite Electronic Engineering Inc.

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231 and Innovation, Science, and Economic Development Canada, RSS-210 and RSS-Gen test specification(s). The data presented in this test report pertains to the EUT on the test date(s) specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification. This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.

## Table of Contents

1.	Report Revision History .....	3
2.	Introduction .....	4
2.1.	Scope of Tests .....	4
2.2.	Purpose .....	4
2.3.	Identification of the EUT .....	4
3.	Power Input .....	5
4.	Grounding .....	5
5.	Support Equipment .....	5
6.	Interconnect Leads .....	5
7.	Modifications Made to the EUT .....	5
8.	Modes of Operation .....	5
9.	Test Specifications .....	5
10.	Test Plan .....	6
11.	Deviation, Additions to, or Exclusions from Test Specifications .....	6
12.	Laboratory Conditions .....	6
13.	Summary .....	6
14.	Sample Calculations .....	6
15.	Statement of Conformity .....	7
16.	Certification .....	7
17.	Photographs of EUT .....	8
18.	Block Diagram of Test Setup .....	10
19.	Equipment List .....	11
20.	Periodic Operation Measurements .....	12
21.	Duty Cycle Factor Measurements .....	17
22.	Spurious Radiated Emissions .....	27
23.	Occupied Bandwidth Measurements .....	46
24.	Scope of Accreditation .....	64

**This report shall not be reproduced, except in full,  
without the written approval of Elite Electronic Engineering Inc.**

## 1. Report Revision History

Revision	Date	Description
-	21 JUL 2021	Initial Release of Engineering Test Report No. 2102572-01

## 2. Introduction

### 2.1. Scope of Tests

This document presents the results of a series of RF emissions tests that were performed on the Chamberlain Universal Wireless Keypads, (hereinafter referred to as the Equipment Under Test (EUT)). The EUTs were manufactured and submitted for testing by Chamberlain located in Oak Brook, IL.

### 2.2. Purpose

The EUT was originally tested with ten (10) separate transmit codes (see UL EMC Report 2012-87-EM-F0042) and was certified under FCC ID: HBW7938 and IC: 2666A-KE7938. The manufacturer has since added three (3) new transmit codes to the EUT. The new transmit codes were: Xtreme Garage, transmit at 303MHz, Sommer, transmit at 310MHz, and Ryobi, transmit at 372.5MHz.

The purpose of this test series was to determine if the EUT, when transmitting the three new codes, meets the RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.231(b) and to perform spot checks on the original codes to determine if the original transmit codes continue to meet the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Section 15.231(b).

The test series was also performed to determine if the EUT, when transmitting the three new codes, meets the RF emission requirements of the Innovation, Science, and Economic Development Canada RSS-Gen and RSS-210, Annex A, and to perform spot checks on the original codes to determine if the original transmit codes continue to meet the Innovation, Science, and Economic Development Canada RSS-Gen and RSS-210, Annex A.

Testing was performed in accordance with ANSI C63.10-2013.

### 2.3. Identification of the EUT

The EUTs were identified as follows:

EUT Identification	
Product Description	Universal Wireless Keypad
Model/Part No.	KLIK2U-P2
S/N	S/N 10 was assigned to the EUT programmed to transmit the Xtreme Garage Code (303MHz)  S/N 11 was assigned to the EUT programmed to transmit the Sommer Code (310MHz)  S/N 12 was assigned to the EUT programmed to transmit the Ryobi Code (372.5MHz) and the original 10 transmit codes
Band of Operation	303MHz – 390MHz
20dB Bandwidth	51.9 kHz (Xtreme Garage Code) 51.9 kHz (Sommer Code) 24 kHz (Ryobi Code)
99% Bandwidth	105.9 kHz (Xtreme Garage Code) 105.9 kHz (Sommer Code) 48.7 kHz (Ryobi Code)
Software/Firmware Version	Test Code 12, Which will become launch code 1
Size of EUT	15cm x 6cm x 2.5cm

The EUTs listed above were used throughout the test series.

### 3. Power Input

The EUTs were powered by 9VDC from an internal battery.

### 4. Grounding

The EUTs were not connected to ground.

### 5. Support Equipment

No support equipment was used during the tests.

### 6. Interconnect Leads

No interconnect leads were used during the tests.

### 7. Modifications Made to the EUT

No modifications were made to the EUTs during the testing.

### 8. Modes of Operation

Mode	Description
Tx On	<p>The EUT was powered on and set to transmit at one of the following frequencies:</p> <ol style="list-style-type: none"> <li>1. Linear 318 MHz NEW Mega-Code</li> <li>2. CGI 390 MHz Rolling Code (D)</li> <li>3. CGI 315 MHz Rolling Code (D)</li> <li>4. CGI 390 MHz Billion Code (A)</li> <li>5. Genie 315 MHz NEW, IntelliCode (Keeloq based)</li> <li>6. Genie 390 MHz NEW, IntelliCode (Keeloq based)</li> <li>7. Stanley 310MHz NEW, Secure Code (Keeloq based)</li> <li>8. CGI 310/315/390MHz NEW Rolling Code (E)</li> <li>9. Wayne-Dalton 372.5MHz NEW, Rolling Code (Keeloq based)</li> <li>10. Xtreme Garage, 303 MHz, Fixed code</li> <li>11. Sommer, 310 MHz, New Rolling code (Keeloq based)</li> <li>12. Ryobi, 372.5 MHz, New Rolling code (Keeloq based)</li> <li>13. CGI 310/315/390MHz NEW Rolling Code (F)</li> </ol>

### 9. Test Specifications

The tests were performed to selected portions of, and in accordance with the following test specifications:

- Federal Communications Commission “Code of Federal Regulations”, Title 47, Part 15, Subpart C
- ANSI C63.4-2014, “American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz”
- ANSI C63.10-2013, “American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices”
- RSS-210 Issue 10, December 2019, “License-Exempt Radio Apparatus: Category I Equipment”
- RSS-Gen Issue 5, April 2018, Amendment 1, March 2019, Amendment 2, February 2021, Innovation,

Science, and Economic Development Canada, "Spectrum Management and Telecommunications, Radio Standards Specification, General Requirements for Compliance of Radio Apparatus"

### 10. Test Plan

No test plan was provided. Instructions were provided by personnel from Chamberlain and used in conjunction with the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231 and Innovation, Science, and Economic Development Canada, RSS-210, and ANSI C63.10-2013 test specifications.

### 11. Deviation, Additions to, or Exclusions from Test Specifications

There were no deviations, additions to, or exclusions from the test specifications during this test series.

### 12. Laboratory Conditions

Ambient Parameters	Value
Temperature	23°C
Relative Humidity	35%
Atmospheric Pressure	1013.9mb

### 13. Summary

The following EMC tests were performed and the results are shown below:

Test Description	Requirements	Test Methods	S/N	Results
Periodic Operation Measurements	FCC 15C ISED RSS-210	ANSI C63.10: 2013	10 11 12	Conforms
Duty Cycle Factor Measurements	FCC 15C ISED RSS-210	ANSI C63.10: 2013	10 11 12	---
Spurious Radiated Emissions	FCC 15C ISED RSS-210	ANSI C63.10: 2013	10 11 12	Conforms
Occupied Bandwidth Measurements	FCC 15C ISED RSS-210	ANSI C63.10: 2013	10 11 12	Conforms
Case Spurious Radiated Emissions (Spot Checks)	FCC 15C ISED RSS-210	ANSI C63.10: 2013	12	Conforms

### 14. Sample Calculations

For Powerline Conducted Emissions:

The resultant voltage level (VL) is a summation in decibels (dB) of the receiver meter reading (MTR) and the cable loss factor (CF).

$$\text{Formula 1: } VL \text{ (dBuV)} = \text{MTR (dBuV)} + \text{CF (dB)}.$$

For Radiated Emissions:

The resultant field strength (FS) is a summation in decibels (dB) of the receiver meter reading (MTR), the antenna correction factor (AF), and the cable loss factor (CF). If an external preamplifier is used, the total is reduced by its gain (-PA). If a distance correction (DC) is required, it is added to the total.

$$\text{Formula 1: } FS \text{ (dBuV/m)} = \text{MTR (dBuV)} + \text{AF (dB/m)} + \text{CF (dB)} + (-PA \text{ (dB)}) + \text{DC (dB)}$$

To convert the Field Strength dBuV/m term to uV/m, the dBuV/m is first divided by 20. The Base 10 AntiLog is taken of this quotient. The result is the Field Strength value in uV/m terms.

$$\text{Formula 2: FS (uV/m) = AntiLog [(FS (dBuV/m))/20]}$$

## 15. Statement of Conformity

The Chamberlain Universal Wireless Keypad, Model No. KLIK2U-P2, , when transmitting the three new codes, did fully conform to the selected requirements of FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231 and Innovation, Science, and Economic Development Canada, RSS-210, Annex A.

In addition, spurious radiated emissions spot checks performed on the original transmit codes determined that the Chamberlain Universal Wireless Keypad, Model No. KLIK2U-P2, when transmitting the original transmit codes, continues to meet the selected requirements of FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231 and Innovation, Science, and Economic Development Canada, RSS-210, Annex A.


## 16. Certification

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231 and Innovation, Science, and Economic Development Canada, RSS-210 test specifications. The data presented in this test report pertains to the EUTs on the test date specified. Any electrical or mechanical modifications made to the EUTs subsequent to the specified test date will serve to invalidate the data and void this certification.


17. Photographs of EUT





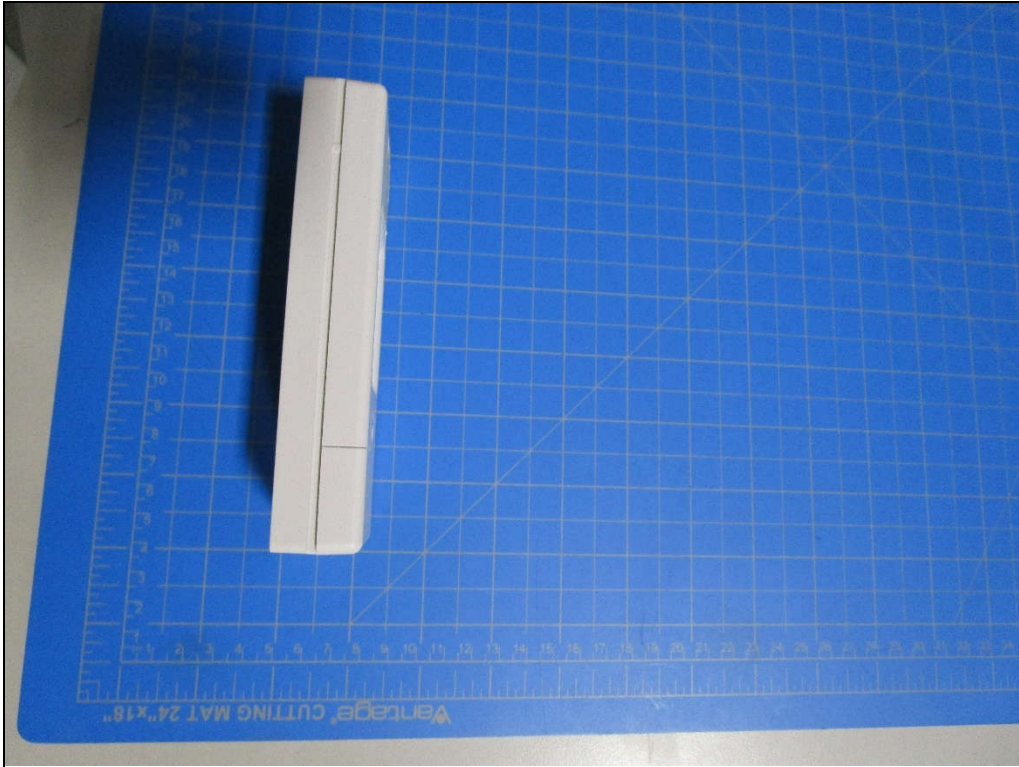

### 18. Block Diagram of Test Setup

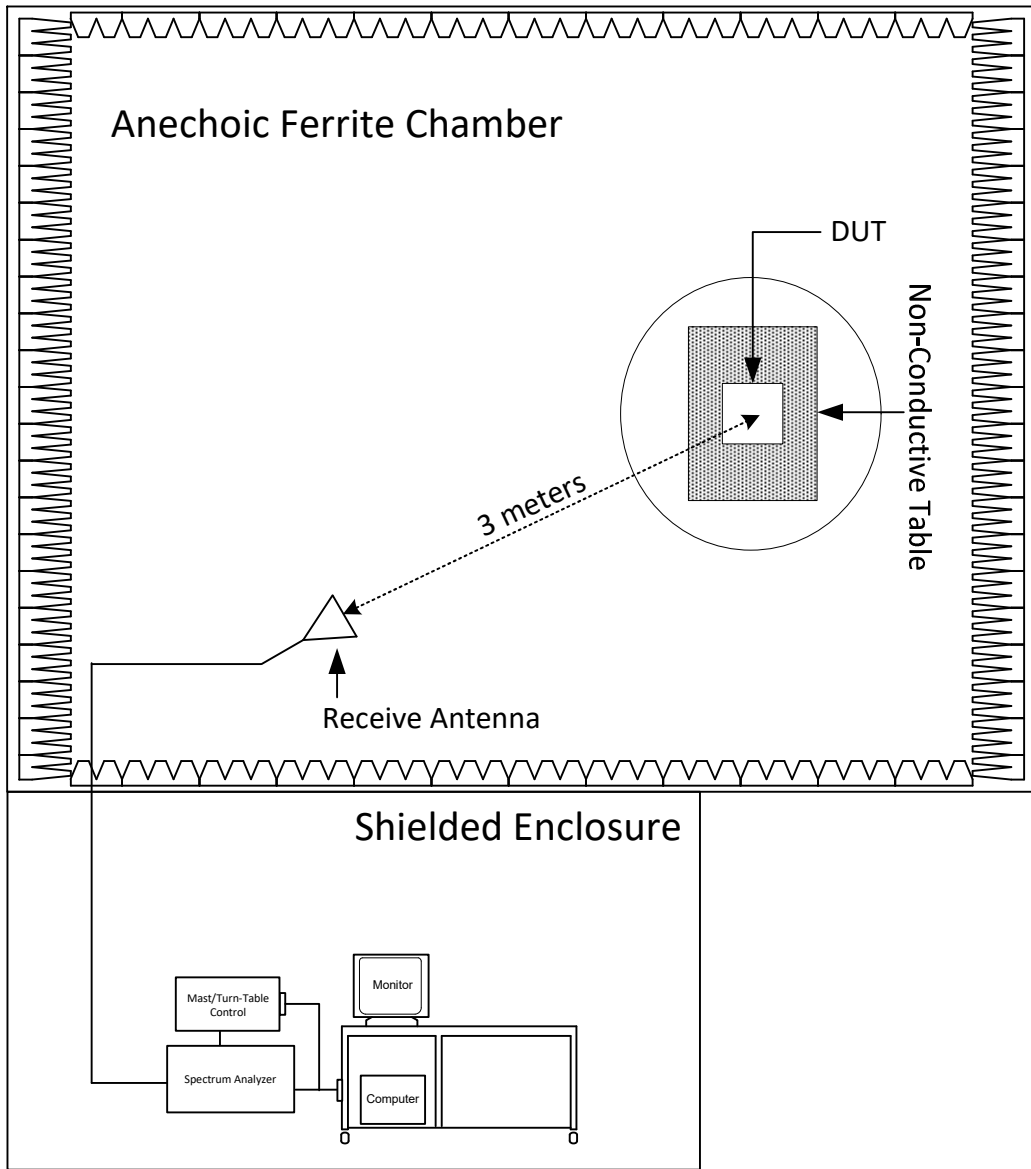

Radiated Measurements Test Setup

### 19. Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
NTA4	BILOG ANTENNA	TESEQ	6112D	46660	20-2000GHZ	10/5/2020	10/5/2021
NWQ2	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS LINDGREN	3117	66659	1GHZ-18GHZ	4/7/2020	4/7/2022
PHA0	MAGNETIC FIELD PROBE	ELECTRO-METRICS	EM-6882	134	22-230MHZ	NOTE 1	
R29F	3M ANECHOIC CHAMBER NSA	EMC TEST SYSTEMS	3M ANECHOIC		30MHZ-18GHZ	3/13/2021	3/13/2022
RBG0	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	101533	10HZ-44GHZ	3/2/2021	3/2/2022
RBG2	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	101591	2HZ-44GHZ	3/11/2021	3/11/2022
WKA1	SOFTWARE, UNIVERSAL RCV EMI	ELITE	UNIV_RCV_EMI	1	---	I/O	

N/A: Not Applicable

I/O: Initial Only

CNR: Calibration Not Required

NOTE 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

## 20. Periodic Operation Measurements

Test Information	
Manufacturer	Chamberlain
Product	Universal Wireless Keypad
Model	KLIK2U-P2
Mode	Tx On
Test Date	07/08/2021

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	N/A
Test site used	N/A
Note	None


Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Requirements
<p>A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released. A transmitter activated automatically shall cease transmission within 5 seconds after activation. Transmission of set-up information for security systems may exceed said transmission duration limits, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.</p> <p>Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.</p> <p>Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.</p>

Procedures


The spectrum analyzer was setup to display the time domain trace. The EUT was set to transmit normally. The spectrum analyzer was used to record the amount of time that the EUT remained active following activation.

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	10
Mode	Tx On
Carrier Frequency	303 MHz, Xtreme Garage Code
Parameters	Operation Time = 210 ms
Notes	None

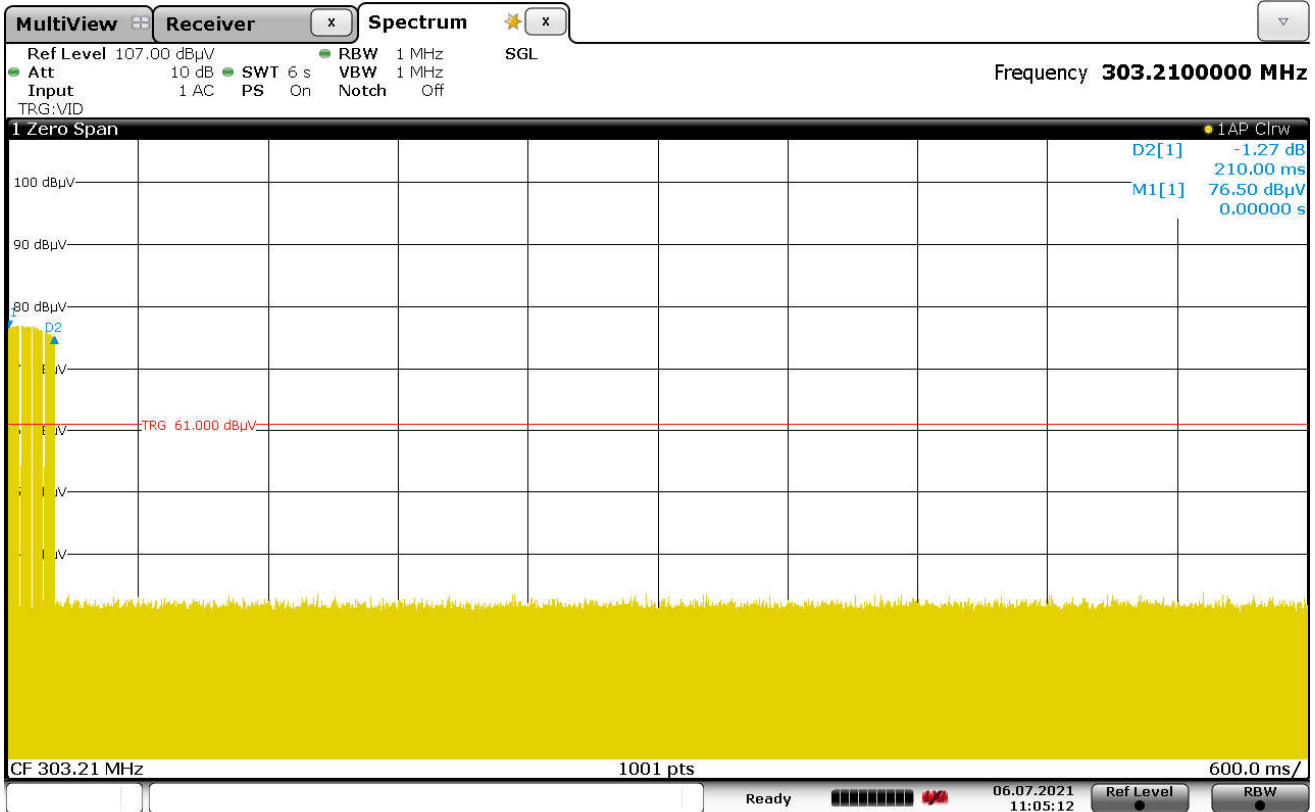


Date: 6 JUL 2021 11:05:13

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	11
Mode	Tx On
Carrier Frequency	310 MHz, Sommer Code
Parameters	Operation Time = 834 ms
Notes	None

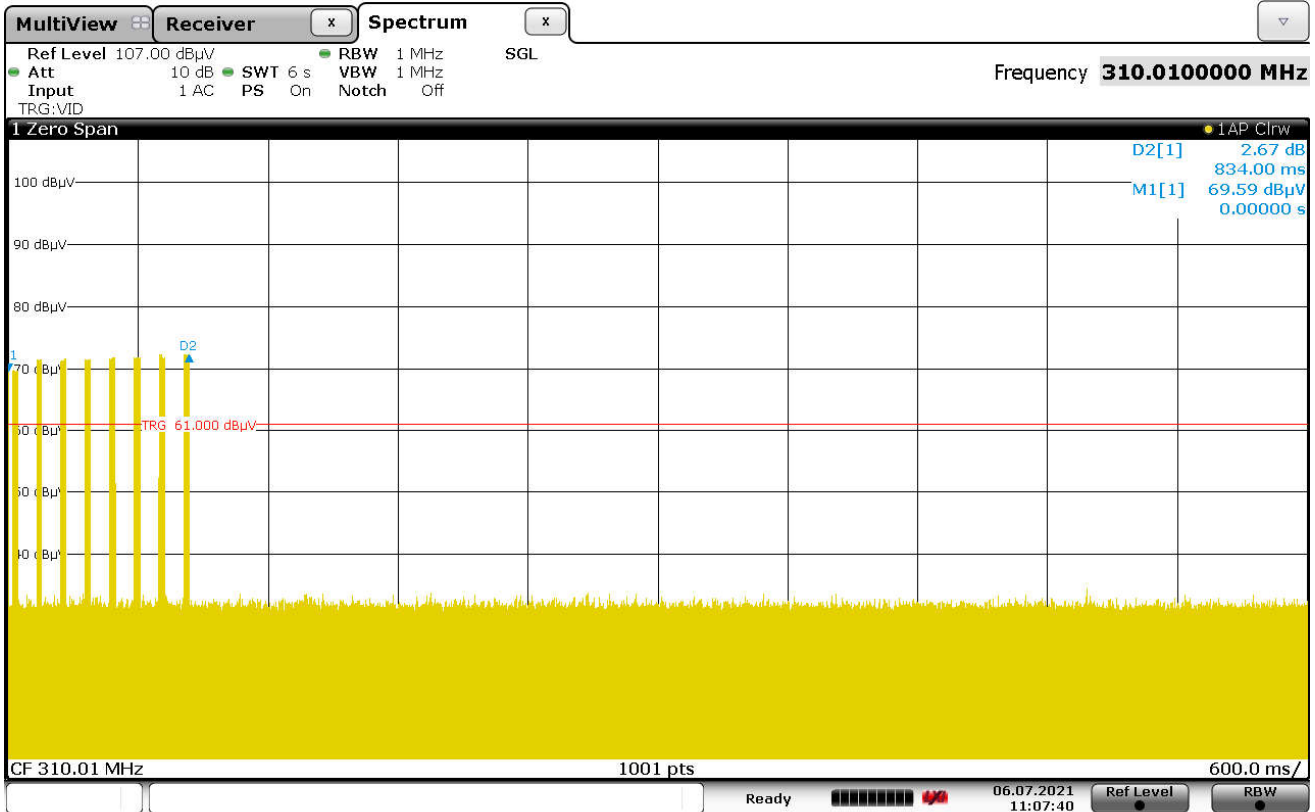

Date: 6 JUL 2021 11:07:40

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	12
Mode	Tx On
Carrier Frequency	372.5 MHz, Ryobi Code
Parameters	Operation Time = 980 ms
Notes	None

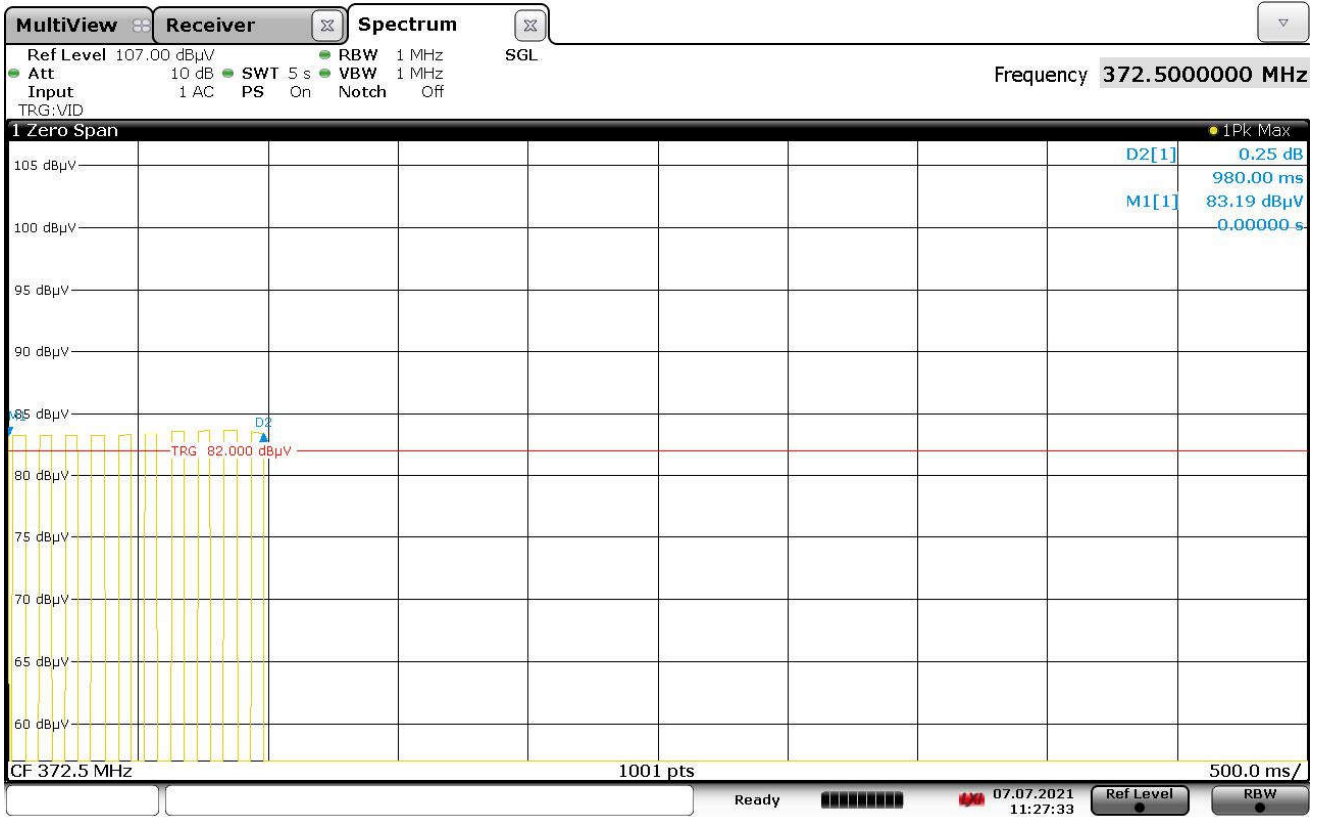

11:27:34 07.07.2021



## 21. Duty Cycle Factor Measurements


Test Information	
Manufacturer	Chamberlain
Product	Universal Wireless Keypad
Model	KLIK2U-P2
Mode	Tx On
Test Date	07/08/2021

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	N/A
Test site used	N/A
Notes	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4


Procedures
<p>The duty cycle factor is used to convert peak detected readings to average readings. This factor is computed from the time domain trace of the pulse modulation signal. The following procedure was used to measure the duty cycle:</p> <ol style="list-style-type: none"> <li>1) With the transmitter set up to transmit for maximum pulse density, the time domain trace is displayed on the spectrum analyzer.</li> <li>2) The pulse width is measured and a plot of this measurement is recorded.</li> <li>3) Next the number of pulses in the word period is measured and a plot is recorded.</li> <li>4) Finally the length of the word period is measured and a third plot is recorded. If the word period exceeds 100msec, the word period is limited to 100msec.</li> <li>5) The pulse width and number of pulses for the word period are used to compute the on-time. The duty cycle is then computed as the (on-time/ word period).</li> <li>6) The duty cycle factor is computed from the duty cycle.</li> </ol>

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	10
Mode	Tx On
Carrier Frequency	303 MHz, Xtreme Garage Code
Parameters	Narrow Pulses = 495usec
Notes	None

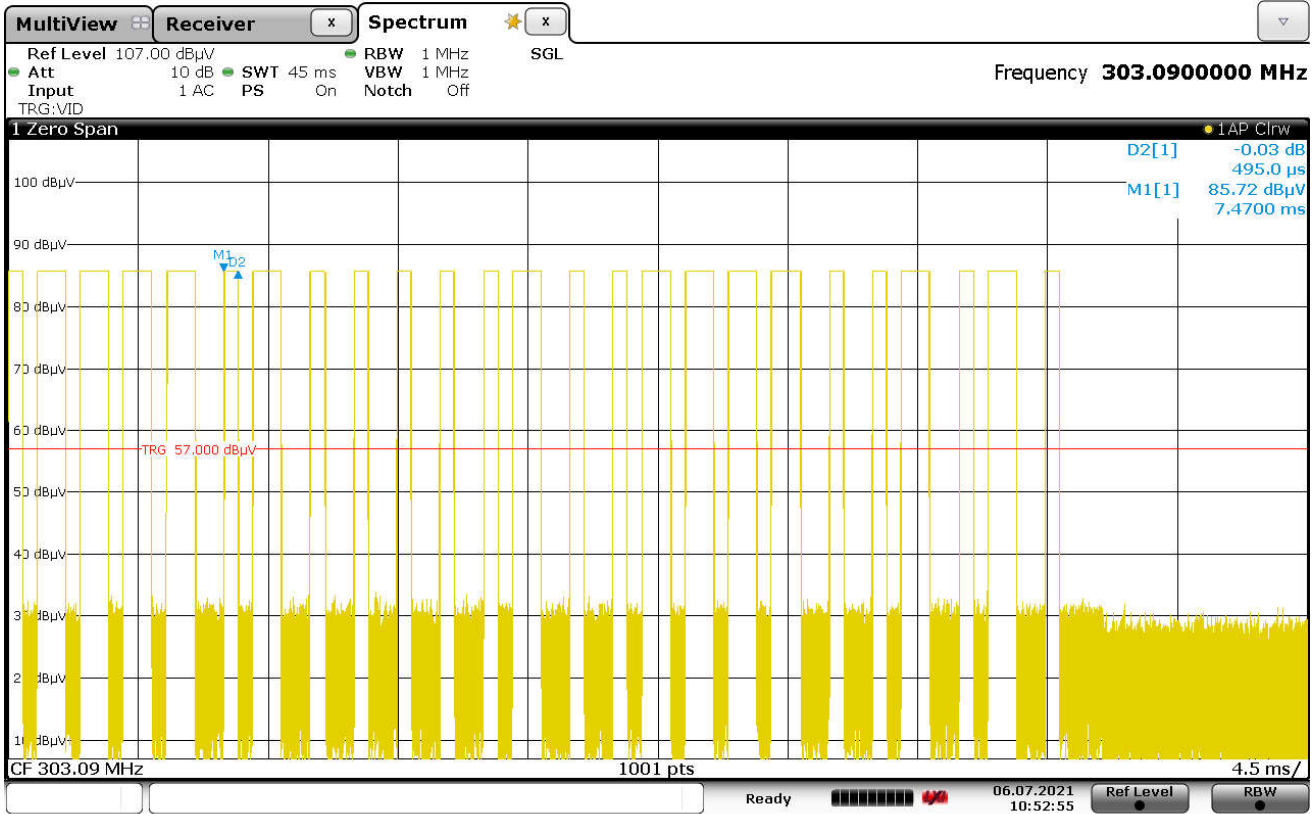


Date: 6 JUL 2021 10:52:55

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	10
Mode	Tx On
Carrier Frequency	303 MHz, Xtreme Garage Code
Parameters	Wide Pulses = 990usec
Notes	None

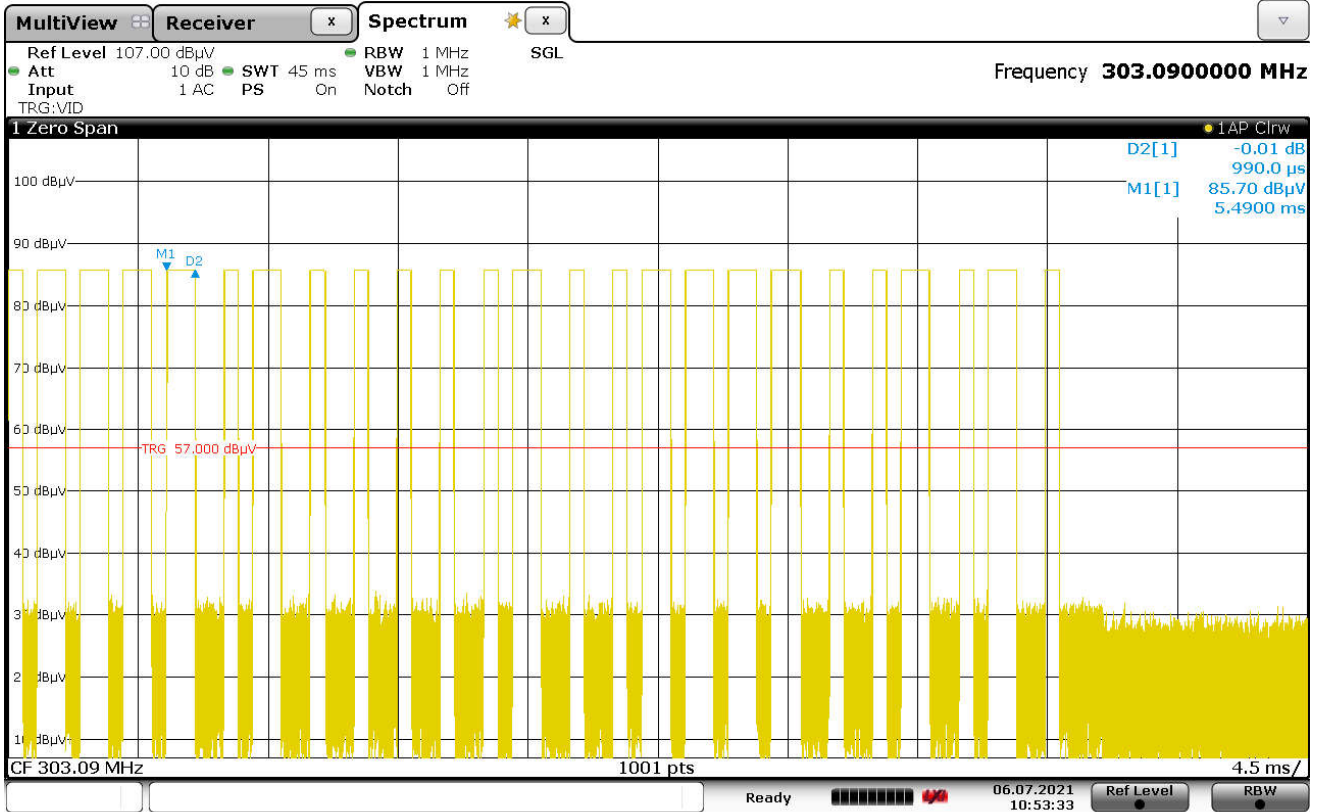

Date: 6 JUL 2021 10:53:33

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	10
Mode	Tx On
Carrier Frequency	303 MHz, Xtreme Garage Code
Parameters	Word Length = 54.1 ms
Notes	None

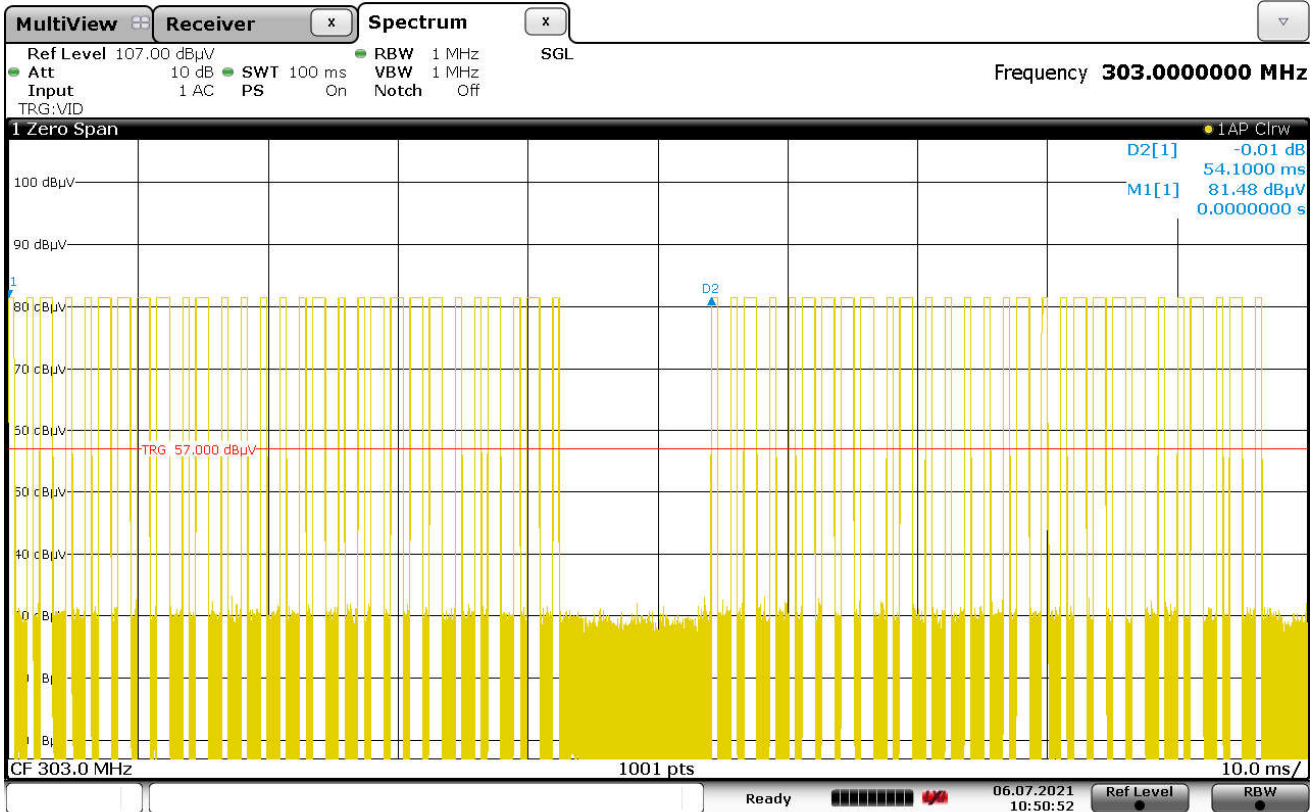


Date: 6 JUL 2021 10:50:52

Number of wide pulses in a word = 12

Number of narrow pulses in a word = 13


$$\text{Duty Cycle Factor} = 20 \log \left( \frac{\text{On - Time}}{\text{Word Length}} \right) = 20 * \log \left( \frac{12 * 0.99 + 13 * 0.495}{54.1} \right) = -9.41 \text{ dB}$$

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	11
Mode	Tx On
Carrier Frequency	310 MHz, Sommer Code
Parameters	Narrow Pulse = 100usec
Notes	None

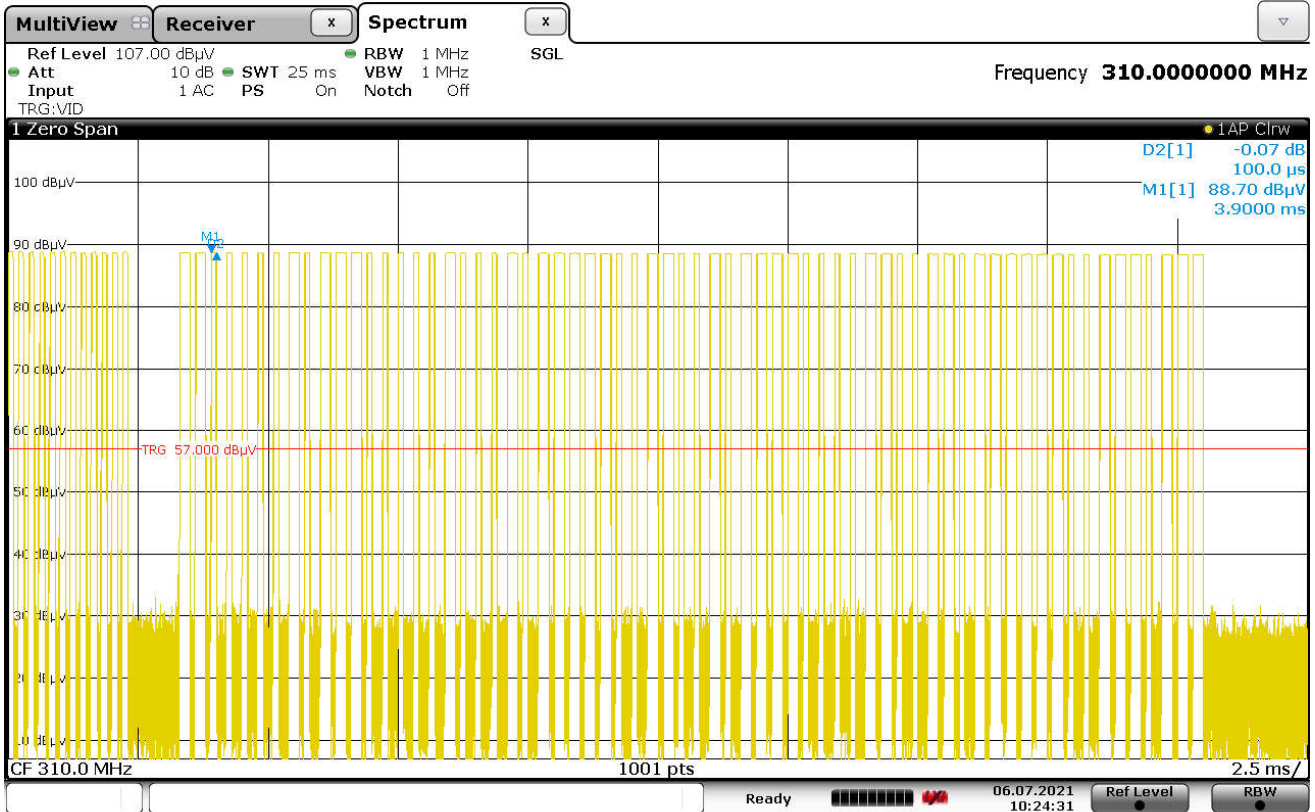


Date: 6 JUL 2021 10:24:31

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	11
Mode	Tx On
Carrier Frequency	310 MHz, Sommer Code
Parameters	Wide Pulse = 200usec
Notes	None

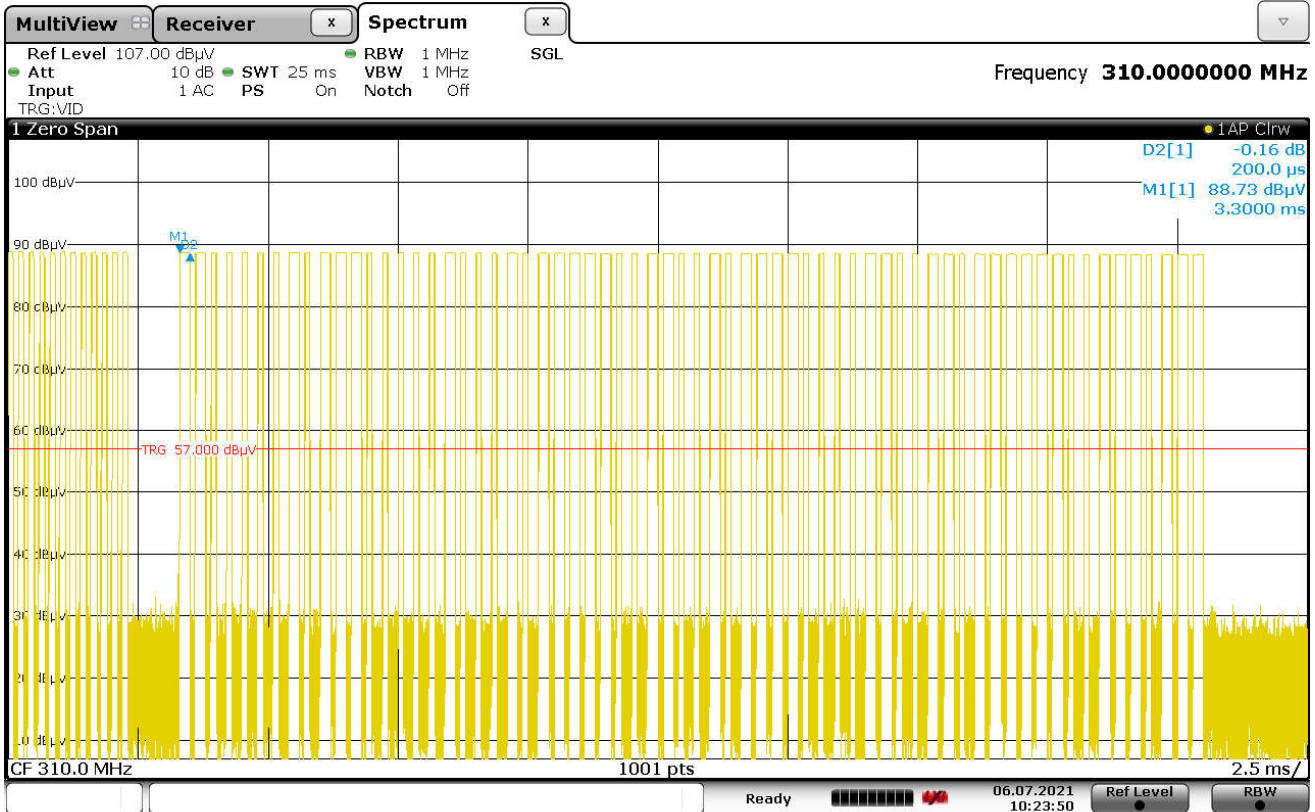

Date: 6 JUL 2021 10:23:51

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	11
Mode	Tx On
Carrier Frequency	310 MHz, Sommer Code
Parameters	Duty Cycle Correction Factor
Notes	None

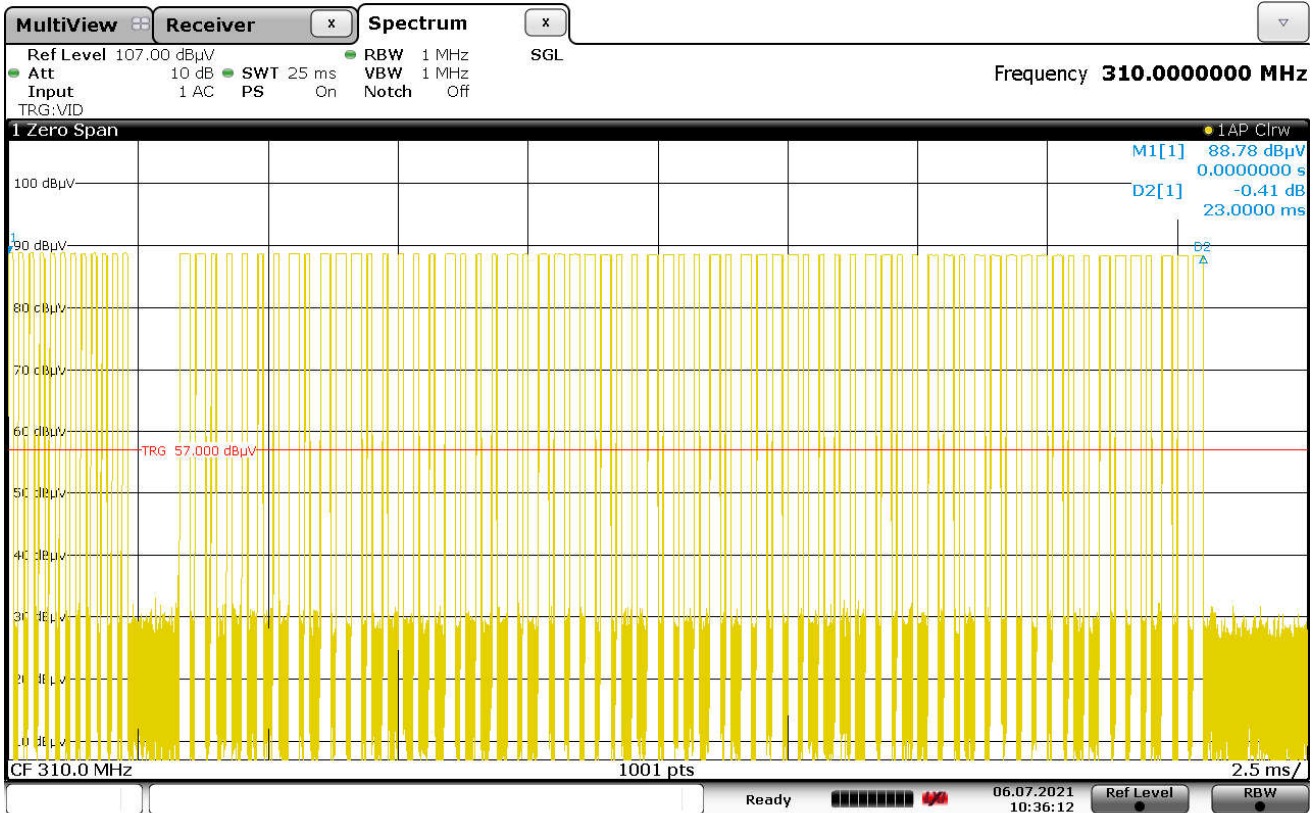


Date: 6 JUL 2021 10:36:12

42 short pulses

36 long pulses

$$\text{Duty Cycle Factor} = 20 \log \left( \frac{\text{On - Time}}{\text{Word Length (100msec)}} \right) = 20 * \log \left( \frac{42 * .1 + 36 * .2}{100} \right) = -18.86 \text{ dB}$$


Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	12
Mode	Tx On
Carrier Frequency	372.5 MHz, Ryobi Code
Parameters	Narrow Pulse = 192.8usec
Notes	None

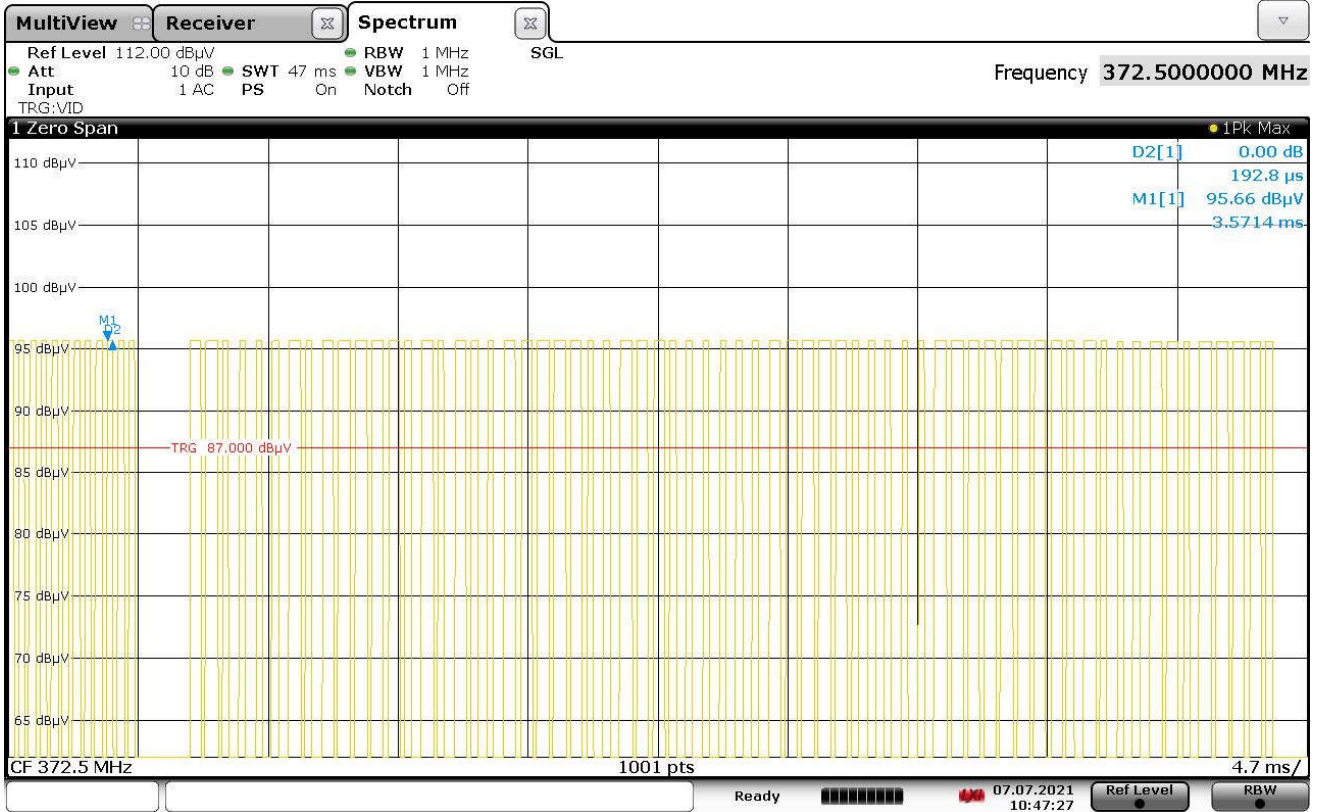

10:47:28 07.07.2021




Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	12
Mode	Tx On
Carrier Frequency	372.5 MHz, Ryobi Code
Parameters	Wide Pulse = 396usec
Notes	None

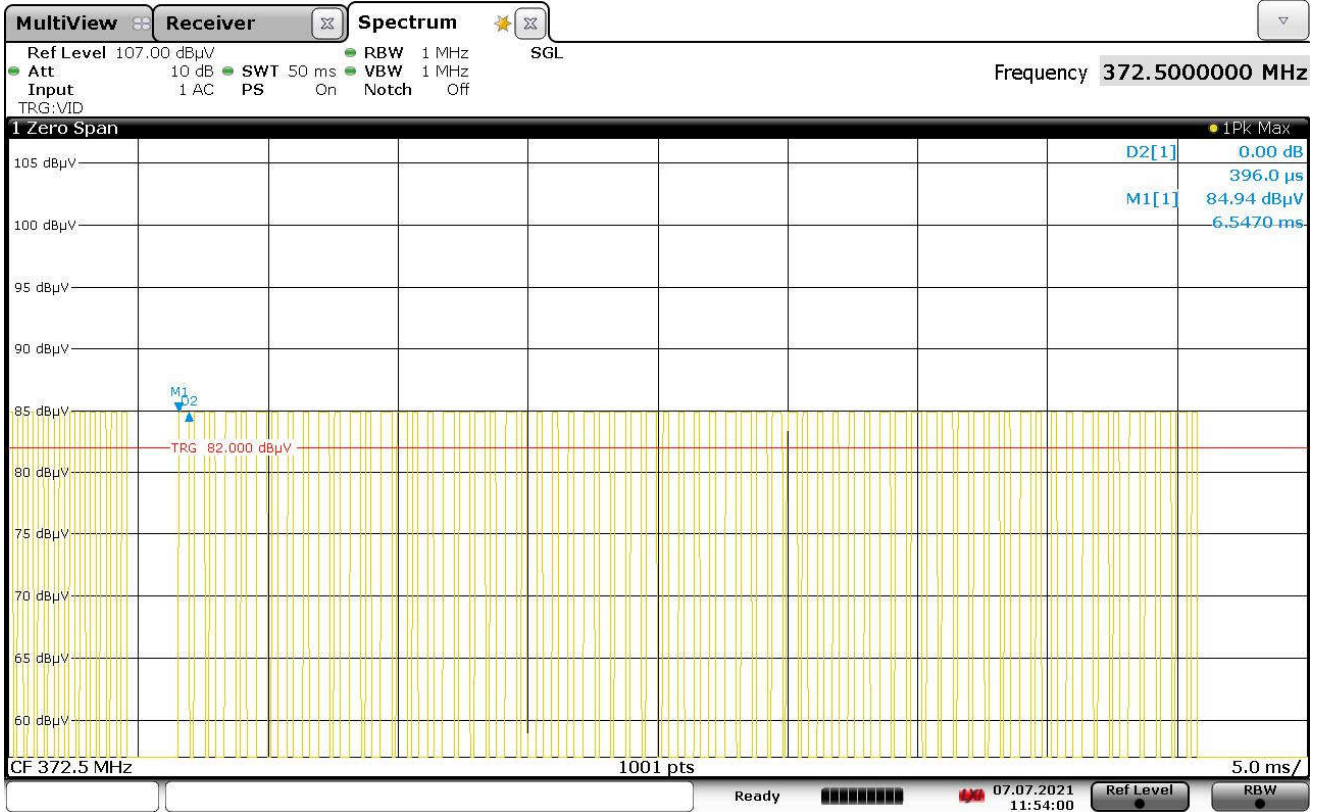

11:54:01 07.07.2021

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	12
Mode	Tx On
Carrier Frequency	372.5 MHz, Ryobi Code
Parameters	Duty Cycle Correction Factor
Notes	None

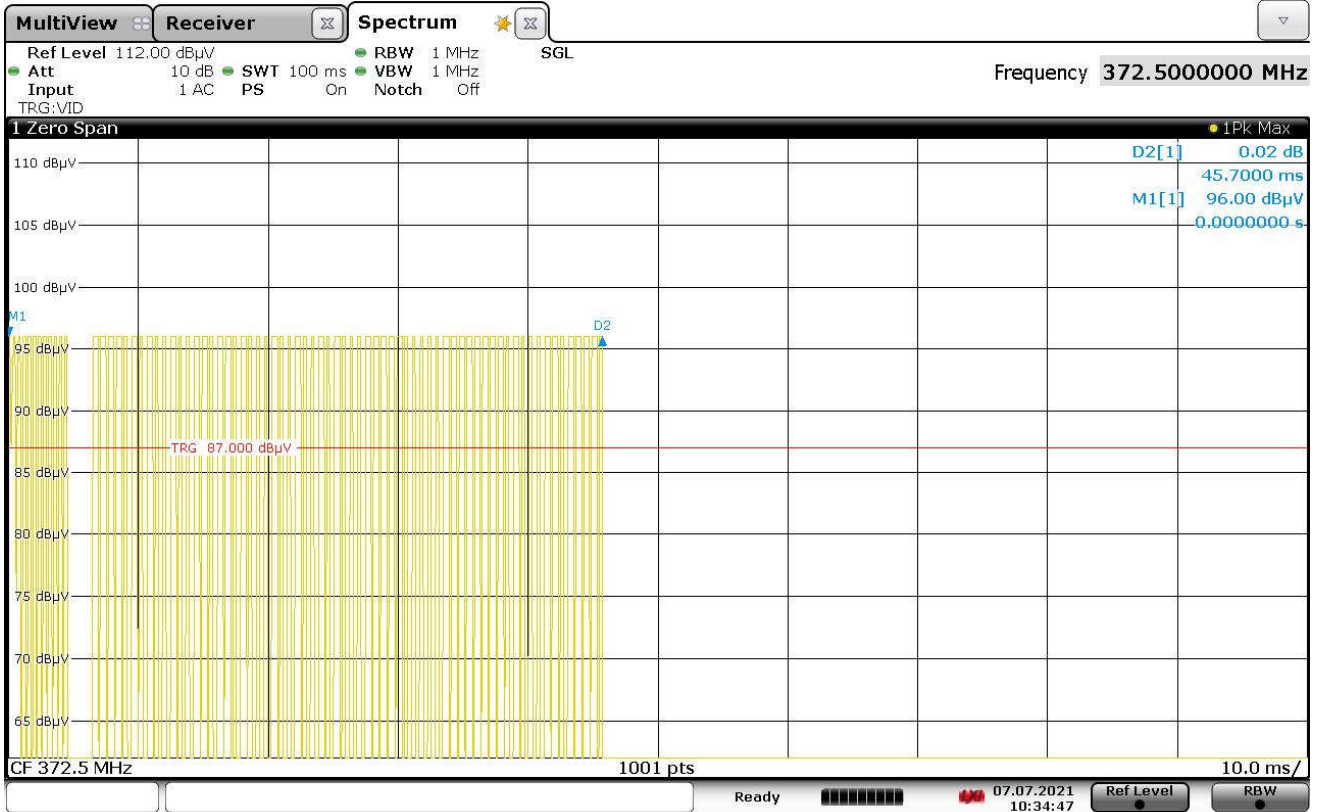

10:34:48 07.07.2021

$$\text{Duty Cycle Factor} = 20 \log \left( \frac{\text{On - Time}}{\text{Word Length (100msec)}} \right) = 20 * \log \left( \frac{39 * 0.1928 + 38 * 0.396}{100} \right) = -12.93 \text{ dB}$$

## 22. Spurious Radiated Emissions

Test Information	
Manufacturer	Chamberlain
Product	Universal Wireless Keypad
Model	KLIK2U-P2
Mode	Tx On
Test Date	07/08/2021

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	Semi-Anechoic Chamber
Test site used	Room 29
Notes	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Requirements		
The EUT must comply with the requirements of FCC "Code of Federal Regulations Title 47", Part 15, Subpart C, Section 15.205 et seq. as well as the requirements of the RSS-GEN specification Section 8.10.		
Carrier Frequency (MHz)	Field Strength of Carrier ( $\mu\text{V}/\text{m}$ )	Field Strength of Spurious Emissions ( $\mu\text{V}/\text{m}$ )
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750*	125 to 375*
174-260	3750	375
260-470	3750 to 12500*	375 to 1250*
Above 470	12500	1250

\*Linear interpolations

### Procedures

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2014 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

A preliminary radiated emissions test was performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the EUT. The entire frequency range from 30MHz to 4GHz was investigated using a peak detector function. The data was then processed by the computer to calculate equivalent field intensity.

The final emission tests were then manually performed over the frequency range of 30MHz to 4GHz. Between 30MHz and 1000MHz, a bi-log antenna was used as the pick-up device. The EUT was placed on an 80cm high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.


Above 1GHz, a broadband double ridged waveguide antenna was used as the pick-up device. The EUT was placed on an 150cm high non-conductive stand. A peak detector with a resolution bandwidth of 1 MHz was used on the spectrum analyzer.

The peak detected levels were converted to average levels using a duty cycle factor which was computed from the pulse train.

To ensure that maximum or worst case, emission levels were measured, the following steps were taken:

- 1) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
- 2) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
- 3) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
- 4) For hand-held or body-worn devices, the EUT was rotated through three orthogonal axes to determine which orientation produces the highest emission relative to the limit.


In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer and the antenna cannot be raised to 4 meters. The measuring antenna is raised or lowered as much as the cable will allow and the EUT is rotated through all axis to ensure the maximum readings are recorded.

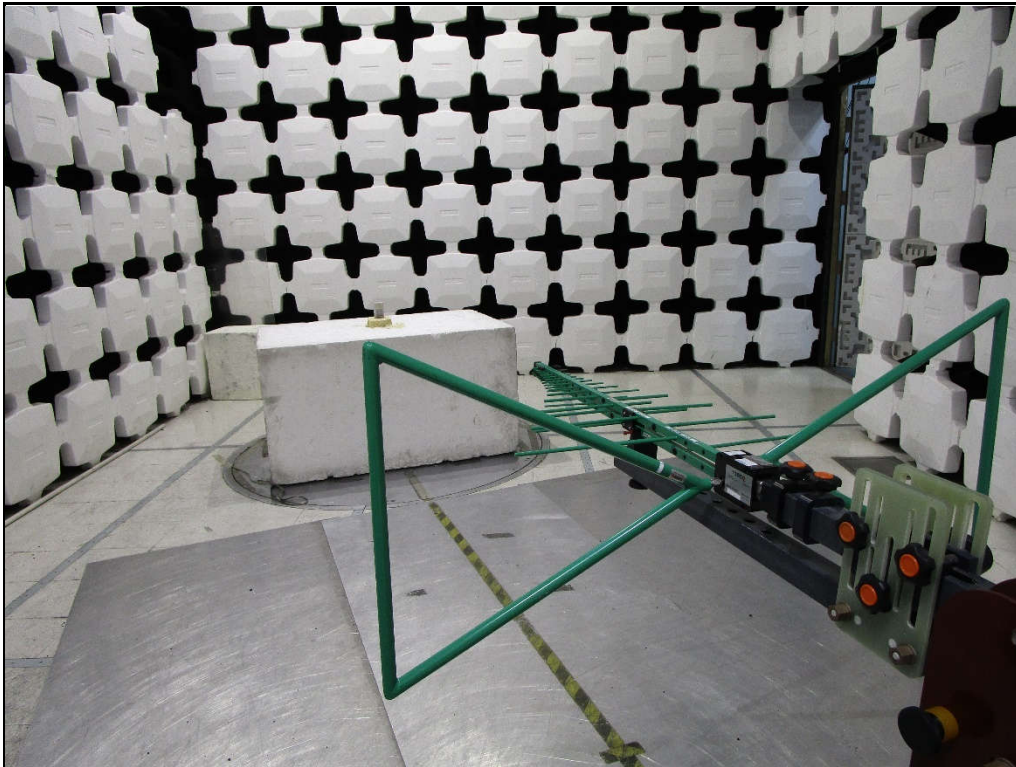


Test Setup for Spurious Radiated Emissions, 30-1000MHz – Antenna Polarization Horizontal




Test Setup for Spurious Radiated Emissions, 30-1000MHz – Antenna Polarization Vertical

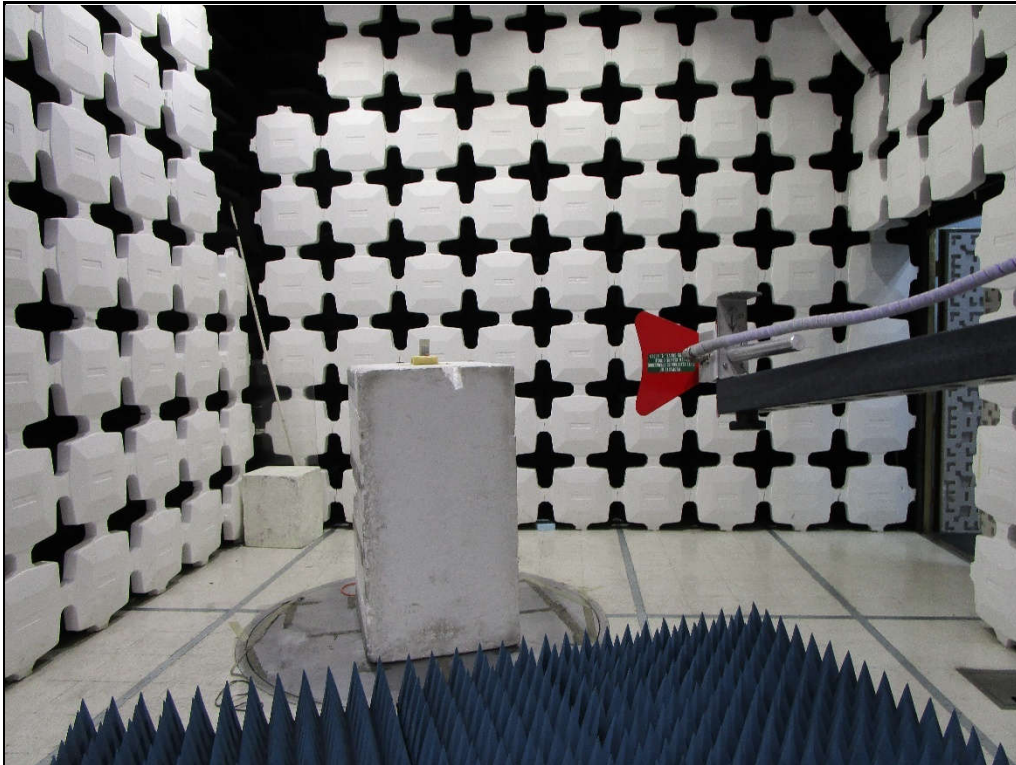


Test Setup for Spurious Radiated Emissions, Above 1GHz – Antenna Polarization Horizontal

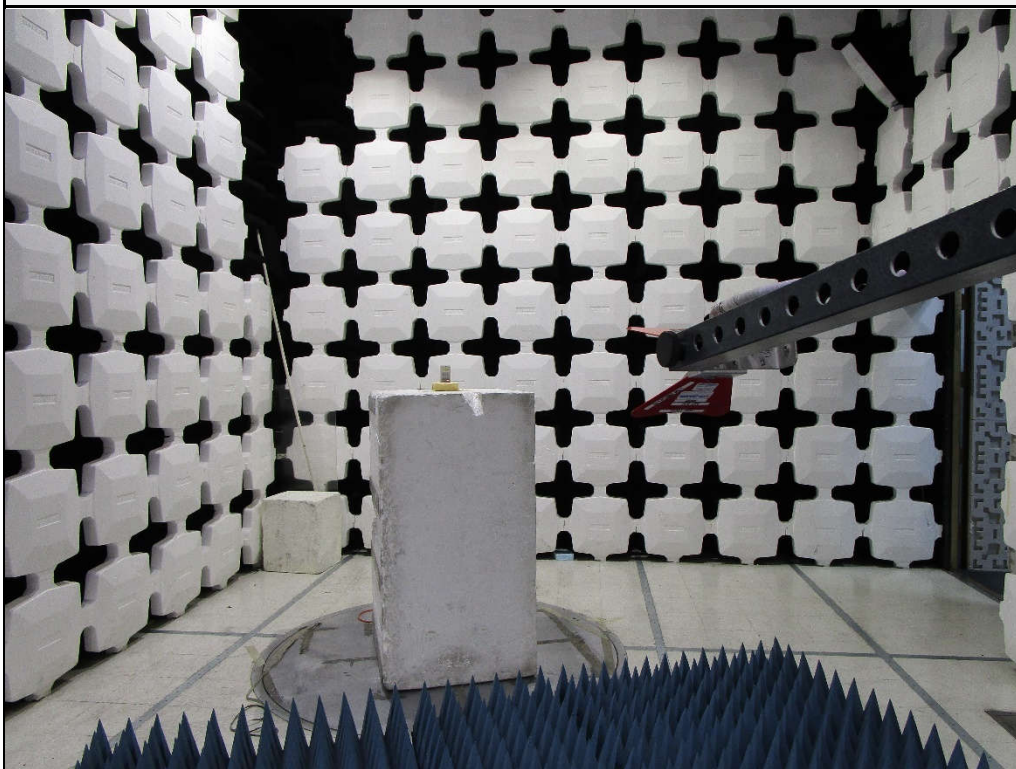



Test Setup for Spurious Radiated Emissions, Above 1GHz – Antenna Polarization Vertical

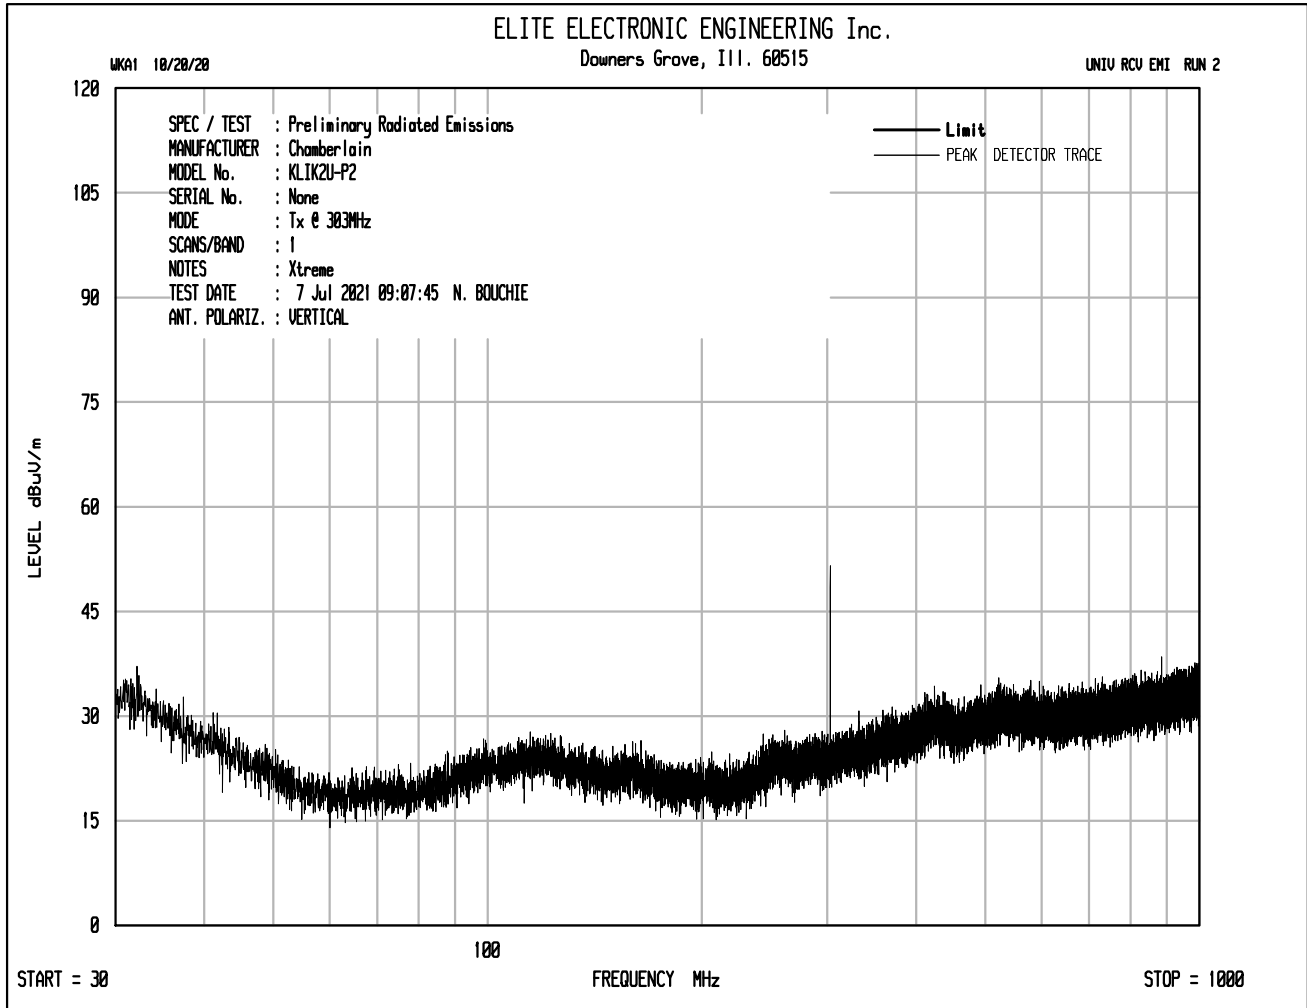

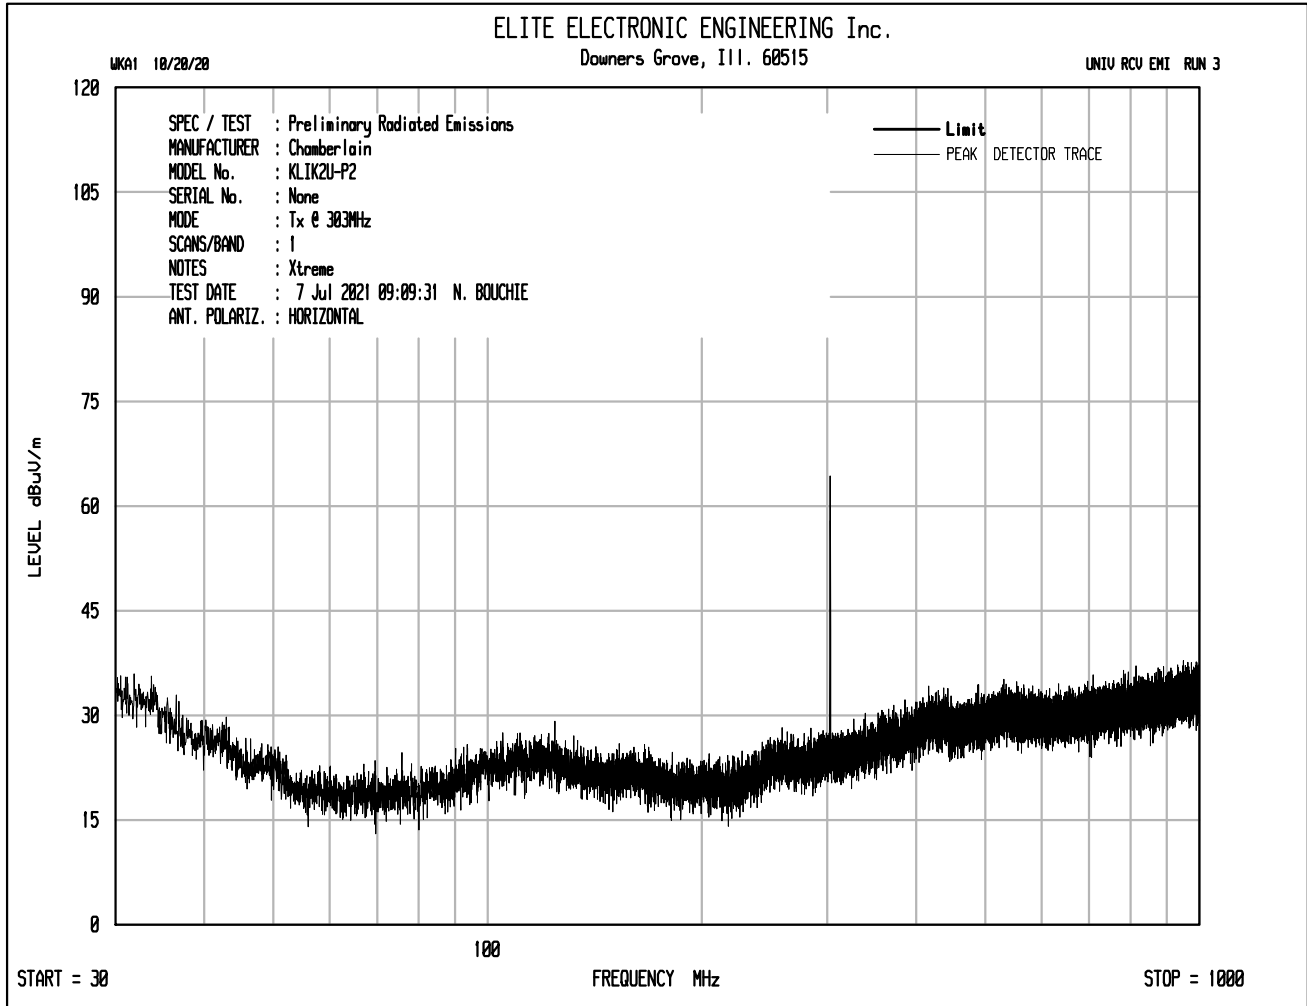




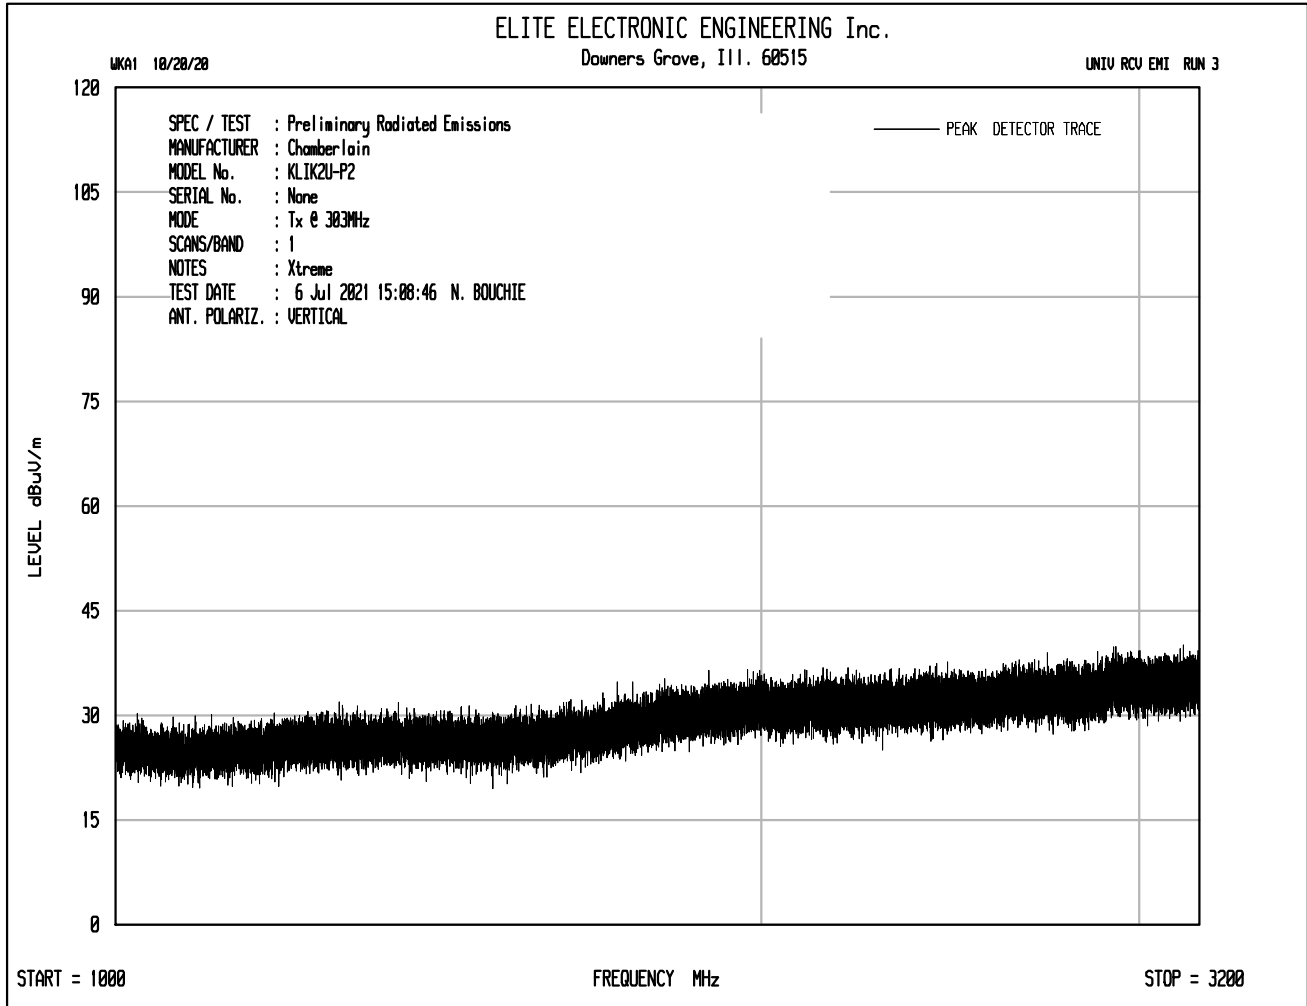


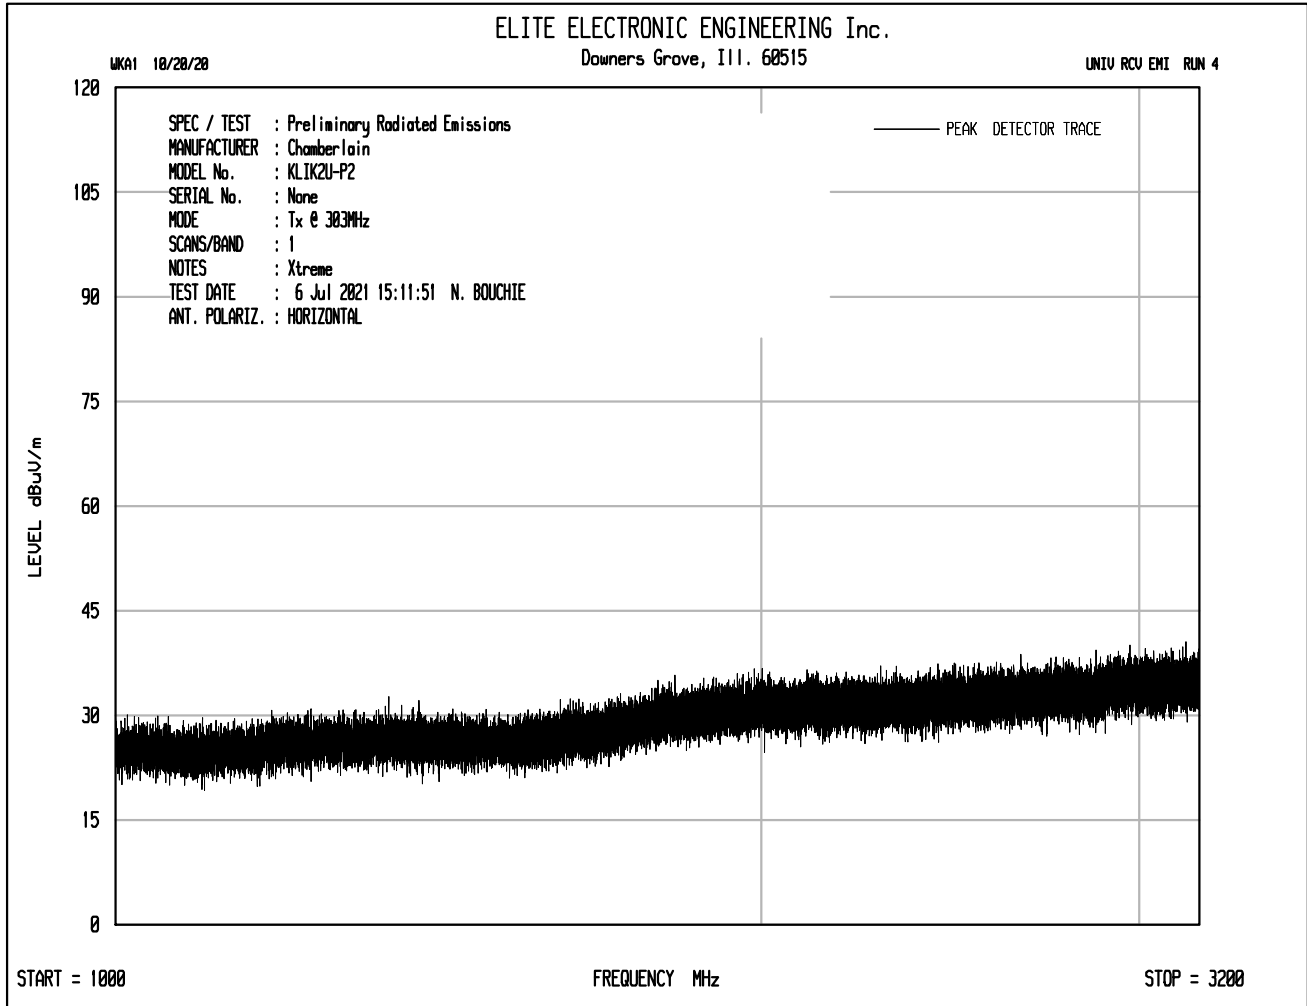



Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	10
Mode	Tx On
Carrier Frequency	303 MHz, Xtreme Garage
Requirements	Field Strength of Carrier Limit = 5541.7 $\mu$ V/m
Notes	None

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)	Total (dBuV/m)	Total (uV/m)	Limit (uV/m)	Margin (dB)
303.000	H	51.0		0.9	19.2	0.0	-9.4	61.6	1206.9	5541.7	-13.2
303.000	V	52.9		0.9	19.2	0.0	-9.4	63.6	1516.0	5541.7	-11.3
606.000	H	10.8	*	1.3	24.8	0.0	-9.4	27.4	23.5	554.2	-27.5
606.000	V	10.1	*	1.3	24.8	0.0	-9.4	26.8	21.8	554.2	-28.1
909.000	H	12.0		1.6	26.4	0.0	-9.4	30.6	33.7	554.2	-24.3
909.000	V	15.1		1.6	26.4	0.0	-9.4	33.6	48.0	554.2	-21.2
1212.000	H	14.9	*	1.8	29.6	0.0	-9.4	36.9	70.3	500.0	-17.0
1212.000	V	15.0	*	1.8	29.6	0.0	-9.4	37.0	70.6	500.0	-17.0
1515.000	H	15.6	*	2.0	29.2	0.0	-9.4	37.4	74.0	500.0	-16.6
1515.000	V	14.9	*	2.0	29.2	0.0	-9.4	36.7	68.6	500.0	-17.3
1818.000	H	17.1	*	2.2	31.6	0.0	-9.4	41.6	119.6	554.2	-13.3
1818.000	V	16.4	*	2.2	31.6	0.0	-9.4	40.8	109.5	554.2	-14.1
2121.000	H	16.1	*	2.4	32.5	0.0	-9.4	41.6	120.9	554.2	-13.2
2121.000	V	16.5	*	2.4	32.5	0.0	-9.4	42.0	126.1	554.2	-12.9
2424.000	H	15.9	*	2.6	32.8	0.0	-9.4	41.9	124.1	554.2	-13.0
2424.000	V	16.6	*	2.6	32.8	0.0	-9.4	42.6	135.5	554.2	-12.2
2727.000	H	16.6	*	2.8	33.3	0.0	-9.4	43.3	146.4	500.0	-10.7
2727.000	V	17.2	*	2.8	33.3	0.0	-9.4	43.9	156.5	500.0	-10.1
3030.000	H	17.9	*	3.0	33.5	0.0	-9.4	44.9	176.4	554.2	-9.9
3030.000	V	17.5	*	3.0	33.5	0.0	-9.4	44.5	168.6	554.2	-10.3

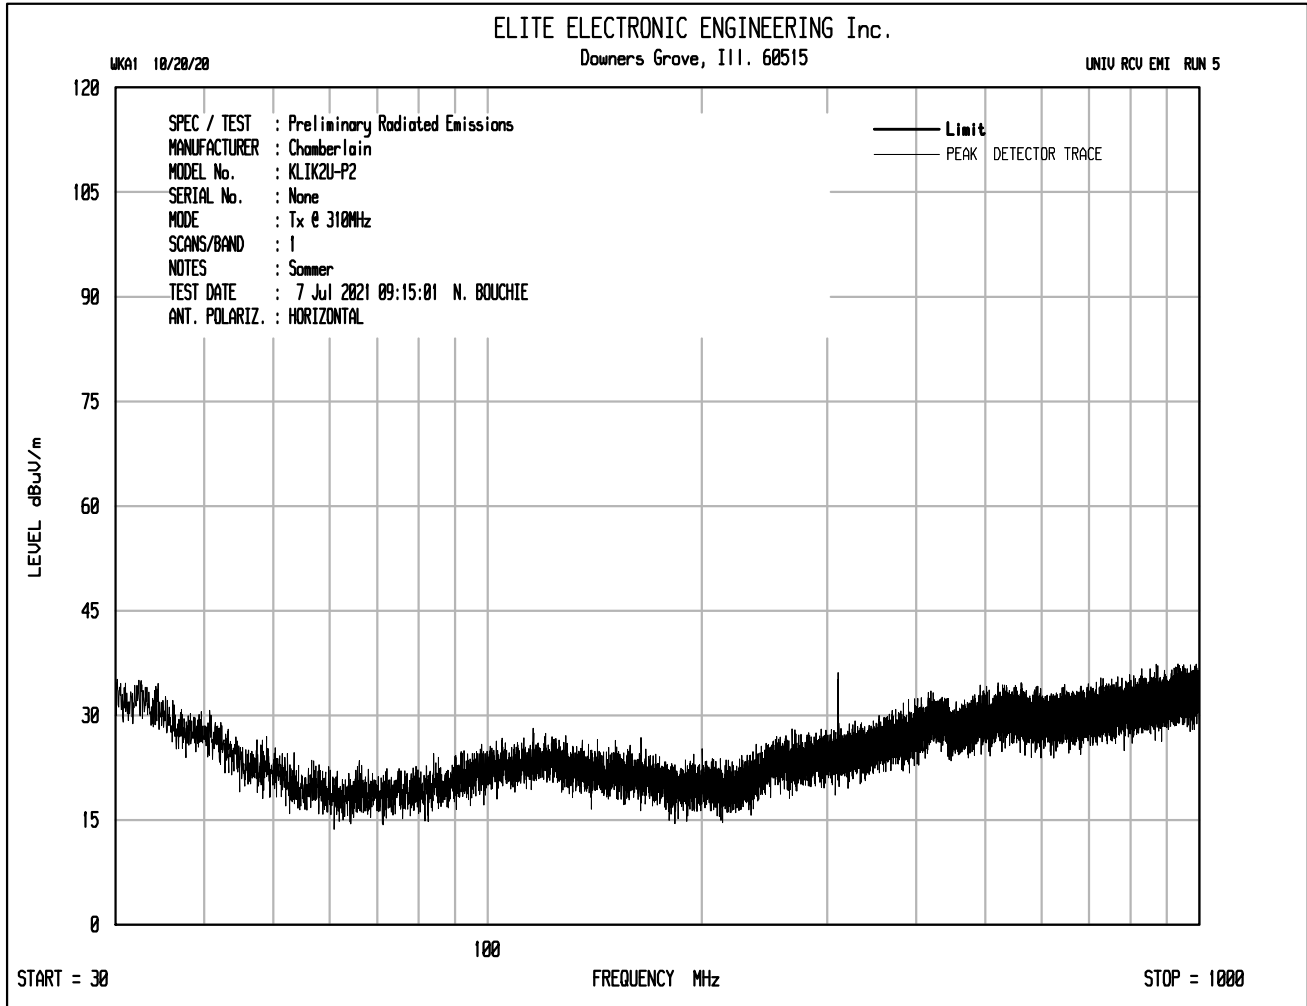

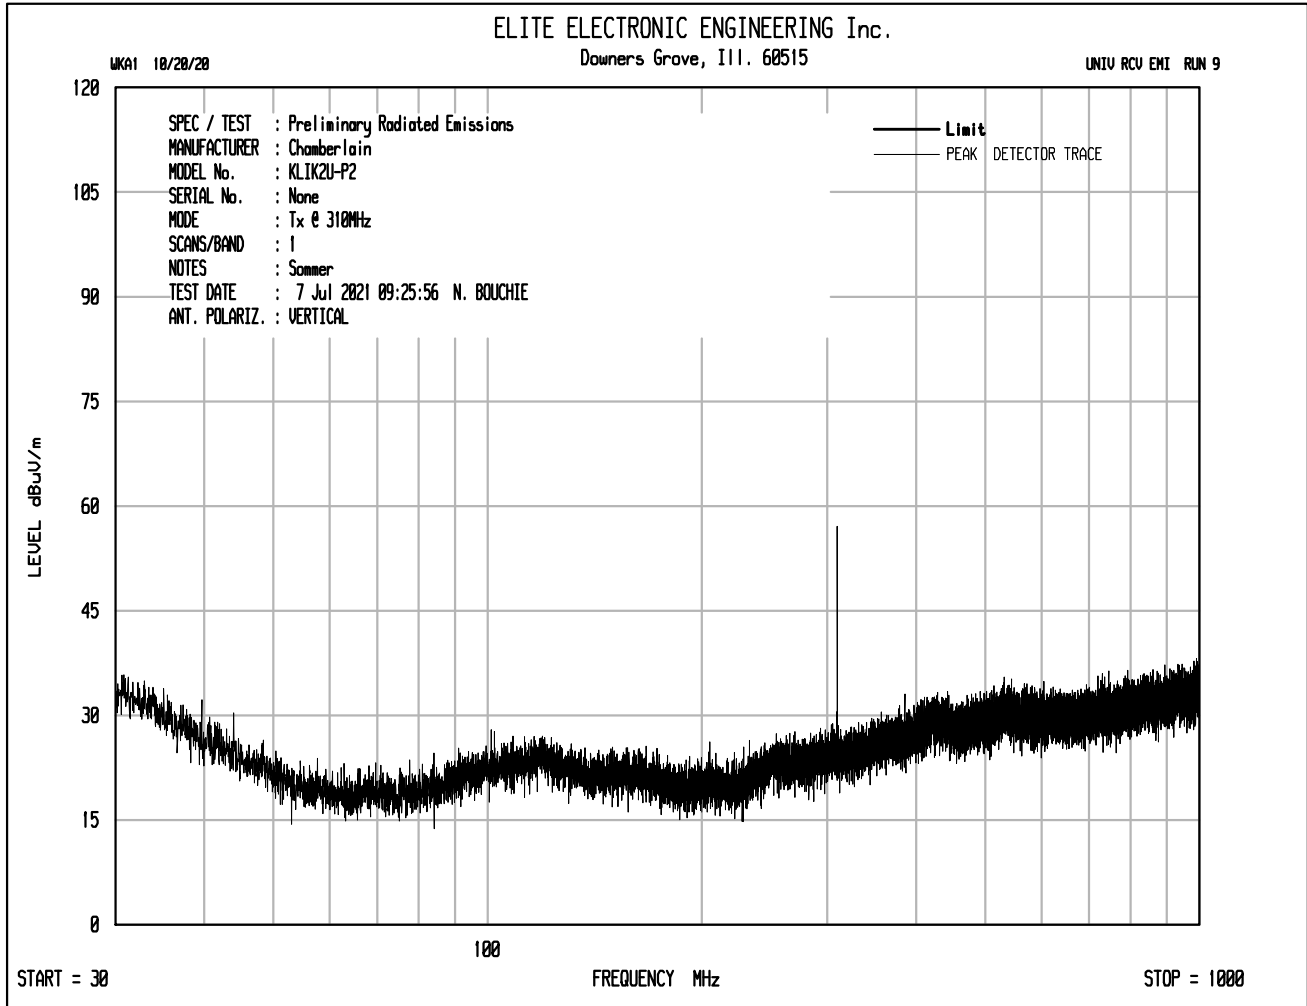

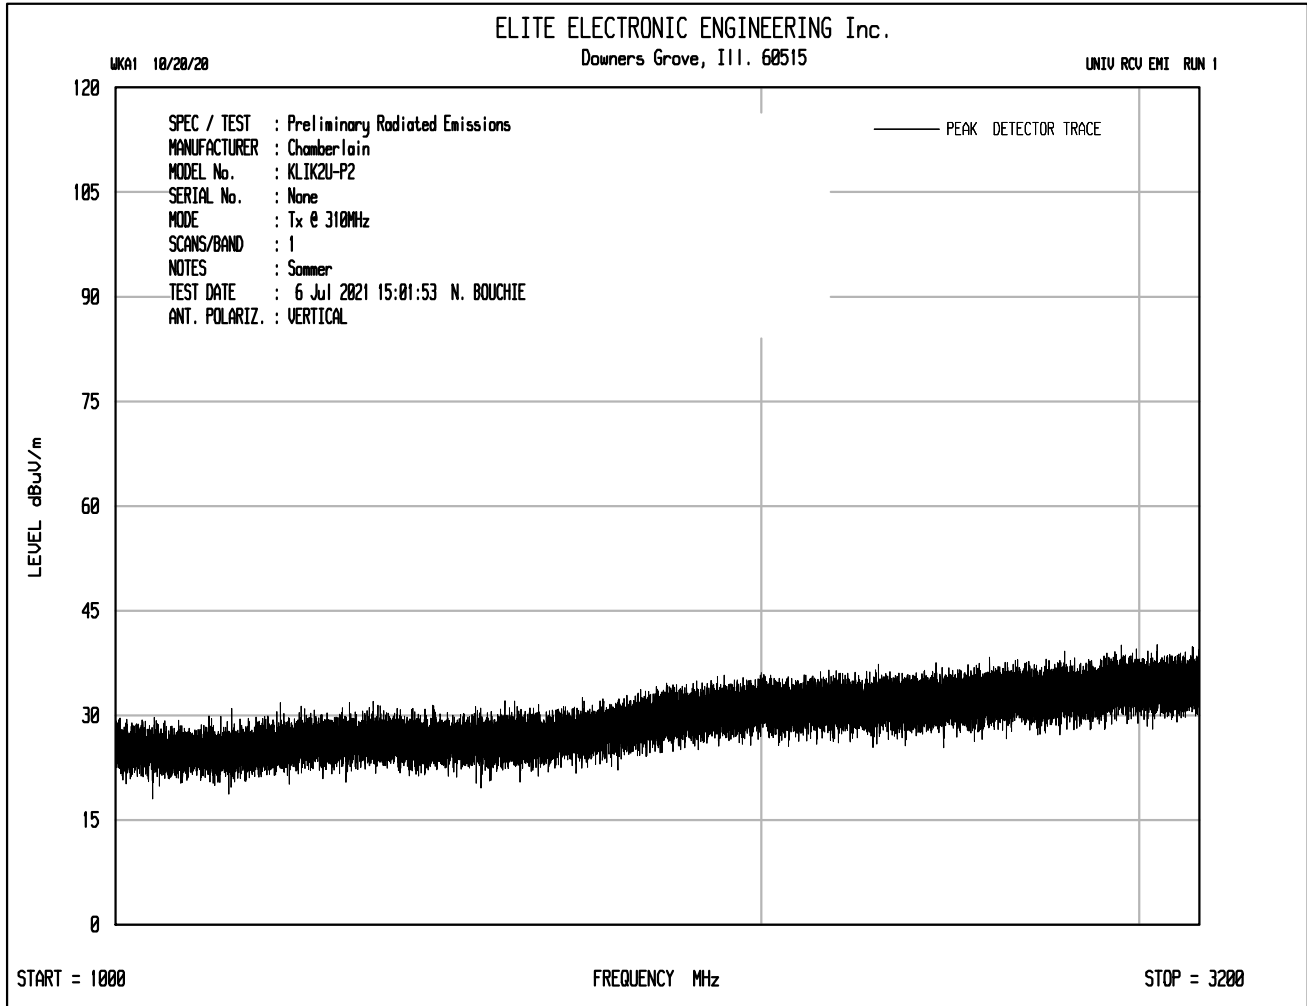


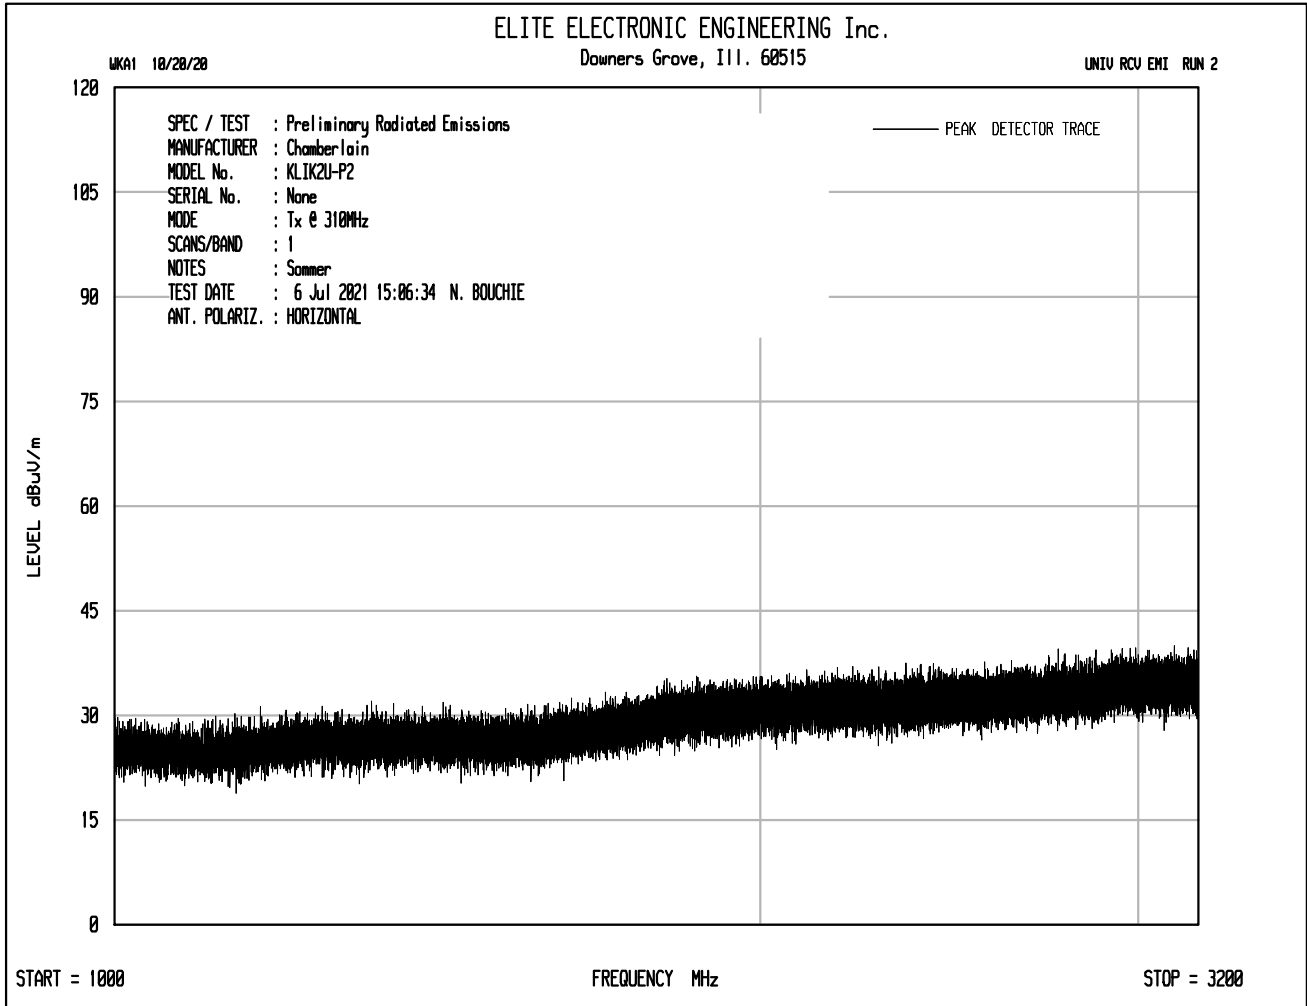



Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	11
Mode	Tx On
Carrier Frequency	310 MHz, Sommer Code
Requirements	Field Strength of Carrier Limit = 5833.3 $\mu\text{V/m}$
Notes	None


Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)	Total (dBuV/m)	Total ( $\mu\text{V/m}$ )	Limit ( $\mu\text{V/m}$ )	Margin (dB)
310.000	H	56.9		0.9	19.3	0.0	-18.9	58.3	819.0	5833.3	-17.1
310.000	V	59.7		0.9	19.3	0.0	-18.9	61.1	1138.4	5833.3	-14.2
620.000	H	11.0	*	1.3	24.9	0.0	-18.9	18.3	8.2	583.3	-37.0
620.000	V	11.9		1.3	24.9	0.0	-18.9	19.2	9.1	583.3	-36.1
930.000	H	17.0		1.6	26.9	0.0	-18.9	26.6	21.4	583.3	-28.7
930.000	V	17.6		1.6	26.9	0.0	-18.9	27.1	22.7	583.3	-28.2
1240.000	H	21.5	*	1.8	29.8	0.0	-18.9	34.3	51.7	500.0	-19.7
1240.000	V	21.8	*	1.8	29.8	0.0	-18.9	34.5	53.3	500.0	-19.4
1550.000	H	22.0	*	2.1	29.0	0.0	-18.9	34.2	51.1	500.0	-19.8
1550.000	V	22.1	*	2.1	29.0	0.0	-18.9	34.3	51.7	500.0	-19.7
1860.000	H	22.5	*	2.3	32.0	0.0	-18.9	37.9	78.5	583.3	-17.4
1860.000	V	22.0	*	2.3	32.0	0.0	-18.9	37.4	74.0	583.3	-17.9
2170.000	H	22.5	*	2.5	32.6	0.0	-18.9	38.7	85.9	583.3	-16.6
2170.000	V	22.2	*	2.5	32.6	0.0	-18.9	38.4	83.1	583.3	-16.9
2480.000	H	22.3	*	2.7	33.1	0.0	-18.9	39.2	91.0	583.3	-16.1
2480.000	V	22.4	*	2.7	33.1	0.0	-18.9	39.3	92.2	583.3	-16.0
2790.000	H	23.1	*	2.8	32.9	0.0	-18.9	39.9	98.8	500.0	-14.1
2790.000	V	23.3	*	2.8	32.9	0.0	-18.9	40.1	101.5	500.0	-13.9
3100.000	H	23.5	*	3.0	33.5	0.0	-18.9	41.1	114.1	583.3	-14.2
3100.000	V	24.1	*	3.0	33.5	0.0	-18.9	41.8	122.6	583.3	-13.5



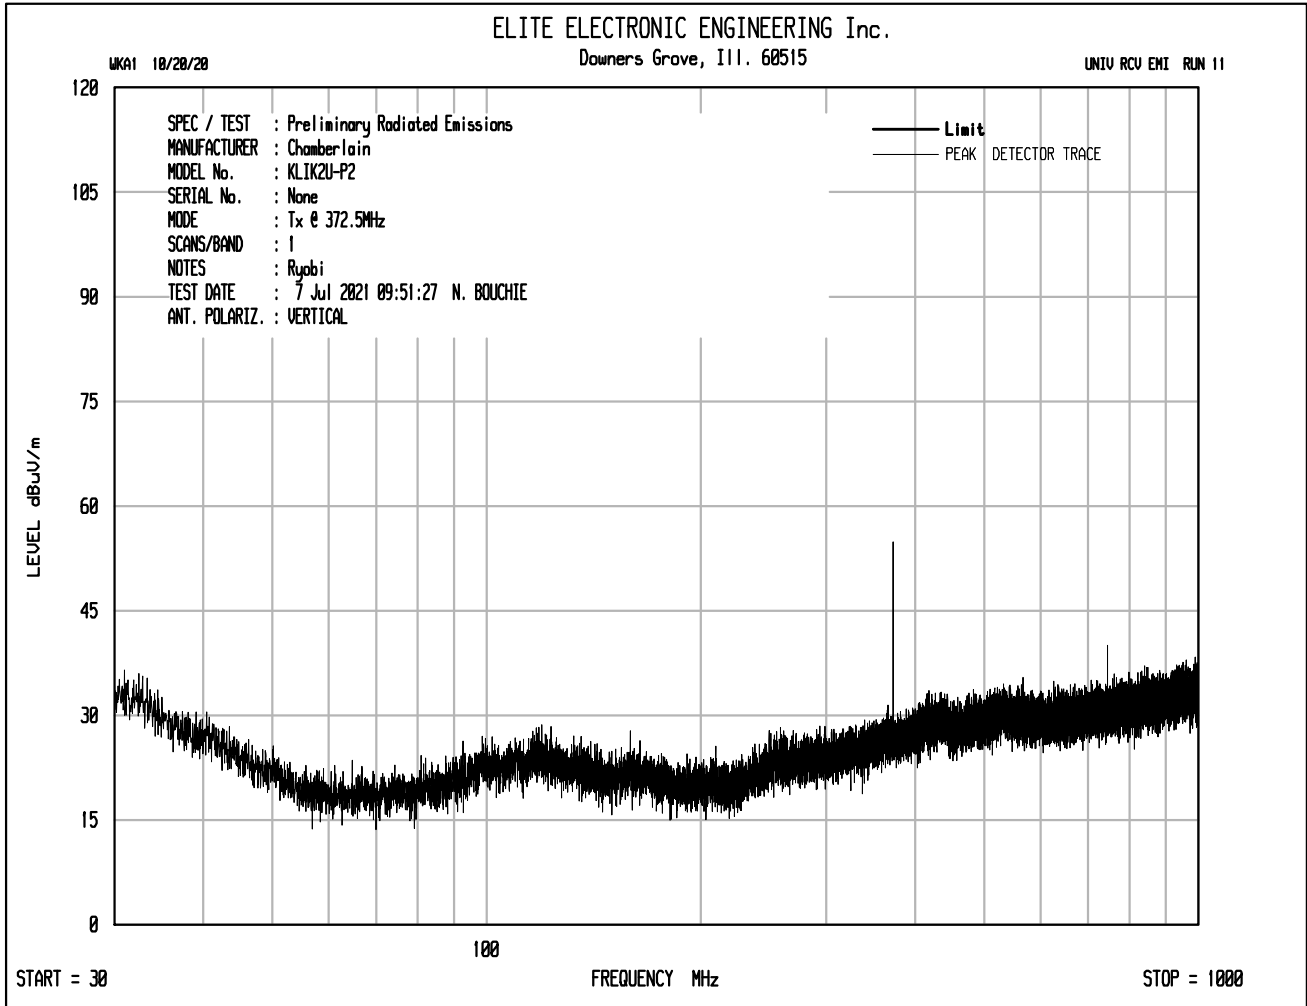

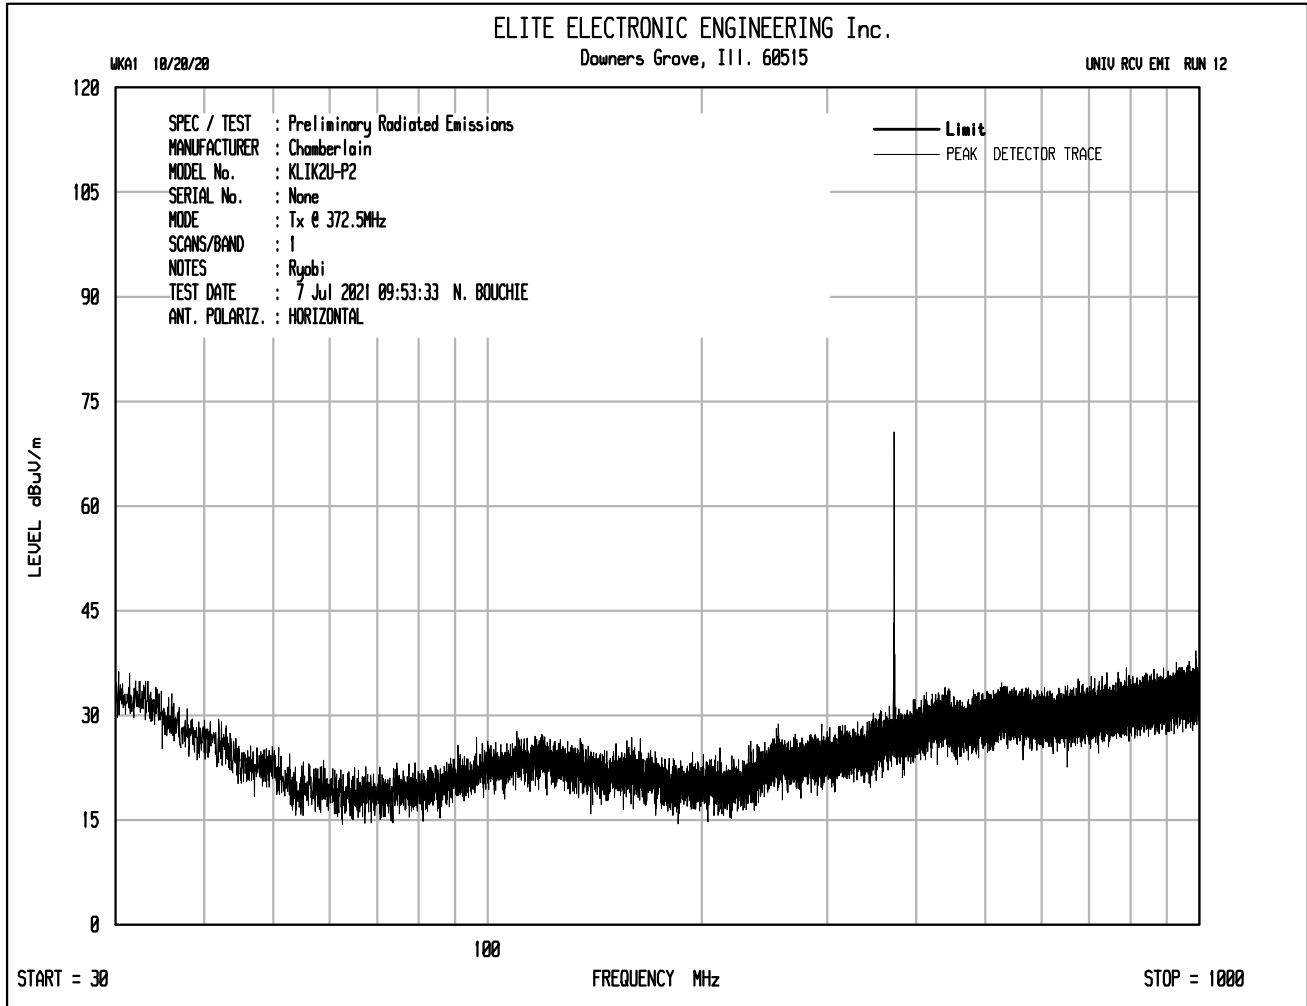

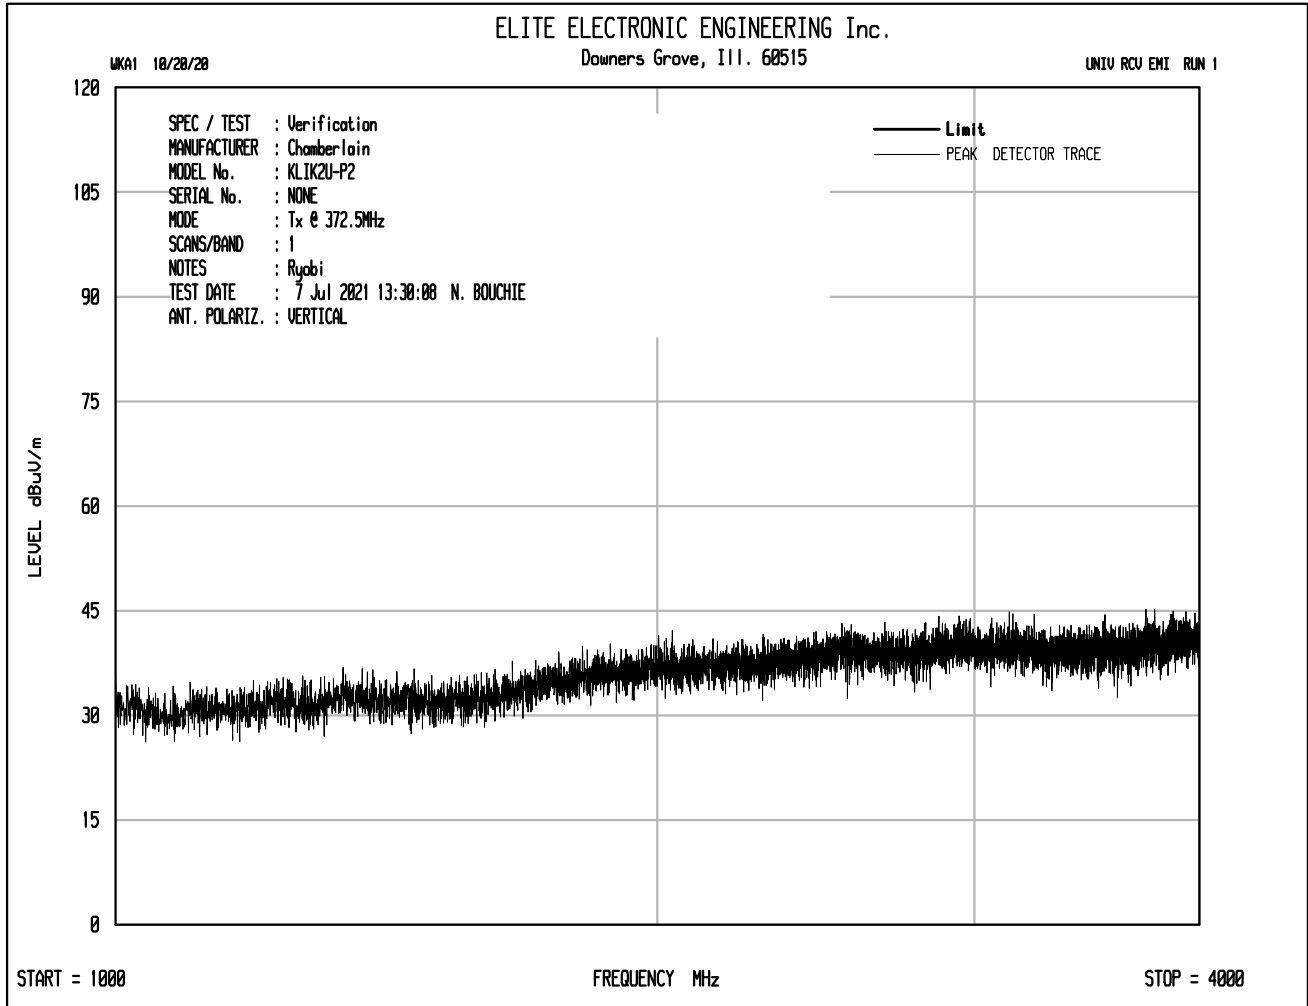

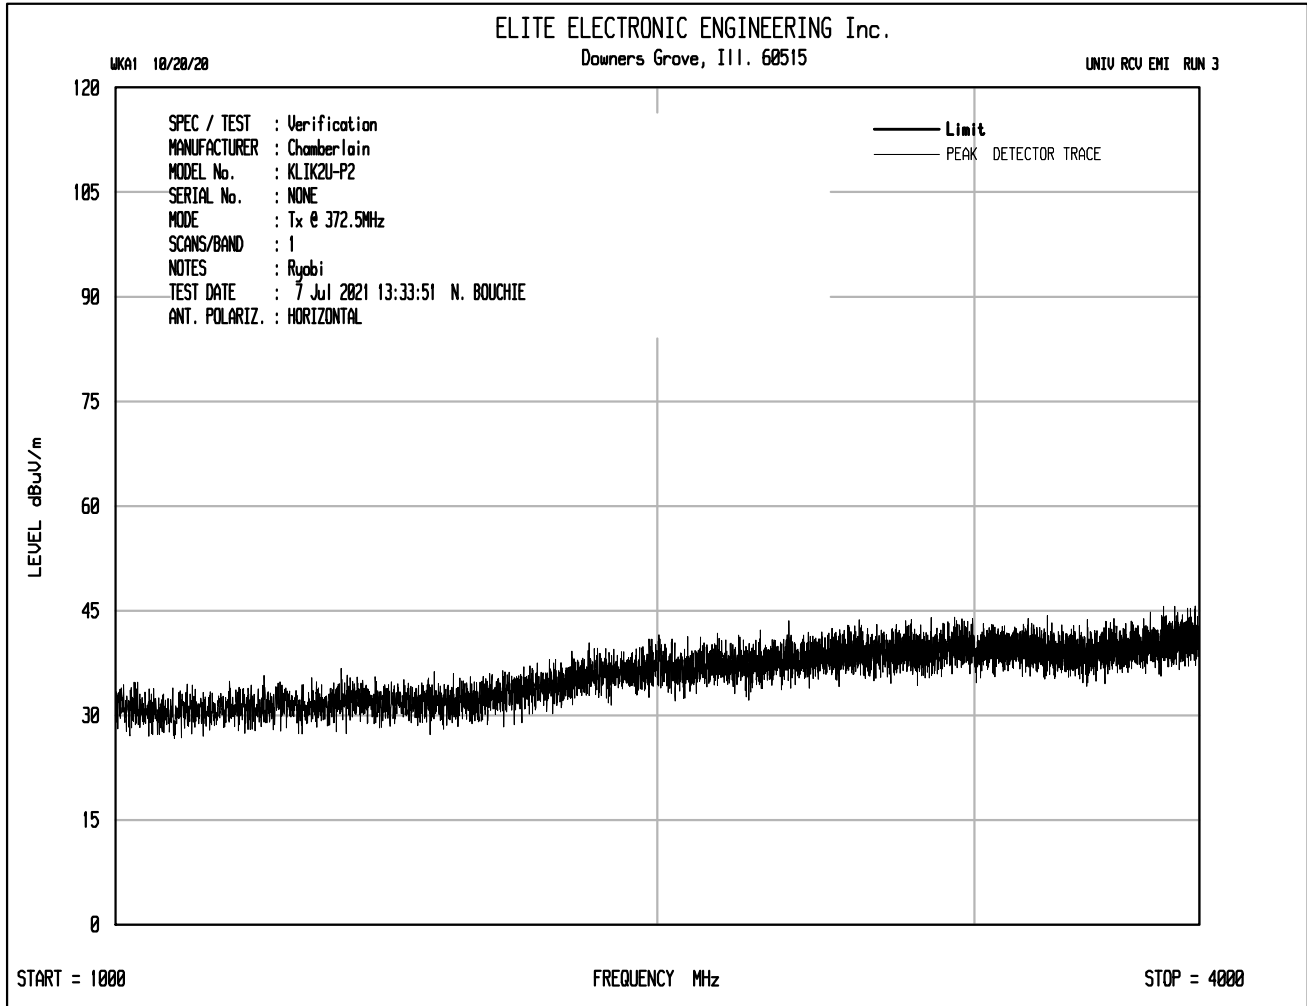

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	12
Mode	Tx On
Carrier Frequency	372.5 MHz
Requirements	Field Strength of Carrier Limit = 8437.5 $\mu$ V/m
Notes	None

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)	Total (dBuV/m)	Total (uV/m)	Limit (uV/m)	Margin (dB)
372.500	H	61.3		1.0	20.8	0.0	-12.9	70.1	3217.2	8437.5	-8.4
372.500	V	64.7		1.0	20.8	0.0	-12.9	73.6	4786.1	8437.5	-4.9
745.000	H	18.5	*	1.4	25.8	0.0	-12.9	32.8	43.9	843.7	-25.7
745.000	V	22.3		1.4	25.8	0.0	-12.9	36.6	67.5	843.7	-21.9
1117.500	H	26.8		1.7	28.7	0.0	-12.9	44.3	164.4	500.0	-9.7
1117.500	V	28.6		1.7	28.7	0.0	-12.9	46.1	202.3	500.0	-7.9
1490.000	H	20.4	*	2.0	29.3	0.0	-12.9	38.7	86.2	500.0	-15.3
1490.000	V	21.3	*	2.0	29.3	0.0	-12.9	39.6	95.7	500.0	-14.4
1862.500	H	21.2	*	2.3	32.1	0.0	-12.9	42.6	135.1	843.7	-15.9
1862.500	V	21.0	*	2.3	32.1	0.0	-12.9	42.4	131.4	843.7	-16.2
2235.000	H	21.2	*	2.5	32.7	0.0	-12.9	43.5	149.9	500.0	-10.5
2235.000	V	21.3	*	2.5	32.7	0.0	-12.9	43.6	151.3	500.0	-10.4
2607.500	H	22.8	*	2.7	32.9	0.0	-12.9	45.5	188.2	843.7	-13.0
2607.500	V	22.6	*	2.7	32.9	0.0	-12.9	45.3	183.9	843.7	-13.2
2980.000	H	22.9	*	2.9	34.0	0.0	-12.9	46.9	220.2	843.7	-11.7
2980.000	V	23.3	*	2.9	34.0	0.0	-12.9	47.2	230.3	843.7	-11.3
3352.500	H	21.6	*	3.1	33.6	0.0	-12.9	45.4	186.7	500.0	-8.6
3352.500	V	22.1	*	3.1	33.6	0.0	-12.9	45.9	197.0	500.0	-8.1
3725.000	H	21.6	*	3.3	34.5	0.0	-12.9	46.5	210.2	500.0	-7.5
3725.000	V	22.5	*	3.3	34.5	0.0	-12.9	47.4	233.9	500.0	-6.6

### 23. Occupied Bandwidth Measurements

Test Information	
Manufacturer	Chamberlain
Product	Universal Wireless Keypad
Model	KLIK2U-P2
Mode	Tx On
Test Date	07/08/2021


Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	N/A
Test site used	N/A
Notes	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Requirements
<p>FCC 15.231(c):</p> <p>The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.</p>


Procedures
<p>The EUT was placed on an 80cm high non-conductive stand. The unit was set to transmit continuously. With an antenna positioned nearby, occupied bandwidth emissions were displayed on the spectrum analyzer. The resolution bandwidth was set to 30kHz and span was set to 2MHz. A screen capture was taken of the frequency spectrum near the carrier using a screen dump function on the spectrum analyzer.</p>

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	10
Mode	Tx On
Carrier Frequency	303 MHz
Parameters	20dB BW = 51.9 kHz
Notes	None

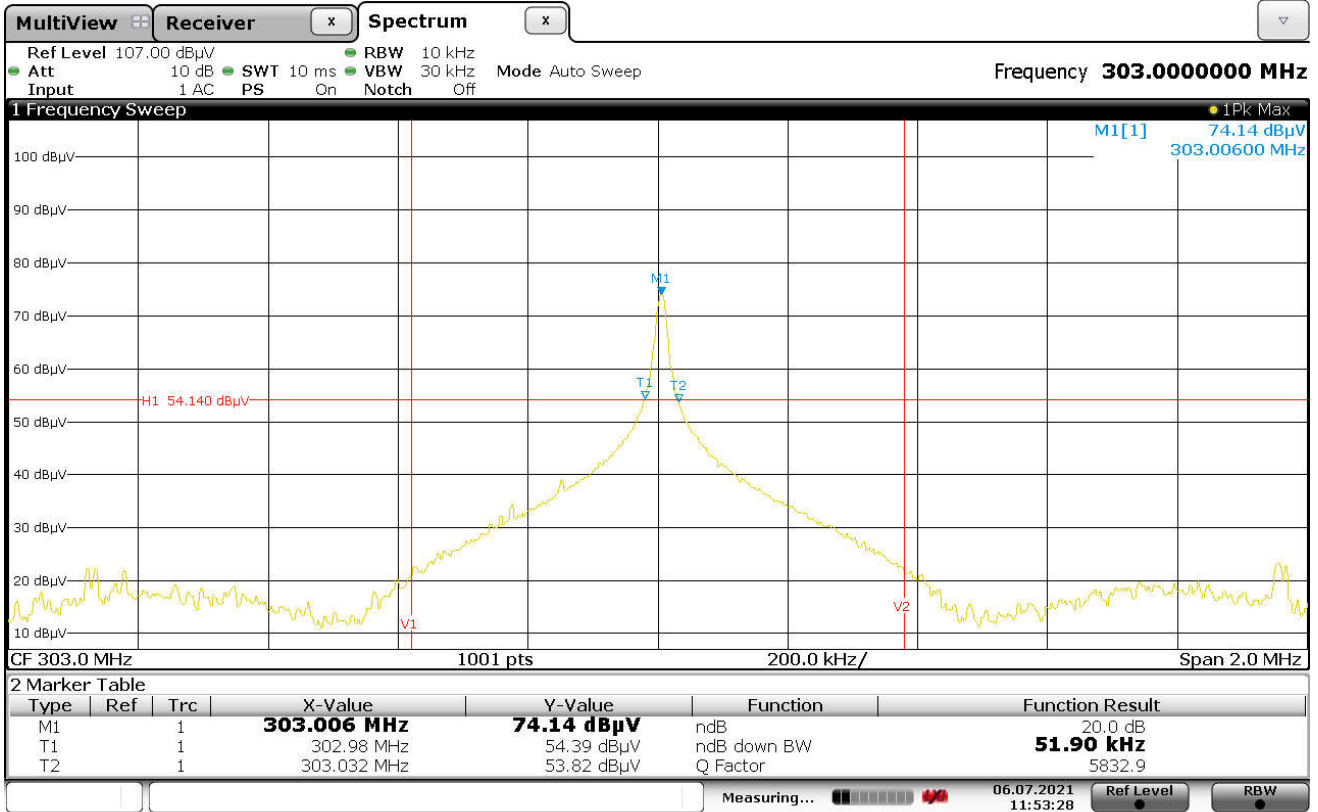

Date: 6 JUL 2021 11:53:27


Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	11
Mode	Tx On
Carrier Frequency	310 MHz
Parameters	20dB BW = 51.90 kHz
Notes	None

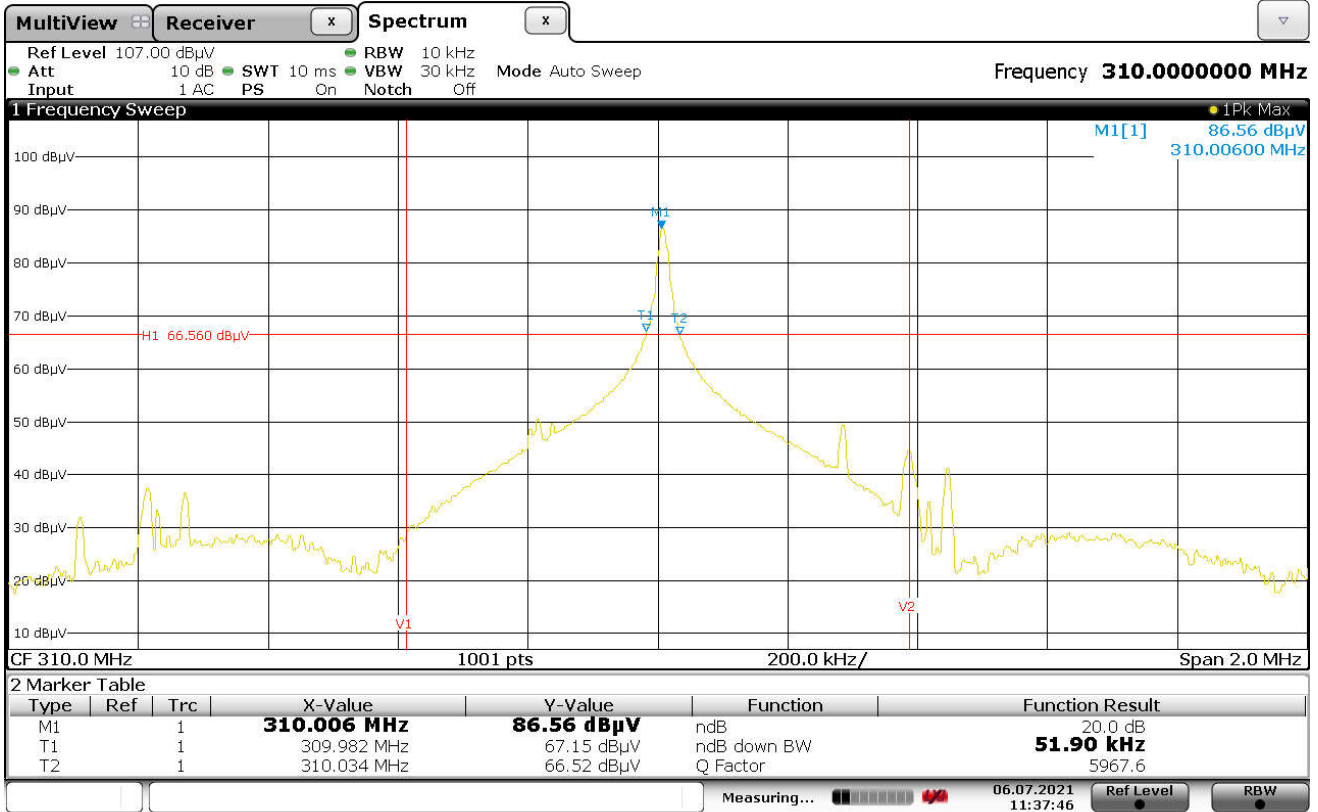

Date: 6 JUL 2021 11:37:46




Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	12
Mode	Tx On
Carrier Frequency	372.5 MHz
Parameters	20dB BW = 24 kHz
Notes	None

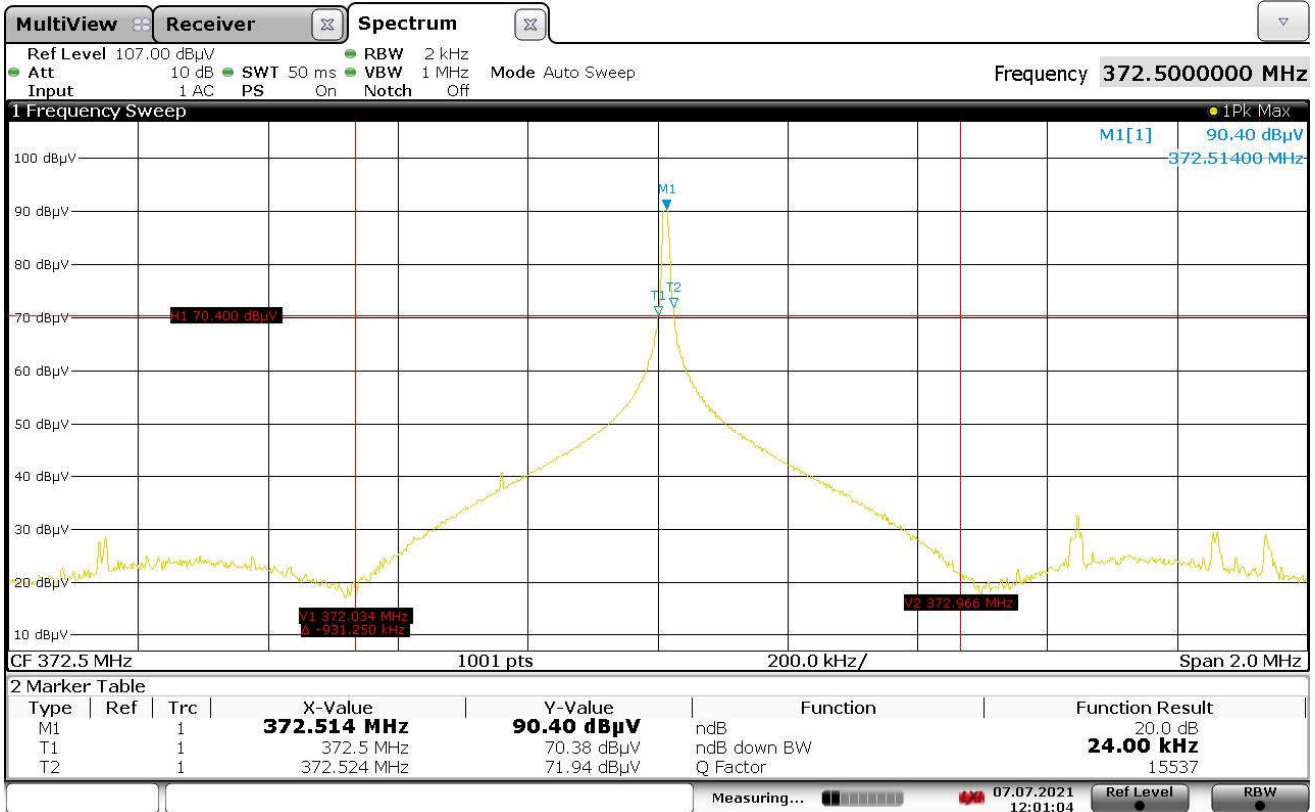


12:01:04 07.07.2021

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	10
Mode	Tx On
Carrier Frequency	303 MHz
Parameters	99% BW = 105.9 kHz
Notes	None

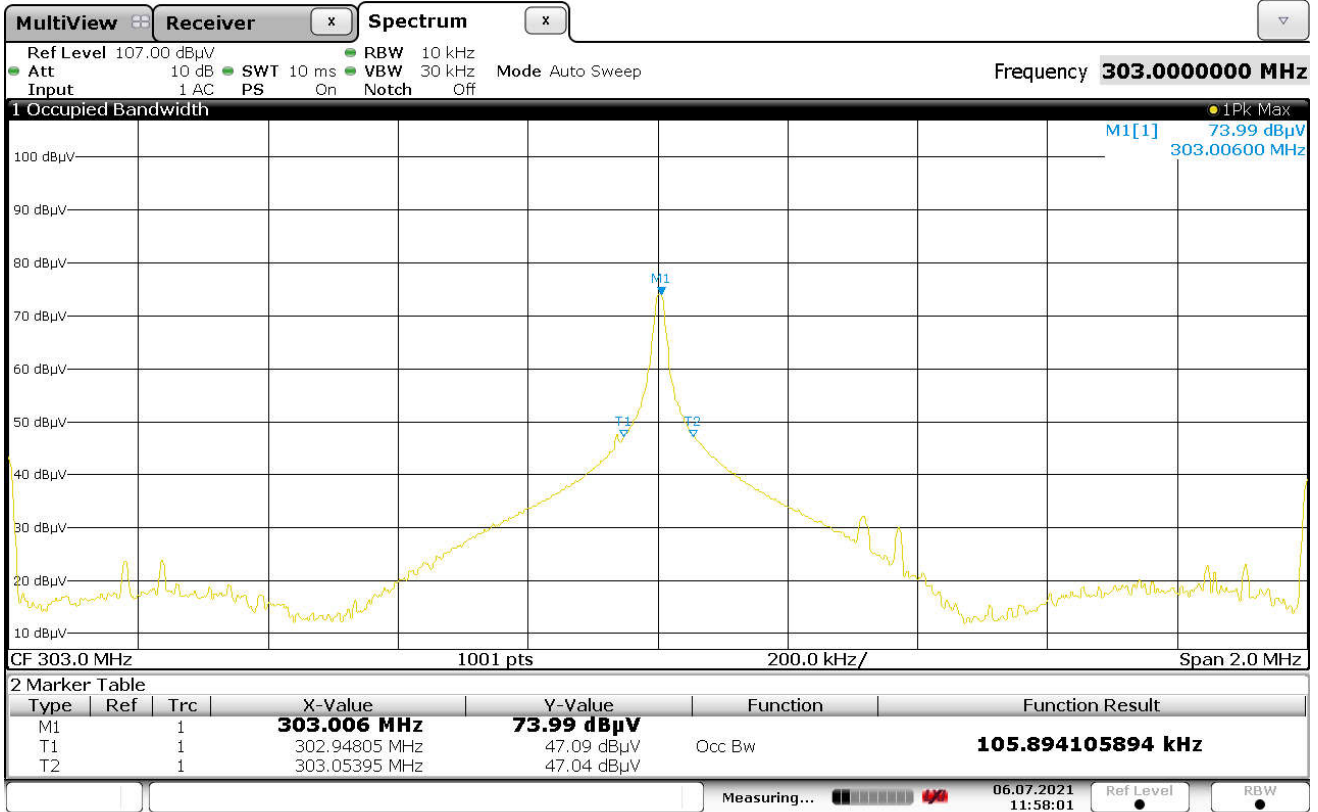


Date: 6 JUL 2021 11:58:01

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	11
Mode	Tx On
Carrier Frequency	310 MHz
Parameters	99% BW = 105.9 kHz
Notes	None

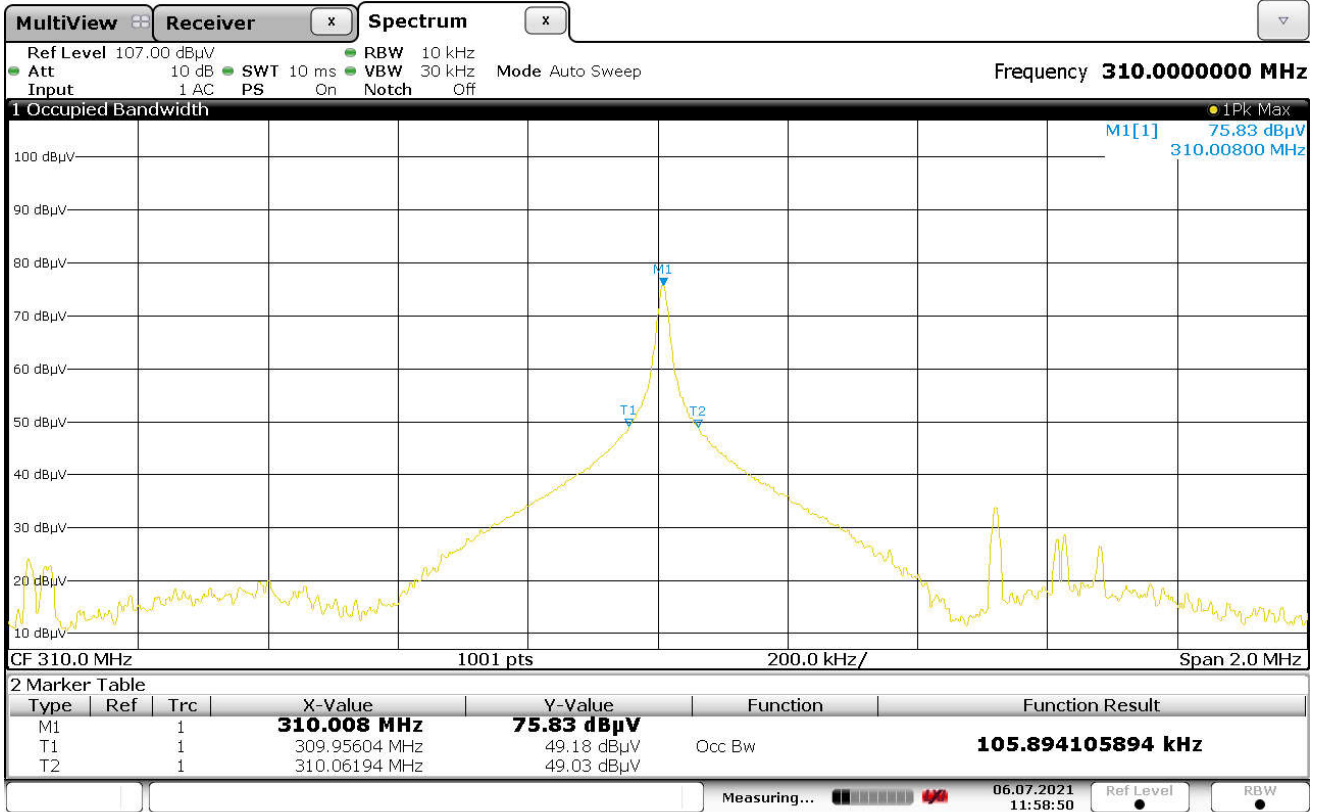

Date: 6 JUL 2021 11:58:50

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	12
Mode	Tx On
Carrier Frequency	372.5 MHz
Parameters	99% BW = 48.67 kHz
Notes	None

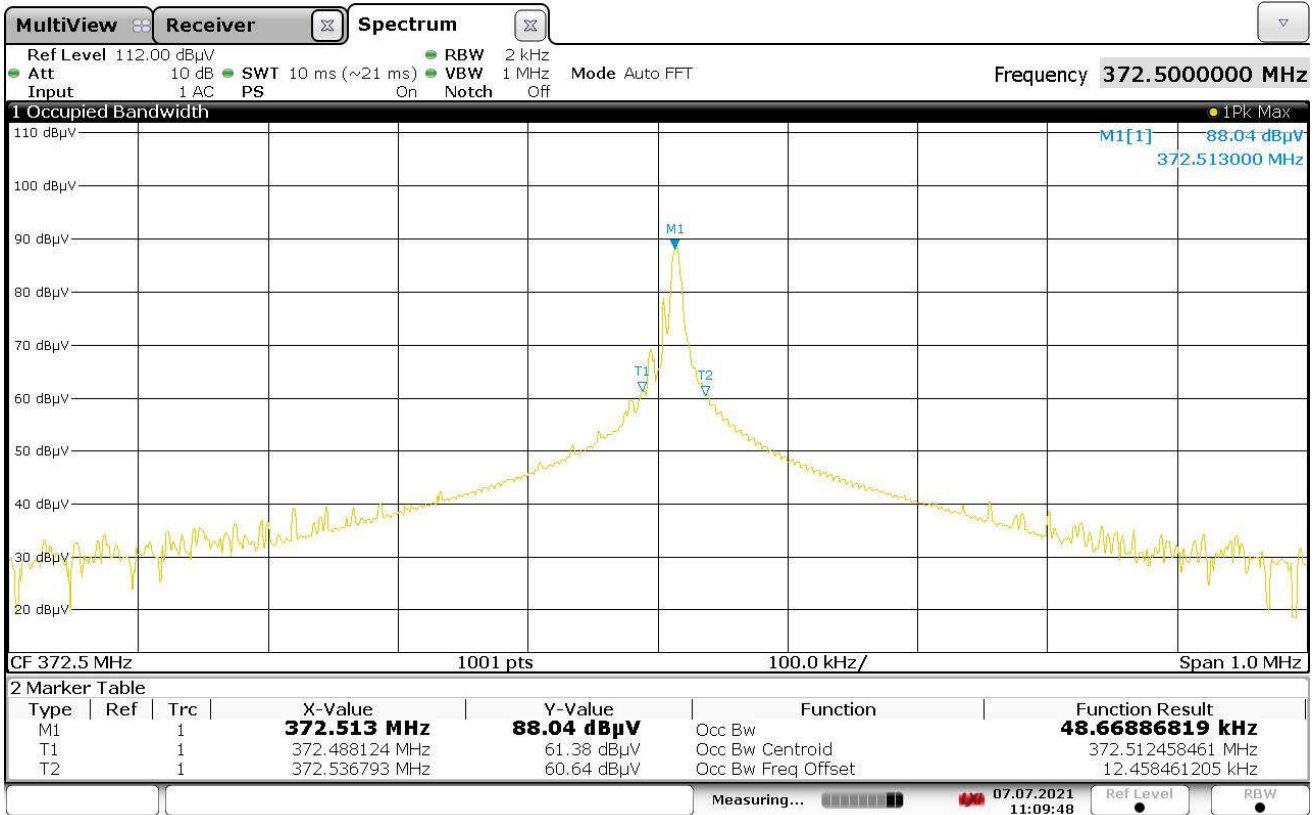

11:09:49 07.07.2021

24. Case Spurious Radiated Emissions (Spot Checks)

Manufacturer	Chamberlain
Product	Universal Wireless Keypad
Model	KLIK2U-P2
Serial No	12
Mode	Tx On

Information	
Setup Format	Tabletop
Height of Support	n/a
Type of Test Site	Semi-Anechoic Chamber
Type of Antennas Used	Below 1GHz: Bilog (or equivalent) Above 1GHz: Double-ridged waveguide (or equivalent)
Notes	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

### Procedures

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2014 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

The final emission tests were then manually performed over the frequency range of 30MHz to 4GHz. Between 30MHz and 1000MHz, a Bi-Log antenna was used as the pick-up device. A broadband double ridged waveguide antenna was used as the pick-up device for all frequencies above 1GHz. All significant broadband and narrowband signals were measured and recorded. The peak detected levels were converted to average levels using a duty cycle factor which was computed from the pulse train.

To ensure that maximum or worst case, emission levels were measured, the following steps were taken:

- 1) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
- 2) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
- 3) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
- 4) For hand-held or body-worn devices, the EUT was rotated through three orthogonal axes to determine which orientation produces the highest emission relative to the limit.

In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer and the antenna cannot be raised to 4 meters. The measuring antenna is raised or lowered as much as the cable will allow and the EUT is rotated through all axis to ensure the maximum readings are recorded.

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	12
Mode	Tx On, Linear New Mega-Code
Carrier Frequency	318 MHz
Notes	S/N 12 was used for all spot frequency tests

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)*	Total (dBuV/m)	Total (uV/m)	Limit (uV/m)	Margin (dB)
318.000	H	58.6		0.9	19.5	0.0	-15.4	63.6	1517.9	6166.7	-12.2
318.000	V	61.0		0.9	19.5	0.0	-15.4	66.1	2007.9	6166.7	-9.7

\* - Duty cycle correction factor data was taken from the original UL test report (see UL EMC Report 2012-87-EM-F0042)

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	12
Mode	Tx On, CGI Rolling Code (D)
Carrier Frequency	390 MHz
Notes	S/N 12 was used for all spot frequency tests

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)*	Total (dBuV/m)	Total (uV/m)	Limit (uV/m)	Margin (dB)
390.000	H	61.4		1.0	21.6	0.0	-13.5	70.6	3382.5	9166.7	-8.7
390.000	V	62.1		1.0	21.6	0.0	-13.5	71.2	3645.4	9166.7	-8.0
780.000	H	12.8		1.4	25.8	0.0	-13.5	26.6	21.4	916.7	-32.6
780.000	V	26.5		1.4	25.8	0.0	-13.5	40.2	102.8	916.7	-19.0

\* - Duty cycle correction factor data was taken from the original UL test report (see UL EMC Report 2012-87-EM-F0042)



Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	12
Mode	Tx On, CGI Rolling Code (D)
Carrier Frequency	315 MHz
Notes	S/N 12 was used for all spot frequency tests

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)*	Total (dBuV/m)	Total (uV/m)	Limit (uV/m)	Margin (dB)
315.000	H	61.3		0.9	19.4	0.0	-12.6	69.0	2825.5	6041.7	-6.6
315.000	V	64.1		0.9	19.4	0.0	-12.6	71.8	3882.3	6041.7	-3.8

\* - Duty cycle correction factor data was taken from the original UL test report (see UL EMC Report 2012-87-EM-F0042)

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	12
Mode	Tx On, CGI Billion Code (A)
Carrier Frequency	390 MHz
Notes	S/N 12 was used for all spot frequency tests

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)*	Total (dBuV/m)	Total (uV/m)	Limit (uV/m)	Margin (dB)
390.000	H	54.7		1.0	21.6	0.0	-6.7	70.6	3382.5	9166.7	-8.7
390.000	V	57.9		1.0	21.6	0.0	-6.7	73.8	4878.0	9166.7	-5.5
780.000	H	24.6	*	1.4	25.8	0.0	-6.7	45.1	179.2	916.7	-14.2
780.000	V	25.0	*	1.4	25.8	0.0	-6.7	45.5	188.7	916.7	-13.7

\* - Duty cycle correction factor data was taken from the original UL test report (see UL EMC Report 2012-87-EM-F0042)

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	12
Mode	Tx On, Genie New IntelliCode (Keelog based)
Carrier Frequency	315 MHz
Notes	S/N 12 was used for all spot frequency tests

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)*	Total (dBuV/m)	Total (uV/m)	Limit (uV/m)	Margin (dB)
315.000	H	63.0		0.9	19.4	0.0	-11.9	71.4	3711.9	6041.7	-4.2
315.000	V	64.4		0.9	19.4	0.0	-11.9	72.8	4386.3	6041.7	-2.8
945.000	H	21.2		1.6	27.0	0.0	-11.9	37.9	78.3	604.2	-17.7
945.000	V	20.7		1.6	27.0	0.0	-11.9	37.4	74.0	604.2	-18.2

\* - Duty cycle correction factor data was taken from the original UL test report (see UL EMC Report 2012-87-EM-F0042)

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	12
Mode	Tx On, Genie New IntelliCode (Keelog based)
Carrier Frequency	390 MHz
Notes	S/N 12 was used for all spot frequency tests

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)*	Total (dBuV/m)	Total (uV/m)	Limit (uV/m)	Margin (dB)
390.000	H	60.7		1.0	21.6	0.0	-11.9	71.4	3717.4	9166.7	-7.8
390.000	V	63.8		1.0	21.6	0.0	-11.9	74.5	5317.9	9166.7	-4.7
780.000	H	15.2	*	1.4	25.8	0.0	-11.9	30.5	33.4	916.7	-28.8
780.000	V	25.9		1.4	25.8	0.0	-11.9	41.3	115.6	916.7	-18.0

\* - Duty cycle correction factor data was taken from the original UL test report (see UL EMC Report 2012-87-EM-F0042)

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	12
Mode	Tx On, Stanley New Secure Code (Keelog based)
Carrier Frequency	310 MHz
Notes	S/N 12 was used for all spot frequency tests

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)*	Total (dBuV/m)	Total (uV/m)	Limit (uV/m)	Margin (dB)
310.000	H	63.7		0.9	19.3	0.0	-12.4	71.6	3804.3	5833.3	-3.7
310.000	V	66.7		0.9	19.3	0.0	-12.4	74.6	5379.9	5833.3	-0.7
930.000	H	22.1		1.6	26.9	0.0	-12.4	38.2	81.1	583.3	-17.1
930.000	V	21.7		1.6	26.9	0.0	-12.4	37.8	77.3	583.3	-17.6

\* - Duty cycle correction factor data was taken from the original UL test report (see UL EMC Report 2012-87-EM-F0042)

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	12
Mode	Tx On, CGI New Rolling Code (E), transmit at 310MHz, 315MHz, and 390MHz
Carrier Frequencies	310 MHz, 315MHz, 390MHz
Notes	Mode 8 transmits on 3 frequencies, all of which were spot-checked

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)*	Total (dBuV/m)	Total (uV/m)	Limit (uV/m)	Margin (dB)
310.000	H	66.6		0.9	19.3	0.0	-15.7	71.2	3620.6	5833.3	-4.1
310.000	V	69.3		0.9	19.3	0.0	-15.7	73.9	4940.6	5833.3	-1.4
930.000	H	29.7		1.6	26.9	0.0	-15.7	42.5	133.1	583.3	-12.8
930.000	V	27.3		1.6	26.9	0.0	-15.7	40.0	100.1	583.3	-15.3
315.000	H	67.2		0.9	19.4	0.0	-15.8	71.8	3869.0	6041.7	-3.9
315.000	V	69.0		0.9	19.4	0.0	-15.8	73.6	4787.3	6041.7	-2.0
390.000	H	64.6		1.0	21.6	0.0	-16.0	71.3	3662.2	9166.7	-8.0
390.000	V	67.9		1.0	21.6	0.0	-16.0	74.5	5324.1	9166.7	-4.7
780.000	H	26.0		1.4	25.8	0.0	-16.0	37.2	72.7	916.7	-22.0
780.000	V	37.2		1.4	25.8	0.0	-16.0	48.4	263.9	916.7	-10.8

\* - Duty cycle correction factor data was taken from the original UL test report (see UL EMC Report 2012-87-EM-F0042)

Test Details	
Manufacturer	Chamberlain
Model	KLIK2U-P2
S/N	12
Mode	Tx On, Wayne-Dalton New Rolling Code (Keelog based)
Carrier Frequency	372.5 MHz
Notes	S/N 12 was used for all spot frequency tests

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)*	Total (dBuV/m)	Total (uV/m)	Limit (uV/m)	Margin (dB)
372.500	H	61.1		1.0	20.8	0.0	-12.4	70.6	3372.7	8437.5	-8.0
372.500	V	61.8		1.0	20.8	0.0	-12.4	71.3	3664.2	8437.5	-7.2

\* - Duty cycle correction factor data was taken from the original UL test report (see UL EMC Report 2012-87-EM-F0042)

## 25. Scope of Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

ELITE ELECTRONIC ENGINEERING, INC.  
1516 Centre Circle  
Downers Grove, IL 60515  
Robert Bugielski (QA Manager) Phone: 630 495 9770 ext. 168  
Email: [rbugielski@elitetest.com](mailto:rbugielski@elitetest.com)  
Craig Fanning (EMC Lab Manager) Phone: 630 495 9770 ext. 112  
Email: [cfanning@elitetest.com](mailto:cfanning@elitetest.com)  
Brandon Lugo (Automotive Team Leader) Phone: 630 495 9770 ext. 163  
Email: [blugo@elitetest.com](mailto:blugo@elitetest.com)  
Richard King (FCC/Commercial Team Leader) Phone: 630 495 9770 ext. 123  
Email: [reking@elitetest.com](mailto:reking@elitetest.com)  
Website: [www.elitetest.com](http://www.elitetest.com)

## ELECTRICAL

Valid To: June 30, 2023

Certificate Number: 1786.01

In recognition of the successful completion of the A2LA Accreditation Program evaluation process, accreditation is granted to this laboratory to perform the following automotive electromagnetic compatibility and other electrical tests:

**Test Technology:****Test Method(s) <sup>1</sup>:*****Transient Immunity***

ISO 7637-2 (including emissions); ISO 7637-3;  
ISO 16750-2:2012, Sections 4.6.3 and 4.6.4;  
CS-11979, Section 6.4; CS.00054, Section 5.9;  
EMC-CS-2009.1 (CI220); FMC1278 (CI220, CI221, CI222);  
GMW 3097, Section 3.5; SAE J1113-11; SAE J1113-12;  
ECE Regulation 10.06 Annex 10

***Electrostatic Discharge (ESD)***

ISO 10605 (2001, 2008);  
CS-11979 Section 7.0; CS.00054, Section 5.10;  
EMC-CS-2009.1 (CI 280); FMC1278 (CI280); SAE J1113-13;  
GMW 3097 Section 3.6

***Conducted Emissions***

CISPR 25 (2002, 2008), Sections 6.2 and 6.3;  
CISPR 25 (2016), Sections 6.3 and 6.4;  
CS-11979, Section 5.1; CS.00054, Sections 5.6.1 and 5.6.2;  
GMW 3097, Section 3.3.2;  
EMC-CS-2009.1 (CE 420); FMC1278 (CE420, CE421)

***Radiated Emissions Anechoic***

CISPR 25 (2002, 2008), Section 6.4;  
CISPR 25 (2016), Section 6.5;  
CS-11979, Section 5.3; CS.00054, Section 5.6.3;  
GMW 3097, Section 3.3.1;  
EMC-CS-2009.1 (RE 310); FMC1278 (RE310);  
ECE Regulation 10.06 Annex 7 (Broadband)  
ECE Regulation 10.06 Annex 8 (Narrowband)

(A2LA Cert. No. 1786.01) Revised 06/24/2021



Page 1 of 8



<u>Test Technology:</u>	<u>Test Method(s) <sup>1</sup>:</u>
<i>Vehicle Radiated Emissions</i>	CISPR 12; CISPR 36; ICES-002; ECE Regulation 10.06 Annex 5
<i>Bulk Current Injection (BCI)</i>	ISO 11452-4; CS-11979, Section 6.1; CS.00054, Section 5.8.1; GMW 3097, Section 3.4.1; SAE J1113-4; EMC-CS-2009.1 (RI112); FMC1278 (RI112); ECE Regulation 10.06 Annex 9
<i>Radiated Immunity Anechoic (Including Radar Pulse)</i>	ISO 11452-2; ISO 11452-5; CS-11979, Section 6.2; CS.00054, Section 5.8.2; GMW 3097, Section 3.4.2; EMC-CS-2009.1 (RI114); FMC1278 (RI114); SAE J1113-21; ECE Regulation 10.06 Annex 9
<i>Radiated Immunity Magnetic Field</i>	ISO 11452-8
<i>Radiated Immunity Reverb</i>	ISO/IEC 61000-4-21; GMW 3097, Section 3.4.3; EMC-CS-2009.1 (RI114); FMC1278 (RI114); ISO 11452-11
<i>Radiated Immunity (Portable Transmitters)</i>	ISO 11452-9; EMC-CS-2009.1 (RI115); FMC1278 (RI115)
<i>Vehicle Radiated Immunity (ALSE)</i>	ISO 11451-2; ECE Regulation 10.06 Annex 6
<i>Vehicle Product Specific EMC Standards</i>	EN 14982; EN ISO 13309, ISO 13766; EN 50498; EC Regulation No. 2015/208; EN 55012
<i>Electrical Loads</i>	ISO 16750-2
<b>Emissions</b> Radiated and Conducted (3m Semi-anechoic chamber, up to 40 GHz)	47 CFR, FCC Part 15 B (using ANSI C63.4:2014); 47 CFR, FCC Part 18 (using FCC MP-5:1986); ICES-001; ICES-003; ICES-005; IEC/CISPR 11, Ed. 4.1 (2004-06); AS/NZS CISPR 11 (2004); IEC/CISPR 11 Ed 5 (2009-05) + A1 (2010); KN 11 (2008-5) with RRL Notice No. 2008-3 (May 20, 2008); CISPR 11; EN 55011; KS C 9811; CNS 13803 (1997, 2003); CISPR 14-1; EN 55014-1; AS/NZS CISPR 14.1; KS C 9814-1; KN 14-1; IEC/CISPR 22 (1997); EN 55022 (1998) + A1(2000); EN 55022 (1998) + A1(2000) + A2(2003); EN 55022 (2006); IEC/CISPR 22 (2008-09); AS/NZS CISPR 22 (2004); AS/NZS CISPR 22, 3rd Edition (2006); KN 22 (up to 6 GHz); CNS 13438 (up to 6 GHz); VCCI V-3 (up to 6 GHz); CISPR 32; EN 55032; KS C 9832; KN 32; ECE Regulation 10.06 Annex 14
Cellular Radiated Spurious Emissions	ETSI TS 151 010-1 GSM; 3GPP TS 51.010-1, Sec 12; ETSI TS 134 124 UMTS; 3GPP TS 34.124; ETSI TS 136 124 LTE; E-UTRA; 3GPP TS 36.124

<u>Test Technology:</u>	<u>Test Method(s) <sup>1</sup>:</u>
<b>Emissions (cont'd)</b>	
Current Harmonics	IEC 61000-3-2; EN 61000-3-2; KN 61000-3-2; KS C 9610-3-2; ECE Regulation 10.06 Annex 11
Flicker and Fluctuations	IEC 61000-3-3; EN 61000-3-3; KN 61000-3-3; KS C 9610-3-3; ECE Regulation 10.06 Annex 12
<b>Immunity</b>	
Electrostatic Discharge	IEC 61000-4-2, Ed. 1.2 (2001); IEC 61000-4-2 (1995) + A1(1998) + A2(2000); EN 61000-4-2 (1995); EN 61000-4-2 (2009-05); KN 61000-4-2 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-2; EN 61000-4-2; KN 61000-4-2; KS C 9610-4-2; IEEE C37.90.3 2001
Radiated Immunity	IEC 61000-4-3 (1995) + A1(1998) + A2(2000); IEC 61000-4-3, Ed. 3.0 (2006-02); IEC 61000-4-3, Ed. 3.2 (2010); KN 61000-4-3 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-3; EN 61000-4-3; KN 61000-4-3; KS C 9610-4-3; IEEE C37.90.2 2004
Electrical Fast Transient/Burst	IEC 61000-4-4, Ed. 2.0 (2004-07); IEC 61000-4-4, Ed. 2.1 (2011); IEC 61000-4-4 (1995) + A1(2000) + A2(2001); KN 61000-4-4 (2008-5); RRL Notice No. 2008-5 (May 20, 2008); IEC 61000-4-4; EN 61000-4-4; KN 61000-4-4; KS C 9610-4-4; ECE Regulation 10.06 Annex 15
Surge	IEC 61000-4-5 (1995) + A1(2000); IEC 61000-4-5, Ed 1.1 (2005-11); EN 61000-4-5 (1995) + A1(2001); KN 61000-4-5 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-5; EN 61000-4-5; KN 61000-4-5; KS C 9610-4-5; IEEE C37.90.1 2012; IEEE STD C62.41.2 2002; ECE Regulation 10.06 Annex 16
Conducted Immunity	IEC 61000-4-6 (1996) + A1(2000); IEC 61000-4-6, Ed 2.0 (2006-05); IEC 61000-4-6 Ed. 3.0 (2008); KN 61000-4-6 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); EN 61000-4-6 (1996) + A1(2001); IEC 61000-4-6; EN 61000-4-6; KN 61000-4-6; KS C 9610-4-6

<u>Test Technology:</u>	<u>Test Method(s) <sup>1</sup>:</u>
<b>Immunity (cont'd)</b>	
Power Frequency Magnetic Field Immunity ( <i>Down to 3 A/m</i> )	IEC 61000-4-8 (1993) + A1(2000); IEC 61000-4-8 (2009); EN 61000-4-8 (1994) + A1(2000); KN 61000-4-8 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-8; EN 61000-4-8; KN 61000-4-8; KS C 9610-4-8
Voltage Dips, Short Interrupts, and Line Voltage Variations	IEC 61000-4-11, Ed. 2 (2004-03); KN 61000-4-11 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-11; EN 61000-4-11; KN 61000-4-11; KS C 9610-4-11
Ring Wave	IEC 61000-4-12, Ed. 2 (2006-09); EN 61000-4-12:2006; IEC 61000-4-12; EN 61000-4-12; KN 61000-4-12; IEEE STD C62.41.2 2002
Generic and Product Specific EMC Standards	IEC/EN 61000-6-1; AS/NZS 61000-6-1; KN 61000-6-1; KS C 9610-6-1; IEC/EN 61000-6-2; AS/NZS 61000-6-2; KN 61000-6-2; KS C 9610-6-2; IEC/EN 61000-6-3; AS/NZS 61000-6-3; KN 61000-6-3; KS C 9610-6-3; IEC/EN 61000-6-4; AS/NZS 61000-6-4; KN 61000-6-4; KS C 9610-6-4; EN 50130-4; EN 61326-1; EN 50121-3-2; EN 12895; EN 50270; EN 50491-1; EN 50491-2; EN 50491-3; EN 55015; EN 60730-1; EN 60945; IEC 60533; EN 61326-2-6; EN 61800-3; IEC/CISPR 14-2; EN 55014-2; AS/NZS CISPR 14.2; KN 14-2; KS C 9814-2; IEC/CISPR 24; AS/NZS CISPR 24; EN 55024; KN 24; IEC/CISPR 35; AS/NZS CISPR 35; EN 55035; KN 35; KS C 9835; IEC 60601-1-2; JIS T0601-1-2
<b><i>TxRx EMC Requirements</i></b>	EN 301 489-1; EN 301 489-3; EN 301 489-9; EN 301 489-17; EN 301 489-19; EN 301 489-20
<b><i>European Radio Test Standards</i></b>	ETSI EN 300 086-1; ETSI EN 300 086-2; ETSI EN 300 113-1; ETSI EN 300 113-2; ETSI EN 300 220-1; ETSI EN 300 220-2; ETSI EN 300 220-3-1; ETSI EN 300 220-3-2; ETSI EN 300 330-1; ETSI EN 300 330-2; ETSI EN 300 440-1; ETSI EN 300 440-2; ETSI EN 300 422-1; ETSI EN 300 422-2; ETSI EN 300 328; ETSI EN 301 893; ETSI EN 301 511; ETSI EN 301 908-1; ETSI EN 908-2; ETSI EN 908-13; ETSI EN 303 413; ETSI EN 302 502; EN 303 340; EN 303 345-2; EN 303 345-3; EN 303 345-4

<u>Test Technology:</u>	<u>Test Method(s) <sup>1</sup>:</u>
<i>Canadian Radio Tests</i>	RSS-102 (RF Exposure Evaluation only); RSS-111; RSS-112; RSS-117; RSS-119; RSS-123; RSS-125; RSS-127; RSS-130; RSS-131; RSS-132; RSS-133; RSS-134; RSS-135; RSS-137; RSS-139; RSS-140; RSS-141; RSS-142; RSS-170; RSS-181; RSS-182; RSS-191; RSS-192; RSS-194; RSS-195; RSS-196; RSS-197; RSS-199; RSS-210; RSS-211; RSS-213; RSS-215; RSS-216; RSS-220; RSS-222; RSS-236; RSS-238; RSS-243; RSS-244; RSS-247; RSS-251; RSS-252; RSS-287; RSS-288; RSS-310; RSS-GEN
<i>Mexico Radio Tests</i>	IFT-008-2015; NOM-208-SCFI-2016
<i>Japan Radio Tests</i>	Radio Law No. 131, Ordinance of MPT No. 37, 1981, MIC Notification No. 88:2004, Table No. 22-11; ARIB STD-T66, Regulation 18
<i>Taiwan Radio Tests</i>	LP-0002 (July 15, 2020)
<i>Australia/New Zealand Radio Tests</i>	AS/NZS 4268; Radiocommunications (Short Range Devices) Standard (2014)
<i>Hong Kong Radio Tests</i>	HKCA 1039 Issue 6; HKCA 1042; HKCA 1033 Issue 7; HKCA 1061; HKCA 1008; HKCA 1043; HKCA 1057; HKCA 1073
<i>Korean Radio Test Standards</i>	KN 301 489-1; KN 301 489-3; KN 301 489-9; KN 301 489-17; KN 301 489-52; KS X 3124; KS X 3125; KS X 3130; KS X 3126; KS X 3129
<i>Vietnam Radio Test Standards</i>	QCVN 47:2015/BTTTT; QCVN 54:2020/BTTTT; QCVN 55:2011/BTTTT; QCVN 65:2013/BTTTT; QCVN 73:2013/BTTTT; QCVN 74:2020/BTTTT; QCVN 112:2017/BTTTT; QCVN 117:2020/BTTTT
<i>Vietnam EMC Test Standards</i>	QCVN 18:2014/BTTTT; QCVN 86:2019/BTTTT; QCVN 96:2015/BTTTT; QCVN 118:2018/BTTTT
<i>Unlicensed Radio Frequency Devices (3 Meter Semi-Anechoic Room)</i>	47 CFR FCC Part 15C, 15D, 15E, 15F, 15G, 15H (using ANSI C63.10:2013, ANSI C63.17:2013 and FCC KDB 905462 D02 (v02))
<i>Licensed Radio Service Equipment</i>	47 CFR FCC Parts 20, 22, 24, 25, 27, 30, 73, 74, 80, 87, 90, 95, 96, 97, 101 (using ANSI/TIA-603-E, TIA-102.CAAA-E, ANSI C63.26:2015)

**Test Technology:**

***OIA (Over the Air) Performance***  
 GSM, GPRS, EGPRS  
 UMTS (W-CDMA)  
 LTE including CAT M1  
 A-GPS for UMTS/GSM  
 LTS A-GPS, A-GLONASS,  
 SIB8/SIB16  
 Large Device/Laptop/Tablet Testing  
 Integrated Device Testing  
 WiFi 802.11 a/b/g/n/a

**Test Method(s) <sup>1</sup>:**

CTIA Test Plan for Wireless Device Over-the-Air Performance (Method for Measurement for Radiated Power and Receiver Performance) V3.8.2;  
 CTIA Test Plan for RF Performance Evaluation of WiFi Mobile Converged Devices V2.1.0

***Electrical Measurements and Simulation***

**AC Voltage / Current**

(1mV to 5kV) 60 Hz  
 (0.1V to 250V) up to 500 MHz  
 (1µA to 150A) 60 Hz

FAA AC 150/5345-10H  
 FAA AC 150/5345-43J  
 FAA AC 150/5345-44K

**DC Voltage / Current**

(1mV to 15-kV) / (1µA to 10A)

FAA AC 150/5345-46E  
 FAA AC 150/5345-47C

**Power Factor / Efficiency / Crest Factor**  
 (Power to 30kW)

FAA EB 67D

**Resistance**

(1mΩ to 4000MΩ)

**Surge**

(Up to 10 kV / 5 kA) (Combination Wave and Ring Wave)

**On the following products and materials:**

Telecommunications Terminal Equipment (TTE), Radio Equipment, Network Equipment, Information Technology Equipment (ITE), Automotive Electronic Equipment, Automotive Hybrid Electronic Devices, Maritime Navigation and Radio Communication Equipment and Systems, Vehicles, Boats and Internal Combustion Engine Driven Devices, Automotive, Aviation, and General Lighting Products, Medical Electrical Equipment, Motors, Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment, Household Appliances, Electric Tools, Low-voltage Switchgear and Control gear, Programmable Controllers, Electrical Equipment for Measurement, Control and Laboratory Use, Base Materials, Power and Data Transmission Cables and Connectors

<sup>1</sup> When the date, edition, version, etc. is not identified in the scope of accreditation, laboratories may use the version that immediately precedes the current version for a period of one year from the date of publication of the standard measurement method, per part C., Section 1 of A2LA R101 - General Requirements - Accreditation of ISO-IEC 17025 Laboratories.

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1<sup>2</sup>

<b>Rule Subpart/Technology</b>	<b>Test Method</b>	<b>Maximum Frequency (MHz)</b>
<b><u>Unintentional Radiators</u></b> Part 15B	ANSI C63.4:2014	40000

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1<sup>2</sup>

<b>Rule Subpart/Technology</b>	<b>Test Method</b>	<b>Maximum Frequency (MHz)</b>
<u>Industrial, Scientific, and Medical Equipment</u> Part 18	FCC MP-5 (February 1986)	40000
<u>Intentional Radiators</u> Part 15C	ANSI C63.10:2013	40000
<u>Unlicensed Personal Communication Systems Devices</u> Part 15D	ANSI C63.17:2013	40000
<u>U-NII without DFS Intentional Radiators</u> Part 15E	ANSI C63.10:2013	40000
<u>U-NII with DFS Intentional Radiators</u> Part 15E	FCC KDB 905462 D02 (v02)	40000
<u>UWB Intentional Radiators</u> Part 15F	ANSI C63.10:2013	40000
<u>BPL Intentional Radiators</u> Part 15G	ANSI C63.10:2013	40000
<u>White Space Device Intentional Radiators</u> Part 15H	ANSI C63.10:2013	40000
<u>Commercial Mobile Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (cellular), 24, 25 (below 3 GHz), and 27	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>General Mobile Radio Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (non-cellular), 90 (below 3 GHz), 95, 97, and 101 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Citizens Broadband Radio Services (FCC Licensed Radio Service Equipment)</u> Part 96	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1<sup>2</sup>

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Maritime and Aviation Radio Services</u> Parts 80 and 87	ANSI/TIA-603-E; ANSI C63.26:2015	40000
<u>Microwave and Millimeter Bands Radio Services</u> Parts 25, 30, 74, 90 (above 3 GHz), 97 (above 3 GHz), and 101	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Broadcast Radio Services</u> Parts 73 and 74 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Signal Boosters</u> Part 20 (Wideband Consumer Signal Boosters, Provider-specific signal boosters, and Industrial Signal Boosters) Section 90.219	ANSI C63.26:2015	40000

<sup>2</sup> Accreditation does not imply acceptance to the FCC equipment authorization program. Please see the FCC website (<https://apps.fcc.gov/oetcf/eas/>) for a listing of FCC approved laboratories.



## Accredited Laboratory

A2LA has accredited

### ELITE ELECTRONIC ENGINEERING INC.

Downers Grove, IL

for technical competence in the field of

### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 19<sup>th</sup> day of May 2021.



Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 1786.01  
Valid to June 30, 2023

*For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*