

ELITE ELECTRONIC ENGINEERING INCORPORATED
1516 CENTRE CIRCLE
DOWNERS GROVE, ILLINOIS 60515-1082

ELITE PROJECT: 28170

DATE TESTED: October 27, 1999

TEST PERSONNEL: Mark E. Longinotti

TEST SPECIFICATION: FCC "Code of Federal Regulations" Title 47
Part 15, Subpart C, Section 15.205

ENGINEERING TEST REPORT NO. 22155
MEASUREMENT OF RF INTERFERENCE FROM
A MODEL TCTX 120 TRANSMITTER

FOR: Chamberlain Manufacturing
Elmhurst, IL

PURCHASE ORDER NO.: 30491

Report By: *Mark E. Longinotti*
Mark E. Longinotti

Approved By: *Raymond J. Klouda*
Raymond J. Klouda
Registered Professional
Engineer of Illinois - 44894

ADMINISTRATIVE DATA AND SUMMARY OF TESTS

DESCRIPTION OF TEST ITEM: Transmitter

MODEL NO: TCTX 120

SERIAL NO: None Assigned

MANUFACTURER: Chamberlain Manufacturing

APPLICABLE SPECIFICATIONS: FCC "Code of Federal Regulations"
Title 47, Part 15, Subpart C

QUANTITY OF ITEMS TESTED: One (1)

TEST PERFORMED BY: ELITE ELECTRONIC ENGINEERING INCORPORATED
Radio Interference Consultants
Downers Grove, Illinois 60515

DATE RECEIVED: October 22, 1999

DATE TESTED: October 27, 1999

PERSONNEL (OPERATORS, OBSERVERS, AND CO-ORDINATORS):

CUSTOMER: No Chamberlain Manufacturing personnel were present.

ELITE ELECTRONIC: Mark E. Longinotti

ELITE JOB NO.: 28170

ABSTRACT: The model TCTX 120 transmitter, does meet the radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, for Intentional Radiators, when tested per ANSI C63.4-1992.

The radiated emissions level closest to the limit (worst case) occurred at 1167.3MHz. The emissions level at this frequency was 3.2dB within the limit. See data page 20 for more details.

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

ENGINEERING TEST REPORT NO. 22155

TABLE OF CONTENTS

| PARAGRAPH | DESCRIPTION OF CONTENTS | PAGE NO. |
|-----------|--------------------------------------|----------|
| 1.0 | INTRODUCTION | 4 |
| 1.1 | DESCRIPTION OF TEST ITEM | 4 |
| 1.2 | PURPOSE | 4 |
| 1.3 | DEVIATIONS, ADDITIONS AND EXCLUSIONS | 4 |
| 1.4 | APPLICABLE DOCUMENTS | 4 |
| 1.5 | SUBCONTRACTOR IDENTIFICATION | 4 |
| 1.6 | LABORATORY CONDITIONS | 5 |
| 2.0 | TEST ITEM SETUP AND OPERATION | 5 |
| 2.1 | POWER INPUT | 5 |
| 2.2 | GROUNDING | 5 |
| 2.3 | PERIPHERAL EQUIPMENT | 5 |
| 3.0 | TEST EQUIPMENT | 5 |
| 3.1 | TEST EQUIPMENT LIST | 5 |
| 3.2 | CALIBRATION TRACEABILITY | 6 |
| 3.3 | MEASUREMENT UNCERTAINTY | 6 |
| 4.0 | REQUIREMENTS, PROCEDURES AND RESULTS | 6 |
| 4.1 | POWERLINE CONDUCTED EMISSIONS | 6 |
| 4.1.1 | REQUIREMENTS | 6 |
| 4.2 | DUTY CYCLE FACTOR MEASUREMENTS | 7 |
| 4.2.2 | PROCEDURES | 7 |
| 4.2.3 | RESULTS | 7 |
| 4.3 | RADIATED MEASUREMENTS | 7 |
| 4.3.1 | REQUIREMENTS | 7 |
| 4.3.2 | PRELIMINARY RADIATED MEASUREMENTS | 8 |
| 4.3.3 | FINAL RADIATED MEASUREMENTS | 8 |
| 4.3.3 | RESULTS | 10 |
| 4.4 | OCCUPIED BANDWIDTH MEASUREMENTS | 10 |
| 4.4.1 | REQUIREMENTS | 10 |
| 4.4.2 | PROCEDURES | 10 |
| 4.4.3 | RESULTS | 10 |
| 5.0 | CONCLUSION | 10 |
| 6.0 | CERTIFICATION | 11 |
| 7.0 | ENDORSEMENT DISCLAIMER | 11 |
| | TABLE I - EQUIPMENT LIST | 12 |

TOTAL NUMBER OF PAGES IN THIS DOCUMENT,
(INCLUDING DATA SHEETS): 21

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

Page 3 of 21

ENGINEERING TEST REPORT NO. 22155
MEASUREMENT OF RF INTERFERENCE FROM
A MODEL TCTX 120 TRANSMITTER

1.0 INTRODUCTION:

1.1 DESCRIPTION OF TEST ITEM: On October 27, 1999, a series of radio interference measurements were performed on a model TCTX 120 Transmitter, (hereinafter referred to as the test item). No serial number was assigned to the test item. The test item was designed to transmit at approximately 390 MHz using an internal antenna. The tests were performed for Chamberlain Manufacturing of Elmhurst, IL.

1.2 PURPOSE: The test series was performed to determine if the test item meets the radiated RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections for Intentional Radiators. Testing was performed in accordance with ANSI C63.4-1992.

1.3 DEVIATIONS, ADDITIONS AND EXCLUSIONS: There were no deviations, additions to, or exclusions from the test specification during this test series.

1.4 APPLICABLE DOCUMENTS: The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C, dated 1 October 1998
- ANSI C63.4-1992, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"

1.5 SUBCONTRACTOR IDENTIFICATION: This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by the National

Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP). NVLAP Lab Code: 100278-0.

1.6 LABORATORY CONDITIONS: The temperature at the time of the test was 21°C and the relative humidity was 27%.

2.0 TEST ITEM SETUP AND OPERATION:

A block diagram of the test item setup is included as Figure 1.

2.1 POWER INPUT: The test item obtained 3VDC power from 2 internal 1.5VDC lithium batteries.

2.2 GROUNDING: Since the test item was powered with 3VDC, it was ungrounded during the tests.

2.3 PERIPHERAL EQUIPMENT: No peripheral equipment or interconnect cables were submitted with the test item.

2.4 OPERATIONAL MODE: For all tests the test item was placed on a 80cm high non-conductive stand. The test item was energized.

For all tests, the appropriate button of the test item was held down thereby setting the unit to transmit continuously. The transmitting mechanism automatically deactivated when released. The battery voltage was periodically checked to ensure proper operation at maximum level. The tests were performed with the test item operating at 390MHz.

3.0 TEST EQUIPMENT:

3.1 TEST EQUIPMENT LIST: A list of the test equipment used can be found on Table I. All equipment was calibrated per the instruction manuals supplied by the manufacturer.

The fundamental, harmonics and spurious emissions were measured with an HP 85462A spectrum analyzer. The spectrum analyzer peak detected readings were converted to average readings using a duty

cycle factor. All measurements were taken with the resolution bandwidth of the measuring instrument adjusted to 120kHz below 1GHz and 1MHz above 1GHz.

The duty cycle factor was calculated from the pulse train for the test item. A data plot was obtained to determine the duty cycle factor. The duty cycle factor was computed as the Word ON time divided by the Word period (ON time + OFF time). The duty cycle factor in dB = $20 \log (\text{Word ON}/\text{Word period})$. If the word period is more than 100 milliseconds, then the duty cycle would be computed on the maximum Word ON time during a 100 millisecond period.

3.2 CALIBRATION TRACEABILITY: Test equipment is maintained and calibrated on a regular basis. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

3.3 MEASUREMENT UNCERTAINTY: All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

The measurement uncertainty budgets were based on guidelines in "ISO Guide to the Expression of Uncertainty in Measurements" and NAMAS NIS81 "The Treatment of Uncertainty in EMC Measurements".

The measurement uncertainty for these tests is presented below:

Conducted Emission Measurements:

| | | |
|---------------------------------------|------|-------|
| Combined Standard Uncertainty | 1.07 | -1.07 |
| Expanded Uncertainty (95% confidence) | 2.1 | -2.1 |

Radiated Emission Measurements:

| | | |
|---------------------------------------|------|-------|
| Combined Standard Uncertainty | 2.26 | -2.18 |
| Expanded Uncertainty (95% confidence) | 4.5 | -4.4 |

4.0 REQUIREMENTS, PROCEDURES AND RESULTS:

4.1 POWERLINE CONDUCTED EMISSIONS:

4.1.1 REQUIREMENTS: Since the test item was powered by

internal batteries, no conducted emissions tests were performed.

4.2 DUTY CYCLE FACTOR MEASUREMENTS:

4.2.2 PROCEDURES: The duty cycle factor is used to convert peak detected readings to average readings. This factor is computed from the time domain trace of the pulse modulation signal.

With the transmitter set up to transmit for maximum pulse density, the time domain trace is displayed on the spectrum analyzer. This trace is obtained by tuning center frequency to the transmitter frequency and then setting a zero span width with 10msec/div. The amplitude setting are adjusted so that the on/off transitions clear the 4th division from the bottom of the display. The markers are set at beginning and end of a word period. If the word period exceeds 100 msec the word period is set to 100 msec. The on-time and off-time are then measured. The on-time is total time signal level exceeds the 4th division. Off-time is time under for the word period. The duty cycle is then computed as the (On-time/ word period) where the word period = (On-time + Off-time).

4.2.3 RESULTS: A representative plot of the duty cycle is shown on data page 16. The actual duty cycle used was supplied by Chamberlain Manufacturing. The factor was calculated based on the worst case duty cycle. (The worst case duty cycle would be a 46 msec Word ON time during a 100 millisecond period.) The duty cycle factor is $20 \cdot \log(46/100) = -6.7\text{dB}$.

4.3 RADIATED MEASUREMENTS:

4.3.1 REQUIREMENTS: The test item must comply with the requirements of FCC "Code of Federal Regulations Title 47", Part 15, Subpart C.

ENGINEERING TEST REPORT NO. 22155

Paragraph 15.231(b) has the following radiated emission limits:

| Fundamental Frequency MHz | Field Intensity uV/m @ 3 meters | Field Strength Harmonics and Spurious @ 3 meters |
|---------------------------------|------------------------------------|--|
| 260 to 470 | 3,750 to 12,500* | 375 to 1,250* |

For 390 MHz, the limit at the fundamental is 9130.4uV/m @ 3m and the limit on the harmonics is 913uV/m @ 3m.

In addition, emissions appearing in the Restricted Bands of Operation listed in paragraph 15.205(a) shall not exceed the general requirements shown in paragraph 15.209.

4.3.2 PRELIMINARY RADIATED MEASUREMENTS: All preliminary tests were performed in a 17ft. x 14ft. x 8ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

The broadband measuring antenna was positioned at a 1 meter distance from the test item. The entire frequency range from 30MHz to 5.0GHz was investigated using a peak detector function. The data was then processed by the computer to equivalent field intensity at 3 meters using linear extrapolation. A -9.5dB (-9.5dB = 20 * Log (1m/3m)) distance correction factor has automatically been applied to the plotted emissions data to allow a direct comparison of the data obtained at 1 meter with the emissions limit at the 3 meter specification distance.

4.3.3 FINAL RADIATED MEASUREMENTS: Final measurements were manually performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-

tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4 1992 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Measurements were performed at a test distance of 3 meters using a peak detector. The peak detected levels were converted to average levels using a duty cycle factor which was computed from the pulse train.

Final radiated emissions measurements were performed on all significant broadband and narrowband emissions found in the preliminary sweeps using the following methods:

- 1) Measurements were made at the transmitting frequency, 390MHz, using a peak detector and a tuned dipole antenna.
- 2) Measurements were made at the second through tenth harmonics of the transmit frequency using a peak detector and a tuned dipole antenna below 1GHz and a peak detector and a double ridged waveguide antenna above 1GHz.
- 3) To ensure that maximum, or worst case, emission levels were measured, the following steps were taken:
 - (a) The test item was rotated so that all of its sides were exposed to the receiving antenna.
 - (b) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - (c) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.

4.3.3 RESULTS: The preliminary plots, with the test item transmitting at 390 MHz, are presented on data pages 17 through 19. The plots are presented for a reference only, and are not used as official data.

The final radiated levels, with the test item transmitting at 390 MHz, are presented on data page 20. As can be seen from the data, all emissions measured from the test item were within the specification limits. The emissions level closet to the limit (worst case) occurred at 1167.3MHz. The emissions level at this frequency was 3.2dB within the limit. See data page 20 for details. Photographs of the test configuration which yielded the highest, or worst case, radiated emission levels are shown on Figure 2.

4.4 OCCUPIED BANDWIDTH MEASUREMENTS:

4.4.1 REQUIREMENTS: In accordance with paragraph 15.231(c), all emissions within 20dB of the peak amplitude level of the center frequency are required to be within a band less than 0.25% of the center frequency wide.

4.4.2 PROCEDURES: The test item was placed on an 80cm high non-conductive stand. The unit was set to transmit continuously. With an antenna positioned nearby, occupied bandwidth emissions were displayed on the spectrum analyzer. The resolution bandwidth was set to 30 kHz and span was set to 2 MHz. The frequency spectrum near the fundamental was plotted.

4.4.3 RESULTS: The plot of the emissions near the fundamental frequency are presented on data page 21. As can be seen from this data page, the transmitter met the occupied bandwidth requirements.

5.0 CONCLUSION:

It was found that the Chamberlain Manufacturing model TCTX 120 Transmitter does meet the radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, for Intentional Radiators, when tested per ANSI C63.4-1992.

6.0 CERTIFICATION:

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specification.

The data presented in this test report pertains only to the test item at the test date. Any electrical or mechanical modification made to the test item subsequent to the specified test date will serve to invalidate the data and void this certification.

7.0 ENDORSEMENT DISCLAIMER:

This report must not be used to claim product endorsement by NVLAP or any agency of the US Government.

TABLE I: TEST EQUIPMENT LIST


ELITE ELECTRONIC ENG. INC.

Page: 1

| Eq ID | Equipment Description | Manufacturer | Model No. | Serial No. | Frequency Range | Cal Date | Cal Inv | Due Date |
|---------------------------------------|-------------------------|-----------------|------------|------------|-----------------|----------|---------|----------|
| Equipment Type: ANTENNAS | | | | | | | | |
| NBC0 | BICONICAL ANTENNA | TENSOR | 4104 | 2003 | 20-220MHZ | 07/28/99 | 12 | 07/28/00 |
| NDP1 | TUNED DIPOLE ANTENNA | EMCO | 3121C-DB3 | 313 | 140-400MHZ | 10/07/98 | 14 | 12/07/99 |
| NDQ1 | TUNED DIPOLE ANTENNA | EMCO | 3121C-DB4 | 313 | 400-1000MHZ | 10/07/98 | 14 | 12/07/99 |
| NSC3 | LOG SPIRAL ANTENNA | EMCO | 3101 | 2353 | 200-1000MHZ | 08/04/99 | 12 | 08/04/00 |
| NWHO | DOUBLE RIDGED WAVEGUIDE | TENSOR | 4105 | 2081 | 1-12.4GHZ | 08/27/99 | 12 | 08/27/00 |
| Equipment Type: CONTROLLERS | | | | | | | | |
| CDD2 | COMPUTER | HEWLETT PACKARD | D4171A#ABA | US61654645 | --- | | | N/A |
| CDE0 | COMPUTER | HEWLETT PACKARD | D4139A#ABA | US62651923 | --- | | | N/A |
| CMA0 | MULTI-DEVICE CONTROLLER | EMCO | 2090 | 9701-1213 | --- | | | N/A |
| Equipment Type: PRINTERS AND PLOTTERS | | | | | | | | |
| HRE1 | LASER JET 5P | HEWLETT PACKARD | C3150A | USHB061052 | --- | | | N/A |
| HRE4 | LASER JET 5P | HEWLETT PACKARD | C3150A | USHB080992 | --- | | | N/A |
| Equipment Type: RECEIVERS | | | | | | | | |
| RAC2 | SPECTRUM ANALYZER | HEWLETT PACKARD | 85660B | 3638A08770 | 100HZ-22GHZ | 10/30/98 | 12 | 10/30/99 |
| RACC | RF PRESELECTOR | HEWLETT PACKARD | 85685A | 2648A00507 | 20HZ-2GHZ | 02/01/99 | 12 | 02/01/00 |
| RAF4 | QUASIPeAK ADAPTER | HEWLETT PACKARD | 85650A | 2043A00320 | .01-1000MHZ | 02/01/99 | 12 | 02/01/00 |
| RAKG | RF SECTION | HEWLETT PACKARD | 85462A | 3549A00284 | 9KHZ-6.5GHZ | 02/02/99 | 12 | 02/02/00 |
| RAKH | RF FILTER SECTION | HEWLETT PACKARD | 85460A | 3448A00324 | --- | 02/02/99 | 12 | 02/02/00 |

Cal. Interval: Listed in Months I/O: Initial Only N/A: Not Applicable


Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

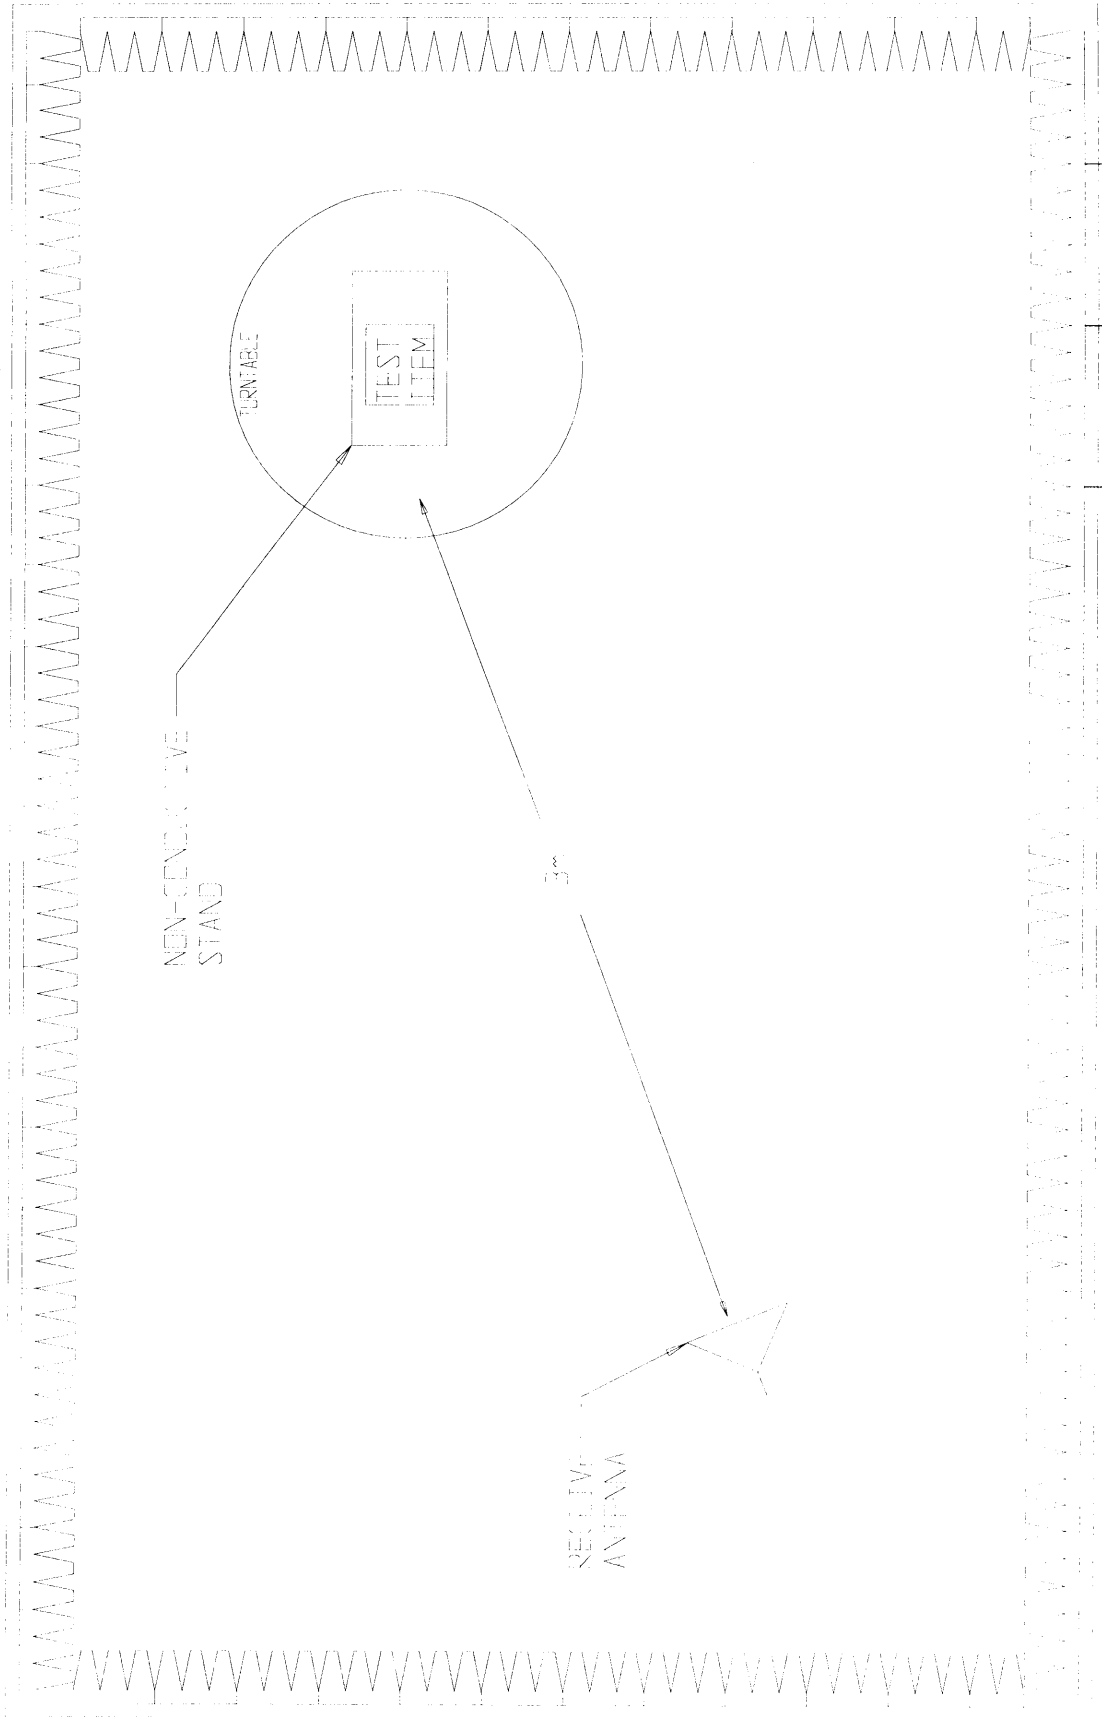


PTR 22:55

FIGURE 1. BUCK THORNTON TEST ITEM AND REFLECTIVE ANTENNA SETUP

FIGURE 2a

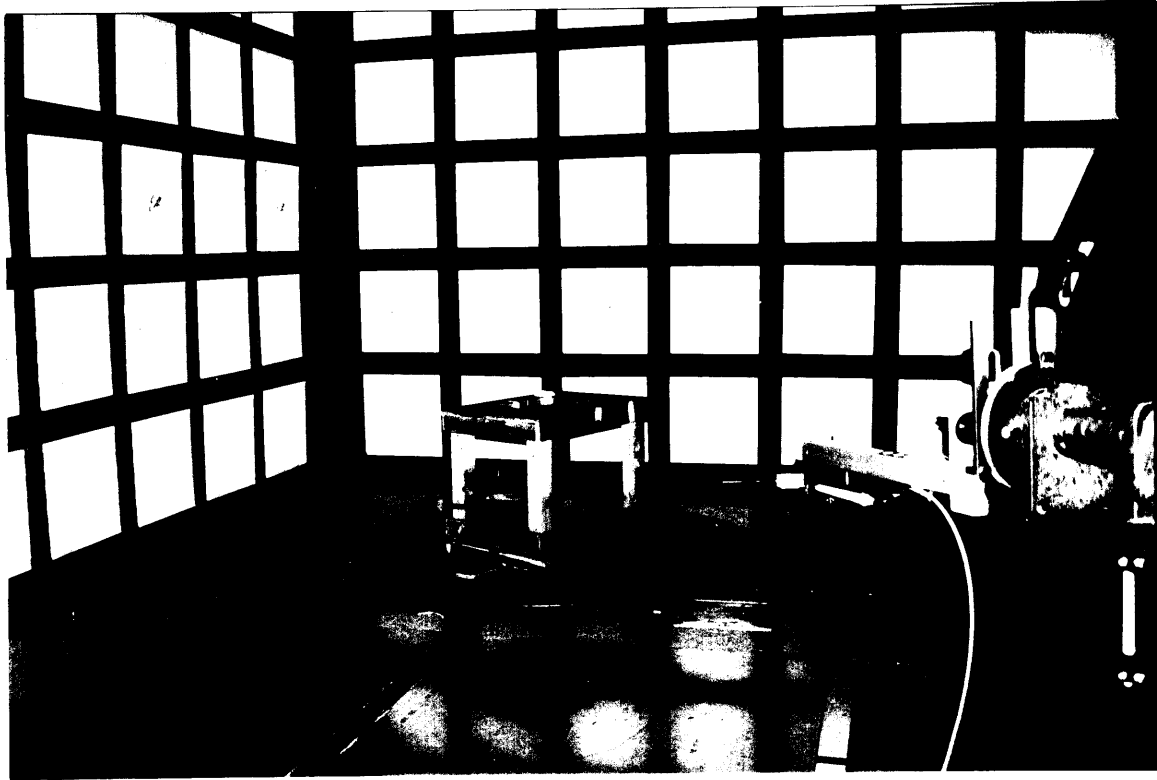


TEST SETUP FOR RADIATED EMISSIONS MEASUREMENTS, 390MHz
HORIZONTAL POLARIZATION

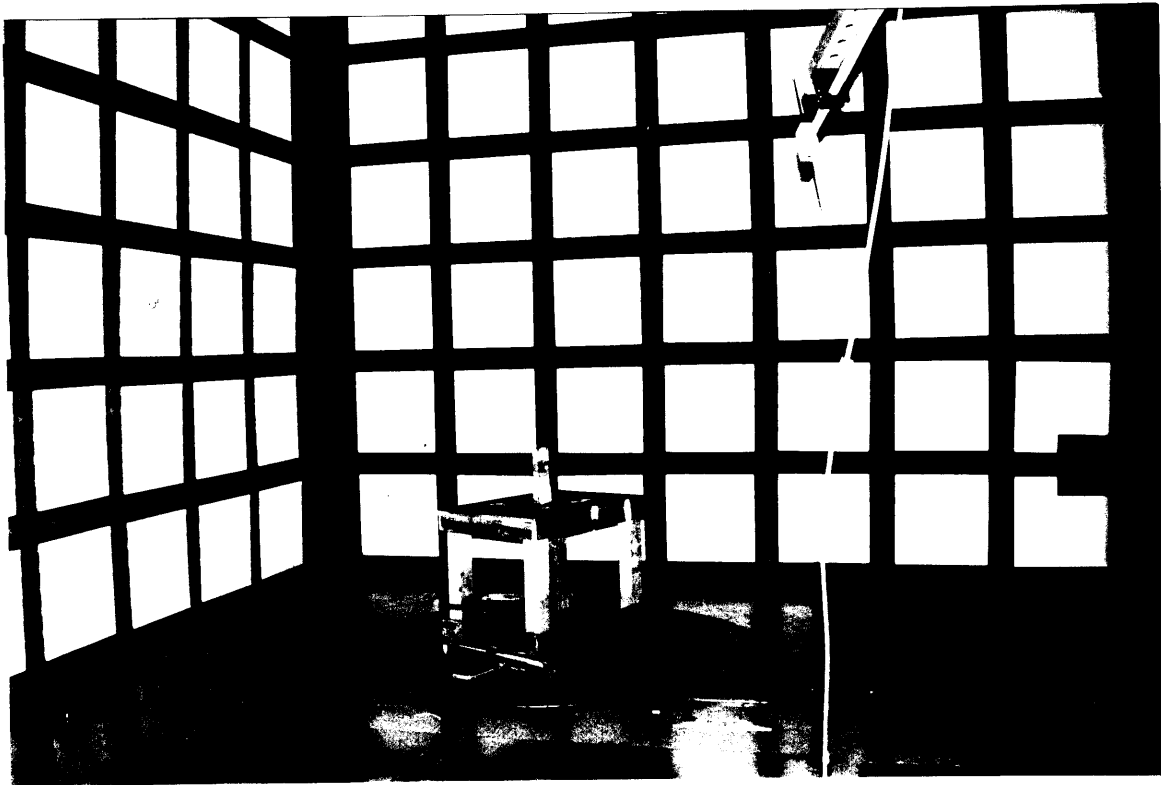


TEST SETUP FOR RADIATED EMISSIONS MEASUREMENTS, 390MHz
VERTICAL POLARIZATION

FIGURE 2b

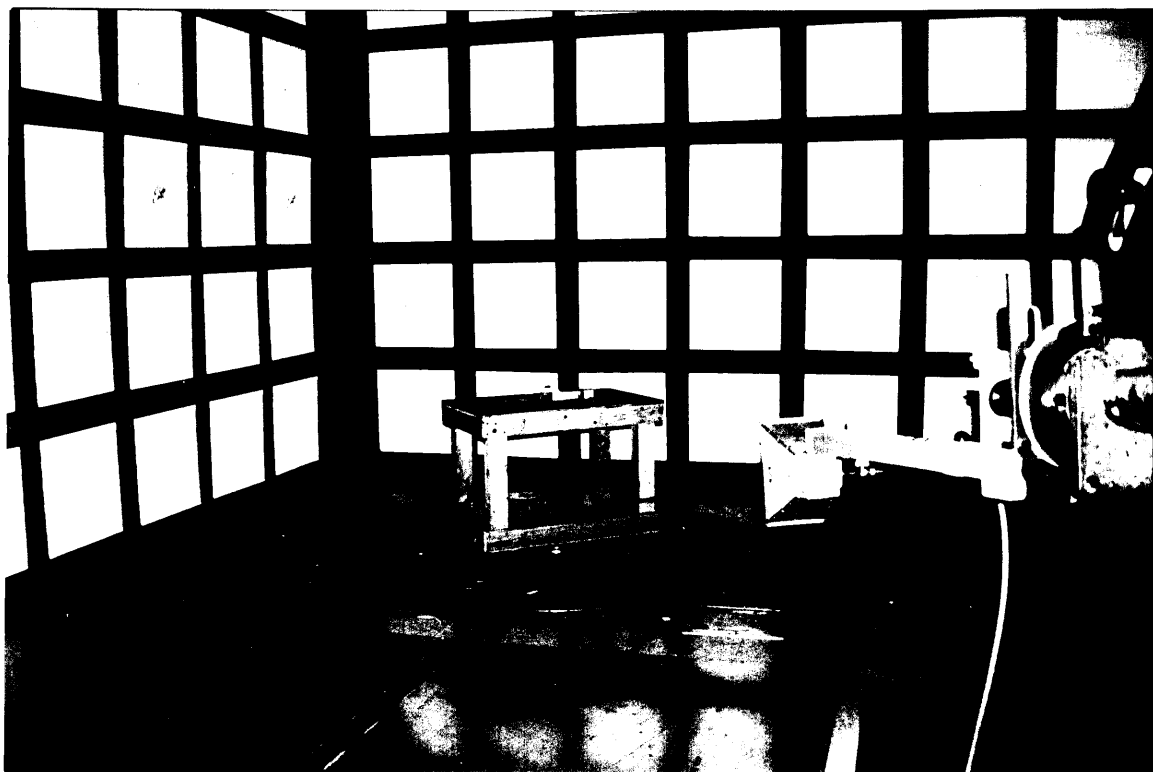


TEST SETUP FOR RADIATED EMISSIONS MEASUREMENTS
MAXIMIZED FOR MEASUREMENT OF WORST CASE EMISSIONS
HORIZONTAL POLARIZATION

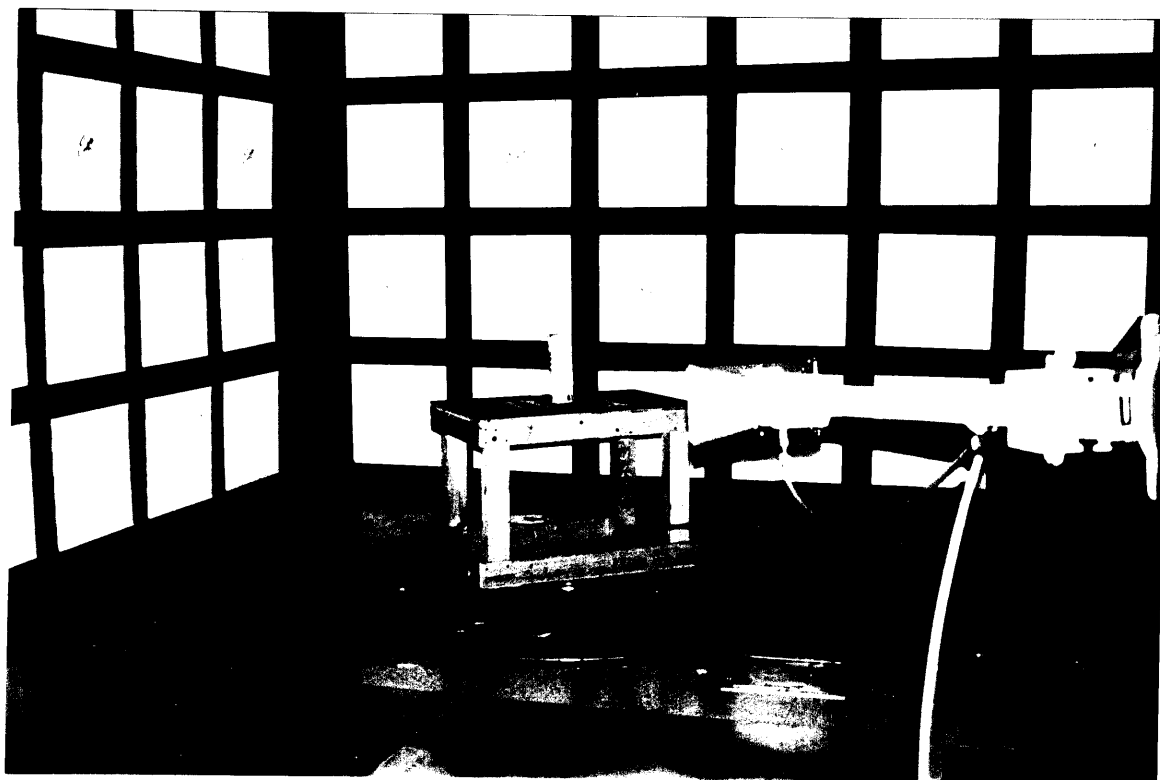

TEST SETUP FOR RADIATED EMISSIONS MEASUREMENTS
MAXIMIZED FOR MEASUREMENT OF WORST CASE EMISSIONS
VERTICAL POLARIZATION

ELITE ELECTRONIC ENGINEERING Co.
Downers Grove, IL 60515

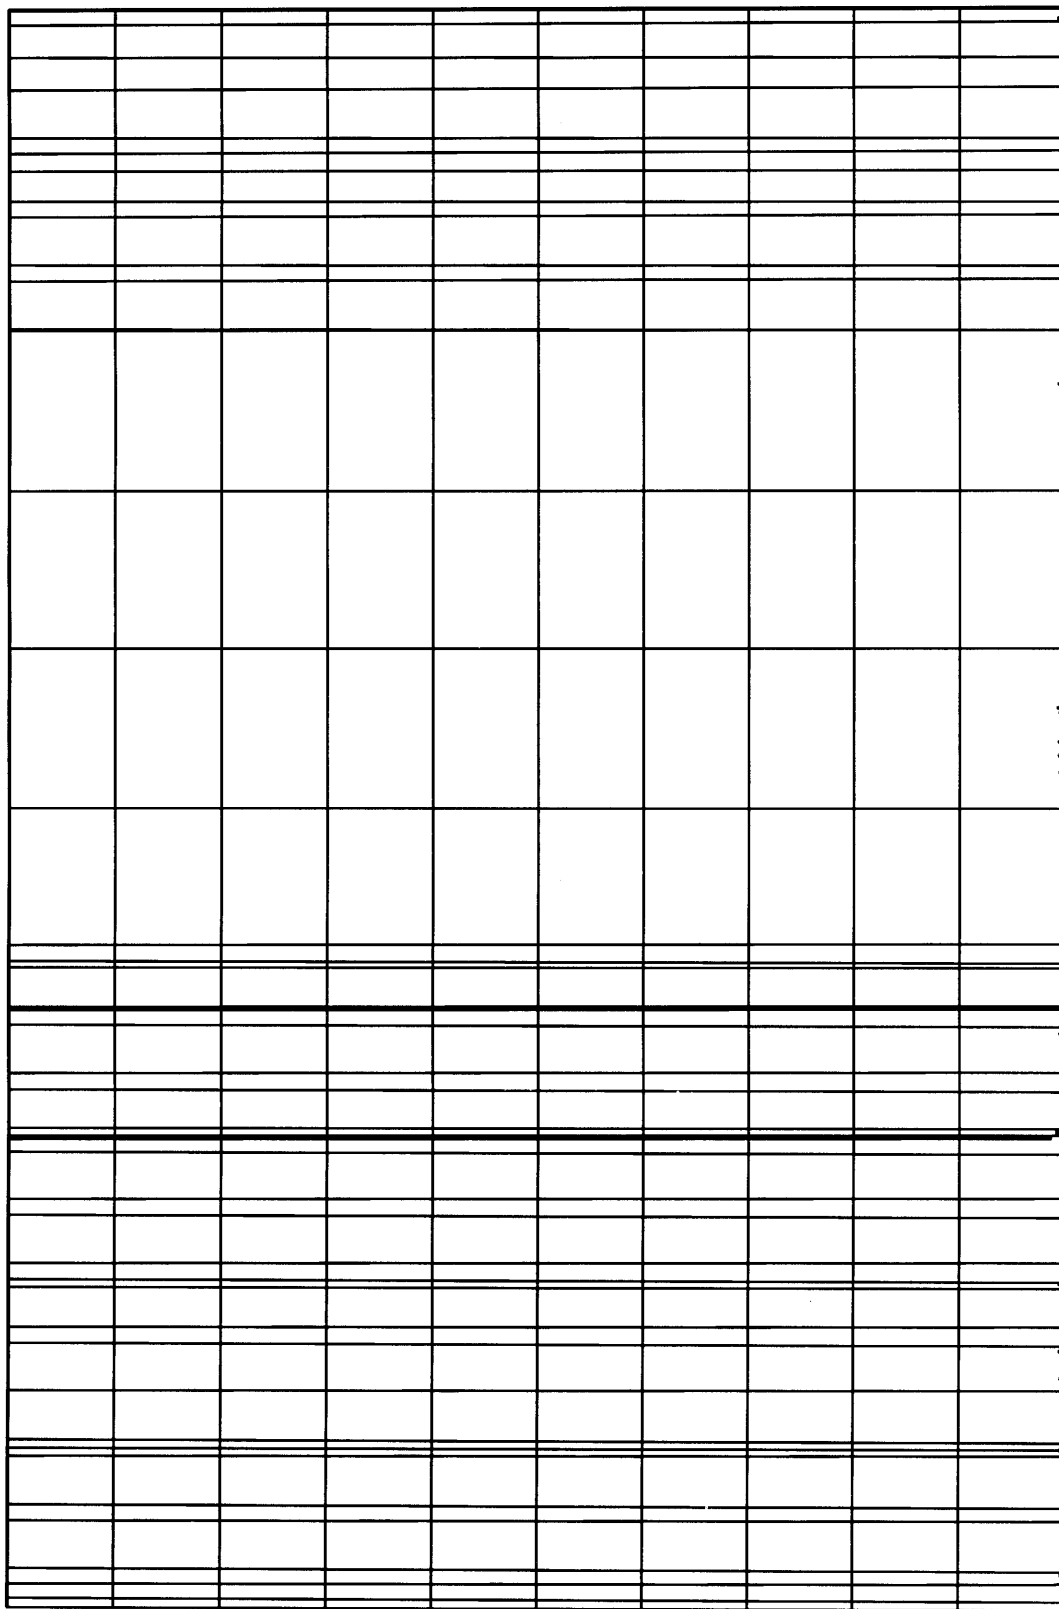

TRANSMITTER DUTY CYCLE
 FREQUENCY: 389.0631 MHz
 ON TIME : 32.368 mSEC
 OFF TIME : 67.632 mSEC
 DUTY CYCLE = .32 or -9.9 dB
 COMPUTED OVER 100 mSEC

MANUFACTURER : CHAMBERLAIN
 MODEL : TCTX120
 S/N : NONE ASSIGNED
 TEST DATE : 27 Oct 1999
 NOTES : Tx @ 390MHz


ELITE ELECTRONIC ENGINEERING Co.
Downers Grove, Ill. 60515

UNIV_EM_RUN RUN 1

UK90 09/13/99

EEC

TEST : RADIATED NARROWBAND EMISSIONS
 SPEC : FCC 15C
 MANUFACTURER : CHAMBERLAIN MANUFACTURING
 MODEL No. : TCTX120
 S/N : NONE ASSIGNED
 MODE : Tx @ 390MHz
 DATE TESTED : 27 Oct 1999 M. LONGINOTTI
 NOTES :
 ANT POLARITY : VERTICAL

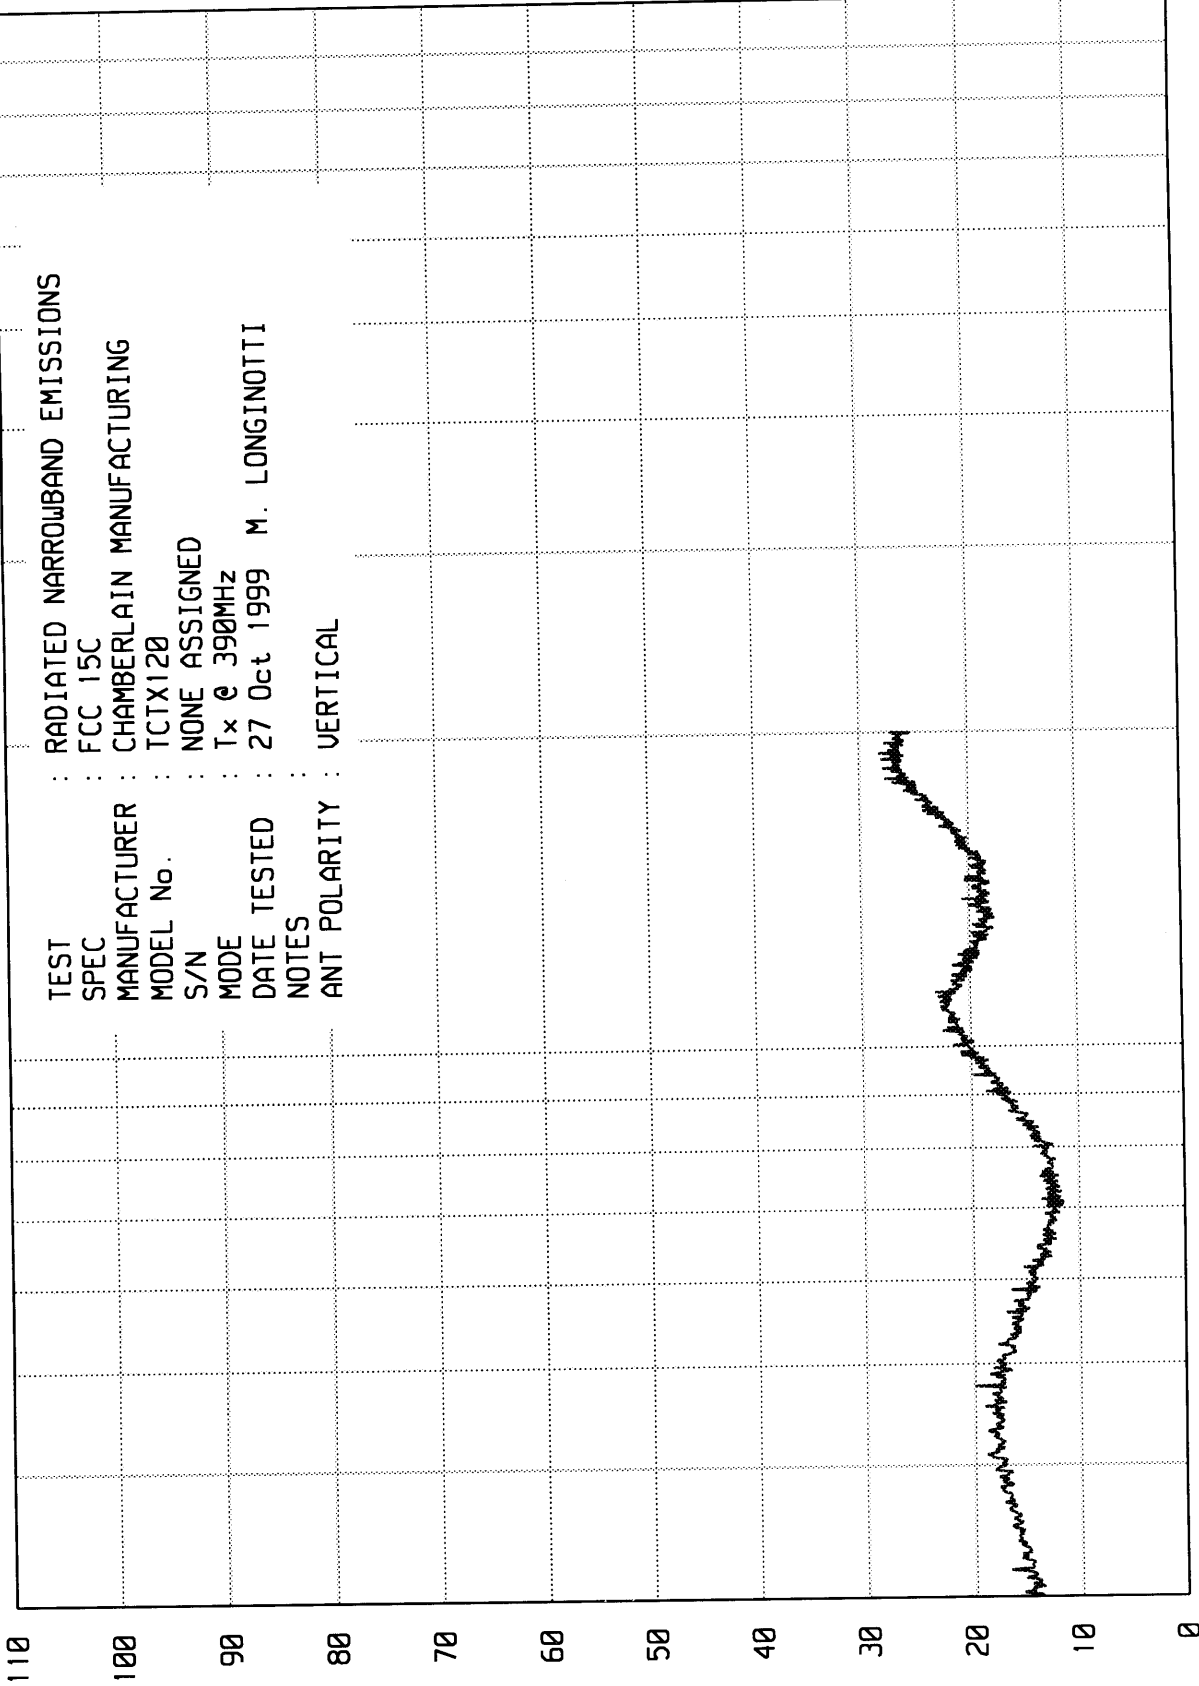

RADIATED NARROWBAND EMISSIONS - dBu/m

Page 17 of 21

START = 30

FREQUENCY - MHz


STOP = 1000

ELITE ELECTRONIC ENGINEERING Co.

Downers Grove, Ill. 60515

WJKA08 09/13/99

UNIU_EM RUN 1

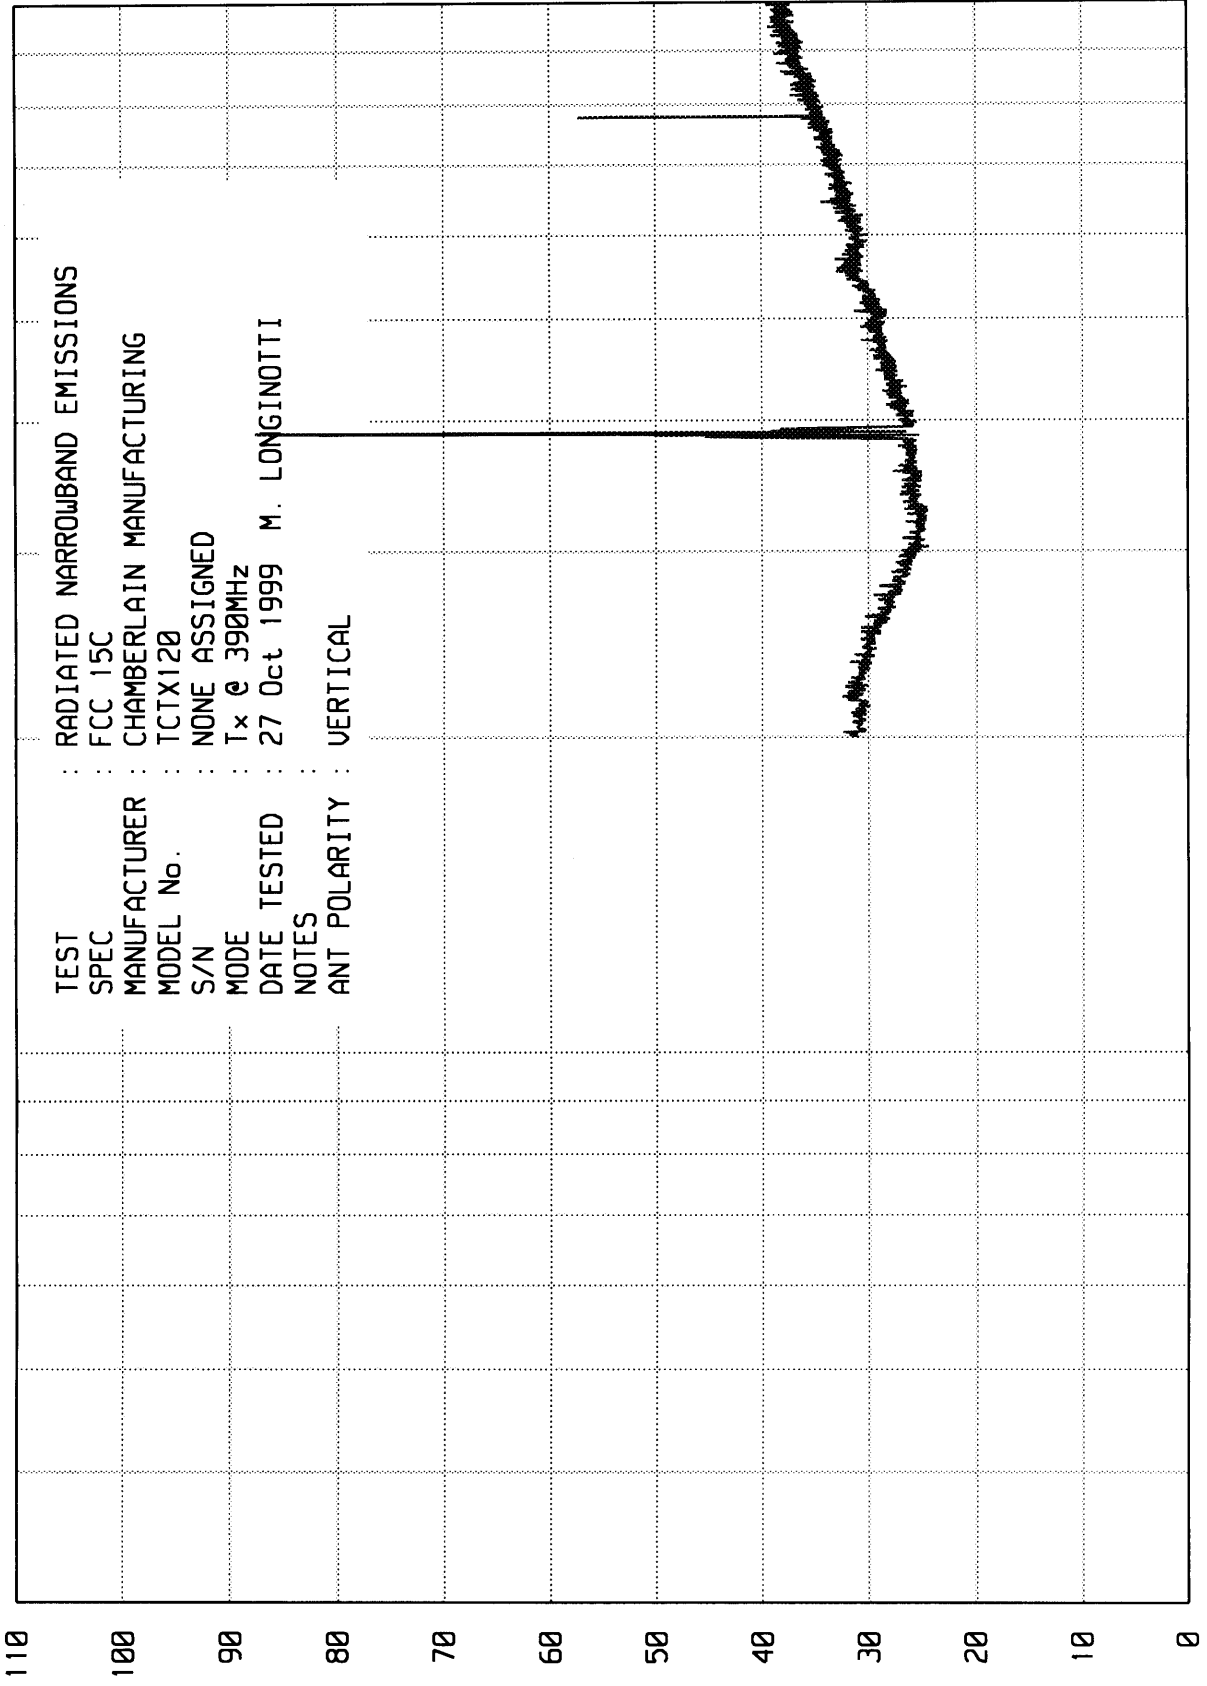

TEST : RADIATED NARROWBAND EMISSIONS
 SPEC : FCC 15C
 MANUFACTURER : CHAMBERLAIN MANUFACTURING
 MODEL No. : TCTX120
 S/N : NONE ASSIGNED
 MODE : Tx @ 390MHz
 DATE TESTED : 27 Oct 1999 M. LONGINOTTI
 NOTES :
 ANT POLARITY : VERTICAL

RADIATED NARROWBAND EMISSIONS - dBu/m

START = 30

FREQUENCY - MHz


STOP = 1000

ELITE ELECTRONIC ENGINEERING Co.

Downers Grove, Ill. 60515

WKAB 09/13/99

UNIV_EM RUN RUN 2

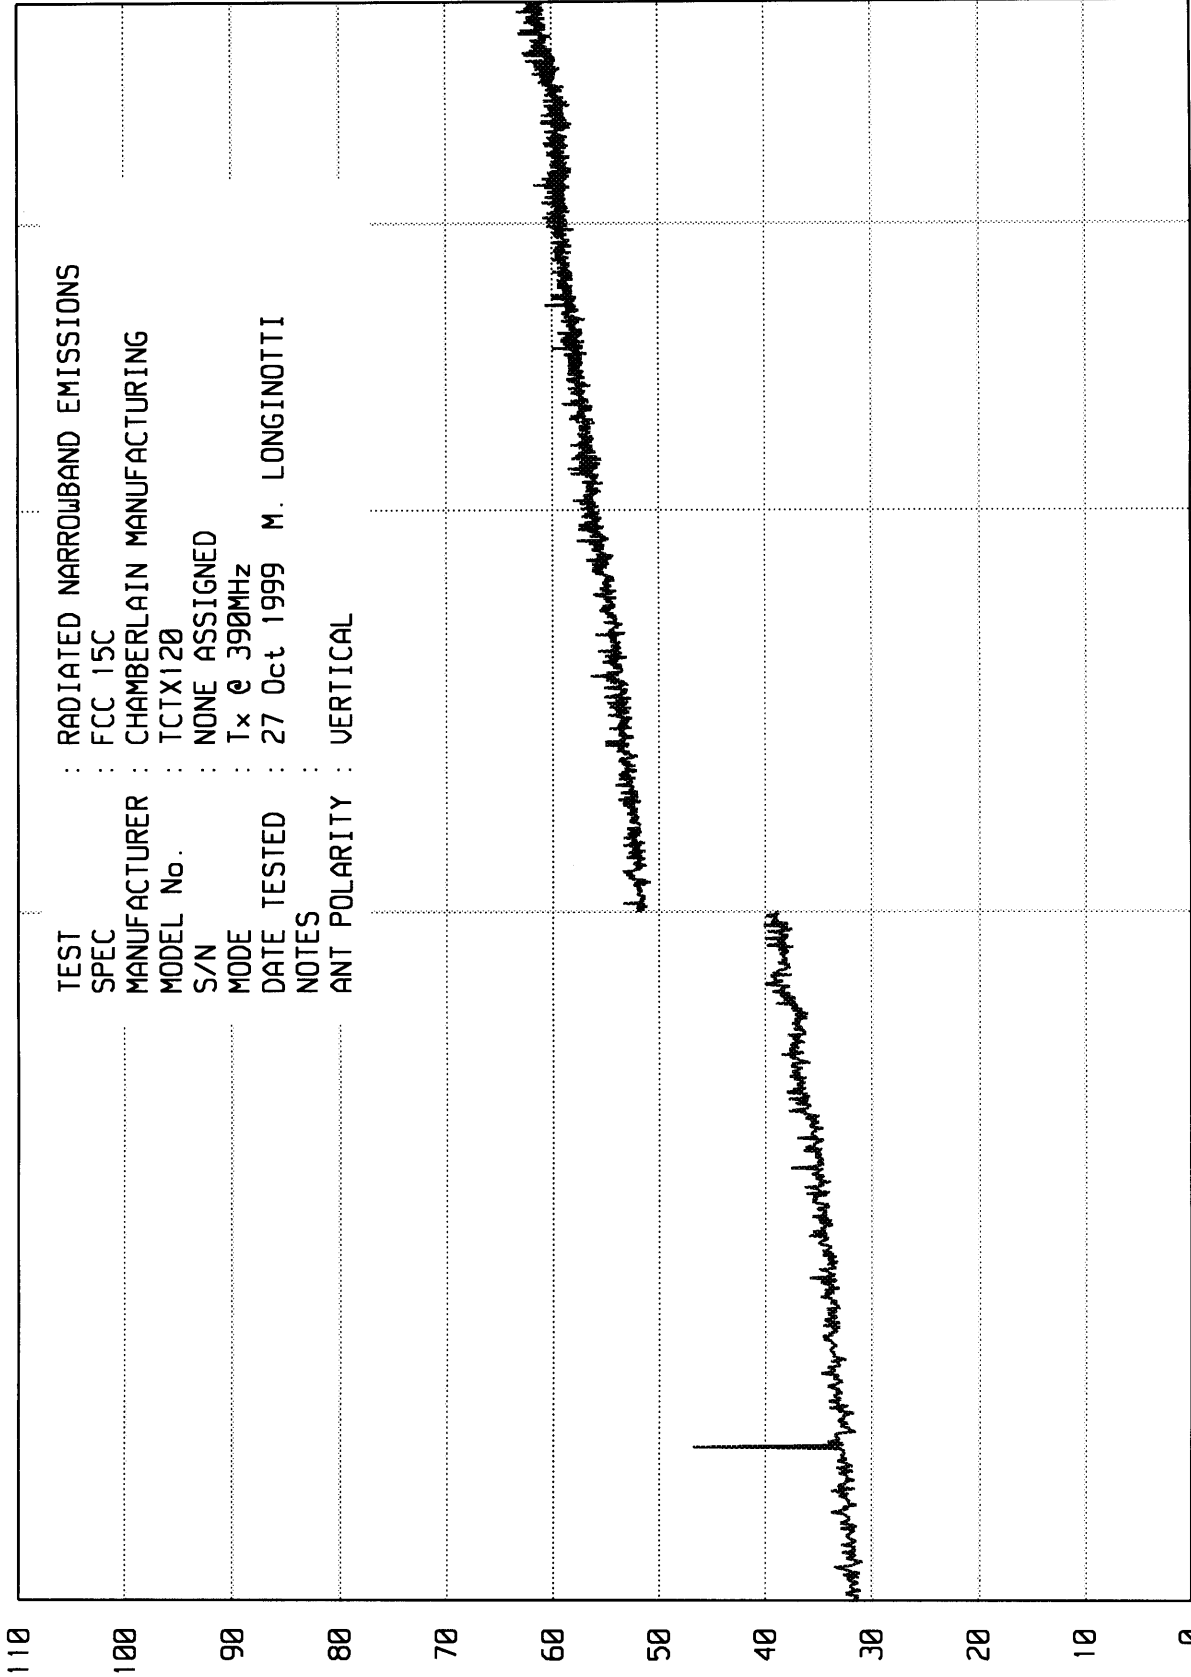

TEST : RADIATED NARROWBAND EMISSIONS
 SPEC : FCC 15C
 MANUFACTURER : CHAMBERLAIN MANUFACTURING
 MODEL No. : TCTX120
 S/N : NONE ASSIGNED
 MODE : Tx @ 390MHz
 DATE TESTED : 27 Oct 1999 M. LONGINOTTI
 NOTES :
 ANT POLARITY : VERTICAL

RADIATED NARROWBAND EMISSIONS - dBu/m

START = 1000

FREQUENCY - MHz

STOP = 5000

ETR NO. 22155
DATA SHEET

SPECIFICATION : FCC PART 15C (REV OCT 1, 94) TRANSMITTER OPEN FIELD DATA
 MANUFACTURER : CHAMBERLAIN MANUFACTURING
 MODEL NO. : TCTX 120
 SERIAL NO. : NONE ASSIGNED
 TEST DATE : 27 OCT 1999
 NOTES : Tx @ 390MHz
 TEST ANTENNA : ROBERTS DIPOLE & DRWG ANTENNAS

| FREQUENCY (MHz) | ANT POL | METER READING (dBuV) | AMBIENT | CBL FACTOR (dB) | ANTENNA FACTOR (dB) | DUTY CYCLE (dB) | TOTAL dBuV/m @3m | TOTAL uV/m @3m | LIMIT uV/m @3m | NOTE |
|--------------------|------------|----------------------------|---------|-----------------------|---------------------------|-----------------------|------------------------|----------------------|----------------------|------|
| 389.13 | V | 53.3 | | 2.2 | 21.1 | -6.7 | 69.9 | 3126.1 | 9130.4 | |
| 389.13 | H | 59.1 | | 2.2 | 21.1 | -6.7 | 75.7 | 6095.4 | 9130.4 | |
| 778.27 | V | 27.1 | | 3.5 | 26.1 | -6.7 | 50.0 | 316.2 | 913.0 | |
| 778.29 | H | 24.6 | | 3.5 | 26.1 | -6.7 | 47.5 | 237.1 | 913.0 | |
| 1167.30 | V | 29.9 | | 3.4 | 24.2 | -6.7 | 50.8 | 346.7 | 500.0 | * |
| 1167.50 | H | 28.9 | | 3.4 | 24.2 | -6.7 | 49.8 | 309.0 | 500.0 | * |
| 1556.60 | V | 20.2 | | 3.8 | 25.4 | -6.7 | 42.7 | 136.5 | 500.0 | * |
| 1556.70 | H | 18.8 | | 3.8 | 25.4 | -6.7 | 41.3 | 116.1 | 500.0 | * |
| 1945.70 | V | 10.6 | AMBIENT | 4.3 | 27.3 | 0.0 | 42.2 | 128.8 | 913.0 | |
| 1945.70 | H | 10.3 | AMBIENT | 4.3 | 27.3 | 0.0 | 41.9 | 124.5 | 913.0 | |
| 2334.90 | V | 10.6 | AMBIENT | 4.6 | 28.5 | 0.0 | 43.7 | 153.1 | 500.0 | * |
| 2334.80 | H | 9.8 | AMBIENT | 4.6 | 28.5 | 0.0 | 42.9 | 139.6 | 500.0 | * |
| 2723.90 | V | 10.6 | AMBIENT | 4.9 | 29.9 | 0.0 | 45.4 | 186.2 | 500.0 | * |
| 2724.00 | H | 10.1 | AMBIENT | 4.9 | 29.9 | 0.0 | 44.9 | 175.8 | 500.0 | * |
| 3113.30 | V | 5.0 | AMBIENT | 5.2 | 31.4 | 0.0 | 41.6 | 120.2 | 913.0 | |
| 3113.40 | H | 6.3 | AMBIENT | 5.2 | 31.4 | 0.0 | 42.9 | 139.6 | 913.0 | |
| 3502.00 | V | 4.3 | AMBIENT | 5.5 | 32.6 | 0.0 | 42.4 | 131.8 | 913.0 | |
| 3502.40 | H | 3.9 | AMBIENT | 5.5 | 32.6 | 0.0 | 42.0 | 125.9 | 913.0 | |
| 3891.40 | V | 4.0 | AMBIENT | 5.8 | 33.4 | 0.0 | 43.2 | 144.5 | 500.0 | * |
| 3891.40 | H | 3.3 | AMBIENT | 5.8 | 33.4 | 0.0 | 42.5 | 133.4 | 500.0 | * |

* DENOTES A FREQUENCY CONFLICT WITH RESTRICTED BANDS

CHECKED BY:

Mark E. Longinotti
M. LONGINOTTI


ELITE ELECTRONIC ENGINEERING CO

MKR 389.170 MHz
-48.70 dBm

hp

REF -18.1 dBm ATTN 0 dB

10 dB/

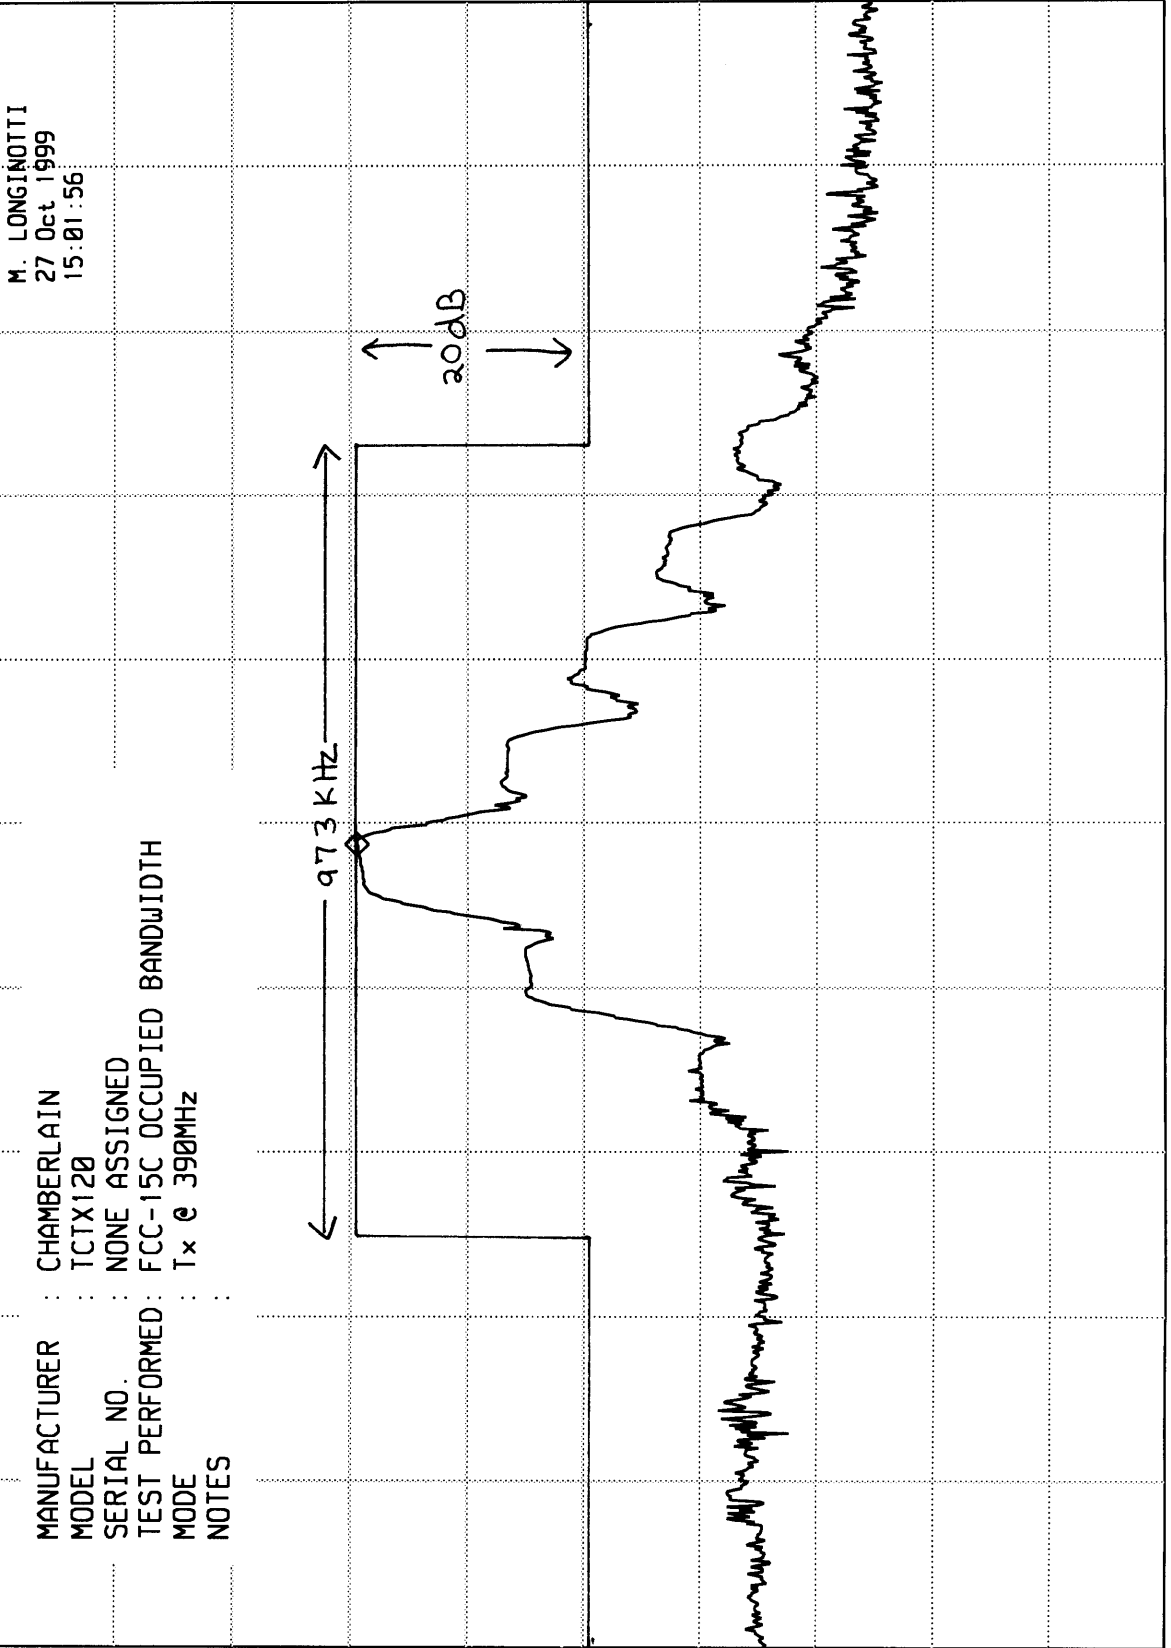

M. LONGINOTTI
27 Oct 1999
15:01:56

MANUFACTURER : CHAMBERLAIN
 MODEL : TCTX120
 SERIAL NO. : NONE ASSIGNED
 TEST PERFORMED : FCC-15C OCCUPIED BANDWIDTH
 MODE : Tx @ 390MHz
 NOTES :

SPAN 2.00 MHz
SWP 20.0 msec

VBW 100 kHz

CENTER 389.19 MHz
RES BW 30 kHz