

# RF MEASUREMENT REPORT

---

**FCC ID:** HD5-CK62X00  
**Applicant:** Honeywell International Inc  
Honeywell Safety and Productivity Solutions  
**Product:** Mobile Computer  
**Model No.:** CK62X00  
**Brand Name:** Honeywell  
**FCC Classification:** Digital Transmission System (DTS)  
**FCC Rule Part(s):** Part 15 Subpart C (Section 15.247)  
**Result:** Complies  
**Received Date:** 2024-06-04  
**Test Date:** 2024-07-04 ~ 2024-07-24

**Reviewed By:**

\_\_\_\_\_  
Ada Zhang

**Approved By:**

\_\_\_\_\_  
Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

### Revision History

Report No.	Version	Description	Issue Date	Note
2406RSU006-U3	V01	Initial Report	2024-08-16	Valid

CONTENTS

Description	Page
<b>1. General Information .....</b>	<b>5</b>
1.1. Applicant .....	5
1.2. Manufacturer .....	5
1.3. Testing Facility .....	5
1.4. Product Information.....	6
1.5. Radio Specification under Test .....	7
1.6. Working Frequencies .....	7
1.7. Antenna Details.....	8
<b>2. Test Configuration .....</b>	<b>9</b>
2.1. Test Mode.....	9
2.2. Test System Connection Diagram.....	10
2.3. Test Software .....	10
2.4. Applied Standards.....	11
2.5. Test Environment Condition .....	11
<b>3. Antenna Requirements .....</b>	<b>12</b>
<b>4. Measuring Instrument .....</b>	<b>13</b>
<b>5. Decision Rules and Measurement Uncertainty .....</b>	<b>15</b>
5.1. Decision Rules .....	15
5.2. Measurement Uncertainty.....	15
<b>6. Test Result.....</b>	<b>16</b>
6.1. Summary.....	16
6.2. 6dB Bandwidth Measurement.....	17
6.2.1. Test Limit .....	17
6.2.2. Test Procedure .....	17
6.2.3. Test Setting .....	17
6.2.4. Test Setup .....	17
6.2.5. Test Result .....	17
6.3. Output Power Measurement .....	18
6.3.1. Test Limit .....	18
6.3.2. Test Procedure .....	18
6.3.3. Test Setting .....	18
6.3.4. Test Setup .....	18
6.3.5. Test Result .....	18
6.4. Power Spectral Density Measurement .....	19
6.4.1. Test Limit .....	19

6.4.2.	Test Procedure .....	19
6.4.3.	Test Setting .....	19
6.4.4.	Test Setup .....	19
6.4.5.	Test Result .....	20
6.5.	Conducted Band Edge and Out-of-Band Emissions Measurement .....	21
6.5.1.	Test Limit .....	21
6.5.2.	Test Procedure .....	21
6.5.3.	Test Setting .....	21
6.5.4.	Test Setup .....	21
6.5.5.	Test Result .....	22
6.6.	Radiated Spurious Emission Measurement.....	23
6.6.1.	Test Limit .....	23
6.6.2.	Test Procedure .....	23
6.6.3.	Test Setting .....	23
6.6.4.	Test Setup .....	25
6.6.5.	Test Result .....	26
6.7.	Radiated Restricted Band Edge Measurement .....	27
6.7.1.	Test Limit .....	27
6.7.2.	Test Procedure .....	28
6.7.3.	Test Setting .....	28
6.7.4.	Test Setup .....	29
6.7.5.	Test Result .....	29
6.8.	AC Conducted Emissions Measurement .....	30
6.8.1.	Test Limit .....	30
6.8.2.	Test Setup .....	30
6.8.3.	Test Result .....	30
<b>Appendix A</b>	<b>- Test Result.....</b>	<b>31</b>
A.1	Duty Cycle Test Result .....	31
A.2	6dB Bandwidth Test Result .....	33
A.3	Output Power Test Result .....	38
A.4	Power Spectral Density Test Result.....	40
A.5	Conducted Band Edge and Out-of-Band Emissions Test Result.....	54
A.6	Radiated Spurious Emission Test Result.....	106
A.7	Radiated Restricted Band Edge Test Result.....	117
A.8	AC Conducted Emissions Test Result .....	217
<b>Appendix B</b>	<b>- Test Setup Photograph .....</b>	<b>221</b>
<b>Appendix C</b>	<b>- EUT Photograph .....</b>	<b>222</b>



#### 1.4. Product Information

Product Name	Mobile Computer
Model No.	CK62X00
EUT Identification No.	20240604Sample#11 (Conducted) 20240604Sample#09 (Radiated)
Wi-Fi Specification	802.11a/b/g/n/ac/ax
Bluetooth Specification	V5.3 dual mode
Antenna Information	Refer to Section 1.7
Operating Temp.	-20 ~ 50°C
Power Type	By Battery
Accessories	
Rechargeable Li-ion Battery	Model No.: CK65-BTSC Nominal Voltage: 3.6V Rated Capacity: 6800mAh Nominal Capacity: 7000mAh/25.2Wh
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

### 1.5. Radio Specification under Test

Frequency Range	802.11b/g/n-HT20/ax-HE20: 2412 ~ 2462MHz VHT20: 2412 ~ 2462MHz 802.11n-HT40/ax-HE40: 2422 ~ 2452MHz VHT40: 2422 ~ 2452MHz	
Channel Number	802.11b/g/n-HT20/ax-HE20: 11 VHT20: 11 802.11n-HT40/ax-HE40: 7 VHT40: 7	
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM VHT: OFDM 802.11ax: OFDMA	
Data Rate	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ax: up to 573.6Mbps VHT: up to 400Mbps	
Channel Puncturing Function	<input type="checkbox"/> Supported	<input checked="" type="checkbox"/> Unsupported
Support RU	<input checked="" type="checkbox"/> Full RU	<input checked="" type="checkbox"/> Partial RU

### 1.6. Working Frequencies

#### 802.11b/g/n-HT20/ax-HE20/VHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

#### 802.11n-HT40/ax-HE40/VHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

### 1.7. Antenna Details

Antenna Type	Frequency Band (MHz)	Antenna Gain (dBi)		Directional Gain (dBi)	
		Ant 2	Ant 3	Uncorrelated (For Power)	Correlated (For PSD)
Wi-Fi Antennas					
PIFA	2400 ~ 2500	3.13	1.92	3.13	6.14
	5150 ~ 5350	3.76	3.97	3.97	6.98
	5470 ~ 5725	4.37	4.54	4.54	7.55
	5725 ~ 5850	4.21	3.76	4.21	7.22
	5925 ~ 6425	7.22	4.89	7.22	10.23
	6425 ~ 6525	4.72	4.93	4.93	7.94
	6525 ~ 6875	5.49	4.93	5.49	8.50
	6875 ~ 7125	4.95	3.40	4.95	7.96

**Note:**

The EUT supports Cyclic Delay Diversity (CDD) mode, For CDD transmissions, directional gain is calculated as follows.

Directional gain =  $G_{ANT\ Max}$  + Array Gain, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,
- For power measurements on IEEE 802.11 devices,

Array Gain =  $10 \log (N_{ANT} / N_{SS})$  dB;

Array Gain = 0 dB for  $N_{ANT} \leq 4$ ;




## 2. Test Configuration

### 2.1. Test Mode

CDD Mode
Mode 1: Transmit by 802.11b (1Mbps)
Mode 2: Transmit by 802.11g (6Mbps)
Mode 3: Transmit by 802.11n-HT20 _N <sub>SS</sub> =1 (MCS0)
Mode 4: Transmit by 802.11n-HT40 _N <sub>SS</sub> =1 (MCS0)
Mode 5: Transmit by 802.11ax-HE20 _N <sub>SS</sub> =1 (MCS0)
Mode 6: Transmit by 802.11ax-HE40 _N <sub>SS</sub> =1 (MCS0)
Mode 7: Transmit by VHT20 _N <sub>SS</sub> =1 (MCS0)
Mode 8: Transmit by VHT40 _N <sub>SS</sub> =1 (MCS0)
Notes: <ol style="list-style-type: none"><li>1. All modes of operation and data rates were investigated, so all RF test requirements shall be executed at the worst data rate.</li><li>2. For CDD mode, this device supports 2N<sub>SS</sub> and power level is the same of spatial multiplexing. The worst case is N<sub>SS</sub>=1.</li><li>3. For 802.11ax, the EUT supports 26/52/106/242/484-tone RU, The PSD of the partial RU has been minimized to be less than full RU.</li><li>4. The 242-tone RU is covered by 20MHz channel and 484-tone RU is covered by 40MHz channel.</li></ol>

## 2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

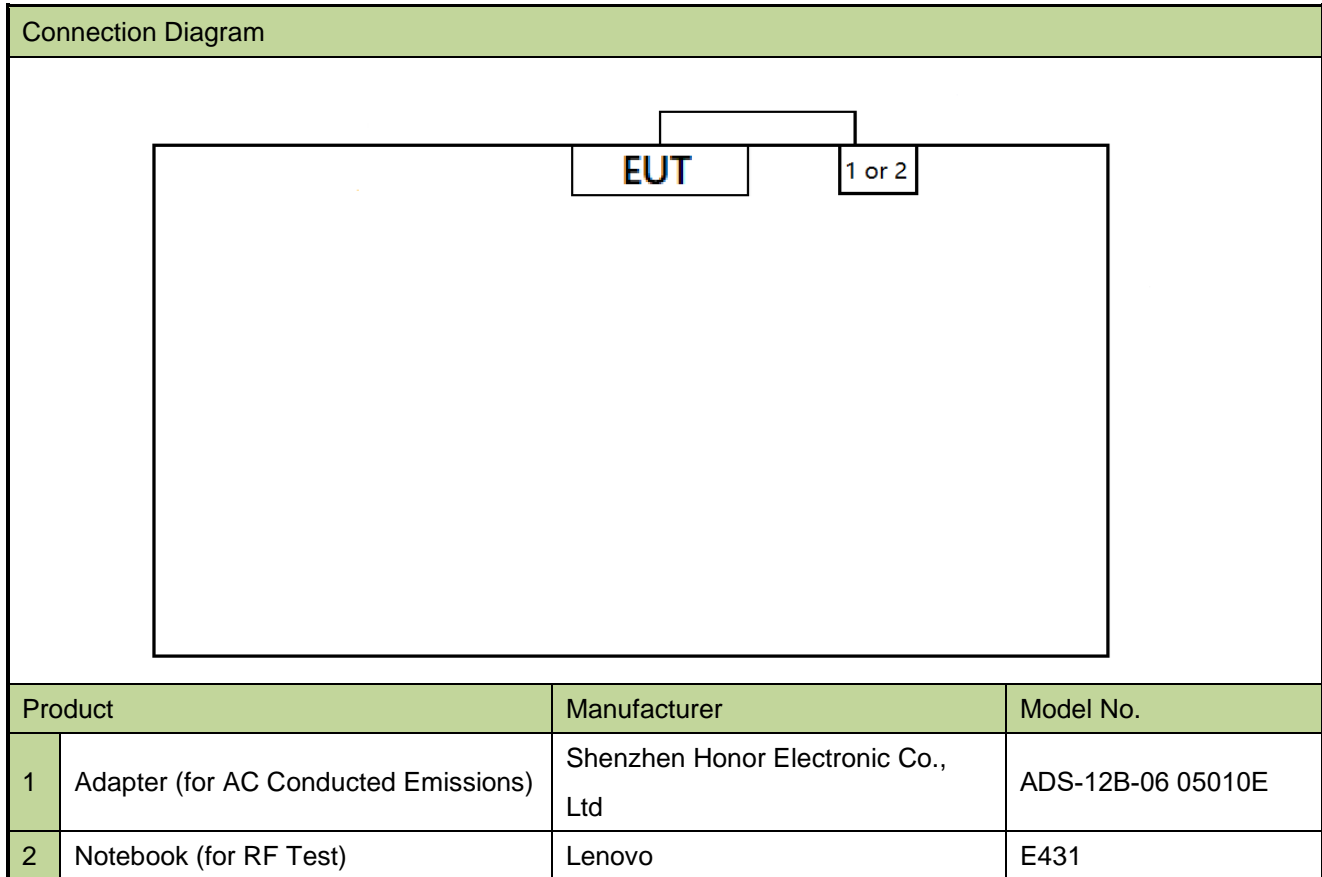

## 2.3. Test Software

The test utility software used during testing was “QRCT”, and the version was 4.0.211.0.

Final power setting please refer to operational description.

## 2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- KDB 662911 D01v02r01
- ANSI C63.10-2013

## 2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

### 3. Antenna Requirements

#### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

#### **Conclusion:**

The unit complies with the requirement of §15.203.

#### 4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Active Loop Antenna	Schwarzbeck	FMZB 1519-60 D	MRTSUE07076	1 year	2024-12-04	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2024-11-04	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2025-01-11	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2025-04-18	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2025-05-08	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2024-10-11	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2025-05-06	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11263	1 year	2024-11-07	WZ-AC2
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2025-04-17	WZ-AC2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2024-09-27	WZ-SR2
Four-Line V-Network	R&S	ENV432	MRTSUE06615	1 year	2024-09-27	WZ-SR2
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	5 years	2026-12-20	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2025-05-12	WZ-SR2
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2025-05-08	WZ-SR2
USB Power Sensor	Keysight	U2021XA	MRTSUE06446	1 year	2025-05-08	WZ-SR5
Signal Generator	R&S	SMU200A	MRTSUE06490	1 year	2025-02-03	WZ-SR5
Signal Generator	R&S	SMBV100B	MRTSUE07095	1 year	2025-04-09	WZ-SR5
Bluetooth Test Set	Anritsu	MT8852B	MRTSUE06389	1 year	2025-05-08	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2025-02-03	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2025-05-08	WZ-SR5
Signal Generator	Agilent	E4438C	MRTSUE06081	1 year	2025-02-03	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2025-05-12	WZ-SR5
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2024-12-17	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2024-08-09	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2024-10-11	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2024-11-09	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2025-05-15	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2025-04-19	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2024-10-23	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2024-10-25	WZ-AC1

---

Software	Version	Function
e3	230711	EMI Test Software
Controller_MF 7802	1.02	RE Antenna & Turntable
Controller_MF 7802	2.03C	RE Antenna & Turntable
BenchVue Power Meter	2018.1	Power

## 5. Decision Rules and Measurement Uncertainty

### 5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

### 5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement</b>
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
<b>Radiated Emission Measurement</b>
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.61dB Coplanar: 9kHz~30MHz: 2.62dB Horizontal: 30MHz~200MHz: 3.79dB 200MHz~1GHz: 3.91dB 1GHz~40GHz: 4.99dB Vertical: 30MHz~200MHz: 4.06dB 200MHz~1GHz: 5.21dB 1GHz~40GHz: 4.90dB
<b>Spurious Emissions, Conducted</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 2.2dB
<b>Output Power</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.4dB
<b>Power Spectrum Density</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 2.2dB
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 2.7%

## 6. Test Result

### 6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(2)	6dB Bandwidth	Conducted	Pass
15.247(b)(3)	Output Power		Pass
15.247(e)	Power Spectral Density		Pass
15.247(d)	Band Edge / Out-of-Band Emissions		Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

#### Notes:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission tests, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- The full RU has higher power levels than partial RU, therefore full test was performed for full RU. For partial RU, we do some spot check testing on partial items "Output Power", "Power Spectral Density", "Band Edge / Out-of-Band Emissions" and "General Field Strength (Restricted Bands and Radiated Emission)".
- The Mobile Computer has two types of image engines (S0703 and S0803/N6803) and two types of keypads (Numeric and Alpha numeric), these differences don't involve PCB board. So we do the full test with engine S0703 & keyboard Alpha numeric and spot check "General Field Strength (Restricted Bands and Radiated Emission)" with engine S0803/N6803 & keyboard Numeric.



## 6.2. 6dB Bandwidth Measurement

### 6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


### 6.2.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.8

### 6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize.

### 6.2.4. Test Setup

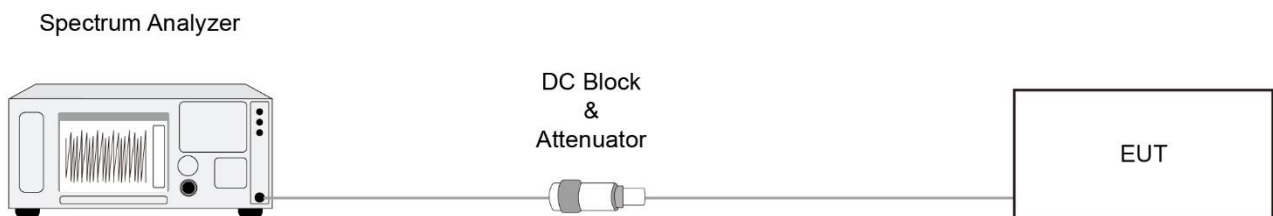

### 6.2.5. Test Result

Refer to Appendix A.2.

### 6.3. Output Power Measurement

#### 6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 6.3.2. Test Procedure


ANSI C63.10 - 2013 - Section 11.9.2.3.2

#### 6.3.3. Test Setting

##### Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

#### 6.3.4. Test Setup

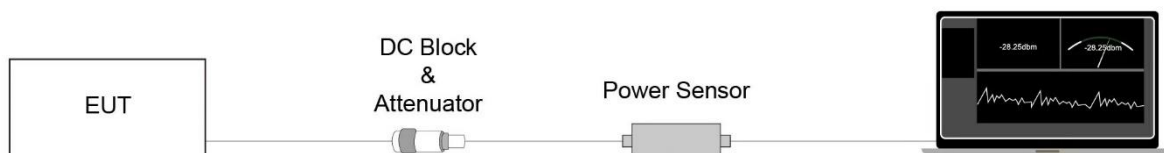

#### 6.3.5. Test Result

Refer to Appendix A.3.

## 6.4. Power Spectral Density Measurement

### 6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


### 6.4.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.10.5

### 6.4.3. Test Setting

1. Measure the duty cycle (x) of the transmitter output signal.
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. RBW = 10 kHz.
5. VBW = 30 kHz.
6. Detector = RMS.
7. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
8. Sweep time = auto couple.
9. Don't use sweep triggering. Allow sweep to "free run".
10. Employ trace averaging (RMS) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add  $10 \log (1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time. If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

### 6.4.4. Test Setup

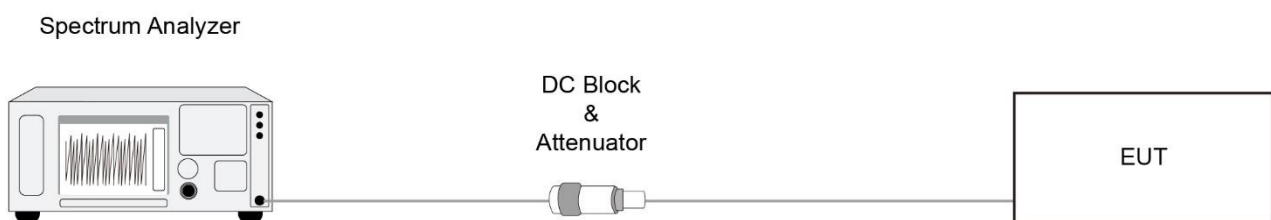

#### **6.4.5. Test Result**

Refer to Appendix A.4.

## 6.5. Conducted Band Edge and Out-of-Band Emissions Measurement

### 6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

### 6.5.2. Test Procedure

ANSI C63.10-2013 - Section 11.11

### 6.5.3. Test Setting


#### Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to  $\geq 1.5$  times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW  $\geq 3 \times$  RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

#### Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### 6.5.4. Test Setup

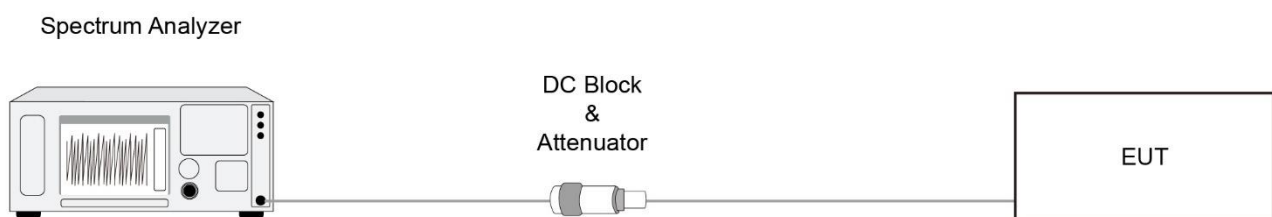

### **6.5.5. Test Result**

Refer to Appendix A.5.

## 6.6. Radiated Spurious Emission Measurement

### 6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 6.6.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

### 6.6.3. Test Setting

**Table 1 - RBW as a function of frequency**

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize


**Average Measurements above 1GHz (Method VB)**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10Hz  
If the EUT duty cycle is  $< 98\%$ , set  $VBW \geq 1/T$ . T is the minimum transmission duration.
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize




### 6.6.4. Test Setup


Below 30MHz Test Setup:

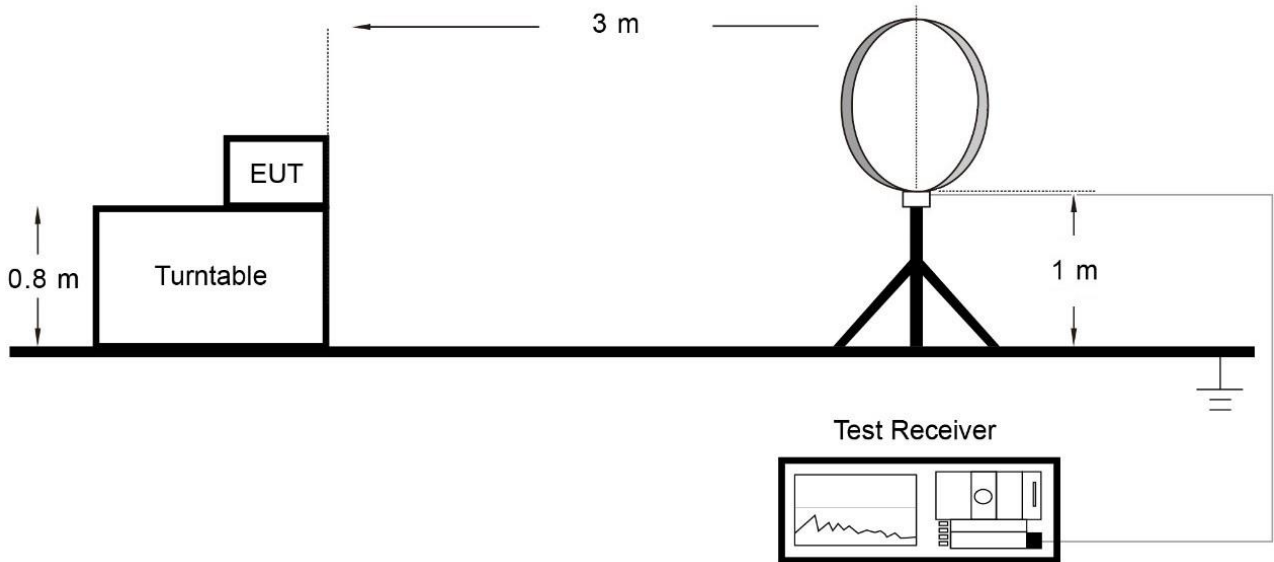

Below 1GHz Test Setup:

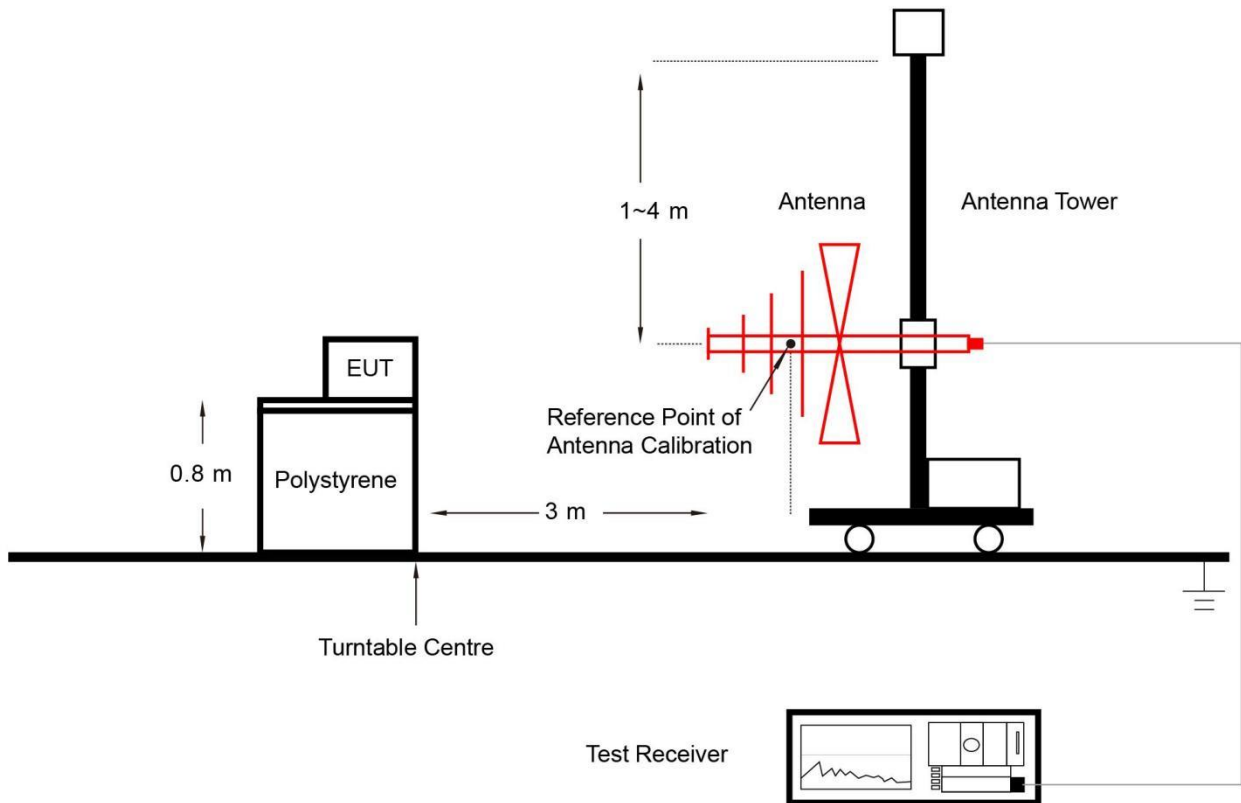

Above 1GHz Test Setup:

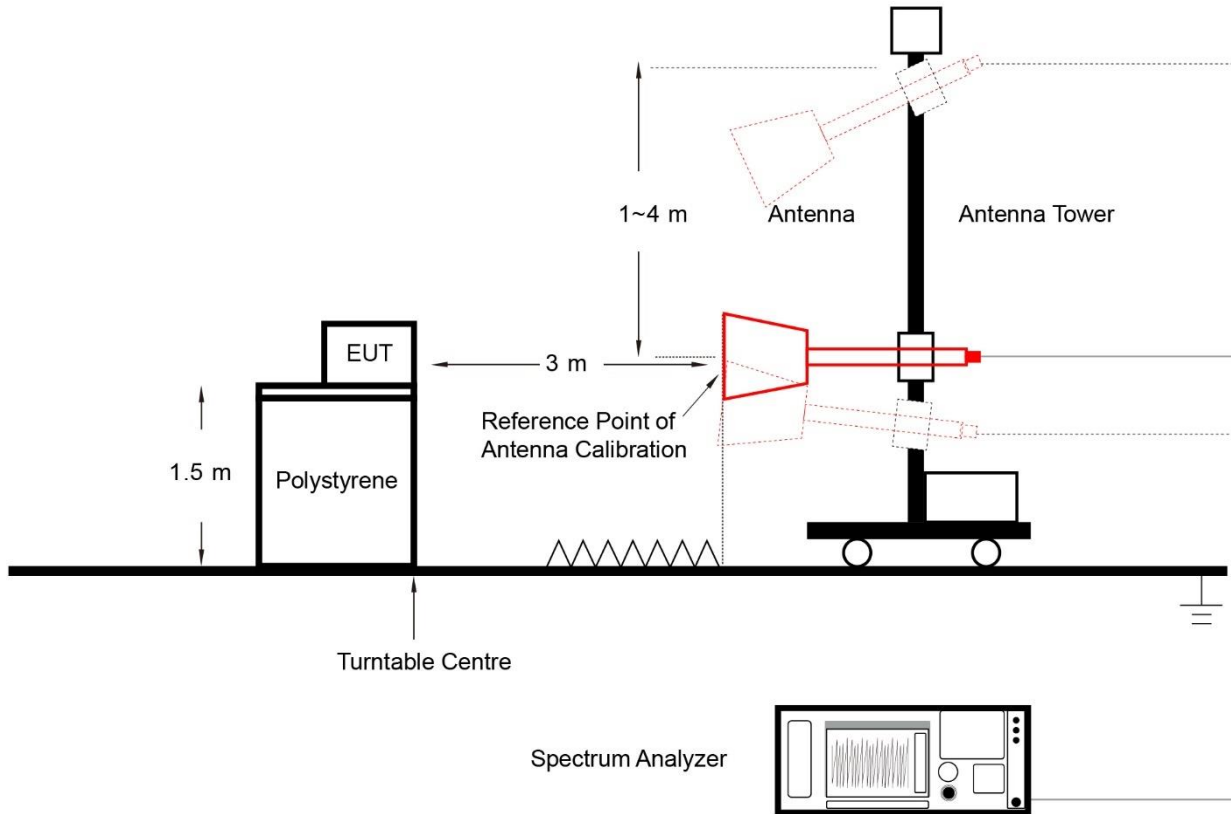

**6.6.5. Test Result**

Refer to Appendix A.6.

## 6.7. Radiated Restricted Band Edge Measurement

### 6.7.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [ $\mu\text{V}/\text{m}$ ]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 6.7.2. Test Procedure

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

### 6.7.3. Test Setting

#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.

If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.

4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

#### 6.7.4. Test Setup

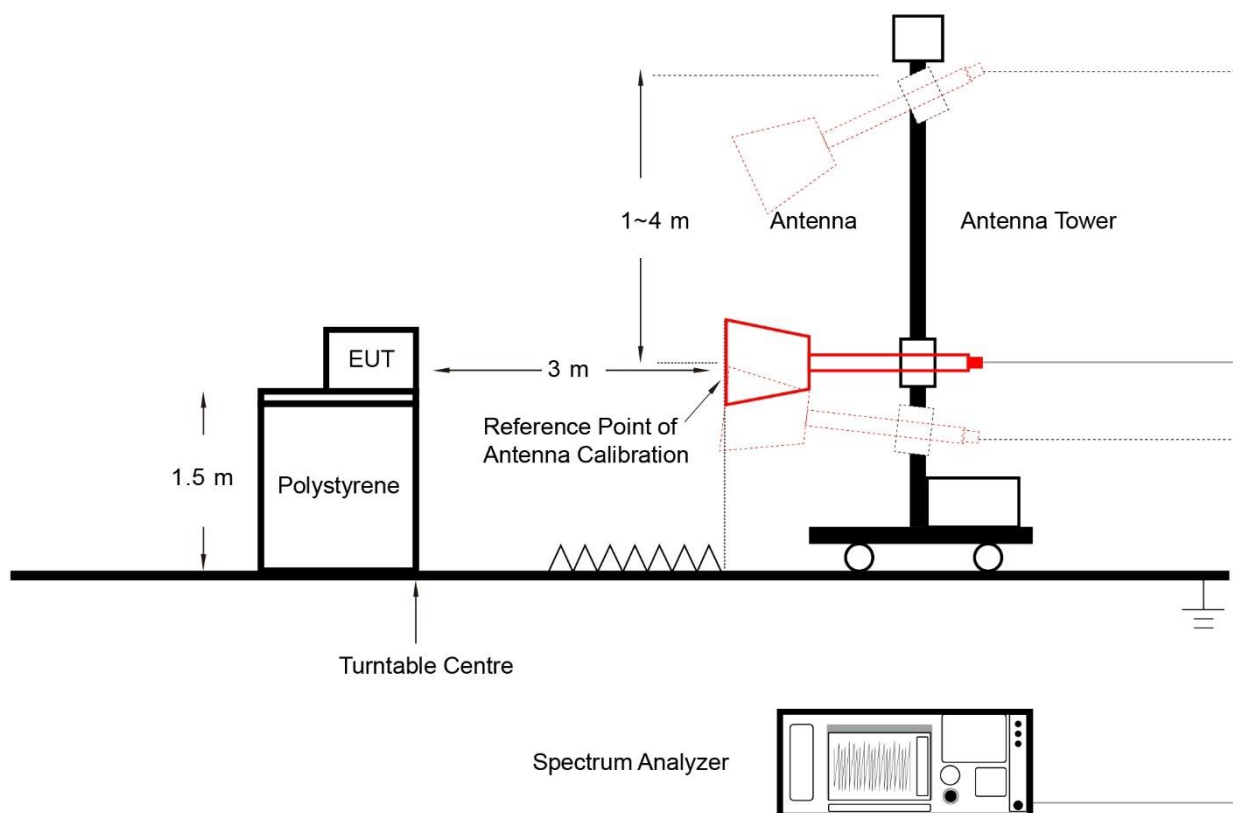

#### 6.7.5. Test Result

Refer to Appendix A.7.

## 6.8. AC Conducted Emissions Measurement


### 6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB $\mu$ V)	AV (dB $\mu$ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 6.8.2. Test Setup

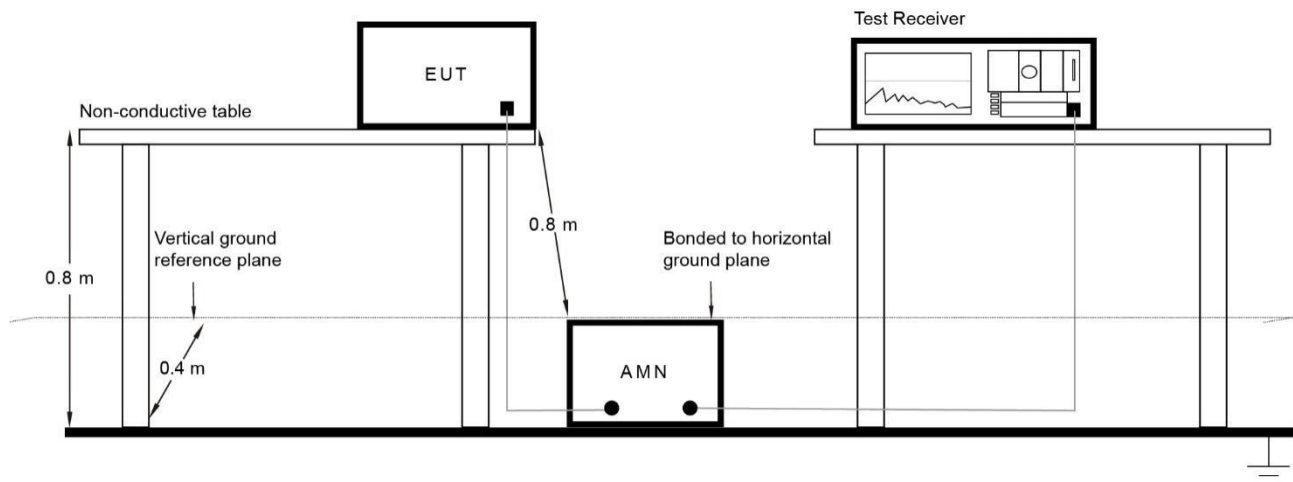

### 6.8.3. Test Result

Refer to Appendix A.8.

## Appendix A – Test Result


### A.1 Duty Cycle Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-07-04 ~ 2024-07-05		


Test Mode	Duty Cycle	Test Mode	Duty Cycle
802.11b	98.14%	802.11ax-HE20	99.73%
802.11g	99.29%	802.11ax-HE40	99.74%
802.11n-HT20	99.00%	VHT20	99.69%
802.11n-HT40	98.12%	VHT40	99.72%

#### Duty Cycle (T = Transmission Duration)


802.11b (T = 663.6µs)

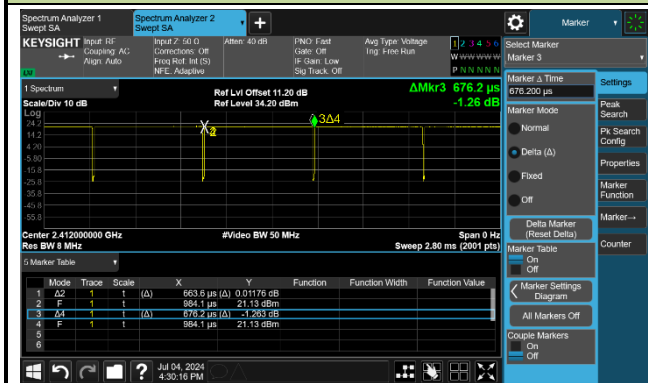


802.11g (T = 2.098ms)

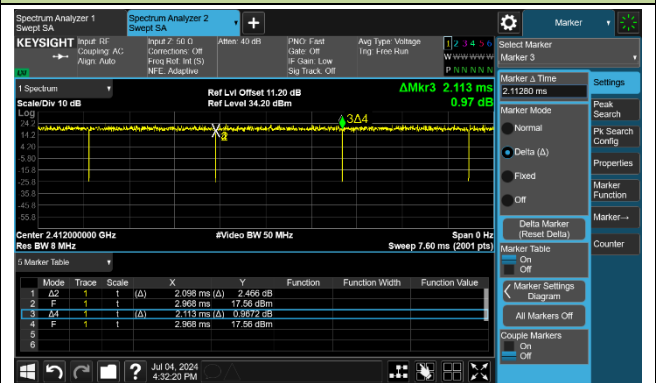

802.11n-HT20 (T = 1.788ms)

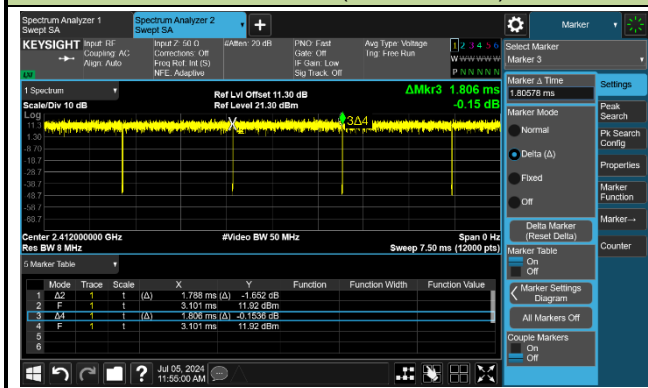


802.11n-HT40 (T = 880.1µs)

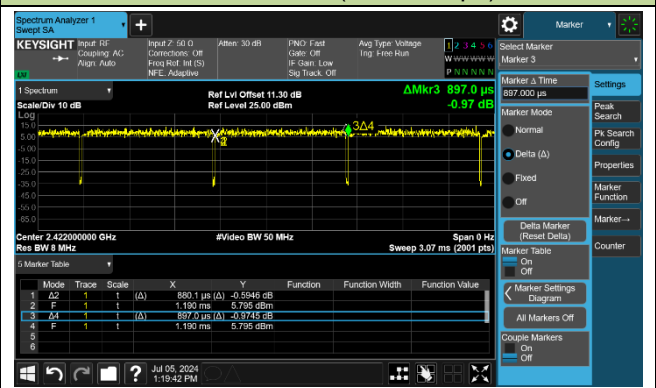


Duty Cycle (T = Transmission Duration)


802.11ax-HE20 (T = 5.448ms)

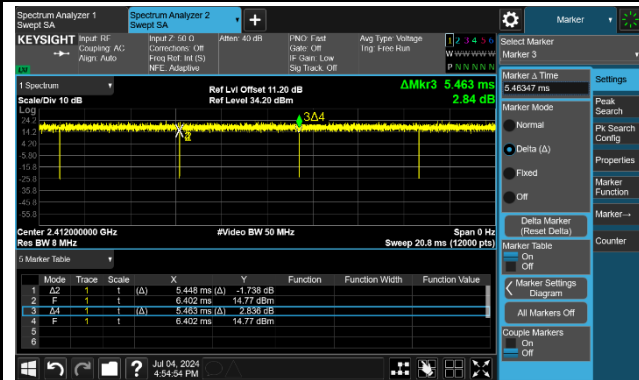


802.11ax-HE40 (T = 5.443ms)

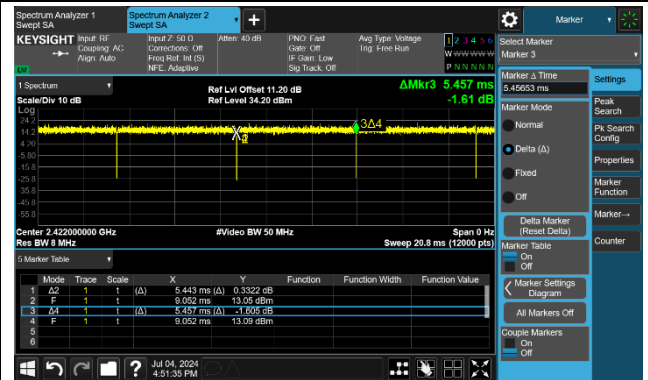

VHT20 (T = 5.429ms)

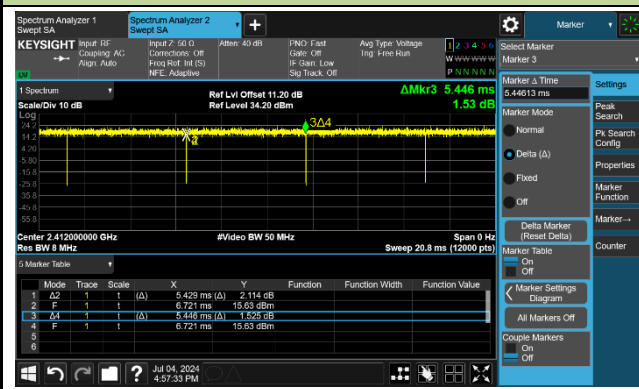

VHT40 (T = 5.431ms)

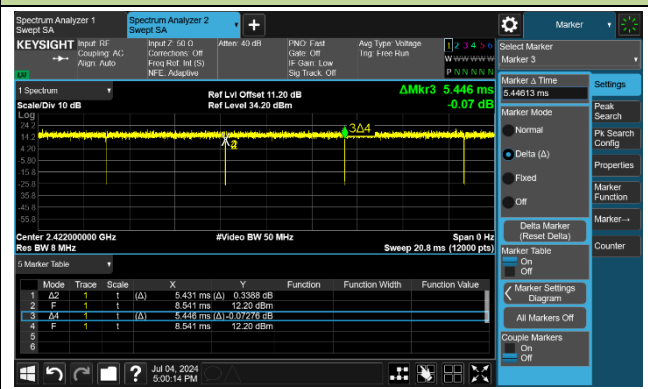




**A.2 6dB Bandwidth Test Result**

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-07-04 ~ 2024-07-05		

Test Mode	Data Rate	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11b	1Mbps	01	2412	7.584	≥ 0.5
11b	1Mbps	06	2437	7.583	≥ 0.5
11b	1Mbps	11	2462	8.082	≥ 0.5
11g	6Mbps	01	2412	16.34	≥ 0.5
11g	6Mbps	06	2437	16.35	≥ 0.5
11g	6Mbps	11	2462	16.37	≥ 0.5
11n-HT20	MCS0	01	2412	17.28	≥ 0.5
11n-HT20	MCS0	06	2437	17.16	≥ 0.5
11n-HT20	MCS0	11	2462	17.53	≥ 0.5
11n-HT40	MCS0	03	2422	35.63	≥ 0.5
11n-HT40	MCS0	06	2437	35.68	≥ 0.5
11n-HT40	MCS0	09	2452	35.73	≥ 0.5
11ax-HE20	MCS0	01	2412	18.89	≥ 0.5
11ax-HE20	MCS0	06	2437	18.97	≥ 0.5
11ax-HE20	MCS0	11	2462	18.87	≥ 0.5
11ax-HE40	MCS0	03	2422	37.76	≥ 0.5
11ax-HE40	MCS0	06	2437	37.81	≥ 0.5
11ax-HE40	MCS0	09	2452	37.89	≥ 0.5
VHT20	MCS0	01	2412	17.43	≥ 0.5
VHT20	MCS0	06	2437	17.59	≥ 0.5
VHT20	MCS0	11	2462	17.54	≥ 0.5
VHT40	MCS0	03	2422	35.93	≥ 0.5
VHT40	MCS0	06	2437	36.03	≥ 0.5
VHT40	MCS0	09	2452	36.44	≥ 0.5

### 802.11b 6dB Bandwidth


#### Channel 01 (2412MHz)

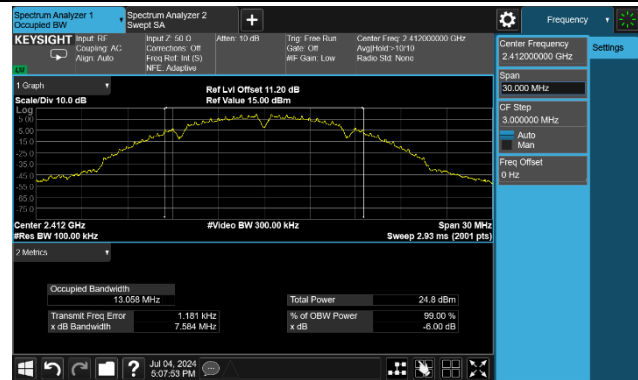

#### Channel 06 (2437MHz)




#### Channel 11 (2462MHz)

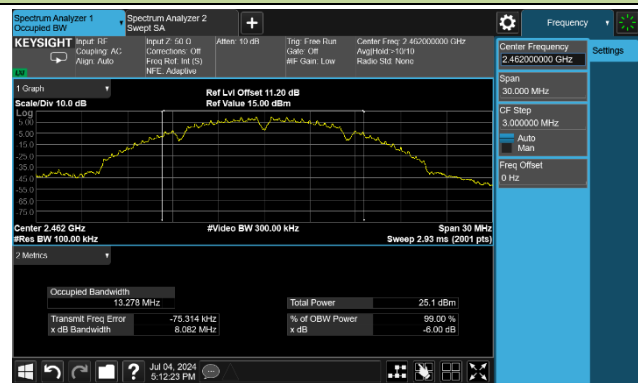


### 802.11g 6dB Bandwidth


#### Channel 01 (2412MHz)

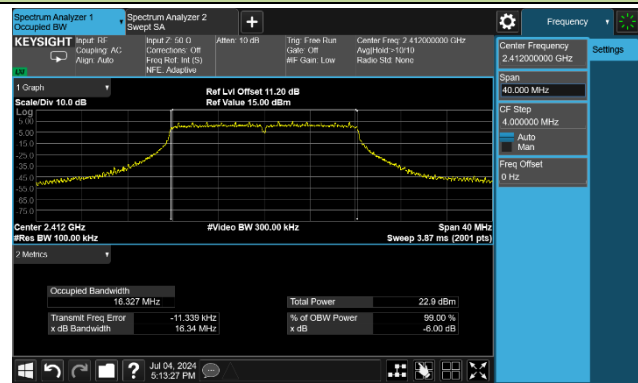

#### Channel 06 (2437MHz)

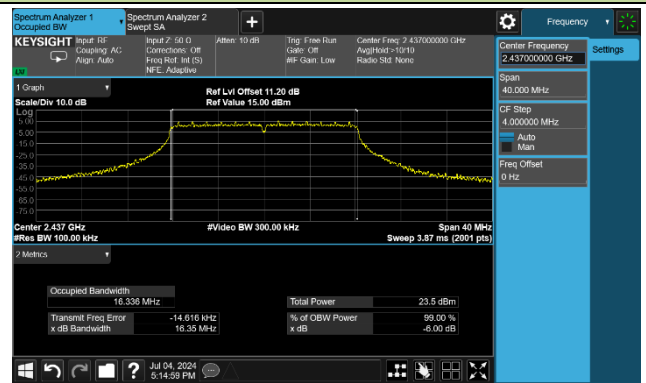


#### Channel 11 (2462MHz)

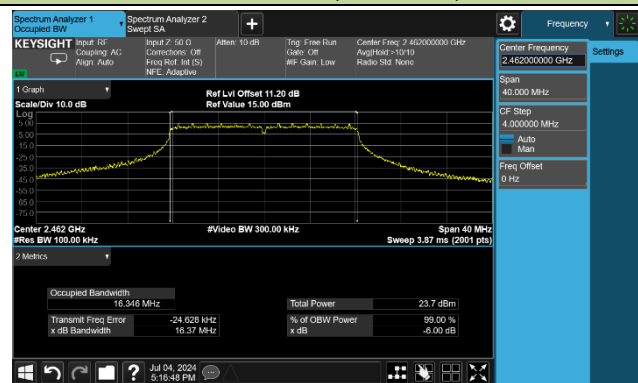


802.11n-HT20 6dB Bandwidth


Channel 01 (2412MHz)

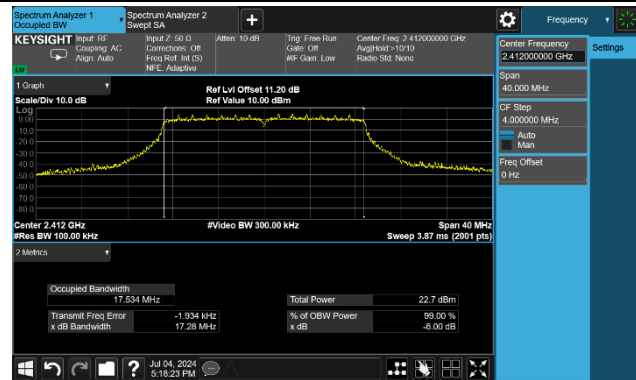

Channel 06 (2437MHz)

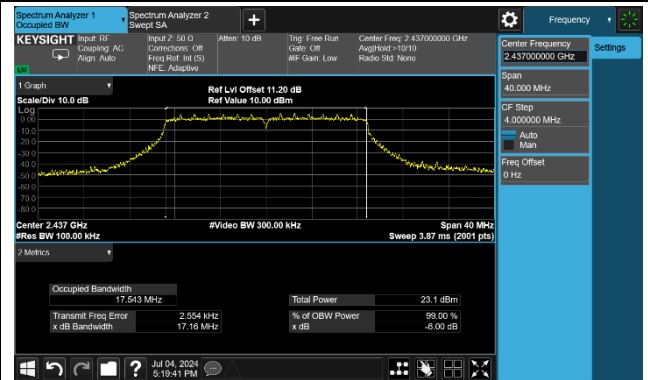


Channel 11 (2462MHz)

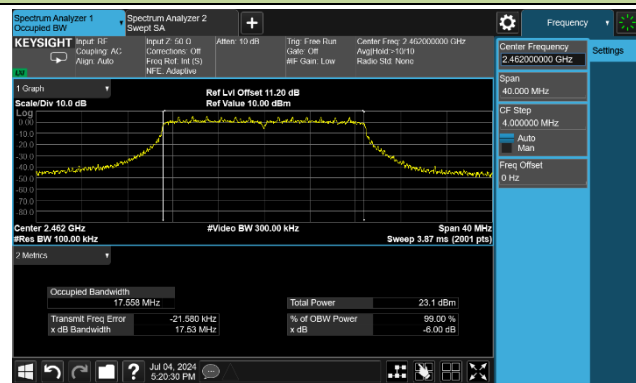


802.11n-HT40 6dB Bandwidth


Channel 03 (2422MHz)

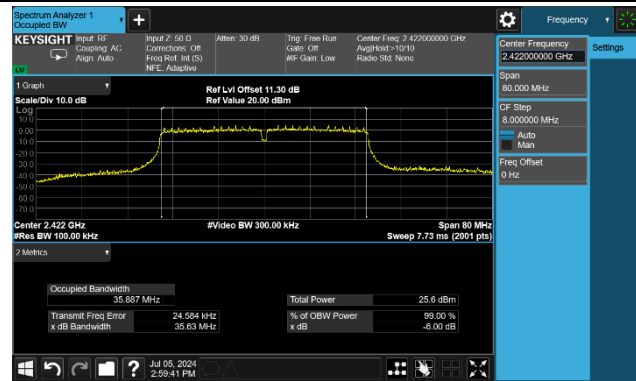

Channel 06 (2437MHz)

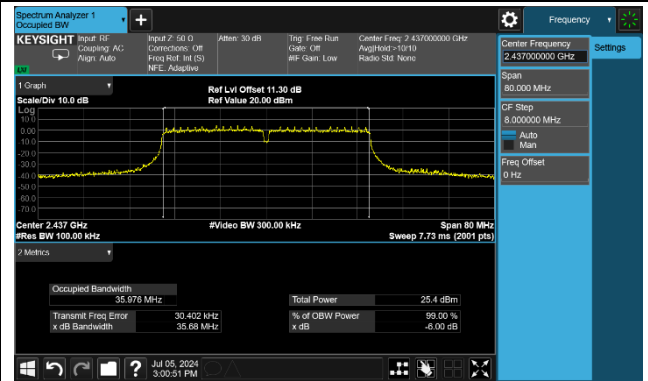


Channel 09 (2452MHz)

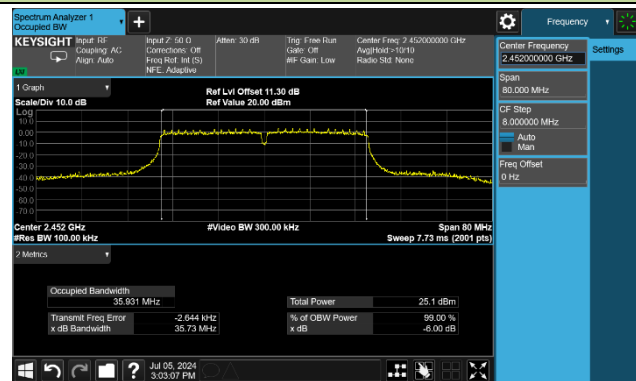


802.11ax-HE20 6dB Bandwidth


Channel 01 (2412MHz)

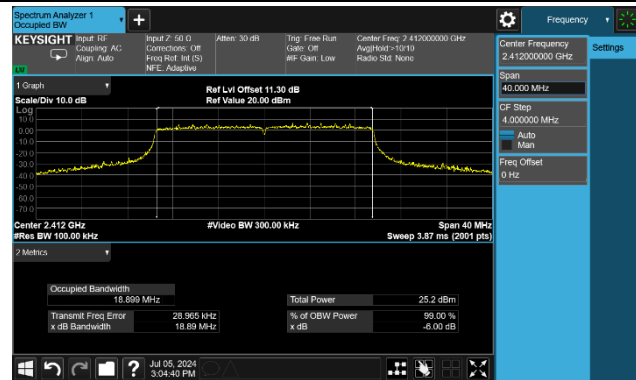

Channel 06 (2437MHz)

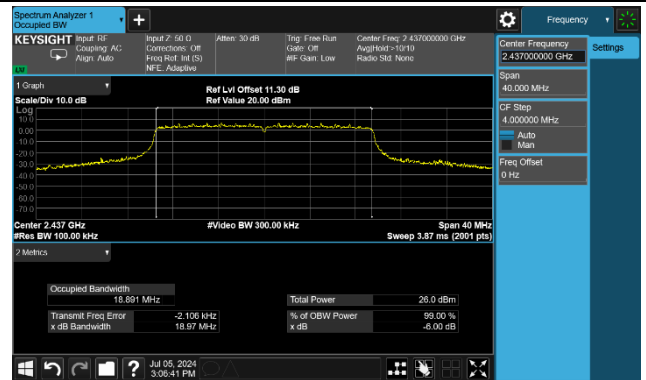


Channel 11 (2462MHz)

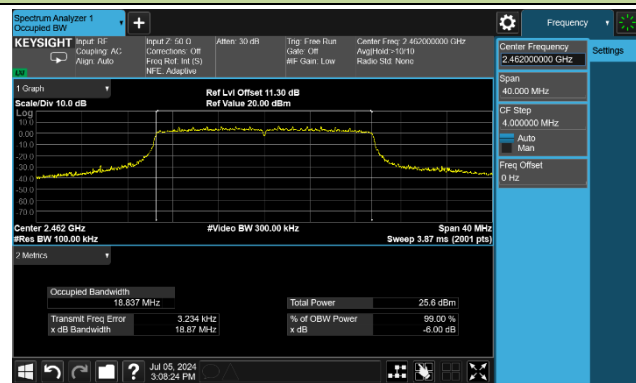


802.11ax-HE40 6dB Bandwidth


Channel 03 (2422MHz)

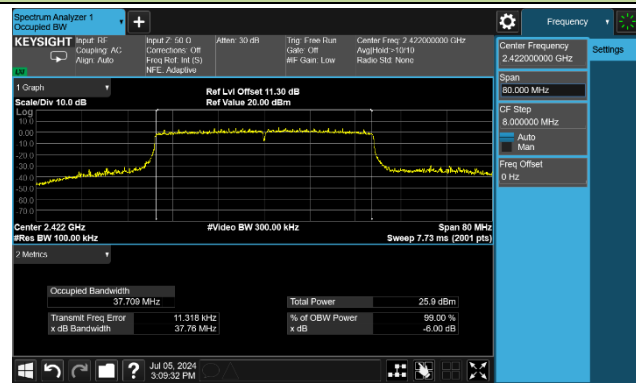

Channel 06 (2437MHz)

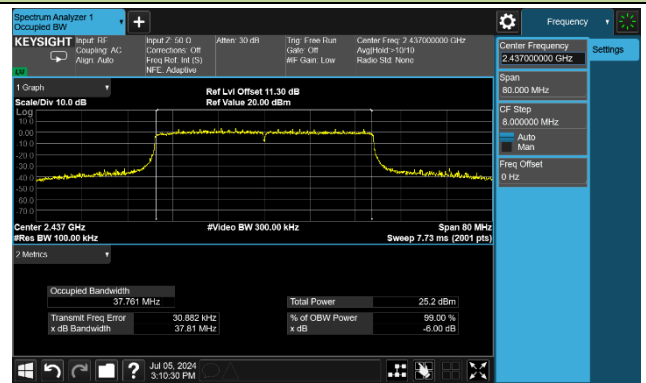


Channel 09 (2452MHz)

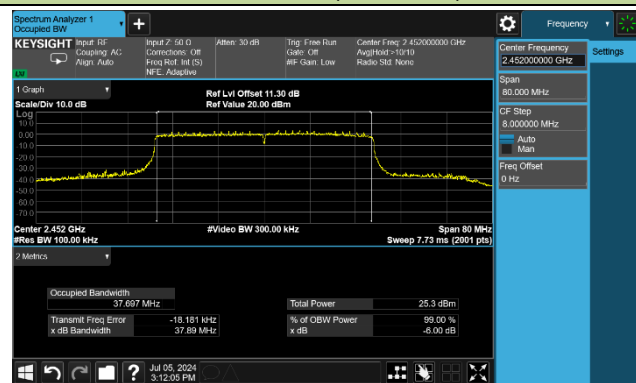


### VHT20 6dB Bandwidth


#### Channel 01 (2412MHz)

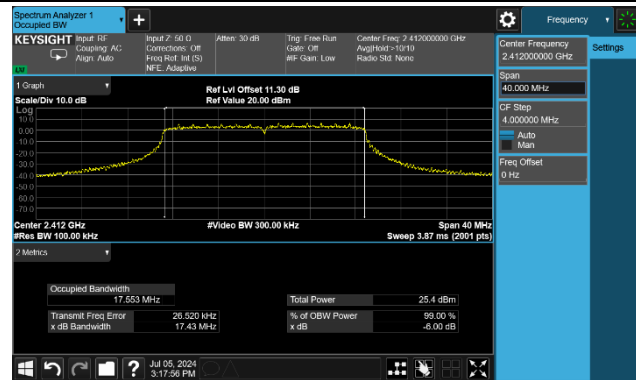

#### Channel 06 (2437MHz)

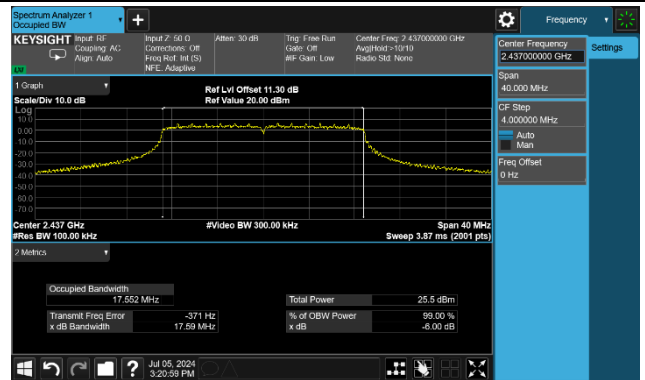


#### Channel 11 (2462MHz)

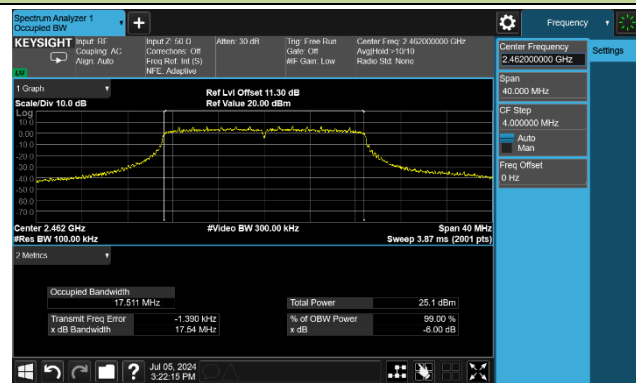


### VHT40 6dB Bandwidth


#### Channel 03 (2422MHz)

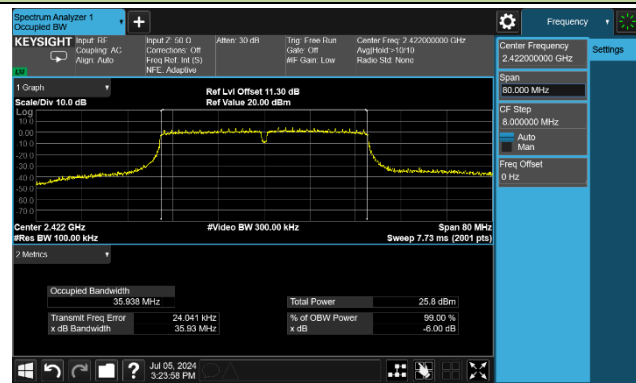

#### Channel 06 (2437MHz)

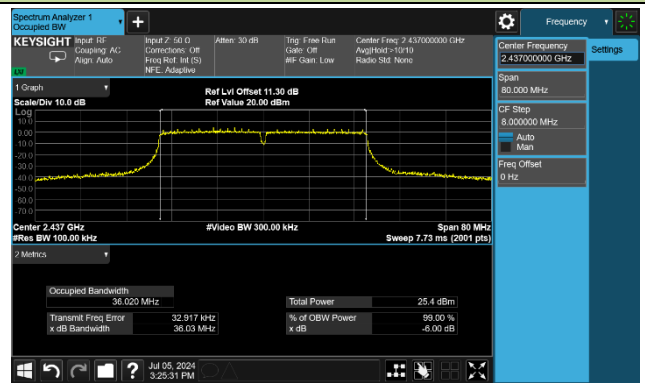

#### Channel 09 (2452MHz)

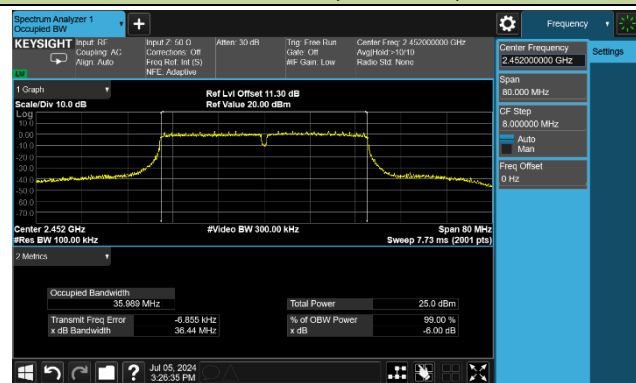

### A.3 Output Power Test Result

#### Full RU

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-07-13		

Test Mode	Data Rate	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Limit (dBm)
				Ant 3	Ant 2		
11b	1Mbps	01	2412	17.83	18.50	21.19	≤ 30.00
11b	1Mbps	06	2437	17.32	17.95	20.66	≤ 30.00
11b	1Mbps	11	2462	17.93	17.95	20.95	≤ 30.00
11g	6Mbps	01	2412	15.72	16.64	19.21	≤ 30.00
11g	6Mbps	06	2437	16.31	16.86	19.60	≤ 30.00
11g	6Mbps	11	2462	16.07	16.93	19.53	≤ 30.00
11n-HT20	MCS0	01	2412	15.68	16.69	19.22	≤ 30.00
11n-HT20	MCS0	06	2437	16.28	16.86	19.59	≤ 30.00
11n-HT20	MCS0	11	2462	16.07	16.83	19.48	≤ 30.00
11n-HT40	MCS0	03	2422	16.74	16.98	19.87	≤ 30.00
11n-HT40	MCS0	06	2437	16.16	16.93	19.57	≤ 30.00
11n-HT40	MCS0	09	2452	16.07	16.73	19.42	≤ 30.00
11ax-HE20	MCS0	01	2412	15.63	16.63	19.17	≤ 30.00
11ax-HE20	MCS0	06	2437	16.21	16.85	19.55	≤ 30.00
11ax-HE20	MCS0	11	2462	16.01	16.81	19.44	≤ 30.00
11ax-HE40	MCS0	03	2422	16.62	16.86	19.75	≤ 30.00
11ax-HE40	MCS0	06	2437	16.07	16.89	19.51	≤ 30.00
11ax-HE40	MCS0	09	2452	15.87	16.54	19.23	≤ 30.00
VHT20	MCS0	01	2412	15.63	16.64	19.17	≤ 30.00
VHT20	MCS0	06	2437	16.04	16.78	19.44	≤ 30.00
VHT20	MCS0	11	2462	16.05	16.84	19.47	≤ 30.00
VHT40	MCS0	03	2422	16.73	16.92	19.84	≤ 30.00
VHT40	MCS0	06	2437	16.23	16.91	19.59	≤ 30.00
VHT40	MCS0	09	2452	16.11	16.73	19.44	≤ 30.00

Note: Total Average Power (dBm) =  $10 \cdot \log \{ 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)} \}$  (dBm).

**Partial RU**

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-07-10 ~ 2024-07-19		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	RU size/ index	Average Power (dBm)		Total Average Power (dBm)	Limit (dBm)
					Ant 3	Ant 2		
11ax-HE20	MCS0	01	2412	RU26/0	6.59	5.89	9.26	≤ 30.00
				RU52/37	9.59	8.59	12.13	≤ 30.00
				RU106/53	12.60	11.65	15.16	≤ 30.00
		06	2437	RU26/4	6.75	6.36	9.57	≤ 30.00
				RU52/38	8.58	8.93	11.77	≤ 30.00
				RU106/53	12.11	12.09	15.11	≤ 30.00
		11	2462	RU26/8	6.69	5.36	9.09	≤ 30.00
				RU52/40	8.68	8.20	11.46	≤ 30.00
				RU106/54	11.77	11.25	14.53	≤ 30.00
ax-HE40	MCS0	03	2422	RU242/61	13.13	12.73	15.94	≤ 30.00
		06	2437	RU242/61	12.53	12.56	15.56	≤ 30.00
		09	2452	RU242/62	12.36	12.38	15.38	≤ 30.00

Note: Total Average Power (dBm) =  $10 \cdot \log \{10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$  (dBm).

**A.4 Power Spectral Density Test Result**
**Full RU**

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-07-04 ~ 2024-07-05		


Test Mode	Data Rate	Channel No.	Freq. (MHz)	PSD (dBm/ 10kHz)		Duty Cycle (%)	Total PSD (dBm/10kHz)	Limit (dBm/3kHz)
				Ant 3	Ant 2			
11b	1Mbps	01	2412	-6.244	-5.020	98.14	-2.579	≤ 7.86
11b	1Mbps	06	2437	-5.472	-5.455	98.14	-2.453	≤ 7.86
11b	1Mbps	11	2462	-5.926	-5.223	98.14	-2.550	≤ 7.86
11g	6Mbps	01	2412	-13.561	-12.636	99.29	-10.064	≤ 7.86
11g	6Mbps	06	2437	-13.159	-12.532	99.29	-9.824	≤ 7.86
11g	6Mbps	11	2462	-13.167	-12.454	99.29	-9.786	≤ 7.86
11n-HT20	MCS0	01	2412	-12.137	-10.977	99.00	-8.508	≤ 7.86
11n-HT20	MCS0	06	2437	-12.324	-11.148	99.00	-8.686	≤ 7.86
11n-HT20	MCS0	11	2462	-12.248	-11.213	99.00	-8.689	≤ 7.86
11n-HT40	MCS0	03	2422	-15.094	-13.755	98.12	-11.363	≤ 7.86
11n-HT40	MCS0	06	2437	-15.052	-14.158	98.12	-11.572	≤ 7.86
11n-HT40	MCS0	09	2452	-15.193	-14.467	98.12	-11.805	≤ 7.86
11ax-HE20	MCS0	01	2412	-14.372	-13.500	99.73	-10.904	≤ 7.86
11ax-HE20	MCS0	06	2437	-14.085	-12.914	99.73	-10.450	≤ 7.86
11ax-HE20	MCS0	11	2462	-14.521	-13.261	99.73	-10.835	≤ 7.86
11ax-HE40	MCS0	03	2422	-16.249	-15.147	99.74	-12.653	≤ 7.86
11ax-HE40	MCS0	06	2437	-16.646	-16.219	99.74	-13.417	≤ 7.86
11ax-HE40	MCS0	09	2452	-16.719	-16.046	99.74	-13.359	≤ 7.86
VHT20	MCS0	01	2412	-12.530	-11.955	99.69	-9.223	≤ 7.86
VHT20	MCS0	06	2437	-12.872	-12.097	99.69	-9.457	≤ 7.86
VHT20	MCS0	11	2462	-13.404	-12.216	99.69	-9.759	≤ 7.86
VHT40	MCS0	03	2422	-15.766	-14.904	99.72	-12.303	≤ 7.86
VHT40	MCS0	06	2437	-16.058	-15.287	99.72	-12.645	≤ 7.86
VHT40	MCS0	09	2452	-15.796	-15.480	99.72	-12.625	≤ 7.86

Note: When EUT duty cycle ≥ 98%, Total PSD (dBm / 10kHz) =  $10 \cdot \log \{10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\}$  (dBm / 10kHz).




802.11b - AVGPSD - Ant 3


Channel 01 (2412MHz)

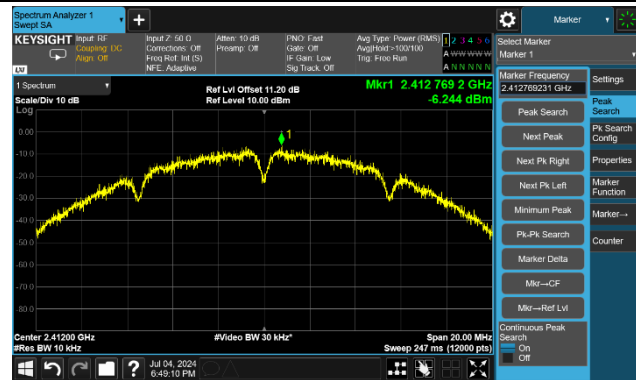

Channel 06 (2437MHz)

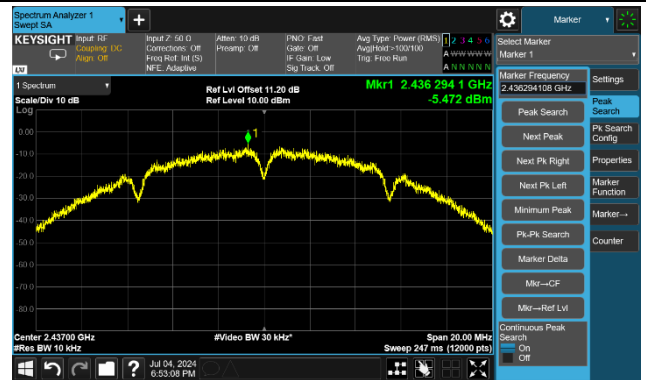


Channel 11 (2462MHz)

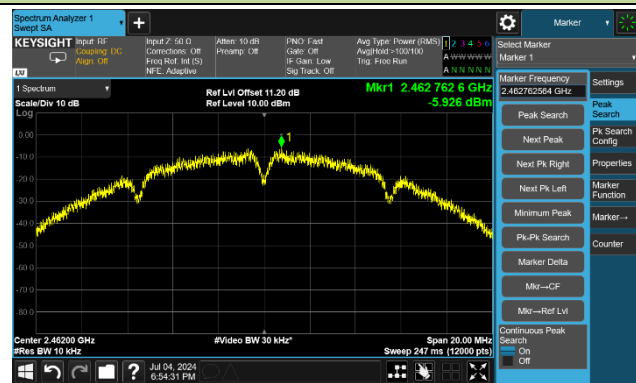


802.11g - AVGPSD - Ant 3


Channel 01 (2412MHz)

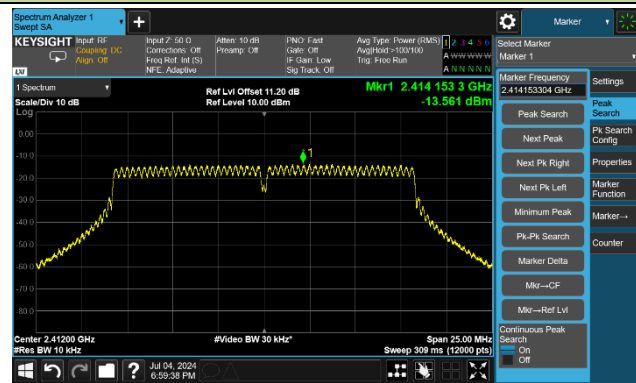

Channel 06 (2437MHz)

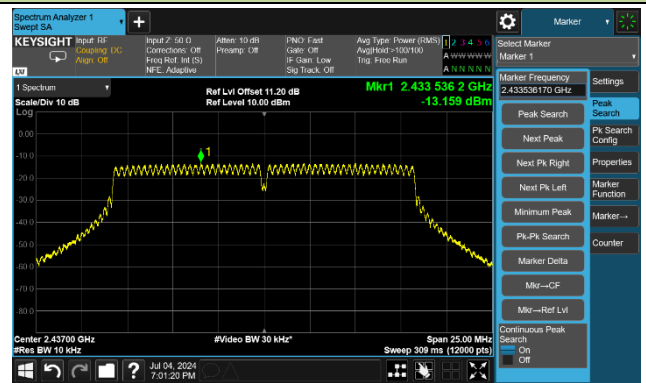


Channel 11 (2462MHz)

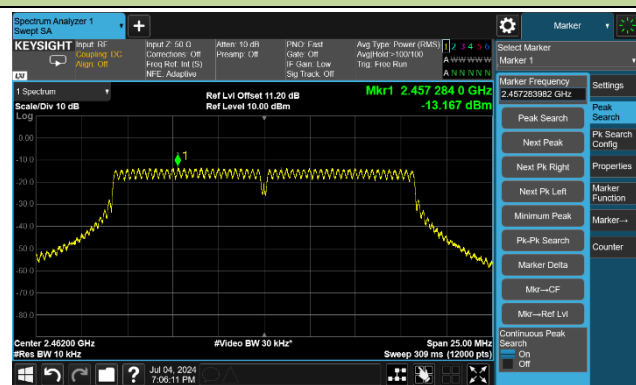


802.11n-HT20 - AVGPSD - Ant 3


Channel 01 (2412MHz)

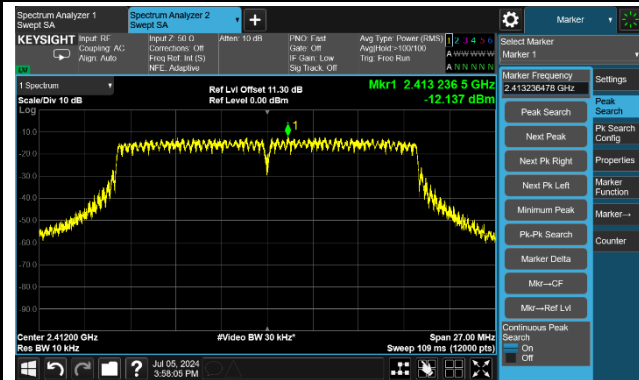

Channel 06 (2437MHz)

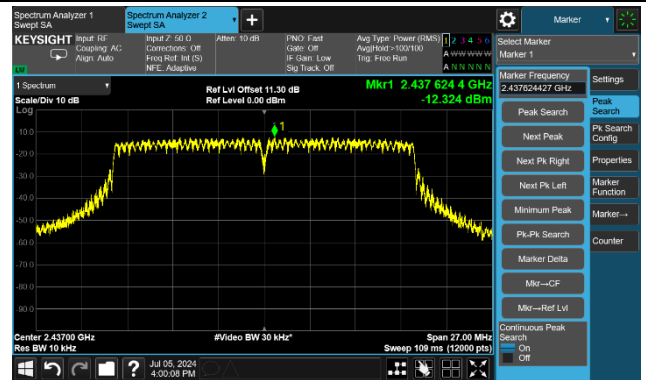


Channel 11 (2462MHz)

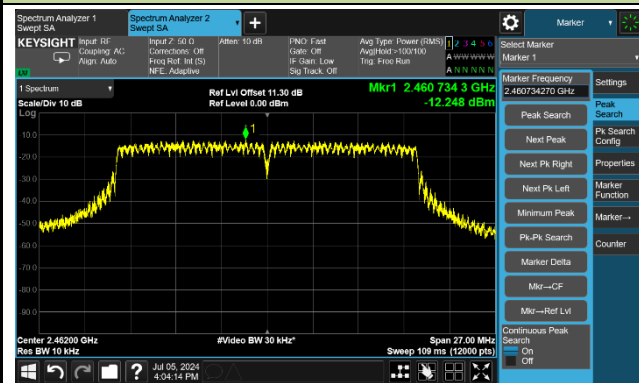


802.11n-HT40 - AVGPSD - Ant 3


Channel 03 (2422MHz)

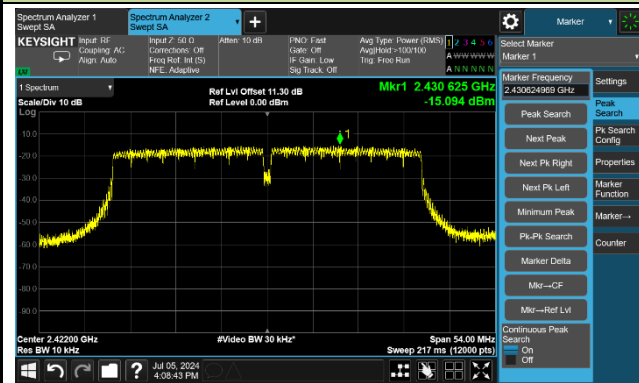

Channel 06 (2437MHz)

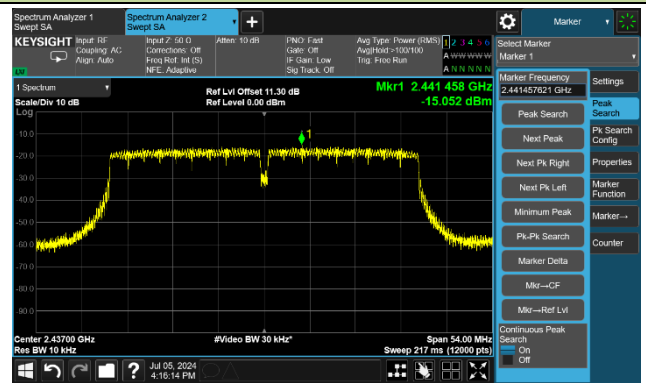


Channel 09 (2452MHz)

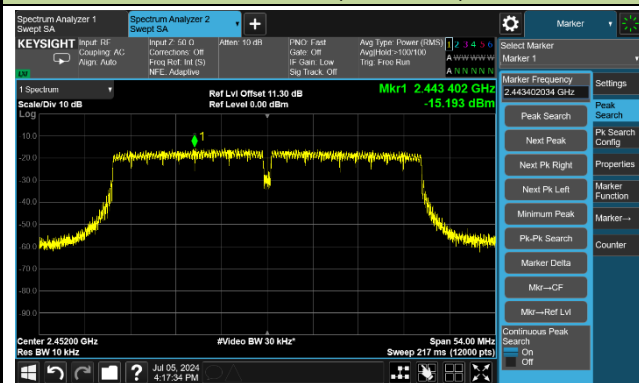


802.11ax-HE20 - AVGPSD - Ant 3


Channel 01 (2412MHz)

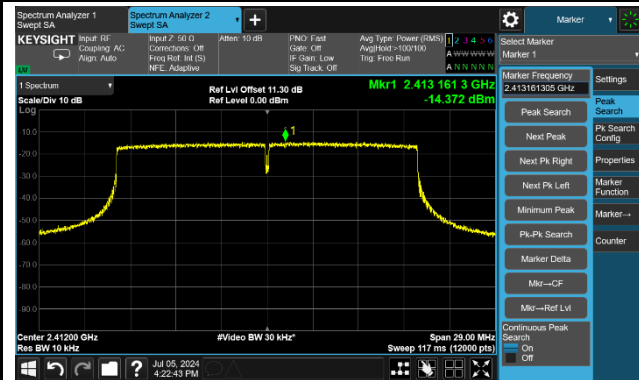

Channel 06 (2437MHz)

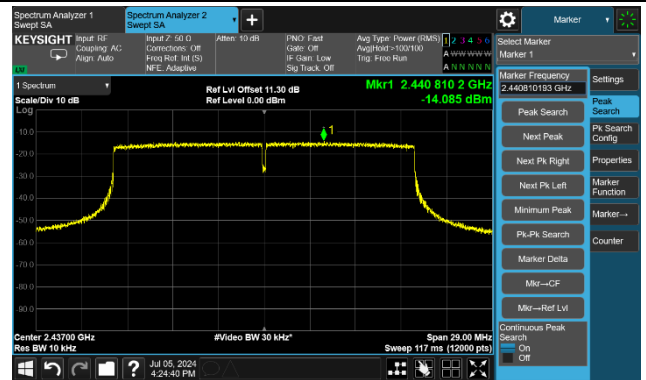


Channel 11 (2462MHz)

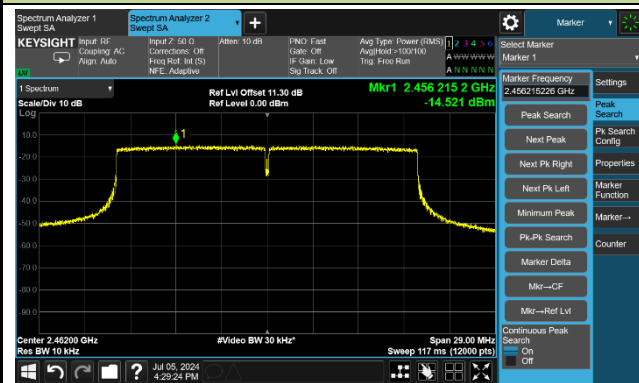


802.11ax-HE40 - AVGPSD - Ant 3


Channel 03 (2422MHz)

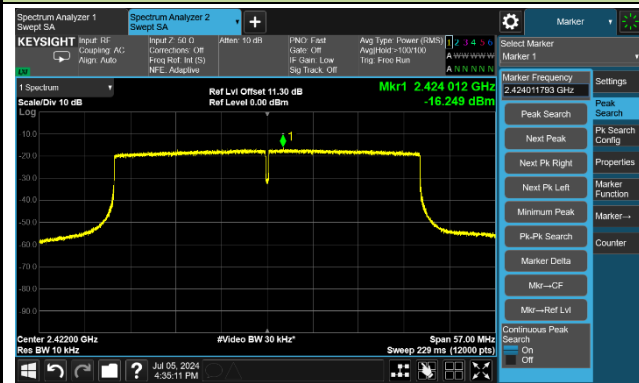

Channel 06 (2437MHz)

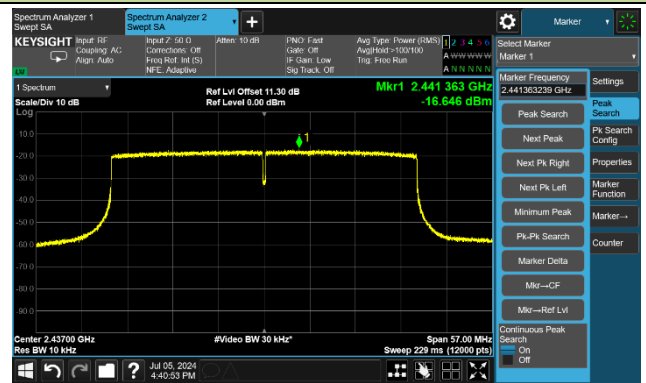


Channel 09 (2452MHz)

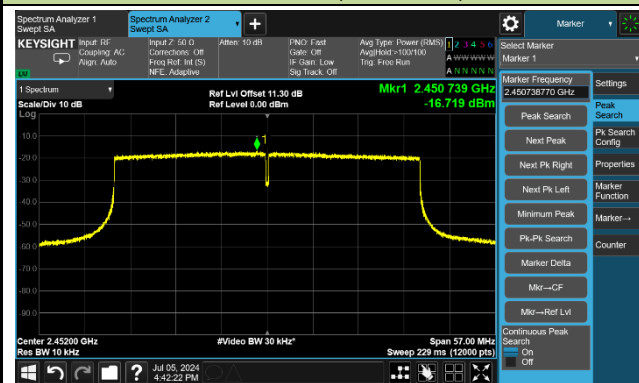


VHT20 - AVGPSD - Ant 3


Channel 01 (2412MHz)

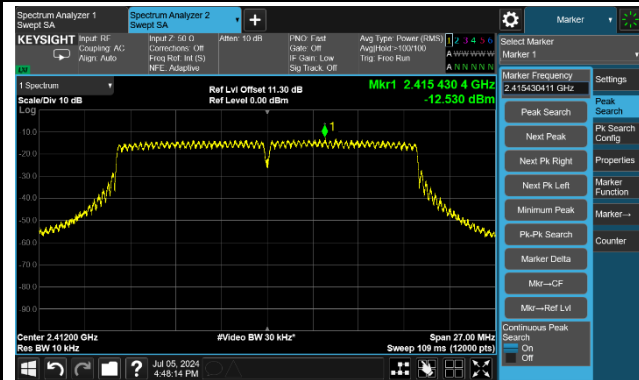

Channel 06 (2437MHz)

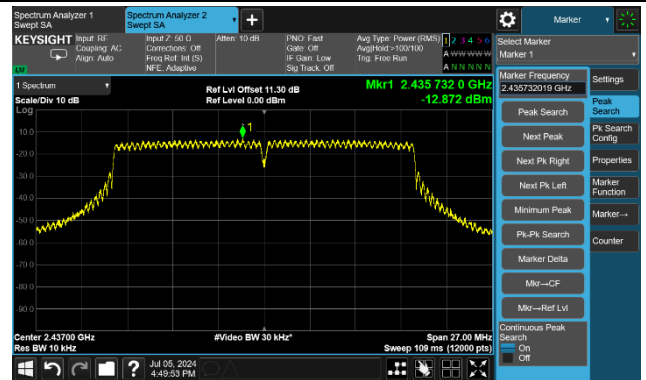


Channel 11 (2462MHz)

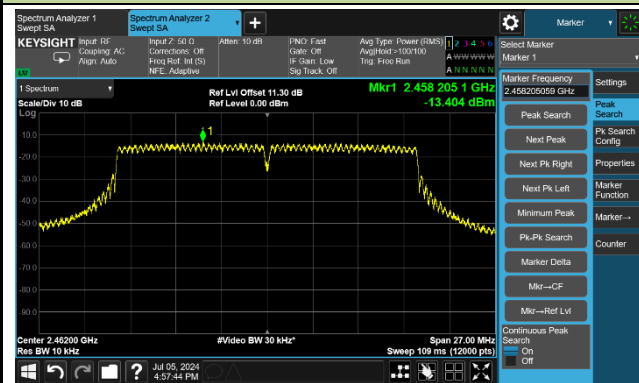


VHT40 - AVGPSD - Ant 3

Channel 03 (2422MHz)

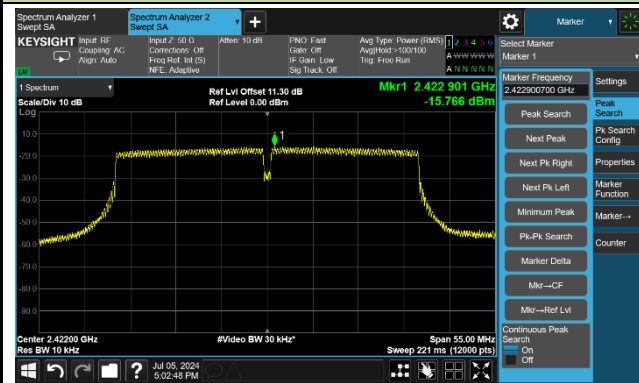

Channel 06 (2437MHz)

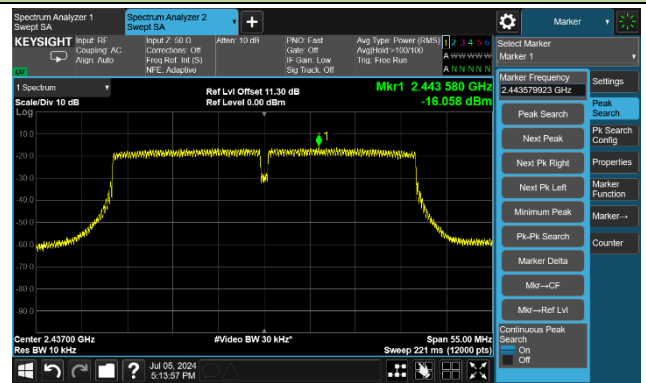

Channel 09 (2452MHz)

