


FCC SAR TEST REPORT

FCC ID : HD5-CK67X0N
Equipment : Mobile Computer
Brand Name : Honeywell
Model Name : CK67X0N
Applicant : Honeywell International Inc.
Honeywell Safety and Productivity Solutions
9680 Old Bailes Rd. Fort Mill, SC 29707 United States
Manufacturer : Honeywell International Inc.
Honeywell Safety and Productivity Solutions
9680 Old Bailes Rd. Fort Mill, SC 29707 United States
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Jun. 21, 2024 and testing was started from Jul. 04, 2024 and completed on Jul. 31, 2024. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



Table of Contents

1. Statement of Compliance 4

2. Guidance Applied..... 4

3. Equipment Under Test (EUT) Information 5

 3.1 General Information 5

4. RF Exposure Limits..... 6

 4.1 Uncontrolled Environment..... 6

 4.2 Controlled Environment..... 6

 4.3 RF Exposure limit for above 6GHz..... 7

5. Specific Absorption Rate (SAR)..... 8

 5.1 Introduction 8

 5.2 SAR Definition..... 8

6. System Description and Setup 9

 6.1 Test Site Location 9

 6.2 E-Field Probe10

 6.3 Data Acquisition Electronics (DAE).....10

 6.4 Phantom.....11

 6.5 Device Holder.....12

7. Measurement Procedures13

 7.1 Spatial Peak SAR Evaluation.....13

 7.2 Power Reference Measurement.....14

 7.3 Area Scan14

 7.4 Zoom Scan.....15

 7.5 Volume Scan Procedures15

 7.6 Power Drift Monitoring.....15

8. Test Equipment List.....16

9. System Verification17

 9.1 Tissue Verification.....17

 9.2 System Performance Check Results.....18

 9.3 PD System Performance Check Results.....19

10. RF Exposure Positions20

 10.1 Body Worn Accessory20

 10.2 Product Specific Exposure20

11. WiFi/Bluetooth Output Power (Unit: dBm).....21

12. Antenna Location35

13. SAR Test Results37

 13.1 Body Worn Accessory SAR.....39

 13.2 Product Specific SAR.....44

 13.3 6GHz PD SAR Result47

14. Simultaneous Transmission Analysis48

 14.1 Body-Worn Accessory Exposure Conditions.....49

 14.2 Product Specific Exposure Conditions49

15. Uncertainty Assessment50

16. References.....53

Appendix A. Plots of SAR System Performance Check

Appendix B. Plots of PD System Performance Check

Appendix C. Plots of High SAR Measurement

Appendix D. Plots of High PD Measurement

Appendix E. DASYS Calibration Certificate

Appendix F. Test Setup Photos



History of this test report

Report No.	Version	Description	Issued Date
FA461705	01	Initial issue of report	Aug. 05, 2024



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for Honeywell International Inc., Honeywell Safety and Productivity Solutions, Mobile Computer, CK67X0N, are as follows.

Table with columns: Equipment Class, Frequency Band, Highest SAR Summary (Body-worn, Product Specific), Highest Simultaneous Transmission (1g SAR, 10g SAR), and Reported APD/PD. Includes rows for WLAN, Bluetooth, and NFC bands.

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093), Human Exposure to RF Radiation Limits (1.0 mW/cm^2=10 W/m^2) specified in FCC 47 CFR part 1.1310 and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Daisy Peng

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013
FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
FCC KDB 865664 D02 SAR Reporting v01r02
FCC KDB 447498 D01 General RF Exposure Guidance v06
FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
IEC/IEEE 62209-1528:2020
SPEAG DASY6 System Handbook
SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Computer
Brand Name	Honeywell
Model Name	CK67X0N
FCC ID	HD5-CK67X0N
Wireless Technology and Frequency Range	WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 5.9 GHz Band: 5850 MHz ~ 5895 MHz WLAN 6E: 5925 MHz ~ 6425 MHz, 6425 MHz ~ 6525 MHz, 6525 MHz ~ 6875 MHz, 6875 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
Mode	WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE NFC: ASK
Remark:	
<ol style="list-style-type: none"> The RF exposure selects Scanner(S0803FR) + Keypad(AlphaNumeric) as the main test, the other scanner / keypad spot check worst case. The device support DBS operation when 2.4GHz transmit with 5G/6GHz WLAN will limit different output for Sim-Tx compliance. Minimum 15 mm separation distance will be produced when using scan handle for this device, there is no requirement to additionally test and SAR can be covered by Extremity exposure condition. 	

Sample List			
Scanner	Keypad	Holster	Scan Handle
S0803FR	AlphaNumeric	Holster 1 (815-087-001)	Scan Handle 1
S0703	Numeric	Holster 2 (815-088-001)	
S0803	Large Numeric		
	53keys AlphaNumeric		
	42keys Numeric		



4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



4.3 RF Exposure limit for above 6GHz

According to ANSI/IEEE C95.1-1992, the criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm² per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30



5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

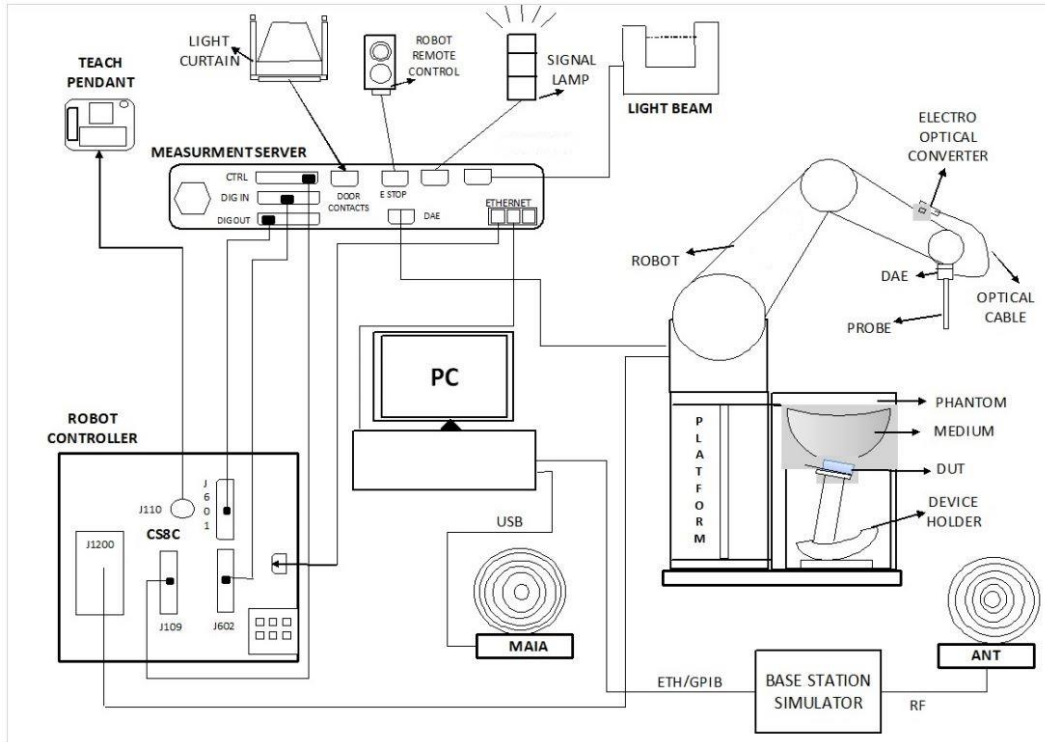

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 Test Site Location


The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test..

Laboratory	EMC & Wireless Communications Laboratory		Wensan Laboratory				
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan				
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY	SAR18-HY	SAR21-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY	SAR19-HY	SAR22-HY
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY	SAR20-HY	


6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 4 GHz; Linearity: ±0.2 dB (30 MHz – 4 GHz)	
Directivity	±0.2 dB in TSL (rotation around probe axis) ±0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 µW/g – >100 mW/g; Linearity: ±0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

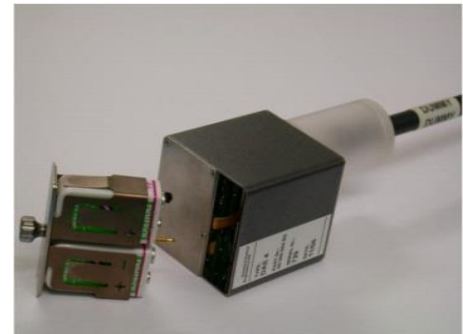



Fig 5.1 Photo of DAE


6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

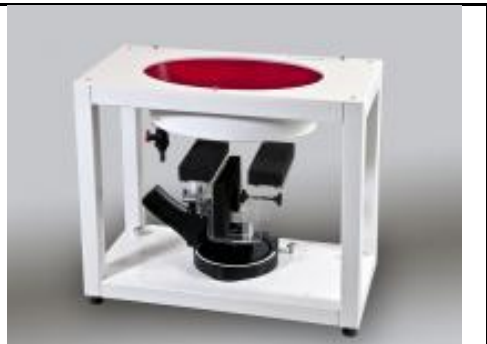Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit ⁽²⁾	D2450V2	929	Nov. 21, 2022	Nov. 18, 2025
SPEAG	5GHz System Validation Kit ⁽²⁾	D5GHzV2	1006	May. 25, 2023	May. 23, 2025
SPEAG	5GHz System Validation Kit ⁽²⁾	D5GHzV2	1128	Feb. 22, 2023	Feb. 20, 2025
SPEAG	6500MHz System Validation Kit	D6.5GHzV2	1083	Oct. 20, 2023	Oct. 19, 2024
SPEAG	13MHz System Validation Kit	CLA13	1011	Jul. 10, 2023	Jul. 08, 2025
SPEAG	5G Verification Source	10GHz	1052	Oct. 13, 2023	Oct. 12, 2024
SPEAG	EUmmWV Probe Tip Protection	EUmmWV3	9424	Mar. 12, 2024	Mar. 11, 2025
SPEAG	EUmmWV Probe Tip Protection	EUmmWV4	9441	Nov. 17, 2023	Nov. 16, 2024
SPEAG	Data Acquisition Electronics	DAE4	376	Sep. 14, 2023	Sep. 13, 2024
SPEAG	Data Acquisition Electronics	DAE4	1424	Dec. 07, 2023	Dec. 06, 2024
SPEAG	Data Acquisition Electronics	DAE4	1694	Nov. 17, 2023	Nov. 16, 2024
SPEAG	Data Acquisition Electronics	DAE4	1805	May. 22, 2024	May. 21, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Oct. 24, 2023	Oct. 23, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7625	Dec. 14, 2023	Dec. 13, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7813	May. 30, 2024	May. 29, 2025
Testo	Hygro meter	608-H1	45196600	Nov. 02, 2023	Nov. 01, 2024
R&S	BT Base Station	CBT	101136	Oct. 22, 2023	Oct. 21, 2024
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Sep. 27, 2023	Sep. 26, 2024
Keysight	ENA Network Analyzer	E5071C	MY46104758	Oct. 30, 2023	Oct. 29, 2024
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 19, 2023	Sep. 18, 2024
SPEAG	Dielectric Probe Kit	DAK-12	1169	Aug. 24, 2023	Aug. 23, 2024
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3690	Aug. 09, 2023	Aug. 08, 2024
Anritsu	Power Meter	ML2495A	1419002	Aug. 17, 2023	Aug. 16, 2024
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2023	Aug. 17, 2024
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Jan. 10, 2024	Jan. 09, 2025
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 16, 2023	Oct. 15, 2024
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

9. System Verification

9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
13	22.6	0.757	53.400	0.75	55.00	0.93	-2.91	±5	2024/7/31
2450	22.4	1.840	39.100	1.80	39.20	2.22	-0.26	±5	2024/7/5
2450	22.4	1.840	39.200	1.80	39.20	2.22	0.00	±5	2024/7/14
5250	22.5	4.650	35.500	4.71	35.95	-1.27	-1.25	±5	2024/7/4
5250	22.6	4.640	35.500	4.71	35.95	-1.49	-1.25	±5	2024/7/6
5250	22.5	4.750	36.600	4.71	35.95	0.85	1.81	±5	2024/7/26
5600	22.5	5.040	34.900	5.07	35.50	-0.59	-1.69	±5	2024/7/4
5600	22.7	5.030	34.900	5.07	35.50	-0.79	-1.69	±5	2024/7/7
5600	22.5	5.150	36.100	5.07	35.50	1.58	1.69	±5	2024/7/26
5750	22.5	5.230	34.600	5.22	35.35	0.19	-2.12	±5	2024/7/4
5750	22.8	5.350	36.200	5.22	35.35	2.49	2.40	±5	2024/7/8
5800	22.5	5.410	36.100	5.27	35.30	2.66	2.27	±5	2024/7/12
5800	22.3	5.430	36.200	5.27	35.30	3.04	2.55	±5	2024/7/13
6500	22.9	6.170	34.700	6.07	34.50	1.65	0.58	±5	2024/7/9
6500	22	6.210	35.000	6.07	34.50	2.31	1.45	±5	2024/7/10
6500	22.1	6.180	35.100	6.07	34.50	1.81	1.74	±5	2024/7/11

9.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)	Test Site
2024/7/31	13	1000	CLA13-1011	EX3DV4 - SN3931	DAE4 Sn376	0.514	0.544	0.514	-4.81	0.319	0.340	0.319	-6.18	SAR-11
2024/7/5	2450	50	D2450V2-929	EX3DV4 - SN7625	DAE4 Sn376	2.360	52.400	47.2	-9.92	1.130	24.700	22.6	-8.50	SAR-20
2024/7/14	2450	50	D2450V2-929	EX3DV4 - SN7813	DAE4 Sn1805	2.530	52.400	50.6	-3.44	1.210	24.700	24.2	-2.02	SAR-21
2024/7/4	5250	50	D5GHzV2-1006-5250	EX3DV4 - SN7625	DAE4 Sn376	3.750	81.200	75	-7.64	1.110	23.200	22.2	-4.31	SAR-20
2024/7/6	5250	50	D5GHzV2-1006-5250	EX3DV4 - SN7625	DAE4 Sn376	4.030	81.200	80.6	-0.74	1.180	23.200	23.6	1.72	SAR-20
2024/7/26	5250	50	D5GHzV2-1006-5250	EX3DV4 - SN7590	DAE4 Sn376	4.180	81.200	83.6	2.96	1.200	23.200	24	3.45	SAR-19
2024/7/4	5600	50	D5GHzV2-1006-5600	EX3DV4 - SN7625	DAE4 Sn376	4.040	84.700	80.8	-4.60	1.190	24.200	23.8	-1.65	SAR-20
2024/7/7	5600	50	D5GHzV2-1006-5600	EX3DV4 - SN7625	DAE4 Sn376	4.530	84.700	90.6	6.97	1.300	24.200	26	7.44	SAR-20
2024/7/26	5600	50	D5GHzV2-1006-5600	EX3DV4 - SN7590	DAE4 Sn376	4.000	84.700	80	-5.55	1.110	24.200	22.2	-8.26	SAR-19
2024/7/4	5750	50	D5GHzV2-1006-5750	EX3DV4 - SN7625	DAE4 Sn376	4.240	80.900	84.8	4.82	1.190	22.900	23.8	3.93	SAR-20
2024/7/8	5750	50	D5GHzV2-1006-5750	EX3DV4 - SN7625	DAE4 Sn376	4.280	80.900	85.6	5.81	1.190	22.900	23.8	3.93	SAR-20
2024/7/12	5800	50	D5GHzV2-1128-5800	EX3DV4 - SN7813	DAE4 Sn1805	3.970	78.700	79.4	0.89	1.120	22.200	22.4	0.90	SAR-21
2024/7/13	5800	50	D5GHzV2-1128-5800	EX3DV4 - SN7813	DAE4 Sn1805	3.950	78.700	79	0.38	1.100	22.200	22	-0.90	SAR-21
2024/7/9	6500	100	D6.5GHzV2-1083	EX3DV4 - SN7625	DAE4 Sn376	28.200	292.000	282	-3.42	5.290	54.000	52.9	-2.04	SAR-20
2024/7/10	6500	100	D6.5GHzV2-1083	EX3DV4 - SN7625	DAE4 Sn376	29.100	292.000	291	-0.34	5.440	54.000	54.4	0.74	SAR-20
2024/7/11	6500	100	D6.5GHzV2-1083	EX3DV4 - SN7625	DAE4 Sn376	28.700	292.000	287	-1.71	5.370	54.000	53.7	-0.56	SAR-20

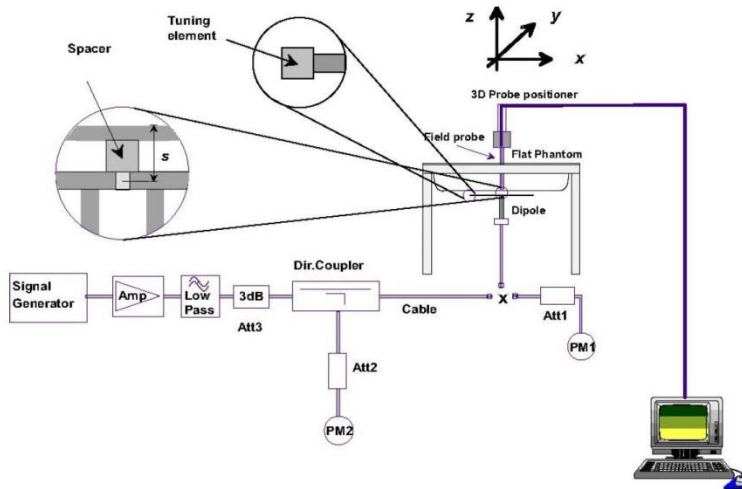


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

9.3 PD System Performance Check Results

The system was verified to be within ± 0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user’s manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG’s mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check. The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes

Test Site	Frequency (GHz)	5G Verification Source	Probe S/N	DAE S/N	Distance (mm)	Measured 4 cm ² (W/m ²)	Targeted 4 cm ² (W/m ²)	Deviation (dB)	Date
SAR13	10G	10GHz_1052	9424	1424	10	61.6	56.8	0.35	2024/7/5
SAR13	10G	10GHz_1052	9424	1694	10	50.5	56.8	-0.51	2024/7/8
SAR14	10G	10GHz_1052	9441	376	10	61.6	56.8	0.35	2024/7/29

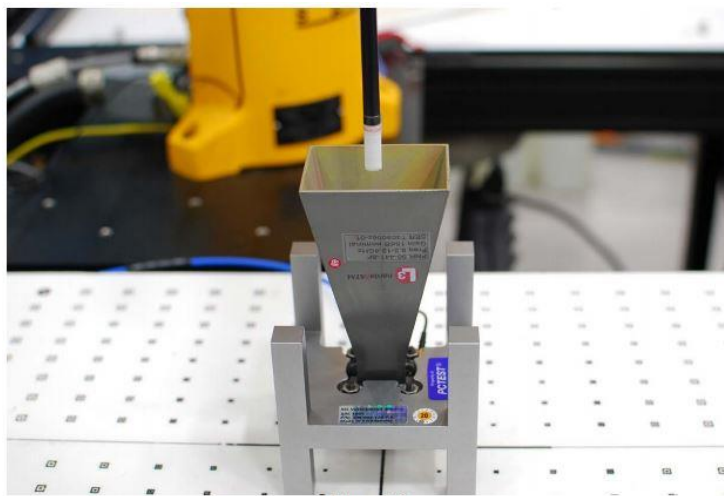


Figure 4-3
System Verification Setup Photo

System Performance Check Setup

10. RF Exposure Positions

10.1 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

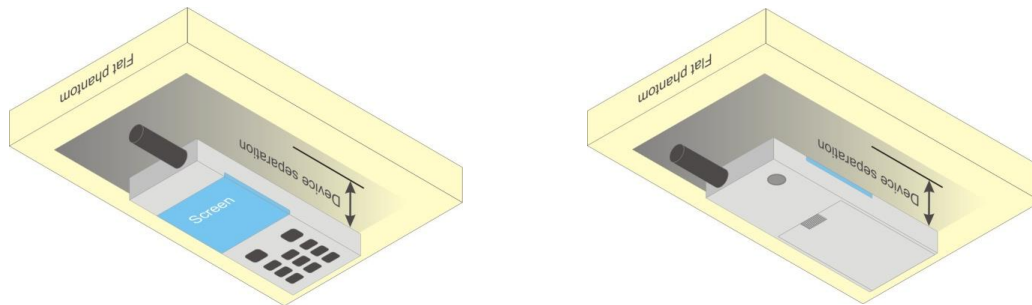


Fig 9.4 Body Worn Position

10.2 Product Specific Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.



11. WiFi/Bluetooth Output Power (Unit: dBm)

General Note:

1. All of the wireless technology of this device only supports MIMO mode Operation.
2. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, additional output power measurements were not necessary.
3. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
4. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
5. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
6. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. 18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
7. Per 201904 TCBC workshops, General principles of FCC KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax SAR testing. For the table below the 802.11ax maximum power is SU (non-OFDMA), and the SU maximum power also higher than RU (OFDMA)
8. In applying the test guidance, the IEEE 802.11 mode with the maximum output power (out of all modes) should be considered for testing
9. For modes with the same maximum output power, the guidance from section 5.3.2 a) of FCC KDB Publication 248227 D01 should be applied, with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency bands
10. When SAR testing for 802.11ax is required
 - a. If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power
 - b. Otherwise, consider the fully allocated channel for SAR testing
 - c. When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel



<2.4GHz WLAN>															
Mode	Channel	Frequency (MHz)	Ant 7+8 (7)		Ant 7+8 (8)		Ant 7+8								
			Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %						
2.4GHz WLAN DBS / Non-DBS	802.11b 1Mbps	1	2412	15.62	16.00	15.57	16.00	18.61	19.00	99.00					
		6	2437	15.50	16.00	15.73	16.00	18.63	19.00						
		11	2462	16.34	16.50	16.45	16.50	19.41	19.50						
	802.11g 6Mbps	1	2412	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required				
		6	2437									19.00	19.00	22.00	22.00
		11	2462									19.00	19.00	22.00	22.00
	802.11n-HT20 MCS0	1	2412									19.00	19.00	21.50	21.50
		6	2437									19.00	19.00	21.50	21.50
		11	2462									17.50	17.50	20.50	20.50
	802.11n-HT40 MCS0	3	2422									17.50	17.50	20.50	20.50
		6	2437									18.50	18.50	21.50	21.50
		9	2452									17.00	17.00	20.00	20.00
	802.11ax-HE20 MCS0	1	2412									19.00	19.00	21.50	21.50
		6	2437									19.00	19.00	21.50	21.50
		11	2462									17.50	17.50	20.50	20.50
	802.11ax-HE40 MCS0	3	2422									17.50	17.50	20.50	20.50
		6	2437									19.00	19.00	21.50	21.50
		9	2452									17.00	17.00	20.00	20.00



<5.2GHz WLAN>										
5.2GHz WLAN Non-DBS	Mode	Channel	Frequency (MHz)	Ant 7+8 (7)		Ant 7+8 (8)		Ant 7+8		
				Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN Non-DBS	802.11a 6Mbps	36	5180	Not Required	17.50	Not Required	17.50	Not Required	20.50	Not Required
		40	5200		17.50		20.50			
		44	5220		17.50		20.50			
		48	5240		17.50		20.50			
	802.11n-HT20 MCS0	36	5180		17.50		17.50		19.00	
		40	5200		17.50		17.50		19.00	
		44	5220		17.50		17.50		20.50	
		48	5240		17.50		17.50		20.50	
	802.11n-HT40 MCS0	38	5190		15.00		15.00		18.00	
		46	5230		17.50		17.50		20.50	
	802.11ac-VHT20 MCS0	36	5180		16.00		16.00		19.00	
		40	5200		16.00		16.00		19.00	
		44	5220		17.50		17.50		20.50	
	802.11ac-VHT40 MCS0	38	5190		15.00		15.00		18.00	
		46	5230		17.50		17.50		20.50	
	802.11ac-VHT80 MCS0	42	5210		14.00		14.00		17.00	
		36	5180		16.00		16.00		19.00	
	802.11ax-HE20 MCS0	40	5200		16.00		16.00		19.00	
		44	5220		17.50		17.50		20.50	
		48	5240		17.50		17.50		20.50	
	802.11ax-HE40 MCS0	38	5190		15.00		15.00		18.00	
		46	5230		17.50		17.50		20.50	
	802.11ax-HE80 MCS0	42	5210		14.00		14.00		17.00	



<5.2GHz WLAN>										
5.2GHz WLAN DBS	Mode	Channel	Frequency (MHz)	Ant 7+8 (7)		Ant 7+8 (8)		Ant 7+8		
				Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN DBS	802.11a 6Mbps	36	5180	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required
		40	5200		15.50		18.50			
		44	5220		15.50		18.50			
		48	5240		15.50		18.50			
	802.11n-HT20 MCS0	36	5180		15.50		18.50			
		40	5200		15.50		18.50			
		44	5220		15.50		18.50			
		48	5240		15.50		18.50			
	802.11n-HT40 MCS0	38	5190		15.00		18.00			
		46	5230		15.50		18.50			
	802.11ac-VHT20 MCS0	36	5180		15.50		18.50			
		40	5200		15.50		18.50			
		44	5220		15.50		18.50			
	802.11ac-VHT40 MCS0	38	5190		15.00		18.00			
		46	5230		15.50		18.50			
	802.11ac-VHT80 MCS0	42	5210		14.00		17.00			
		36	5180		15.50		18.50			
	802.11ax-HE20 MCS0	40	5200		15.50		18.50			
		44	5220		15.50		18.50			
		48	5240		15.50		18.50			
	802.11ax-HE40 MCS0	38	5190		15.00		18.00			
		46	5230		15.50		18.50			
	802.11ax-HE80 MCS0	42	5210		14.00		17.00			



<5.3GHz WLAN>													
5.3GHz WLAN Non-DBS	Mode	Channel	Frequency (MHz)	Ant 7+8 (7)		Ant 7+8 (8)		Ant 7+8					
				Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %			
5.3GHz WLAN Non-DBS	802.11a 6Mbps	52	5260	17.08	17.50	16.14	17.50	19.65	20.50	99.00			
		56	5280	17.10	17.50	16.16	17.50	19.67	20.50				
		60	5300	17.16	17.50	16.39	17.50	19.80	20.50				
		64	5320	17.19	17.50	16.08	17.50	19.68	20.50				
	802.11n-HT20 MCS0	52	5260	Not Required	17.50	Not Required	17.50	Not Required	20.50	Not Required			
		56	5280		17.50		17.50		20.50				
		60	5300		17.50		17.50		20.50				
		64	5320		16.00		16.00		19.00				
	802.11n-HT40 MCS0	54	5270	17.25	17.50	16.06	17.50	19.71	20.50	99.00			
		62	5310	14.49	14.50	14.04	14.50	17.31	17.50				
	802.11ac-VHT20 MCS0	52	5260	Not Required	17.50	Not Required	17.50	Not Required	20.50	Not Required			
		56	5280		17.50		17.50		20.50				
		60	5300		17.50		17.50		20.50				
		64	5320		16.00		16.00		19.00				
	802.11ac-VHT40 MCS0	54	5270		17.50		17.50		17.50		17.50	20.50	20.50
		62	5310		14.50		14.50		14.50		14.50	17.50	17.50
	802.11ac-VHT80 MCS0	58	5290		14.00		14.00		14.00		14.00	17.00	17.00
	802.11ac-VHT160 MCS0	50	5250		11.00		11.00		11.00		11.00	14.00	14.00
	802.11ax-HE20 MCS0	52	5260		17.50		17.50		17.50		17.50	20.50	20.50
		56	5280		17.50		17.50		17.50		17.50	20.50	20.50
		60	5300		17.50		17.50		17.50		17.50	20.50	20.50
		64	5320		16.00		16.00		16.00		16.00	19.00	19.00
	802.11ax-HE40 MCS0	54	5270	17.50	17.50	17.50	17.50	20.50	20.50				
		62	5310	14.50	14.50	14.50	14.50	17.50	17.50				
	802.11ax-HE80 MCS0	58	5290	14.00	14.00	14.00	14.00	17.00	17.00				
	802.11ax-HE160 MCS0	50	5250	11.00	11.00	11.00	11.00	14.00	14.00				



<5.3GHz WLAN>										
5.3GHz WLAN DBS	Mode	Channel	Frequency (MHz)	Ant 7+8 (7)		Ant 7+8 (8)		Ant 7+8		
				Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN DBS	802.11a 6Mbps	52	5260	14.54	15.50	13.61	15.50	17.11	18.50	99.00
		56	5280	14.63	15.50	13.65	15.50	17.18	18.50	
		60	5300	14.51	15.50	13.44	15.50	17.02	18.50	
		64	5320	14.09	15.50	13.19	15.50	16.67	18.50	
	802.11n-HT20 MCS0	52	5260	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required
		56	5280		15.50		15.50		18.50	
		60	5300		15.50		15.50		18.50	
		64	5320		15.50		15.50		18.50	
	802.11n-HT40 MCS0	54	5270	14.78	15.50	13.69	15.50	17.28	18.50	99.00
		62	5310	14.15	14.50	13.77	14.50	16.97	17.50	
	802.11ac-VHT20 MCS0	52	5260	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required
		56	5280		15.50		15.50		18.50	
		60	5300		15.50		15.50		18.50	
		64	5320		15.50		15.50		18.50	
	802.11ac-VHT40 MCS0	54	5270	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required
		62	5310		14.50		14.50		17.50	
	802.11ac-VHT80 MCS0	58	5290	Not Required	14.00	Not Required	14.00	Not Required	17.00	99.00
	802.11ac-VHT160 MCS0	50	5250	Not Required	11.00	Not Required	11.00	Not Required	14.00	99.00
	802.11ax-HE20 MCS0	52	5260	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required
		56	5280		15.50		15.50		18.50	
60		5300	15.50		15.50		18.50			
64		5320	15.50		15.50		18.50			
802.11ax-HE40 MCS0	54	5270	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required	
	62	5310		14.50		14.50		17.50		
802.11ax-HE80 MCS0	58	5290	Not Required	14.00	Not Required	14.00	Not Required	17.00	99.00	
802.11ax-HE160 MCS0	50	5250	Not Required	11.00	Not Required	11.00	Not Required	14.00	99.00	



<5.5GHz WLAN>										
Mode	Channel	Frequency (MHz)	Ant 7+8 (7)		Ant 7+8 (8)		Ant 7+8			
			Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
5.5GHz WLAN Non-DBS	802.11a 6Mbps	100	5500	Not Required	17.00	Not Required	17.00	Not Required	20.00	Not Required
		116	5580		17.00		20.00			
		124	5620		17.00		20.00			
		132	5660		17.00		20.00			
		140	5700		17.00		20.00			
		144	5720		17.00		20.00			
	802.11n-HT20 MCS0	100	5500	Not Required	16.00	Not Required	16.00	Not Required	19.00	Not Required
		116	5580		17.00		20.00			
		124	5620		15.50		18.50			
		132	5660		15.50		18.50			
		140	5700		15.50		18.50			
		144	5720		17.00		20.00			
	802.11n-HT40 MCS0	102	5510	14.47	14.50	14.01	14.50	17.26	17.50	99.00
		110	5550	16.99	17.50	15.65	17.50	19.38	20.50	
		126	5630	14.69	15.00	14.67	15.00	17.69	18.00	
		134	5670	14.71	15.00	14.69	15.00	17.71	18.00	
		142	5710	16.89	17.00	16.67	17.00	19.79	20.00	
	802.11ac-VHT20 MCS0	100	5500	Not Required	16.00	Not Required	16.00	Not Required	19.00	Not Required
116		5580	17.00		20.00					
124		5620	15.50		18.50					
132		5660	15.50		18.50					
140		5700	15.50		18.50					
144		5720	17.00		20.00					
802.11ac-VHT40 MCS0	102	5510	Not Required	14.50	Not Required	14.50	Not Required	17.50	Not Required	
	110	5550		17.50		20.50				
	126	5630		15.00		18.00				
	134	5670		15.00		18.00				
	142	5710		17.00		20.00				
802.11ac-VHT80 MCS0	106	5530	13.99	14.00	13.16	14.00	16.61	17.00	99.00	
	122	5610	16.58	17.00	15.83	17.00	19.23	20.00		
	138	5690	16.57	17.00	16.11	17.00	19.36	20.00		
802.11ac-VHT160 MCS0	114	5570	Not Required	12.00	Not Required	12.00	Not Required	15.00	Not Required	
802.11ax-HE20 MCS0	100	5500		16.00		19.00				
	116	5580		17.00		20.00				
	124	5620		15.50		18.50				
	132	5660		15.50		18.50				
	140	5700		15.50		18.50				
	144	5720		17.00		20.00				
802.11ax-HE40 MCS0	102	5510		14.50		17.50				
	110	5550		17.00		20.00				
	126	5630		15.00		18.00				
	134	5670		15.00		18.00				
802.11ax-HE80 MCS0	106	5530		14.00		17.00				
	122	5610	17.00	20.00						
	138	5690	17.00	20.00						
802.11ax-HE160 MCS0	114	5570	12.00	15.00						



<5.5GHz WLAN>										
5.5GHz WLAN DBS	Mode	Channel	Frequency (MHz)	Ant 7+8 (7)		Ant 7+8 (8)		Ant 7+8		
				Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	100	5500	Not Required	15.00	15.00	15.00	15.00	18.00	18.00	99.00
	116	5580								
	124	5620								
	132	5660								
	140	5700								
	144	5720								
802.11n-HT20 MCS0	100	5500	Not Required	15.00	15.00	15.00	15.00	18.00	18.00	99.00
	116	5580								
	124	5620								
	132	5660								
	140	5700								
	144	5720								
802.11n-HT40 MCS0	102	5510	Not Required	15.00	14.50	15.00	14.50	18.00	17.50	Not Required
	110	5550								
	126	5630								
	134	5670								
802.11ac-VHT20 MCS0	100	5500	Not Required	15.00	15.00	15.00	15.00	18.00	18.00	99.00
	116	5580								
	124	5620								
	132	5660								
	140	5700								
802.11ac-VHT40 MCS0	102	5510	Not Required	15.00	14.50	15.00	14.50	18.00	17.50	99.00
	110	5550								
	126	5630								
	134	5670								
	142	5710								
802.11ac-VHT80 MCS0	106	5530	Not Required	13.89	14.00	13.22	14.00	16.58	17.00	99.00
	122	5610								
	138	5690								
802.11ac-VHT160 MCS0	114	5570	Not Required	12.00	12.00	12.00	15.00	15.00	99.00	
802.11ax-HE20 MCS0	100	5500								
	116	5580								
	124	5620								
	132	5660								
	140	5700								
	144	5720								
802.11ax-HE40 MCS0	102	5510								
	110	5550								
	126	5630								
	134	5670								
802.11ax-HE80 MCS0	106	5530								
	122	5610								
	138	5690								
802.11ax-HE160 MCS0	114	5570								



<5.8GHz WLAN>										
5.8GHz WLAN Non-DBS	Mode	Channel	Frequency (MHz)	Ant 7+8 (7)		Ant 7+8 (8)		Ant 7+8		
				Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN Non-DBS	802.11a 6Mbps	149	5745	Not Required	17.00	Not Required	17.00	Not Required	20.00	Not Required
		157	5785		17.00		20.00			
		165	5825		17.00		20.00			
	802.11n-HT20 MCS0	149	5745	Not Required	17.00	Not Required	17.00	Not Required	20.00	Not Required
		157	5785		17.00		20.00			
		165	5825		17.00		20.00			
	802.11n-HT40 MCS0	151	5755	16.77	17.00	16.66	17.00	19.73	20.00	99.00
		159	5795	16.68	17.00	16.73	17.00	19.72	20.00	
	802.11ac-VHT20 MCS0	149	5745	Not Required	17.00	Not Required	17.00	Not Required	20.00	Not Required
		157	5785		17.00		20.00			
		165	5825		17.00		20.00			
	802.11ac-VHT40 MCS0	151	5755	Not Required	17.00	Not Required	17.00	Not Required	20.00	Not Required
		159	5795		17.00		20.00			
	802.11ac-VHT80 MCS0	155	5775	16.71	17.00	16.67	17.00	19.70	20.00	99.00
	802.11ax-HE20 MCS0	149	5745	Not Required	17.00	Not Required	17.00	Not Required	20.00	Not Required
		157	5785		17.00		20.00			
		165	5825		17.00		20.00			
	802.11ax-HE40 MCS0	151	5755	Not Required	17.00	Not Required	17.00	Not Required	20.00	Not Required
159		5795	17.00		20.00					
802.11ax-HE80 MCS0	155	5775	17.00	17.00	17.00	17.00	20.00	20.00	Not Required	

<5.8GHz WLAN>										
5.8GHz WLAN DBS	Mode	Channel	Frequency (MHz)	Ant 7+8 (7)		Ant 7+8 (8)		Ant 7+8		
				Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN DBS	802.11a 6Mbps	149	5745	Not Required	15.00	Not Required	15.00	Not Required	18.00	Not Required
		157	5785		15.00		18.00			
		165	5825		15.00		18.00			
	802.11n-HT20 MCS0	149	5745	Not Required	15.00	Not Required	15.00	Not Required	18.00	Not Required
		157	5785		15.00		18.00			
		165	5825		15.00		18.00			
	802.11n-HT40 MCS0	151	5755	14.55	15.00	14.19	15.00	17.38	18.00	99.00
		159	5795	14.59	15.00	14.27	15.00	17.44	18.00	
	802.11ac-VHT20 MCS0	149	5745	Not Required	15.00	Not Required	15.00	Not Required	18.00	Not Required
		157	5785		15.00		18.00			
		165	5825		15.00		18.00			
	802.11ac-VHT40 MCS0	151	5755	Not Required	15.00	Not Required	15.00	Not Required	18.00	Not Required
		159	5795		15.00		18.00			
	802.11ac-VHT80 MCS0	155	5775	14.16	15.00	13.91	15.00	17.05	18.00	99.00
	802.11ax-HE20 MCS0	149	5745	Not Required	15.00	Not Required	15.00	Not Required	18.00	Not Required
		157	5785		15.00		18.00			
		165	5825		15.00		18.00			
	802.11ax-HE40 MCS0	151	5755	Not Required	15.00	Not Required	15.00	Not Required	18.00	Not Required
159		5795	15.00		18.00					
802.11ax-HE80 MCS0	155	5775	15.00	15.00	15.00	15.00	18.00	18.00	Not Required	



<5.9GHz WLAN UNII 4>										
Mode	Channel	Frequency (MHz)	Ant 7+8 (7)		Ant 7+8 (8)		Ant 7+8			
			Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
5.9GHz WLAN UNII 4 Non-DBS	802.11a 6Mbps	169	5845	Not Required	15.00	Not Required	15.00	Not Required	18.00	Not Required
		173	5865		15.00		15.00		18.00	
		177	5885		15.00		15.00		18.00	
	802.11n-HT20 MCS0	169	5845		15.00		15.00		18.00	
		173	5865		15.00		15.00		18.00	
		177	5885		15.00		15.00		18.00	
	802.11n-HT40 MCS0	167	5835		17.00		17.00		20.00	
		175	5875		17.00		17.00		20.00	
	802.11ac-VHT20 MCS0	169	5845		15.00		15.00		18.00	
		173	5865	15.00	15.00	18.00				
		177	5885	15.00	15.00	18.00				
	802.11ac-VHT40 MCS0	167	5835	16.84	17.00	16.74	17.00	19.80	20.00	99.00
		175	5875	16.68	17.00	16.73	17.00	19.72	20.00	99.00
	802.11ac-VHT80 MCS0	171	5855	16.81	17.00	16.64	17.00	19.74	20.00	99.00
	802.11ac-VHT160 MCS0	163	5815	Not Required	16.50	Not Required	16.50	Not Required	19.50	Not Required
	802.11ax-HE20 MCS0	169	5845		15.00		15.00		18.00	
		173	5865		15.00		15.00		18.00	
		177	5885		15.00		15.00		18.00	
	802.11ax-HE40 MCS0	167	5835		17.00		17.00		20.00	
		175	5875		17.00		17.00		20.00	
802.11ax-HE80 MCS0	171	5855	17.00		17.00		20.00			
802.11ax-HE160 MCS0	163	5815	16.50		16.50		19.50			



<5.9GHz WLAN UNII 4>										
Mode	Channel	Frequency (MHz)	Ant 7+8 (7)		Ant 7+8 (8)		Ant 7+8			
			Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
5.9GHz WLAN UNII 4 DBS	802.11a 6Mbps	169	5845	Not Required	15.00	Not Required	15.00	Not Required	18.00	Not Required
		173	5865		15.00		15.00		18.00	
		177	5885		15.00		15.00		18.00	
	802.11n-HT20 MCS0	169	5845		15.00		15.00		18.00	
		173	5865		15.00		15.00		18.00	
		177	5885		15.00		15.00		18.00	
	802.11n-HT40 MCS0	167	5835		15.00		15.00		18.00	
		175	5875		15.00		15.00		18.00	
	802.11ac-VHT20 MCS0	169	5845		15.00		15.00		18.00	
		173	5865		15.00		15.00		18.00	
		177	5885		15.00		15.00		18.00	
	802.11ac-VHT40 MCS0	167	5835		15.00		15.00		18.00	
		175	5875	15.00	15.00	18.00				
	802.11ac-VHT80 MCS0	171	5855	14.75	15.00	14.61	15.00	17.69	18.00	99.00
	802.11ac-VHT160 MCS0	163	5815	14.22	15.00	14.39	15.00	17.32	18.00	99
	802.11ax-HE20 MCS0	169	5845	Not Required	15.00	Not Required	15.00	Not Required	18.00	Not Required
		173	5865		15.00		15.00		18.00	
		177	5885		15.00		15.00		18.00	
	802.11ax-HE40 MCS0	167	5835		15.00		15.00		18.00	
		175	5875		15.00		15.00		18.00	
802.11ax-HE80 MCS0	171	5855	15.00		15.00		18.00			
802.11ax-HE160 MCS0	163	5815	15.00		15.00		18.00			



<WiFi 6E>										
Mode	Channel	Frequency (MHz)	Ant 7+8 (7)		Ant 7+8 (8)		Ant 7+8			
			Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
WLAN 6GHz (LPI) DBS / Non-DBS	802.11a 6Mbps	1	5955	Not Required	0.50	Not Required	0.50	Not Required	3.50	Not Required
		57	6235		0.50		3.50			
		113	6515		0.50		3.50			
		173	6815		-0.50		2.50			
		233	7115		0.00		3.00			
	802.11ax-HE20 MCS0	1	5955		1.50		4.50			
		57	6235		1.50		4.50			
		113	6515		1.50		4.50			
		173	6815		0.00		3.00			
		233	7115		-7.00		-4.00			
	802.11ax-HE40 MCS0	3	5965		4.00		7.00			
		59	6245		4.50		7.50			
		107	6485		5.00		8.00			
		171	6805		2.50		5.50			
		227	7085		2.50		5.50			
	802.11ax-HE80 MCS0	7	5985		6.00		9.00			
		71	6305		6.50		9.50			
		119	6545		6.00		9.00			
		167	6785		4.50		7.50			
	802.11ax-HE160 MCS0	215	7025		5.50		8.50			
15		6025	6.12	8.00	7.98	8.00	10.16	11.00		
47		6185	6.51	8.50	8.43	8.50	10.59	11.50		
111		6505	8.49	8.50	8.44	8.50	11.48	11.50		
143		6665	6.43	8.00	7.94	8.00	10.26	11.00		
	207	6985	7.32	8.00	6.75	8.00	10.05	11.00		


<2.4GHz Bluetooth>

				Ant 7		
Bluetooth	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	BR / EDR 1Mbps	0	2402	Not Required	6.50	Not Required
		39	2441			
		78	2480			
	BR / EDR 2Mbps	0	2402			
		39	2441			
		78	2480			
	BR / EDR 3Mbps	0	2402			
		39	2441			
		78	2480			
LE 1Mbps	0	2402				
	19	2440				
	39	2480				
LE 2Mbps	0	2402				
	19	2440				
	39	2480				
LE S2	0	2402				
	19	2440				
	39	2480				
LE S8	0	2402	5.91	6.50	97.57	
	19	2440	5.63	6.50		
	39	2480	5.52	6.50		

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 97.57% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

BT Duty cycle

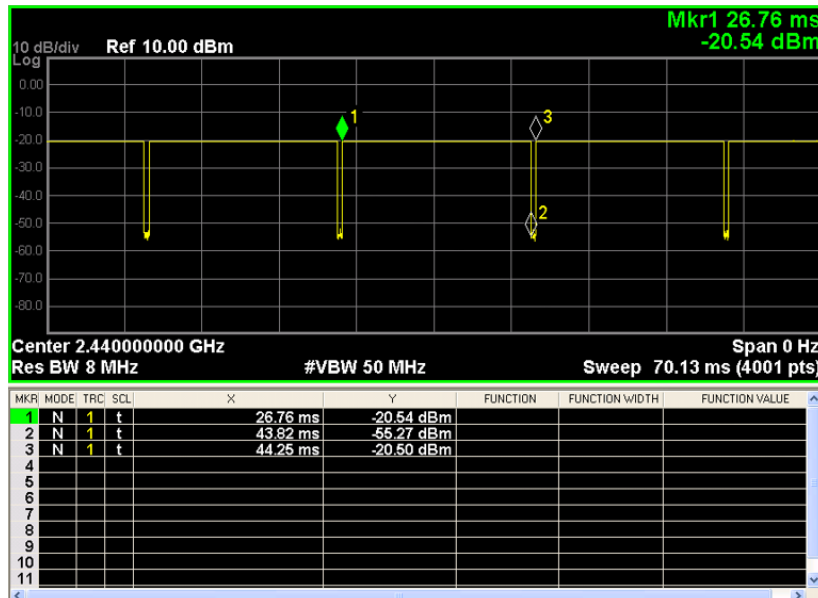




	Mode	Channel	Frequency (MHz)	Ant 8		
				Average power (dBm)	Tune-Up Limit	Duty Cycle %
Bluetooth	LE 1Mbps	0	2402	Not Required	6.50	Not Required
		19	2440		6.50	
		39	2480		6.50	
	LE 2Mbps	0	2402		6.50	
		19	2440		6.50	
		39	2480		6.50	
	LE S2	0	2402		6.50	
		19	2440		6.50	
		39	2480		6.50	
	LE S8	0	2402	5.53	6.50	83.36
		19	2440	5.95	6.50	
		39	2480	6.26	6.50	


General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 83.36% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

BT Duty cycle

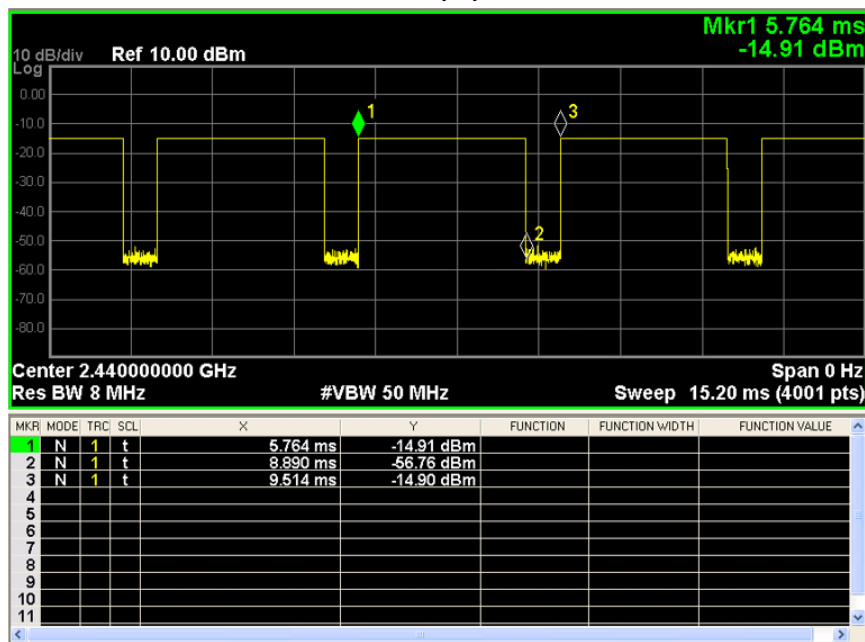

12. Antenna Location

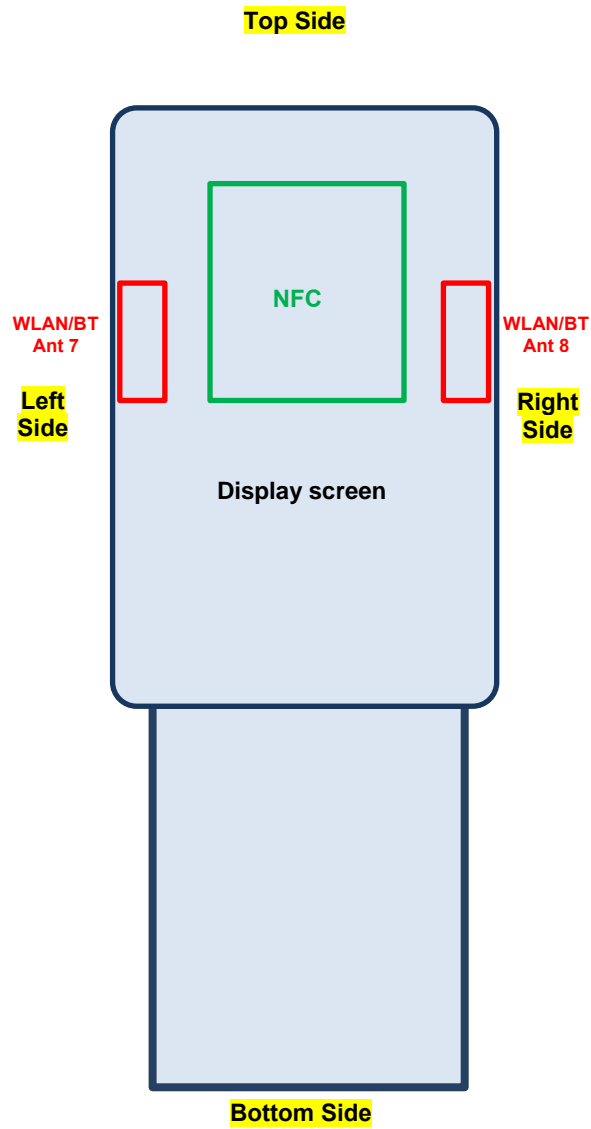

<SAR test exclusion table>

General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:
 - $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot \sqrt{f(\text{GHz})} \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

Exposure Position	Wireless Interface	BT/2.4GHz WLAN ANT 7	BT/2.4GHz WLAN ANT 8	5/6GHz WLAN ANT 7	5/6GHz WLAN ANT 8
	Calculated Frequency (MHz)	2462	2462	7115	7115
	Maximum power (dBm)	19.0	19.0	17.5	17.5
	Maximum rated power(mW)	79.43	79.43	56.23	56.23
Left Side	Separation distance(mm)	7.0	61.0	7.0	61.0
	exclusion threshold	17.8	515.0	21.4	415.0
	Testing required?	Yes	No	Yes	No
Right Side	Separation distance(mm)	67.0	7.0	67.0	7.0
	exclusion threshold	665.0	17.8	565.0	21.4
	Testing required?	No	Yes	No	Yes
Top Side	Separation distance(mm)	75.0	65.0	75.0	65.0
	exclusion threshold	865.0	615.0	765.0	515.0
	Testing required?	No	No	No	No
Bottom Side	Separation distance(mm)	144.0	144.0	144.0	1444.0
	exclusion threshold	2590.0	2590.0	2490.0	2490.0
	Testing required?	No	No	No	No



13. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. For WLAN/BT product specific SAR is necessary too, due to an overall diagonal dimension is > 16 cm.
5. The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted 1-g SAR is 0.552 W/kg and 10-g SAR is 1.079 W/kg for Body-worn and Extremity exposure condition respectively.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, WLAN5.2GHz SAR testing is not required when the WLAN5.3GHz band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for WLAN5.2GHz band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. For determination of the scaling factor for report SAR of MIMO mode, if the hot spots are separated the scaling factors are individually determined from each transmit chain. If the hot spots are not spatially separated, the scaling factor is determined from the worst number of each transmit chain
6. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

WLAN PD Note:

1. The WiFi 6E PD was performed according 2020 TCB workshop RF Exposure 5G RFX Policies Interim Procedures.
2. First, evaluate SAR using 6-7 GHz parameters per IEC/IEEE 62209-1528:2020 and evaluate incident PD using the mmw near-field probe and total-field/power-density reconstruction method.
3. Per Interim Procedures. The power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.68 dB (85.4%) was used to determine the psPD measurement scaling factor
4. The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. The WiFi 6E RF Exposure results are used for simultaneous transmission analysis with the other transmitters and total exposure ratio, the analysis can be found in this report section 15
6. Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements.
7. Power density was calculated by repeated E-field measurements on two measurement planes separated by $\lambda/4$.
8. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
9. The measurement procedure consists of measuring the PD_{inc} at two different distances: 2 mm (compliance distance) and $\lambda/5$. The grid extents should be large enough to fully capture the transmitted energy. The grid step should be fine enough to demonstrate that the integrated Power Density iPD_n fulfill the criterion described below. Since iPD ratio between the two distances is ≥ -1 dB, the grid step (0.0625) was sufficient for determining compliance at d=2mm.

$$10 \cdot \log_{10} \frac{iPD_n(2mm)}{iPD_n(\lambda/5)} \geq -1$$

NFC Note:

1. NFC mainly operate in hand-held extremity exposure conditions, therefore Standalone 10-g extremity SAR testing for NFC will be performed with active mode, with 100% duty cycle at 0mm separation distance.
2. NFC SAR is measured for all surface edges of the device with a transmitting antenna located within 25 mm.
3. NFC 13.56MHz antenna port is not available on the device to support conducted power measurement, therefore the measured results are referred to as reported SAR.
4. NFC SAR test tissue-simulating liquid parameter: refer to IEC/IEEE 62209-1528 2020.



13.1 Body Worn Accessory SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Scanner	Power State	Keypad	Ch.	Freq. (MHz)	Holster	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	11	2462	-	16.34	16.50	1.038	99	1.010	0.14	0.031	0.032
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	11	2462	-	16.45	16.50	1.012	99	1.010	0.14	0.071	0.073
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	11	2462	-	16.34	16.50	1.038	99	1.010	-0.06	0.119	0.125
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	11	2462	-	16.45	16.50	1.012	99	1.010	-0.06	0.270	0.276
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 7+8(7)	S0703	DBS / Non DBS	AlphaNumeric	11	2462	-	16.34	16.50	1.038	99	1.010	0.17	0.037	0.039
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 7+8(8)	S0703	DBS / Non DBS	AlphaNumeric	11	2462	-	16.45	16.50	1.012	99	1.010	0.17	0.085	0.087
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 7+8(7)	S0803	DBS / Non DBS	AlphaNumeric	11	2462	-	16.34	16.50	1.038	99	1.010	0.01	0.051	0.053
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 7+8(8)	S0803	DBS / Non DBS	AlphaNumeric	11	2462	-	16.45	16.50	1.012	99	1.010	0.01	0.115	0.117
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	Numeric	11	2462	-	16.34	16.50	1.038	99	1.010	-0.17	0.055	0.058
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	Numeric	11	2462	-	16.45	16.50	1.012	99	1.010	-0.17	0.124	0.127
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	Large Numeric	11	2462	-	16.34	16.50	1.038	99	1.010	-0.01	0.055	0.058
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	Large Numeric	11	2462	-	16.45	16.50	1.012	99	1.010	-0.01	0.124	0.127
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	53keys AlphaNumeric	11	2462	-	16.34	16.50	1.038	99	1.010	0.05	0.052	0.054
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	53keys AlphaNumeric	11	2462	-	16.45	16.50	1.012	99	1.010	0.05	0.118	0.121
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	42keys Numeric	11	2462	-	16.34	16.50	1.038	99	1.010	-0.09	0.042	0.044
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	42keys Numeric	11	2462	-	16.45	16.50	1.012	99	1.010	-0.09	0.095	0.097
01	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	11	2462	Holster 1	16.34	16.50	1.038	99	1.010	-0.15	0.250	0.262
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	11	2462	Holster 1	16.45	16.50	1.012	99	1.010	-0.15	0.304	0.311
	WLAN2.4GHz	802.11b 1Mbps	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	11	2462	Holster 2	16.34	16.50	1.038	99	1.010	0.07	0.089	0.093
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	54	5270	-	17.25	17.50	1.059	99	1.010	-0.05	0.127	0.136
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	54	5270	-	16.06	17.50	1.393	99	1.010	-0.05	0.113	0.159
	WLAN5GHz	802.11n-HT40 MCS0	Back	15mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	54	5270	-	17.25	17.50	1.059	99	1.010	0.08	0.081	0.087
	WLAN5GHz	802.11n-HT40 MCS0	Back	15mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	54	5270	-	16.06	17.50	1.393	99	1.010	0.08	0.072	0.101
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(7)	S0703	Non DBS	AlphaNumeric	54	5270	-	17.25	17.50	1.059	99	1.010	0.03	0.101	0.108
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(8)	S0703	Non DBS	AlphaNumeric	54	5270	-	16.06	17.50	1.393	99	1.010	0.03	0.089	0.125
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(7)	S0803	Non DBS	AlphaNumeric	54	5270	-	17.25	17.50	1.059	99	1.010	-0.08	0.101	0.108
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(8)	S0803	Non DBS	AlphaNumeric	54	5270	-	16.06	17.50	1.393	99	1.010	-0.08	0.090	0.127
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	Non DBS	Numeric	54	5270	-	17.25	17.50	1.059	99	1.010	-0.18	0.097	0.104
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	Non DBS	Numeric	54	5270	-	16.06	17.50	1.393	99	1.010	-0.18	0.086	0.121
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	Non DBS	Large Numeric	54	5270	-	17.25	17.50	1.059	99	1.010	0.12	0.091	0.097
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	Non DBS	Large Numeric	54	5270	-	16.06	17.50	1.393	99	1.010	0.12	0.081	0.114
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	Non DBS	53keys AlphaNumeric	54	5270	-	17.25	17.50	1.059	99	1.010	-0.17	0.102	0.109
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	Non DBS	53keys AlphaNumeric	54	5270	-	16.06	17.50	1.393	99	1.010	-0.17	0.090	0.127
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	Non DBS	42keys Numeric	54	5270	-	17.25	17.50	1.059	99	1.010	0.14	0.083	0.089
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	Non DBS	42keys Numeric	54	5270	-	16.06	17.50	1.393	99	1.010	0.14	0.073	0.103
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	54	5270	Holster 1	17.25	17.50	1.059	99	1.010	-0.05	0.072	0.077
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	54	5270	Holster 1	16.06	17.50	1.393	99	1.010	-0.05	0.088	0.124
02	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	54	5270	Holster 2	17.25	17.50	1.059	99	1.010	0.05	0.207	0.221
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	54	5270	-	14.78	15.50	1.180	99	1.010	-0.1	0.110	0.131
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	54	5270	-	13.69	15.50	1.517	99	1.010	-0.1	0.100	0.153
	WLAN5GHz	802.11n-HT40 MCS0	Back	15mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	54	5270	-	14.78	15.50	1.180	99	1.010	0.18	0.088	0.105
	WLAN5GHz	802.11n-HT40 MCS0	Back	15mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	54	5270	-	13.69	15.50	1.517	99	1.010	0.18	0.077	0.118
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(7)	S0703	DBS	AlphaNumeric	54	5270	-	14.78	15.50	1.180	99	1.010	0.01	0.106	0.126
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(8)	S0703	DBS	AlphaNumeric	54	5270	-	13.69	15.50	1.517	99	1.010	0.01	0.093	0.142
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(7)	S0803	DBS	AlphaNumeric	54	5270	-	14.78	15.50	1.180	99	1.010	0.19	0.102	0.122
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(8)	S0803	DBS	AlphaNumeric	54	5270	-	13.69	15.50	1.517	99	1.010	0.19	0.089	0.136
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS	Numeric	54	5270	-	14.78	15.50	1.180	99	1.010	-0.18	0.091	0.108
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS	Numeric	54	5270	-	13.69	15.50	1.517	99	1.010	-0.18	0.074	0.113



FCC SAR TEST REPORT

Report No. : FA461705

Table with columns for frequency (WLAN5GHZ), power (802.11n-HT40 MCS0), antenna position, size, type, model, and various SAR metrics (e.g., 14.78, 15.50, 1.180, 99, 1.010, etc.). Includes rows for 03 and 04 series.



FCC SAR TEST REPORT

Report No. : FA461705

	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(7)	S0703	Non DBS	AlphaNumeric	155	5775	-	16.71	17.00	1.069	99	1.010	0.03	0.331	0.357
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(8)	S0703	Non DBS	AlphaNumeric	155	5775	-	16.67	17.00	1.079	99	1.010	0.03	0.196	0.214
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(7)	S0803	Non DBS	AlphaNumeric	155	5775	-	16.71	17.00	1.069	99	1.010	-0.08	0.276	0.298
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(8)	S0803	Non DBS	AlphaNumeric	155	5775	-	16.67	17.00	1.079	99	1.010	-0.08	0.163	0.178
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	Non DBS	Numeric	155	5775	-	16.71	17.00	1.069	99	1.010	-0.18	0.329	0.355
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	Non DBS	Numeric	155	5775	-	16.67	17.00	1.079	99	1.010	-0.18	0.195	0.212
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	Non DBS	Large Numeric	155	5775	-	16.71	17.00	1.069	99	1.010	0.12	0.322	0.348
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	Non DBS	Large Numeric	155	5775	-	16.67	17.00	1.079	99	1.010	0.12	0.191	0.208
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	Non DBS	53keys AlphaNumeric	155	5775	-	16.71	17.00	1.069	99	1.010	-0.17	0.312	0.337
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	Non DBS	53keys AlphaNumeric	155	5775	-	16.67	17.00	1.079	99	1.010	-0.17	0.185	0.202
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	Non DBS	42keys Numeric	155	5775	-	16.71	17.00	1.069	99	1.010	0.14	0.267	0.288
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	Non DBS	42keys Numeric	155	5775	-	16.67	17.00	1.079	99	1.010	0.14	0.158	0.172
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	155	5775	Holster 1	16.71	17.00	1.069	99	1.010	-0.01	0.130	0.140
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	155	5775	Holster 1	16.67	17.00	1.079	99	1.010	-0.01	0.065	0.071
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	155	5775	Holster 2	16.71	17.00	1.069	99	1.010	0.08	0.281	0.303
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	155	5775	-	14.16	15.00	1.213	99	1.010	0.05	0.213	0.261
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	155	5775	-	13.91	15.00	1.285	99	1.010	0.05	0.120	0.156
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	155	5775	-	14.16	15.00	1.213	99	1.010	0.08	0.165	0.202
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	155	5775	-	13.91	15.00	1.285	99	1.010	0.01	0.093	0.121
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(7)	S0703	DBS	AlphaNumeric	155	5775	-	14.16	15.00	1.213	99	1.010	0.03	0.168	0.206
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(8)	S0703	DBS	AlphaNumeric	155	5775	-	13.91	15.00	1.285	99	1.010	-0.08	0.094	0.122
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(7)	S0803	DBS	AlphaNumeric	155	5775	-	14.16	15.00	1.213	99	1.010	-0.08	0.160	0.196
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(8)	S0803	DBS	AlphaNumeric	155	5775	-	13.91	15.00	1.285	99	1.010	0.1	0.090	0.117
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS	Numeric	155	5775	-	14.16	15.00	1.213	99	1.010	-0.18	0.169	0.207
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS	Numeric	155	5775	-	13.91	15.00	1.285	99	1.010	0.1	0.095	0.123
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS	Large Numeric	155	5775	-	14.16	15.00	1.213	99	1.010	0.12	0.137	0.168
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS	Large Numeric	155	5775	-	13.91	15.00	1.285	99	1.010	0.08	0.077	0.100
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS	53keys AlphaNumeric	155	5775	-	14.16	15.00	1.213	99	1.010	-0.17	0.151	0.185
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS	53keys AlphaNumeric	155	5775	-	13.91	15.00	1.285	99	1.010	-0.03	0.085	0.110
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS	42keys Numeric	155	5775	-	14.16	15.00	1.213	99	1.010	0.14	0.139	0.170
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS	42keys Numeric	155	5775	-	13.91	15.00	1.285	99	1.010	0.11	0.078	0.101
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	155	5775	Holster 1	14.16	15.00	1.213	99	1.010	-0.05	0.082	0.100
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	155	5775	Holster 1	13.91	15.00	1.285	99	1.010	-0.05	0.041	0.053
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	155	5775	Holster 2	14.16	15.00	1.213	99	1.010	0.02	0.156	0.191
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	171	5855	-	16.81	17.00	1.045	99	1.010	0.08	0.257	0.271
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	171	5855	-	16.64	17.00	1.086	99	1.010	0.08	0.048	0.053
05	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	171	5855	-	16.81	17.00	1.045	99	1.010	0.09	0.339	0.358
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	171	5855	-	16.64	17.00	1.086	99	1.010	0.09	0.067	0.074
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 7+8(7)	S0703	Non DBS	AlphaNumeric	171	5855	-	16.81	17.00	1.045	99	1.010	-0.08	0.301	0.318
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 7+8(8)	S0703	Non DBS	AlphaNumeric	171	5855	-	16.64	17.00	1.086	99	1.010	-0.08	0.059	0.065
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 7+8(7)	S0803	Non DBS	AlphaNumeric	171	5855	-	16.81	17.00	1.045	99	1.010	-0.18	0.284	0.300
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 7+8(8)	S0803	Non DBS	AlphaNumeric	171	5855	-	16.64	17.00	1.086	99	1.010	-0.18	0.056	0.061
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 7+8(7)	S0803FR	Non DBS	Numeric	171	5855	-	16.81	17.00	1.045	99	1.010	0.12	0.237	0.250
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 7+8(8)	S0803FR	Non DBS	Numeric	171	5855	-	16.64	17.00	1.086	99	1.010	0.12	0.046	0.050
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 7+8(7)	S0803FR	Non DBS	Large Numeric	171	5855	-	16.81	17.00	1.045	99	1.010	-0.17	0.204	0.215
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 7+8(8)	S0803FR	Non DBS	Large Numeric	171	5855	-	16.64	17.00	1.086	99	1.010	-0.17	0.039	0.043
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 7+8(7)	S0803FR	Non DBS	53keys AlphaNumeric	171	5855	-	16.81	17.00	1.045	99	1.010	0.14	0.310	0.327
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 7+8(8)	S0803FR	Non DBS	53keys AlphaNumeric	171	5855	-	16.64	17.00	1.086	99	1.010	0.14	0.063	0.069
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 7+8(7)	S0803FR	Non DBS	42keys Numeric	171	5855	-	16.81	17.00	1.045	99	1.010	-0.05	0.207	0.218
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 7+8(8)	S0803FR	Non DBS	42keys Numeric	171	5855	-	16.64	17.00	1.086	99	1.010	-0.05	0.041	0.045
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	171	5855	Holster 1	16.81	17.00	1.045	99	1.010	0.14	0.215	0.227
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	171	5855	Holster 1	16.64	17.00	1.086	99	1.010	0.14	0.040	0.044
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	171	5855	Holster 2	16.81	17.00	1.045	99	1.010	0.16	0.287	0.303



FCC SAR TEST REPORT

Report No. : FA461705

WLAN5GHz	802.11ac-VHT160 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	163	5815	-	14.22	15.00	1.197	99	1.010	0.05	0.251	0.303
WLAN5GHz	802.11ac-VHT160 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	163	5815	-	14.39	15.00	1.151	99	1.010	0.05	0.178	0.207
WLAN5GHz	802.11ac-VHT160 MCS0	Back	15mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	163	5815	-	14.22	15.00	1.197	99	1.010	0.08	0.194	0.234
WLAN5GHz	802.11ac-VHT160 MCS0	Back	15mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	163	5815	-	14.39	15.00	1.151	99	1.010	0.08	0.138	0.160
WLAN5GHz	802.11ac-VHT160 MCS0	Front	15mm	Ant 7+8(7)	S0703	DBS	AlphaNumeric	163	5815	-	14.22	15.00	1.197	99	1.010	0.05	0.162	0.196
WLAN5GHz	802.11ac-VHT160 MCS0	Front	15mm	Ant 7+8(8)	S0703	DBS	AlphaNumeric	163	5815	-	14.39	15.00	1.151	99	1.010	0.05	0.115	0.134
WLAN5GHz	802.11ac-VHT160 MCS0	Front	15mm	Ant 7+8(7)	S0803	DBS	AlphaNumeric	163	5815	-	14.22	15.00	1.197	99	1.010	-0.12	0.147	0.178
WLAN5GHz	802.11ac-VHT160 MCS0	Front	15mm	Ant 7+8(8)	S0803	DBS	AlphaNumeric	163	5815	-	14.39	15.00	1.151	99	1.010	-0.12	0.104	0.121
WLAN5GHz	802.11ac-VHT160 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS	Numeric	163	5815	-	14.22	15.00	1.197	99	1.010	-0.16	0.203	0.245
WLAN5GHz	802.11ac-VHT160 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS	Numeric	163	5815	-	14.39	15.00	1.151	99	1.010	-0.16	0.144	0.167
WLAN5GHz	802.11ac-VHT160 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS	Large Numeric	163	5815	-	14.22	15.00	1.197	99	1.010	0.15	0.165	0.199
WLAN5GHz	802.11ac-VHT160 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS	Large Numeric	163	5815	-	14.39	15.00	1.151	99	1.010	0.15	0.117	0.136
WLAN5GHz	802.11ac-VHT160 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS	53keys AlphaNumeric	163	5815	-	14.22	15.00	1.197	99	1.010	0.11	0.179	0.216
WLAN5GHz	802.11ac-VHT160 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS	53keys AlphaNumeric	163	5815	-	14.39	15.00	1.151	99	1.010	0.11	0.127	0.148
WLAN5GHz	802.11ac-VHT160 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS	42keys Numeric	163	5815	-	14.22	15.00	1.197	99	1.010	-0.08	0.172	0.208
WLAN5GHz	802.11ac-VHT160 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS	42keys Numeric	163	5815	-	14.39	15.00	1.151	99	1.010	-0.08	0.122	0.142
WLAN5GHz	802.11ac-VHT160 MCS0	Front	0mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	163	5815	Holster 1	14.22	15.00	1.197	99	1.010	0.05	0.177	0.214
WLAN5GHz	802.11ac-VHT160 MCS0	Front	0mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	163	5815	Holster 1	14.39	15.00	1.151	99	1.010	0.05	0.125	0.145
WLAN5GHz	802.11ac-VHT160 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	163	5815	Holster 2	14.22	15.00	1.197	99	1.010	0.05	0.178	0.215

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Scanner	Power State	Keypad	Ch.	Freq. (MHz)	Holster	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured APD (W/m^2)	Reported APD (W/m^2)	APD Ratio	SAR vs APD MAX Ratio
06	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	111	6505	-	8.49	8.50	1.002	99	1.010	-0.05	0.001	0.001	0.001	0.001	0.000	0.000
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	111	6505	-	8.44	8.50	1.014	99	1.010	-0.05	0.018	0.018	0.159	0.163	0.008	0.008
	WLAN6GHz	802.11ax-HE160 MCS0	Back	15mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	111	6505	-	8.49	8.50	1.002	99	1.010	0.1	0.001	0.001	0.001	0.001	0.000	0.000
	WLAN6GHz	802.11ax-HE160 MCS0	Back	15mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	111	6505	-	8.44	8.50	1.014	99	1.010	0.1	0.007	0.007	0.062	0.063	0.003	0.003
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	15	6025	-	6.12	8.00	1.542	99	1.010	0.05	0.001	0.002	0.001	0.002	0.000	0.000
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	15	6025	-	7.98	8.00	1.005	99	1.010	0.05	0.024	0.024	0.212	0.215	0.011	0.011
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	47	6185	-	6.51	8.50	1.581	99	1.010	-0.08	0.001	0.002	0.001	0.002	0.000	0.000
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	47	6185	-	8.43	8.50	1.016	99	1.010	-0.08	0.001	0.001	0.009	0.009	0.000	0.000
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	143	6665	-	6.43	8.00	1.435	99	1.010	0.06	0.001	0.001	0.001	0.001	0.000	0.000
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	143	6665	-	7.94	8.00	1.014	99	1.010	0.06	0.012	0.012	0.106	0.109	0.005	0.005
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	207	6985	-	7.32	8.00	1.169	99	1.010	-0.08	0.001	0.001	0.001	0.001	0.000	0.000
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	207	6985	-	6.75	8.00	1.334	99	1.010	-0.08	0.013	0.018	0.115	0.155	0.008	0.008
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(7)	S0703	DBS / Non DBS	AlphaNumeric	15	6025	-	6.12	8.00	1.542	99	1.010	0.12	0.001	0.002	0.001	0.002	0.000	0.000
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(8)	S0703	DBS / Non DBS	AlphaNumeric	15	6025	-	7.98	8.00	1.005	99	1.010	0.12	0.012	0.012	0.106	0.108	0.005	0.005
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(7)	S0803	DBS / Non DBS	AlphaNumeric	15	6025	-	6.12	8.00	1.542	99	1.010	0.18	0.001	0.002	0.001	0.002	0.000	0.000
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(8)	S0803	DBS / Non DBS	AlphaNumeric	15	6025	-	7.98	8.00	1.005	99	1.010	0.18	0.008	0.008	0.071	0.072	0.004	0.004
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	Numeric	15	6025	-	6.12	8.00	1.542	99	1.010	-0.1	0.001	0.002	0.001	0.002	0.000	0.000
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	Numeric	15	6025	-	7.98	8.00	1.005	99	1.010	-0.1	0.013	0.013	0.115	0.117	0.006	0.006
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	Large Numeric	15	6025	-	6.12	8.00	1.542	99	1.010	0.18	0.001	0.002	0.001	0.002	0.000	0.000
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	Large Numeric	15	6025	-	7.98	8.00	1.005	99	1.010	0.18	0.014	0.014	0.124	0.126	0.006	0.006
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	53keys AlphaNumeric	15	6025	-	6.12	8.00	1.542	99	1.010	0.01	0.001	0.002	0.001	0.002	0.000	0.000
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	53keys AlphaNumeric	15	6025	-	7.98	8.00	1.005	99	1.010	0.01	0.010	0.010	0.088	0.089	0.004	0.004
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	42keys Numeric	15	6025	-	6.12	8.00	1.542	99	1.010	0.19	0.001	0.002	0.001	0.002	0.000	0.000
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	42keys Numeric	15	6025	-	7.98	8.00	1.005	99	1.010	0.19	0.016	0.016	0.141	0.143	0.007	0.007
	WLAN6GHz	802.11ax-HE160 MCS0	Front	0mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	15	6025	Holster 1	6.12	8.00	1.542	99	1.010	0.03	0.001	0.002	0.002	0.003	0.000	0.000
	WLAN6GHz	802.11ax-HE160 MCS0	Front	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	15	6025	Holster 1	7.98	8.00	1.005	99	1.010	0.03	0.001	0.001	0.002	0.002	0.000	0.000
	WLAN6GHz	802.11ax-HE160 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	15	6025	Holster 2	6.12	8.00	1.542	99	1.010	0.01	0.014	0.022	0.110	0.171	0.009	0.009



<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Scanner	Power State	Keypad	Ch.	Freq. (MHz)	Holster	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
07	Bluetooth LE	S8	Front	15mm	Ant 7	S0803FR	DBS / Non DBS	AlphaNumeric	0	2402	-	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Back	15mm	Ant 7	S0803FR	DBS / Non DBS	AlphaNumeric	0	2402	-	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Front	15mm	Ant 7	S0703	DBS / Non DBS	AlphaNumeric	0	2402	-	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Front	15mm	Ant 7	S0803	DBS / Non DBS	AlphaNumeric	0	2402	-	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Front	15mm	Ant 7	S0803FR	DBS / Non DBS	Numeric	0	2402	-	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Front	15mm	Ant 7	S0803FR	DBS / Non DBS	Large Numeric	0	2402	-	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Front	15mm	Ant 7	S0803FR	DBS / Non DBS	53keys AlphaNumeric	0	2402	-	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Front	15mm	Ant 7	S0803FR	DBS / Non DBS	42keys Numeric	0	2402	-	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Front	0mm	Ant 7	S0803FR	DBS / Non DBS	AlphaNumeric	0	2402	Holster 1	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Left Side	0mm	Ant 7	S0803FR	DBS / Non DBS	AlphaNumeric	0	2402	Holster 2	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Front	15mm	Ant 8	S0803FR	DBS / Non DBS	AlphaNumeric	39	2480	-	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001
	Bluetooth LE	S8	Back	15mm	Ant 8	S0803FR	DBS / Non DBS	AlphaNumeric	39	2480	-	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001
	Bluetooth LE	S8	Front	15mm	Ant 8	S0703	DBS / Non DBS	AlphaNumeric	39	2480	-	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001
	Bluetooth LE	S8	Front	15mm	Ant 8	S0803	DBS / Non DBS	AlphaNumeric	39	2480	-	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001
	Bluetooth LE	S8	Front	15mm	Ant 8	S0803FR	DBS / Non DBS	Numeric	39	2480	-	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001
	Bluetooth LE	S8	Front	15mm	Ant 8	S0803FR	DBS / Non DBS	Large Numeric	39	2480	-	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001
	Bluetooth LE	S8	Front	15mm	Ant 8	S0803FR	DBS / Non DBS	53keys AlphaNumeric	39	2480	-	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001
	Bluetooth LE	S8	Front	15mm	Ant 8	S0803FR	DBS / Non DBS	42keys Numeric	39	2480	-	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001
	Bluetooth LE	S8	Front	0mm	Ant 8	S0803FR	DBS / Non DBS	AlphaNumeric	39	2480	Holster 1	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001
	Bluetooth LE	S8	Left Side	0mm	Ant 8	S0803FR	DBS / Non DBS	AlphaNumeric	39	2480	Holster 2	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001



13.2 Product Specific SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Scanner	Power State	Keypad	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	11	2462	16.34	16.50	1.038	99	1.010	0.08	0.237	0.248
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	11	2462	16.45	16.50	1.012	99	1.010	0.08	0.214	0.219
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	11	2462	16.34	16.50	1.038	99	1.010	0.03	0.308	0.323
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	11	2462	16.45	16.50	1.012	99	1.010	0.03	0.291	0.297
	WLAN2.4GHz	802.11b 1Mbps	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	11	2462	16.34	16.50	1.038	99	1.010	-0.08	0.199	0.209
08	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	11	2462	16.45	16.50	1.012	99	1.010	-0.04	0.594	0.607
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 7+8(8)	S0703	DBS / Non DBS	AlphaNumeric	11	2462	16.45	16.50	1.012	99	1.010	-0.18	0.495	0.506
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 7+8(8)	S0803	DBS / Non DBS	AlphaNumeric	11	2462	16.45	16.50	1.012	99	1.010	0.1	0.424	0.433
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	Numeric	11	2462	16.45	16.50	1.012	99	1.010	0.12	0.466	0.476
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	Large Numeric	11	2462	16.45	16.50	1.012	99	1.010	0.08	0.515	0.526
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	53keys AlphaNumeric	11	2462	16.45	16.50	1.012	99	1.010	-0.17	0.421	0.430
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	42keys Numeric	11	2462	16.45	16.50	1.012	99	1.010	-0.03	0.421	0.430
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	54	5270	17.25	17.50	1.059	99	1.010	-0.11	0.153	0.164
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	54	5270	16.06	17.50	1.393	99	1.010	-0.11	0.110	0.155
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	54	5270	17.25	17.50	1.059	99	1.010	0.03	0.101	0.108
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	54	5270	16.06	17.50	1.393	99	1.010	0.03	0.085	0.120
09	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	54	5270	17.25	17.50	1.059	99	1.010	0.04	1.180	1.262
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	54	5270	16.06	17.50	1.393	99	1.010	0.15	0.557	0.784
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0703	Non DBS	AlphaNumeric	54	5270	17.25	17.50	1.059	99	1.010	-0.09	0.926	0.991
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803	Non DBS	AlphaNumeric	54	5270	17.25	17.50	1.059	99	1.010	0.11	1.070	1.145
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	Numeric	54	5270	17.25	17.50	1.059	99	1.010	-0.05	1.130	1.209
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	Large Numeric	54	5270	17.25	17.50	1.059	99	1.010	-0.08	0.940	1.006
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	53keys AlphaNumeric	54	5270	17.25	17.50	1.059	99	1.010	0.16	1.090	1.166
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	42keys Numeric	54	5270	17.25	17.50	1.059	99	1.010	0.05	0.940	1.006
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	54	5270	14.78	15.50	1.180	99	1.010	-0.01	0.135	0.161
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	54	5270	13.69	15.50	1.517	99	1.010	-0.01	0.125	0.192
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	54	5270	14.78	15.50	1.180	99	1.010	0.05	0.087	0.104
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	54	5270	13.69	15.50	1.517	99	1.010	0.05	0.081	0.124
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	54	5270	14.78	15.50	1.180	99	1.010	0	1.040	1.240
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	54	5270	13.69	15.50	1.517	99	1.010	-0.09	0.328	0.503
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0703	DBS	AlphaNumeric	54	5270	14.78	15.50	1.180	99	1.010	-0.08	0.783	0.933
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803	DBS	AlphaNumeric	54	5270	14.78	15.50	1.180	99	1.010	0.13	0.893	1.065
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	Numeric	54	5270	14.78	15.50	1.180	99	1.010	0.12	0.962	1.147
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	Large Numeric	54	5270	14.78	15.50	1.180	99	1.010	0.03	0.744	0.887
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	53keys AlphaNumeric	54	5270	14.78	15.50	1.180	99	1.010	0.18	0.829	0.988
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	42keys Numeric	54	5270	14.78	15.50	1.180	99	1.010	0.16	0.738	0.880
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	110	5550	16.99	17.50	1.125	99	1.010	-0.08	0.193	0.219
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	110	5550	15.65	17.50	1.531	99	1.010	0.17	0.173	0.268
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	110	5550	16.99	17.50	1.125	99	1.010	0.18	0.111	0.126
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	110	5550	15.65	17.50	1.531	99	1.010	-0.04	0.100	0.155
10	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	110	5550	16.99	17.50	1.125	99	1.010	-0.06	1.380	1.567
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	110	5550	15.65	17.50	1.531	99	1.010	-0.08	0.801	1.239
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0703	Non DBS	AlphaNumeric	110	5550	16.99	17.50	1.125	99	1.010	0.06	1.090	1.238
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803	Non DBS	AlphaNumeric	110	5550	16.99	17.50	1.125	99	1.010	-0.03	1.200	1.363
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	Numeric	110	5550	16.99	17.50	1.125	99	1.010	-0.03	1.200	1.363
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	Large Numeric	110	5550	16.99	17.50	1.125	99	1.010	0.08	0.996	1.131
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	53keys AlphaNumeric	110	5550	16.99	17.50	1.125	99	1.010	-0.07	1.180	1.340
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	42keys Numeric	110	5550	16.99	17.50	1.125	99	1.010	0.05	0.937	1.064



FCC SAR TEST REPORT

Report No. : FA461705

	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	138	5690	14.55	15.00	1.109	99	1.010	-0.15	0.213	0.239
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	138	5690	14.05	15.00	1.245	99	1.010	-0.15	0.175	0.220
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	138	5690	14.55	15.00	1.109	99	1.010	-0.08	0.117	0.131
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	138	5690	14.05	15.00	1.245	99	1.010	-0.08	0.097	0.122
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	138	5690	14.55	15.00	1.109	99	1.010	-0.04	1.340	1.501
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	138	5690	14.05	15.00	1.245	99	1.010	-0.08	0.840	1.056
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0703	DBS	AlphaNumeric	138	5690	14.55	15.00	1.109	99	1.010	-0.04	1.190	1.333
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803	DBS	AlphaNumeric	138	5690	14.55	15.00	1.109	99	1.010	-0.08	1.130	1.266
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	Numeric	138	5690	14.55	15.00	1.109	99	1.010	0.17	1.230	1.378
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	Large Numeric	138	5690	14.55	15.00	1.109	99	1.010	0.18	1.080	1.210
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	53keys AlphaNumeric	138	5690	14.55	15.00	1.109	99	1.010	-0.04	1.140	1.277
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	42keys Numeric	138	5690	14.55	15.00	1.109	99	1.010	-0.08	1.040	1.165
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	155	5775	16.71	17.00	1.069	99	1.010	-0.03	0.298	0.322
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	155	5775	16.67	17.00	1.079	99	1.010	-0.03	0.272	0.296
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	155	5775	16.71	17.00	1.069	99	1.010	-0.05	0.176	0.190
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	155	5775	16.67	17.00	1.079	99	1.010	-0.05	0.165	0.180
11	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	155	5775	16.71	17.00	1.069	99	1.010	0.09	1.690	1.825
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	151	5755	16.77	17.00	1.054	99	1.010	-0.11	1.620	1.725
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	159	5795	16.68	17.00	1.076	99	1.010	0.07	1.640	1.783
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	155	5775	16.67	17.00	1.079	99	1.010	0.18	1.210	1.319
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0703	Non DBS	AlphaNumeric	155	5775	16.71	17.00	1.069	99	1.010	0.17	1.400	1.512
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803	Non DBS	AlphaNumeric	155	5775	16.71	17.00	1.069	99	1.010	-0.05	1.410	1.522
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	Numeric	155	5775	16.71	17.00	1.069	99	1.010	0.01	1.370	1.479
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	Large Numeric	155	5775	16.71	17.00	1.069	99	1.010	0.1	1.140	1.231
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	53keys AlphaNumeric	155	5775	16.71	17.00	1.069	99	1.010	-0.17	1.360	1.468
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	42keys Numeric	155	5775	16.71	17.00	1.069	99	1.010	0.04	1.220	1.317
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	155	5775	14.16	15.00	1.213	99	1.010	-0.13	0.181	0.222
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	155	5775	13.91	15.00	1.285	99	1.010	-0.13	0.156	0.203
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	155	5775	14.16	15.00	1.213	99	1.010	0.06	0.104	0.127
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	155	5775	13.91	15.00	1.285	99	1.010	-0.03	0.093	0.121
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	155	5775	14.16	15.00	1.213	99	1.010	0	1.120	1.373
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	155	5775	13.91	15.00	1.285	99	1.010	-0.03	0.726	0.942
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0703	DBS	AlphaNumeric	155	5775	14.16	15.00	1.213	99	1.010	0.08	0.893	1.094
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803	DBS	AlphaNumeric	155	5775	14.16	15.00	1.213	99	1.010	-0.07	0.840	1.029
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	Numeric	155	5775	14.16	15.00	1.213	99	1.010	0.05	0.909	1.114
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	Large Numeric	155	5775	14.16	15.00	1.213	99	1.010	-0.11	0.734	0.900
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	53keys AlphaNumeric	155	5775	14.16	15.00	1.213	99	1.010	-0.12	0.851	1.043
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	42keys Numeric	155	5775	14.16	15.00	1.213	99	1.010	0.03	0.787	0.964
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	171	5855	16.81	17.00	1.045	99	1.010	0.05	0.227	0.240
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	171	5855	16.64	17.00	1.086	99	1.010	0.05	0.182	0.200
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	171	5855	16.81	17.00	1.045	99	1.010	-0.09	0.130	0.137
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	171	5855	16.64	17.00	1.086	99	1.010	-0.09	0.104	0.114
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	Non DBS	AlphaNumeric	171	5855	16.81	17.00	1.045	99	1.010	0.13	1.040	1.097
12	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	Non DBS	AlphaNumeric	171	5855	16.64	17.00	1.086	99	1.010	0.05	1.610	1.767
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 7+8(8)	S0703	Non DBS	AlphaNumeric	171	5855	16.64	17.00	1.086	99	1.010	0.18	1.060	1.163
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 7+8(8)	S0803	Non DBS	AlphaNumeric	171	5855	16.64	17.00	1.086	99	1.010	0.07	1.440	1.580
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	Non DBS	Numeric	171	5855	16.64	17.00	1.086	99	1.010	0.01	1.410	1.547
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	Non DBS	Large Numeric	171	5855	16.64	17.00	1.086	99	1.010	0.07	1.400	1.536
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	Non DBS	53keys AlphaNumeric	171	5855	16.64	17.00	1.086	99	1.010	-0.15	1.410	1.547
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	Non DBS	42keys Numeric	171	5855	16.64	17.00	1.086	99	1.010	-0.08	1.450	1.591
	WLAN5GHz	802.11ac-VHT160 MCS0	Front	0mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	163	5815	14.22	15.00	1.197	99	1.010	-0.04	0.210	0.254
	WLAN5GHz	802.11ac-VHT160 MCS0	Front	0mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	163	5815	14.39	15.00	1.151	99	1.010	-0.04	0.168	0.195
	WLAN5GHz	802.11ac-VHT160 MCS0	Back	0mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	163	5815	14.22	15.00	1.197	99	1.010	0.17	0.126	0.152
	WLAN5GHz	802.11ac-VHT160 MCS0	Back	0mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	163	5815	14.39	15.00	1.151	99	1.010	0.17	0.098	0.114



FCC SAR TEST REPORT

Report No. : FA461705

WLAN5GHz	802.11ac-VHT160 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	AlphaNumeric	163	5815	14.22	15.00	1.197	99	1.010	-0.07	1.210	1.463
WLAN5GHz	802.11ac-VHT160 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS	AlphaNumeric	163	5815	14.39	15.00	1.151	99	1.010	-0.04	0.796	0.925
WLAN5GHz	802.11ac-VHT160 MCS0	Left Side	0mm	Ant 7+8(7)	S0703	DBS	AlphaNumeric	163	5815	14.22	15.00	1.197	99	1.010	-0.08	0.999	1.207
WLAN5GHz	802.11ac-VHT160 MCS0	Left Side	0mm	Ant 7+8(7)	S0803	DBS	AlphaNumeric	163	5815	14.22	15.00	1.197	99	1.010	-0.13	0.945	1.142
WLAN5GHz	802.11ac-VHT160 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	Numeric	163	5815	14.22	15.00	1.197	99	1.010	-0.13	0.937	1.133
WLAN5GHz	802.11ac-VHT160 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	Large Numeric	163	5815	14.22	15.00	1.197	99	1.010	0.06	0.835	1.009
WLAN5GHz	802.11ac-VHT160 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	53keys AlphaNumeric	163	5815	14.22	15.00	1.197	99	1.010	-0.03	0.867	1.048
WLAN5GHz	802.11ac-VHT160 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS	42keys Numeric	163	5815	14.22	15.00	1.197	99	1.010	-0.03	0.867	1.048

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Scanner	Power State	Keypad	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)	Measured APD (W/m^2)	Reported APD (W/m^2)	APD Ratio	SAR vs APD MAX Ratio
	WLAN6GHz	802.11ax-HE160 MCS0	Front	0mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	111	6505	8.49	8.50	1.002	99	1.010	0.08	0.037	0.037	0.865	0.876	0.044	0.044
	WLAN6GHz	802.11ax-HE160 MCS0	Front	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	111	6505	8.44	8.50	1.014	99	1.010	0.08	0.023	0.024	0.538	0.551	0.028	0.028
	WLAN6GHz	802.11ax-HE160 MCS0	Back	0mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	111	6505	8.49	8.50	1.002	99	1.010	0.03	0.008	0.008	0.187	0.189	0.009	0.009
	WLAN6GHz	802.11ax-HE160 MCS0	Back	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	111	6505	8.44	8.50	1.014	99	1.010	0.03	0.004	0.004	0.094	0.096	0.005	0.005
	WLAN6GHz	802.11ax-HE160 MCS0	Left Side	0mm	Ant 7+8(7)	S0803FR	DBS / Non DBS	AlphaNumeric	111	6505	8.49	8.50	1.002	99	1.010	-0.08	0.115	0.116	2.69	2.723	0.136	0.136
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	111	6505	8.44	8.50	1.014	99	1.010	0.1	0.127	0.130	2.97	3.041	0.152	0.152
13	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	15	6025	7.98	8.00	1.005	99	1.010	-0.04	0.142	0.144	3.32	3.369	0.168	0.168
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	47	6185	8.43	8.50	1.016	99	1.010	0.1	0.096	0.099	2.24	2.299	0.115	0.115
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	143	6665	7.94	8.00	1.014	99	1.010	0.12	0.093	0.095	2.17	2.222	0.111	0.111
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	AlphaNumeric	207	6985	6.75	8.00	1.334	99	1.010	0.08	0.041	0.055	0.959	1.292	0.065	0.065
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	0mm	Ant 7+8(8)	S0703	DBS / Non DBS	AlphaNumeric	15	6025	7.98	8.00	1.005	99	1.010	-0.17	0.110	0.112	2.57	2.608	0.130	0.130
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	0mm	Ant 7+8(8)	S0803	DBS / Non DBS	AlphaNumeric	15	6025	7.98	8.00	1.005	99	1.010	-0.03	0.139	0.141	3.25	3.298	0.165	0.165
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	Numeric	15	6025	7.98	8.00	1.005	99	1.010	0.14	0.141	0.143	3.3	3.348	0.167	0.167
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	Large Numeric	15	6025	7.98	8.00	1.005	99	1.010	0.11	0.116	0.118	2.71	2.750	0.138	0.138
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	53keys AlphaNumeric	15	6025	7.98	8.00	1.005	99	1.010	-0.05	0.137	0.139	3.2	3.247	0.162	0.162
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	0mm	Ant 7+8(8)	S0803FR	DBS / Non DBS	42keys Numeric	15	6025	7.98	8.00	1.005	99	1.010	0.18	0.125	0.127	2.92	2.963	0.148	0.148

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Scanner	Power State	Keypad	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
14	Bluetooth LE	S8	Front	0mm	Ant 7	S0803FR	DBS / Non DBS	AlphaNumeric	0	2402	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Back	0mm	Ant 7	S0803FR	DBS / Non DBS	AlphaNumeric	0	2402	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Left Side	0mm	Ant 7	S0803FR	DBS / Non DBS	AlphaNumeric	0	2402	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Left Side	0mm	Ant 7	S0703	DBS / Non DBS	AlphaNumeric	0	2402	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Left Side	0mm	Ant 7	S0803	DBS / Non DBS	AlphaNumeric	0	2402	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Left Side	0mm	Ant 7	S0803FR	DBS / Non DBS	Numeric	0	2402	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Left Side	0mm	Ant 7	S0803FR	DBS / Non DBS	Large Numeric	0	2402	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Left Side	0mm	Ant 7	S0803FR	DBS / Non DBS	53keys AlphaNumeric	0	2402	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Left Side	0mm	Ant 7	S0803FR	DBS / Non DBS	42keys Numeric	0	2402	5.91	6.50	1.146	97.57	1.025	0	0.001	0.001
	Bluetooth LE	S8	Front	0mm	Ant 8	S0803FR	DBS / Non DBS	AlphaNumeric	39	2480	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001
	Bluetooth LE	S8	Back	0mm	Ant 8	S0803FR	DBS / Non DBS	AlphaNumeric	39	2480	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001
	Bluetooth LE	S8	Right Side	0mm	Ant 8	S0803FR	DBS / Non DBS	AlphaNumeric	39	2480	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001
	Bluetooth LE	S8	Right Side	0mm	Ant 8	S0703	DBS / Non DBS	AlphaNumeric	39	2480	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001
	Bluetooth LE	S8	Right Side	0mm	Ant 8	S0803	DBS / Non DBS	AlphaNumeric	39	2480	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001
	Bluetooth LE	S8	Right Side	0mm	Ant 8	S0803FR	DBS / Non DBS	Numeric	39	2480	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001
	Bluetooth LE	S8	Right Side	0mm	Ant 8	S0803FR	DBS / Non DBS	Large Numeric	39	2480	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001
	Bluetooth LE	S8	Right Side	0mm	Ant 8	S0803FR	DBS / Non DBS	53keys AlphaNumeric	39	2480	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001
	Bluetooth LE	S8	Right Side	0mm	Ant 8	S0803FR	DBS / Non DBS	42keys Numeric	39	2480	6.26	6.50	1.057	83.36	1.200	0	0.001	0.001



<NFC SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Scanner	Power State	Keypad	Freq. (MHz)	Power Drift (dB)	Measured 10g SAR (W/kg)
15	NFC	ASK	Front	0mm	S0803FR	DBS / Non DBS	AlphaNumeric	13.56	0	<0.001
	NFC	ASK	Back	0mm	S0803FR	DBS / Non DBS	AlphaNumeric	13.56	0	<0.001
	NFC	ASK	Right Side	0mm	S0803FR	DBS / Non DBS	AlphaNumeric	13.56	0	<0.001
	NFC	ASK	Left Side	0mm	S0803FR	DBS / Non DBS	AlphaNumeric	13.56	0	<0.001
	NFC	ASK	Top Side	0mm	S0803FR	DBS / Non DBS	AlphaNumeric	13.56	0	<0.001
	NFC	ASK	Bottom Side	0mm	S0803FR	DBS / Non DBS	AlphaNumeric	13.56	0	<0.001
	NFC	ASK	Front	0mm	S0703	DBS / Non DBS	AlphaNumeric	13.56	0	<0.001
	NFC	ASK	Front	0mm	S0803	DBS / Non DBS	AlphaNumeric	13.56	0	<0.001
	NFC	ASK	Front	0mm	S0803FR	DBS / Non DBS	Numeric	13.56	0	<0.001
	NFC	ASK	Front	0mm	S0803FR	DBS / Non DBS	Large Numeric	13.56	0	<0.001
	NFC	ASK	Front	0mm	S0803FR	DBS / Non DBS	53keys AlphaNumeric	13.56	0	<0.001
	NFC	ASK	Front	0mm	S0803FR	DBS / Non DBS	42keys Numeric	13.56	0	<0.001

13.3 6GHz PD SAR Result

Band	Mode	Test Position	Gap (mm)	Antenna	Scanner	Keypad	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Grid Step (A)	iPDn	iPD ratio (≥ -1)	Scaling Factor for Measurement Uncertainty	Power Drift (dB)	Normal psPD (W/m ²)	Scaled Normal psPD (W/m ²)	Total psPD (W/m ²)	Scaled Total psPD (W/m ²)
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	2mm	Ant 7+8(7)	S0803FR	AlphaNumeric	15	6025	6.12	8.00	1.542	99.00	1.010	0.0625	3.51	0.22862883	1.5535	0.12	1.07	2.59	1.3	3.14
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	10mm	Ant 7+8(7)	S0803FR	AlphaNumeric	15	6025	6.12	8.00	1.542	99.00	1.010	0.25	3.33		1.5535	0.03	0.558	1.35	0.676	1.64
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	2mm	Ant 7+8(7)	S0803FR	AlphaNumeric	207	6985	7.32	8.00	1.169	99.00	1.010	0.0625	4.69	0.247691165	1.5535	-0.02	1.84	3.38	2.07	3.80
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	8.59mm	Ant 7+8(7)	S0803FR	AlphaNumeric	207	6985	7.32	8.00	1.169	99.00	1.010	0.25	4.43		1.5535	-0.19	1.03	1.89	1.08	1.98

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Scanner	Keypad	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Grid Step (A)	Scaling Factor for Measurement Uncertainty	Power Drift (dB)	Normal psPD (W/m ²)	Scaled Normal psPD (W/m ²)	Total psPD (W/m ²)	Scaled Total psPD (W/m ²)	E-Field (V/m)
	WLAN6GHz	802.11ax-HE160 MCS0	Front	2mm	Ant 7+8(7)	S0803FR	AlphaNumeric	111	6505	8.49	8.50	1.002	99.00	1.010	0.0625	1.5535	0.03	0.892	1.40	1.08	1.70	15.2
	WLAN6GHz	802.11ax-HE160 MCS0	Front	2mm	Ant 7+8(8)	S0803FR	AlphaNumeric	111	6505	8.44	8.50	1.014	99.00	1.010	0.0625	1.5535	-0.08	0.816	1.30	0.99	1.57	13.9
	WLAN6GHz	802.11ax-HE160 MCS0	Back	2mm	Ant 7+8(7)	S0803FR	AlphaNumeric	111	6505	8.49	8.50	1.002	99.00	1.010	0.0625	1.5535	-0.08	0.857	1.35	1.04	1.64	14.6
	WLAN6GHz	802.11ax-HE160 MCS0	Back	2mm	Ant 7+8(8)	S0803FR	AlphaNumeric	111	6505	8.44	8.50	1.014	99.00	1.010	0.0625	1.5535	0.1	0.769	1.22	0.933	1.48	13.1
	WLAN6GHz	802.11ax-HE160 MCS0	Left Side	2mm	Ant 7+8(7)	S0803FR	AlphaNumeric	111	6505	8.49	8.50	1.002	99.00	1.010	0.0625	1.5535	0.1	1.86	2.93	2.09	3.29	18.2
	WLAN6GHz	802.11ax-HE160 MCS0	Left Side	2mm	Ant 7+8(7)	S0803FR	AlphaNumeric	15	6025	6.12	8.00	1.542	99.00	1.010	0.0625	1.5535	0.12	1.07	2.59	1.3	3.14	18.3
	WLAN6GHz	802.11ax-HE160 MCS0	Left Side	2mm	Ant 7+8(7)	S0803FR	AlphaNumeric	47	6185	6.51	8.50	1.581	99.00	1.010	0.0625	1.5535	0.08	1.33	3.30	1.55	3.85	22.6
01	WLAN6GHz	802.11ax-HE160 MCS0	Left Side	2mm	Ant 7+8(7)	S0803FR	AlphaNumeric	143	6665	6.43	8.00	1.435	99.00	1.010	0.0625	1.5535	0.02	1.45	3.27	1.76	3.96	24.7
	WLAN6GHz	802.11ax-HE160 MCS0	Left Side	2mm	Ant 7+8(7)	S0803FR	AlphaNumeric	207	6985	7.32	8.00	1.169	99.00	1.010	0.0625	1.5535	-0.02	1.84	3.38	2.07	3.80	22.4
	WLAN6GHz	802.11ax-HE160 MCS0	Left Side	2mm	Ant 7+8(7)	S0703	AlphaNumeric	143	6665	6.43	8.00	1.435	99.00	1.010	0.0625	1.5535	-0.03	1.34	3.02	1.62	3.65	22.8
	WLAN6GHz	802.11ax-HE160 MCS0	Left Side	2mm	Ant 7+8(7)	S0803	AlphaNumeric	143	6665	6.43	8.00	1.435	99.00	1.010	0.0625	1.5535	0.14	1.1	2.48	1.33	3.00	18.7
	WLAN6GHz	802.11ax-HE160 MCS0	Left Side	2mm	Ant 7+8(7)	S0803FR	Numeric	143	6665	6.43	8.00	1.435	99.00	1.010	0.0625	1.5535	0.11	1.36	3.06	1.65	3.72	23.1
	WLAN6GHz	802.11ax-HE160 MCS0	Left Side	2mm	Ant 7+8(7)	S0803FR	Large Numeric	143	6665	6.43	8.00	1.435	99.00	1.010	0.0625	1.5535	-0.05	1.04	2.34	1.27	2.86	17.8
	WLAN6GHz	802.11ax-HE160 MCS0	Left Side	2mm	Ant 7+8(7)	S0803FR	53keys AlphaNumeric	143	6665	6.43	8.00	1.435	99.00	1.010	0.0625	1.5535	0.18	0.992	2.23	1.2	2.70	16.9
	WLAN6GHz	802.11ax-HE160 MCS0	Left Side	2mm	Ant 7+8(7)	S0803FR	42keys Numeric	143	6665	6.43	8.00	1.435	99.00	1.010	0.0625	1.5535	0.14	0.928	2.09	1.13	2.55	15.8
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	2mm	Ant 7+8(8)	S0803FR	AlphaNumeric	111	6505	8.44	8.50	1.014	99.00	1.010	0.0625	1.5535	0.1	1.05	1.67	1.28	2.04	17.9

14. Simultaneous Transmission Analysis

Non-DBS			
NO.	Simultaneous Transmission Configurations	Body-worn	Product Specific
1.	WLAN2.4GHz Ant 7+8(8) + Bluetooth LE Ant 7	Yes	
2.	WLAN5/6GHz MIMO + Bluetooth LE Ant 7	Yes	
3.	WLAN2.4GHz MIMO + NFC		Yes
4.	WLAN2.4GHz Ant 7+8(8) + Bluetooth LE Ant 7 + NFC		Yes
5.	WLAN5/6GHz MIMO + Bluetooth LE Ant 7 + NFC		Yes
DBS			
NO.	Simultaneous Transmission Configurations	Body-worn	Product Specific
6.	WLAN2.4GHz MIMO + WLAN5/6GHz MIMO	Yes	
7.	WLAN2.4GHz MIMO + WLAN5/6GHz MIMO + NFC		Yes

General Note:

1. The worst case WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
2. The Scaled SAR summation is calculated based on the same configuration and test position.
3. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

14.1 Body-Worn Accessory Exposure Conditions

Non-DBS

Exposure Position	1	2	3	4	1+4 Summed 1g SAR (W/kg)	3+4 Summed 1g SAR (W/kg)
	WLAN2.4GHz Ant 7+8(8) 1g SAR (W/kg)	WLAN2.4GHz MIMO 1g SAR (W/kg)	WLAN5/6GHz MIMO 1g SAR (W/kg)	Bluetooth LE Ant 7 1g SAR (W/kg)		
Front at 15mm	0.073	0.073	0.419	0.001	0.074	0.420
Back at 15mm	0.276	0.276	0.358	0.001	0.277	0.359
Front at 0mm Holster 1	0.311	0.311	0.227	0.001	0.312	0.228
Left side at 0mm Holster 2		0.093	0.329	0.001	0.001	0.330

DBS

Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
	WLAN2.4GHz MIMO	WLAN5/6GHz MIMO	
	1g SAR (W/kg)	1g SAR (W/kg)	
Front at 15mm	0.073	0.303	0.376
Back at 15mm	0.276	0.234	0.510
Front at 0mm Holster 1	0.311	0.214	0.525
Left side at 0mm Holster 2	0.093	0.253	0.346

14.2 Product Specific Exposure Conditions

Non-DBS

Exposure Position	1	2	3	4	5	2+5 Summed 10g SAR (W/kg)	1+4+5 Summed 10g SAR (W/kg)	3+4+5 Summed 10g SAR (W/kg)
	WLAN2.4GHz Ant 7+8(8) 10g SAR (W/kg)	WLAN2.4GHz MIMO 10g SAR (W/kg)	WLAN5/6GHz MIMO 10g SAR (W/kg)	Bluetooth LE Ant 7 10g SAR (W/kg)	NFC 10g SAR (W/kg)			
Front at 0mm	0.219	0.248	0.322	0.001	0.001	0.249	0.221	0.324
Back at 0mm	0.297	0.323	0.190	0.001	0.001	0.324	0.299	0.192
Left side at 0mm		0.209	1.825	0.001	0.001	0.210	0.002	1.827
Right side at 0mm	0.607	0.607	1.767	0.001	0.001	0.608	0.609	1.769

DBS

Exposure Position	1	2	3	1+2+3 Summed 10g SAR (W/kg)
	WLAN2.4GHz MIMO	WLAN5/6GHz MIMO	NFC	
	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	
Front at 0mm	0.248	0.254	0.001	0.503
Back at 0mm	0.323	0.152	0.001	0.476
Left side at 0mm	0.209	1.501	0.001	1.711
Right side at 0mm	0.607	1.056	0.001	1.664

Test Engineer : Kevin Guo, Teddy Chang and Casper Hsu

15. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be ≤ 30%, for a confidence interval of k = 2. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.



Applicable for SAR Measurements:

Uncertainty Budget (4 MHz - 10 GHz range)							
Error Description	Uncertainty Value (±%)	Probability	Divisor	(C1) 1g	(C1) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	18.60	N	2	1	1	9.3	9.3
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Linearity	4.70	R	1.732	1	1	2.7	2.7
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Boundary Effects	2.00	R	1.732	1	1	1.2	1.2
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	6.70	R	1.732	1	1	3.9	3.9
Post-processing	4.00	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Holder	3.60	N	1	1	1	3.6	3.6
Test sample Positioning	3.03	N	1	1	1	3.0	3.0
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Phantom and Setup							
Phantom Uncertainty	7.60	R	1.732	1	1	4.4	4.4
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.77	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.77	2.3	2.2
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.77	1.1	1.1
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.77	1.7	1.6
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						14.5%	14.2%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						29.0%	28.4%

Applicable for Power Density Measurements:

Error Description	Uncertainty Value (±dB)	Probability	Divisor	(Ci)	Standard Uncertainty (±dB)
Probe Calibration	0.49	N	1	1	0.49
Probe correction	0.00	R	1.732	1	0.00
Frequency response (BW ≤ 1 GHz)	0.20	R	1.732	1	0.12
Sensor cross coupling	0.00	R	1.732	1	0.00
Isotropy	0.50	R	1.732	1	0.29
Linearity	0.20	R	1.732	1	0.12
Probe scattering	0.00	R	1.732	1	0.00
Probe positioning offset	0.30	R	1.732	1	0.17
Probe positioning repeatability	0.04	R	1.732	1	0.02
Sensor mechanical offset	0.00	R	1.732	1	0.00
Probe spatial resolution	0.00	R	1.732	1	0.00
Field impedance dependence	0.00	R	1.732	1	0.00
Amplitude and phase drift	0.00	R	1.732	1	0.00
Amplitude and phase noise	0.04	R	1.732	1	0.02
Measurement area truncation	0.00	R	1.732	1	0.00
Data acquisition	0.03	N	1	1	0.03
Sampling	0.00	R	1.732	1	0.00
Field reconstruction	2.00	R	1.732	1	1.15
Forward transformation	0.00	R	1.732	1	0.00
Power density scaling	0.00	R	1.732	1	0.00
Spatial averaging	0.10	R	1.732	1	0.06
System detection limit	0.04	R	1.732	1	0.02
Uncertainty terms dependent on the DUT and environmental factors					
Probe coupling with DUT	0.00	R	1.732	1	0.0
Modulation response	0.40	R	1.732	1	0.2
Integration time	0.00	R	1.732	1	0.0
Response time	0.00	R	1.732	1	0.0
Device holder influence	0.10	R	1.732	1	0.1
DUT alignment	0.00	R	1.732	1	0.0
RF ambient conditions	0.04	R	1.732	1	0.0
Ambient reflections	0.04	R	1.732	1	0.0
Immunity / secondary reception	0.00	R	1.732	1	0.0
Drift of the DUT		R	1.732	1	
Combined Std. Uncertainty					1.34
Expanded STD Uncertainty (95%)					2.68



16. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [6] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [7] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [8] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.
- [9] IEC/IEEE 62209-1528:2020, “Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)”, Oct. 2020
- [10] SPEAG DASY6 System Handbook
- [11] SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)