

# RADIO TEST REPORT

## (FCC Part 15 Subpart C / IC RSS-247)

Applicant:	Honeywell International Inc Honeywell Safety and Productivity Solutions
Address:	9680 Old Bailes Road, Fort Mill, SC 29707 United States

Manufacturer:	Honeywell International Inc Honeywell Safety and Productivity Solutions
Address:	9680 Old Bailes Road, Fort Mill, SC 29707 United States
Product:	Mobile Computer
Brand Name:	Honeywell
Model Name:	CT45-L0N
FCC ID:	HD5-CT45L0N
Date of tests:	2021-06-11 to 2021-07-01


The tests have been carried out according to the requirements of the following standard:

**Part 15 Subpart C §15. 247 / IC RSS-247 issue 2**

**CONCLUSION:** The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang  
Engineer / Mobile Department

Approved by Luke Lu  
Manager / Mobile Department



Date: Jul. 02, 2021



Date: Jul. 02, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute you unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



Test Report No.: RFBGDJ-W7L-P21060011-5

## Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	2021.07.02	Valid	Original Report

## TABLE OF CONTENTS

<b>1. GENERAL DESCRIPTION</b> .....	<b>5</b>
1.1 APPLICANT.....	5
1.2 MANUFACTURER.....	5
1.3 GENERAL DESCRIPTION OF EUT.....	5
1.4 MODIFICATION OF EUT.....	6
1.5 APPLICABLE STANDARDS.....	6
<b>2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST</b> .....	<b>7</b>
2.1 DESCRIPTIONS OF TEST MODE.....	7
2.2 TEST MODE.....	7
2.3 SUPPORT EQUIPMENT.....	8
2.4 TEST SETUP.....	9
2.5 MEASUREMENT RESULTS EXPLANATION EXAMPLE.....	12
<b>3. TEST RESULT</b> .....	<b>13</b>
3.1 6DB AND 99% BANDWIDTH MEASUREMENT.....	13
3.2 PEAK OUTPUT POWER MEASUREMENT.....	14
3.3 POWER SPECTRAL DENSITY MEASUREMENT.....	15
3.4 CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT.....	16
3.5 RADIATED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT.....	17
3.6 AC CONDUCTED EMISSION MEASUREMENT.....	41
3.7 ANTENNA REQUIREMENTS.....	44
<b>4. LIST OF MEASURING EQUIPMENT</b> .....	<b>45</b>
<b>5. UNCERTAINTY OF EVALUATION</b> .....	<b>47</b>
<b>APPENDIX A: DTS BANDWIDTH</b> .....	<b>48</b>
<b>APPENDIX B: OCCUPIED CHANNEL BANDWIDTH</b> .....	<b>55</b>
<b>APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER &amp; E.I.R.P.</b> .....	<b>62</b>
<b>APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY</b> .....	<b>69</b>
<b>APPENDIX E: BAND EDGE MEASUREMENTS</b> .....	<b>76</b>
<b>APPENDIX F: CONDUCTED SPURIOUS EMISSION</b> .....	<b>81</b>

## Summary of Test RESULT

FCC Rule	IC Rule	Description	Limit	Result	Remark
15.247(a)(2)	RSS-247 5.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
-	RSS-Gen 6.7	99% Bandwidth	-	Pass	-
15.247(b)(3)	RSS-247 5.4(d)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
15.247(e)	RSS-247 5.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
15.247(d)	RSS-247 5.5	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
15.247(d)	RSS-247 5.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d) RSS-247 5.5 & RSS-Gen Table 5 , Table 6	Pass	Under limit 10.16 dB at 4880 MHz
15.207	RSS-GEN 8.8	AC Conducted Emission	15.207(a) RSS-GEN 8.8 Table 4	Pass	Under limit 17.16 dB at 0.497 MHz
15.203 & 15.247(b)	RSS-GEN 6.8	Antenna Requirement	15.203 & 15.247(b) RSS-GEN 6.8	Pass	-

# 1. General Description

## 1.1 Applicant

**Honeywell International Inc**  
**Honeywell Safety and Productivity Solutions**  
 9680 Old Bailes Road, Fort Mill, SC 29707 United States

## 1.2 Manufacturer

**Honeywell International Inc**  
**Honeywell Safety and Productivity Solutions**  
 9680 Old Bailes Road, Fort Mill, SC 29707 United States

## 1.3 General Description Of EUT

<b>Product</b>	Mobile Computer
<b>Model No.</b>	CT45-L0N
<b>Additional No.</b>	N/A
<b>Difference Description</b>	N/A
<b>Power Supply</b>	3.85Vdc for EUT
<b>Modulation Technology</b>	BLE
<b>Modulation Type</b>	GFSK
<b>Operating Frequency</b>	2402MHz~2480MHz
<b>Number Of Channel</b>	40
<b>Max. Output Power</b>	6.56 dBm (0.0045 W)
<b>Max. e.i.r.p.</b>	7.96 dBm (0.0063W)
<b>Antenna Type</b>	LDS type Antenna with 1.4dBi gain
<b>HW Version</b>	V1.0
<b>SW Version</b>	OS.11.001
<b>I/O Ports</b>	Refer to user's manual

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

## 1.4 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013
- ♦ KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ IC RSS-247 Issue 2
- ♦ IC RSS-Gen Issue 5

### Remark:

1. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B&ICES-003, recorded in a separate test report.

## 2. Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

The transmitter has a maximum peak conducted output power as follows:

Test Mode	Channel	Frequency	Bluetooth RF Output Power
BLE_125K	Ch00	2402MHz	4.66
	Ch19	2440MHz	5.33
	Ch39	2480MHz	6.52
BLE_1M	Ch00	2402MHz	4.69
	Ch19	2440MHz	5.32
	Ch39	2480MHz	6.54
BLE_2M	Ch00	2402MHz	4.72
	Ch19	2440MHz	5.37
	Ch39	2480MHz	6.56
BLE_500K	Ch00	2402MHz	4.68
	Ch19	2440MHz	5.33
	Ch39	2480MHz	6.54

- a. Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.
- b. The data rate was set in 2Mbps for all the test items due to the highest RF output power

## 2.2 Test Mode

### 2.2.1 Antenna Port Conducted Measurement

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 5.1 – LE GFSK 2Mbps
Conducted Test Cases	Mode 1: CH00_2402 MHz Mode 2: CH19_2440 MHz Mode 3: CH39_2480 MHz



### 2.2.2 Radiated Emission Test (Below 1GHz)

Radiated Test Cases	Bluetooth 5.1 – LE GFSK 2Mbps
	Mode 1: CH00_2402 MHz

Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type. Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

2. Following channel(s) was (were) selected for the final test as listed above

### 2.2.3 Radiated Emission Test (Above 1GHz)

Radiated Test Cases	Bluetooth 5.1 – LE GFSK 2Mbps
	Mode 1: CH00_2402 MHz
	Mode 2: CH19_2440 MHz
	Mode 3: CH39_2480 MHz

Note : 1. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

2. Following channel(s) was (were) selected for the final test as listed above

3. For frequency above 18GHz, the measured value is much lower than the limit, therefore, it is not reflected in the report.

### 2.2.4 Power Line Conducted Emission Test:

AC Conducted Emission	Mode 1 : BT Linking + Earphone + Adapter
-----------------------	--

## 2.3 Support Equipment

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	NETGARE	R7800	PY315100319	N/A	unshielded AC I/P cable1.2 m
2.	Notebook	Lenovo	E470C	FCC DoC	N/A	shielded cable DC O/P 1.8 m unshielded AC I/P cable1.2 m
3.	Earphone	Honeywell	PTE-300N	FCC sDoC	N/A	N/A
4.	Adapter	Honeywell	ADS-12B-06	FCC sDoC	N/A	N/A






			05010E		
--	--	--	--------	--	--


## 2.4 Test Setup

EUT was set in the Hidden menu mode to enable BT communications.


The following picture is a screenshot of the test software

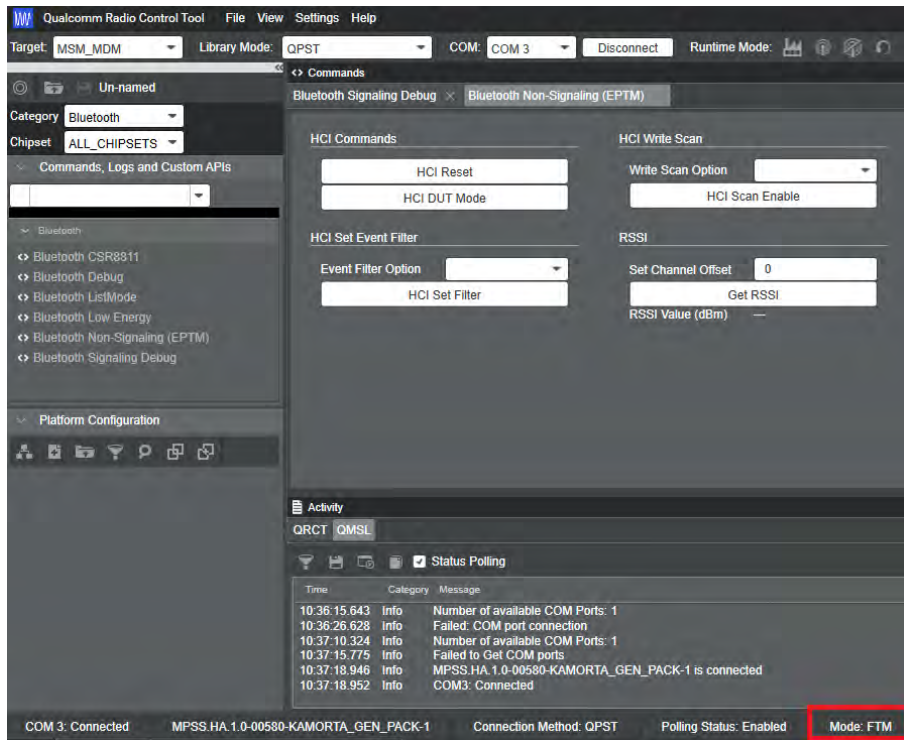


### Setup diagram for Conducted Test

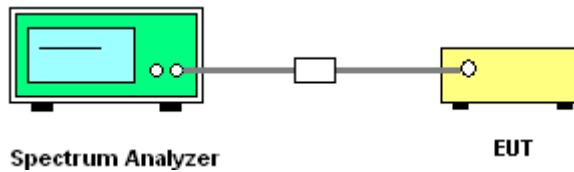


Setup diagram for Radiation(9KHz~30MHz) Test

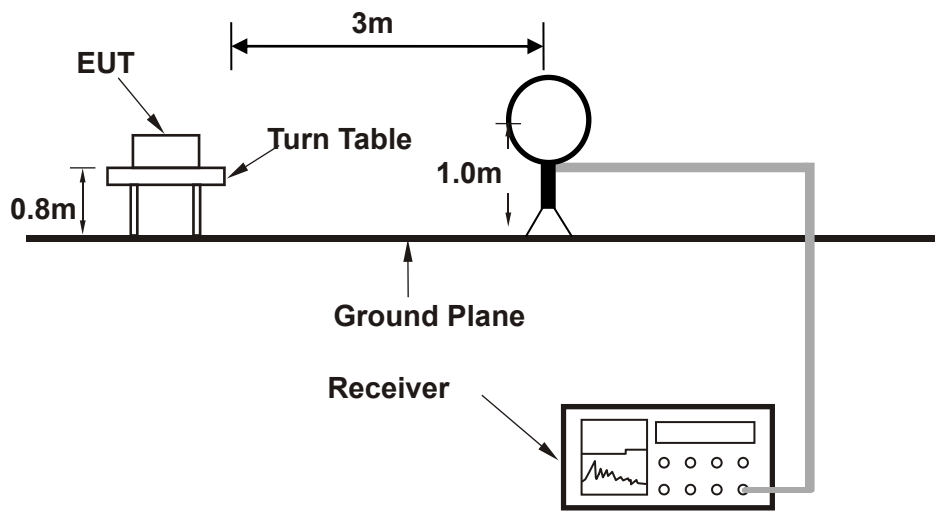


Setup diagram for Radiation(Below 1G) Test

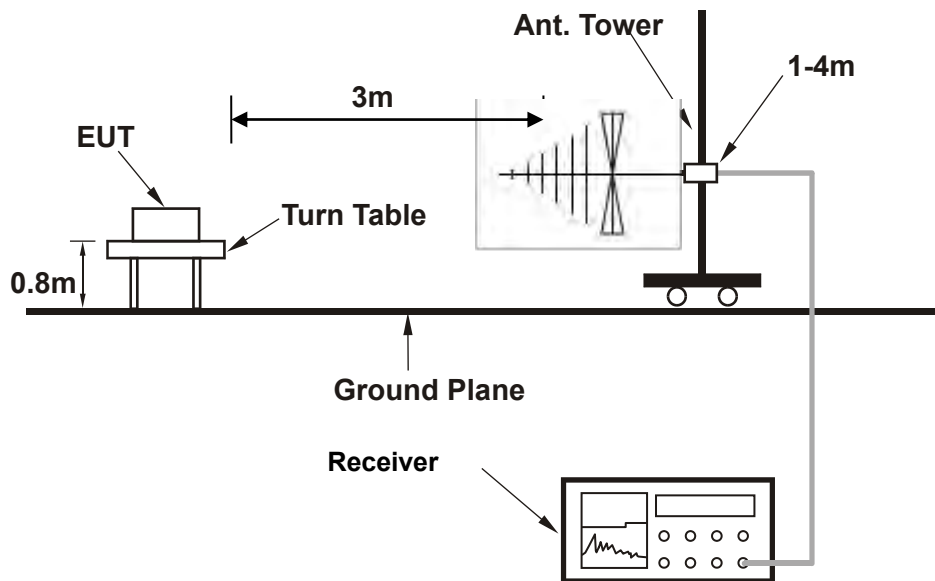

**Setup diagram for Radiation (Above1G) Test**

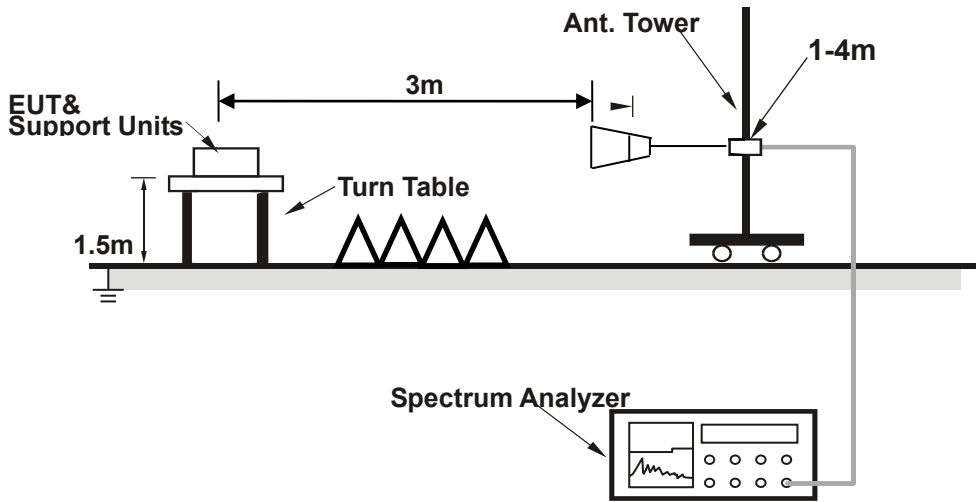

**Setup diagram for AC Conducted Emission Test**

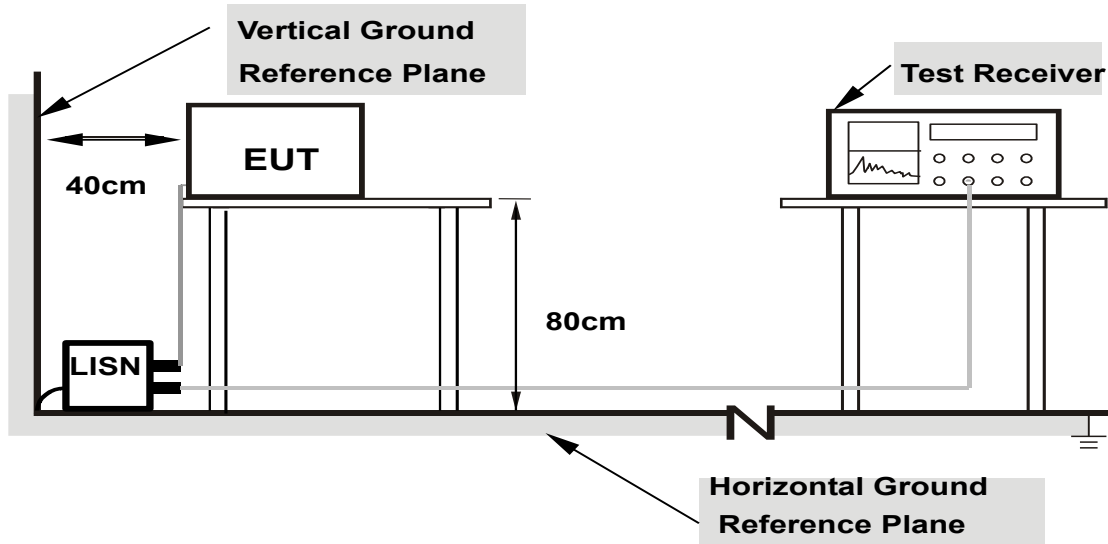

- Note: 1.Support units were connected to second LISN.  
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**



## 2.5 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5 + 10 = 15 \text{ (dB)}\end{aligned}$$

### For all radiated test items:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Over Limit (dB  $\mu$  V/m) = Level(dB  $\mu$  V/m) - Limit Level (dB  $\mu$  V/m)

### 3. Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

FCC §15.247 (a) (2)

IC RSS-247 5.2(a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set to the maximum power setting and enable the EUT transmit continuously
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.

##### 3.1.3 Test Result of 6dB Bandwidth

Refer to Appendix A of this test report.

##### 3.1.4 Test Result of 99% Bandwidth

Refer to Appendix B of this test report.

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

FCC §15.247 (b)(3)

For systems using digital modulation in the 2400-2483.5 MHz bands: 30dBm.

IC RSS-247 A5.4(d)

For DTSs employing digital modulation techniques operating in the bands 902-928MHz and 2400-2483.5MHz, the maximum peak conducted output power shall not exceed 1 W.

The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e)

### 3.2.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to spectrum analyzer.
3. Set to the maximum power setting and enable the EUT transmit continuously
4. Set the  $RBW \geq DTS \text{ Bandwidth}$ ,  $VBW \geq 3 * RBW$ ,  $Span \geq 1.5 * DTS \text{ Bandwidth}$ ,  $Detector = Peak$ ,  $Sweep \text{ time} = auto \text{ couple}$ ,  $Trace \text{ mode} = max \text{ holde}$ .
5. Allow trace to fully stabilize, Use peak marker function to determine the peak amplitude level.
6. Measure the conducted output power

### 3.2.3 Test Result of Peak Output Power

Refer to Appendix C of this test report.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limits of Power Spectral Density

FCC§15.247(e)

IC RSS-247 5.2(b)

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

#### 3.3.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
5. Measure and record the results in the test report.
6. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.3 Test Result of Power Spectral Density

Refer to Appendix D of this test report.

## **3.4 Conducted Band Edges and Spurious Emission Measurement**

### **3.4.1 Limit of Conducted Band Edges and Spurious Emission**

FCC §15.247 (d)

IC RSS-247 5.5

Maximum conducted (average) output power was used to determine compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

### **3.4.2 Test Procedures**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### **3.4.3 Test Result of Conducted Band Edges**

Refer to Appendix E of this test report.

### **3.4.4 Test Result of Conducted Spurious Emission**

Refer to Appendix F of this test report.



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

FCC §15.247 (d)

IC RSS-247 5.5

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The measurement distance is 3 meter.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$ GHz ; VBW RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement:  
 VBW = 10 Hz, when duty cycle is no less than 98 percent.  
 VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission

duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth 5.1 - LE	33.33	0.21	4.76	10kHz

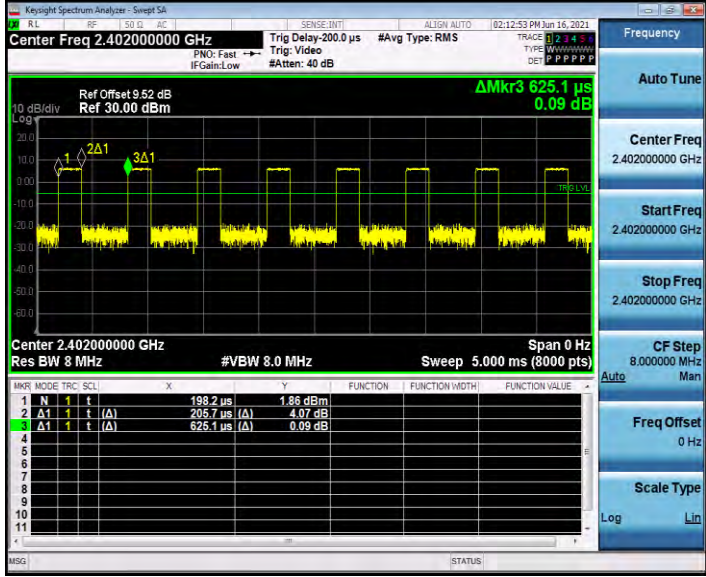
### 3.5.3 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.5.4 Test Result of Radiated Spurious at Band Edges

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.3GHz~2.405GHz	<b>Polarization :</b>	Horizontal


Test Site : 3m Chamber	Temp/Humi : 25°C/64%
Tested by : Jack	Pol/Phase : HORIZONTAL
Test Mode : Ble CH00(2402MHz)	Power rating: DC 3.85W

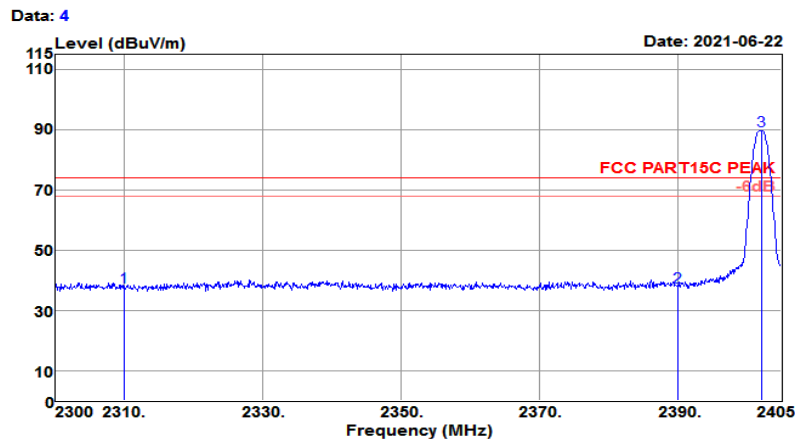

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	41.96	27.38	4.08	35.68	37.74	74.00	-36.26	Peak
2390.000	41.89	27.56	4.16	35.88	37.73	74.00	-36.27	Peak
2402.270	93.66	27.58	4.17	35.91	89.50	74.00	15.50	Peak

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.3GHz~2.405GHz	<b>Polarization :</b>	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	DC 3.85V

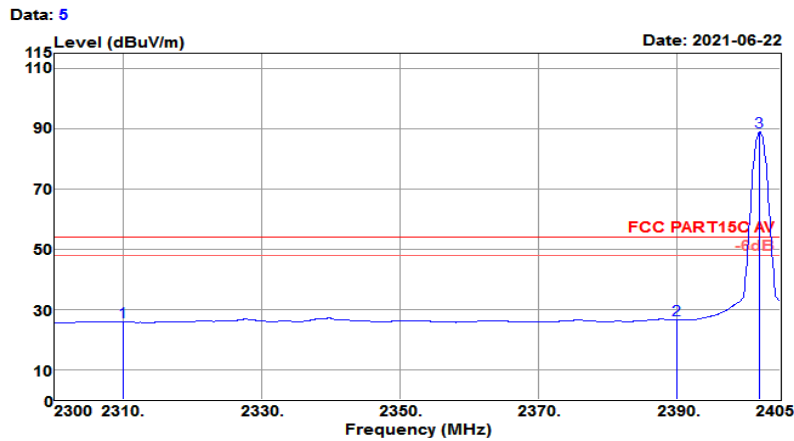

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	30.11	27.38	4.08	35.68	25.89	54.00	-28.11	Average
2390.000	30.57	27.56	4.16	35.88	26.41	54.00	-27.59	Average
2402.060	93.16	27.58	4.17	35.91	89.00	54.00	35.00	Average

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.3GHz~2.405GHz	<b>Polarization :</b>	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	DC 3.85V

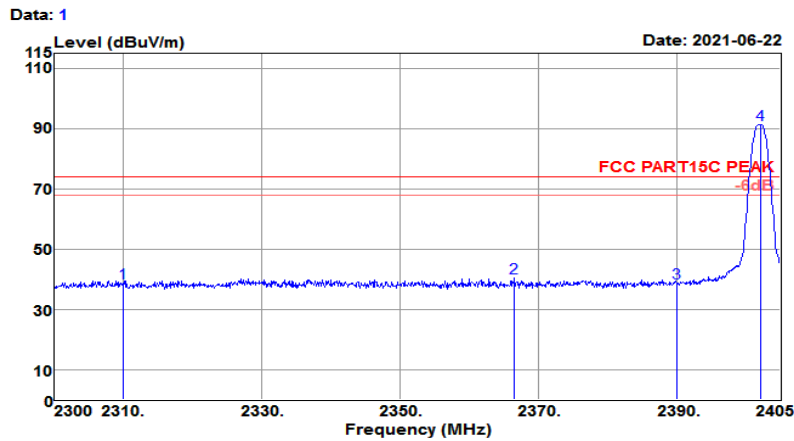

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	42.90	27.38	4.08	35.68	38.68	74.00	-35.32	Peak
2366.570	44.59	27.51	4.14	35.82	40.42	74.00	-33.58	Peak
2390.000	42.94	27.56	4.16	35.88	38.78	74.00	-35.22	Peak
2402.270	95.43	27.58	4.17	35.91	91.27	74.00	17.27	Peak




**BUREAU  
VERITAS**

Test Report No.: RFBGDJ-W7L-P21060011-5

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.3GHz~2.405GHz	<b>Polarization :</b>	Vertical

Test Site : 3m Chamber	Temp/Humi : 25°C/64%
Tested by : Jack	Pol/Phase : VERTICAL
Test Mode : Ble CH00(2402MHz)	Power rating: DC 3.85V

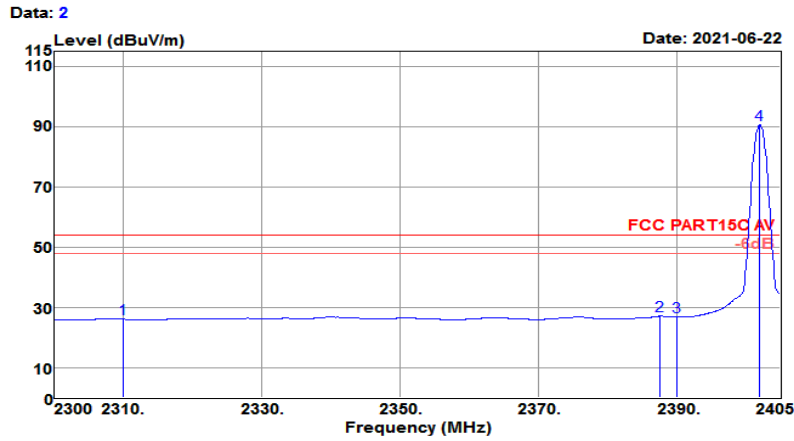


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2309.975	30.25	27.38	4.08	35.67	26.04	54.00	-27.96	Average
2387.675	31.22	27.55	4.16	35.87	27.06	54.00	-26.94	Average
2390.000	30.92	27.56	4.16	35.88	26.76	54.00	-27.24	Average
2402.060	94.90	27.58	4.17	35.91	90.74	54.00	36.74	Average

Test Mode :	BLE CH39 (2480 MHz)	Temperature :	21~23°C
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.477GHz~2.51GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	DC 3.85V


Data: 12

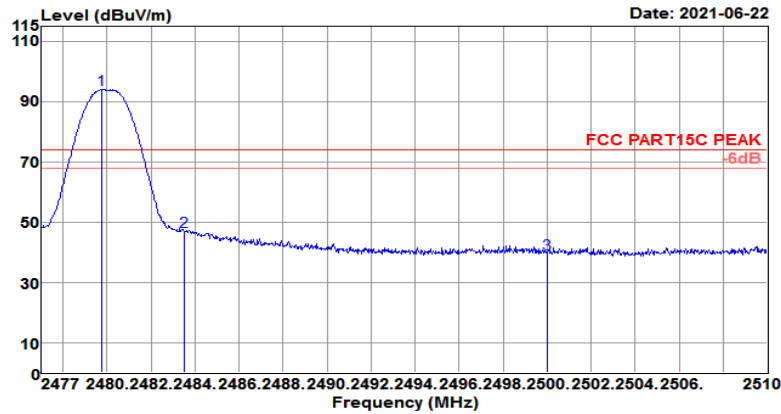

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.739	98.01	27.76	4.19	36.10	93.86	74.00	19.86	Peak
2483.500	51.01	27.76	4.19	36.11	46.85	74.00	-27.15	Peak
2500.000	43.61	27.80	4.19	36.15	39.45	74.00	-34.55	Peak

<b>Test Mode :</b>	BLE CH39 (2480 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.477GHz~2.51GHz	<b>Polarization :</b>	Horizontal

Test Site : 3m Chamber	Temp/Humi : 25°C/64%
Tested by : Jack	Pol/Phase : HORIZONTAL
Test Mode : Ble CH39(2480MHz)	Power rating: DC 3.85V

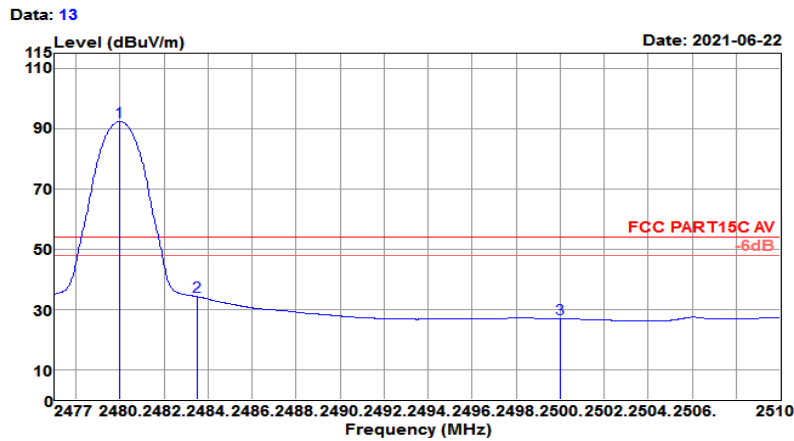


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.003	96.48	27.76	4.19	36.10	92.33	54.00	38.33	Average
2483.500	38.32	27.76	4.19	36.11	34.16	54.00	-19.84	Average
2500.000	30.92	27.80	4.19	36.15	26.76	54.00	-27.24	Average



Test Mode :	BLE CH39 (2480 MHz)	Temperature :	21~23°C
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.477GHz~2.51GHz	Polarization :	Vertical


Test Site : 3m Chamber	Temp/Humi : 25°C/64%
Tested by : Jack	Pol/Phase : VERTICAL
Test Mode : BLE CH39(2480MHz)	Power rating: DC 3.85V

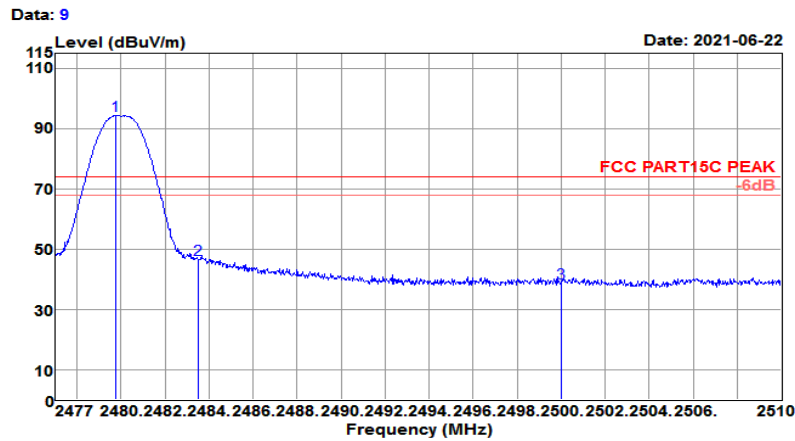

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.772	98.41	27.76	4.19	36.10	94.26	74.00	20.26	Peak
2483.500	50.71	27.76	4.19	36.11	46.55	74.00	-27.45	Peak
2500.000	42.76	27.80	4.19	36.15	38.60	74.00	-35.40	Peak

<b>Test Mode :</b>	BLE CH39 (2480 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.477GHz~2.51GHz	<b>Polarization :</b>	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	DC 3.85V

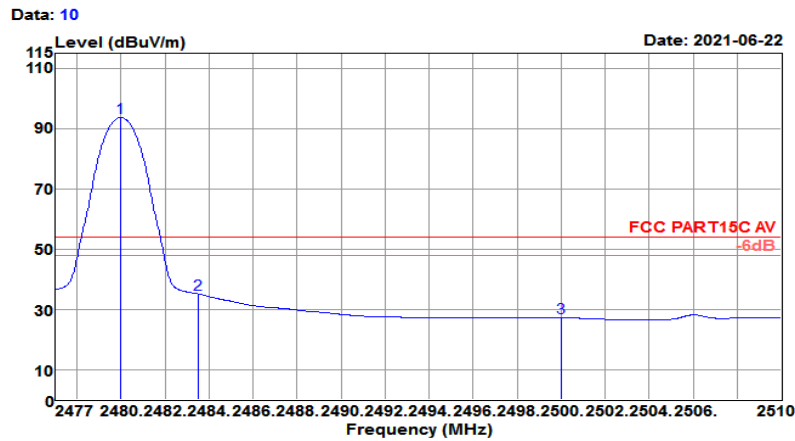


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.003	97.81	27.76	4.19	36.10	93.66	54.00	39.66	Average
2483.500	39.26	27.76	4.19	36.11	35.10	54.00	-18.90	Average
2500.000	31.25	27.80	4.19	36.15	27.09	54.00	-26.91	Average

### 3.5.5 Test Result of Radiated Spurious Emission (1GHz ~ 10<sup>th</sup> Harmonic)

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	DC 3.85W

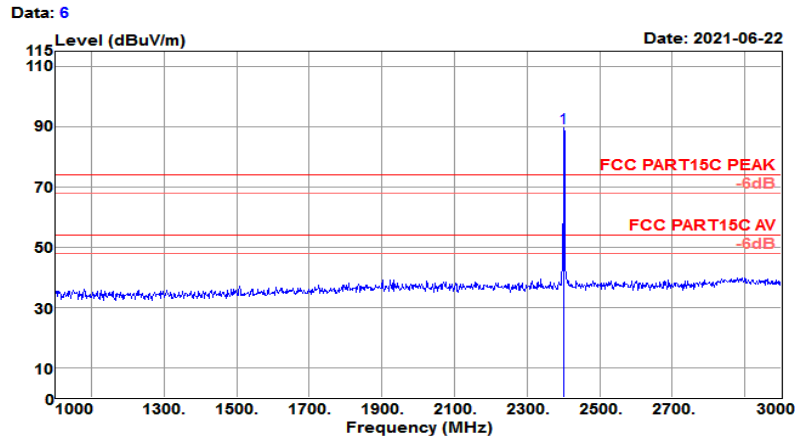

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2402.000	93.57	27.58	4.17	35.91	89.41	74.00	15.41	Peak

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Horizontal

Test Site : 3m Chamber	Temp/Humi : 25°C/64%
Tested by : Jack	Pol/Phase : HORIZONTAL
Test Mode : Ble CH00(2402MHz)	Power rating: DC 3.85V

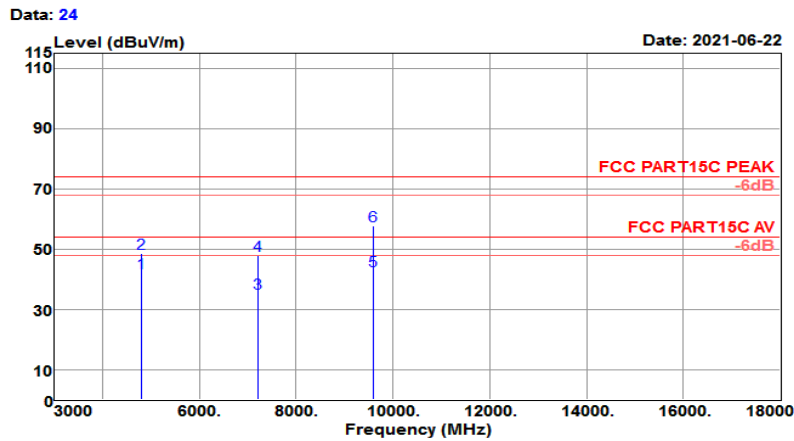


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4804.000	38.84	30.93	6.44	34.12	42.09	54.00	-11.91	Average
4804.000	45.38	30.93	6.44	34.12	48.63	74.00	-25.37	Peak
7206.000	25.59	35.39	8.61	34.39	35.20	54.00	-18.80	Average
7206.000	38.26	35.39	8.61	34.39	47.87	74.00	-26.13	Peak
9608.000	26.84	38.39	11.69	34.14	42.78	54.00	-11.22	Average
9608.000	41.82	38.39	11.69	34.14	57.76	74.00	-16.24	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	DC 3.85V

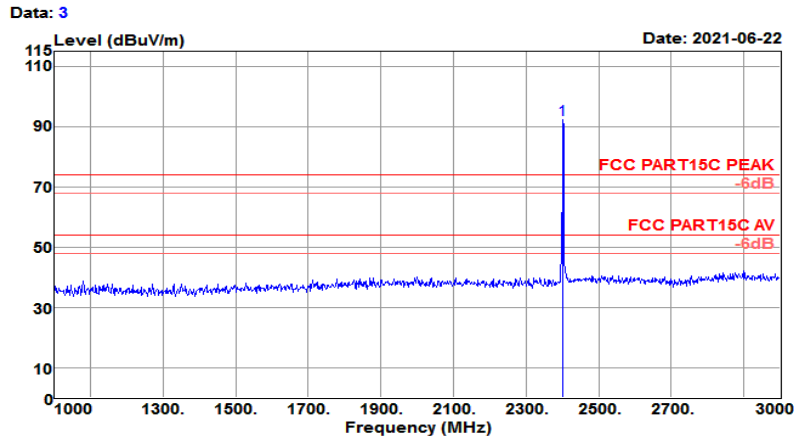


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2402.000	96.35	27.58	4.17	35.91	92.19	74.00	18.19	Peak

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Vertical

Test Site : 3m Chamber	Temp/Humi : 25°C/64%
Tested by : Jack	Pol/Phase : VERTICAL
Test Mode : Ble CH00(2402MHz)	Power rating: DC 3.85V


Data: 26

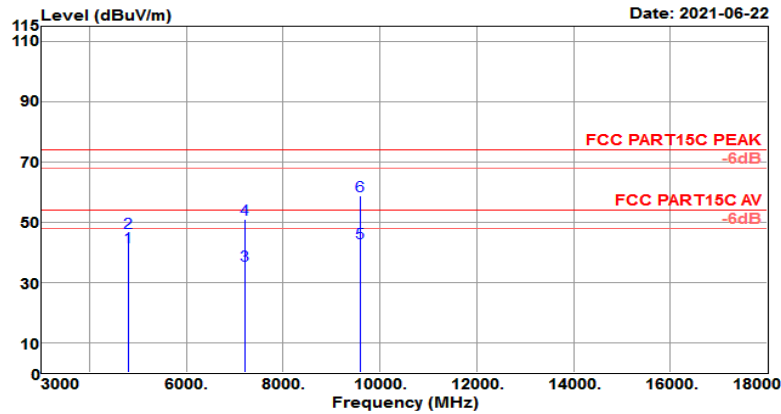

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4804.000	38.59	30.93	6.44	34.12	41.84	54.00	-12.16	Average
4804.000	43.38	30.93	6.44	34.12	46.63	74.00	-27.37	Peak
7206.000	26.19	35.39	8.61	34.39	35.80	54.00	-18.20	Average
7206.000	41.29	35.39	8.61	34.39	50.90	74.00	-23.10	Peak
9608.000	27.18	38.39	11.69	34.14	43.12	54.00	-10.88	Average
9608.000	42.73	38.39	11.69	34.14	58.67	74.00	-15.33	Peak

<b>Test Mode :</b>	BLE CH19 (2440 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH19(2440MHZ)	Power rating:	DC 3.85V

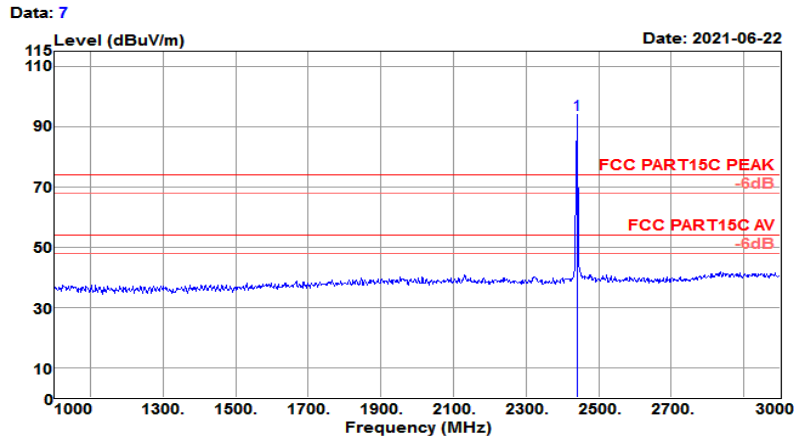

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2440.000	98.03	27.67	4.18	36.00	93.88	74.00	19.88	Peak

<b>Test Mode :</b>	BLE CH19 (2440 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Horizontal

Test Site : 3m Chamber	Temp/Humi : 25°C/64%
Tested by : Jack	Pol/Phase : HORIZONTAL
Test Mode : Ble CH19(2440MHZ)	Power rating: DC 3.85V

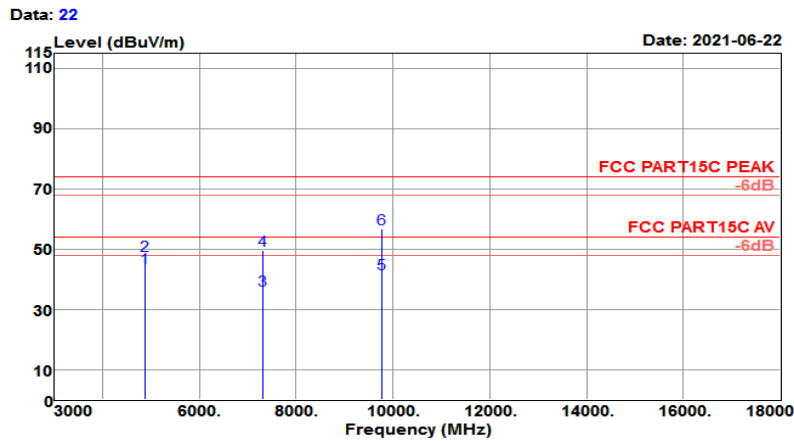


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	39.83	31.03	7.01	34.03	43.84	54.00	-10.16	Average
4880.000	43.95	31.03	7.01	34.03	47.96	74.00	-26.04	Peak
7320.000	26.18	35.67	8.97	34.49	36.33	54.00	-17.67	Average
7320.000	39.48	35.67	8.97	34.49	49.63	74.00	-24.37	Peak
9760.000	26.14	38.51	11.16	34.20	41.61	54.00	-12.39	Average
9760.000	41.27	38.51	11.16	34.20	56.74	74.00	-17.26	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



<b>Test Mode :</b>	BLE CH19 (2440 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH19(2440MHZ)	Power rating:	DC 3.85V

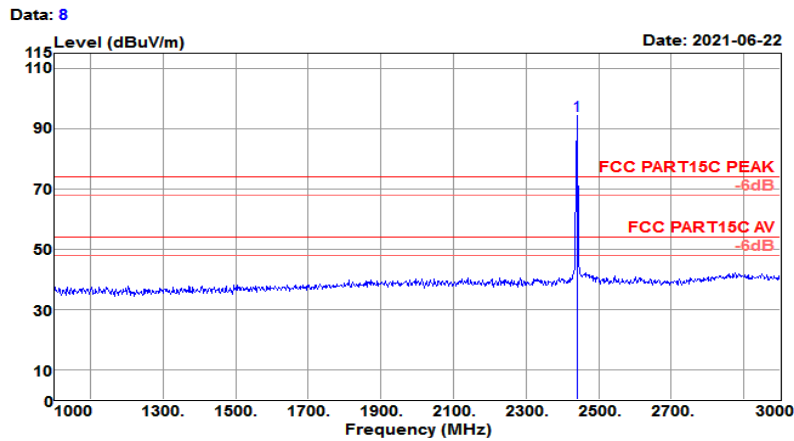

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2440.000	98.57	27.67	4.18	36.00	94.42	74.00	20.42	Peak

<b>Test Mode :</b>	BLE CH19 (2440 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Vertical

Test Site : 3m Chamber	Temp/Humi : 25°C/64%
Tested by : Jack	Pol/Phase : VERTICAL
Test Mode : Ble CH19(2440MHZ)	Power rating: DC 3.85V

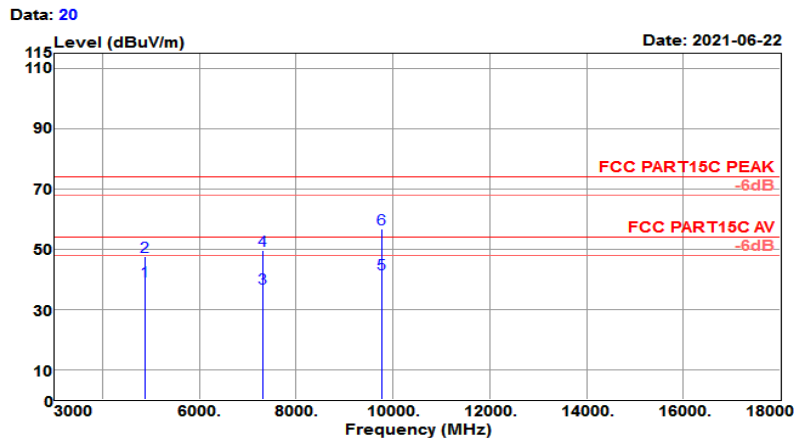


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	35.28	31.03	7.01	34.03	39.29	54.00	-14.71	Average
4880.000	43.59	31.03	7.01	34.03	47.60	74.00	-26.40	Peak
7320.000	26.82	35.67	8.97	34.49	36.97	54.00	-17.03	Average
7320.000	39.43	35.67	8.97	34.49	49.58	74.00	-24.42	Peak
9760.000	26.38	38.51	11.16	34.20	41.85	54.00	-12.15	Average
9760.000	41.27	38.51	11.16	34.20	56.74	74.00	-17.26	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

<b>Test Mode :</b>	BLE CH39 (2480 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	DC 3.85V

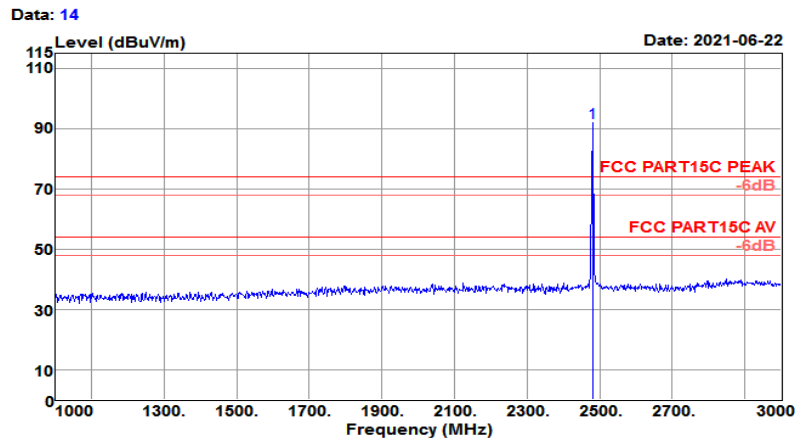

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.000	96.01	27.76	4.19	36.10	91.86	74.00	17.86	Peak

<b>Test Mode :</b>	BLE CH39 (2480 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Horizontal

Test Site : 3m Chamber	Temp/Humi : 25°C/64%
Tested by : Jack	Pol/Phase : HORIZONTAL
Test Mode : Ble CH39(2480MHz)	Power rating: DC 3.85V

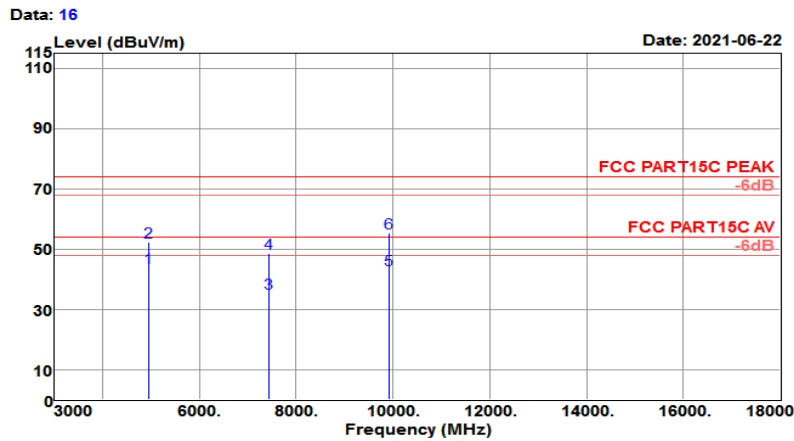


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4960.000	38.85	31.14	7.62	33.94	43.67	54.00	-10.33	Average
4960.000	47.38	31.14	7.62	33.94	52.20	74.00	-21.80	Peak
7440.000	24.87	35.96	9.03	34.60	35.26	54.00	-18.74	Average
7440.000	38.19	35.96	9.03	34.60	48.58	74.00	-25.42	Peak
9920.000	26.38	38.64	12.18	34.27	42.93	54.00	-11.07	Average
9920.000	38.82	38.64	12.18	34.27	55.37	74.00	-18.63	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

<b>Test Mode :</b>	BLE CH39 (2480 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	DC 3.85V

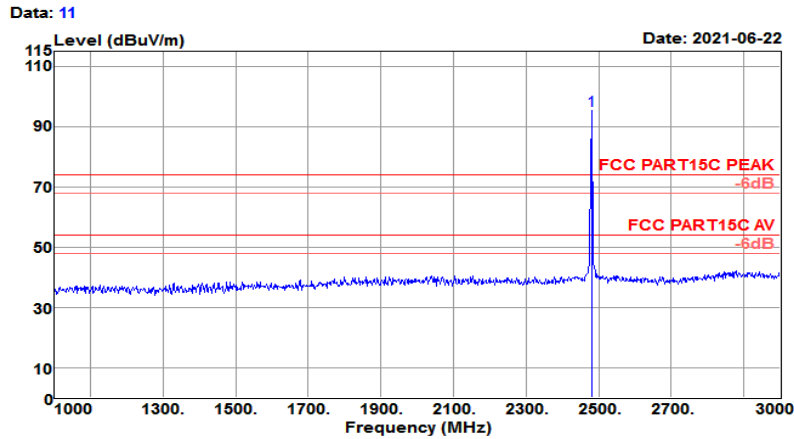

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.000	99.32	27.76	4.19	36.10	95.17	74.00	21.17	Peak

<b>Test Mode :</b>	BLE CH39 (2480 MHz)	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	DC 3.85V

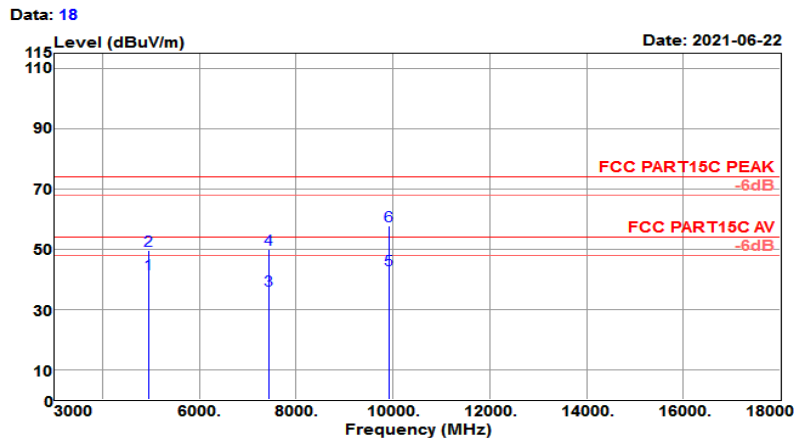


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4960.000	36.92	31.14	7.62	33.94	41.74	54.00	-12.26	Average
4960.000	44.82	31.14	7.62	33.94	49.64	74.00	-24.36	Peak
7440.000	25.82	35.96	9.03	34.60	36.21	54.00	-17.79	Average
7440.000	39.43	35.96	9.03	34.60	49.82	74.00	-24.18	Peak
9920.000	26.38	38.64	12.18	34.27	42.93	54.00	-11.07	Average
9920.000	41.28	38.64	12.18	34.27	57.83	74.00	-16.17	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### 3.5.6 Test Result of Radiated Spurious Emission (30MHz ~ 1GHz)

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	21~23℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	30MHz~1GHz	<b>Polarization :</b>	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	DC 3.85V
EUT	: Mobile Computer		
Model No.	: CT45-L0N		

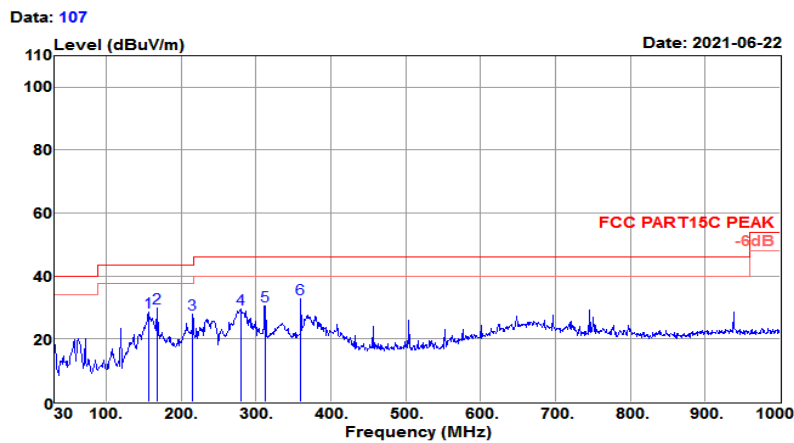

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
156.100	44.83	14.11	2.14	32.48	28.60	43.50	-14.90	QP
167.740	46.69	13.45	2.22	32.48	29.88	43.50	-13.62	QP
215.270	48.06	9.89	2.55	32.47	28.03	43.50	-15.47	QP
280.260	46.53	12.74	2.90	32.49	29.68	46.00	-16.32	QP
312.270	46.59	13.30	3.10	32.50	30.49	46.00	-15.51	QP
359.800	47.88	14.24	3.34	32.53	32.93	46.00	-13.07	QP

Test Mode :	BLE CH00 (2402 MHz)	Temperature :	21~23°C
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	30MHz~1GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	DC 3.85V
EUT	: Mobile Computer		
Model No.	: CT45-L0N		

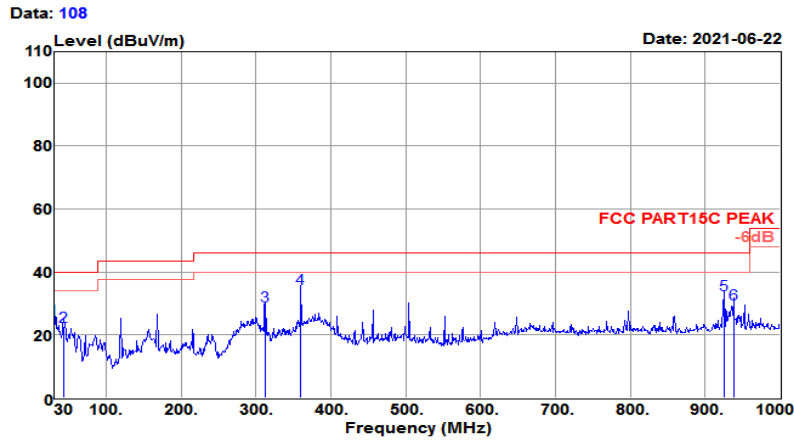

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
30.000	42.71	13.77	0.96	32.44	25.00	40.00	-15.00	QP
42.610	39.77	14.51	1.05	32.48	22.85	40.00	-17.15	QP
312.270	45.20	13.30	3.10	32.50	29.10	46.00	-16.90	QP
359.800	49.60	14.24	3.34	32.53	34.65	46.00	-11.35	QP
925.310	36.91	22.34	5.75	32.16	32.84	46.00	-13.16	QP
937.920	33.91	22.41	5.76	32.15	29.93	46.00	-16.07	QP



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

FCC §15.207

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.




### 3.6.3 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	25°C
Test Engineer :	Jack Liu	Relative Humidity :	62%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	BT Linking + Earphone + Adapter		

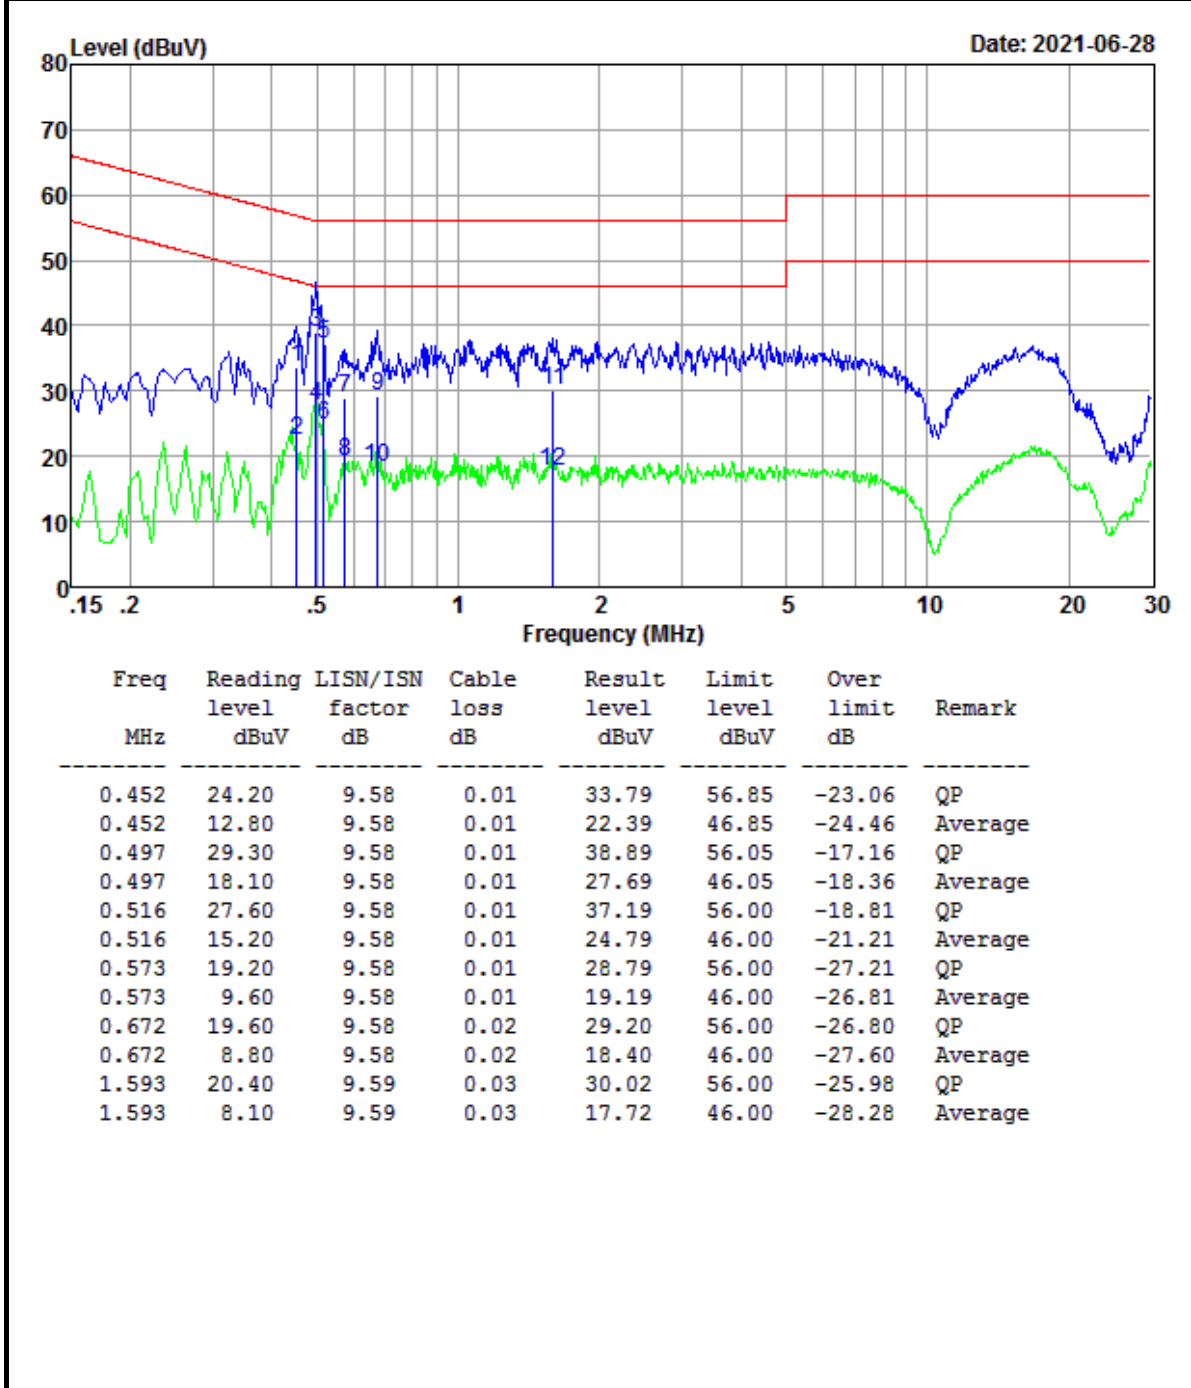

Result Level= Reading Level + LISN Factor + Cable Loss

Test Mode :	Mode 1	Temperature :	25°C
Test Engineer :	Jack Liu	Relative Humidity :	62%
Test Voltage :	120Vac / 60Hz	Phase :	NEUTRAL
Function Type :	BT Linking + Earphone + Adapter		

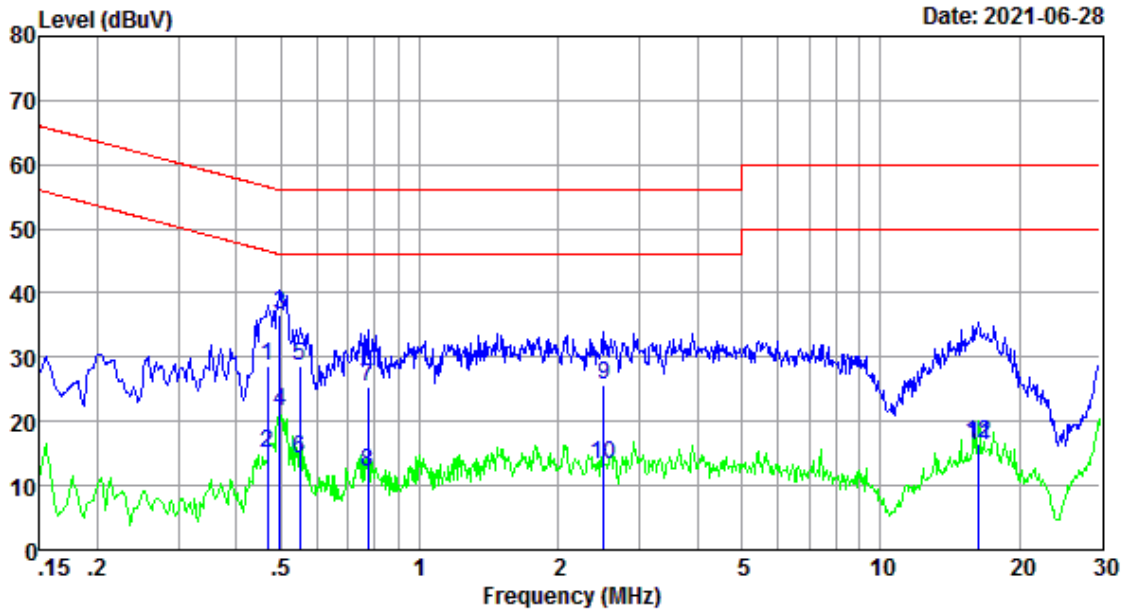

Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	Result level dBuV	Limit level dBuV	Over limit dB	Remark
0.469	19.20	9.57	0.01	28.78	56.54	-27.76	QP
0.469	5.50	9.57	0.01	15.08	46.54	-31.46	Average
0.497	27.10	9.57	0.01	36.68	56.05	-19.37	QP
0.497	11.90	9.57	0.01	21.48	46.05	-24.57	Average
0.549	19.00	9.58	0.01	28.59	56.00	-27.41	QP
0.549	4.50	9.58	0.01	14.09	46.00	-31.91	Average
0.771	15.70	9.58	0.02	25.30	56.00	-30.70	QP
0.771	2.50	9.58	0.02	12.10	46.00	-33.90	Average
2.513	15.90	9.60	0.04	25.54	56.00	-30.46	QP
2.513	3.60	9.60	0.04	13.24	46.00	-32.76	Average
16.312	6.00	10.09	0.11	16.20	60.00	-43.80	QP
16.312	6.30	10.09	0.11	16.50	50.00	-33.50	Average

Result Level= Reading Level + LISN Factor + Cable Loss

## 3.7 Antenna Requirements

### 3.7.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded..

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### 3.7.2 Antenna Connected Construction

An LDS type Antenna design is used.

### 3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	Keysight	N9010A	MY56070788	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56510025	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY57030005	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56510018	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56480002	2021-01-05	2022-01-04	Conducted
Thermal Chamber	Howkin	UHL-34	19111801	2021-04-21	2022-04-20	Conducted
Base Station	R&S	CMW 270	101231	2021-01-05	2022-01-04	Conducted
Signal Generator (Interferer)	Keysight	N5182B	MY56200384	2021-01-05	2022-01-04	Conducted
Signal Generator (Blocker)	Keysight	N5171B	MY56200661	2021-01-05	2022-01-04	Conducted

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV 40	101433	2021-01-05	2022-01-04	Radiation
Amplifier	Sonoma	310	363917	2021-01-06	2022-01-05	Radiation
Amplifier	Schwarzbeck	BBV 9718	327	2021-01-06	2022-01-05	Radiation
Amplifier	Narda	TTA1840-35-HG	2034380	2020-11-28	2021-11-27	Radiation
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-051	2020-02-14	2023-02-13	Radiation
Broadband Antenna	Schwarzbeck	VULB 9168	9168-757	2020-09-27	2023-09-26	Radiation
Horn Antenna	Schwarzbeck	BBHA 9120 D	1677	2020-02-14	2023-02-13	Radiation
Horn Antenna	COM-POWER	AH-1840	101117	2018-06-19	2021-06-18	Radiation
Horn Antenna	COM-POWER	AH-1840	101117	2021-06-18	2024-06-17	Radiation
Test Software	Audix	E3	6.111221a	N/A	N/A	Radiation
Filter	Micro-Tronics	BRM 50702	G266	N/A	N/A	Radiation

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
LISN	R&S	ENV216	102125	2021-01-05	2022-01-04	Conducted
LISN	R&S	ENV432	101327	2021-01-06	2022-01-05	Conducted
EMI Test Receiver	R&S	ESR3	102143	2021-01-06	2022-01-05	Conducted
EMI Test Software	Audix	E3	N/A	N/A	N/A	Conducted

N/A: No Calibration Required

- NOTE:.**
1. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
  2. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
  3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

## 5. Uncertainty of Evaluation

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.42dB
Radiated emission	30MHz ~ 1GMHz	2.50dB
	1GHz ~ 18GHz	3.51dB
	18GHz ~ 40GHz	3.96dB

MEASUREMENT	UNCERTAINTY
Occupied Channel Bandwidth	±196.4Hz
RF output power, conducted	±2.31dB
Power density, conducted	±2.31dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


## Appendix A: DTS Bandwidth

### Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_125K	Ant1	2402	0.608	2401.688	2402.296	0.5	PASS
		2440	0.692	2439.648	2440.340	0.5	PASS
		2480	0.612	2479.684	2480.296	0.5	PASS
BLE_1M	Ant1	2402	0.664	2401.660	2402.324	0.5	PASS
		2440	0.680	2439.648	2440.328	0.5	PASS
		2480	0.668	2479.652	2480.320	0.5	PASS
BLE_2M	Ant1	2402	1.172	2401.412	2402.584	0.5	PASS
		2440	1.148	2439.416	2440.564	0.5	PASS
		2480	1.100	2479.440	2480.540	0.5	PASS
BLE_500K	Ant1	2402	0.688	2401.660	2402.348	0.5	PASS
		2440	0.668	2439.664	2440.332	0.5	PASS
		2480	0.656	2479.676	2480.332	0.5	PASS



### Test Graphs

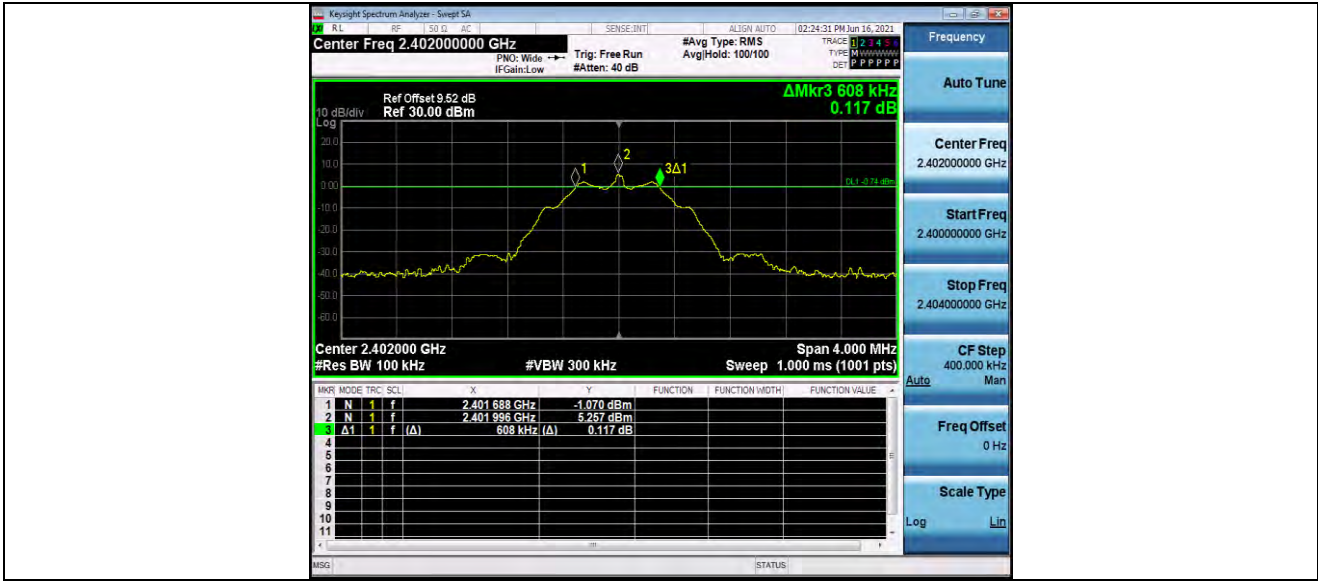

BLE\_125K\_Ant1\_2402



BLE\_125K\_Ant1\_2440



BUREAU VERITAS

### Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_125K\_Ant1\_2480



BLE\_1M\_Ant1\_2402



BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_1M\_Ant1\_2440



BLE\_1M\_Ant1\_2480



BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_2M\_Ant1\_2402



BLE\_2M\_Ant1\_2440



BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_2M\_Ant1\_2480



BLE\_500K\_Ant1\_2402



BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_500K\_Ant1\_2440



BLE\_500K\_Ant1\_2480

## Appendix B: Occupied Channel Bandwidth

### Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_125K	Ant1	2402	1.0533	2401.466	2402.519	---	PASS
		2440	1.0563	2439.463	2440.520	---	PASS
		2480	1.0497	2479.465	2480.514	---	PASS
BLE_1M	Ant1	2402	1.0347	2401.487	2402.522	---	PASS
		2440	1.0359	2439.481	2440.517	---	PASS
		2480	1.0389	2479.480	2480.519	---	PASS
BLE_2M	Ant1	2402	2.0445	2400.991	2403.036	---	PASS
		2440	2.0521	2438.982	2441.035	---	PASS
		2480	2.0524	2478.982	2481.035	---	PASS
BLE_500K	Ant1	2402	1.0231	2401.481	2402.504	---	PASS
		2440	1.0115	2439.492	2440.504	---	PASS
		2480	1.0310	2479.477	2480.508	---	PASS

### Test Graphs








BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_125K\_Ant1\_2480

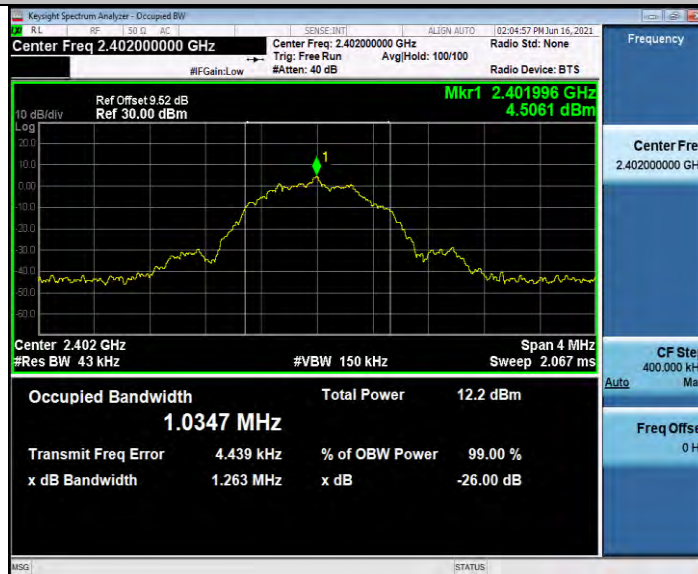

BLE\_1M\_Ant1\_2402



BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_1M\_Ant1\_2440



BLE\_1M\_Ant1\_2480



BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_2M\_Ant1\_2402



BLE\_2M\_Ant1\_2440



BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_2M\_Ant1\_2480



BLE\_500K\_Ant1\_2402



BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_500K\_Ant1\_2440




BLE\_500K\_Ant1\_2480

## Appendix C: Maximum conducted output power & E.I.R.P.


### Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Antenna Gain(dBi)	EIRP [dBm]	EIRP Limit [dBm]	Verdict
BLE_125K	Ant1	2402	4.66	<=30	1.4	6.06	36.02	PASS
		2440	5.33	<=30	1.4	6.73	36.02	PASS
		2480	6.52	<=30	1.4	7.92	36.02	PASS
BLE_1M	Ant1	2402	4.69	<=30	1.4	6.09	36.02	PASS
		2440	5.32	<=30	1.4	6.72	36.02	PASS
		2480	6.54	<=30	1.4	7.94	36.02	PASS
BLE_2M	Ant1	2402	4.72	<=30	1.4	6.12	36.02	PASS
		2440	5.37	<=30	1.4	6.77	36.02	PASS
		2480	6.56	<=30	1.4	7.96	36.02	PASS
BLE_500K	Ant1	2402	4.68	<=30	1.4	6.08	36.02	PASS
		2440	5.33	<=30	1.4	6.73	36.02	PASS
		2480	6.54	<=30	1.4	7.94	36.02	PASS

### Test Graphs

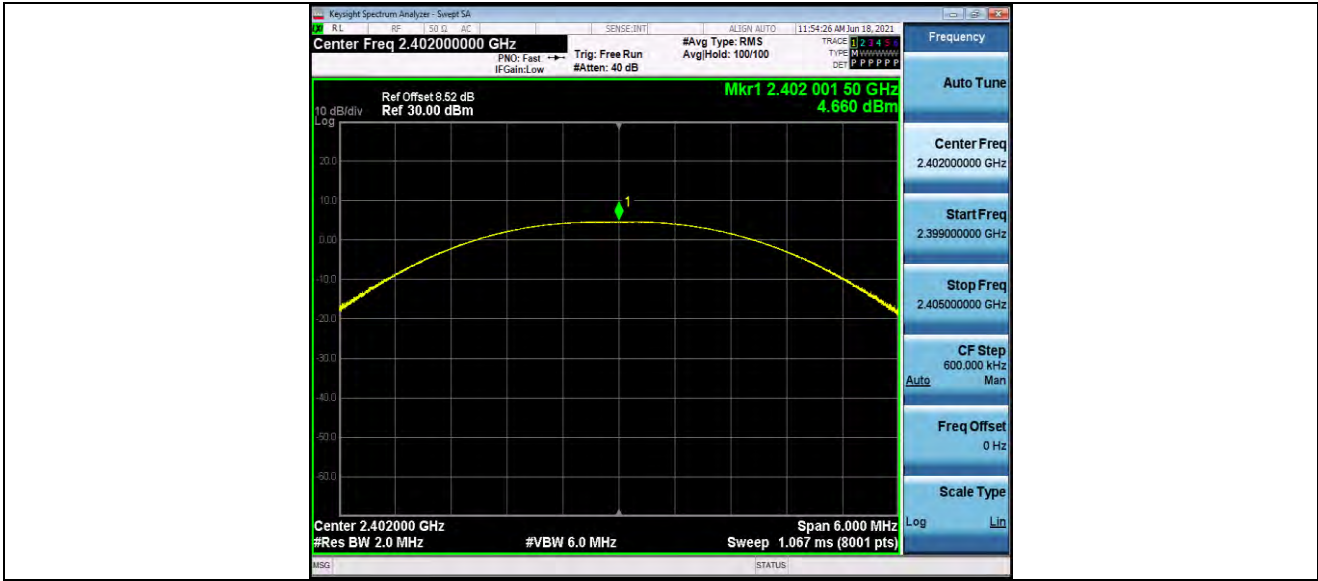

BLE\_125K\_Ant1\_2402

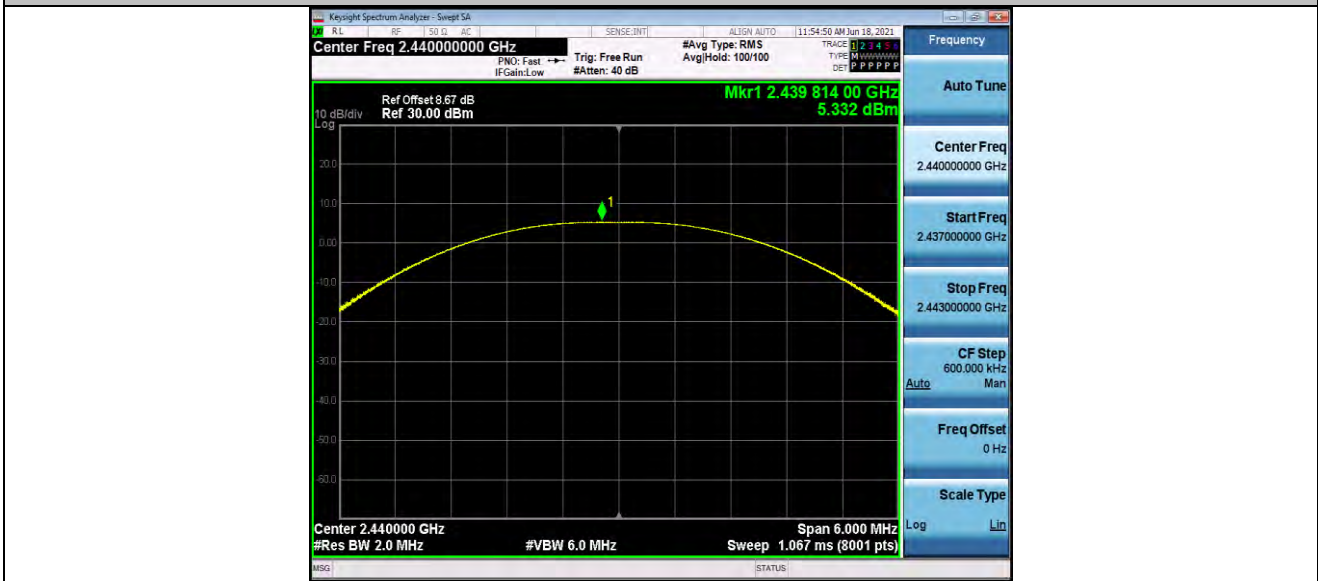


BLE\_125K\_Ant1\_2440



BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5

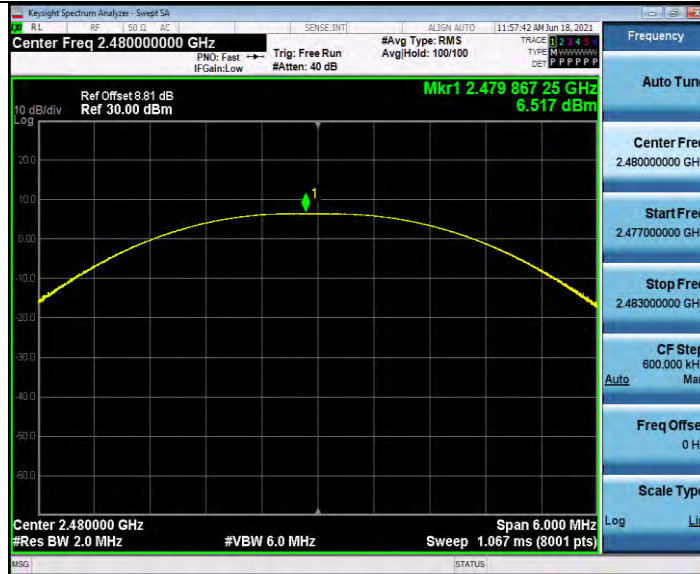

BLE\_125K\_Ant1\_2480



BLE\_1M\_Ant1\_2402






BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_1M\_Ant1\_2440

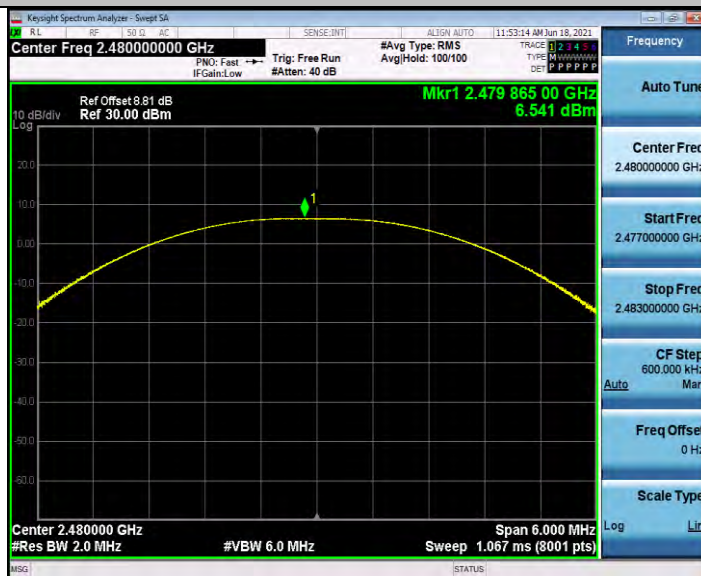


BLE\_1M\_Ant1\_2480



BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5

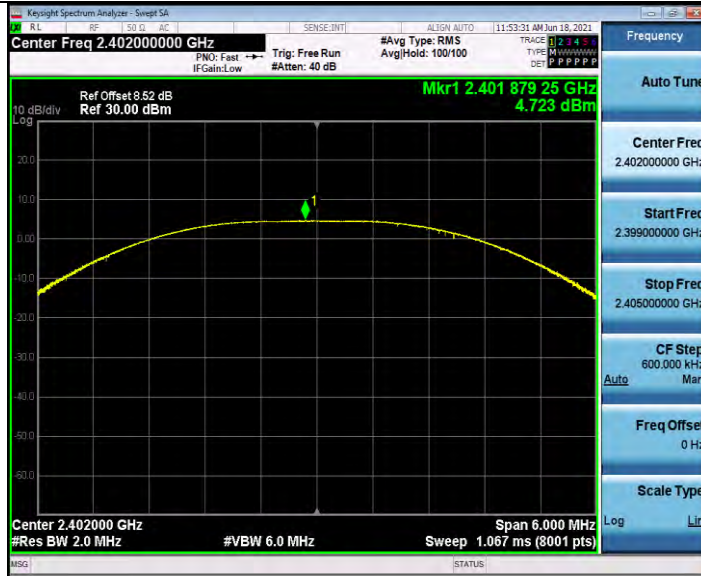

BLE\_2M\_Ant1\_2402



BLE\_2M\_Ant1\_2440



BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_2M\_Ant1\_2480




BLE\_500K\_Ant1\_2402




BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5

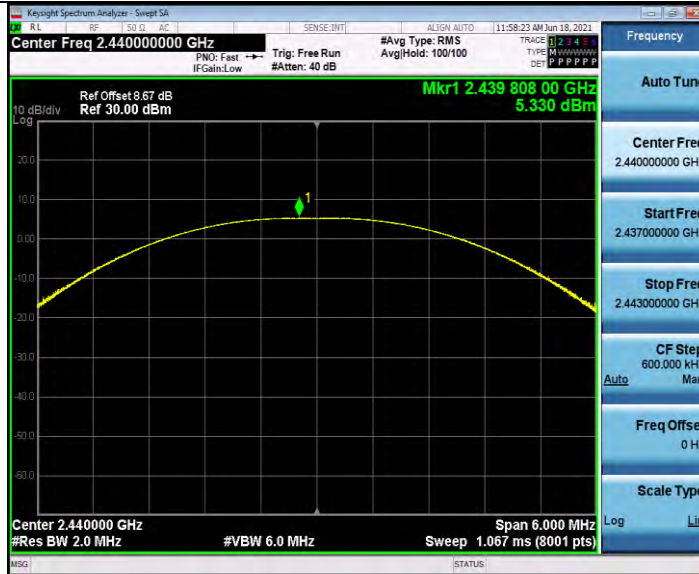

BLE\_500K\_Ant1\_2440

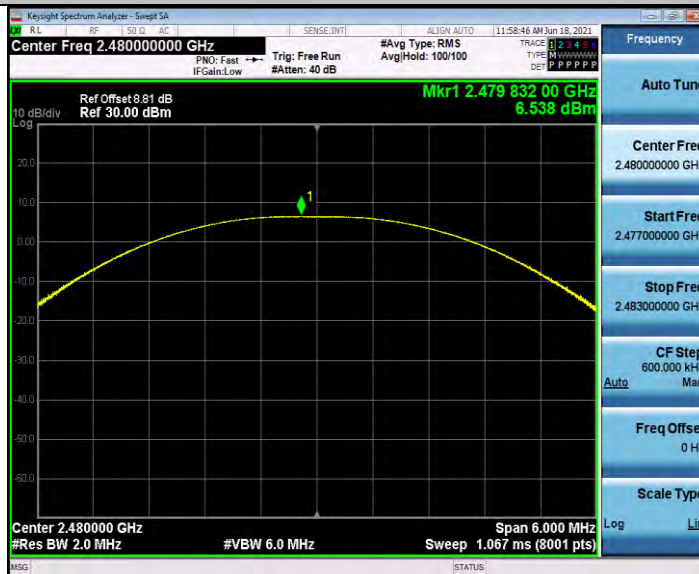

BLE\_500K\_Ant1\_2480

## Appendix D: Maximum power spectral density

### Test Result

TestMode	Antenna	Channel	Result[dBm/10kHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_125K	Ant1	2402	0	-5.23	<=8	PASS
		2440	-0.82	-6.05	<=8	PASS
		2480	1.87	-3.36	<=8	PASS
BLE_1M	Ant1	2402	-5.77	-11	<=8	PASS
		2440	-5.04	-10.27	<=8	PASS
		2480	-3.85	-9.08	<=8	PASS
BLE_2M	Ant1	2402	-6.82	-12.05	<=8	PASS
		2440	-6.15	-11.38	<=8	PASS
		2480	-4.93	-10.16	<=8	PASS
BLE_500K	Ant1	2402	-1.35	-6.58	<=8	PASS
		2440	-0.71	-5.94	<=8	PASS
		2480	0.59	-4.64	<=8	PASS

Note: Result[dBm/3kHz]= Result[dBm/10kHz]-10log(10/3)

### Test Graphs



BLE\_125K\_Ant1\_2402



BLE\_125K\_Ant1\_2440



BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_125K\_Ant1\_2480



BLE\_1M\_Ant1\_2402



BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_1M\_Ant1\_2440



BLE\_1M\_Ant1\_2480





BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_2M\_Ant1\_2402



BLE\_2M\_Ant1\_2440



BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_2M\_Ant1\_2480



BLE\_500K\_Ant1\_2402



BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_500K\_Ant1\_2440




BLE\_500K\_Ant1\_2480

## Appendix E: Band edge measurements


### Test Result

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_125K	Ant1	Low	2402	4.37	-45.95	<=-15.63	PASS
		High	2480	4.22	-44.46	<=-15.78	PASS
BLE_1M	Ant1	Low	2402	5.71	-45.34	<=-14.29	PASS
		High	2480	7.52	-44.74	<=-12.48	PASS
BLE_2M	Ant1	Low	2402	5.75	-42.58	<=-14.25	PASS
		High	2480	7.66	-45.06	<=-12.34	PASS
BLE_500K	Ant1	Low	2402	5.50	-45.64	<=-14.5	PASS
		High	2480	7.51	-45.44	<=-12.49	PASS

### Test Graphs

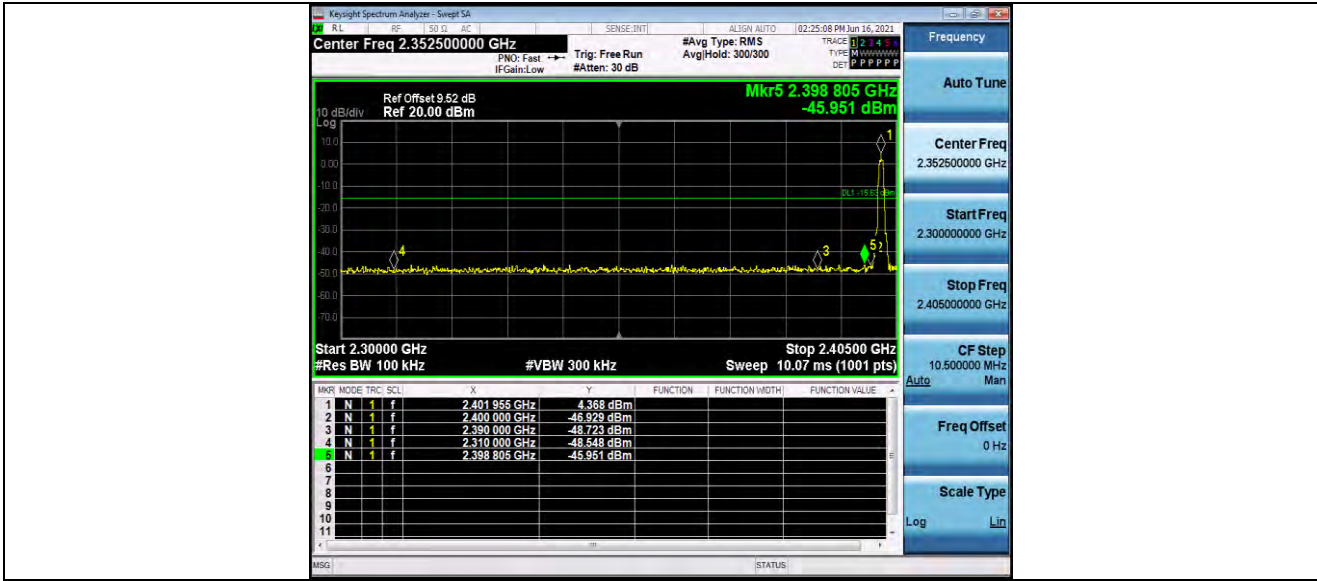

BLE\_125K\_Ant1\_Low\_2402

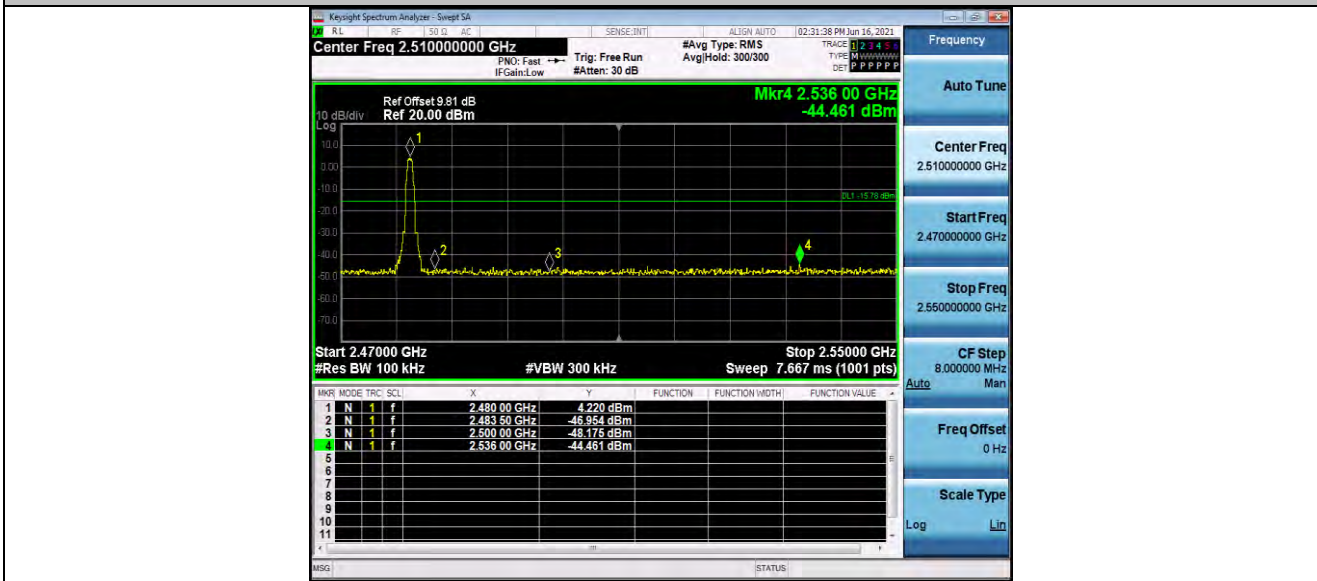


BLE\_125K\_Ant1\_High\_2480




BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5

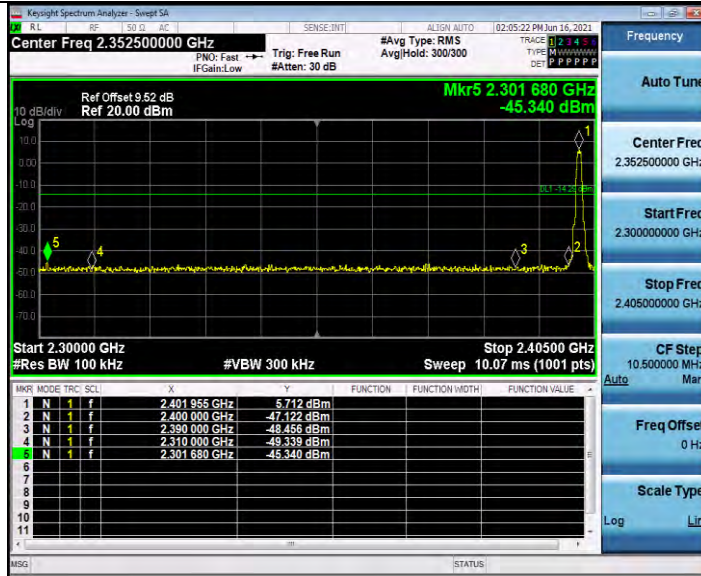

BLE\_1M\_Ant1\_Low\_2402

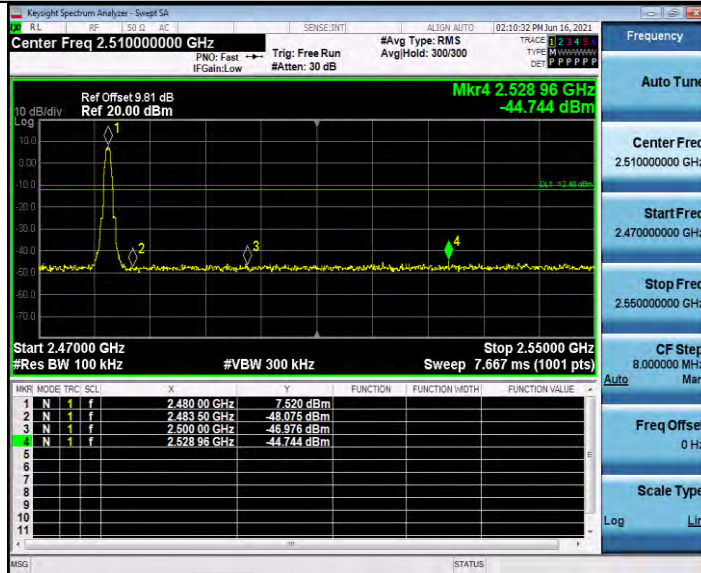


BLE\_1M\_Ant1\_High\_2480




BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5

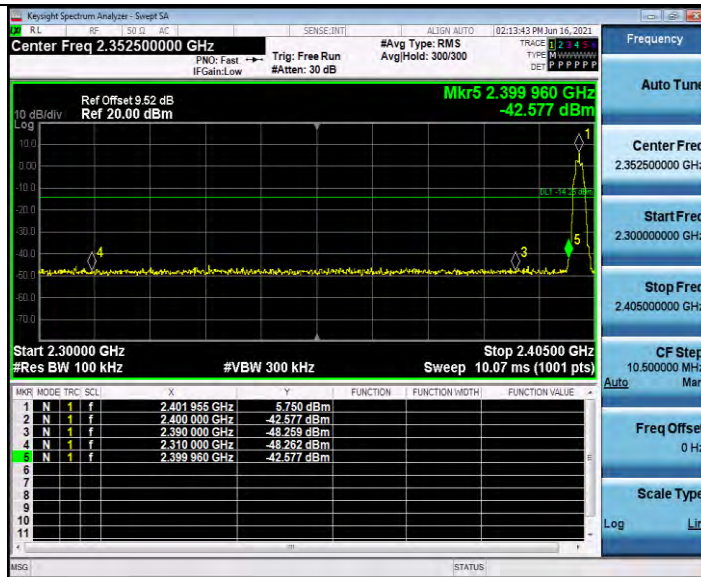

BLE\_2M\_Ant1\_Low\_2402

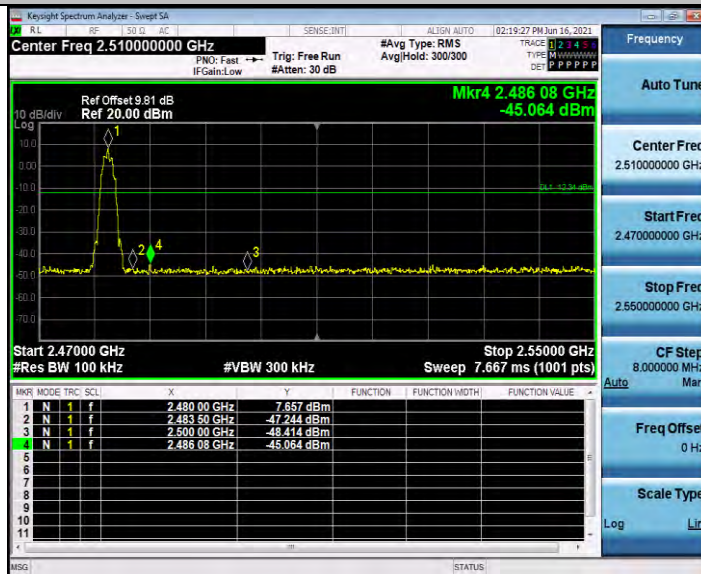


BLE\_2M\_Ant1\_High\_2480




BUREAU VERITAS

# Test Report No.: RFBGDJ-W7L-P21060011-5

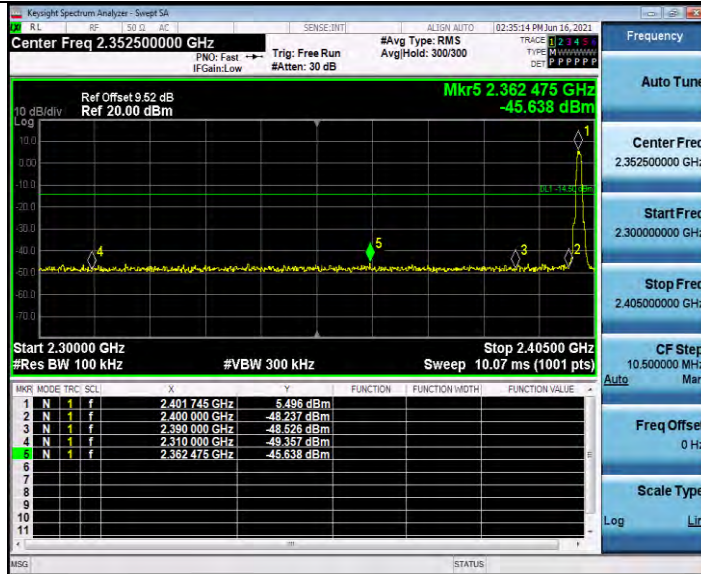

BLE\_500K\_Ant1\_Low\_2402

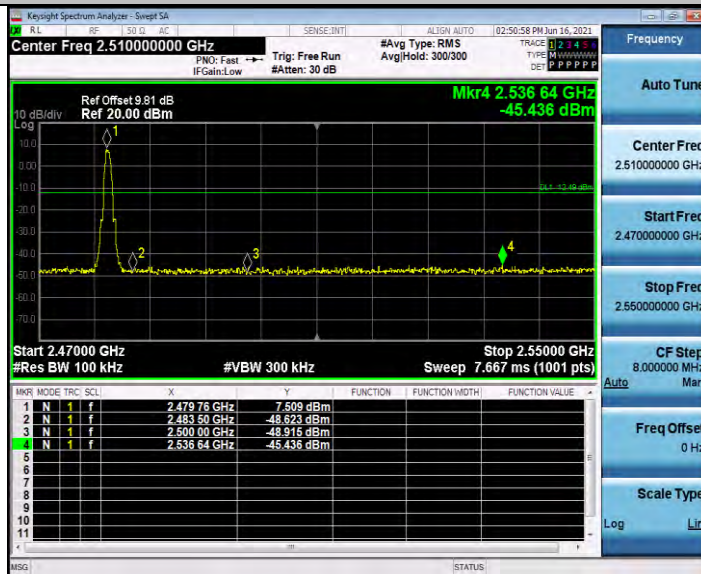

BLE\_500K\_Ant1\_High\_2480



## Appendix F: Conducted Spurious Emission

### Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_125K	Ant1	2402	Reference	2.24	2.24	---	PASS
			30~1000	2.24	-56.35	<=-17.76	PASS
			1000~26500	2.24	-36.87	<=-17.76	PASS
		2440	Reference	3.81	3.81	---	PASS
			30~1000	3.81	-55.95	<=-16.19	PASS
			1000~26500	3.81	-36.28	<=-16.19	PASS
		2480	Reference	5.03	5.03	---	PASS
			30~1000	5.03	-56.18	<=-14.97	PASS
			1000~26500	5.03	-36.59	<=-14.97	PASS
BLE_1M	Ant1	2402	Reference	5.59	5.59	---	PASS
			30~1000	5.59	-56.46	<=-14.41	PASS
			1000~26500	5.59	-36.9	<=-14.41	PASS
		2440	Reference	6.21	6.21	---	PASS
			30~1000	6.21	-55.97	<=-13.79	PASS
			1000~26500	6.21	-37.11	<=-13.79	PASS
		2480	Reference	7.38	7.38	---	PASS
			30~1000	7.38	-55.72	<=-12.62	PASS
			1000~26500	7.38	-36.36	<=-12.62	PASS
BLE_2M	Ant1	2402	Reference	5.39	5.39	---	PASS
			30~1000	5.39	-56.33	<=-14.61	PASS
			1000~26500	5.39	-37.1	<=-14.61	PASS
		2440	Reference	5.95	5.95	---	PASS
			30~1000	5.95	-56.55	<=-14.06	PASS
			1000~26500	5.95	-36.76	<=-14.06	PASS
		2480	Reference	7.21	7.21	---	PASS
			30~1000	7.21	-55.8	<=-12.79	PASS
			1000~26500	7.21	-35.05	<=-12.79	PASS
BLE_500K	Ant1	2402	Reference	5.08	5.08	---	PASS
			30~1000	5.08	-56.55	<=-14.92	PASS
			1000~26500	5.08	-36.42	<=-14.92	PASS



BUREAU  
VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5

		2440	Reference	5.53	5.53	---	PASS
			30~1000	5.53	-55.8	<=-14.47	PASS
			1000~26500	5.53	-36.92	<=-14.47	PASS
		2480	Reference	7.49	7.49	---	PASS
			30~1000	7.49	-55.94	<=-12.52	PASS
			1000~26500	7.49	-37.06	<=-12.52	PASS

### Test Graphs





BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_125K\_Ant1\_2402\_1000~26500




BLE\_125K\_Ant1\_2440\_0~Reference



BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5

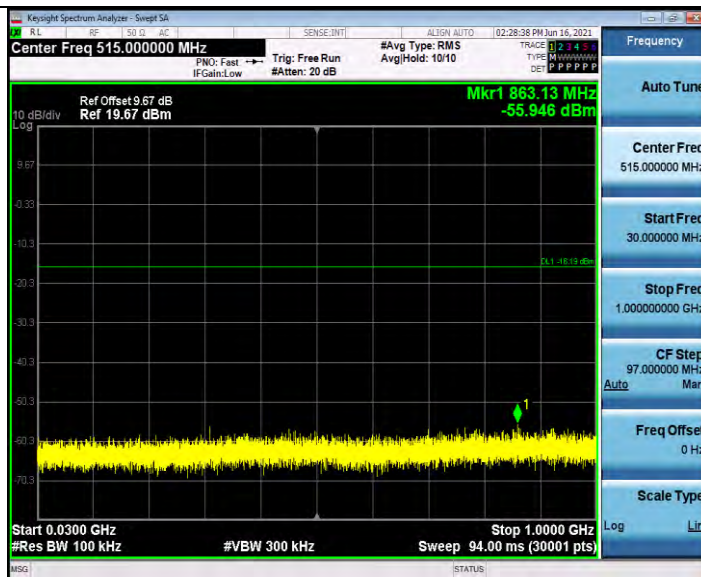

BLE\_125K\_Ant1\_2440\_30~1000



BLE\_125K\_Ant1\_2440\_1000~26500




BUREAU VERITAS

Test Report No.: RFBGDJ-W7L-P21060011-5



BLE\_125K\_Ant1\_2480\_0~Reference

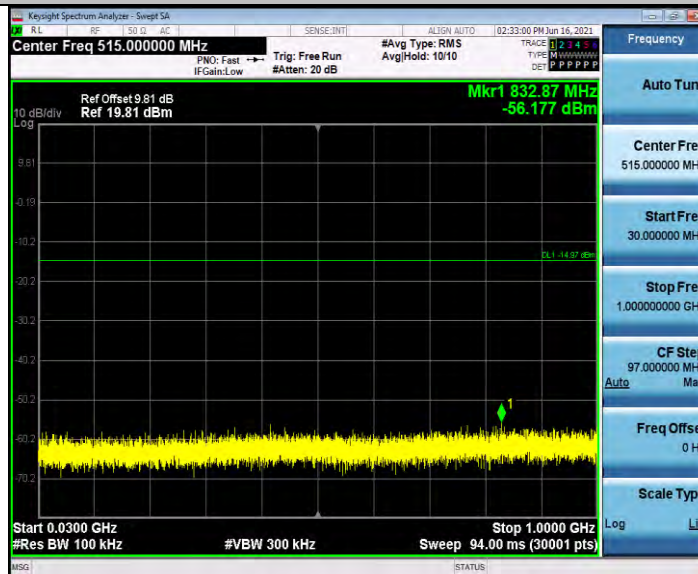

BLE\_125K\_Ant1\_2480\_30~1000