



# HAC TEST REPORT

**Applicant** Honeywell International Inc  
**FCC ID** HD5-EDA5S1  
**Product** Mobile Computer  
**Brand** Honeywell  
**Model** EDA5S-1  
**Report No.** R2201A0001-H2  
**Issue Date** July 18, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **ANSI C63.19-2011**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Wei Fangying*

*Fan Guangchang*

Prepared by: Wei Fangying    Approved by: Fan Guangchang

## TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## Table of Contents

1	Test Laboratory.....	3
1.1	Notes of the Test Report.....	3
<b>1.2.</b>	<b>Test facility</b> .....	<b>3</b>
1.2	Testing Location.....	3
1.3	Laboratory Environment.....	4
2	Statement of Compliance.....	5
3	Description of Equipment under Test.....	6
4	Test Specification and Operational Conditions.....	9
4.1	Test Specification.....	9
5	Test Information.....	10
5.1	Operational Conditions during Test.....	10
5.1.1	General Description of Test Procedures.....	10
5.2	T-Coil Measurements System Configuration.....	10
5.2.1	T-coil Measurement Set-up.....	10
5.2.2	AM1D Probe.....	13
5.2.3	Audio Magnetic Measurement Instrument (AMMI).....	14
5.2.4	Helmholtz Calibration Coil (AMCC).....	15
5.2.5	Test Arch Phantom & Phone Positioner.....	15
5.3	T-Coil measurement points and reference plane.....	16
5.4	T-Coil Test Procedures.....	17
6	T-Coil Performance Requirements.....	19
6.1	T-Coil coupling field intensity.....	19
6.2	Frequency response.....	19
6.3	Signal quality.....	20
7	T-Coil testing for WCDMA.....	21
8	T-Coil testing for VoLTE.....	22
9	T-Coil testing for VoWIFI.....	24
10	T-Coil testing for OTT.....	26
11	Summary Test Results.....	29
12	Measurement Uncertainty.....	39
13	Main Test Instruments.....	40
	ANNEX A: Test Layout.....	41
	ANNEX B: Graph Results.....	42
	ANNEX C: Probe Calibration Certificate.....	242
	ANNEX D: DAE4 Calibration Certificate.....	245
	ANNEX E: The EUT Appearances and Test Configuration.....	250



# 1 Test Laboratory

## 1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd**. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

## 1.2. Test facility

### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

## 1.2 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: Building 3, No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Fan Guangchang  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [fanguangchang@ta-shanghai.com](mailto:fanguangchang@ta-shanghai.com)



### 1.3 Laboratory Environment

Temperature	Min. = 18°C, Max. = 28 °C
Relative humidity	Min. = 0%, Max. = 80%
Ground system resistance	< 0.5 $\Omega$
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

## 2 Statement of Compliance

Table 2.1: T-Coil signal quality categories of each tested Mode

Band	Category
GSM 850	T3
GSM 1900	T3
WCDMA Band II	T3
WCDMA Band IV	T3
WCDMA Band V	T3
LTE FDD 2	T3
LTE FDD 4	T3
LTE FDD 5	T3
LTE FDD 7	T3
LTE FDD 12	T3
LTE FDD 13	T3
LTE FDD 17	T3
LTE FDD 19	T3
LTE FDD 25	T3
LTE FDD 26	T3
LTE FDD 30	T3
LTE TDD 38	T3
LTE TDD 40	T3
LTE TDD 41	T3
LTE FDD 66	T3
Wi-Fi 2.4G	T3
Wi-Fi 5G(U-NII-1)	T3
Wi-Fi 5G(U-NII-3)	T3
<b>The Total T-Coil rating is T3</b>	
Date of Testing: March 4, 2022 ~ July 9, 2022	
Date of Sample Receiving: December 30, 2021	
Note: LTE and Wi-Fi mode do not support voice function. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.	

### 3 Description of Equipment under Test

#### Client Information

<b>Applicant</b>	Honeywell International Inc
<b>Applicant address</b>	9680 Old Bailes Road, Fort Mill, SC 29707 United States
<b>Manufacturer</b>	Honeywell International Inc
<b>Manufacturer address</b>	9680 Old Bailes Road, Fort Mill, SC 29707 United States

#### General Technologies

<b>Device Type:</b>	Portable Device	
<b>EUT Stage</b>	Production Unit	
<b>Model</b>	EDA5S-1	
<b>IMEI:</b>	IMEI 1: 990018450008408 IMEI 2: 990018450008416	
<b>Hardware Version</b>	EDA52_MB	
<b>Software Version</b>	OS.11.001	
<b>Antenna Type</b>	Internal Antenna	
<b>Power Class:</b>	GSM 850: 4 GSM 1900: 1 WCDMA Band II/IV/V: 3 LTE FDD 2/4/5/7/12/13/17/19/25/26/30/66:3 LTE TDD 38/40/41:3	
<b>Power Level</b>	GSM 850: level 5 GSM 1900: level 0 WCDMA Band II/IV/V: All up bits LTE FDD 2/4/5/7/12/13/17/19/25/26/30/66: max power LTE TDD 38/40/41: max power	
<b>Test Modulation:</b>	(GSM)GMSK, 8PSK (WCDMA) QPSK, 16QAM; (LTE) QPSK, 16QAM, 64QAM;	
<b>Operating Frequency Range(s):</b>	<b>Mode</b>	<b>Tx (MHz)</b>
	GSM 850	824 ~ 849
	GSM 1900	1850 ~ 1910
	WCDMA Band II	1850 ~ 1910
	WCDMA Band IV	1710 ~ 1755
	WCDMA Band V	824 ~ 849
	LTE FDD 2	1850 ~ 1910
	LTE FDD 4	1710 ~ 1755
	LTE FDD 5	824 ~ 849
	LTE FDD 7	2500 ~ 2570
LTE FDD 12	699 ~ 716	



	LTE FDD 13	777 ~ 787
	LTE FDD 17	704 ~ 716
	LTE FDD 19	875 ~ 890
	LTE FDD 25	1850 ~ 1915
	LTE FDD 26	814 ~ 849
	LTE FDD 30	2305 ~ 2315
	LTE TDD 38	2570 ~ 2620
	LTE TDD 40	2300 ~ 2400
	LTE TDD 41	2555 ~ 2655
	LTE FDD 66	1710 ~ 1780
	Wi-Fi 2.4G	2412 ~ 2462
	Wi-Fi 5G(U-NII-1)	5150 ~ 5250
	Wi-Fi 5G(U-NII-3)	5725 ~ 5850
	BT	2402 ~ 2480
<b>Accessory Equipment</b>		
<b>Battery</b>	Manufacturer: Scud (Fujian) Electronics Co., Ltd. Model: BAT-EDA5S	
Note: The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.		



Air-Interface	Band (MHz)	Type	ANSI C63.19 tested	Simultaneous Transmissions	Voice over Digital Transport OTT Capability	Name of Voice Service	Power Reduction
GSM	850	VO	Yes	Yes BT or Wi-Fi	Yes	Google Duo	No
	1900						
	GPRS/EGPRS	DT	No		No		
WCDMA	Band II	VO	Yes	Yes BT or Wi-Fi	Yes	Google Duo	No
	Band IV						
	Band V						
	HSPA	DT	No		No		
LTE	Band 2	VD	Yes	Yes BT or Wi-Fi	Yes	VoLTE Google Duo	No
	Band 4						
	Band 5						
	Band 7						
	Band 12						
	Band 13						
	Band 17						
	Band 19						
	Band 25						
	Band 26						
	Band 30						
	Band 38						
	Band 40						
Band 41							
Band 66							
Wi-Fi	2450	VD	Yes	Yes GSM, WCDMA, LTE	Yes	VoWi-Fi Google Duo	No
	5200 (U-NII-1)						
	5800 (U-NII-3)						
Bluetooth (BT)	2450	DT	No	Yes GSM, WCDMA, LTE	N/A	NA	No
VO= legacy Cellular Voice Service from Table 7.1 in 7.4.2.1 of ANSI C63.19-2011 VD= IP voice service over digital transport. DT= Digital Transport only (no voice)							





## 4 Test Specification and Operational Conditions

### 4.1 Test Specification

The tests documented in this report were performed in accordance with the following:

**FCC CFR47 Part 20.19**

**ANSI C63.19-2011**

**KDB 285076 D01 HAC Guidance v06**

**KDB 285076 D02 T-Coil testing for CMRS IP v04**

## 5 Test Information

### 5.1 Operational Conditions during Test

#### 5.1.1 General Description of Test Procedures


The phone was tested in all normal configurations for the ear use. The EUT is mounted in the device holder equivalent as for classic dosimeter measurements. The acoustic output of the EUT shall coincide with the center point of the area formed by the dielectric wire and the middle bar of the arch's top frame. The EUT shall be moved vertically upwards until it touches the frame. The fine adjustment is possible by sliding the complete EUT holder on the yellow base plate of the Test Arch phantom. During the test, the EUT is selected on T-Coil mode, the LCD backlight is turned off and volume is adjusted to maximum level.

A communication link is set up with a System Simulator (SS) by RF cable, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to Ch Middle respectively in the case of Band. T-Coil configurations is measured using System Simulator (SS) of CMU200/ CMW 500, at the same time the EUT shall be operated at its maximum RF output power setting.

### 5.2 T-Coil Measurements System Configuration

#### 5.2.1 T-coil Measurement Set-up

These measurements are performed using the DASY5 automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Stäubli), robot controller, Intel Core computer, near-field probe, probe alignment sensor. The robot is a six-axis industrial robot performing precise movements. Cell controller systems contain the power supply, robot controller, teach pendant (Joystick) and remote control, and are used to drive the robot motors. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification; signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

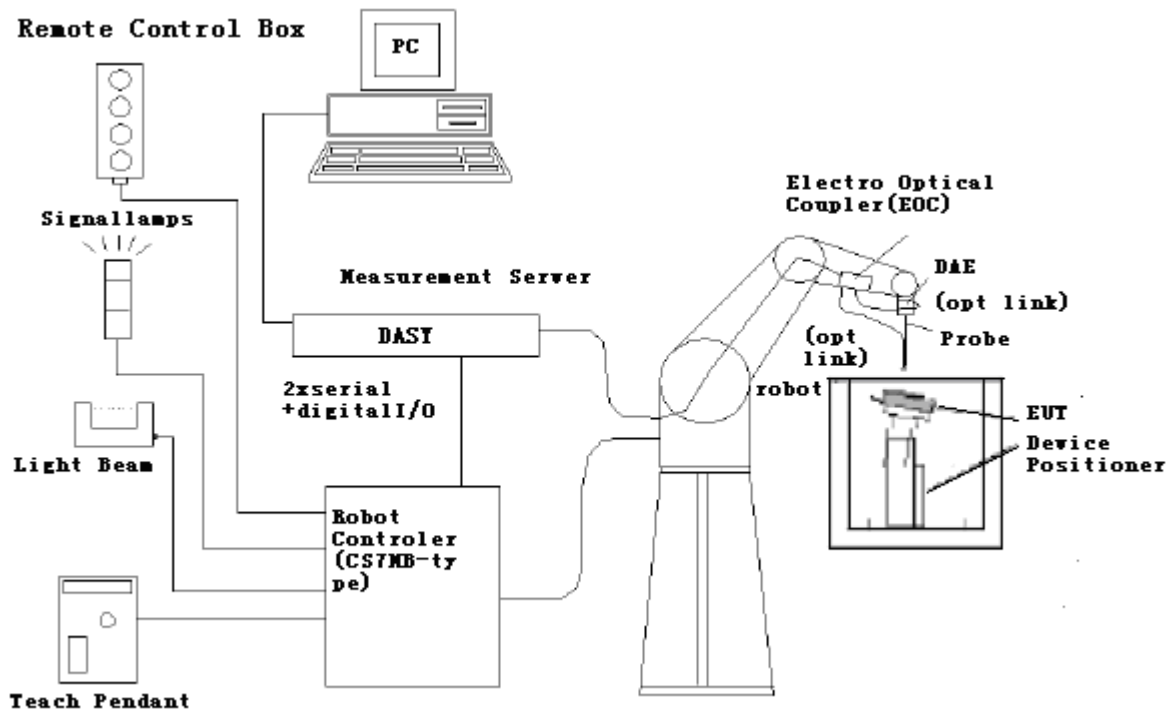

**Figure 1 T-Coil Test Measurement Set-up**

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

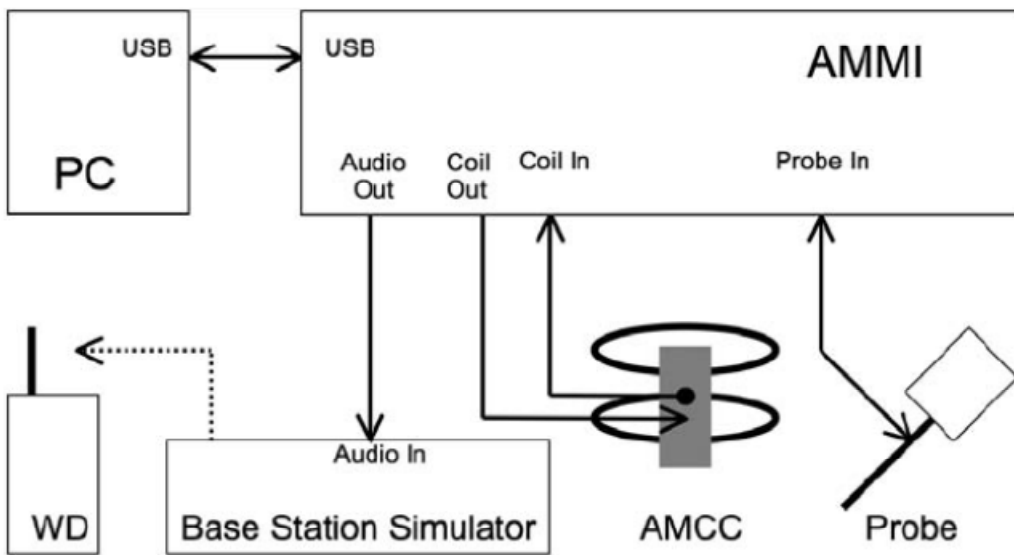


Figure 2 T-Coil Test Measurement Set-up

### 5.2.2 AM1D Probe

The AM1D probe is an active probe with a single sensor. It is fully RF-shielded and has a rounded tip 6mm in diameter incorporating a pickup coil with its center offset 3mm from the tip and the sides. The symmetric signal preamplifier in the probe is fed via the shielded symmetric output cable from the AMMI with a 48V “phantom” voltage supply. The 7-pin connector on the back in the axis of the probe does not carry any signals. It is mounted to the DAE for the correct orientation of the sensor. If the probe axis is tilted 54.7 degree from the vertical, the sensor is approximately vertical when the signal connector is at the underside of the probe (cable hanging downwards).

#### Specification

frequency range	0.1 - 20 kHz (RF sensitivity <-100 dB, fully RF shielded)
sensitivity	<-50 dB A/m @ 1 kHz
pre-amplifier	40 dB, symmetric
dimensions	tip diameter / length: 6 / 290 mm, sensor according to ANSI-C63.19



Figure 3 AM1D Probe

### 5.2.3 Audio Magnetic Measurement Instrument (AMMI)

The Audio Magnetic Measuring Instrument (AMMI) is a desktop 19-inch unit containing a sampling unit, a waveform generator for test and calibration signals, and a USB interface.



Figure 4 AMMI front panel

Port description:

<b>Audio Out</b>	BNC, audio signal to the base station simulator, for >500Ohm load
<b>Coil Out</b>	BNC, test and calibration signal to the AMCC (top connector), for 50Ohm load
<b>Coil In</b>	XLR, monitor signal from the AMCC BNO connector, 600 Ohm
<b>Probe In</b>	XLR, probe signal and phantom supply to the probe Lemo connector



Figure 5 AMMI rear side

<b>Sampling rate</b>	48 kHz / 24 bit
<b>Dynamic range</b>	85 dB
<b>Test signal generation</b>	User selectable and predefined (vis PC)
<b>Calibration</b>	Auto-calibration / full system calibration using AMCC with monitor output
<b>Dimensions</b>	482 x 65 x 270 mm

### 5.2.4 Helmholtz Calibration Coil (AMCC)

The Audio Magnetic Calibration coil is a Helmholtz Coil designed for calibration of the AM1D probe. The two horizontal coils generate a homogeneous magnetic field in the z direction. The DC input resistance is adjusted by a series resistor to approximately 50Ohm, and a shunt resistor of 100hm permits monitoring the current with a scale of 1:10

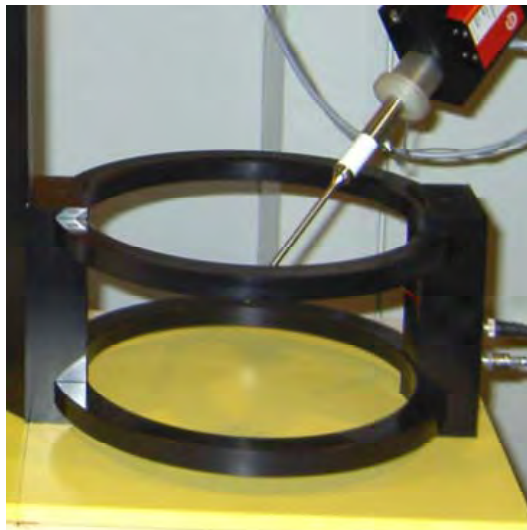


Figure 6 AMCC

Port description:

Signal	Connector	Resistance
Coil In	BNC	Typically 50Ohm
Coil Monitor	BNO	100hm ± 1% (100mV corresponding to 1 A/m)

Specification:

<b>Dimensions</b>	370 x 370 x 196 mm, according to ANSI-C63.19
-------------------	--

### 5.2.5 Test Arch Phantom & Phone Positioner

The Test Arch phantom should be positioned horizontally on a stable surface. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. It enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot (Dimensions: 370 x 370 x 370 mm).

The Device reference point is set for the EUT at 6.3 mm, the Grid reference point is on the upper surface at the origin of the coordinates, and the “user point \Height Check 0.5 mm” is 0.5mm above the center, allowing verification of the gap of 0.5mm while the probe is positioned there.

The Phone Positioner supports accurate and reliable positioning of any phone with effect on near field <math>\leq \pm 0.5 \text{ dB}</math>.





**Figure 7 T-coil Phantom & Device Holder**


### 5.3 T-Coil measurement points and reference plane

The following figure illustrates the standard probe orientations. Position 1 is the perpendicular orientation of the probe coil; orientation 2 is the transverse orientation. The space between the measurement positions is not fixed. It is recommended that a scan of the WD be performed for each probe coil orientation and that the maximum level recorded be used as the reading for that orientation of the probe coil.

- 1) The reference plane is the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.
- 2) The measurement plane is parallel to, and 10 mm in front of, the reference plane.
- 3) The reference axis is normal to the reference plane and passes through the center of the receiver speaker section (or the center of the hole array); or may be centered on a secondary inductive source. The actual location of the measurement point shall be noted in the test report as the measurement reference point.
- 4) The measurement points may be located where the axial and radial field intensity measurements are optimum with regard to the requirements. However, the measurement points should be near the acoustic output of the EUT and shall be located in the same half of the phone as the EUT receiver. In a EUT handset with a centered receiver and a circularly symmetrical magnetic field, the measurement axis and the reference axis would coincide.



- 5) The relative spacing of each measurement orientation is not fixed. The axial and two radial orientations should be chosen to select the optimal position.
- 6) The measurement point for the axial position is located 10 mm from the reference plane on the measurement axis.
- 7) The actual location of the measurement point shall be noted in test reports and designated as the measurement reference point.

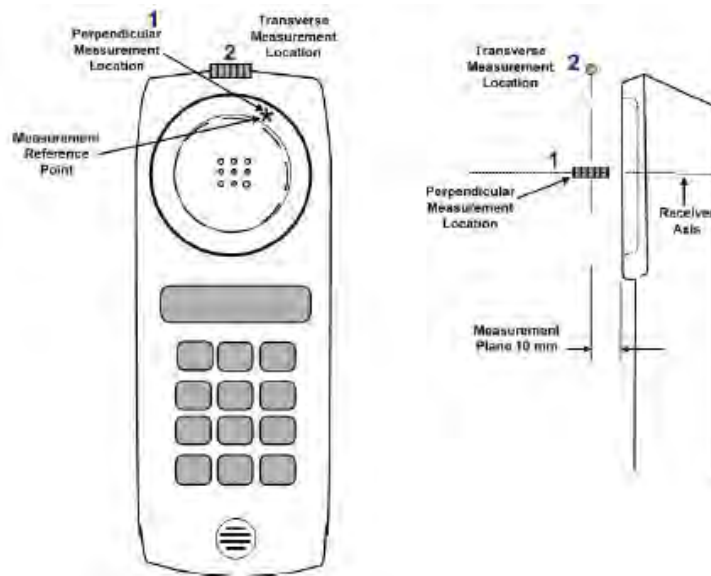

**Figure 8 Axis and planes for EUT audio frequency magnetic field measurements**

#### 5.4 T-Coil Test Procedures

**The following illustrate a typical test scan over a wireless communications device:**

- 1) Geometry and signal check: system probe alignment, proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the test Arch.
- 2) Set the reference drive level of signal voice defined in C63.19 per 7.4.2.1.
- 3) The ambient and test system background noise (dB A/m) was measured as well as ABM2 over the full measurement. The maximum noise level must be at least 10dB below the limit of C63.19 per 8.3.2.
- 4) The EUT was positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
- 5) The EUT operation for maximum rated RF output power was configured and connected by using of coaxial cable connection to the base station simulator at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The EUT audio output was positioned tangent (as physically possible) to the measurement plane.
- 6) The EUT's RF emission field was eliminated from T-coil results by using a well RF-shielding of the probe, AM1D, and by using of coaxial cable connection to a Base Station Simulator. One test channel was pre-measurement to avoid this possibility.
- 7) Determined the optimal measurement locations for the EUT by following the three steps, coarse



resolution scan, fine resolution scans, and point measurement, as described in C63.19 per 7.4.4.2. At each measurement locations, samples in the measurement window duration were evaluated to get ABM1 and the signal spectrum. The noise measurement was performed after the scan with the signal, the same happened, just with the voice signal switched off. The ABM2 was calculated from this second scan.

8) All results resulting from a measurement point in a T-Coil job were calculated from the signal samples during this window interval. ABM values were averaged over the sequence of there samples.

9) At an optimal point measurement, the SNR (ABM1/ABM2) was calculated for axial,radial transverse and radial longitudinal orientation, and the frequency response was measured in axial axis.

10) Corrected for the frequency response after the EUT measurement since the DASY5 system had known the spectrum of the input signal by using a reference job.

11) In SEMCAD postprocessing, the spectral points are in addition scaled with the high-pass (half-band) and the A-weighting, bandwidth compensated factor (BWC) and those results are final as shown in this report.

## 6 T-Coil Performance Requirements


In order to be rated for T-Coil use, a EUT shall meet the requirements for signal level and signal quality contained in this part.

### 6.1 T-Coil coupling field intensity

When measured as specified in ANSI C63.19, the T-Coil signal shall be  $\geq -18$  dB (A/m) at 1 kHz, in a 1/3 octave band filter for all orientations.


### 6.2 Frequency response

The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz. The following figures provide the boundaries for the specified frequency. These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

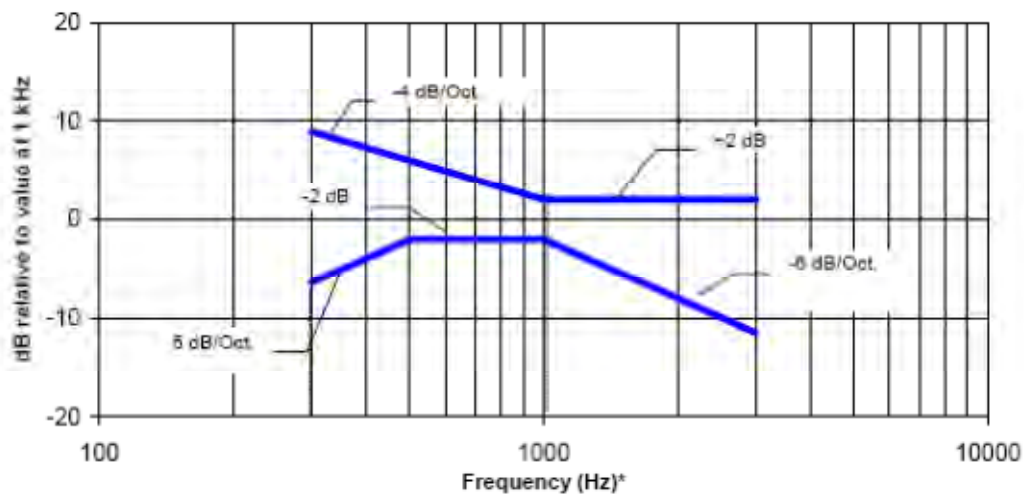

NOTE—Frequency response is between 300 Hz and 3000 Hz.

Figure 9 Magnetic field frequency response for EUTs with a field  $\leq -15$  dB (A/m) at 1 kHz

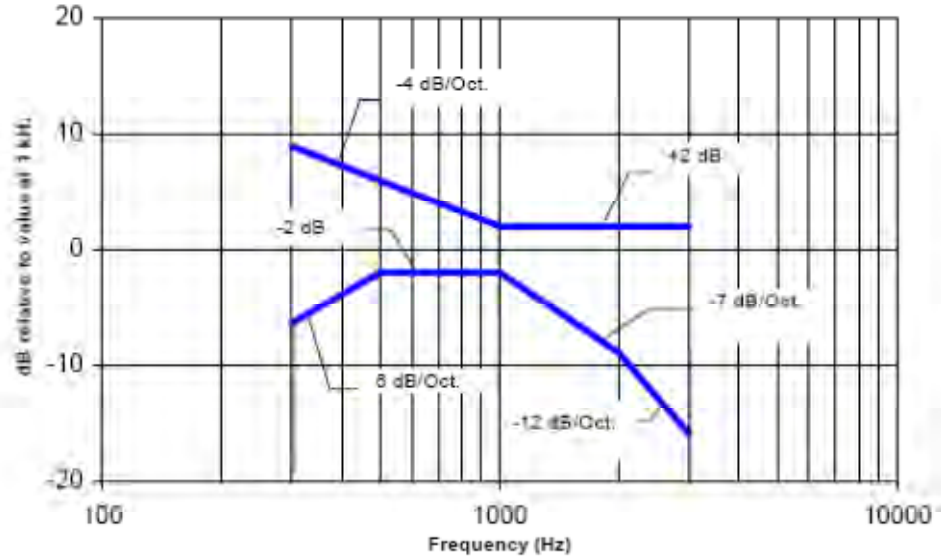

NOTE—Frequency response is between 300 Hz and 3000 Hz.

**Figure 10 Magnetic field frequency response for EUTs with a field that exceeds  $-15$  dB(A/m) at 1 kHz**

### 6.3 Signal quality

This part provides the signal quality requirement for the intended T-Coil signal from a EUT. Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. So, the only criteria that can be measured is the RF immunity in T-Coil mode. This is measured using the same procedure as for the audio coupling mode and at the same levels.

The worst signal quality of the two T-Coil signal measurements shall be used to determine the T-Coil mode category per Table 1

**Table 1: T-Coil signal quality categories**

Category	Telephone parameters WD signal quality [(signal + noise) – to – noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

## 7 T-Coil testing for WCDMA

### 1. Codec investigation

An investigation was performed to determine the audio codec to be used for testing by SNR comparison. The AMR 12.2kbps setting was used for the testing as the worst-case codec.

Codec Investigation - WCDMA									
Codec Setting	AMR -NB			AMR -WB			Orientation	Band	Channel
	AMR 12.2kbps	AMR 7.4kbps	AMR 4.75kbps	AMR 23.85kbps	AMR 15.85kbps	AMR 6.6kbps			
ABM1 (dBA/m)	-6.46	-6.62	-6.76	-6.48	-6.5	-7.11	z (Axial):	Band II	9400
ABM2 (dBA/m)	-47.77	-48.08	-48.3	-49.04	-48.39	-49.03			
Frequency Response	Pass	Pass	Pass	Pass	Pass	Pass			
Signal Quality (dB)	<b>41.31</b>	41.46	41.54	42.56	41.89	41.92			

### 2. Air Interface Investigation


Using the worst case codec to test low/middle/high channels in each band.

## 8 T-Coil testing for VoLTE

### I. Test setup for VoLTE over IMS T-coil Testing

#### 1. Test setup

The general test setup used for VoLTE over IMS is shown below. The call box used when performing VoLTE over IMS T-coil measurement is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

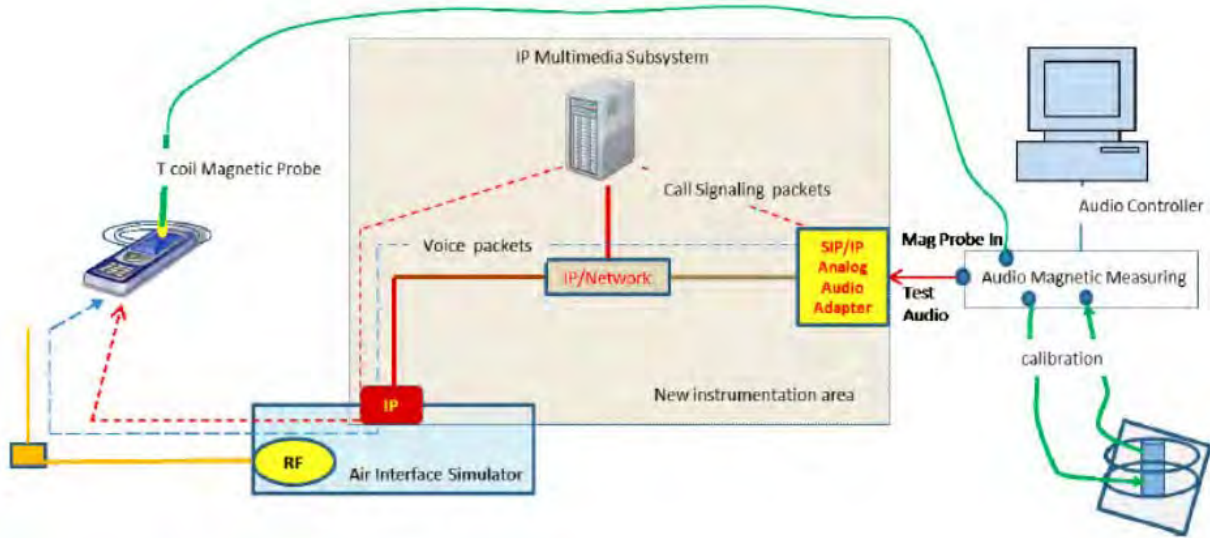

#### 2. Audio level setting

According to the July 2012 interpretations by the C63 Committee regarding the appropriate audio levels to be used for VoLTE over IMS T-coil testing, -16dBm0 shall be used for the normal speech input level. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -16dBm0 speech input level to the DUT for the VoLTE over IMS connection.

### II. DUT configuration for VoLTE over IMS T-coil Testing

#### 1. Codec investigation

An investigation was performed to determine the audio codec to be used for testing.

For LTE-FDD, the WB AMR 15.85 kbps; For LTE-TDD, the NB AMR 7.40kbps setting was used for the audio codec on the CMW500 for VoLTE over IMS T-coil testing.

AMR Codec Investigation - VoLTE over IMS									
Codec Setting	WB AMR 23.85kbps	WB AMR 15.85kbps	WB AMR 6.60 kbps	NB AMR 12.2 kbps	NB AMR 7.4kbps	NB AMR 4.75 kbps	Orientation	Band /BW	Channel
ABM1 (dBA/m)	-9.4	-7.3	-9.38	-9.27	-9.33	-9.17	z (Axial):	Band2/ 20MHz	18900
ABM2 (dBA/m)	-45.47	-42.54	-44.86	-44.87	-44.7	-44.88			
Frequency Response	pass	pass	pass	pass	pass	pass			
Signal Quality (dB)	36.07	<b>35.24</b>	35.48	35.6	35.37	35.71			



EVS Codec Investigation - VoLTE over IMS						
Codec Setting	24.4kbps	9.60 kbps	5.9 kbps	Orientation	Band /BW	Channel
ABM1 (dBA/m)	-8.79	-9.17	-8.52	z (Axial):	Band2/ 20MHz	18900
ABM2 (dBA/m)	<b>-44.94</b>	<b>-45.14</b>	<b>-44.74</b>			
Frequency Response	pass	pass	pass			
Signal Quality (dB)	36.15	35.97	36.22			

AMR Codec Investigation - VoLTE over IMS									
Codec Setting	WB AMR 23.85kbps	WB AMR 15.85kbps	WB AMR 6.60 kbps	NB AMR 12.2 kbps	NB AMR 7.4kbps	NB AMR 4.75 kbps	Orientation	Band /BW	Channel
ABM1 (dBA/m)	-5.85	-6.34	-9.66	-5.84	-5.44	-6.52	z (Axial):	Band38/ 20MHz	38000
ABM2 (dBA/m)	-31.99	-36.6	-35.83	-31.89	-30.68	-36.76			
Frequency Response	pass	pass	pass	pass	pass	pass			
Signal Quality (dB)	26.14	30.26	26.17	26.05	<b>25.24</b>	30.24			

EVS Codec Investigation - VoLTE over IMS						
Codec Setting	24.4kbps	9.60 kbps	5.9 kbps	Orientation	Band /BW	Channel
ABM1 (dBA/m)	-6.81	-7.42	-6.45	z (Axial):	Band38/ 20MHz	38000
ABM2 (dBA/m)	<b>-35.78</b>	<b>-36.03</b>	<b>-35.56</b>			
Frequency Response	pass	pass	pass			
Signal Quality (dB)	28.97	28.61	29.11			

## 2. Air Interface Investigation

The worst case band for each probe orientation is additionally tested on all bandwidth combination.

LTE B2 at 20MHz is the worst case for the Axial and Radial probe orientation for FDD.

LTE B38 at 20MHz is the worst case for the Axial and Radial probe orientation for TDD.

## 9 T-Coil testing for VoWIFI

### I. Test setup for VoWIFI over IMS T-coil Testing

#### 1. Test setup

The general test setup used for VoWIFI over IMS, or CMRS WIFI calling, is shown below. The call box used when performing VoWIFI over IMS T-coil measurement is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

#### 2. Audio level setting

According to the KDB285076 D02, regarding the appropriate audio levels to be used for WIFI over IMS T-coil testing, -20dBm0 shall be used for the normal speech input level. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the VoWIFI over IMS connection.

### II. DUT configuration for VoWIFI over IMS T-coil Testing

#### 1. Radio configuration investigation

Investigate the lowest and highest data rates and modulation to determine worst radio configuration to be used for testing by SNR comparison.

#### 2. Codec investigation

For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters (ABM1, ABM2, S+N/N, frequency response) for that voice service. It is only necessary to document this for one channel/band; the following worst investigation codec would be remarked to be used for the testing for the handset.

AMR Codec Investigation - VoWIFI over IMS									
Codec Setting	WB AMR 23.85kbps	WB AMR 15.85kbps	WB AMR 6.60 kbps	NB AMR 12.2 kbps	NB AMR 7.4kbps	NB AMR 4.75 kbps	Orientation	Band /BW	Channel
ABM1 (dBA/m)	-6.03	-8.7	-8.94	-7.13	-7.35	-7.49	2.4GHz	802.11b	6
ABM2 (dBA/m)	<b>-41.86</b>	<b>-44.84</b>	<b>-45.52</b>	<b>-42.85</b>	<b>-43.59</b>	<b>-43.69</b>			
Frequency Response	pass	pass	pass	pass	pass	pass			
Signal Quality (dB)	35.83	36.14	36.58	35.72	36.24	36.2			
Codec Setting	WB AMR 23.85kbps	WB AMR 15.85kbps	WB AMR 6.60 kbps	NB AMR 12.2 kbps	NB AMR 7.4kbps	NB AMR 4.75 kbps	Orientation	Band /BW	Channel
ABM1 (dBA/m)	-6.91	-5.75	-11.25	-13.37	-8.84	-7.53	5GHz	802.11a	36
ABM2 (dBA/m)	<b>-44.02</b>	<b>-44.18</b>	<b>-47.54</b>	<b>-49.09</b>	<b>-43.75</b>	<b>-42.75</b>			
Frequency Response	pass	pass	pass	pass	pass	pass			
Signal Quality (dB)	37.11	38.43	36.29	35.72	34.91	35.22			

#### 3. Air Interface Investigation

a. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface and the following worst





configure would be remarked to be used for the testing for the handset.

b. Select WLAN 2.4GHz and WLAN 5GHz one frequency band to do measurement at the worst SNR position was additionally performed with varying the BWs/Modulations/data rate to verify the variation to find out worst configuration , the observed variation is very little to be within 1.5 dB which is much less than the margin from the rating threshold.


c. According to the ANSI C63.19 2011 section 7.3.2, test middle channel of each frequency band for HAC testing for each orientation to determine worst HAC T-Coil rating.

## 10 T-Coil testing for OTT

This device supports VoIP via a preinstalled application that uses the Google Duo service, using OPUS as its only codec. VoIP capabilities require HAC assessment when voice calls are supported over the cellular data connection via preinstalled VoIP applications and the assessment is subject to Pre-Approval Guidance procedures.


The equipment is set up as shown below with a support device used to originate the call using the IP transport. The support device connects to the cloud-based Google Duo service via Wi-Fi access point and router, or RJ45. The DUT connects to the VoIP service via a cellular/unlicensed air interface to the call box and an Ethernet connection from call box to Internet. The various codec bit rate and air interface configurations are evaluated to determine the worst-case configuration

**Test Setup configuration for OTT calls**

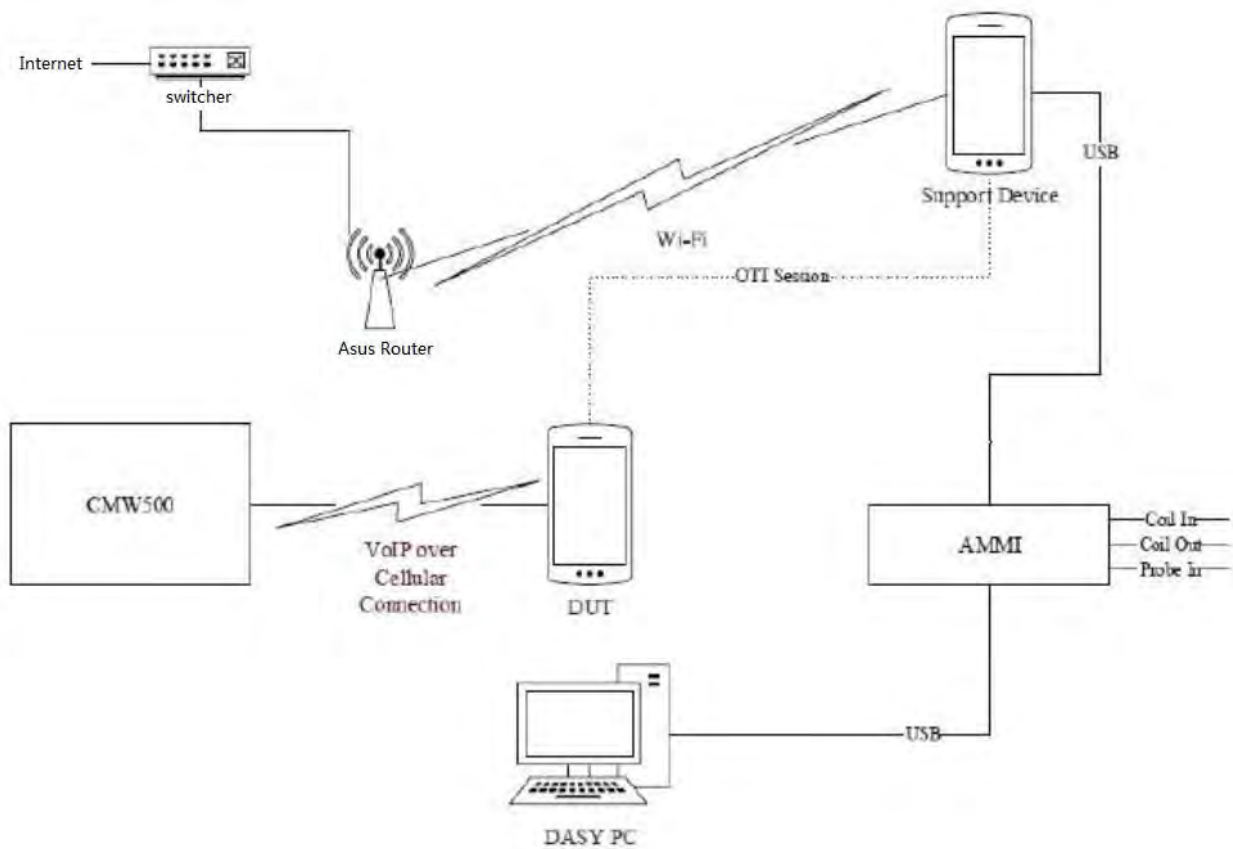

For the OTT call, the calibrated audio card within the CMW500 cannot be used so the AMMI is connected to an external Digital-Analog Converter (DAC) and the DAC is connected to the Support Device via USB. The test signal is sent from the DASY PC to the AMMI, from the AMMI to the DAC, from the DAC to the Support Device, and, via the VoIP call, to the DUT.

As this test set up uses an external DAC between the AMMI's audio output and support device, the appropriate gain factor for the OTT call needs be determined. This is done by connecting the DAC between the AMMI Audio output and Coil input as shown below.

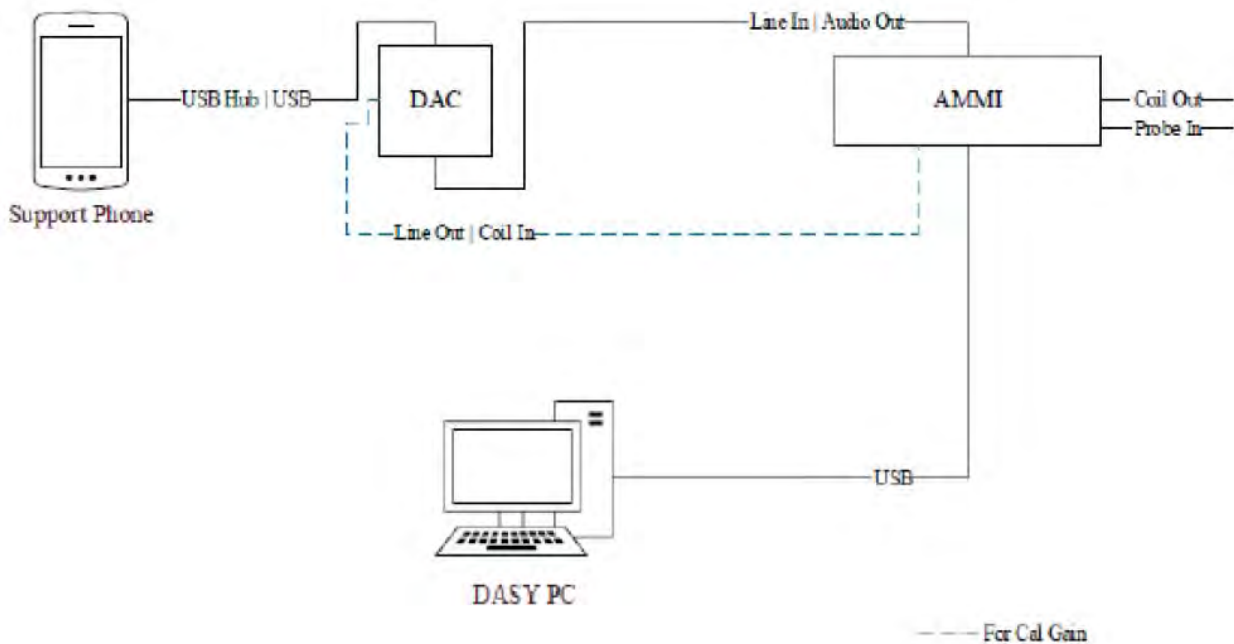

Using the metering function on the DAC, the DAC gain is adjusted until the volume reaches 0 dBFS (3.14 dBm0 based on TIA/EIA 810-A). SPEAG's "TN-LK-05042018-C-T-Coil\_Levels" document (ANNEX E) steps E through H are then followed to determine the adjusted gain values so that the reference level is set to 23.14dB below full scale, i.e. at -20dBm0. A verification of the DAC's output is performed prior to testing.



Codec Investigation - OTT VoIP(EDGE)						
Codec Setting	75kbps	35kbps	6kbps	Orientation	Band	Channel
ABM1 (dBA/m)	1.2	-2.69	-3.95	z (Axial):	GSM 850	190
ABM2 (dBA/m)	-30.3	-34.94	-34.31			
Frequency Response	PASS	PASS	PASS			
Signal Quality (dB)	31.5	<b>32.25</b>	<b>30.36</b>			

Codec Investigation - OTT VoIP(HSPA)						
Codec Setting	75kbps	35kbps	6kbps	Orientation	Band	Channel
ABM1 (dBA/m)	-8.06	-9.96	-6.12	z (Axial):	WCDMA Band 2	9400
ABM2 (dBA/m)	-35.95	-36.89	-33.04			
Frequency Response	PASS	PASS	PASS			
Signal Quality (dB)	27.89	<b>26.93</b>	<b>26.92</b>			

Codec Investigation - OTT VoIP(LTE)						
Codec Setting	75kbps	35kbps	6kbps	Orientation	Band	Channel
ABM1 (dBA/m)	0.5	0.01	-2.31	z (Axial):	LTE Band 2	18900
ABM2 (dBA/m)	-34.56	-35.03	-36.26			
Frequency Response	PASS	PASS	PASS			
Signal Quality (dB)	35.06	<b>35.04</b>	<b>33.95</b>			

Codec Investigation - OTT VoIP(WIFI)							
Codec Setting	75kbps	35kbps	6kbps	Orientation	Band	Standard	Channel
ABM1 (dBA/m)	-4.12	-3.36	1.18	z (Axial):	2.4GHz	IEEE802.11b	6
ABM2 (dBA/m)	-35.48	-34.64	-27.69				
Frequency Response	PASS	PASS	PASS				
Signal Quality (dB)	31.36	<b>31.28</b>	<b>28.87</b>				



## 11 Summary Test Results

### Result For GSM

Air Interface Investigation								
Mode	Channel /Frequency (MHz)	Probe Orientation	ABM1 [dB (A/m)]	ABM2 [dB (A/m)]	ABM SNR (dB)	Freq. Resp. Diff(dB)	Frequency Response	Category
GSM 850 Voice Coder Speechcodec Low	128/824.2	y (Radial):	-16.11	-40.97	24.86	/	/	T3
		z (Axial):	-12.34	-32.41	20.07	0.46	pass	T3
	190/836.6	y (Radial):	-13.28	-36.71	23.43	/	/	T3
		z (Axial):	-12.20	-32.26	20.06	0.54	pass	T3
	251/848.8	y (Radial):	-16.17	-40.94	24.77	/	/	T3
		z (Axial):	-11.58	-32.62	21.04	0.66	pass	T3

Band	Channel /Frequency (MHz)	Probe Orientation	ABM1 [dB (A/m)]	ABM2 [dB (A/m)]	ABM SNR (dB)	Freq. Resp. Diff(dB)	Frequency Response	T-Rating	Plot No.
GSM 850 Voice Coder Speechcodec Low	190/836.6	y (Radial):	-13.28	-36.71	23.43	/	/	T3	1
		z (Axial):	-12.20	-32.26	20.06	0.54	pass	T3	2
PCS 1900 Voice Coder Speechcodec Low	810/1909.8	y (Radial):	-11.65	-41.32	29.67	/	/	T3	3
		z (Axial):	-11.58	-44.56	32.98	0.63	pass	T4	4

Note:

1. The LCD backlight is turn off and volume is adjusted to maximum level during T-Coil testing.
2. Signal strength measurement scan plots are presented in Annex B.

**Result For WCDMA**

Mode	Channel /Frequency (MHz)	Probe Orientation	ABM1 [dB (A/m)]	ABM2 [dB (A/m)]	ABM SNR (dB)	Freq. Resp. Diff(dB)	Frequency Response	Category
WCDMA B2 Voice Coder Speechcodec Low AMR 12.2kbps	9262/1852.4	y (Radial):	-12.82	-48.35	35.53	/	/	T4
		z (Axial):	-6.54	-48.38	41.84	0.64	pass	T4
	9400/1880	y (Radial):	-11.64	-48.49	36.85	/	/	T4
		z (Axial):	-6.46	-47.77	41.31	0.86	pass	T4
	9538/1907.6	y (Radial):	-11.67	-49.10	37.43	/	/	T4
		z (Axial):	-6.54	-48.48	41.94	0.68	pass	T4

Band	Channel /Frequency (MHz)	Probe Orientation	ABM1 [dB (A/m)]	ABM2 [dB (A/m)]	ABM SNR (dB)	Freq. Resp. Diff(dB)	Frequency Response	T-Rating	Plot No.
WCDMA B2 Voice Coder Speechcodec Low AMR 12.2kbps	9400/1880	y (Radial):	-11.64	-48.49	36.85	/	/	T4	5
		z (Axial):	-6.46	-47.77	41.31	0.86	pass	T4	6
WCDMA B4 Voice Coder Speechcodec Low AMR 12.2kbps	14113/1732.6	y (Radial):	-11.68	-49.31	37.63	/	/	T4	7
		z (Axial):	-6.56	-46.91	40.35	0.59	pass	T4	8
WCDMA B5 Voice Coder Speechcodec Low AMR 12.2kbps	4183/836.6	y (Radial):	-11.67	-48.97	37.30	/	/	T4	9
		z (Axial):	-6.54	-46.41	39.87	0.77	pass	T4	10

Note:

1. The LCD backlight is turn off and volume is adjusted to maximum level during T-Coil testing.
2. Signal strength measurement scan plots are presented in Annex B.



**Result For LTE**

Air Interface Investigation									
Mode	Channel	Bandwidth (MHz)	Orientation	ABM1 [dB (A/m)]	ABM2 [dB (A/m)]	Ambient Noise [dB (A/m)]	Frequency Response Variation (dB)	Signal Quality (dB)	T-Rating
LTE FDD B2 Voice WB AMR Codec: 15.85 kbps	18900	20	z (Axial):	-7.3	-42.54	-58.63	1.69	<b>35.24</b>	T4
		15		-9.27	-45.35	-58.63	1.54	36.08	T4
		10		-9.17	-45.81	-58.63	1.76	36.64	T4
		5		-9.31	-45.49	-58.63	1.43	36.18	T4
		3		-9.18	-44.96	-58.63	1.51	35.78	T4
		1.4		-9.31	-46.02	-58.63	1.66	36.71	T4
		20	y (Radial):	-7.53	-42.08	-59.71	/	34.55	T4
		15		-7.88	-42.6	-59.71	/	34.72	T4
		10		-7.45	-43.12	-59.71	/	35.67	T4
		5		-7.12	-42.39	-59.71	/	35.27	T4
		3		-7.86	-43.46	-59.71	/	35.60	T4
		1.4		-7.65	-43.23	-59.71	/	35.58	T4

Mode	Channel	Bandwidth (MHz)	Modulation	RB Size	RB Offset	ABM1 [dB (A/m)]	ABM2 [dB (A/m)]	Signal Quality (dB)
LTE FDD B2 Voice WB AMR Codec: 15.85 kbps	18900	20	QPSK	1	0	-7.3	-42.54	<b>35.24</b>
				1	50	-7.43	-42.9	35.47
				1	99	-7.29	-42.83	35.54
				50	0	-7.63	-43.45	35.82
				50	25	-7.71	-43.4	35.69
				50	50	-7.55	-42.98	35.43
				100	0	-7.48	-43.18	35.70
			16QAM	1	0	-8.66	-44.25	35.59
				1	50	-7.94	-43.75	35.81
				1	99	-8.12	-43.89	35.77
				50	0	-8.43	-44.06	35.63
				50	25	-9.03	-44.93	35.90
				50	50	-8.74	-44.58	35.84
				100	0	-8.62	-44.32	35.70



Mode	Channel /Frequency (MHz)	Probe Orientation	ABM1 [dB (A/m)]	ABM2 [dB (A/m)]	ABM SNR (dB)	Freq. Resp. Diff(dB)	Frequency Response	T-Rating
LTE FDD B2 Voice WB AMR Codec: 15.85kbit/s	18700/1860 (QPSK_20M_1RB_0offset)	y (Radial):	-11.35	-39.22	27.87	/	/	T3
		z (Axial):	-8.18	-43.01	34.83	0.73	pass	T4
	18900/1880 (QPSK_20M_1RB_0offset)	y (Radial):	-7.53	-42.08	34.55	/	/	T4
		z (Axial):	-7.30	-42.54	35.24	2.00	pass	T4
	19100/1900 (QPSK_20M_1RB_0offset)	y (Radial):	-14.18	-42.53	28.35	/	/	T3
		z (Axial):	-8.24	-42.90	34.66	1.69	pass	T4
LTE FDD B2 Voice WB AMR Codec: 15.85kbit/s	19100/1900 (16QAM_20M_1RB_0offset)	y (Radial):	-11.90	-39.13	27.23	/	/	T3
		z (Axial):	-8.66	-44.25	35.59	1.36	pass	T4

Band	Channel /Frequency (MHz)	Probe Orientation	ABM1 [dB (A/m)]	ABM2 [dB (A/m)]	ABM SNR (dB)	Freq. Resp. Diff(dB)	Frequency Response	T-Rating	Plot No.
LTE FDD B2 Voice WB AMR Codec: 15.85kbit/s	19100/1900 (QPSK_20M_1RB_0offset)	y (Radial):	-14.18	-42.53	28.35	/	/	T3	11
		z (Axial):	-8.24	-42.90	34.66	1.69	pass	T4	12
LTE FDD B4 Voice WB AMR Codec: 15.85kbit/s	20300/1745 (QPSK_20M_1RB_0offset)	y (Radial):	-15.28	-42.84	27.56	/	/	T3	13
		z (Axial):	-4.70	-38.76	34.06	1.58	pass	T4	14
LTE FDD B5 Voice WB AMR Codec: 15.85kbit/s	20600/844 (QPSK_10M_1RB_0offset)	y (Radial):	-11.92	-40.16	28.24	/	/	T3	15
		z (Axial):	-4.70	-39.08	34.38	1.58	pass	T4	16
LTE FDD B7 Voice WB AMR Codec: 15.85kbit/s	21350/2560 (QPSK_20M_1RB_0offset)	y (Radial):	-15.32	-43.21	27.89	/	/	T3	17
		z (Axial):	-9.48	-42.85	33.37	1.65	Pass	T4	18
LTE FDD B12 Voice WB AMR Codec: 15.85kbit/s	23130/711 (QPSK_10M_1RB_0offset)	y (Radial):	-14.59	-42.73	28.14	/	/	T3	19
		z (Axial):	-8.26	-42.80	34.54	1.52	Pass	T4	20
LTE FDD B13 Voice WB AMR Codec: 15.85kbit/s	23230/782 (QPSK_10M_1RB_0offset)	y (Radial):	-14.84	-44.46	29.62	/	/	T3	21
		z (Axial):	-8.58	-44.32	35.74	1.67	Pass	T4	22
LTE FDD B17 Voice WB AMR Codec: 15.85kbit/s	23800/711 (QPSK_10M_1RB_0offset)	y (Radial):	-12.06	-40.66	28.60	/	/	T3	23
		z (Axial):	-9.83	-45.51	35.68	1.57	Pass	T4	24
LTE FDD B19 Voice WB AMR Codec: 15.85kbit/s	24075/837.5 (QPSK_15M_1RB_0offset)	y (Radial):	-14.59	-41.53	26.94	/	/	T3	25
		z (Axial):	-6.08	-40.40	34.32	1.93	Pass	T4	26





LTE FDD B25 Voice WB AMR Codec: 15.85kbit/s	26365/1882.5 (QPSK_20M_1RB_0offset)	y (Radial):	-9.05	-42.32	33.27	/	/	T4	27
		z (Axial):	-5.50	-45.85	40.35	1.84	Pass	T4	28
LTE FDD B26 Voice WB AMR Codec: 15.85kbit/s	26965/841.5 (QPSK_20M_1RB_0offset)	y (Radial):	-15.83	-41.96	26.13	/	/	T3	29
		z (Axial):	-9.78	-43.67	33.89	2.00	Pass	T4	30
LTE FDD B30 Voice WB AMR Codec: 15.85kbit/s	27710/2310 (QPSK_10M_FullRB_0offset)	y (Radial):	-12.10	-44.65	32.55	/	/	T4	31
		z (Axial):	-5.60	-43.34	37.74	2.00	Pass	T4	32
LTE FDD B66 Voice WB AMR Codec: 15.85kbit/s	132322/1745 (QPSK_20M_1RB_0offset)	y (Radial):	-15.79	-42.75	26.96	/	/	T3	33
		z (Axial):	-9.91	-43.18	33.27	2.00	Pass	T4	34

Note: 1. The LCD backlight is turn off and volume is adjusted to maximum level during T-Coil testing.  
2. Signal strength measurement scan plots are presented in Annex B.

Air Interface Investigation									
Mode	Channel	Bandwidth (MHz)	Orientation	ABM1 [dB (A/m)]	ABM2 [dB (A/m)]	Ambient Noise [dB (A/m)]	Frequency Response Variation (dB)	Signal Quality (dB)	T-Rating
LTE FDD B38 Voice NB AMR Codec: 7.4kbit/s	38000	20	z (Axial):	-4.98	-30.22	-58.63	1.92	25.24	T3
		15		-5.37	-31.5	-58.63	1.81	26.13	T3
		10		-5.19	-31.21	-58.63	1.94	26.02	T3
		5		-4.73	-30.94	-58.63	2.00	26.21	T3
		20	y (Radial):	-11.41	-35.14	-59.71	/	23.73	T3
		15		-11.25	-35.05	-59.71	/	23.80	T3
		10		-11.49	-35.26	-59.71	/	23.77	T3
		5		-12.13	-35.82	-59.71	/	23.69	T3

Mode	Channel	Bandwidth (MHz)	Modulation	RB Size	RB Offset	ABM1 [dB (A/m)]	ABM2 [dB (A/m)]	Signal Quality (dB)
LTE FDD B38 Voice NB AMR Codec: 7.4kbit/s	38000	20	QPSK	1	0	-4.98	-30.22	25.24
				1	50	-5.78	-31.35	25.57
				1	99	-6.12	-32.14	26.02
				50	0	-5.97	-31.46	25.49
				50	25	-8.96	-34.69	25.73
				50	50	-7.02	-32.66	25.64
				100	0	-6.81	-32.88	26.07
			16QAM	1	0	-5.33	-30.90	25.57
				1	50	-3.95	-30.06	26.11
				1	99	-4.67	-30.10	25.43
				50	0	-8.90	-34.40	25.50
				50	25	-5.12	-31.32	26.20
				50	50	-6.24	-32.25	26.01



			100	0	-7.11	-32.87	25.76
--	--	--	-----	---	-------	--------	-------

Mode	Channel /Frequency(MHz)	Probe Orientation	ABM1 [dB (A/m)]	ABM2 [dB (A/m)]	ABM SNR (dB)	Freq. Resp. Diff(dB)	Frequency Response	T-Rating
LTE FDD B38 Voice NB AMR Codec: 7.4kbit/s	37850/2580 (QPSK_20M_1R B_0offset)	y (Radial):	-12.07	-35.99	23.92	/	/	T3
		z (Axial):	-2.06	-27.11	25.05	2.00	Pass	T3
	38000/2595 (QPSK_20M_1R B_0offset)	y (Radial):	-11.41	-35.14	23.73	/	/	T3
		z (Axial):	-4.98	-30.22	25.24	1.92	Pass	T3
	38150/2610 (QPSK_20M_1R B_0offset)	y (Radial):	-11.31	-36.48	25.17	/	/	T3
		z (Axial):	-5.44	-30.40	24.96	1.80	Pass	T3
LTE FDD B38 Voice NB AMR Codec: 7.4kbit/s	38150/2610 (QPSK_20M_1R B_0offset)	y (Radial):	-11.35	-34.82	23.47	/	/	T3
		z (Axial):	-5.33	-30.90	25.57	2.00	Pass	T3

Band	Channel /Frequency (MHz)	Probe Orientation	ABM1 [dB (A/m)]	ABM2 [dB (A/m)]	ABM SNR (dB)	Freq. Resp. Diff(dB)	Frequency Response	T-Rating	Plot No.
LTE FDD B38 Voice NB AMR Codec: 7.4kbit/s	38150/2610 (QPSK_20M_1RB _0offset)	y (Radial):	-11.31	-36.48	25.17	/	/	T3	35
		z (Axial):	-5.44	-30.40	24.96	1.80	Pass	T3	36
LTE FDD B40 Voice NB AMR Codec: 7.4kbit/s	39550/2390 (QPSK_20M_1RB _0offset)	y (Radial):	-11.83	-34.60	22.77	/	/	T3	37
		z (Axial):	-6.06	-30.84	24.78	1.86	Pass	T3	38
LTE FDD B41 Voice NB AMR Codec: 7.4kbit/s	41140/2645 (QPSK_20M_1RB _0offset)	y (Radial):	-11.94	-35.01	23.07	/	/	T3	39
		z (Axial):	-6.04	-30.98	24.94	1.83	Pass	T3	40

Note:

1. The LCD backlight is turn off and volume is adjusted to maximum level during T-Coil testing.
2. Signal strength measurement scan plots are presented in Annex B.

**Result For Wi-Fi**

802.11b Radio configuration investigation					
Mode	Channel	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Signal Quality [dB]
802.11b	6	1	-7.13	-42.85	35.72
802.11b	6	11	-9.11	-45.52	36.41
802.11g Radio configuration investigation					
Mode	Channel	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Signal Quality [dB]
802.11g	6	6	-7.16	-39.43	32.27
802.11g	6	54	-9.34	-45.08	35.74
802.11n HT20 Radio configuration investigation					
Mode	Channel	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Signal Quality [dB]
802.11n HT20	6	MCS0	-6.9	-38.92	32.02
802.11n HT20	6	MCS7	-8.75	-45.04	36.29
802.11n HT20	36	MCS0	-8	-43.17	35.17
802.11n HT20	36	MCS7	-7.55	-43.48	35.93
802.11n HT40 Radio configuration investigation					
Mode	Channel	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Signal Quality [dB]
802.11n HT40	6	MCS0	-6.71	-42.75	36.04
802.11n HT40	6	MCS7	-8.93	-44.99	36.06
802.11n HT40	38	MCS0	-9.15	-44.41	35.26
802.11n HT40	38	MCS7	-8.99	-44.35	35.36
802.11a Radio configuration investigation					
Mode	Channel	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Signal Quality [dB]
802.11a	36	6	-8.84	-43.75	34.91
802.11a	36	54	-7.96	-42.95	34.99

Air Interface Investigation								
Mode	Channel /Frequency (MHz)	Probe Orientation	ABM1 [dB (A/m)]	ABM2 [dB (A/m)]	ABM SNR (dB)	Freq. Resp. Diff(dB)	Frequency Response	Category
802.11b	6/2437 (BW:20M_Rate:1M)	y (Radial):	-13.21	-38.86	25.65	/	/	T3
		z (Axial):	-7.13	-42.85	35.72	0.39	pass	T4
802.11a	36/5180 (BW:20M_Rate:6M)	y (Radial):	-10.12	-41.59	31.47	/	/	T4
		z (Axial):	-8.84	-43.75	34.91	1.53	pass	T4



Band	Channel /Frequency (MHz)	Probe Orientation	ABM1 [dB (A/m)]	ABM2 [dB (A/m)]	ABM SNR (dB)	Freq. Resp. Diff(dB)	Frequency Response	T-Rating	Plot No.
Wi-Fi 2.4G: 802.11b Voice NB AMR Codec: 12.20kbit/s	6/2437 (BW:20M_Rate:11M)	y (Radial):	-13.21	-38.86	25.65	/	/	T3	41
		z (Axial):	-7.13	-42.85	35.72	0.39	pass	T4	42
Wi-Fi 2.4G: 802.11g Voice NB AMR Codec: 12.20kbit/s	6/2437 (BW:20M_Rate:6M)	y (Radial):	-17.69	-45.79	28.10	/	/	T3	43
		z (Axial):	-7.16	-39.43	32.27	1.37	pass	T4	44
Wi-Fi 2.4G: 802.11n Voice NB AMR Codec: 12.20kbit/s	6/2437 (BW:20M_Rate:MCS0)	y (Radial):	-13.67	-38.17	24.50	/	/	T3	45
		z (Axial):	-6.90	-38.92	32.02	0.52	pass	T4	46
Wi-Fi 5G: 802.11a (U-NII-1) Voice NB AMR Codec: 7.4kbit/s	36/5180 (BW:20M_Rate:6M)	y (Radial):	-10.12	-41.59	31.47	/	/	T4	47
		z (Axial):	-8.84	-43.75	34.91	1.53	pass	T4	48
Wi-Fi 5G: 802.11a (U-NII-3) Voice NB AMR Codec: 7.4kbit/s	157/5785 (BW:20M_Rate:6M)	y (Radial):	-13.38	-43.74	30.36	/	/	T4	49
		z (Axial):	-3.10	-36.52	33.42	0.10	pass	T4	50

## Note:

1. The LCD backlight is turn off and volume is adjusted to maximum level during T-Coil testing.
2. Signal strength measurement scan plots are presented in Annex B.

**Result For GSM & WCDMA & LTE & Wi-Fi (OTT VoIP)**

Mode	Channel / Frequency (MHz)	Probe Orientation	ABM1≥-18 (dB A/m)	ABM2 [dB(A/m)]	Ambient Noise [dB (A/m)]	ABM SNR (dB)	Freq. Resp. Diff (dB)	Frequency Response	Category	Plot No.
GSM 850	190/836.6	Y-axial	-8.50	-35.72	-58.63	27.22	/	/	T3	51
Google Duo 6kbps		Z-axial	-3.95	-34.31	-59.71	30.36	0.55	Pass	T4	52
PCS 1900	661/1880	Y-axial	-7.27	-37.64	-58.63	30.37	/	/	T4	53
Google Duo 6kbps		Z-axial	-1.88	-37.91	-59.71	36.03	0.00	Pass	T4	54
WCDMA B2	9400/1880	Y-axial	-15.04	-35.30	-58.63	20.26	/	/	T3	55
Google Duo 6kbps		Z-axial	-6.12	-33.04	-59.71	26.92	0.56	Pass	T3	56
WCDMA B4	1413/1732.6	Y-axial	-16.22	-36.63	-58.63	20.41	/	/	T3	57
Google Duo 6kbps		Z-axial	-9.70	-36.53	-59.71	26.83	0.63	Pass	T3	58
WCDMA B5	4183/836.6	Y-axial	-16.26	-36.41	-58.63	20.15	/	/	T3	59
Google Duo 6kbps		Z-axial	-14.17	-37.03	-59.71	22.86	1.89	Pass	T3	60
LTE FDD B2	18900/1880 (QPSK_20M_Full RB_0 offset)	Y-axial	-10.76	-39.84	-58.63	29.08	/	/	T3	61
Google Duo 6kbps		Z-axial	-2.31	-36.26	-59.71	33.95	1.15	Pass	T4	62
LTE FDD B4	20175/1732.5 (QPSK_20M_Full RB_0 offset)	Y-axial	-10.19	-40.78	-58.63	30.59	/	/	T4	63
Google Duo 6kbps		Z-axial	-2.38	-38.56	-59.71	36.18	0.55	Pass	T4	64
LTE FDD B5	20525/836.5 (QPSK_10M_Full RB_0 offset)	Y-axial	-9.57	-37.44	-58.63	27.87	/	/	T3	65
Google Duo 6kbps		Z-axial	-4.09	-40.52	-59.71	36.43	0.45	Pass	T4	66
LTE FDD B7	21100/2535 (QPSK_20M_Full RB_0 offset)	Y-axial	-11.29	-40.49	-58.63	29.20	/	/	T3	67
Google Duo 6kbps		Z-axial	-5.19	-40.06	-59.71	34.87	1.37	Pass	T4	68
LTE FDD B12	23095/707.5 (QPSK_10M_Full RB_0 offset)	Y-axial	-9.39	-37.10	-58.63	27.71	/	/	T3	69
Google Duo 6kbps		Z-axial	-4.33	-45.16	-59.71	40.83	0.12	Pass	T4	70
LTE FDD B13	23230/782 (QPSK_10M_Full RB_0 offset)	Y-axial	-11.59	-39.38	-58.63	27.79	/	/	T3	71
Google Duo 6kbps		Z-axial	-9.51	-42.32	-59.71	32.81	0.91	Pass	T4	72
LTE FDD B17	23790/710 (QPSK_10M_Full RB_0 offset)	Y-axial	-11.45	-40.36	-58.63	28.91	/	/	T3	73
Google Duo 6kbps		Z-axial	-4.84	-40.87	-59.71	36.03	0.43	pass	T4	74
LTE FDD B19	24075/837.5 (QPSK_15M_Full RB_0 offset)	Y-axial	-8.05	-37.13	-58.63	29.08	/	/	T3	75
Google Duo 6kbps		Z-axial	-4.55	-39.49	-59.71	34.94	1.00	pass	T4	76
LTE FDD B25	26365/1882.5	Y-axial	-12.21	-39.98	-58.63	27.77	/	/	T3	77



Google Duo 6kbps	(QPSK_20M_ Full RB_0 offset)	Z-axial	-6.70	-40.69	-59.71	33.99	0.61	pass	T4	78
LTE FDD B26	26865/831.5	Y-axial	-8.03	-36.93	-58.63	28.90	/	/	T3	79
Google Duo 6kbps	(QPSK_15M_ Full RB_0 offset)	Z-axial	-7.62	-41.57	-59.71	33.95	0.71	pass	T4	80
LTE FDD B30	27710/2310	Y-axial	-11.81	-40.17	-58.63	28.36	/	/	T3	81
Google Duo 6kbps	(QPSK_10M_ Full RB_0 offset)	Z-axial	-5.60	-34.54	-59.71	28.94	0.17	pass	T3	82
LTE TDD B38	38000/2595	Y-axial	-10.23	-33.39	-58.63	23.16	/	/	T3	83
Google Duo 6kbps	(QPSK_20M_ Full RB_0 offset)	Z-axial	-5.00	-35.73	-59.71	30.73	1.35	pass	T4	84
LTE TDD B40	39150/2350	Y-axial	-9.58	-33.60	-58.63	24.02	/	/	T3	85
Google Duo 6kbps	(QPSK_20M_ Full RB_0 offset)	Z-axial	-4.71	-36.26	-59.71	31.55	0.78	pass	T4	86
LTE TDD B41	40690/2600	Y-axial	-9.85	-32.57	-58.63	22.72	/	/	T3	87
Google Duo 6kbps	(QPSK_20M_ Full RB_0 offset)	Z-axial	-3.78	-34.86	-59.71	31.08	0.54	pass	T4	88
LTE FDD B66	132322/1745	Y-axial	-9.89	-40.61	-58.63	30.72	/	/	T4	89
Google Duo 6kbps	(QPSK_20M_ Full RB_0 offset)	Z-axial	-3.50	-39.26	-59.71	35.76	0.43	pass	T4	90
Wi-Fi 2.4G: 802.11b	6/2437	Y-axial	-12.99	-42.91	-58.63	29.92	/	/	T3	91
Google Duo 6kbps	(BW:20M_Rate: 11M)	Z-axial	1.18	-27.69	-59.71	28.87	1.56	pass	T3	92
Wi-Fi 2.4G: 802.11g	6/2437	Y-axial	-15.97	-25.40	-58.63	21.32	/	/	T3	93
Google Duo 6kbps	(BW:20M_Rate: 6M)	Z-axial	-4.08	-44.27	-59.71	27.95	0.39	pass	T3	94
Wi-Fi 2.4G: 802.11n	6/2437	Y-axial	-16.32	-43.33	-58.63	27.01	/	/	T3	95
Google Duo 6kbps	(BW:20M_Rate: MCS0)	Z-axial	-8.37	-39.46	-59.71	31.09	1.29	pass	T4	96
Wi-Fi 5G: 802.11a (U-NII-1)	36/5180	Y-axial	-9.91	-38.92	-58.63	29.01	/	/	T3	97
Google Duo 6kbps	(BW:20M_Rate: 6M)	Z-axial	-5.99	-41.35	-59.71	35.36	0.51	pass	T4	98
Wi-Fi 5G: 802.11a (U-NII-3)	157/5785	Y-axial	-12.71	-37.32	-58.63	24.61	/	/	T3	99
Google Duo 6kbps	(BW:20M_Rate: 6M)	Z-axial	-12.68	-41.93	-59.71	29.25	1.43	pass	T3	100

Note: 1. The LCD backlight is turn off and volume is adjusted to maximum level during T-Coil testing.

2. Signal strength measurement scan plots are presented in Annex B.



## 12 Measurement Uncertainty

Measurement uncertainty evaluation template for DUT HAC T-Coil test

Error source	Type	Uncertainty Value $a_i$ (%)	Prob. Dist.	k	ABM1 $c_i$	ABM2 $c_i$	Std. Unc. ABM1 ( $\pm$ %)	Std. Unc. ABM2 ( $\pm$ %)	Degree of freedom $V_{eff}$ or $v_i$
<b>Probe Sensitivity</b>									
Reference Level	B	3.0	N	1	1	1	3.0	3.0	$\infty$
AMCC Geometry	B	0.4	R	1.732	1	1	0.2	0.2	$\infty$
AMCC Current	B	0.6	R	1.732	1	1	0.3	0.3	$\infty$
Probe Positioning during Calibration	B	0.1	R	1.732	1	1	0.1	0.1	$\infty$
Noise Contribution	B	0.7	R	1.732	0.0143	1	0.0	0.4	$\infty$
Frequency Slope	B	5.9	R	1.732	0.1	1	0.3	3.4	$\infty$
<b>Probe System</b>									
Repeatability / Drift	B	1.0	R	1.732	1	1	0.6	0.6	$\infty$
Linearity / Dynamic Range	B	0.6	R	1.732	1	1	0.3	0.3	$\infty$
Acoustic Noise	B	1.0	R	1.732	0.1	1	0.1	0.6	$\infty$
Probe Angle	B	2.3	R	1.732	1	1	1.3	1.3	$\infty$
Spectral Processing	B	0.9	R	1.732	1	1	0.5	0.5	$\infty$
Integration Time	B	0.6	N	1	1	5	0.6	3.0	$\infty$
Field Distribution	B	0.2	R	1.732	1	1	0.1	0.1	$\infty$
<b>Test Signal</b>									
Ref.Signal Spectral Response	B	0.6	R	1.732	0	1	0.0	0.3	$\infty$
<b>Positioning</b>									
Probe Positioning	B	1.9	R	1.732	1	1	1.1	1.1	$\infty$
Phantom Thickness	B	0.9	R	1.732	1	1	0.5	0.5	$\infty$
EUT Positioning	B	1.9	R	1.732	1	1	1.1	1.1	$\infty$
<b>External Contributions</b>									
RF Interference	B	0.0	R	1.732	1	0.3	0.0	0.0	$\infty$
Test Signal Variation	B	2.0	R	1.732	1	1	1.2	1.2	$\infty$
Combined Std. Uncertainty (ABM Field)							4.0	6.1	
Expanded Std. Uncertainty							8.0	12.2	



### 13 Main Test Instruments

Name	Manufacturer	Type	Serial Number	Last Cal.	Cal. Due Date
Audio Magnetic 1D Field Probe	SPEAG	AM1DV3	3082	2022-02-23	2023-02-22
DAE	SPEAG	DAE4	1692	2021-10-04	2022-10-03
Universal Radio Communication Tester	R&S	CMW 500	146734	2021-05-15	2022-05-14
				2022-05-14	2023-05-13
Audio Magnetic Calibration Coil	SPEAG	AMCC	1101	/	/
Hygrothermograph	Anymetr	NT-311	20150731	2021-05-18	2022-05-17
				2022-05-18	2023-05-17
HAC Phantom	SPEAG	SD HAC P01 BB	1117	/	/
DAC	Sound Devices	USBPre 2	HB1420183010	/	/
Software for Test	Speag	DASY5	/	/	/

\*\*\*\*\*END OF REPORT \*\*\*\*\*



## ANNEX A: Test Layout



Picture 1: HAC T-Coil System Layout



## ANNEX B: Graph Results

### Plot 1 T-Coil GSM 850 Y transversal

Date: 2022/3/4

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:8.69961

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**GSM850 HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM**

**SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm


#### Cursor:

ABM1/ABM2 = 23.43 dB

ABM1 comp = -13.28 dBA/m

BWC Factor = 0.17 dB

Location: 0, -12.5, 3.7 mm

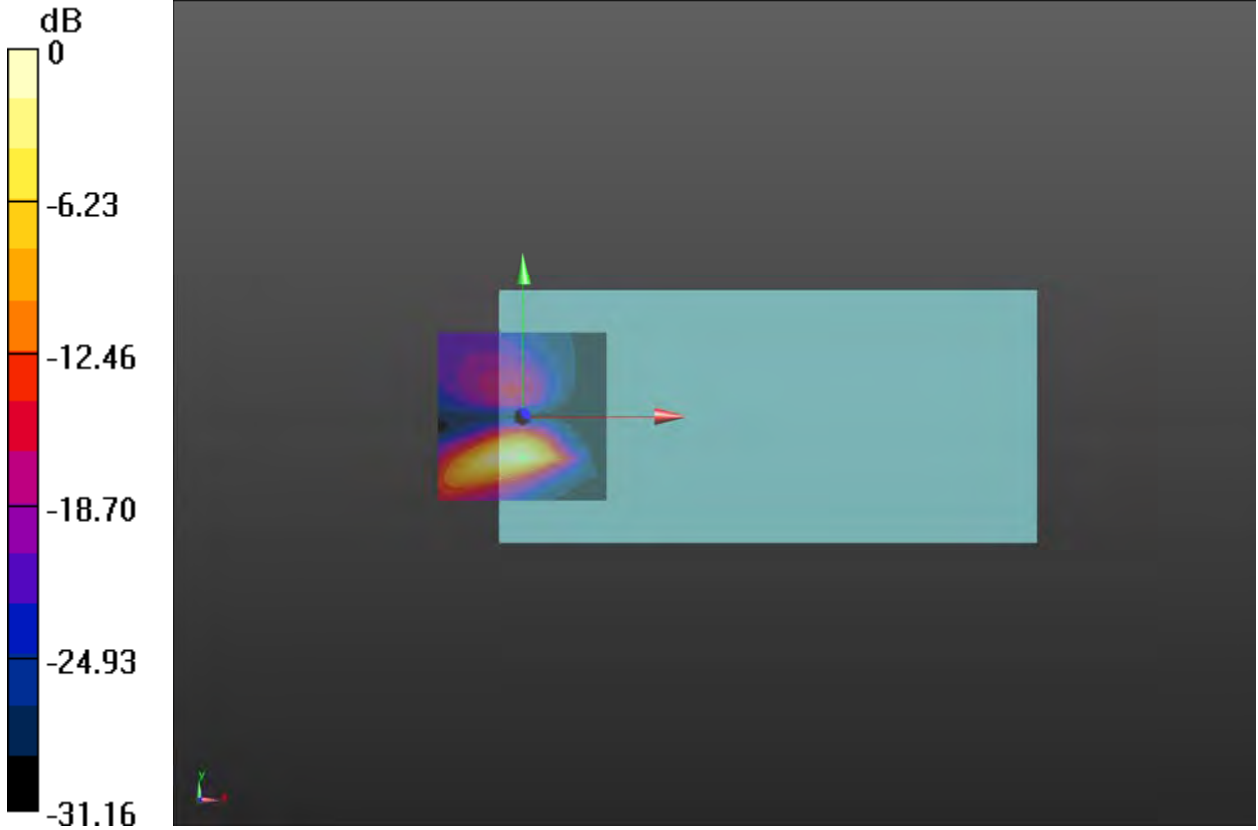

0 dB = 14.84 = 23.43 dB

**Plot 2 T-Coil GSM 850 Z Axial**

Date: 2022/3/4

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:8.69961

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**GSM850 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z)****(13x13x1)**: Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 20.06 dB

ABM1 comp = -12.20 dBA/m

BWC Factor = 0.17 dB

Location: -4.2, -4.2, 3.7 mm

**GSM850 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq****Resp(x,y,z,f) (1x1x1)**: Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 0.54 dB

BWC Factor = 10.81 dB

Location: -4.2, -4.2, 3.7 mm

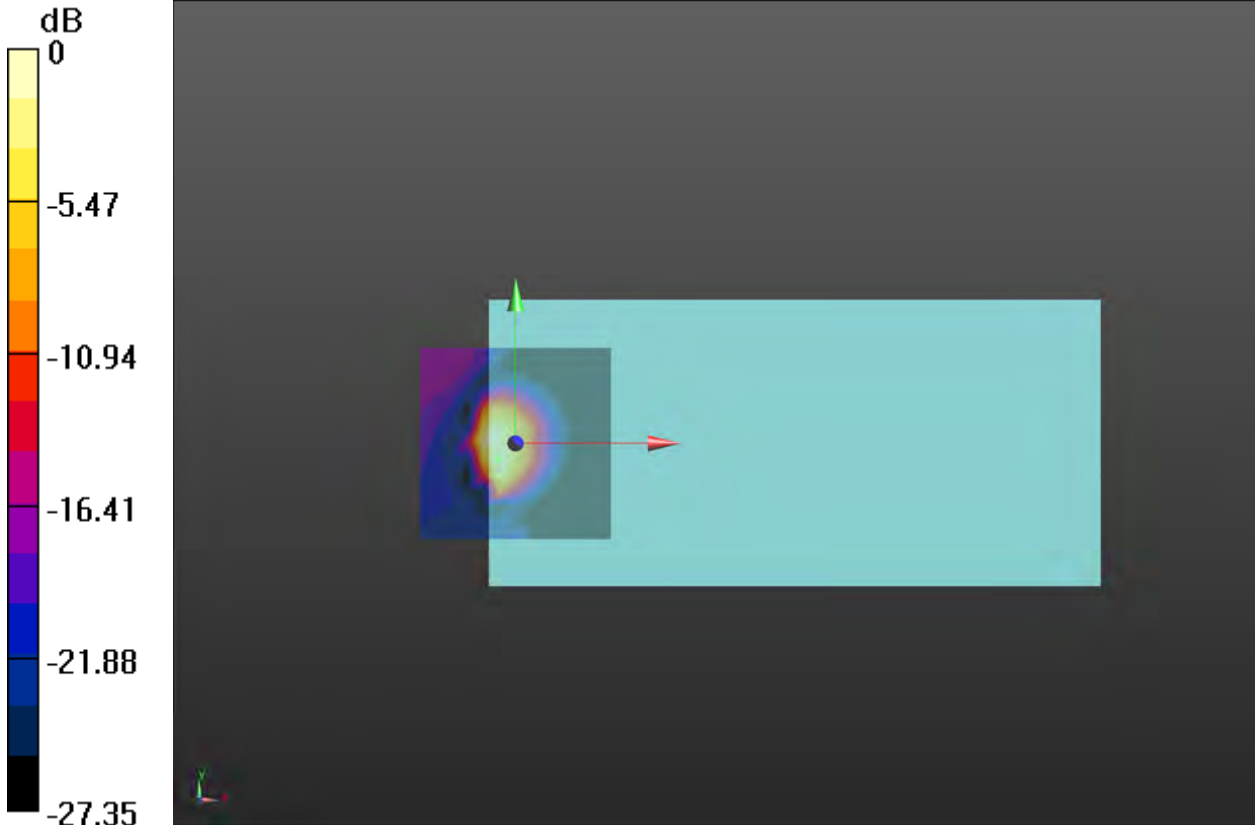

0 dB = 10.07 = 20.06 dB

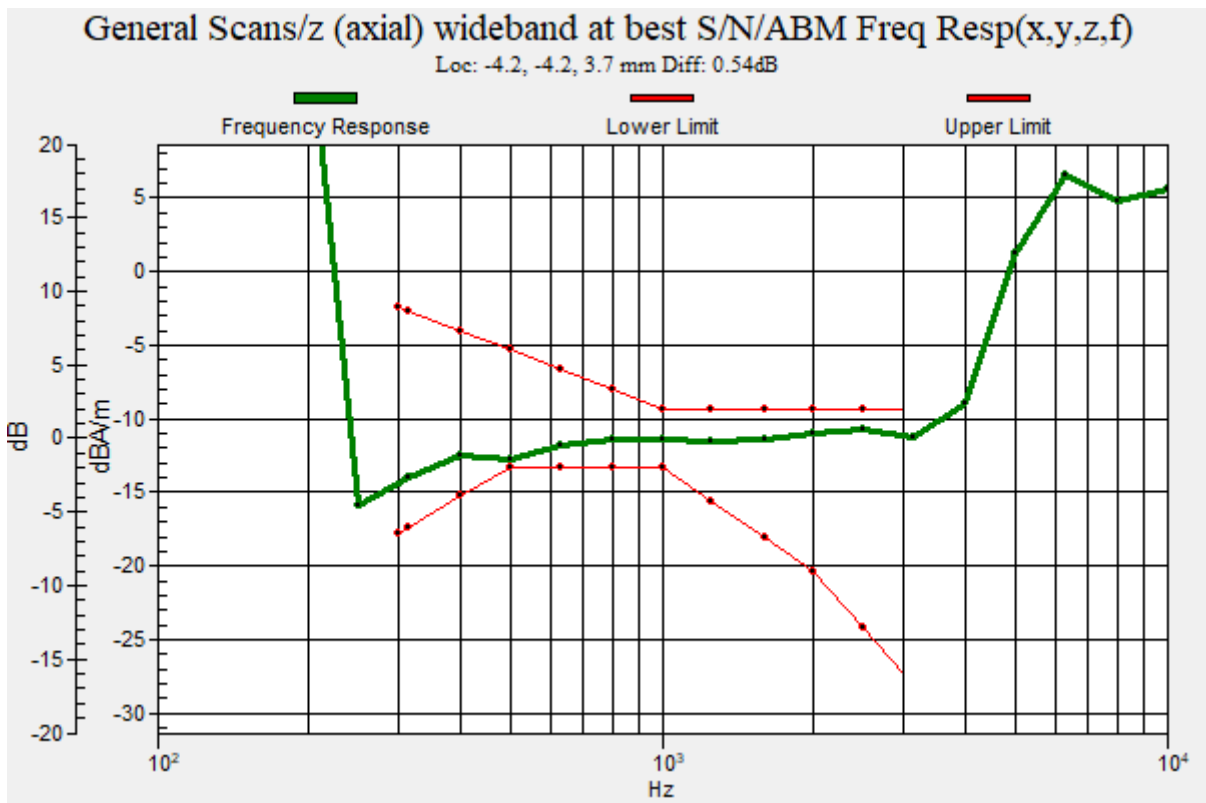

**Plot 3 T-Coil GSM 1900 Y transversal**

Date: 2022/3/4

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**GSM1900 HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 29.67 dB

ABM1 comp = -11.65 dBA/m

BWC Factor = 0.17 dB

Location: 0, -8.3, 3.7 mm

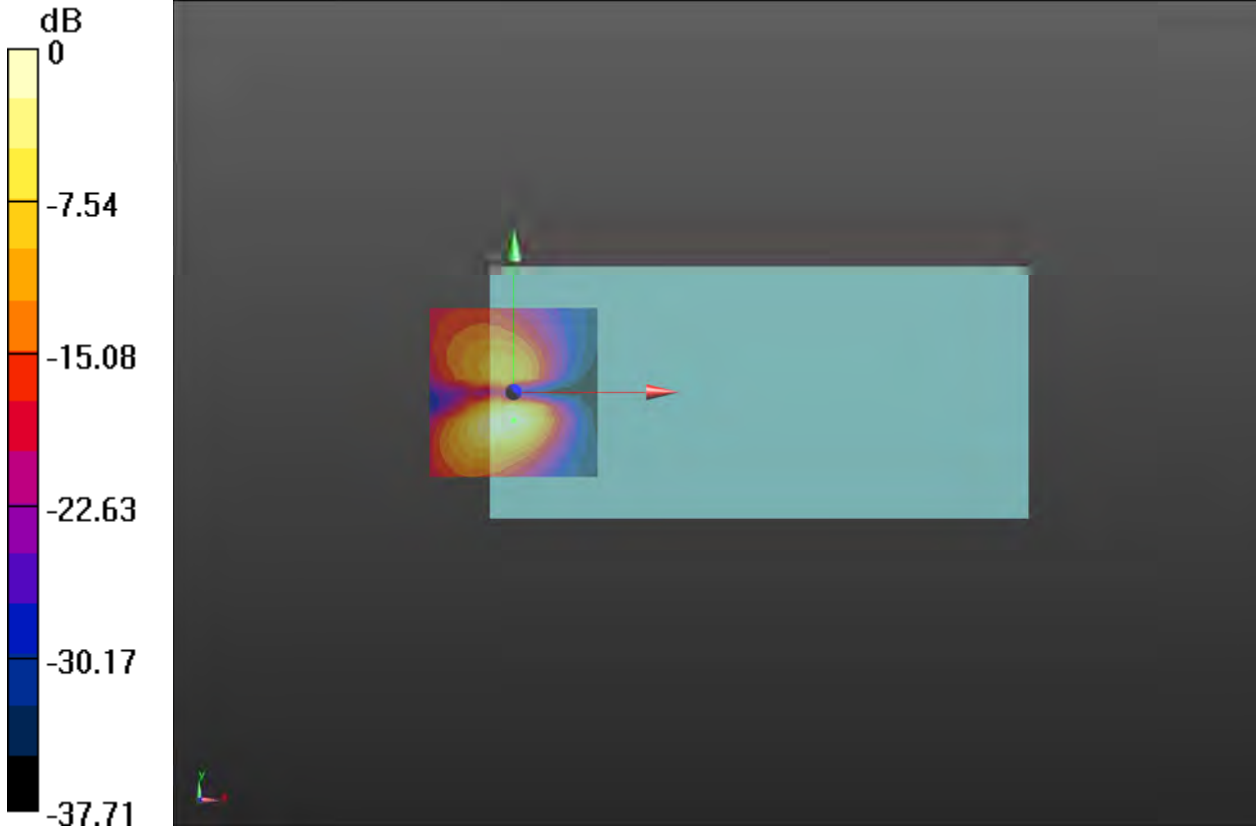

0 dB = 30.43 = 29.67 dB

**Plot 4 T-Coil GSM 1900 Z Axial**

Date: 2022/3/4

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**GSM1900 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z)****(13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 32.98 dB

ABM1 comp = -11.58 dBA/m

BWC Factor = 0.17 dB

Location: -4.2, -4.2, 3.7 mm

**GSM1900 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq****Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 0.63 dB


BWC Factor = 10.81 dB

Location: -4.2, -4.2, 3.7 mm



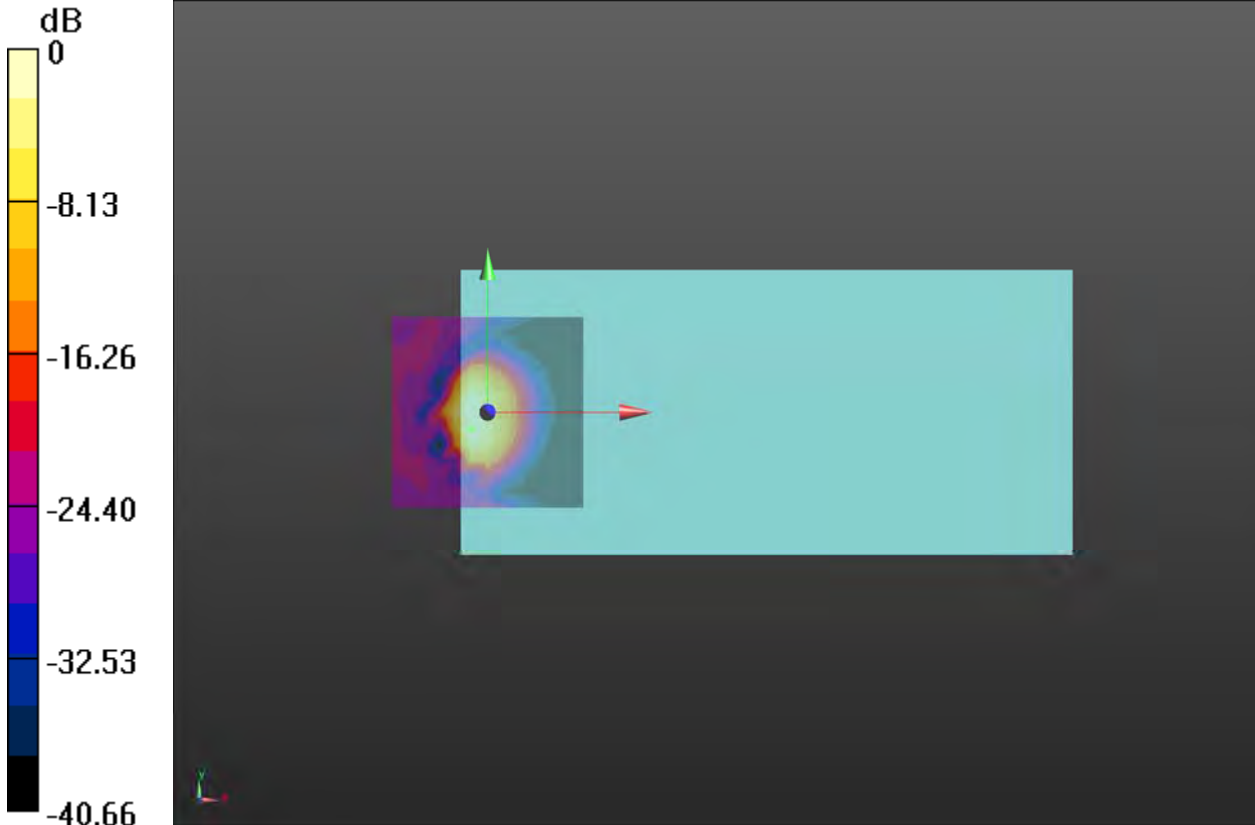

0 dB = 44.56 = 32.98 dB

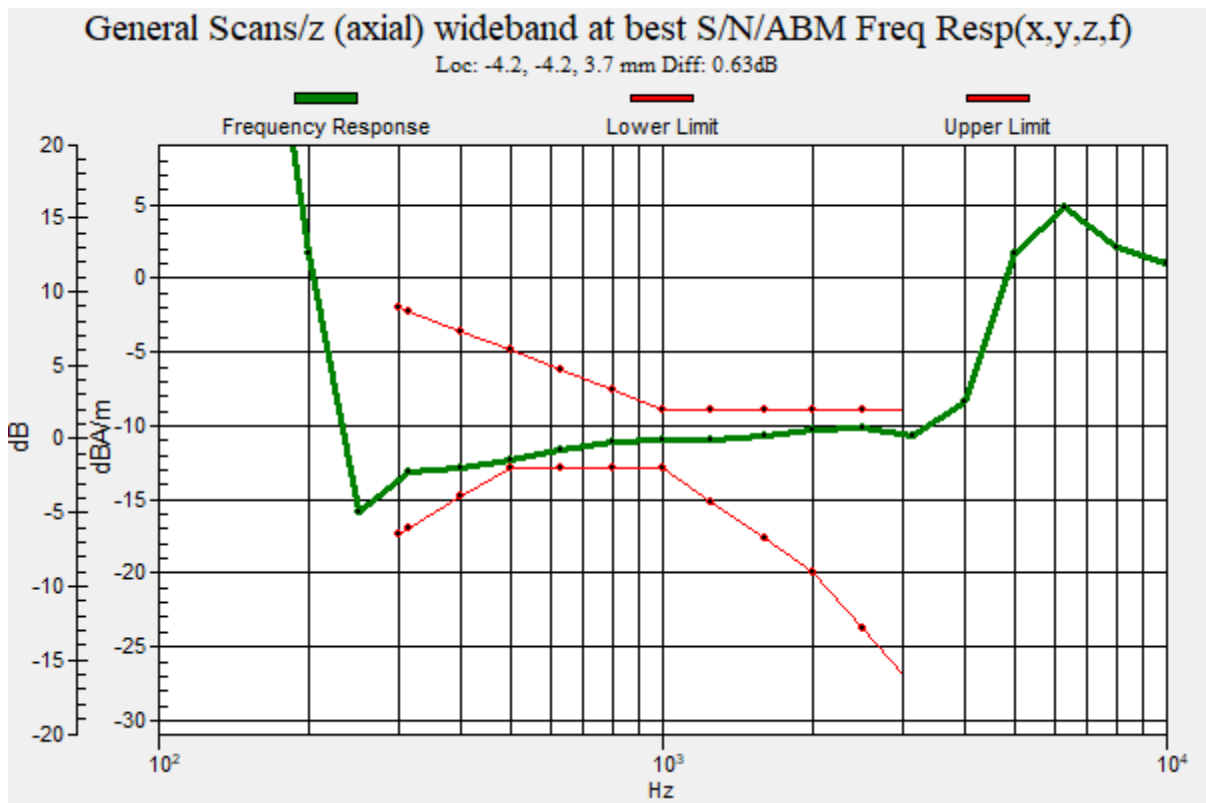

**Plot 5 T-Coil WCDMA Band II Y transversal**

Date: 2022/3/5

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1.95434

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WCDMA B2 HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 36.85 dB

ABM1 comp = -11.64 dBA/m

BWC Factor = 0.17 dB

Location: 0, -8.3, 3.7 mm

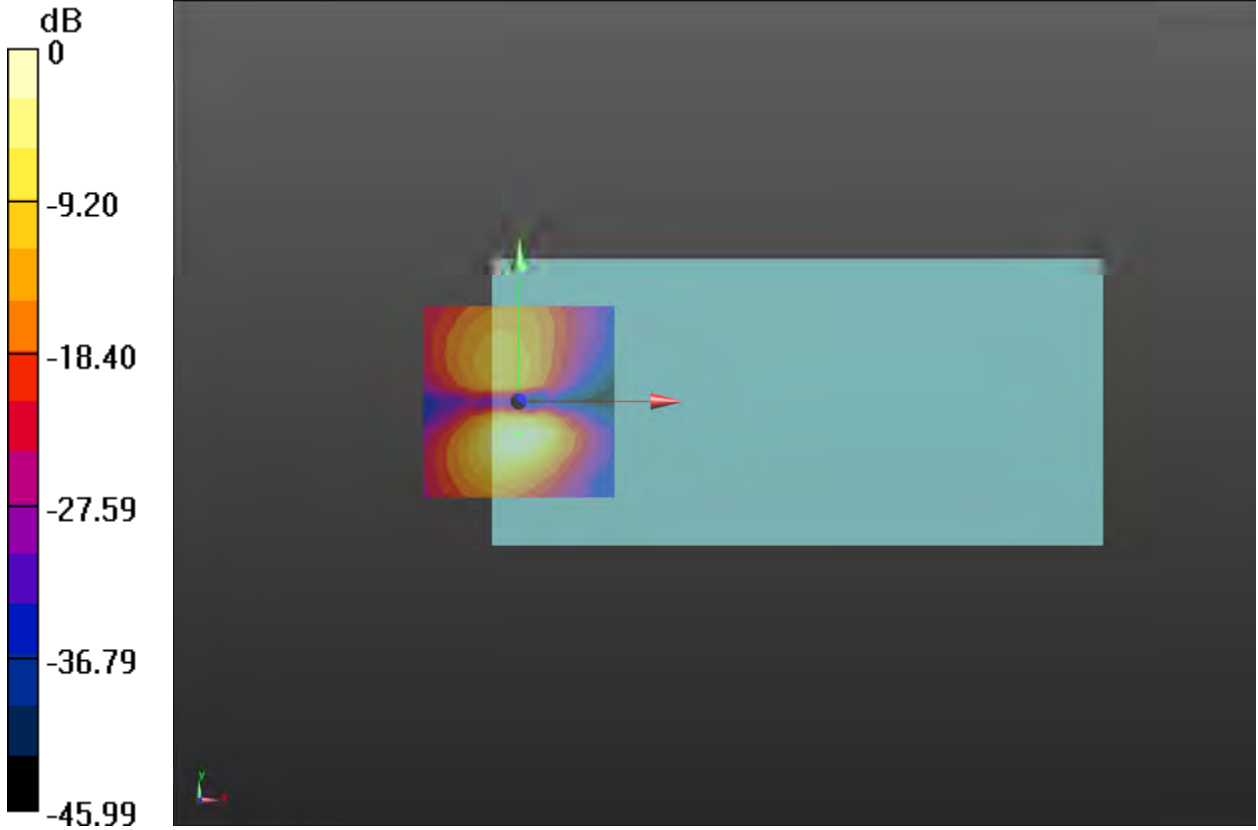

0 dB = 69.60 = 36.85 dB

**Plot 6 T-Coil WCDMA Band II Z Axial**

Date: 2022/3/4

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1.95434

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WCDMA B2 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z)****(13x13x1)**: Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 41.31 dB

ABM1 comp = -6.46 dBA/m

BWC Factor = 0.17 dB

Location: 0, 4.2, 3.7 mm

**WCDMA B2 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq****Resp(x,y,z,f) (1x1x1)**: Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 0.86 dB

BWC Factor = 10.81 dB

Location: 0, 4.2, 3.7 mm

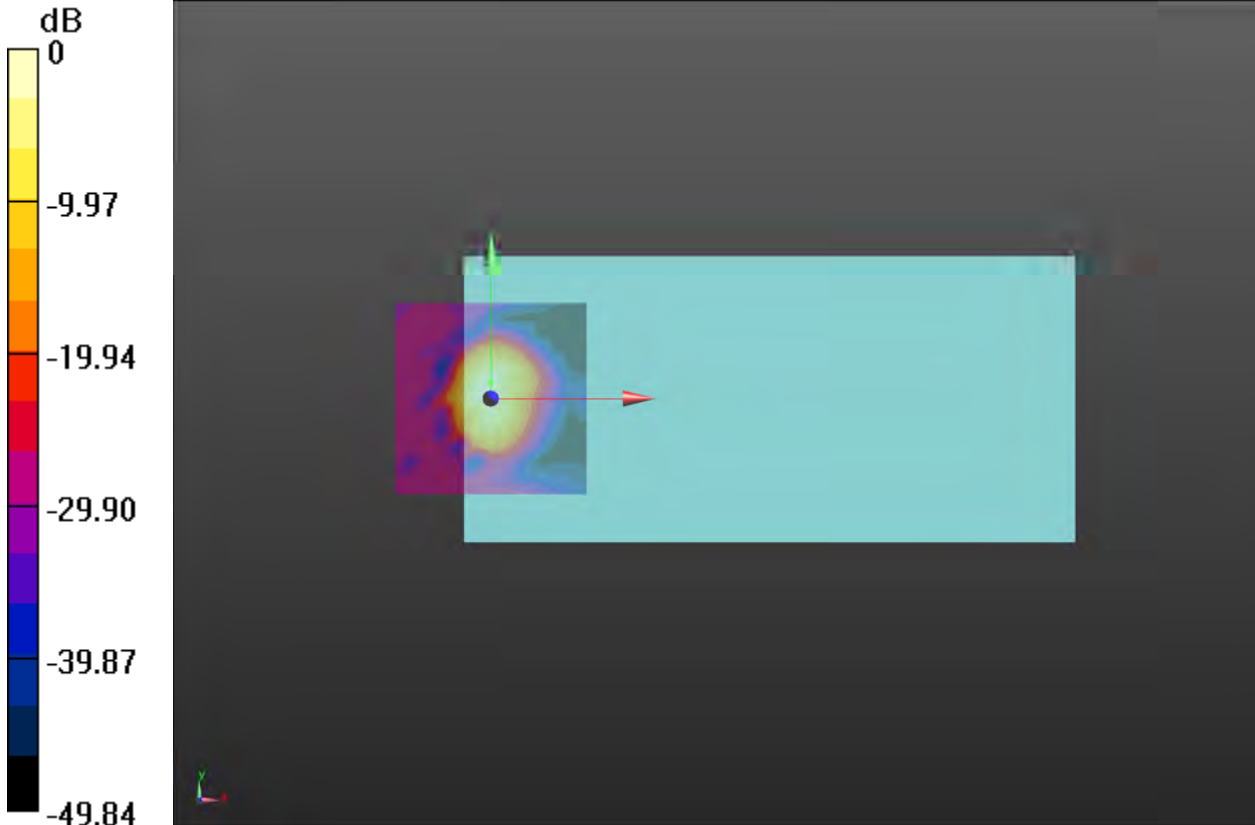

0 dB = 116.2 = 41.30 dB

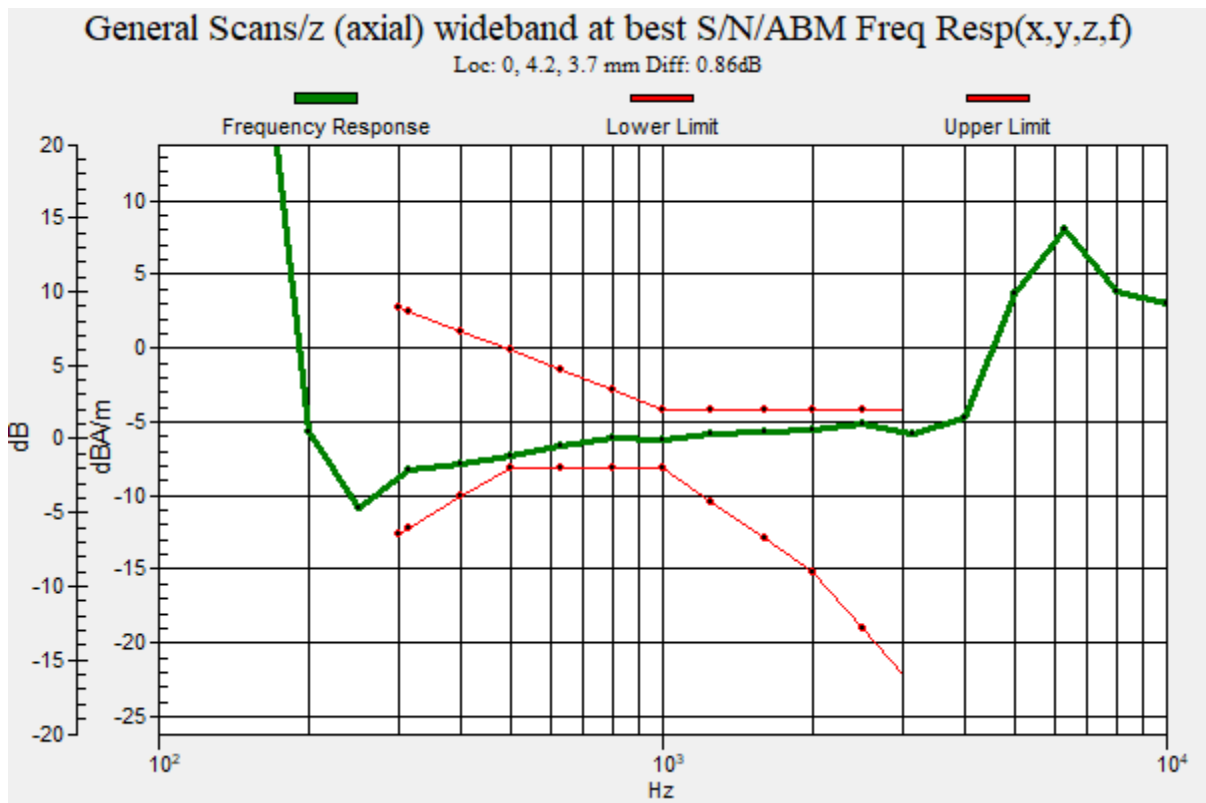

**Plot 7 T-Coil WCDMA Band IV Y transversal**

Date: 2022/3/5

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz; Duty Cycle: 1:1.95434

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WCDMA B4 HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 37.63 dB

ABM1 comp = -11.68 dBA/m

BWC Factor = 0.17 dB

Location: 0, -8.3, 3.7 mm

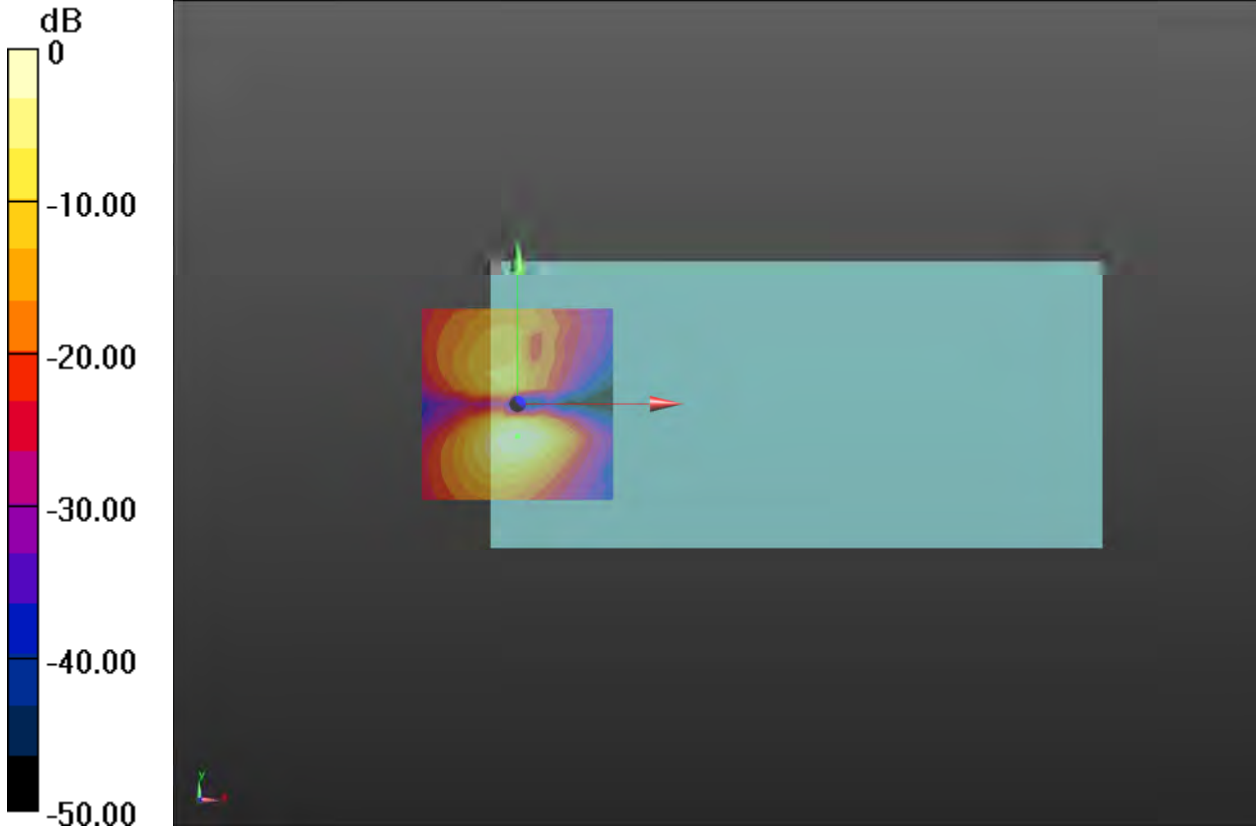

0 dB = 76.13 = 37.63 dB

**Plot 8 T-Coil WCDMA Band IV Z Axial**

Date: 2022/3/5

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz; Duty Cycle: 1:1.95434

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WCDMA B4 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z)****(13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 40.35 dB

ABM1 comp = -6.56 dBA/m

BWC Factor = 0.17 dB

Location: 0, 4.2, 3.7 mm

**WCDMA B4 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq****Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 0.59 dB


BWC Factor = 10.81 dB

Location: 0, 4.2, 3.7 mm



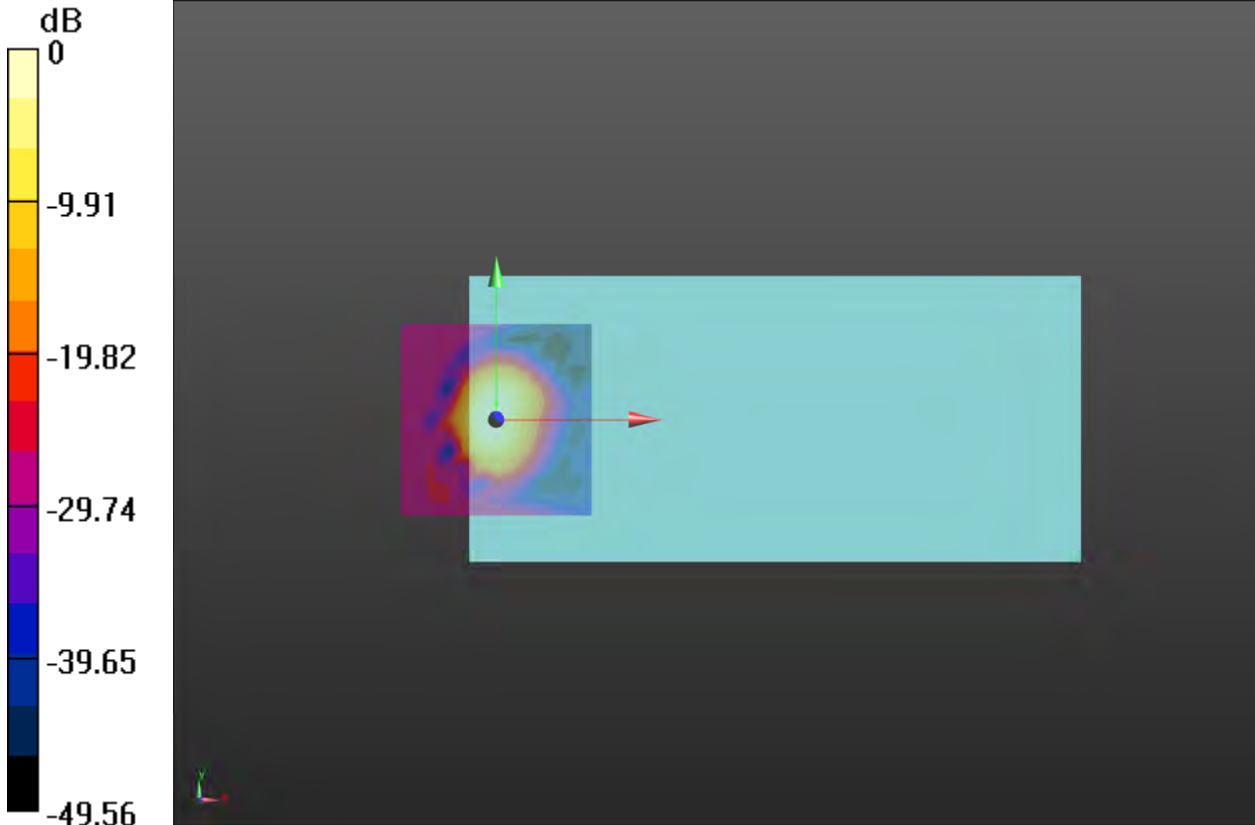

0 dB = 104.1 = 40.35 dB

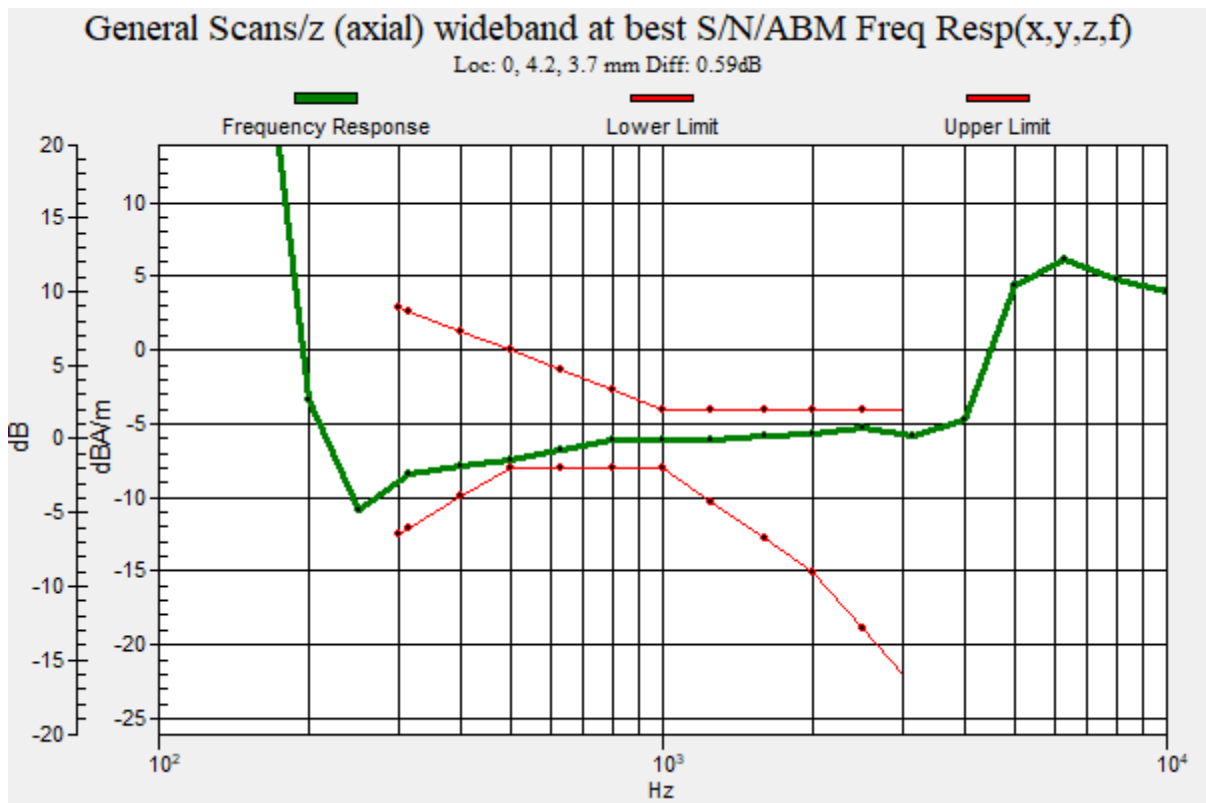

**Plot 9 T-Coil WCDMA Band V Y transversal**

Date: 2022/3/5

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz; Duty Cycle: 1:1.95434

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WCDMA B5 HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 37.30 dB

ABM1 comp = -11.67 dBA/m

BWC Factor = 0.17 dB

Location: 0, -8.3, 3.7 mm

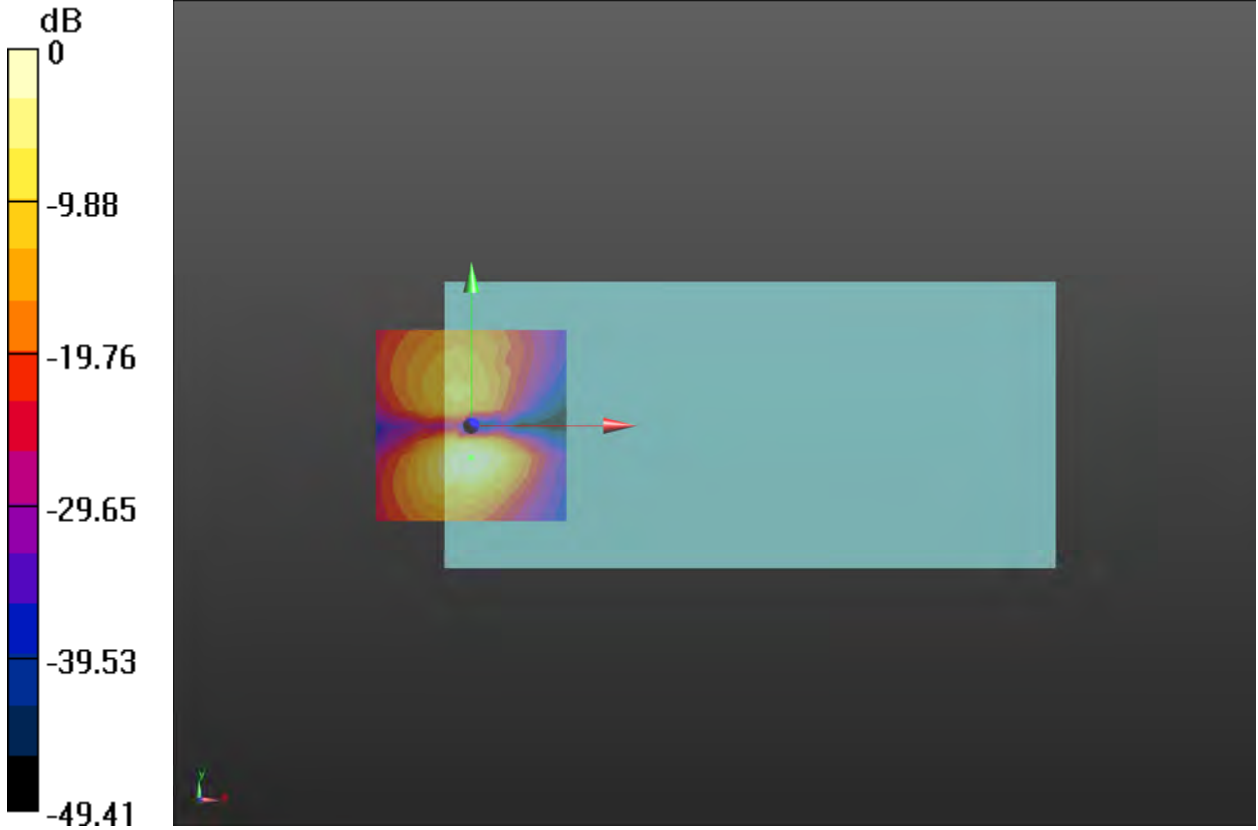

0 dB = 73.24 = 37.29 dB

**Plot 10 T-Coil WCDMA Band V Z Axial**

Date: 2022/3/5

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz; Duty Cycle: 1:1.95434

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WCDMA B5 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z)****(13x13x1)**: Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 39.87 dB

ABM1 comp = -6.54 dBA/m

BWC Factor = 0.17 dB

Location: 0, 4.2, 3.7 mm

**WCDMA B5 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq****Resp(x,y,z,f) (1x1x1)**: Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 0.77 dB

BWC Factor = 10.81 dB

Location: 0, 4.2, 3.7 mm

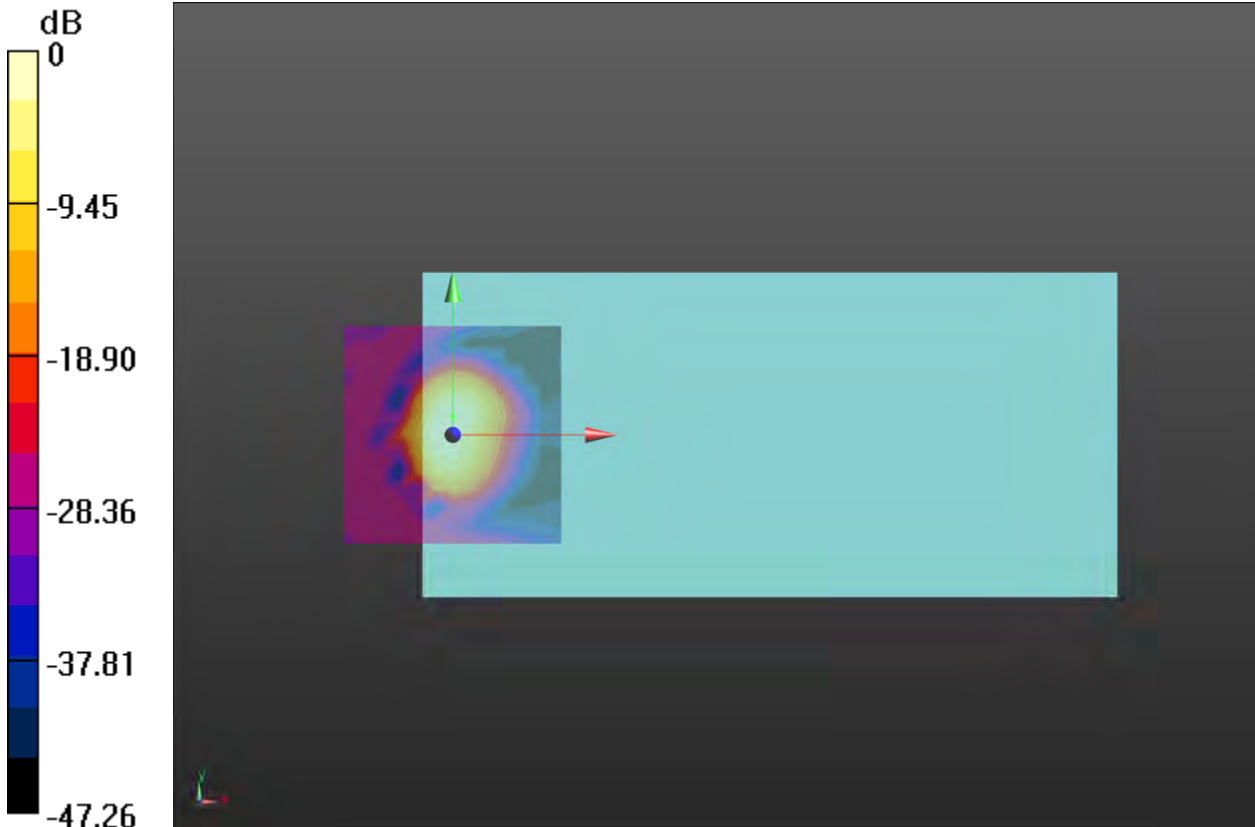

0 dB = 98.52 = 39.87 dB

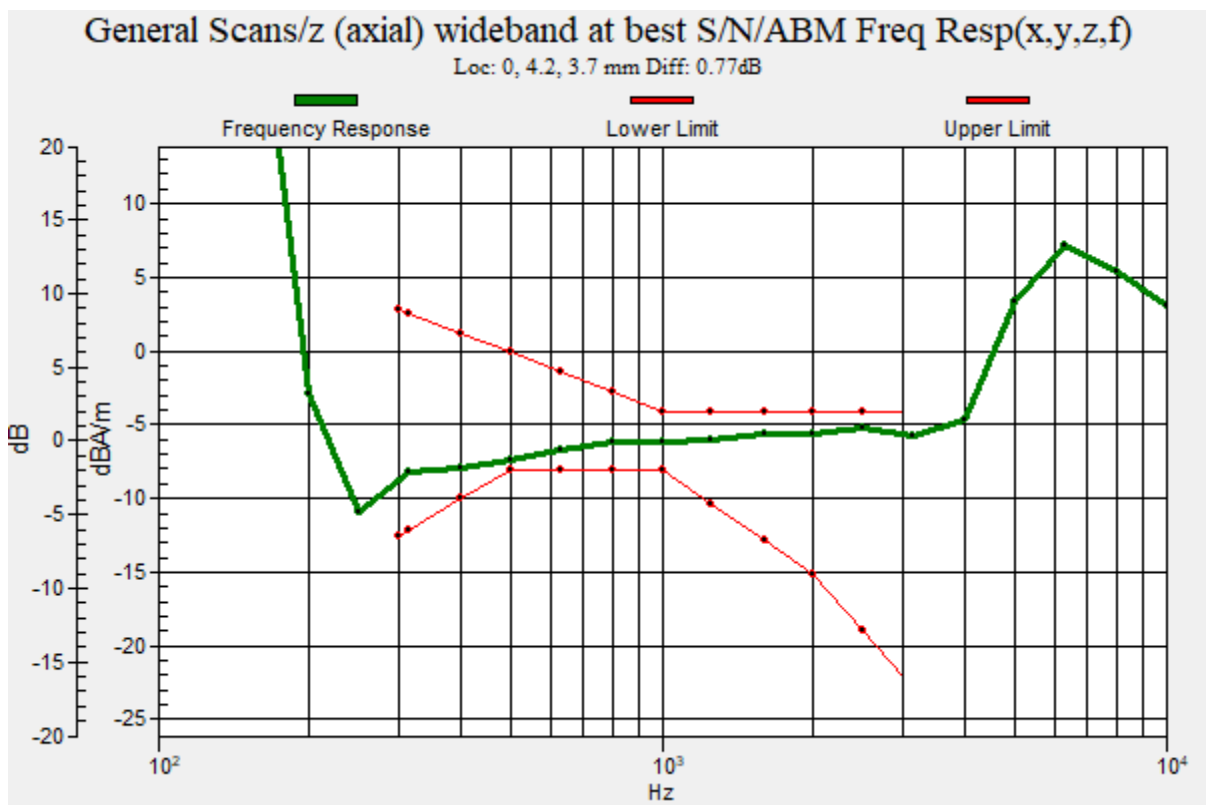

**Plot 11 T-Coil LTE Band 2 Y transversal**

Date: 2022/6/27

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1909 MHz; Duty Cycle: 1:3.73852

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B2 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 28.35 dB

ABM1 comp = -14.18 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

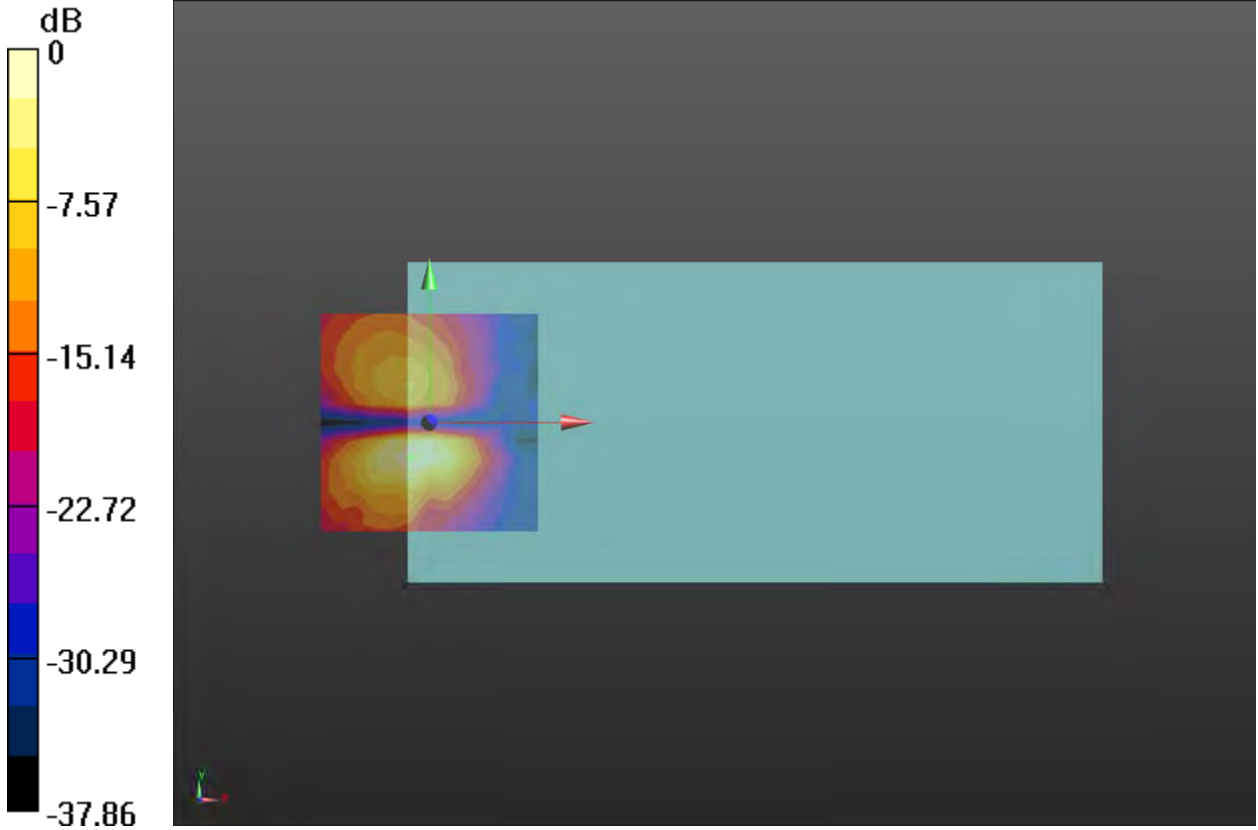

0 dB = 26.16 = 28.35 dB

**Plot 12 T-Coil LTE Band 2 Z Axial**

Date: 2022/6/27

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1909 MHz; Duty Cycle: 1:3.73852

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B2 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 34.66 dB

ABM1 comp = -8.24 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B2 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 1.69 dB


BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm



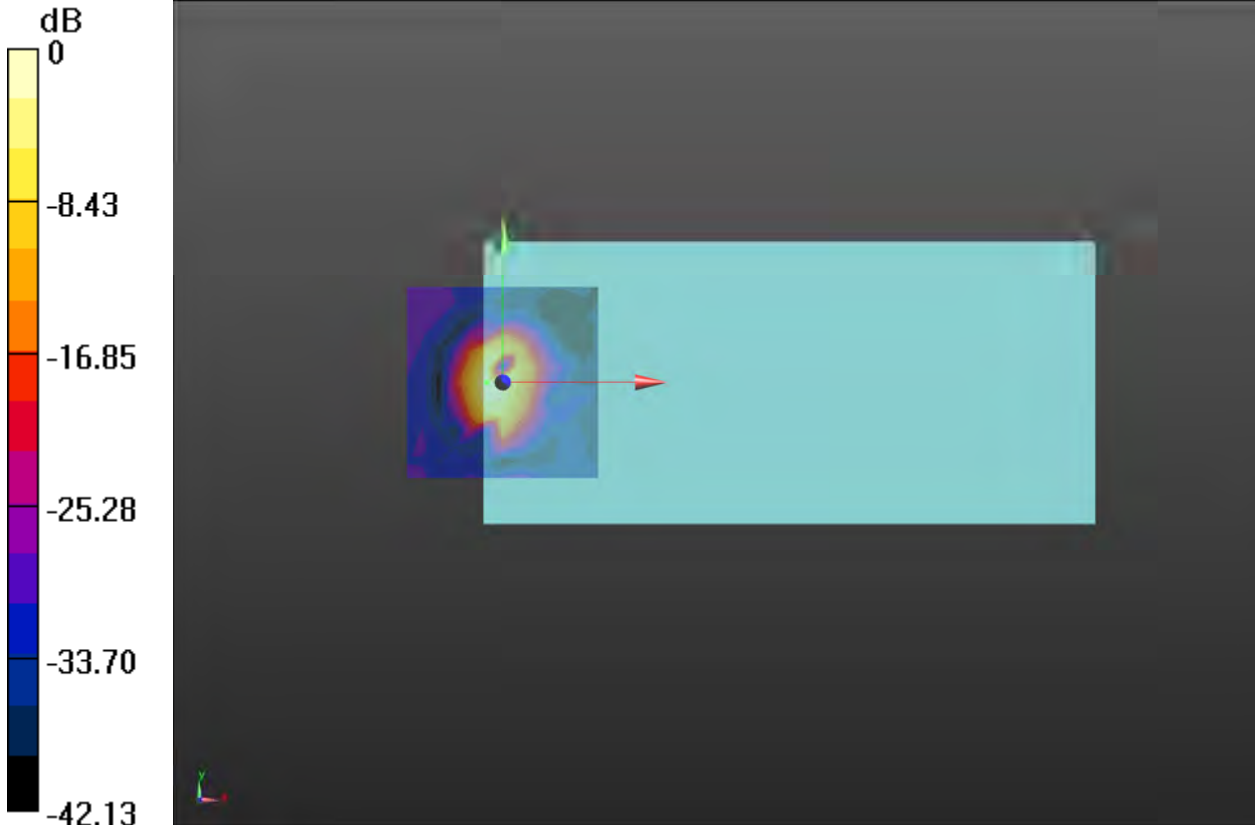

0 dB = 54.06 = 34.66 dB

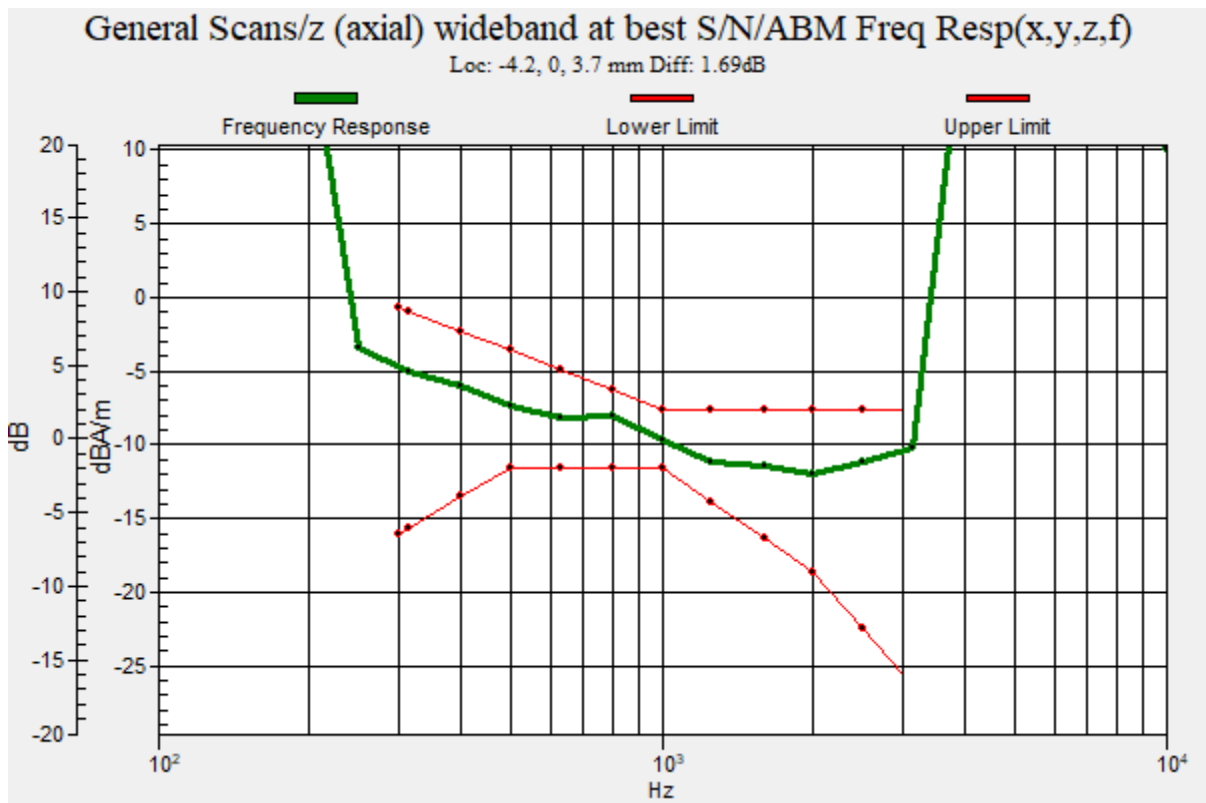

**Plot 13 T-Coil LTE Band 4 Y transversal**

Date: 2022/6/27

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1745 MHz; Duty Cycle: 1:3.73852

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B4 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 27.56 dB

ABM1 comp = -15.28 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

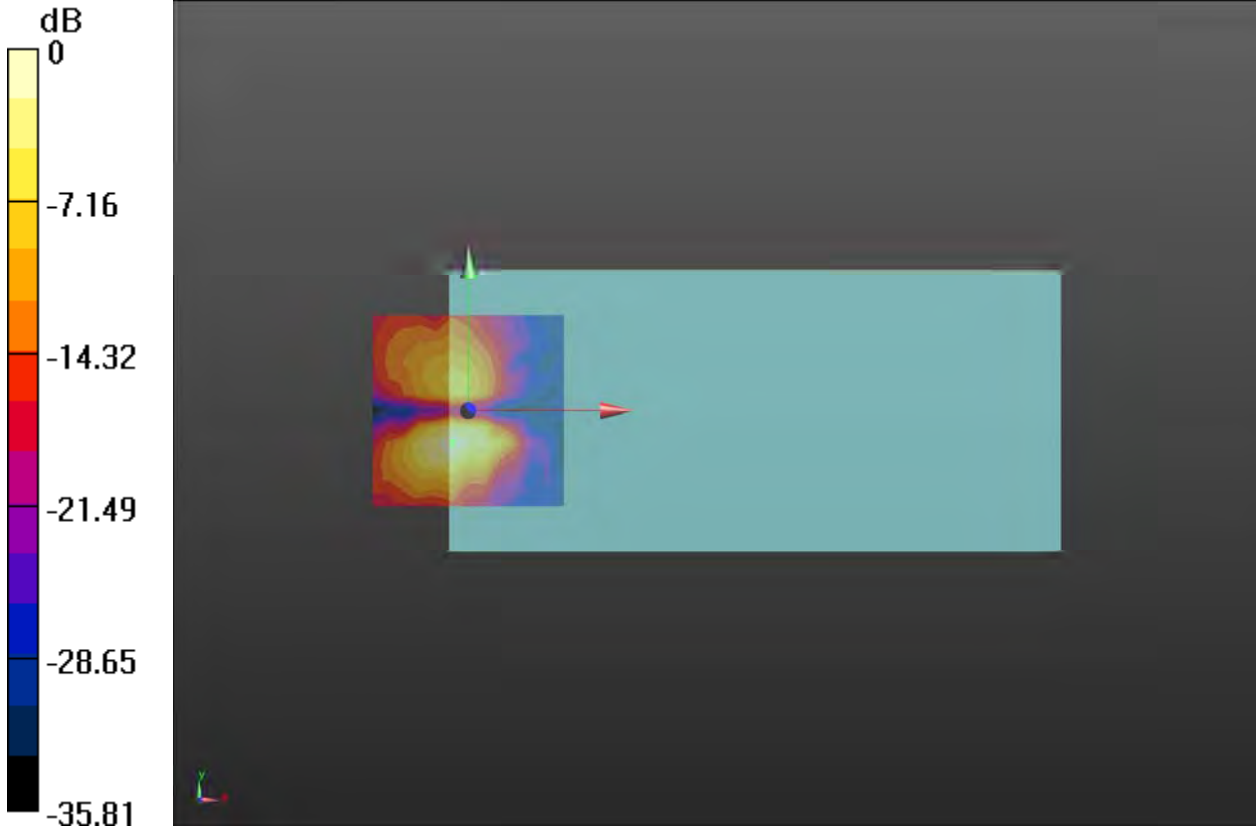

0 dB = 23.88 = 27.56 dB

**Plot 14 T-Coil LTE Band 4 Z Axial**

Date: 2022/6/27

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1745 MHz; Duty Cycle: 1:3.73852

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B4 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 34.06 dB

ABM1 comp = -4.70 dBA/m

BWC Factor = 0.16 dB

Location: 0, 0, 3.7 mm

**LTE B4 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 1.58 dB

BWC Factor = 10.81 dB

Location: 0, 0, 3.7 mm

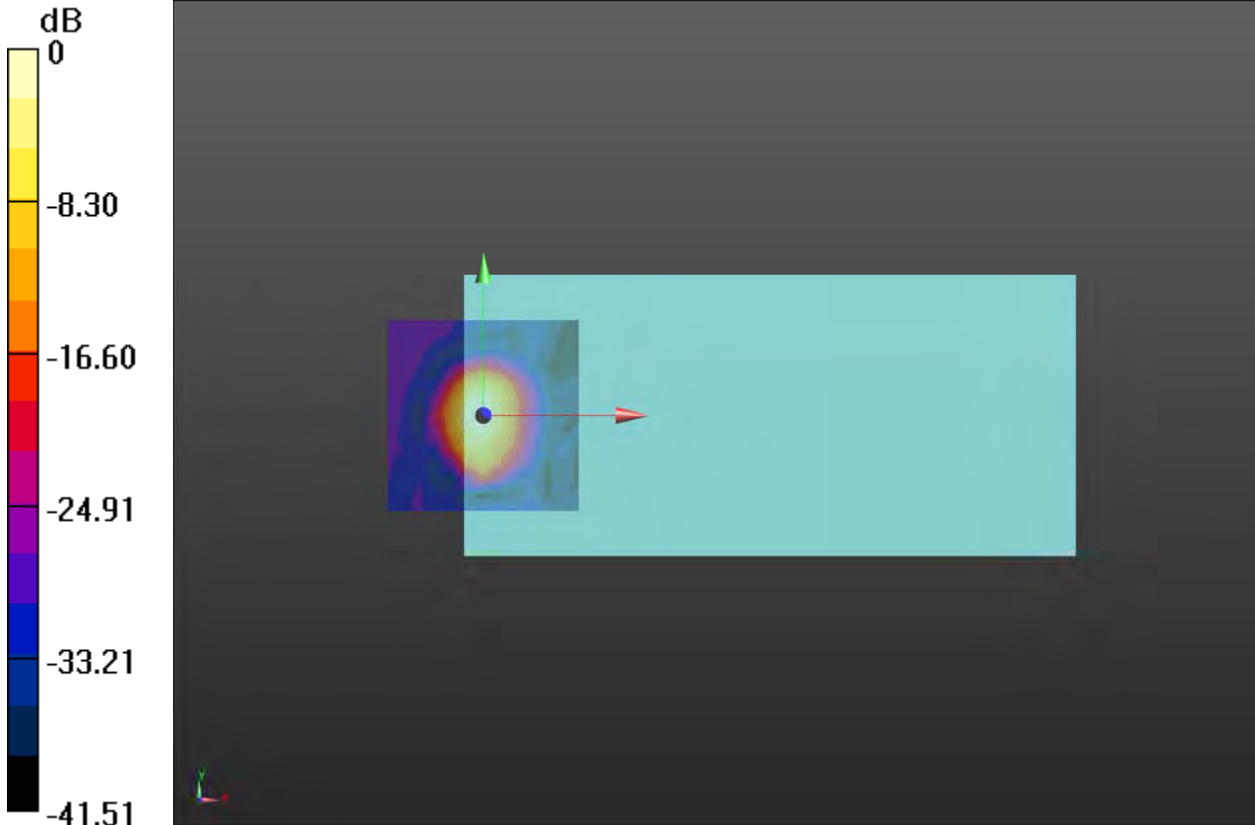

0 dB = 50.44 = 34.06 dB

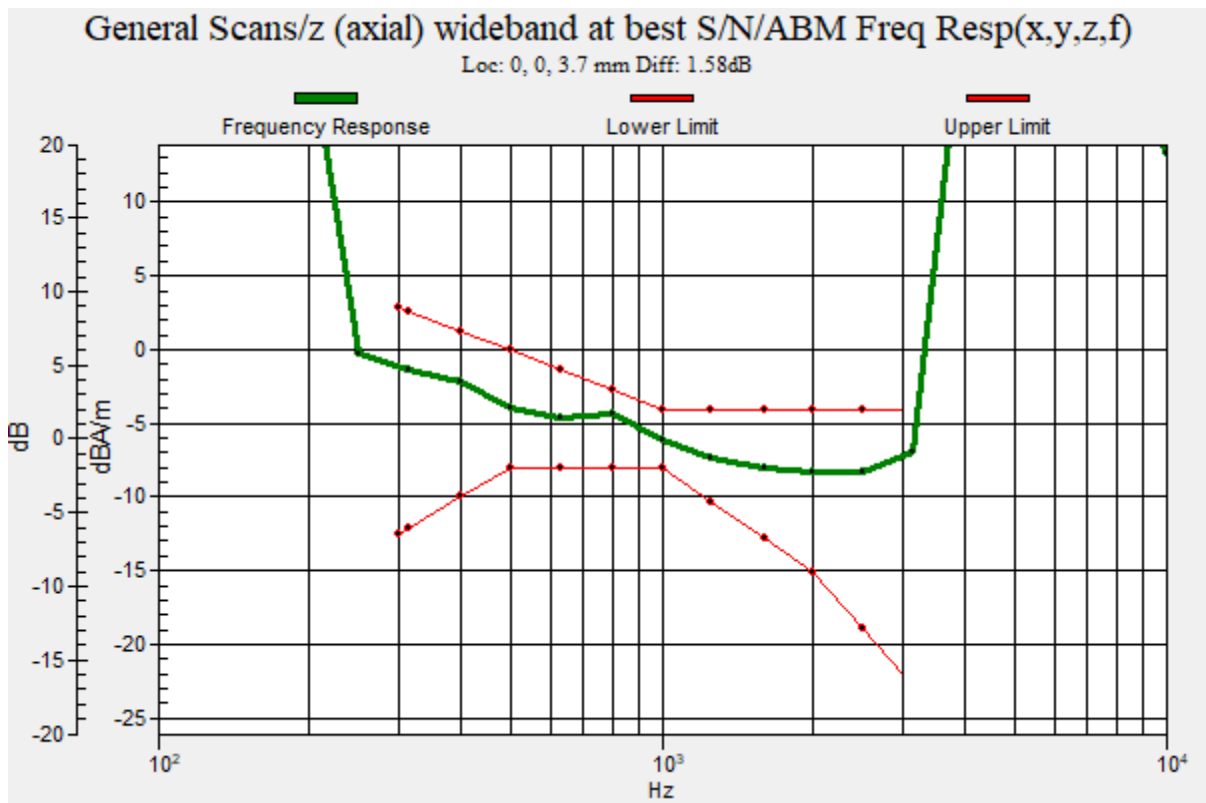

**Plot 15 T-Coil LTE Band 5 Y transversal**

Date: 2022/6/27

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 844 MHz; Duty Cycle: 1:3.73594

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B5 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 28.24 dB

ABM1 comp = -11.92 dBA/m

BWC Factor = 0.16 dB

Location: 0, -8.3, 3.7 mm

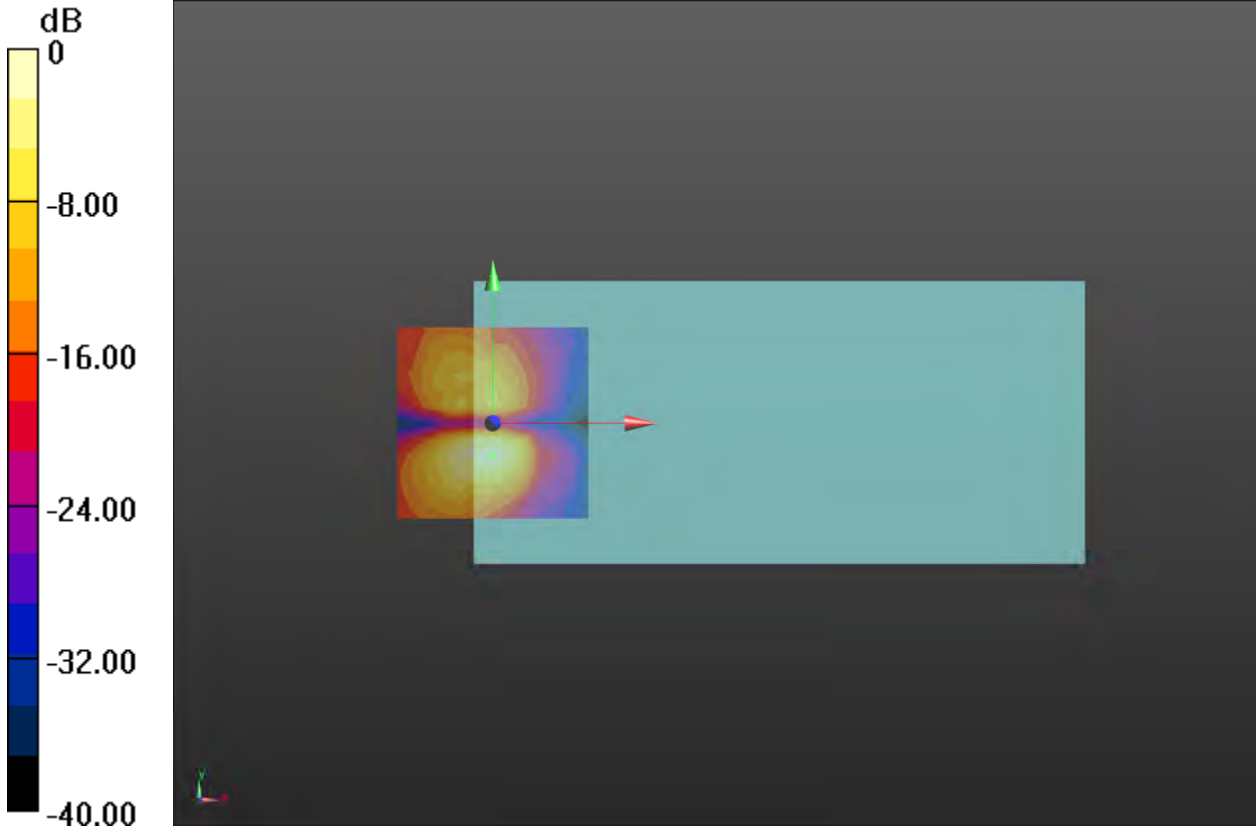

0 dB = 25.83 = 28.24 dB

**Plot 16 T-Coil LTE Band 5 Z Axial**

Date: 2022/6/27

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 844 MHz; Duty Cycle: 1:3.73594

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B5 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 34.38 dB

ABM1 comp = -4.70 dBA/m

BWC Factor = 0.16 dB

Location: 0, 0, 3.7 mm

**LTE B5 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 1.58 dB


BWC Factor = 10.81 dB

Location: 0, 0, 3.7 mm



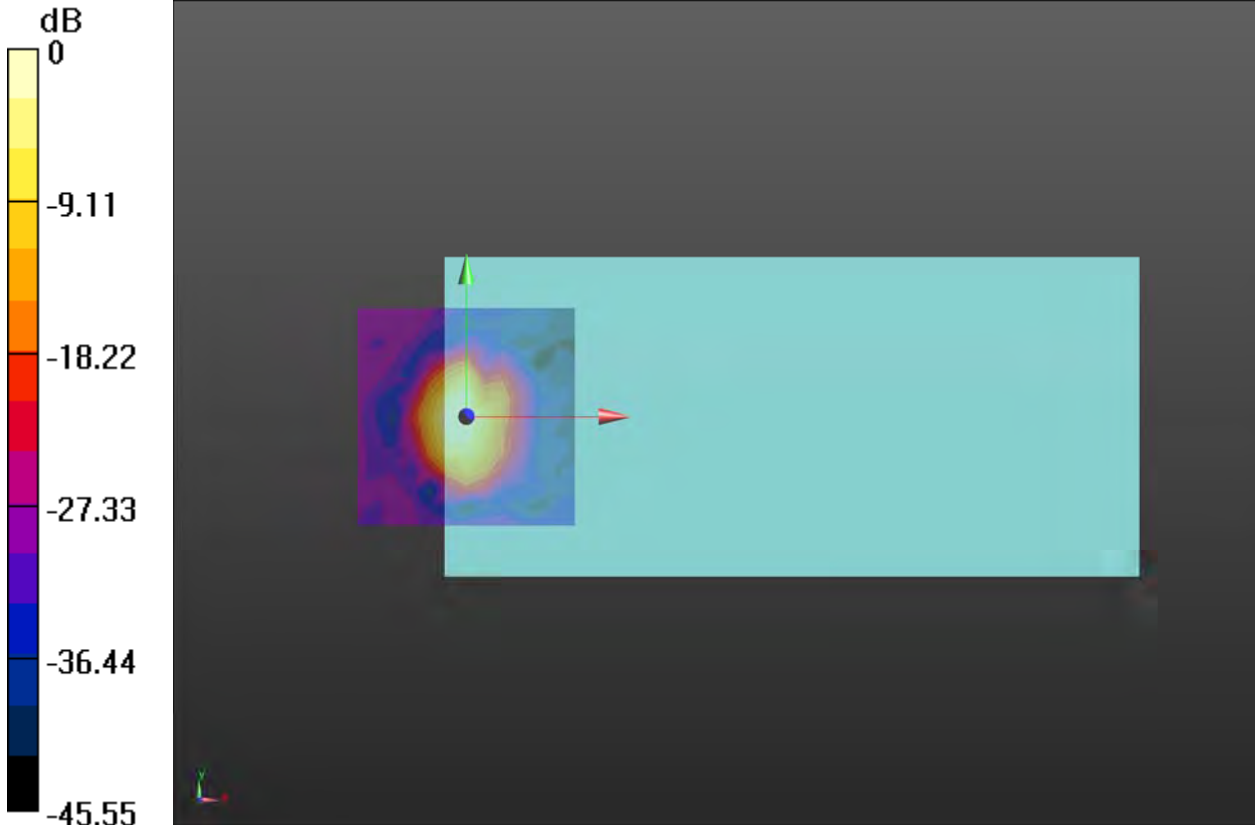

0 dB = 52.34 = 34.38 dB

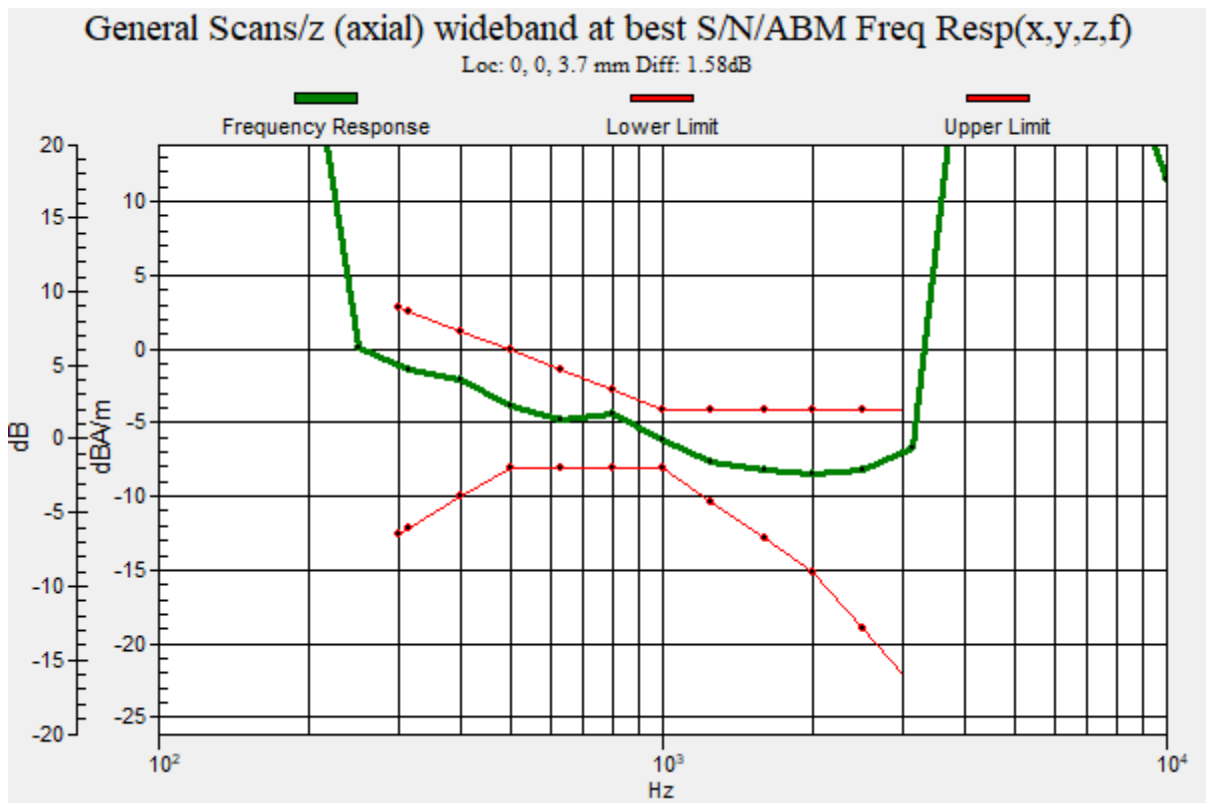

**Plot 17 T-Coil LTE Band 7 Y transversal**

Date: 2022/6/27

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2560 MHz; Duty Cycle: 1:3.73852

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B7 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 27.89 dB

ABM1 comp = -15.32 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

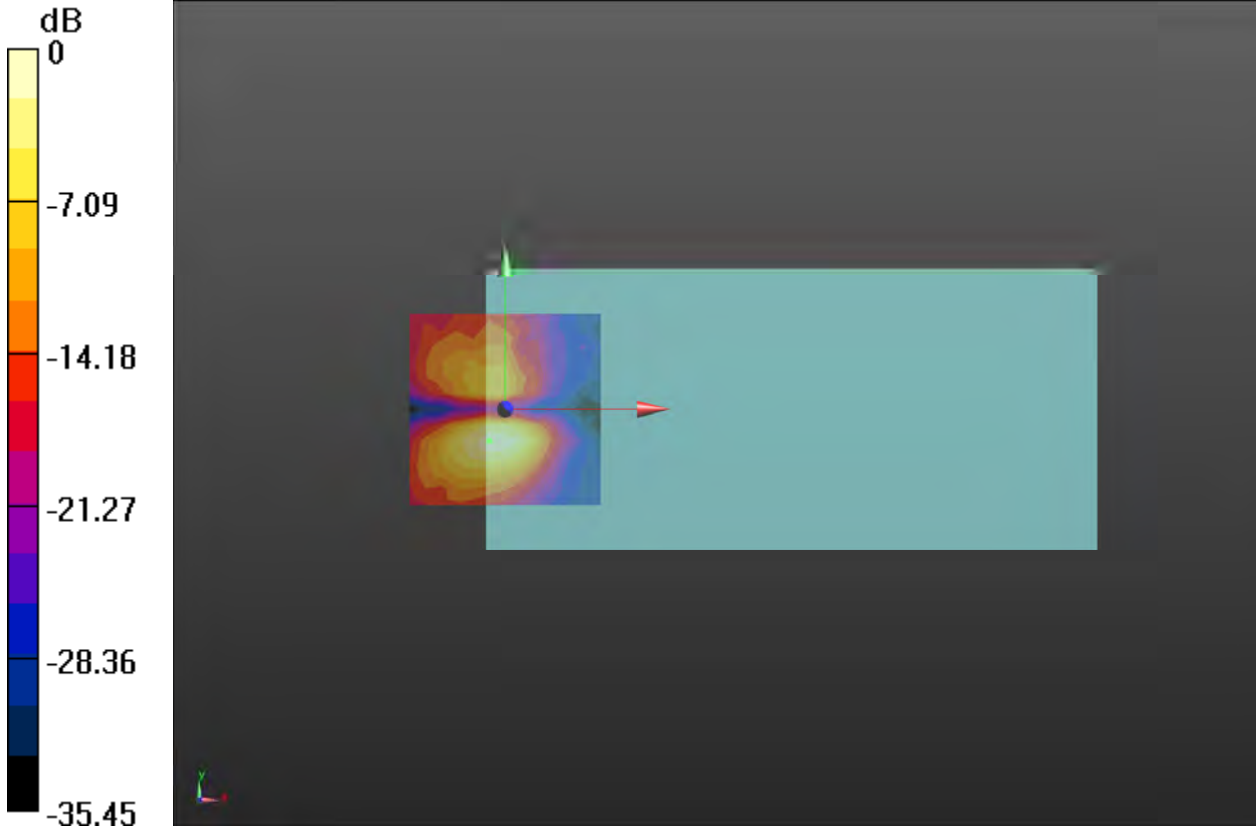

0 dB = 24.81 = 27.89 dB

**Plot 18 T-Coil LTE Band 7 Z Axial**

Date: 2022/6/27

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2560 MHz; Duty Cycle: 1:3.73852

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B7 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 33.37 dB

ABM1 comp = -9.48 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B7 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 1.65 dB

BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm

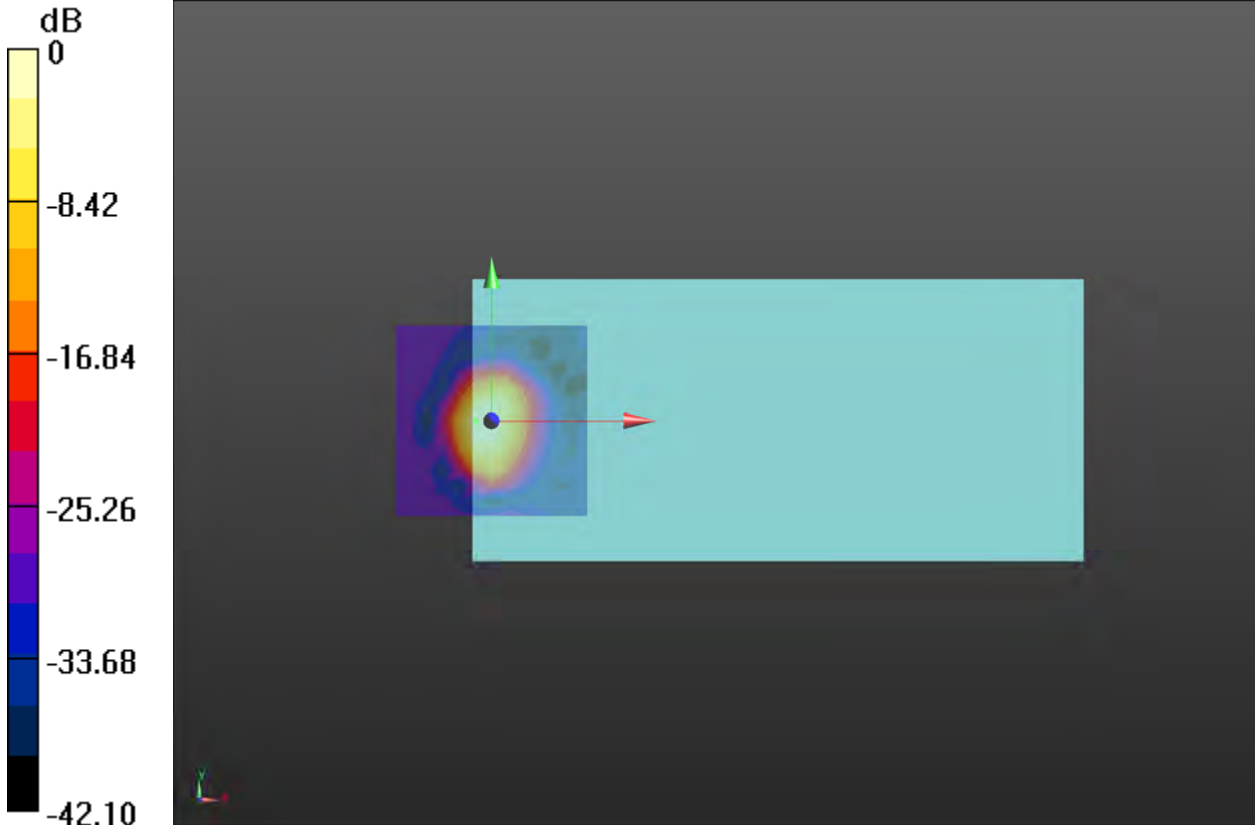

0 dB = 46.59 = 33.37 dB

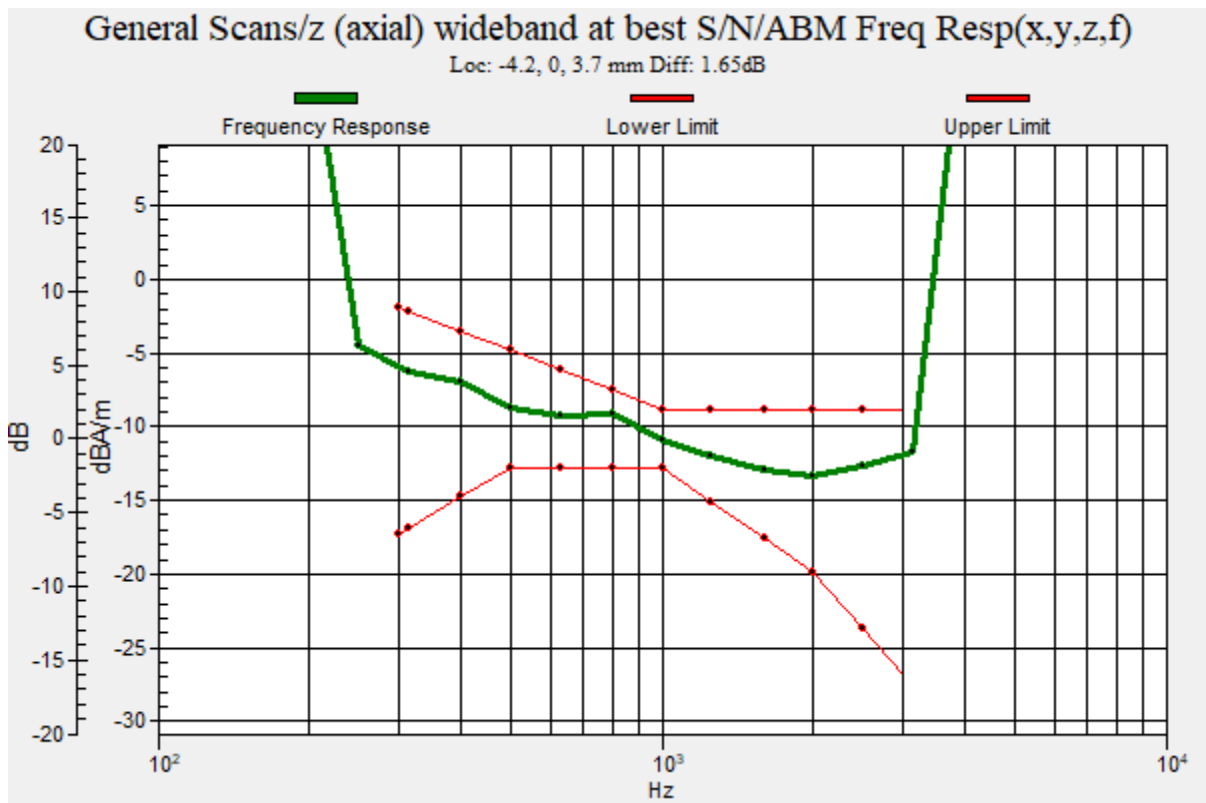

**Plot 19 T-Coil LTE Band 12 Y transversal**

Date: 2022/6/27

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 711 MHz; Duty Cycle: 1:3.73594

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B12 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 28.14 dB

ABM1 comp = -14.59 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

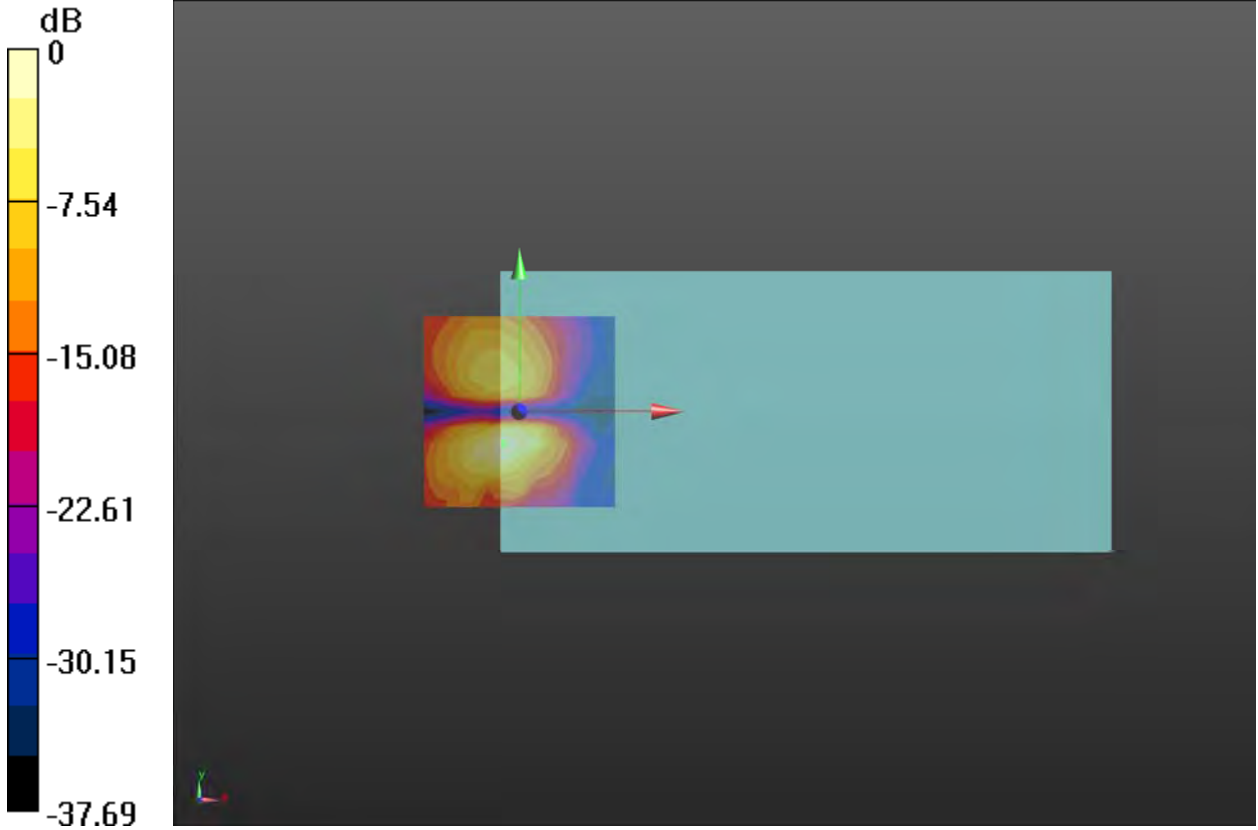

0 dB = 25.54 = 28.14 dB

**Plot 20 T-Coil LTE Band 12 Z Axial**

Date: 2022/6/27

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 711 MHz; Duty Cycle: 1:3.73594

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B12 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 34.54 dB

ABM1 comp = -8.26 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B12 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 1.52 dB


BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm



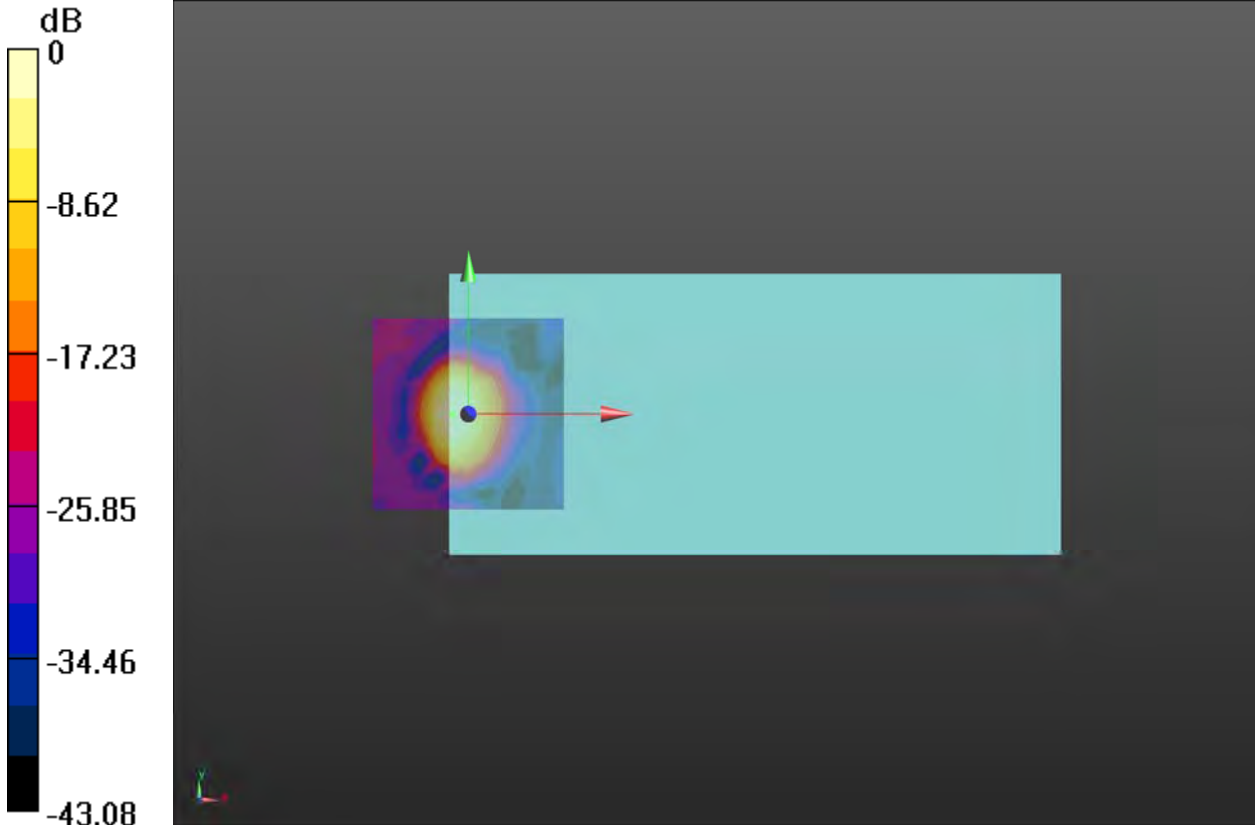

0 dB = 53.36 = 34.54 dB

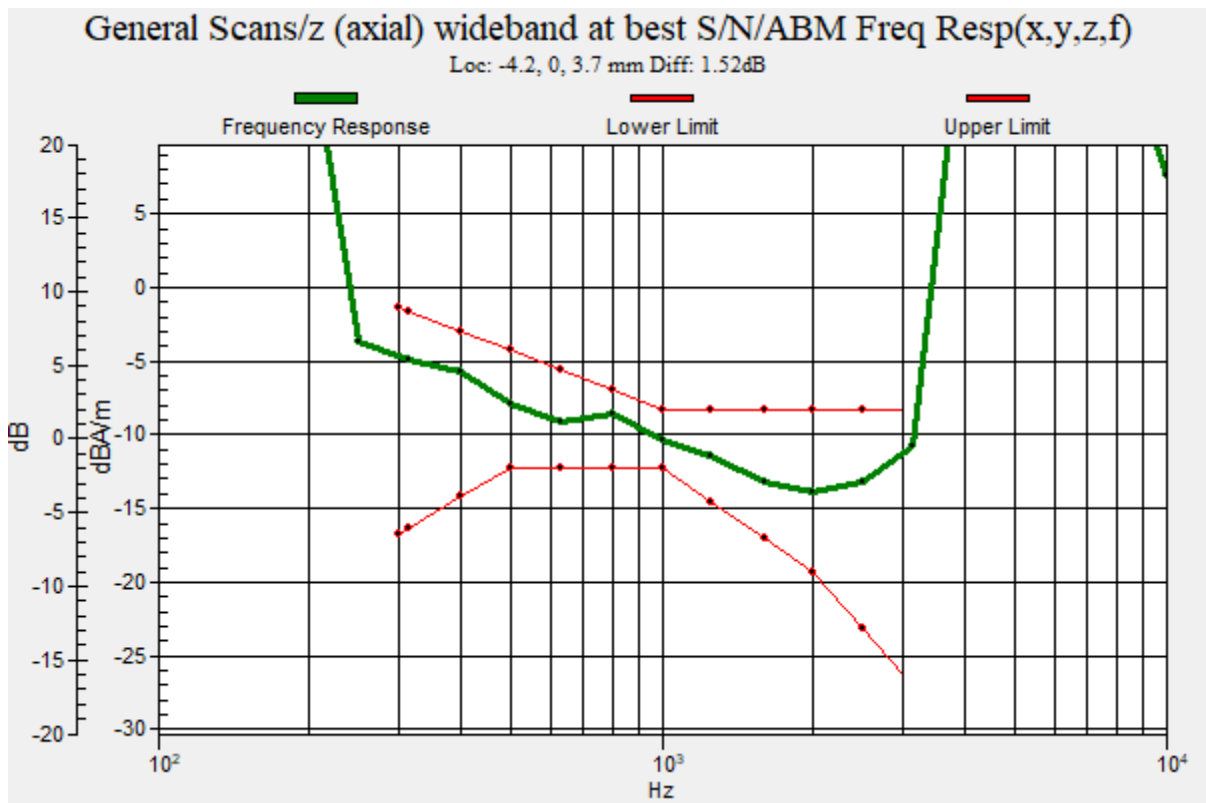

**Plot 21 T-Coil LTE Band 13 Y transversal**

Date: 2022/6/27

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 782 MHz; Duty Cycle: 1:3.73594

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B13 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 29.62 dB

ABM1 comp = -14.84 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

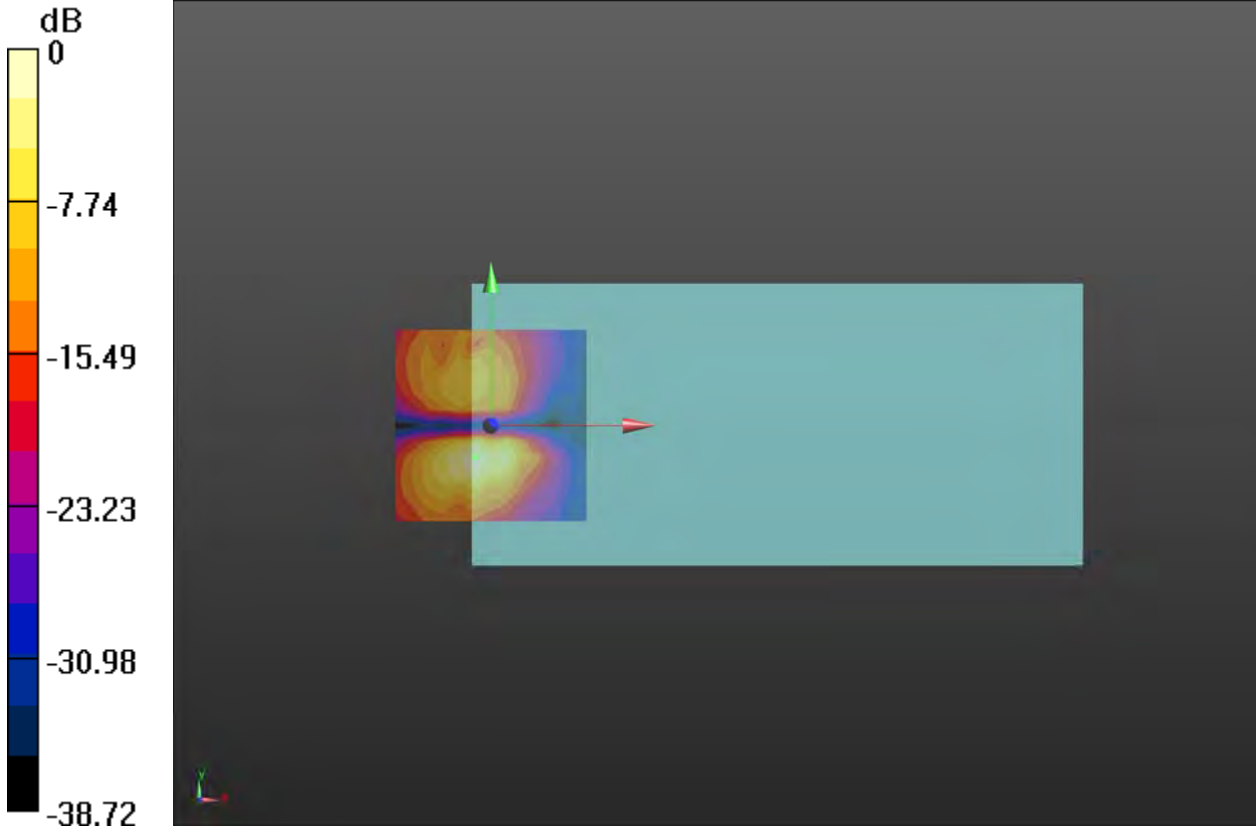

0 dB = 30.27 = 29.62 dB

**Plot 22 T-Coil LTE Band 13 Z Axial**

Date: 2022/6/27

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 782 MHz; Duty Cycle: 1:3.73594

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B13 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 35.74 dB

ABM1 comp = -8.58 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B13 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 1.67 dB

BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm

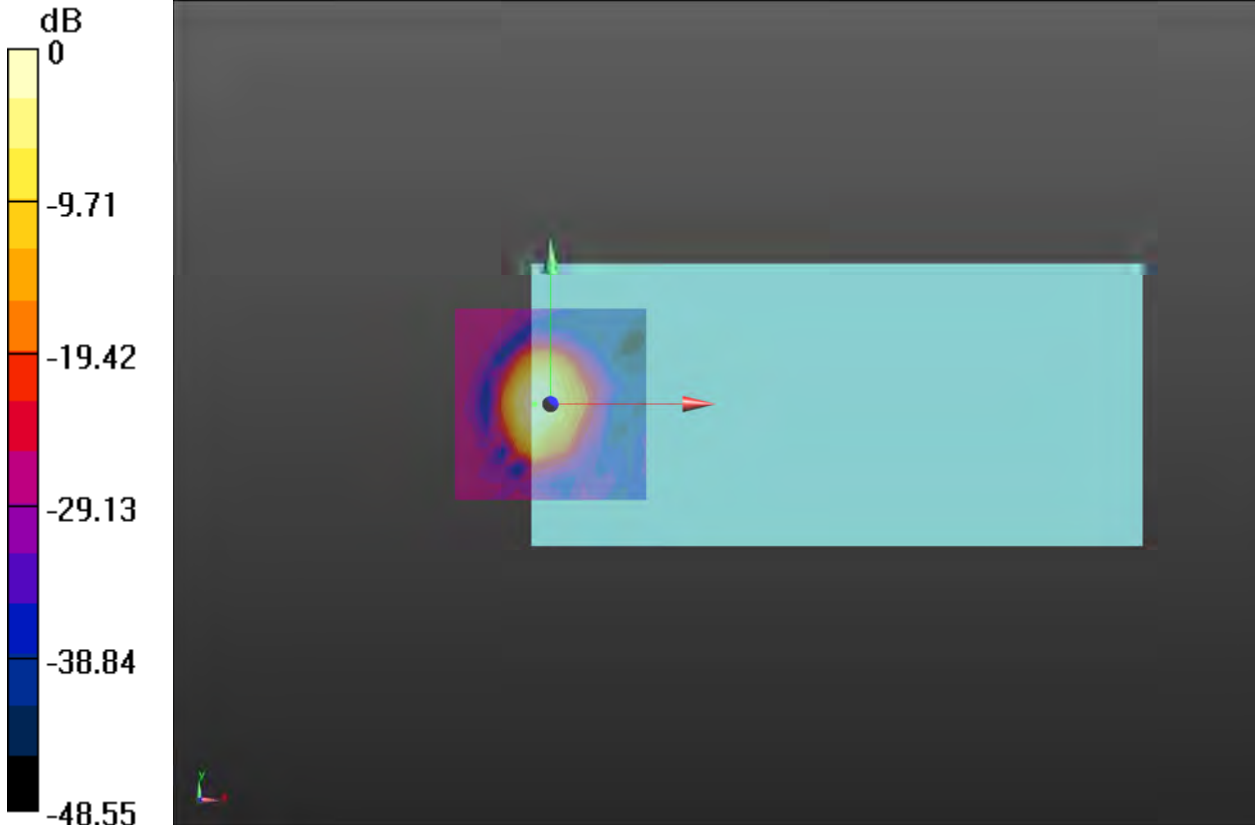

0 dB = 61.26 = 35.74 dB

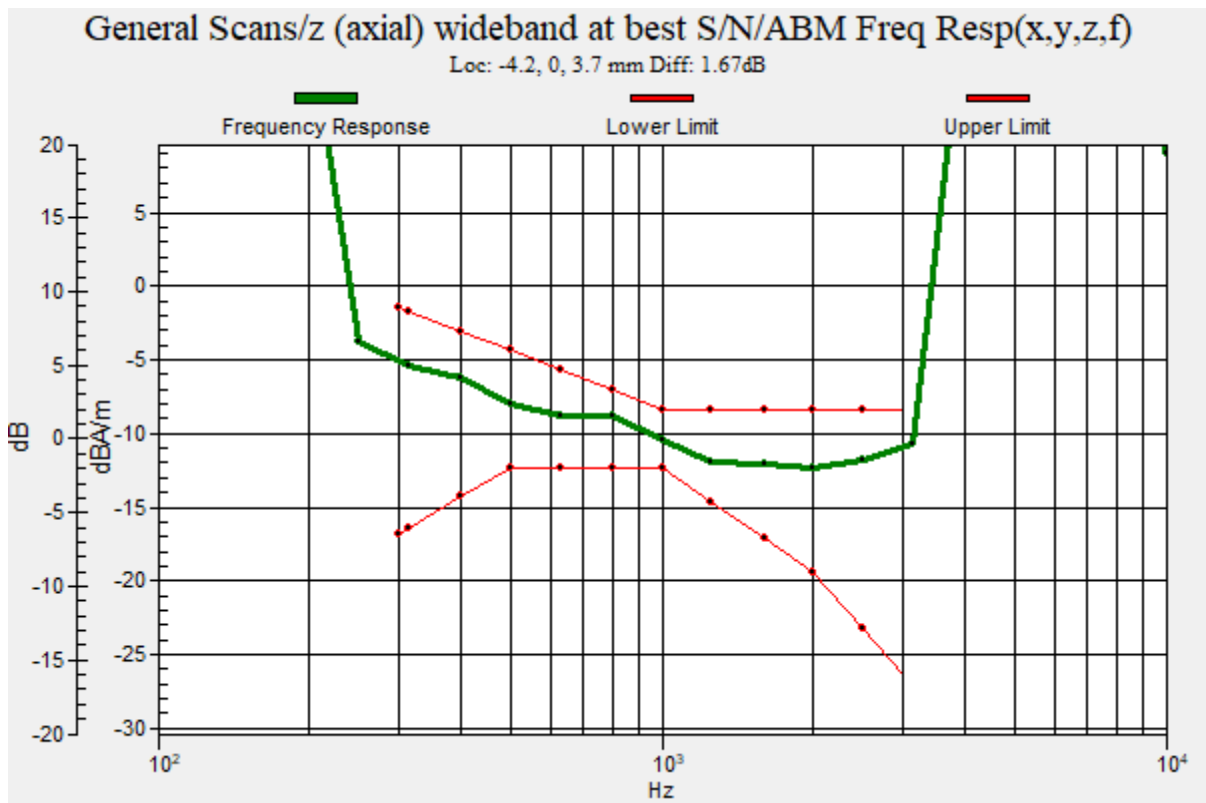

**Plot 23 T-Coil LTE Band 17 Y transversal**

Date: 2022/6/27

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 711 MHz; Duty Cycle: 1:3.73594

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B17 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 28.60 dB

ABM1 comp = -12.06 dBA/m

BWC Factor = 0.16 dB

Location: 0, -8.3, 3.7 mm

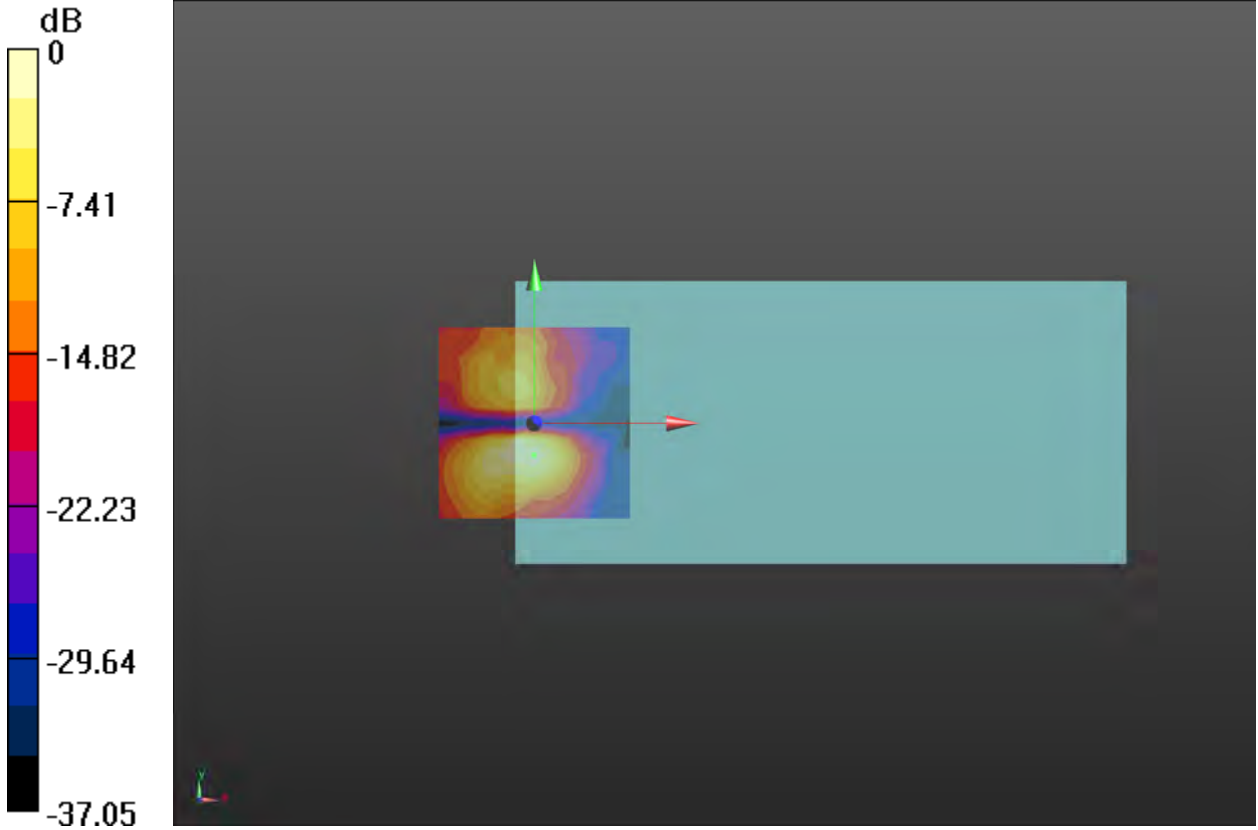

0 dB = 26.90 = 28.60 dB

**Plot 24 T-Coil LTE Band 17 Z Axial**

Date: 2022/6/27

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 711 MHz; Duty Cycle: 1:3.73594

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B17 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 35.68 dB

ABM1 comp = -9.83 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -4.2, 3.7 mm

**LTE B17 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 1.57 dB


BWC Factor = 10.81 dB

Location: -4.2, -4.2, 3.7 mm



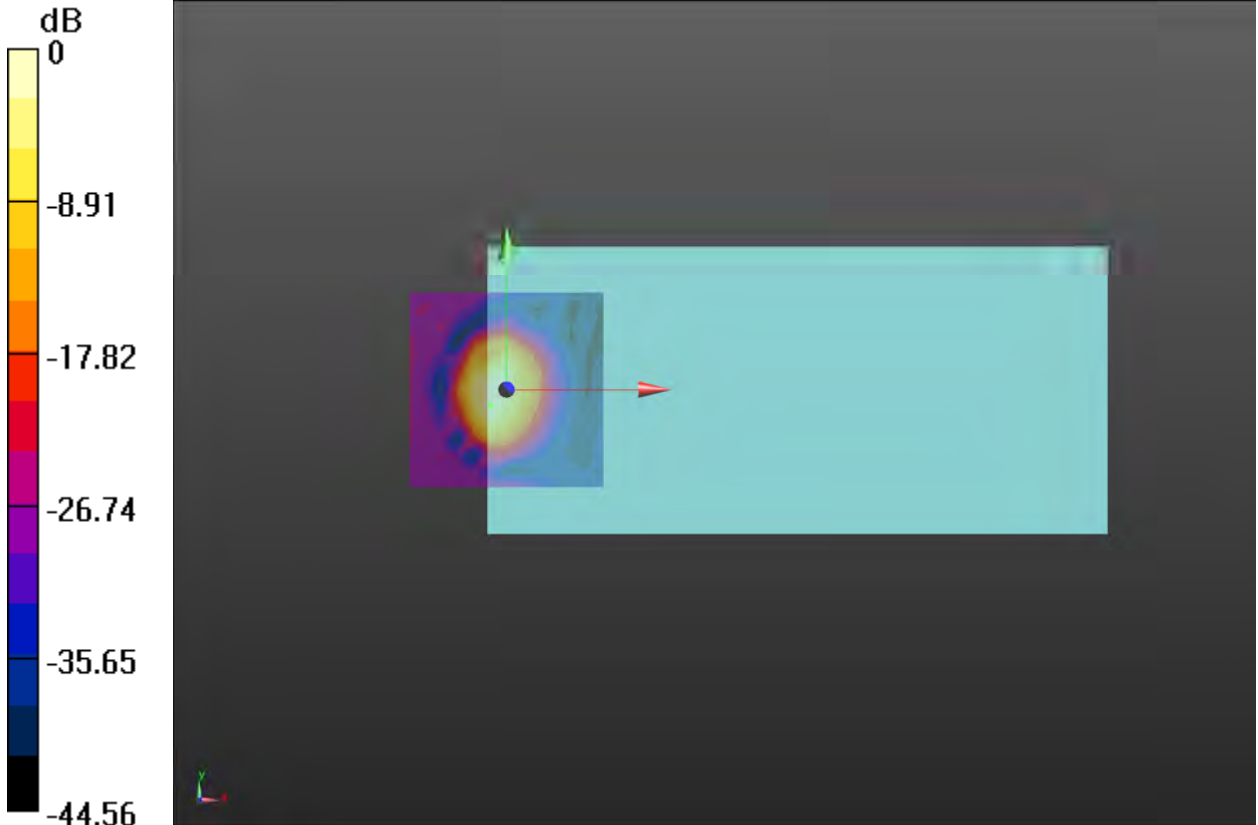

0 dB = 60.85 = 35.69 dB

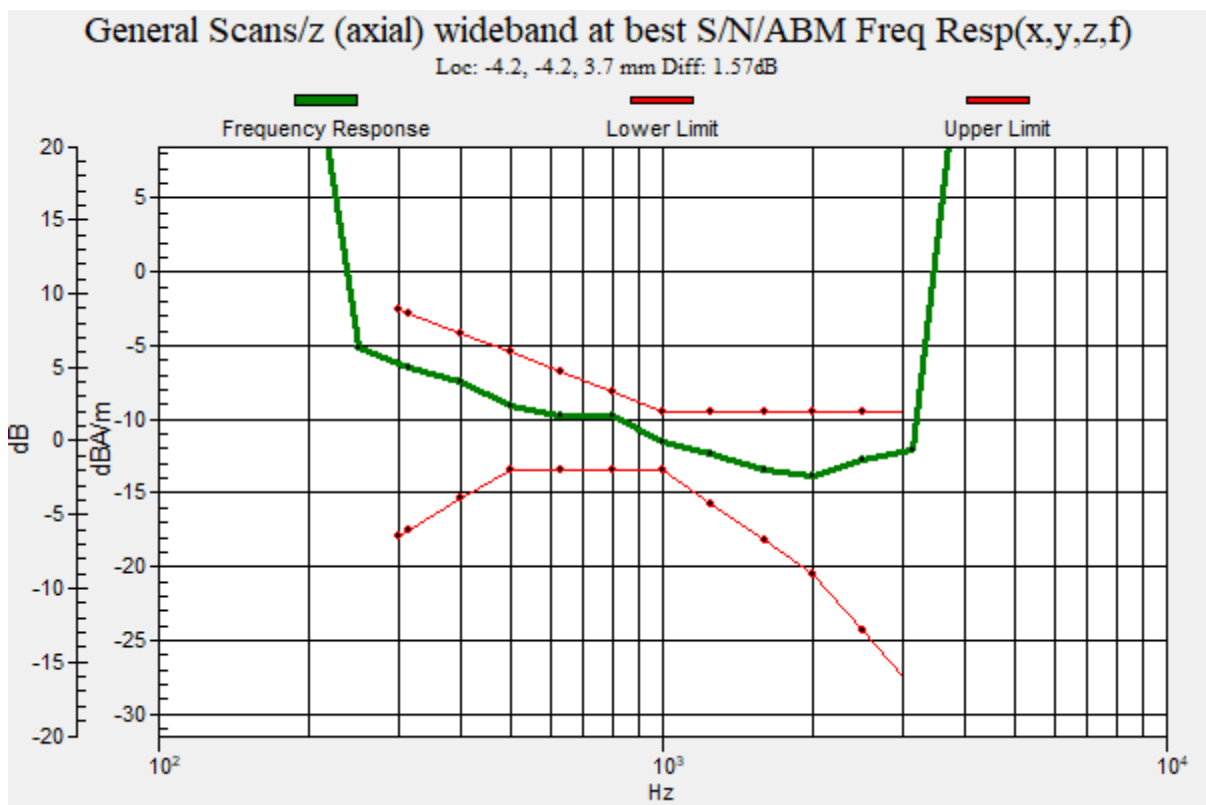

**Plot 25 T-Coil LTE Band 19 Y transversal**

Date: 2022/6/28

Communication System: UID 10181 - CAE, LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK); Frequency: 837.5 MHz; Duty Cycle: 1:3.7368

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B17 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 26.94 dB

ABM1 comp = -14.59 dBA/m

BWC Factor = 0.16 dB

Location: 0, -4.2, 3.7 mm

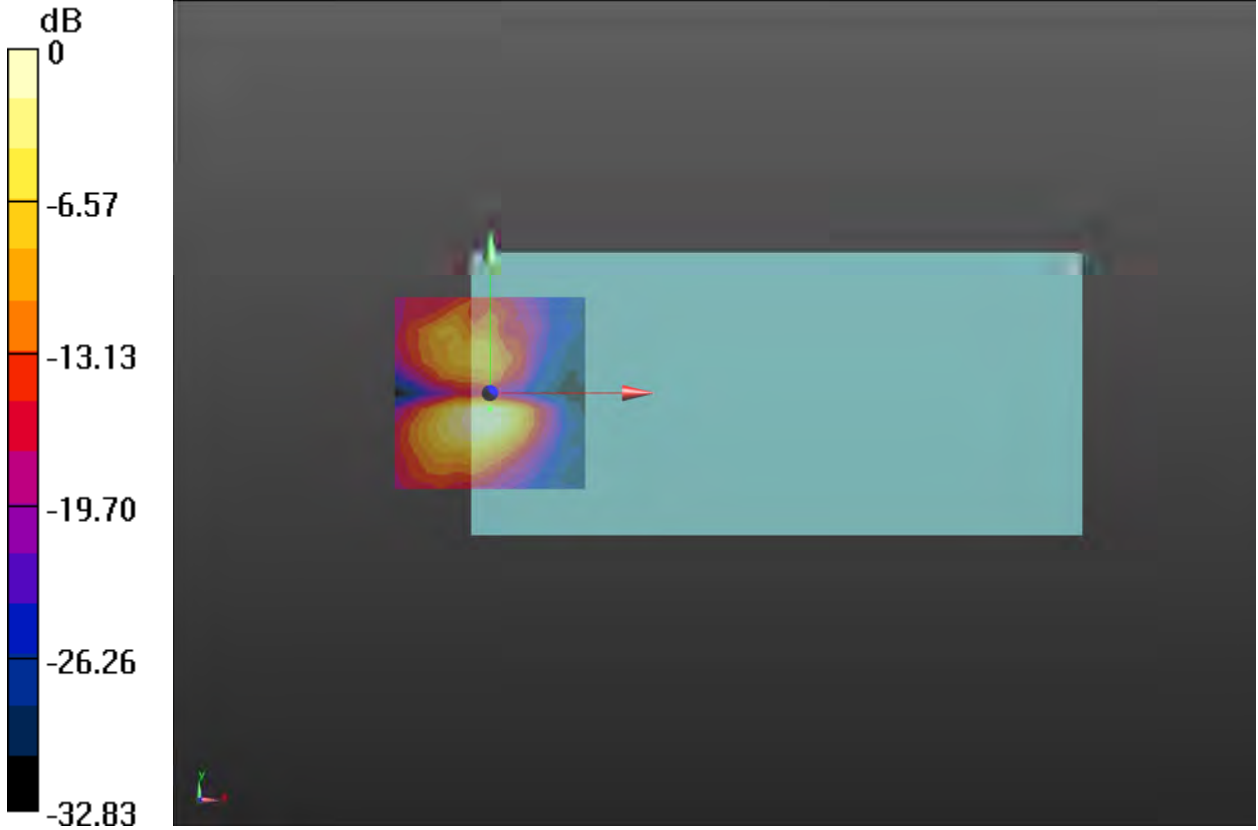

0 dB = 22.24 = 26.94 dB

**Plot 26 T-Coil LTE Band 19 Z Axial**

Date: 2022/6/28

Communication System: UID 10181 - CAE, LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK); Frequency: 837.5 MHz; Duty Cycle: 1:3.7368

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B17 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 34.32 dB

ABM1 comp = -6.08 dBA/m

BWC Factor = 0.16 dB

Location: 0, 4.2, 3.7 mm

**LTE B17 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 1.93 dB

BWC Factor = 10.81 dB

Location: 0, 4.2, 3.7 mm

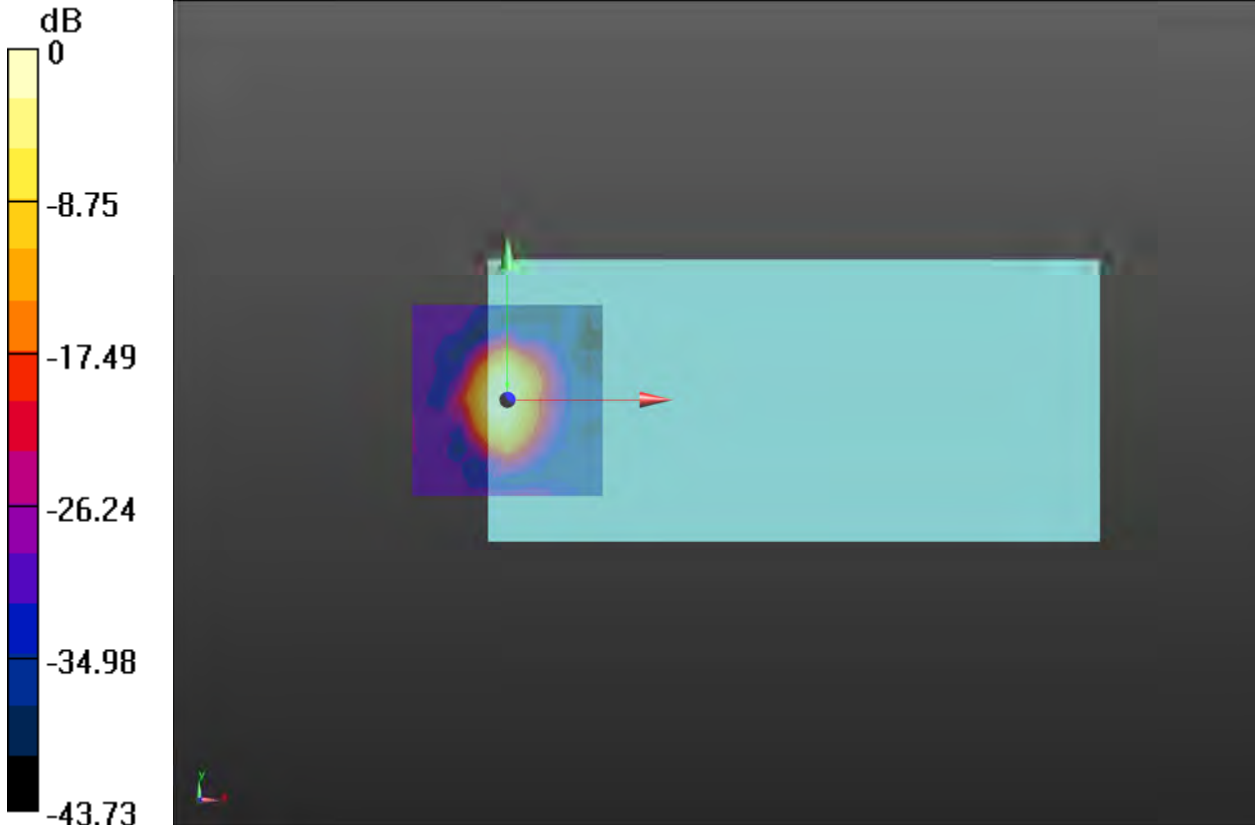

0 dB = 52.02 = 34.32 dB

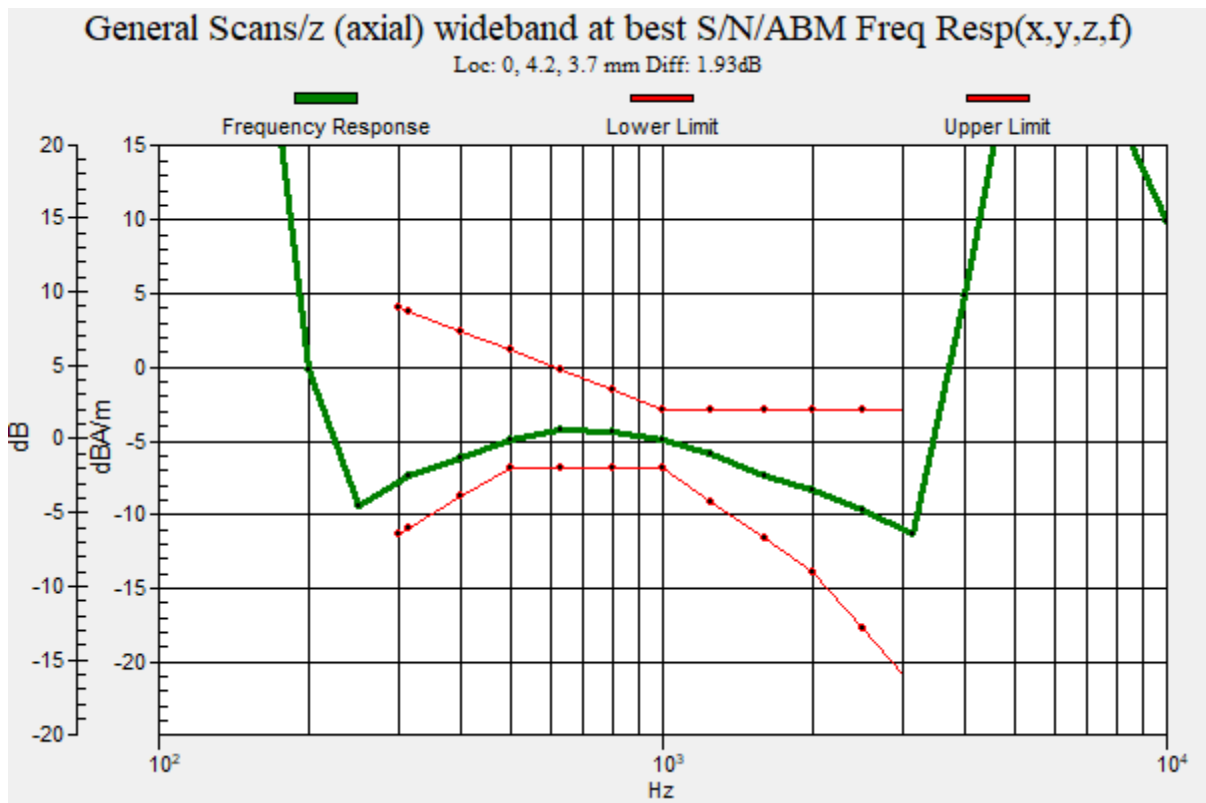

**Plot 27 T-Coil LTE Band 25 Y transversal**

Date: 2022/7/9

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1882.5 MHz; Duty Cycle: 1:3.73852

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B25 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 33.27 dB

ABM1 comp = -9.05 dBA/m

BWC Factor = 0.16 dB

Location: 0, -8.3, 3.7 mm

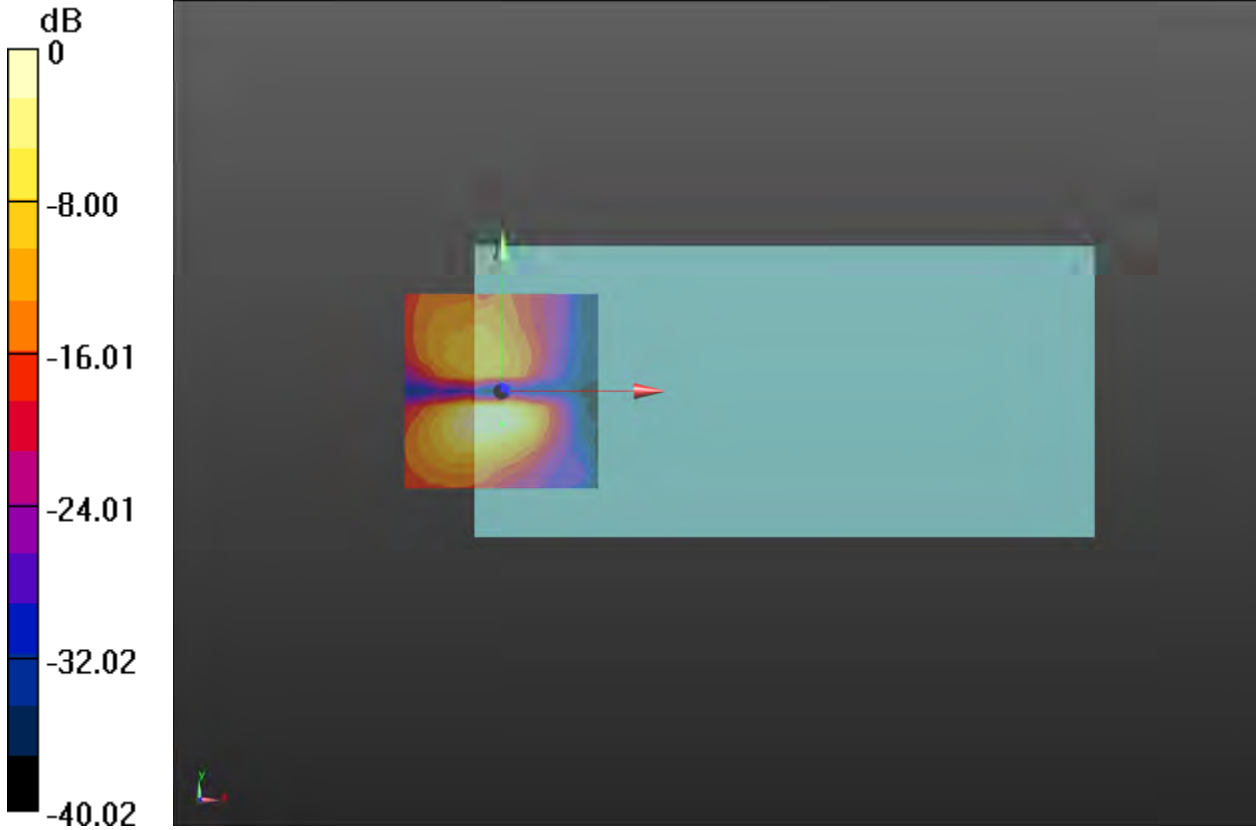

0 dB = 46.10 = 33.27 dB

**Plot 28 T-Coil LTE Band 25 Z Axial**

Date: 2022/7/9

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1882.5 MHz; Duty Cycle: 1:3.73852

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B25 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 40.35 dB

ABM1 comp = -5.50 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B25 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 1.84 dB


BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm



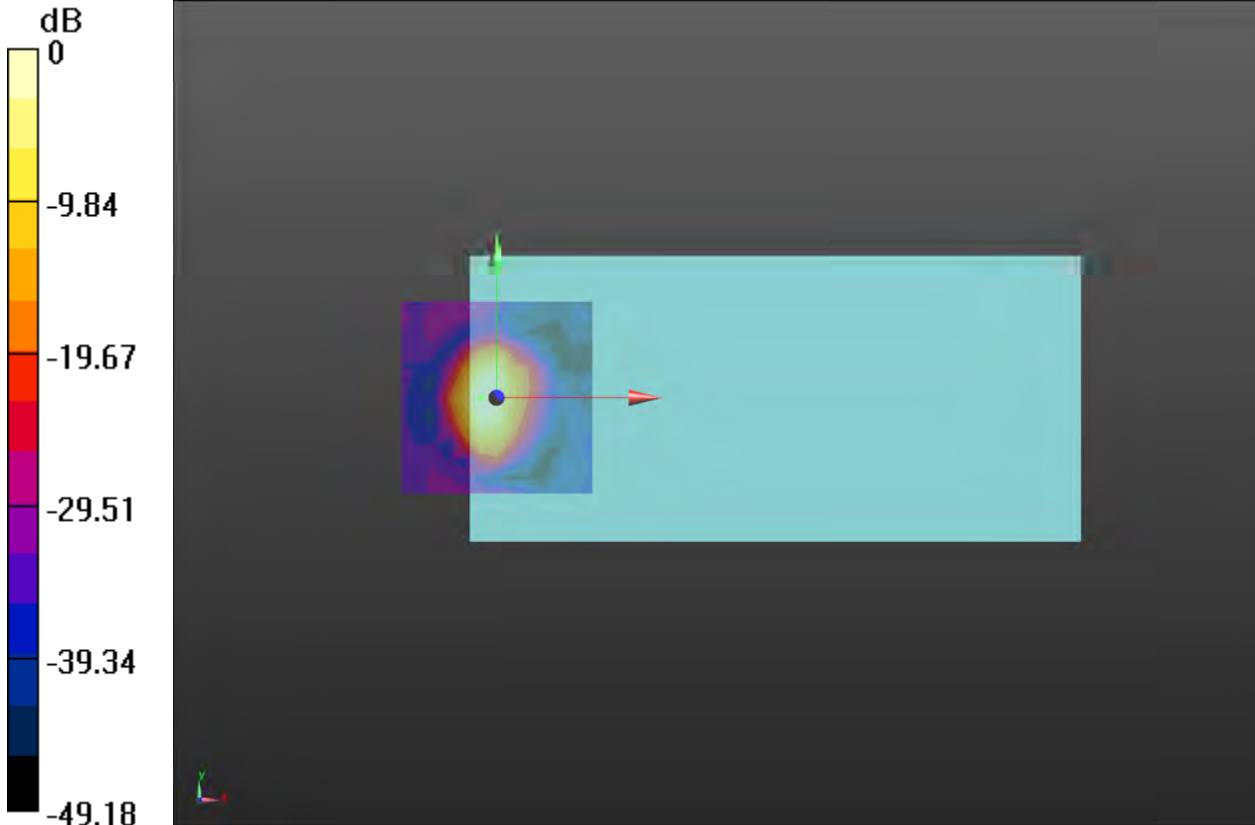

0 dB = 104.1 = 40.35 dB

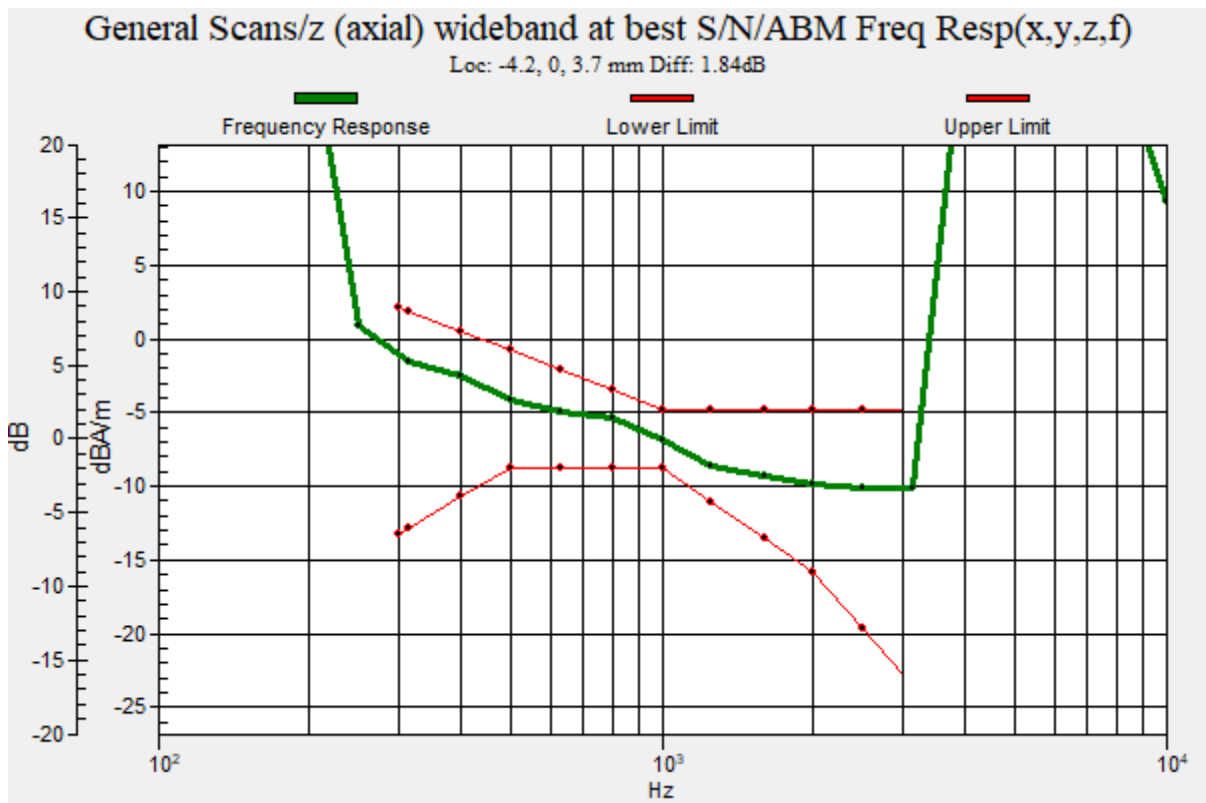

**Plot 29 T-Coil LTE Band 26 Y transversal**

Date: 2022/6/28

Communication System: UID 10181 - CAE, LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK); Frequency: 841.5 MHz; Duty Cycle: 1:3.7368

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B26 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 26.13 dB

ABM1 comp = -15.83 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

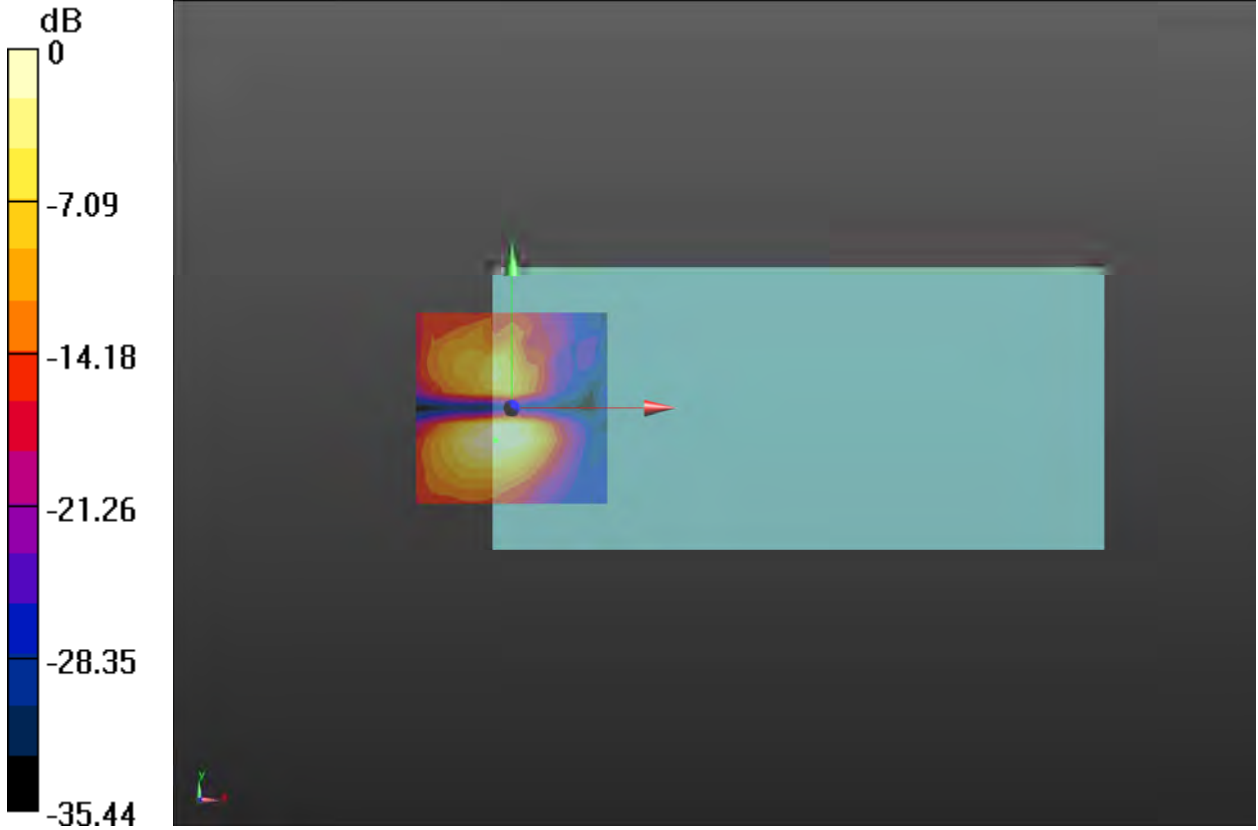

0 dB = 20.26 = 26.13 dB

**Plot 30 T-Coil LTE Band 26 Z Axial**

Date: 2022/6/28

Communication System: UID 10181 - CAE, LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK); Frequency: 841.5 MHz; Duty Cycle: 1:3.7368

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B26 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 33.89 dB

ABM1 comp = -9.78 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B26 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 2.00 dB

BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm

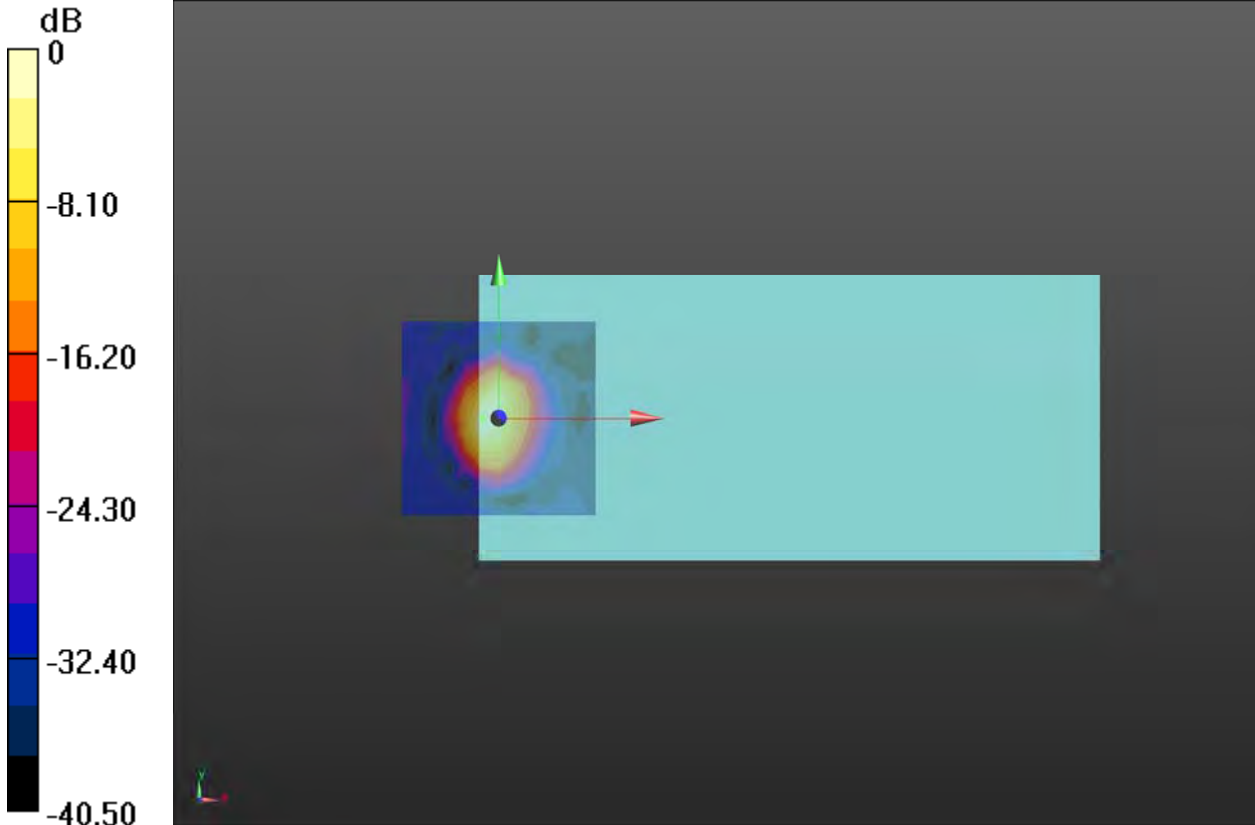

0 dB = 49.51 = 33.89 dB

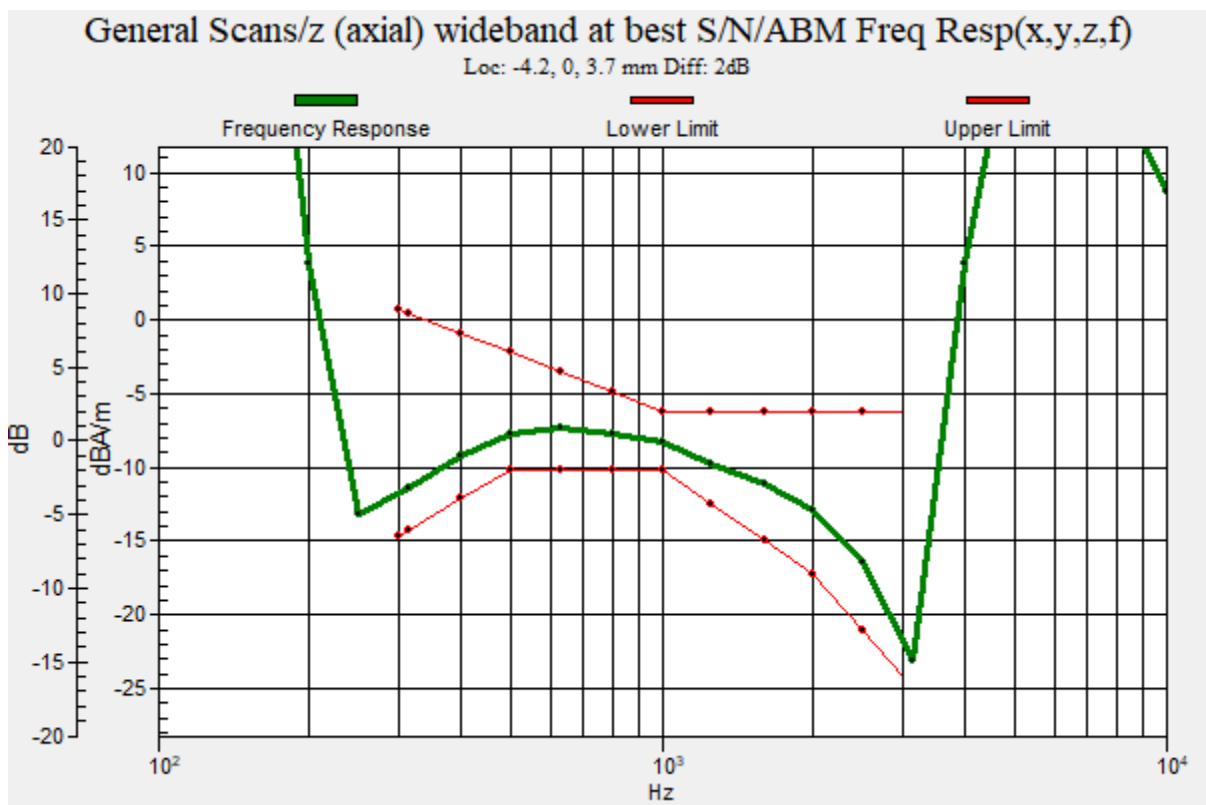

**Plot 31 T-Coil LTE Band 30 Y transversal**

Date: 2022/7/9

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 2310 MHz; Duty Cycle: 1:3.73594

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B30 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 32.55 dB

ABM1 comp = -12.10 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

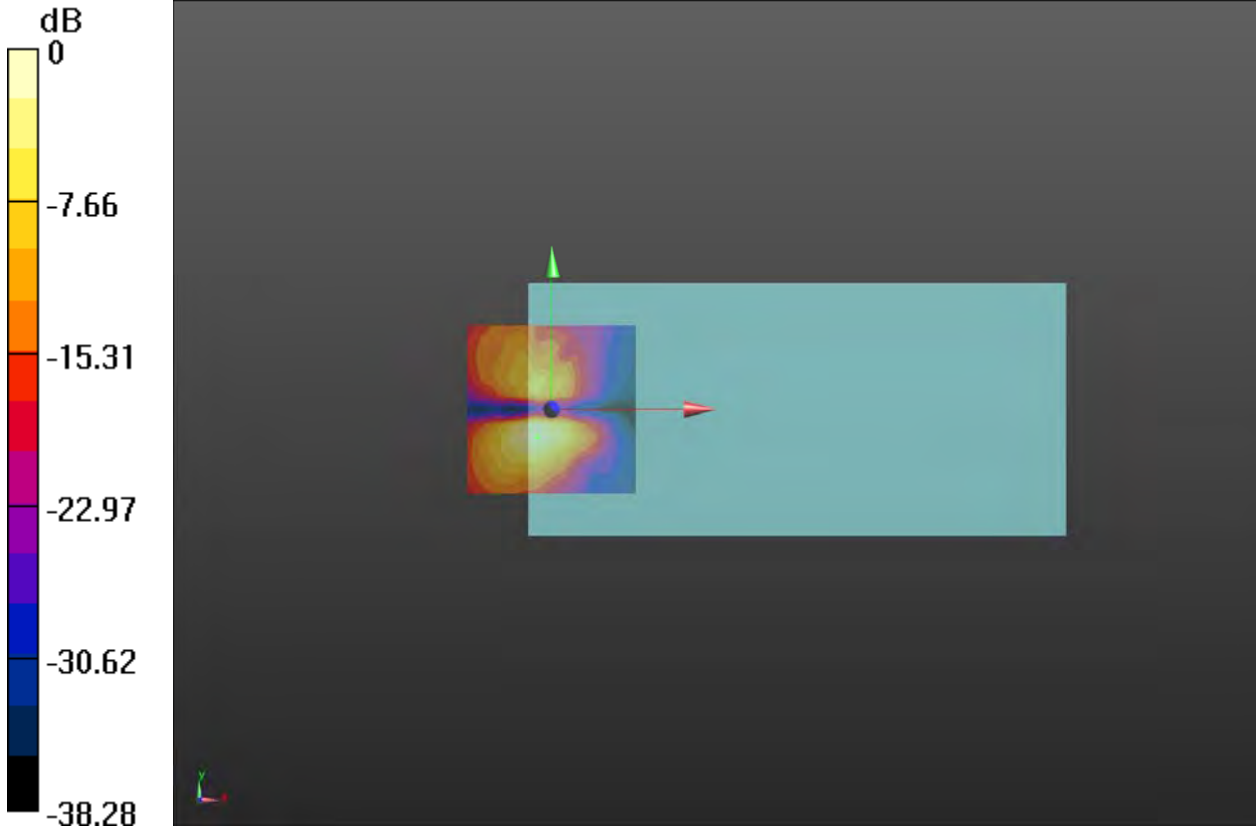

0 dB = 42.41 = 32.55 dB

**Plot 32 T-Coil LTE Band 30 Z Axial**

Date: 2022/7/9

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 2310 MHz; Duty Cycle: 1:3.73594

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B30 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 37.74 dB

ABM1 comp = -5.60 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B30 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 2.00 dB


BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm



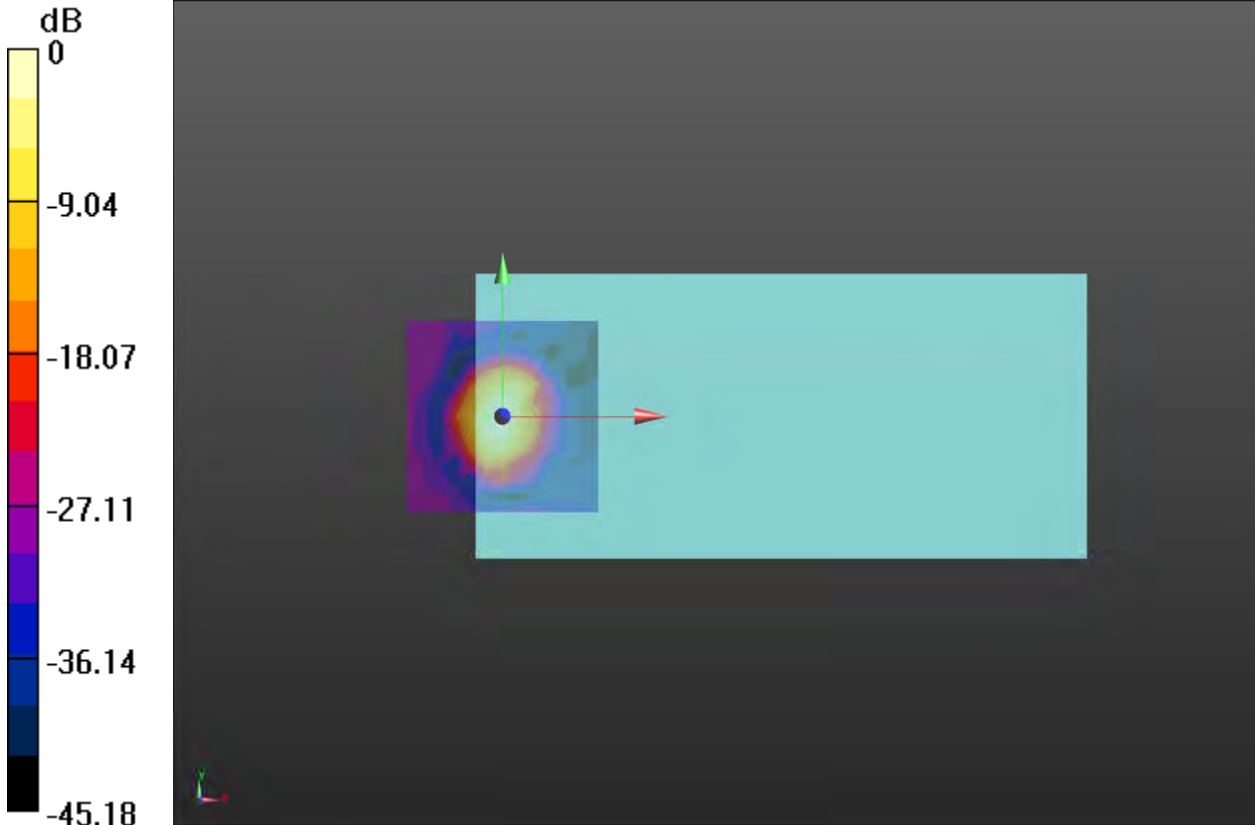

0 dB = 77.05 = 37.74 dB

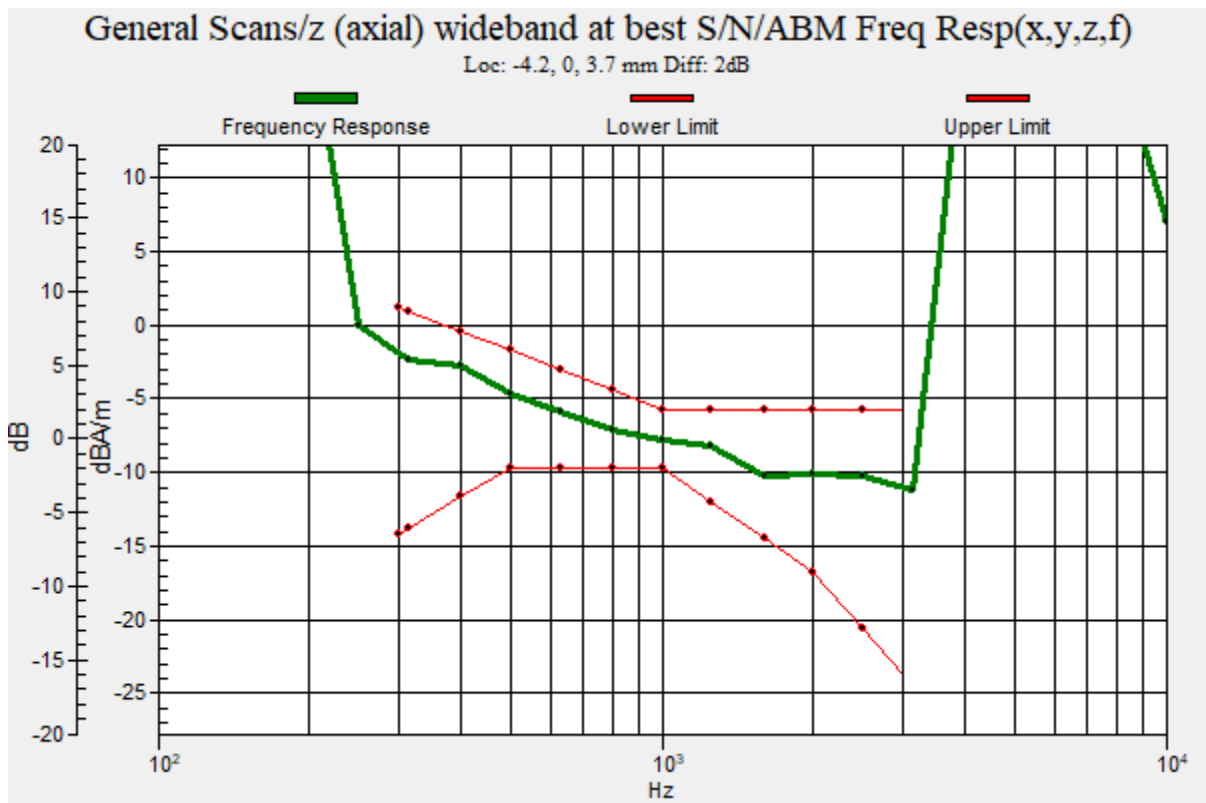

**Plot 33 T-Coil LTE Band 66 Y transversal**

Date: 2022/6/28

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1745 MHz; Duty Cycle: 1:3.73852

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B66 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/y (transversal) 4.2mm 50 x****50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 26.96 dB

ABM1 comp = -15.79 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

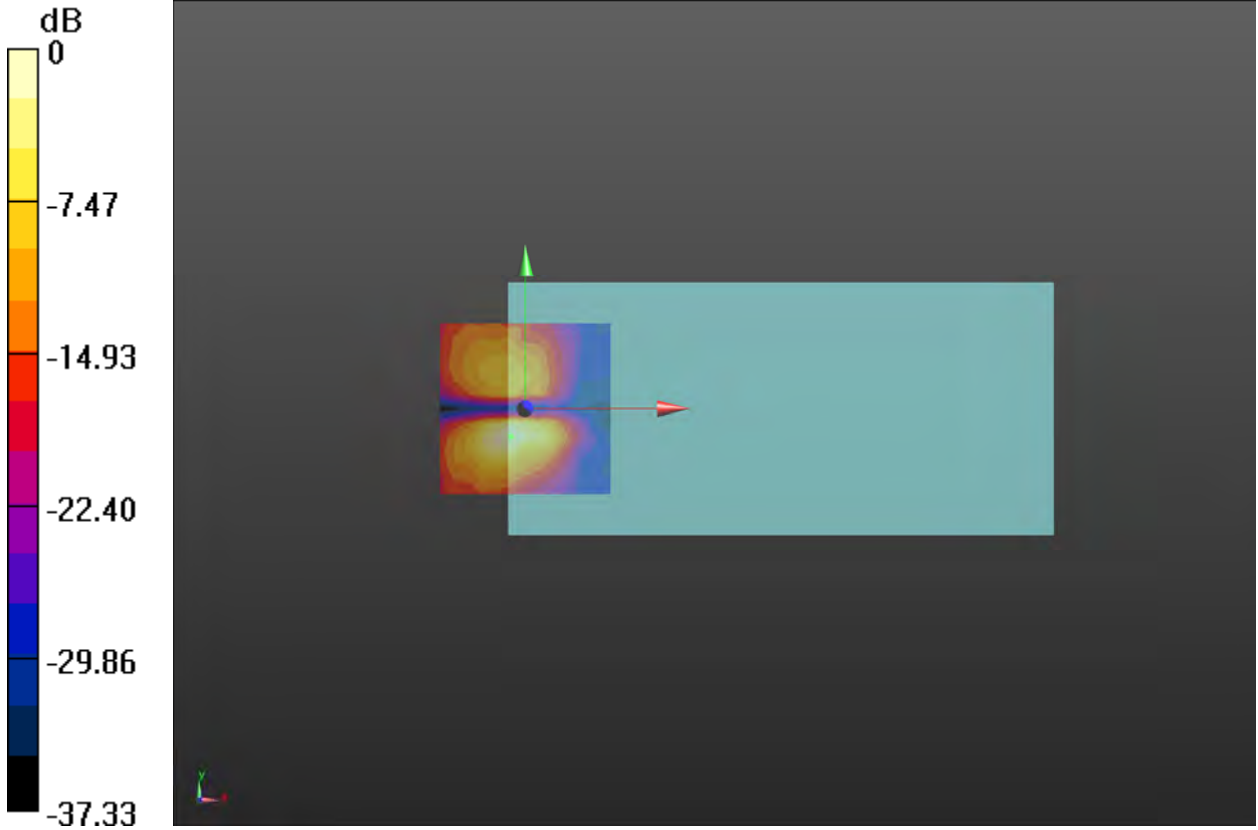

0 dB = 22.28 = 26.96 dB

**Plot 34 T-Coil LTE Band 66 Z Axial**

Date: 2022/6/28

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1745 MHz; Duty Cycle: 1:3.73852

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B66 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 33.27 dB

ABM1 comp = -9.91 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B66 1RB HAC\_TCoil\_WD\_Emission-15.85kbps/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 2.00 dB

BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm

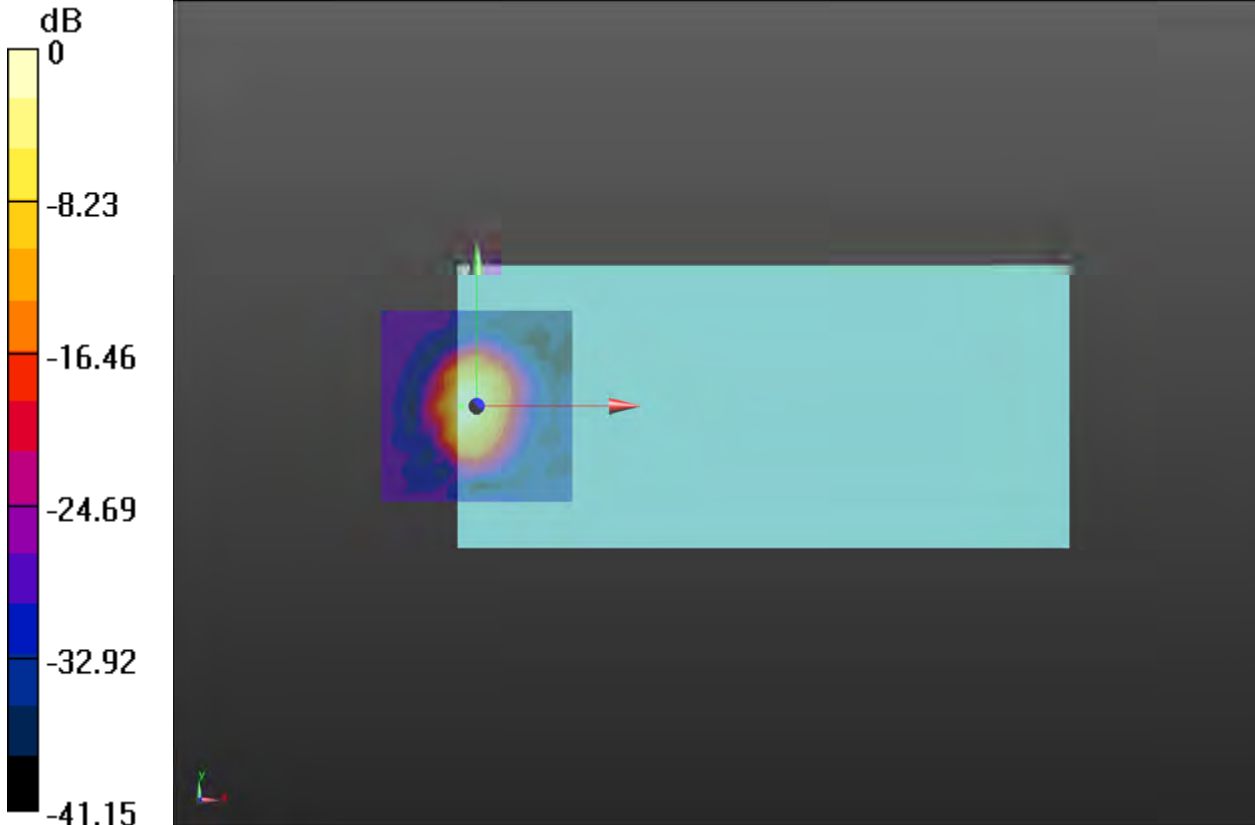

0 dB = 46.09 = 33.27 dB

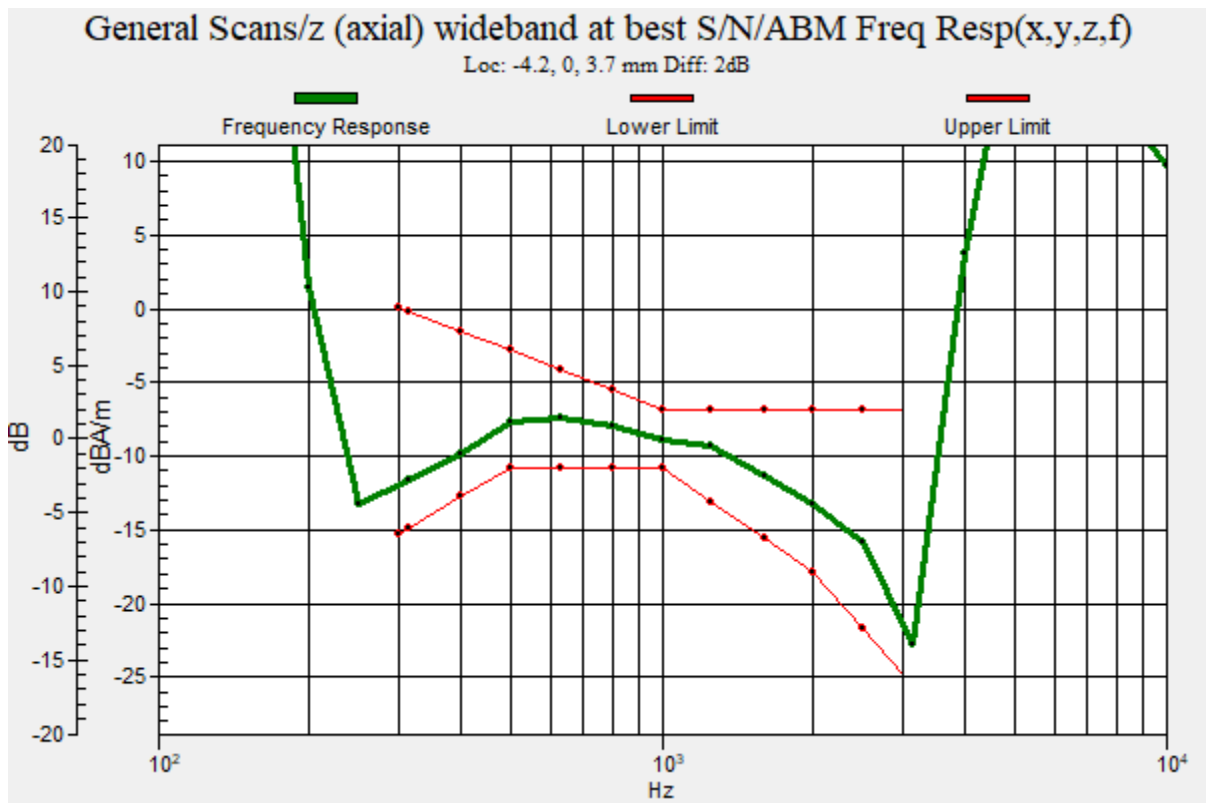

**Plot 35 T-Coil LTE Band 38 Y transversal**

Date: 2022/7/5

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2610 MHz; Duty Cycle: 1:8.33105

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B38 1RB HAC\_TCoil\_WD\_Emission-4.75kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 25.17 dB

ABM1 comp = -11.31 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 8.3, 3.7 mm

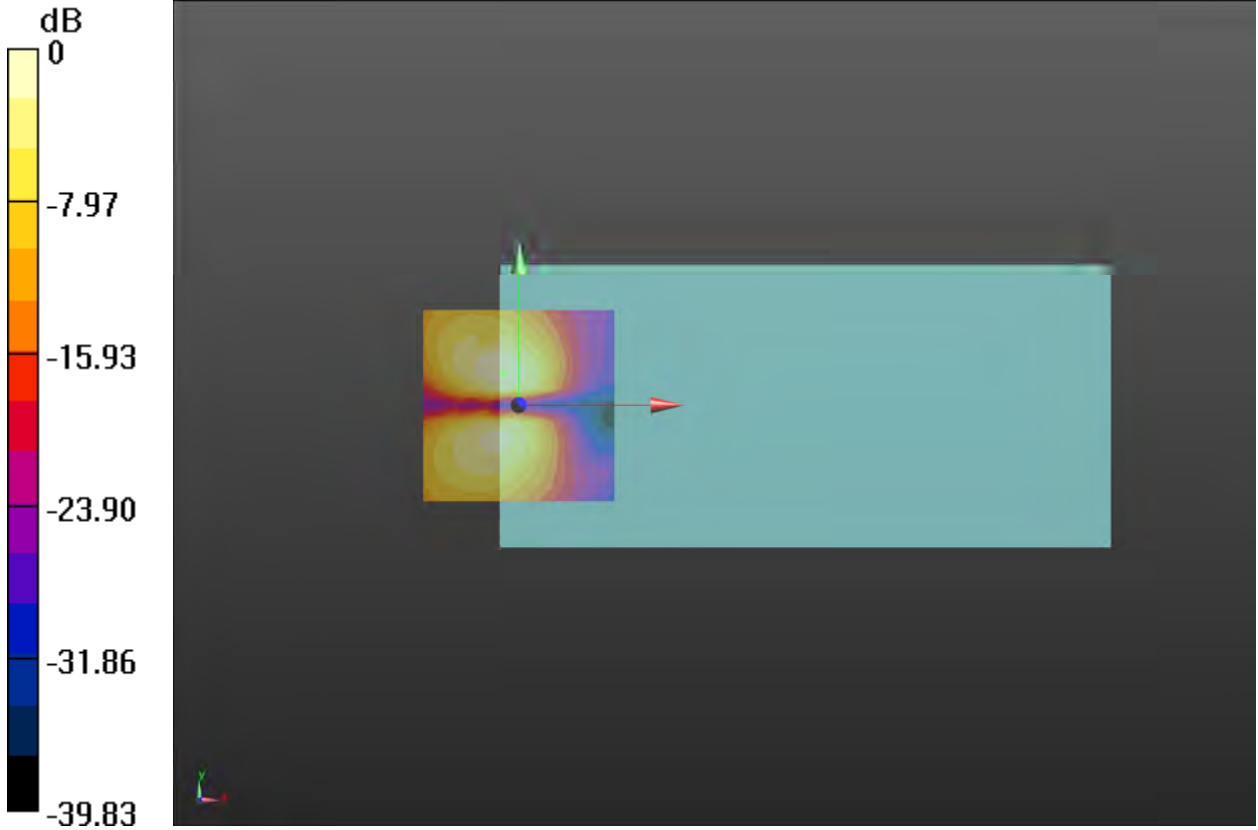

0 dB = 18.14 = 25.17 dB

**Plot 36 T-Coil LTE Band 38 Z Axial**

Date: 2022/7/5

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2610 MHz; Duty Cycle: 1:8.33105

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B38 1RB HAC\_TCoil\_WD\_Emission-4.75kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 24.96 dB

ABM1 comp = -5.44 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B38 1RB HAC\_TCoil\_WD\_Emission-4.75kbps/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 1.80 dB


BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm



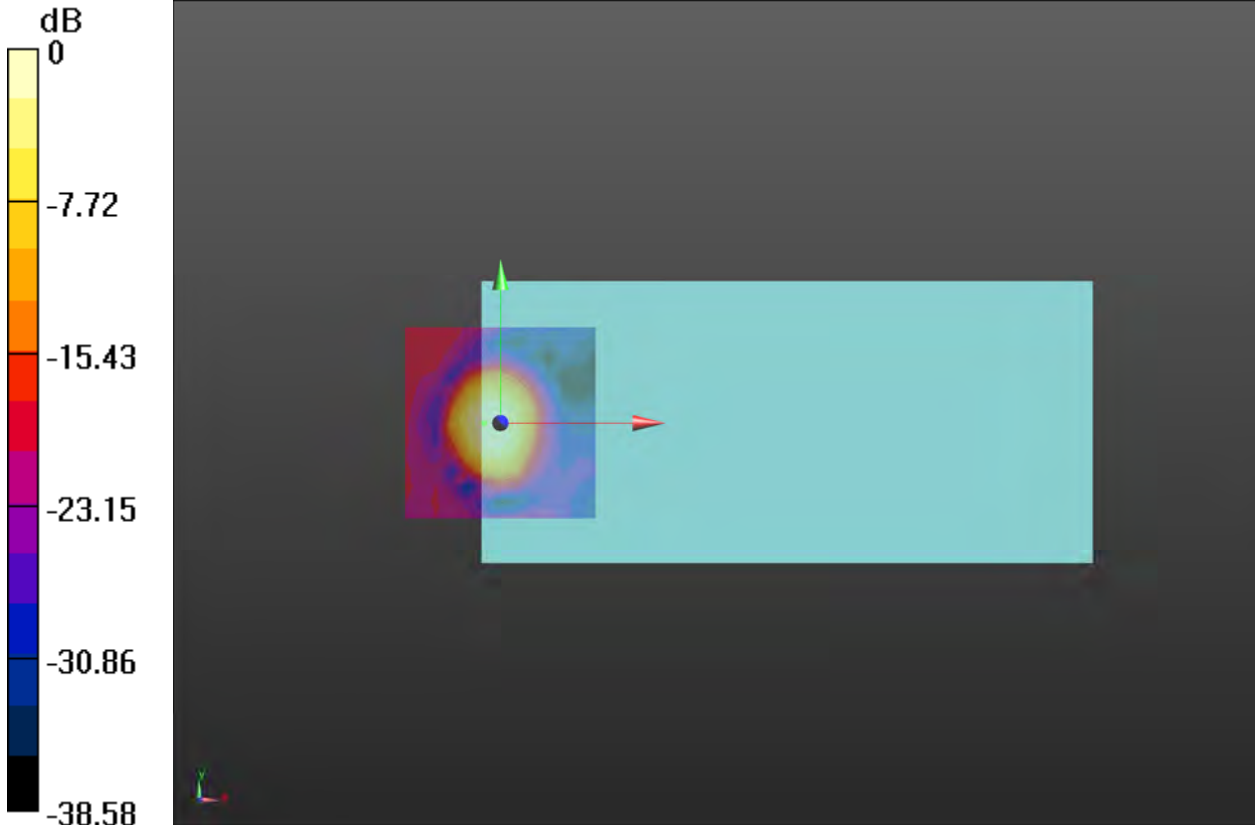

0 dB = 17.70 = 24.96 dB

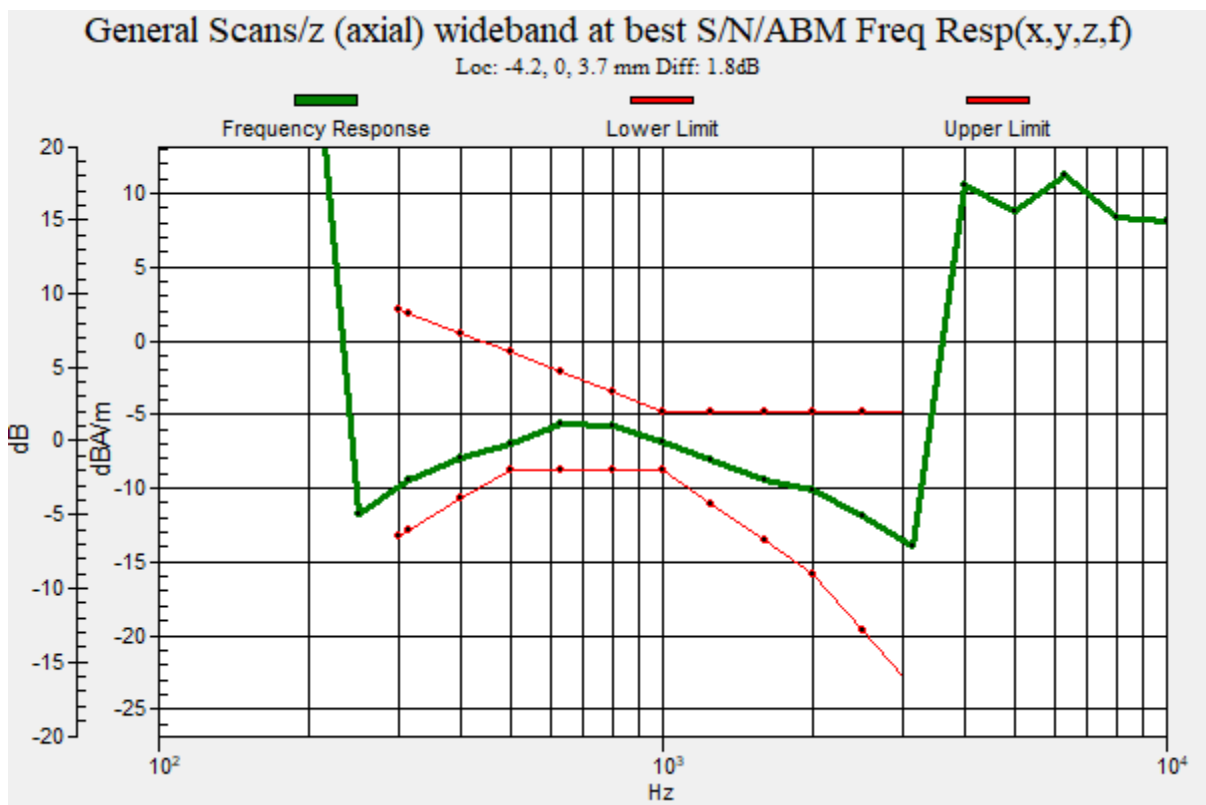

**Plot 37 T-Coil LTE Band 40 Y transversal**

Date: 2022/7/5

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2390 MHz; Duty Cycle: 1:8.33105

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B40 1RB HAC\_TCoil\_WD\_Emission-4.75kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 22.77 dB

ABM1 comp = -11.83 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

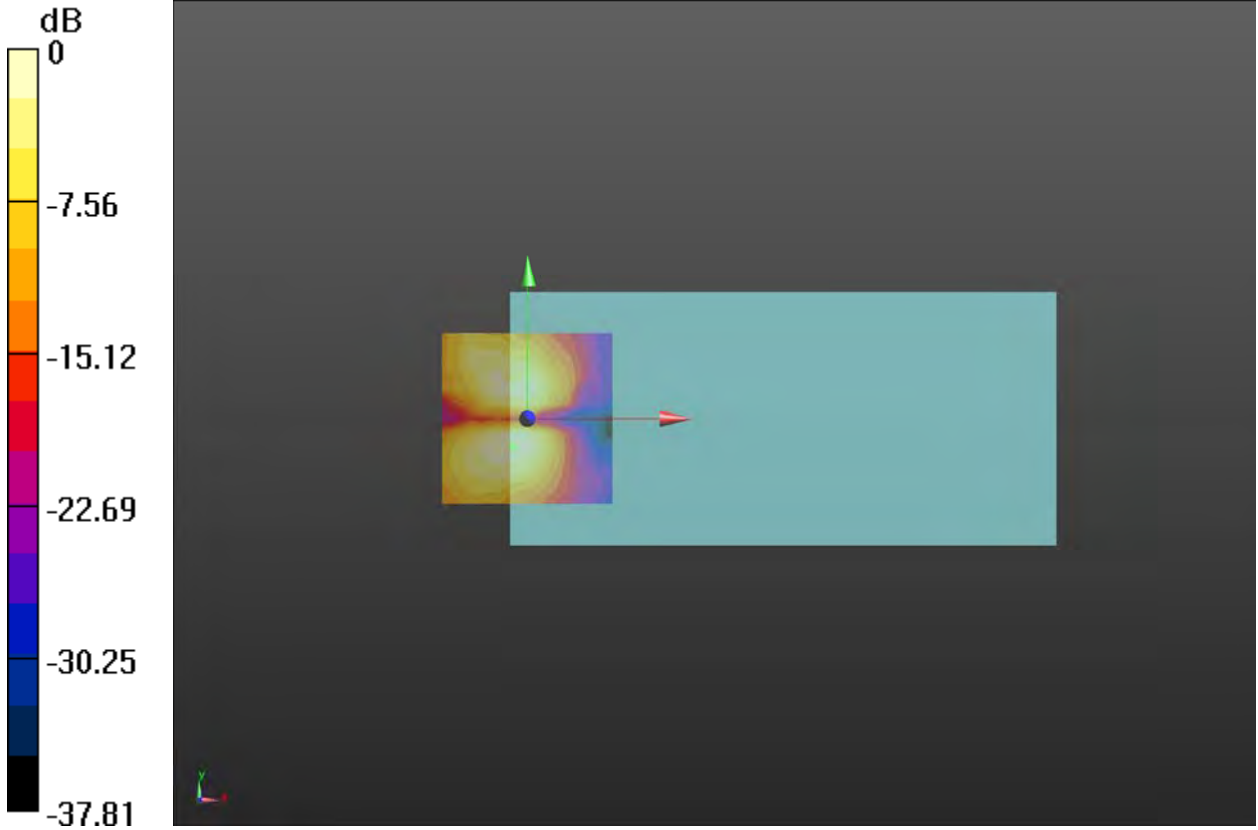

0 dB = 13.75 = 22.77 dB

**Plot 38 T-Coil LTE Band 40 Z Axial**

Date: 2022/7/5

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2390 MHz; Duty Cycle: 1:8.33105

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B40 1RB HAC\_TCoil\_WD\_Emission-4.75kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 24.78 dB

ABM1 comp = -6.06 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B40 1RB HAC\_TCoil\_WD\_Emission-4.75kbps/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 1.86 dB

BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm

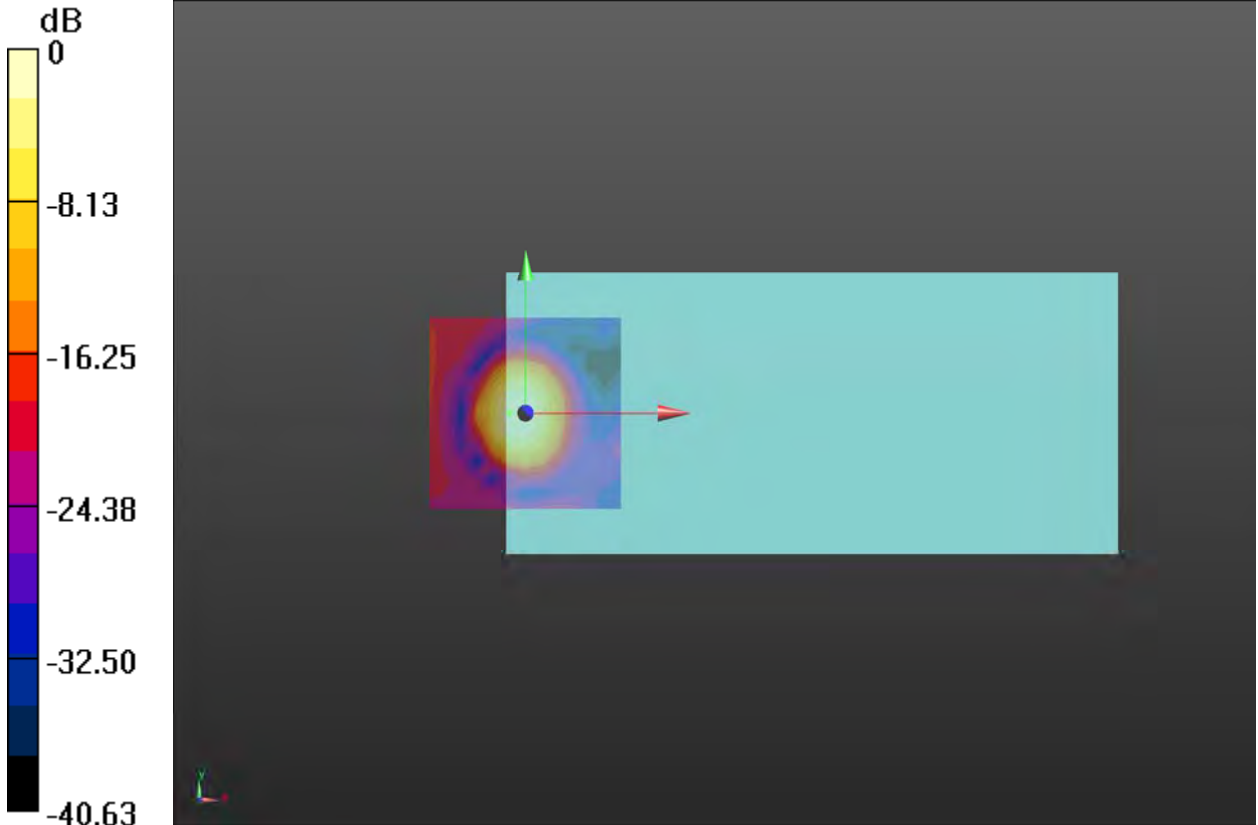

0 dB = 17.35 = 24.79 dB

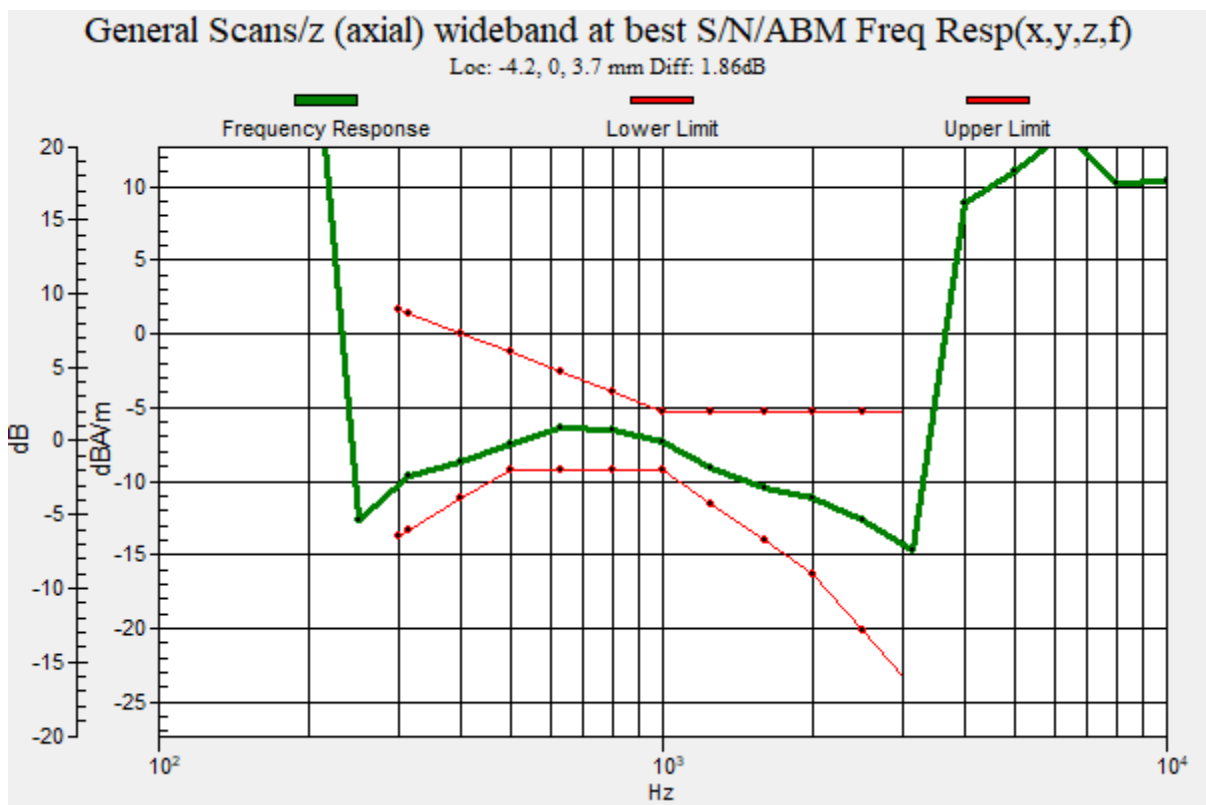

**Plot 39 T-Coil LTE Band 41 Y transversal**

Date: 2022/7/5

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2645 MHz; Duty Cycle: 1:8.33105

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B40 1RB HAC\_TCoil\_WD\_Emission-4.75kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 23.07 dB

ABM1 comp = -11.94 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

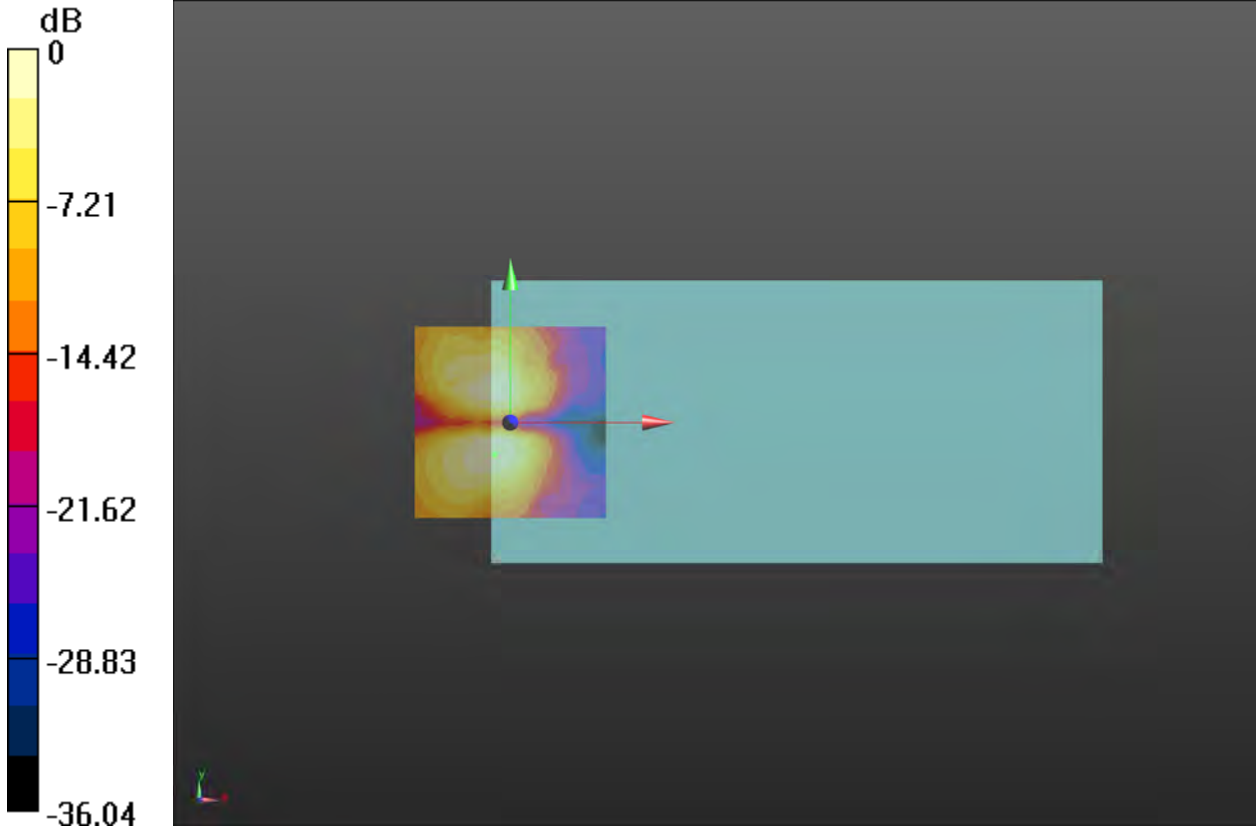

0 dB = 14.24 = 23.07 dB

**Plot 40 T-Coil LTE Band 41 Z Axial**

Date: 2022/7/5

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2645 MHz; Duty Cycle: 1:8.33105

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B40 1RB HAC\_TCoil\_WD\_Emission-4.75kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 24.94 dB

ABM1 comp = -6.04 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B40 1RB HAC\_TCoil\_WD\_Emission-4.75kbps/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 1.83 dB


BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm



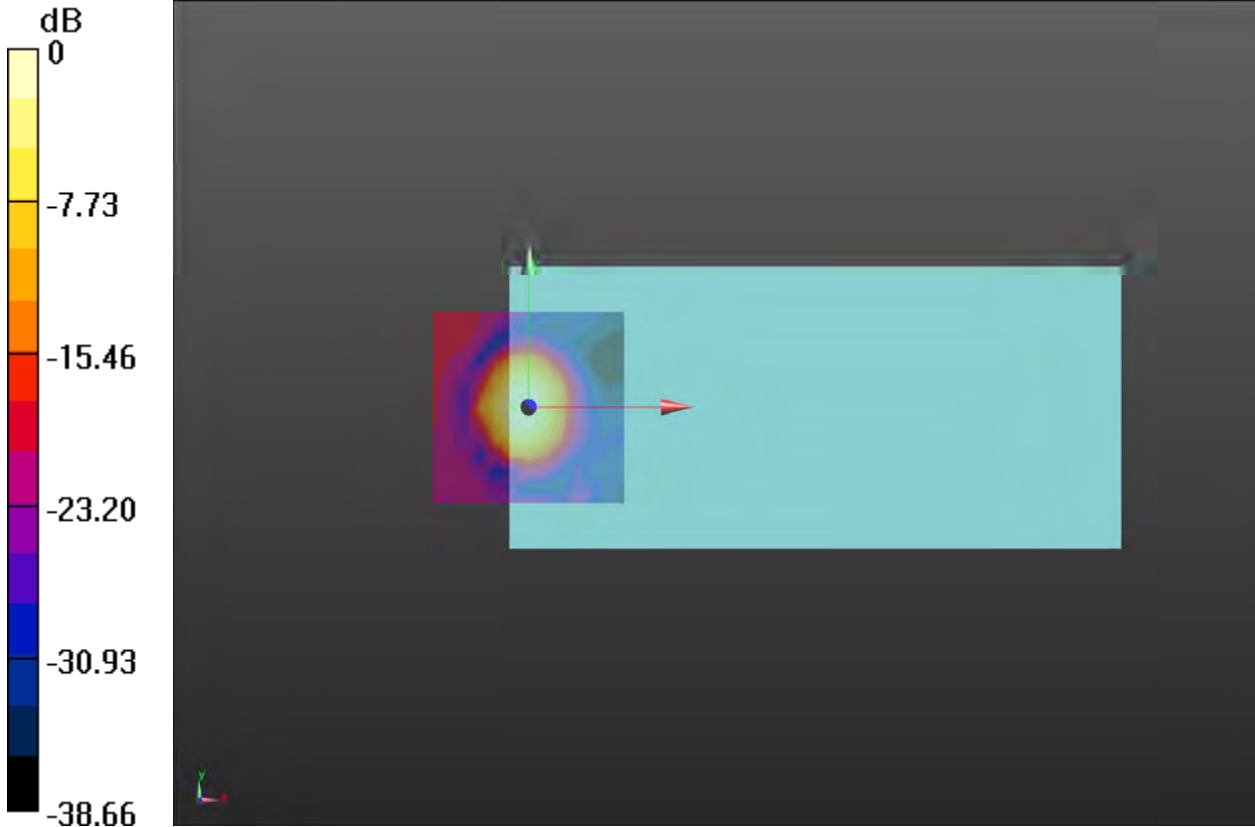

0 dB = 17.66 = 24.94 dB

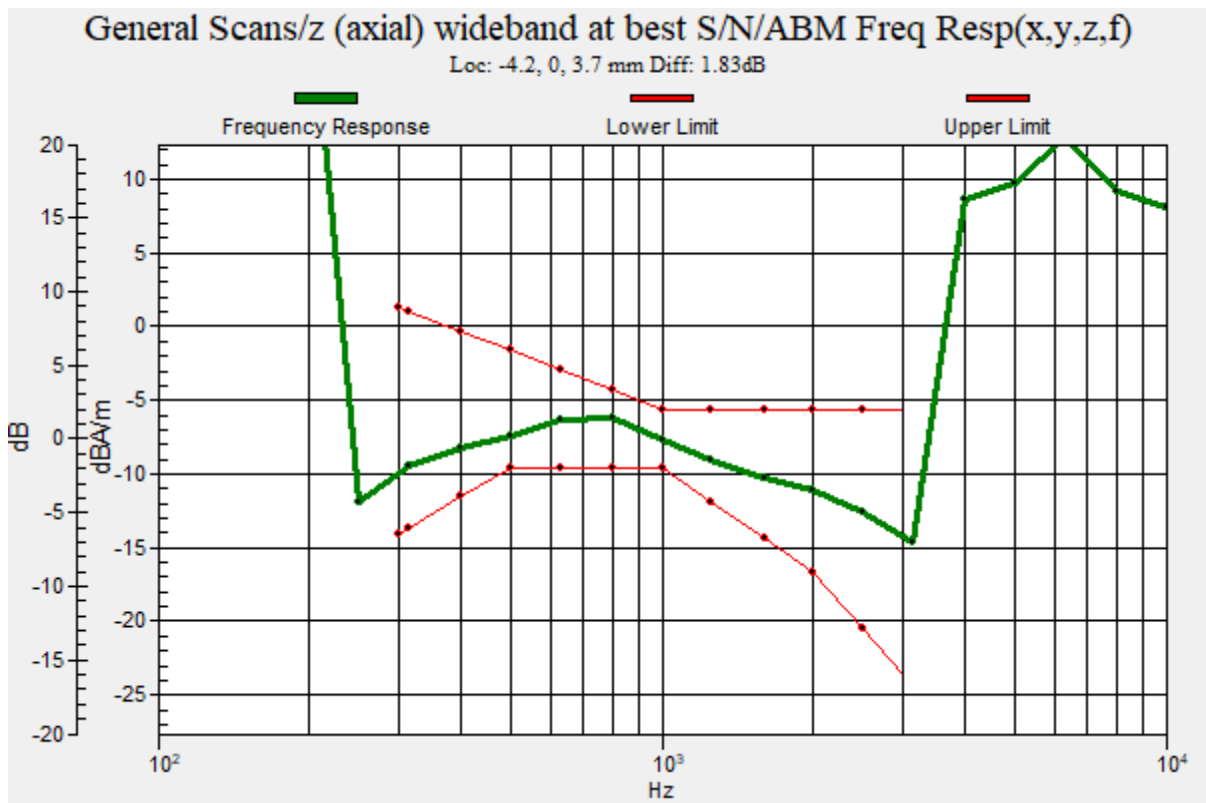

**Plot 41 T-Coil Wi-Fi 2.4G 802.11b Y transversal**

Date: 2022/7/5

Communication System: UID 10061 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps);

Frequency: 2437 MHz; Duty Cycle: 1:2.29034

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11b HAC\_TCoil\_WD\_Emission-12.2kbps/General Scans/y (transversal) 4.2mm 50 x****50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 25.65 dB

ABM1 comp = -13.21 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 8.3, 3.7 mm

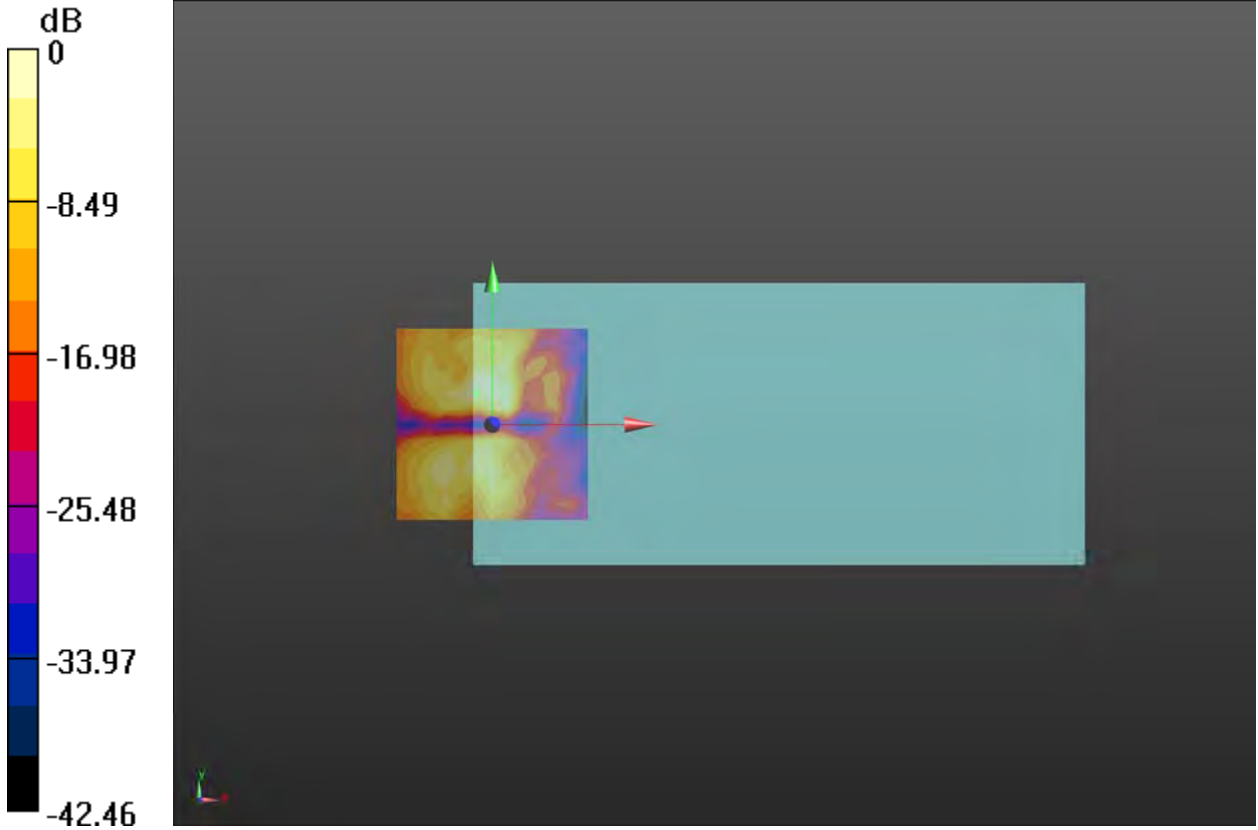

0 dB = 19.16 = 25.65 dB

**Plot 42 T-Coil Wi-Fi 2.4G 802.11b Z Axial**

Date: 2022/7/5

Communication System: UID 10061 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps);

Frequency: 2437 MHz; Duty Cycle: 1:2.29034

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11b HAC\_TCoil\_WD\_Emission-12.2kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 35.72 dB

ABM1 comp = -7.13 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**11b HAC\_TCoil\_WD\_Emission-12.2kbps/General Scans/z (axial) wideband at best S/N/ABM****Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 0.39 dB

BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm

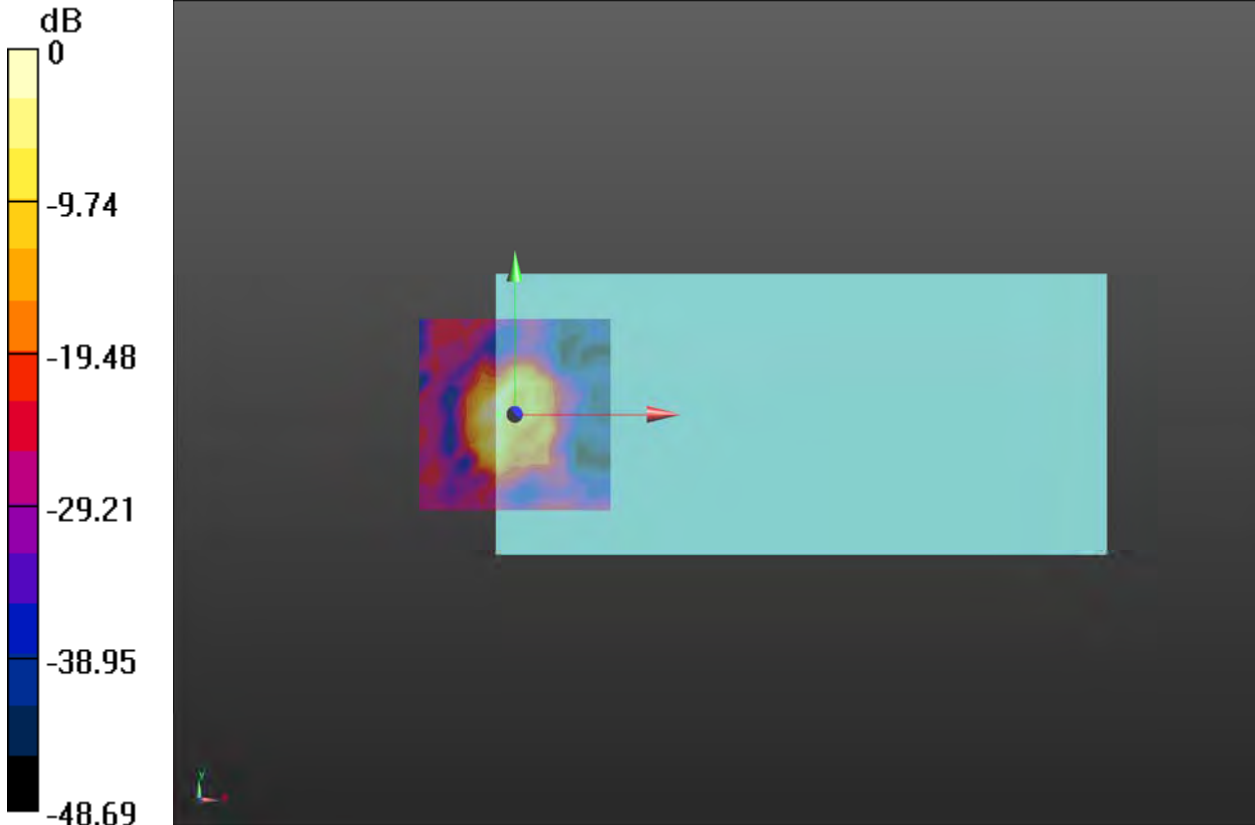

0 dB = 61.12 = 35.72 dB

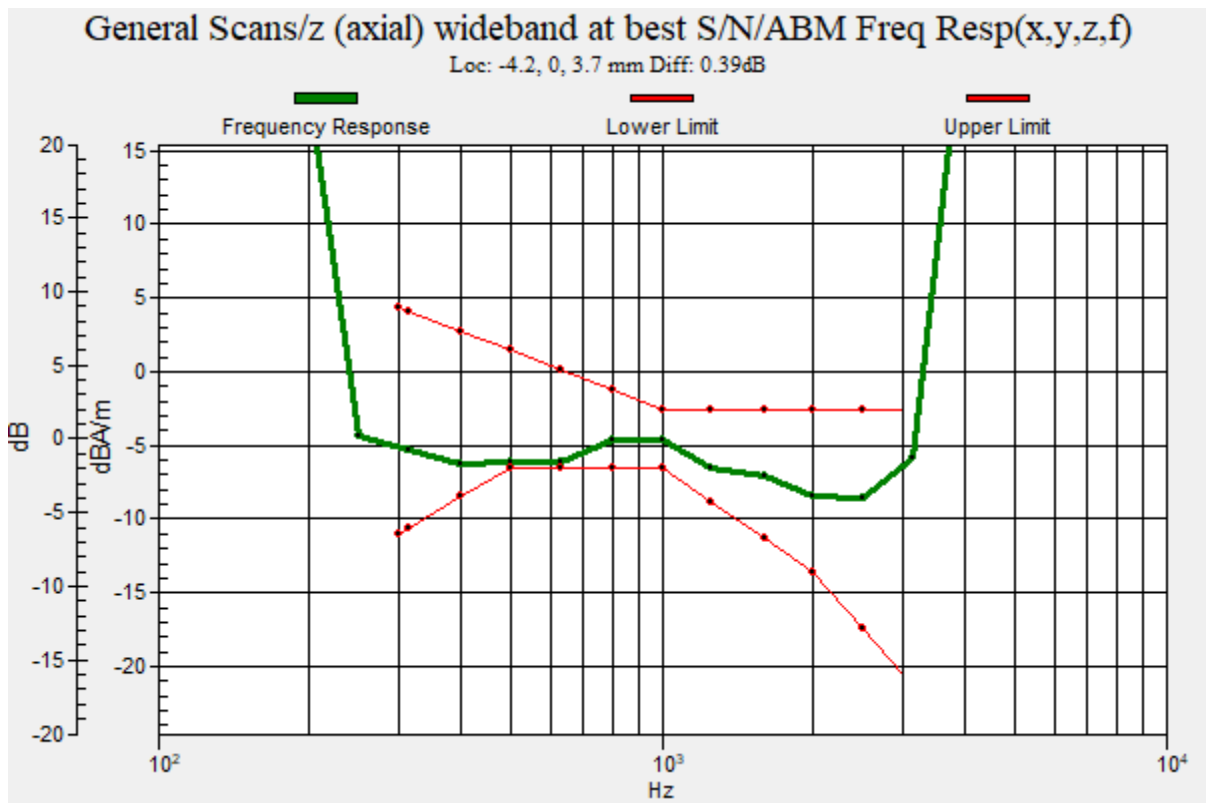

**Plot 43 T-Coil Wi-Fi 2.4G 802.11g Y transversal**

Date: 2022/7/8

Communication System: UID 10013 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps);

Frequency: 2437 MHz; Duty Cycle: 1:8.82673

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11g HAC\_TCoil\_WD\_Emission-12.2kbps/General Scans/y (transversal) 4.2mm 50 x****50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 28.10 dB

ABM1 comp = -17.69 dBA/m

BWC Factor = 0.16 dB

Location: -8.3, 8.3, 3.7 mm

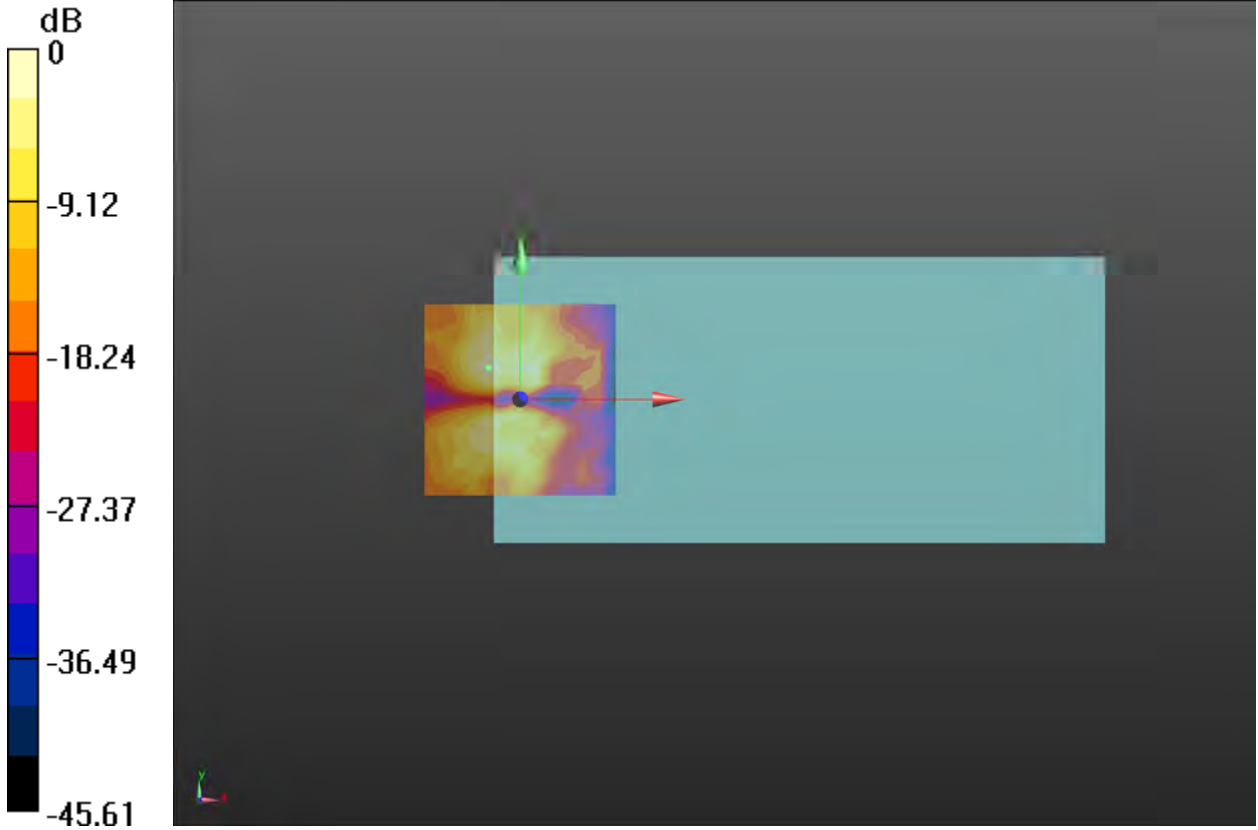

0 dB = 25.40 = 28.10 dB

**Plot 44 T-Coil Wi-Fi 2.4G 802.11g Z Axial**

Date: 2022/7/8

Communication System: UID 10013 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps);

Frequency: 2437 MHz; Duty Cycle: 1:8.82673

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11g HAC\_TCoil\_WD\_Emission-12.2kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 32.27 dB

ABM1 comp = -7.16 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**11g HAC\_TCoil\_WD\_Emission-12.2kbps/General Scans/z (axial) wideband at best S/N/ABM****Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 1.37 dB


BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm



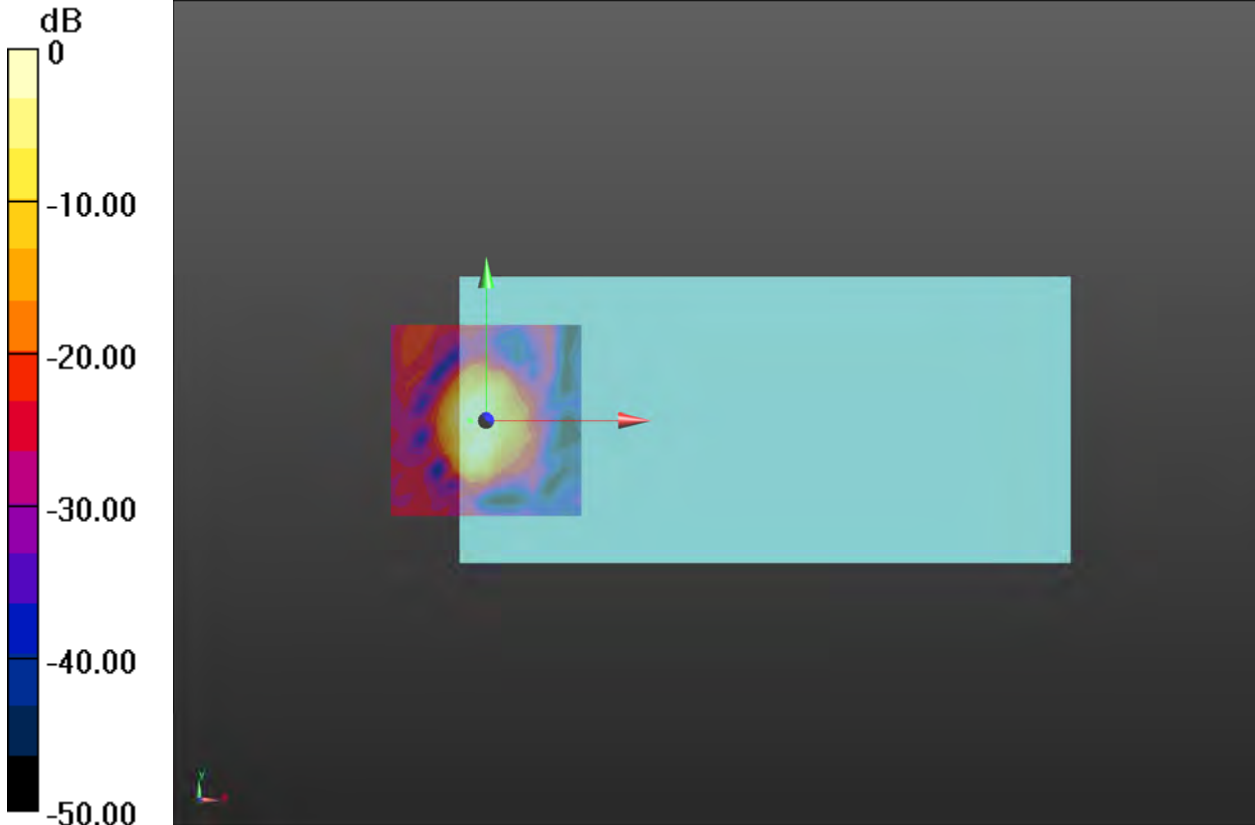

0 dB = 41.05 = 32.27 dB

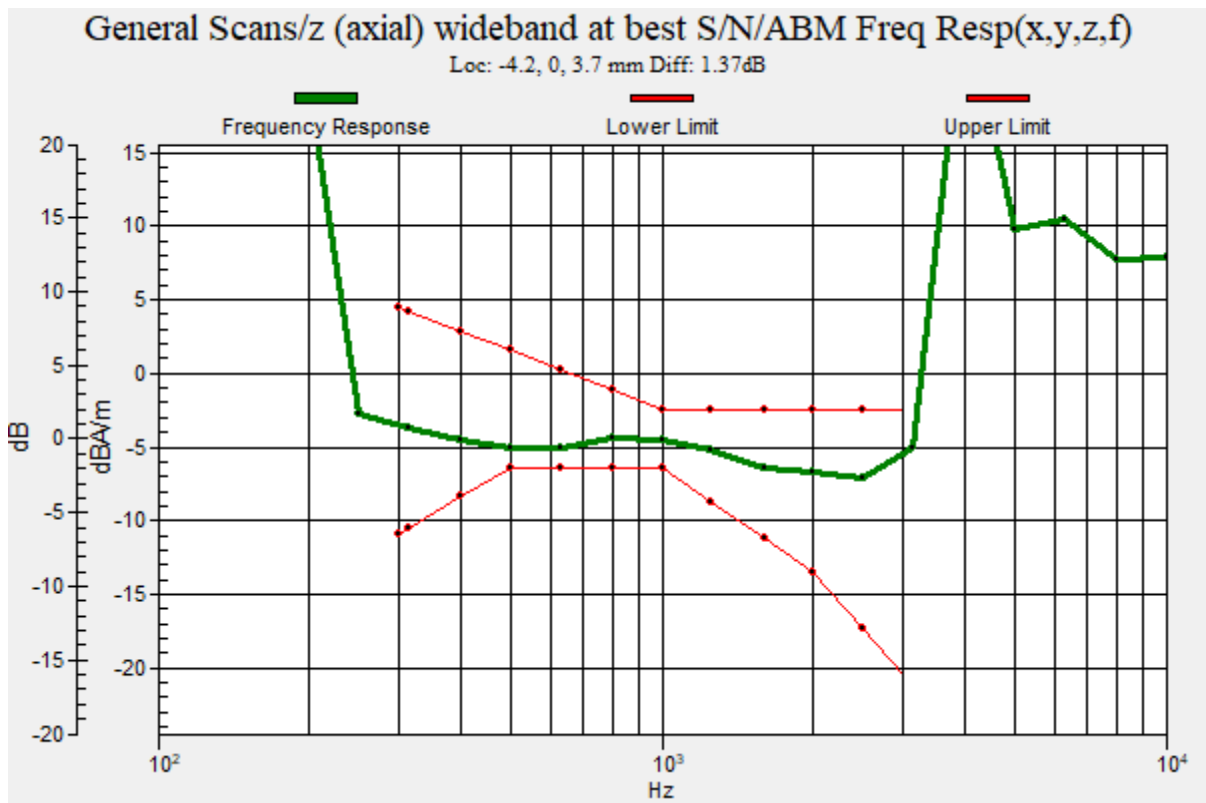

**Plot 45 T-Coil Wi-Fi 2.4G 802.11n Y transversal**

Date: 2022/7/11

Communication System: UID 10591 - AAB, IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle); Frequency: 2437 MHz; Duty Cycle: 1:7.29122

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11g HAC\_TCoil\_WD\_Emission-12.2kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 24.50 dB

ABM1 comp = -13.67 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

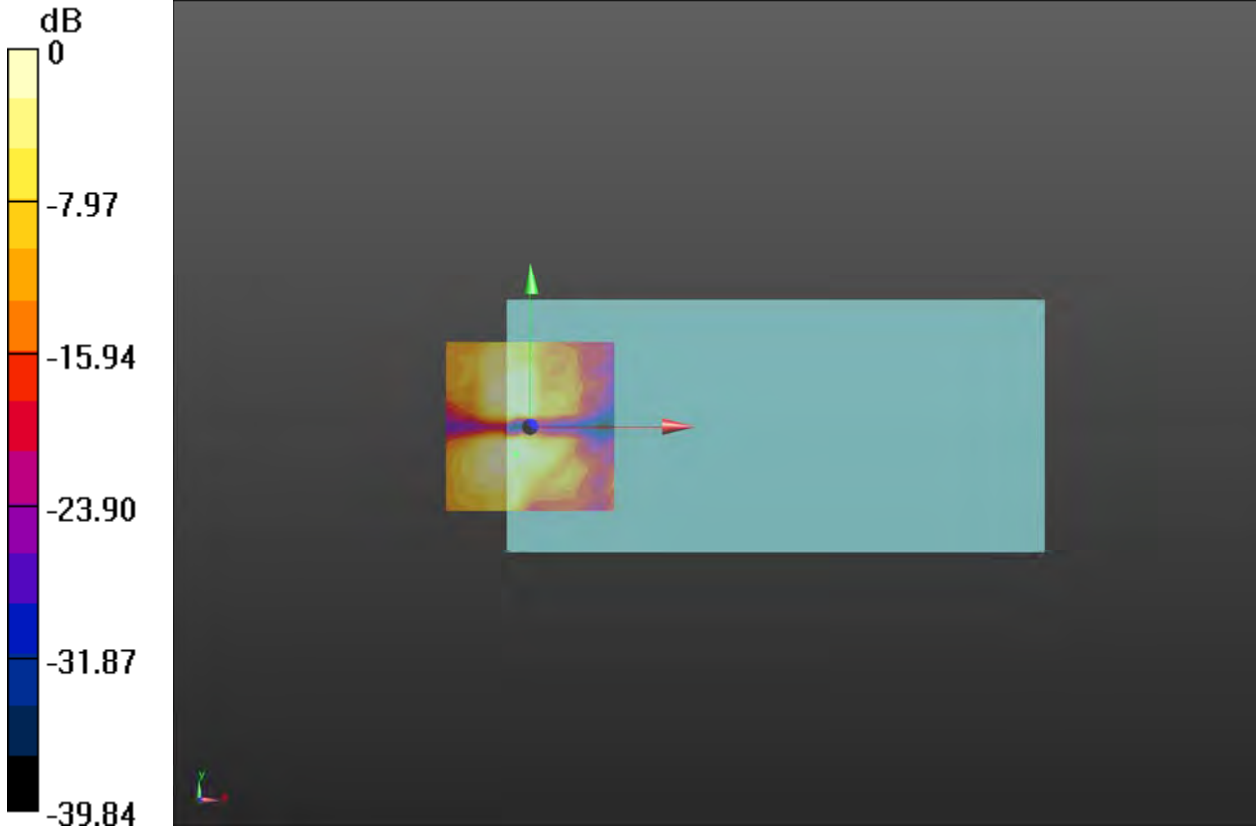

0 dB = 16.78 = 24.50 dB

**Plot 46 T-Coil Wi-Fi 2.4G 802.11n Z Axial**

Date: 2022/7/8

Communication System: UID 10591 - AAB, IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle); Frequency: 2437 MHz; Duty Cycle: 1:7.29122

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11g HAC\_TCoil\_WD\_Emission-12.2kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 32.02 dB

ABM1 comp = -6.90 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**11g HAC\_TCoil\_WD\_Emission-12.2kbps/General Scans/z (axial) wideband at best S/N/ABM****Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 0.52 dB

BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm

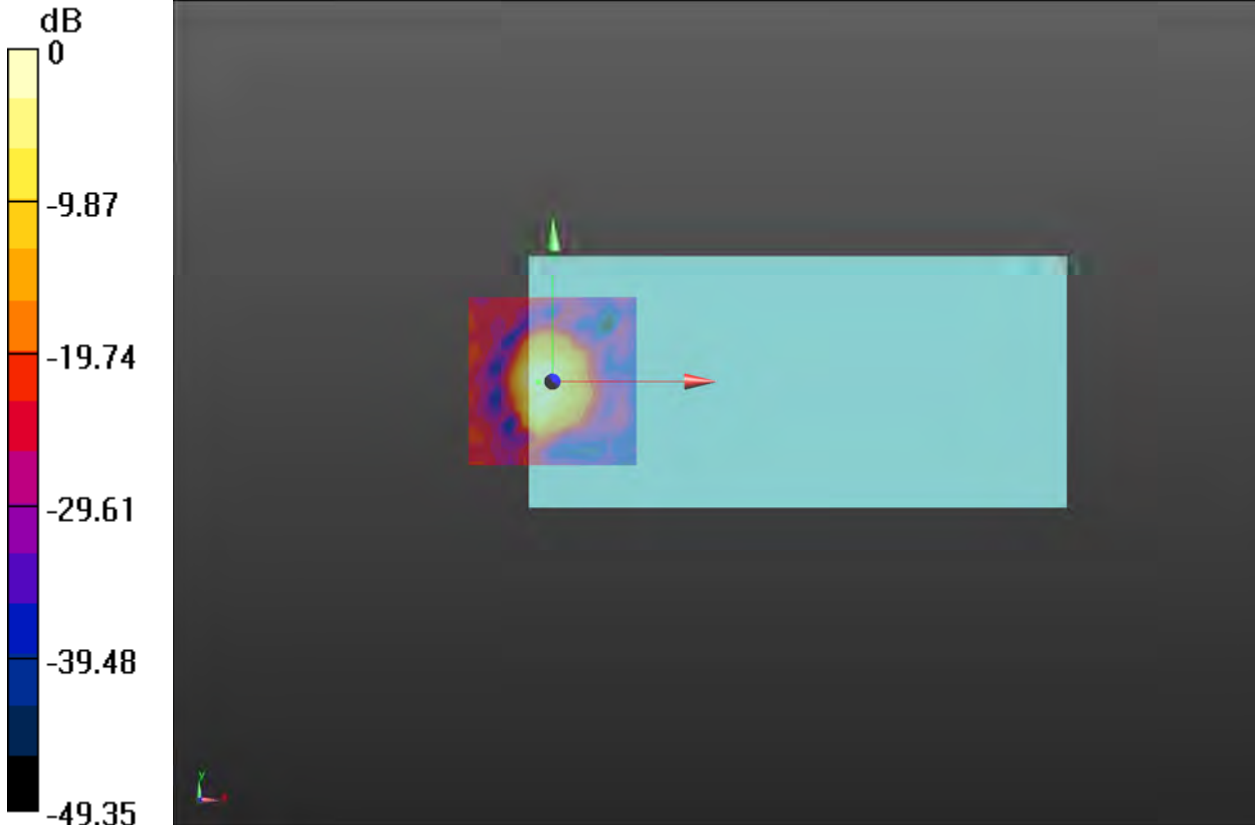

0 dB = 39.91 = 32.02 dB

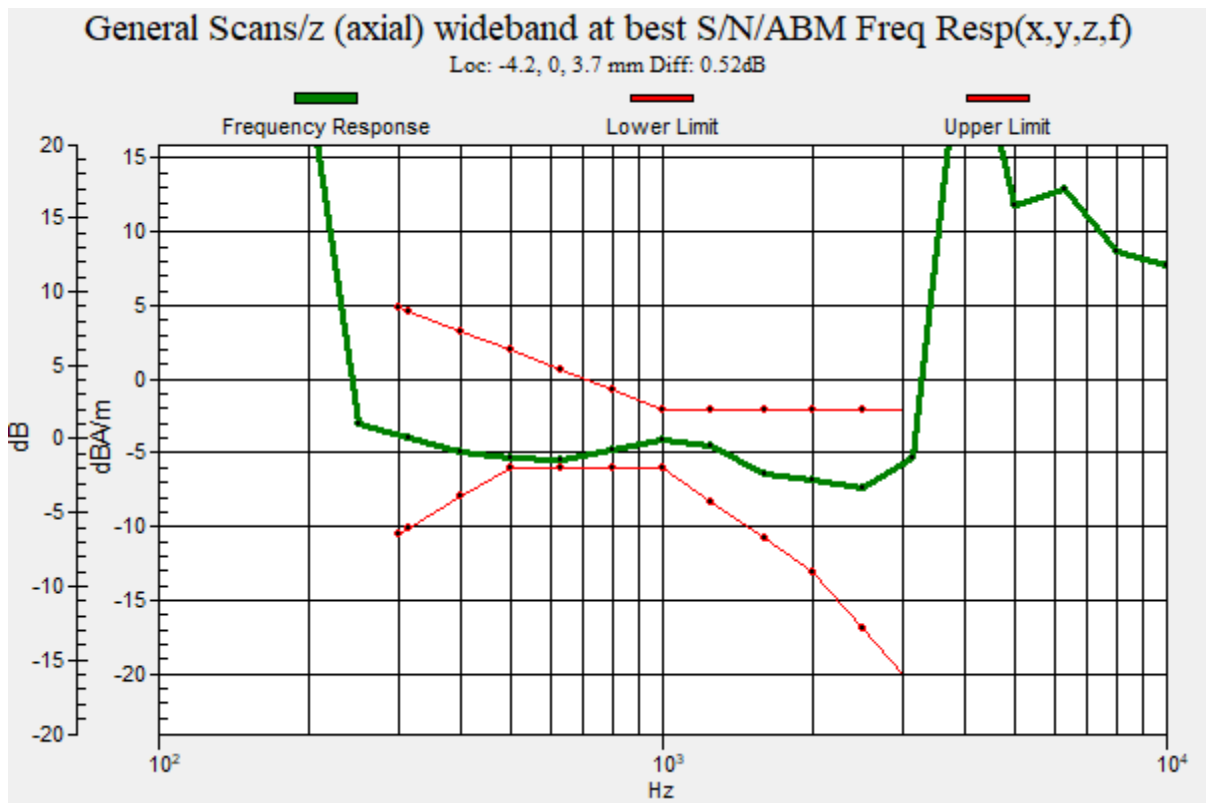

**Plot 47 T-Coil Wi-Fi 5G U-NII-1 802.11a Y transversal**

Date: 2022/7/5

Communication System: UID 10062 - CAC, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5180 MHz; Duty Cycle: 1:7.37564

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11a HAC\_TCoil\_WD\_Emission-7.4kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 31.47 dB

ABM1 comp = -10.12 dBA/m

BWC Factor = 0.16 dB

Location: 0, -8.3, 3.7 mm

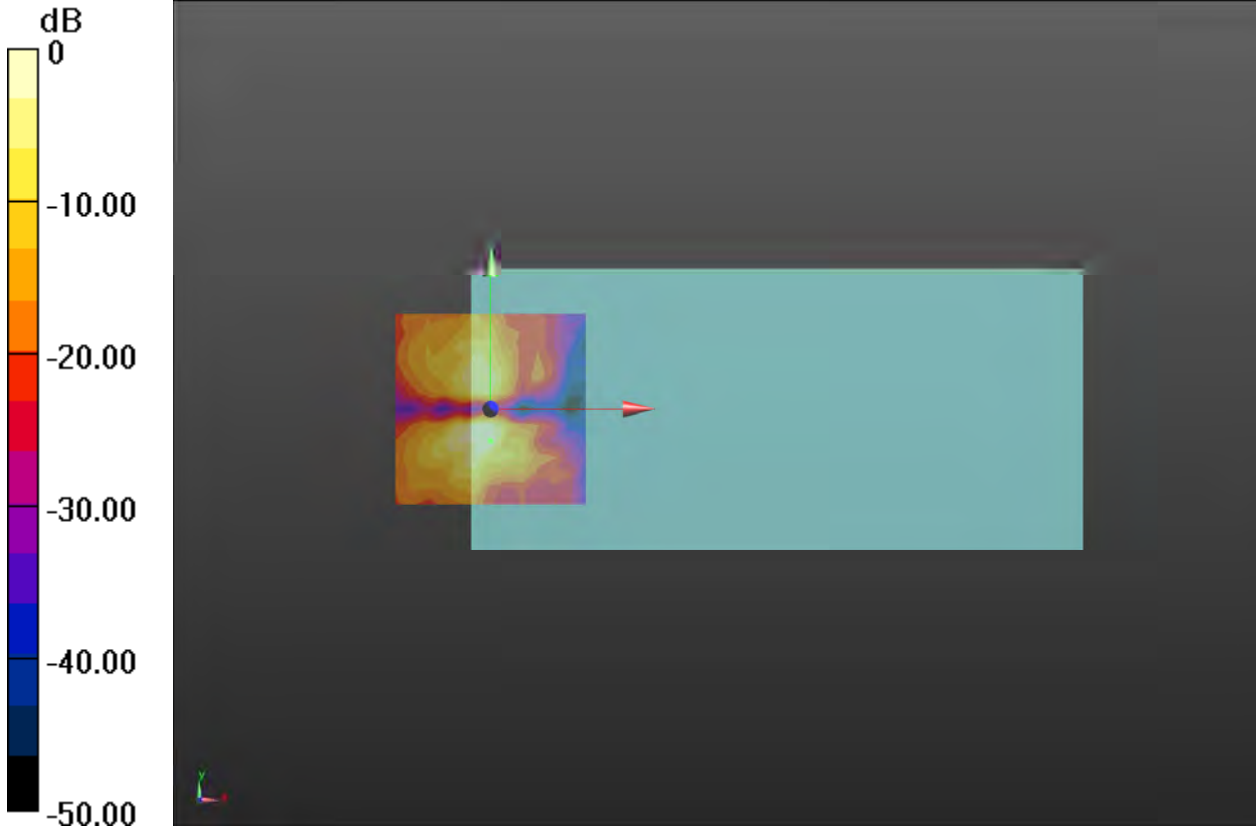

0 dB = 37.44 = 31.47 dB

**Plot 48 T-Coil Wi-Fi 5G U-NII-1 802.11a Z Axial**

Date: 2022/7/5

Communication System: UID 10062 - CAC, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5180 MHz; Duty Cycle: 1:7.37564

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11a HAC\_TCoil\_WD\_Emission-7.4kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 34.91 dB

ABM1 comp = -8.84 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 4.2, 3.7 mm

**11a HAC\_TCoil\_WD\_Emission-7.4kbps/General Scans/z (axial) wideband at best S/N/ABM****Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 1.53 dB


BWC Factor = 10.81 dB

Location: -4.2, 4.2, 3.7 mm



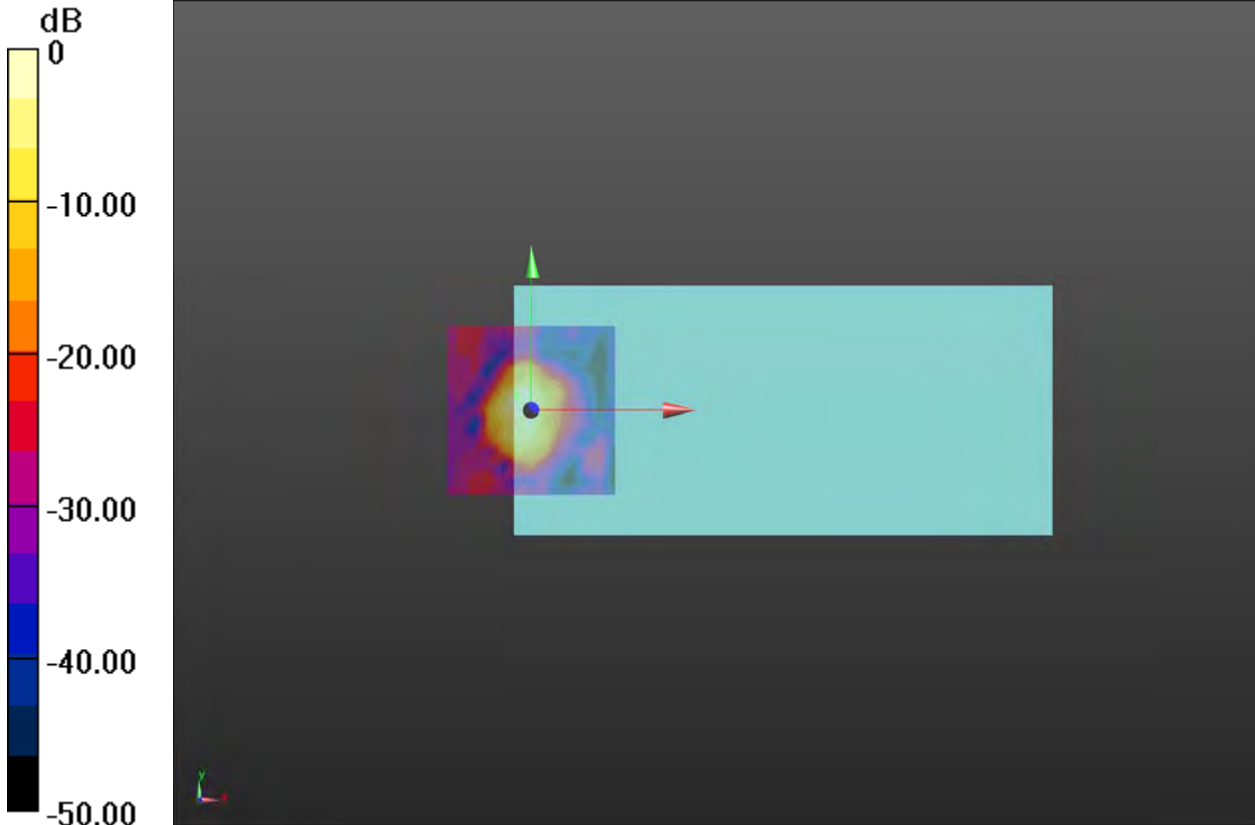

0 dB = 55.65 = 34.91 dB

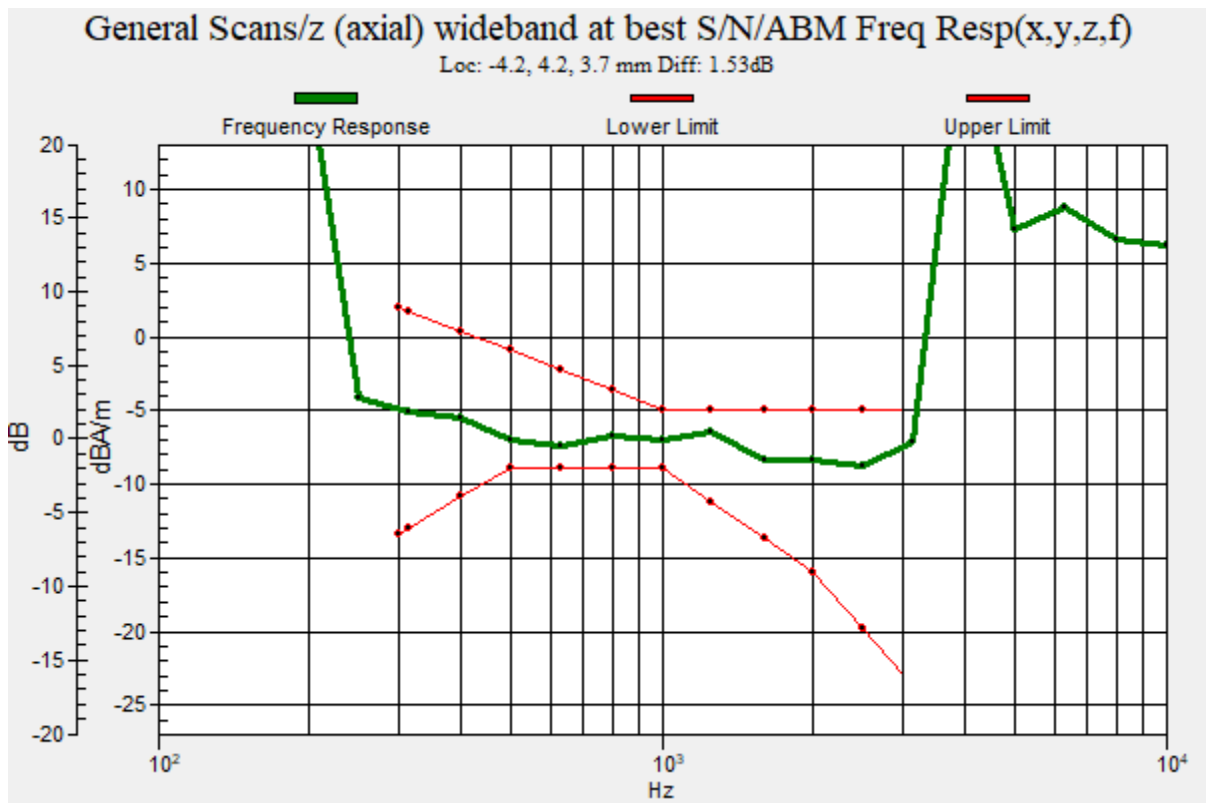

**Plot 49 T-Coil Wi-Fi 5G U-NII-3 802.11a Y transversal**

Date: 2022/7/9

Communication System: UID 10062 - CAC, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5785 MHz; Duty Cycle: 1:7.37564

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11a HAC\_TCoil\_WD\_Emission-7.4kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 30.36 dB

ABM1 comp = -13.38 dBA/m

BWC Factor = 0.16 dB

Location: 0, -4.2, 3.7 mm

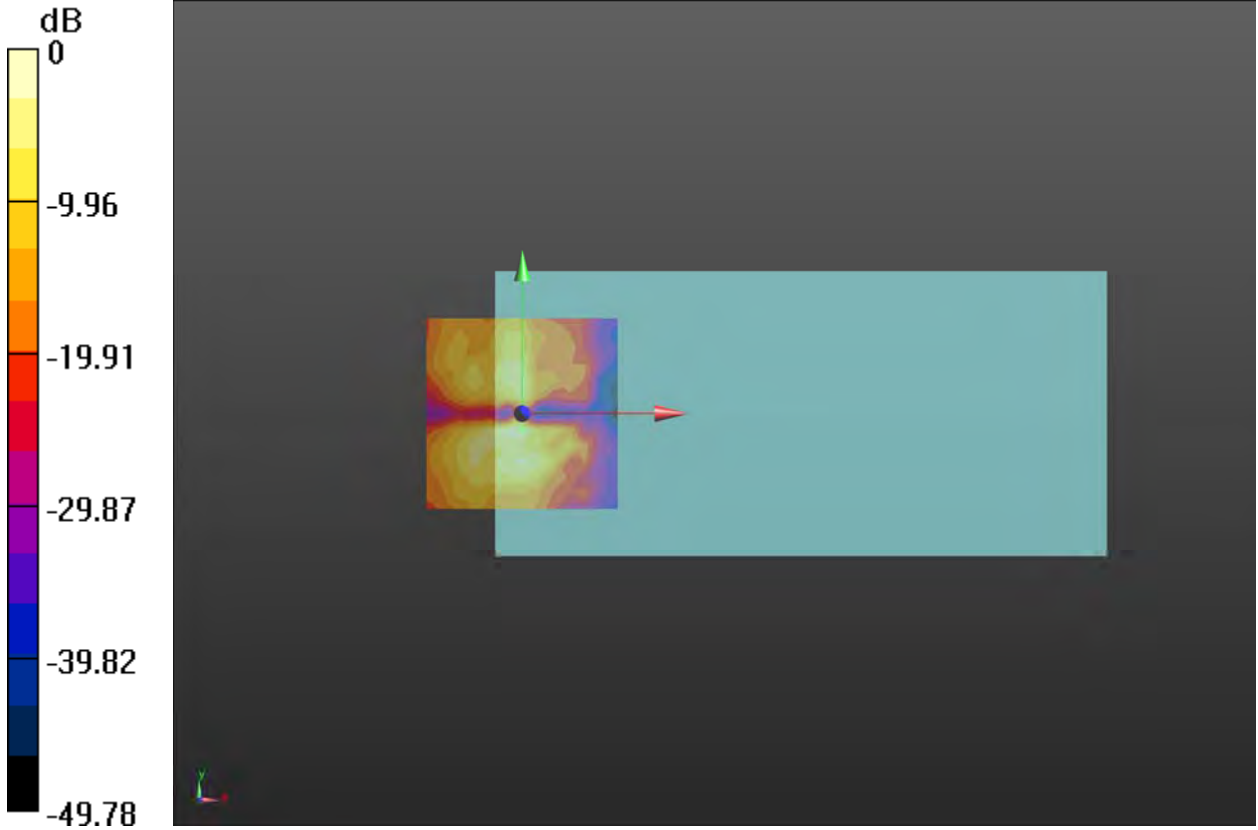

0 dB = 32.94 = 30.35 dB

**Plot 50 T-Coil Wi-Fi 5G U-NII-3 802.11a Z Axial**

Date: 2022/7/9

Communication System: UID 10062 - CAC, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5785 MHz; Duty Cycle: 1:7.37564

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11a HAC\_TCoil\_WD\_Emission-7.4kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 33.42 dB

ABM1 comp = -3.10 dBA/m

BWC Factor = 0.16 dB

Location: 0, 0, 3.7 mm

**11a HAC\_TCoil\_WD\_Emission-7.4kbps/General Scans/z (axial) wideband at best S/N/ABM****Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 0.10 dB

BWC Factor = 10.81 dB

Location: 0, 0, 3.7 mm

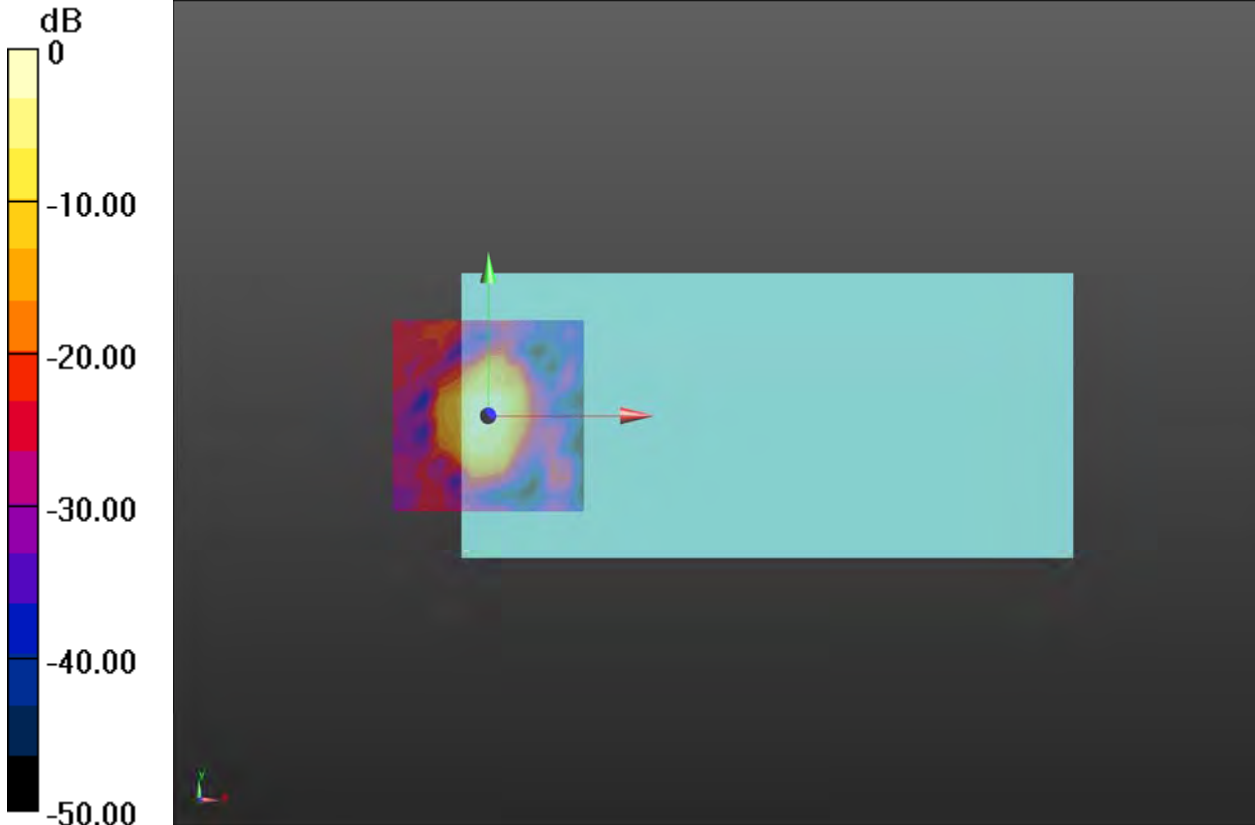

0 dB = 46.90 = 33.42 dB

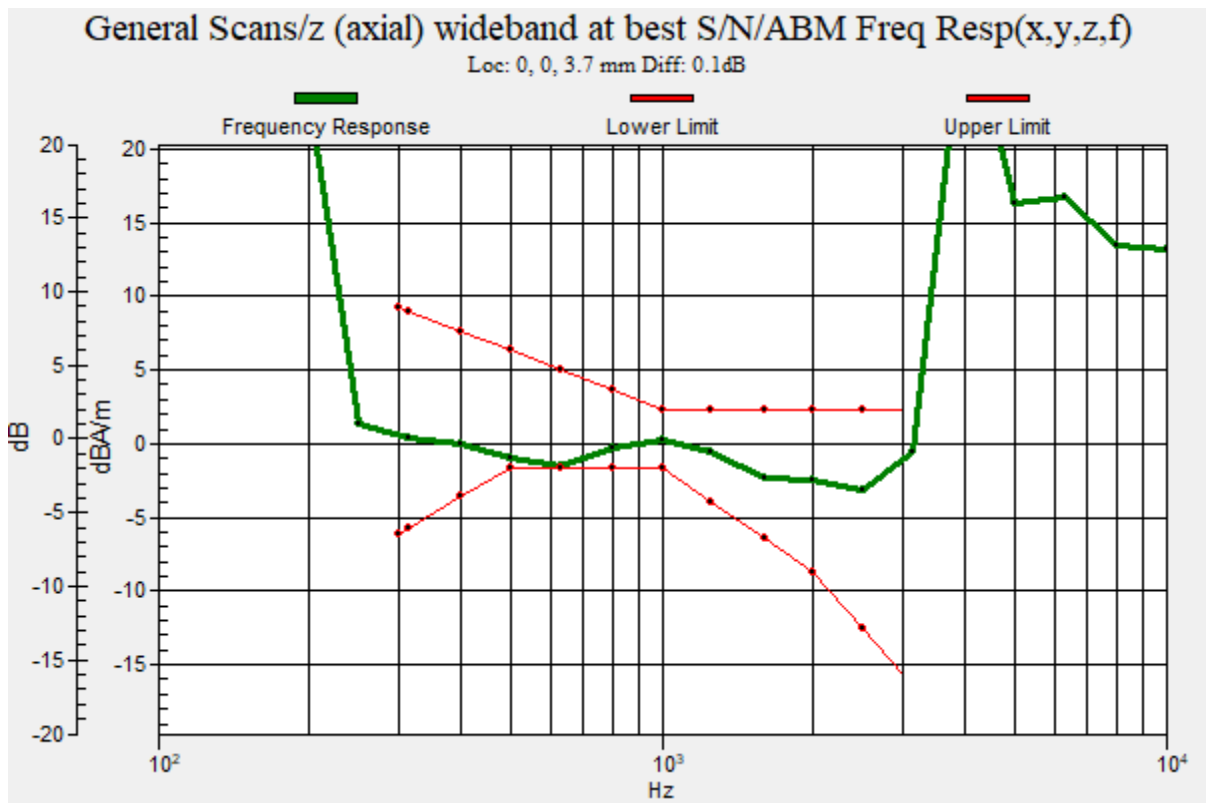

**OTT****Plot 51 T-Coil GSM 850 Y transversal**

Date: 2022/7/8

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:8.69961

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**GSM850 HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 27.22 dB

ABM1 comp = -8.50 dBA/m

BWC Factor = 0.17 dB

Location: -4.2, 8.3, 3.7 mm

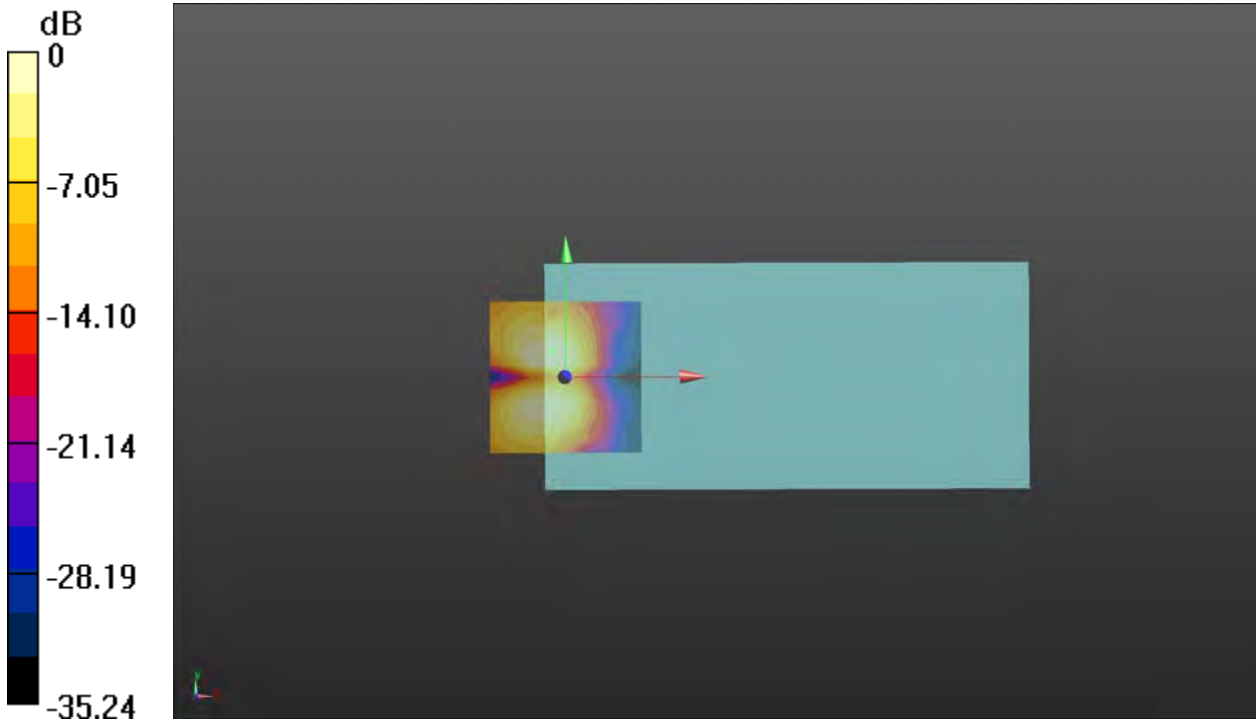

0 dB = 22.97 = 27.22 dB

**Plot 52 T-Coil GSM 850 Z Axial**

Date: 2022/7/8

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:8.69961

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**GSM850 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z)****(13x13x1)**: Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 30.36 dB

ABM1 comp = -3.95 dBA/m

BWC Factor = 0.17 dB

Location: -4.2, 0, 3.7 mm

**GSM850 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq****Resp(x,y,z,f) (1x1x1)**: Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 0.55 dB


BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm



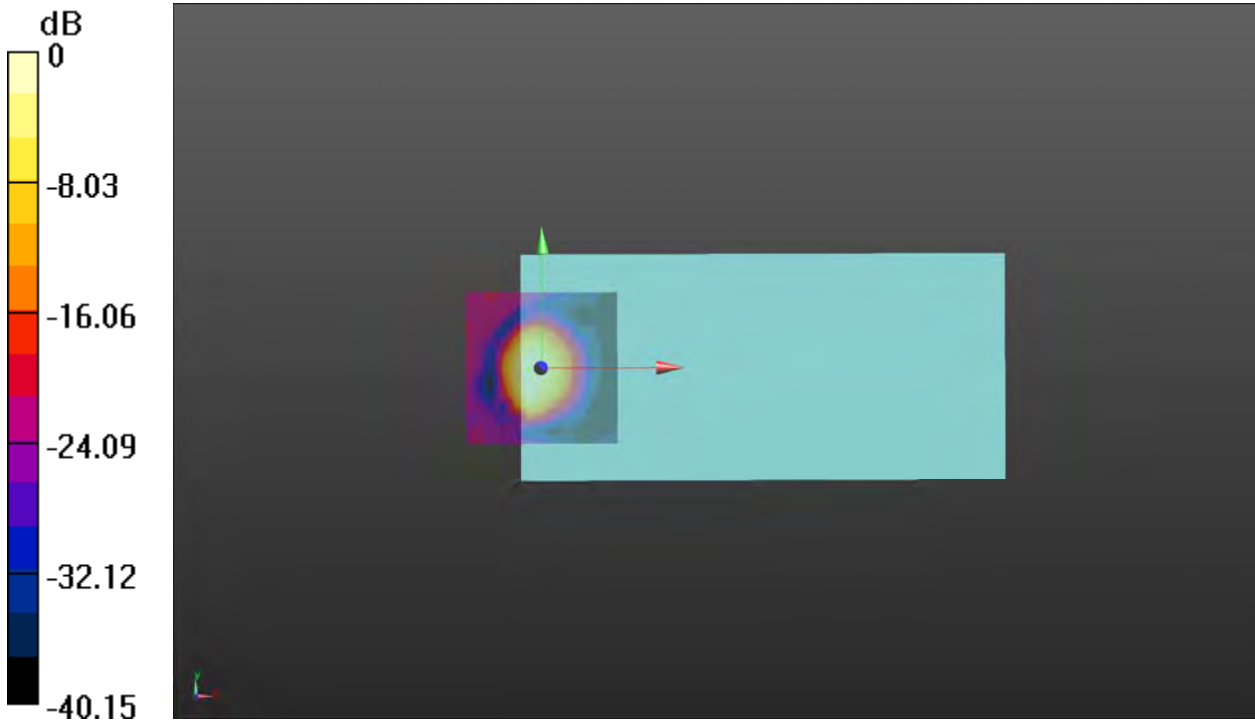

0 dB = 32.96 = 30.36 dB

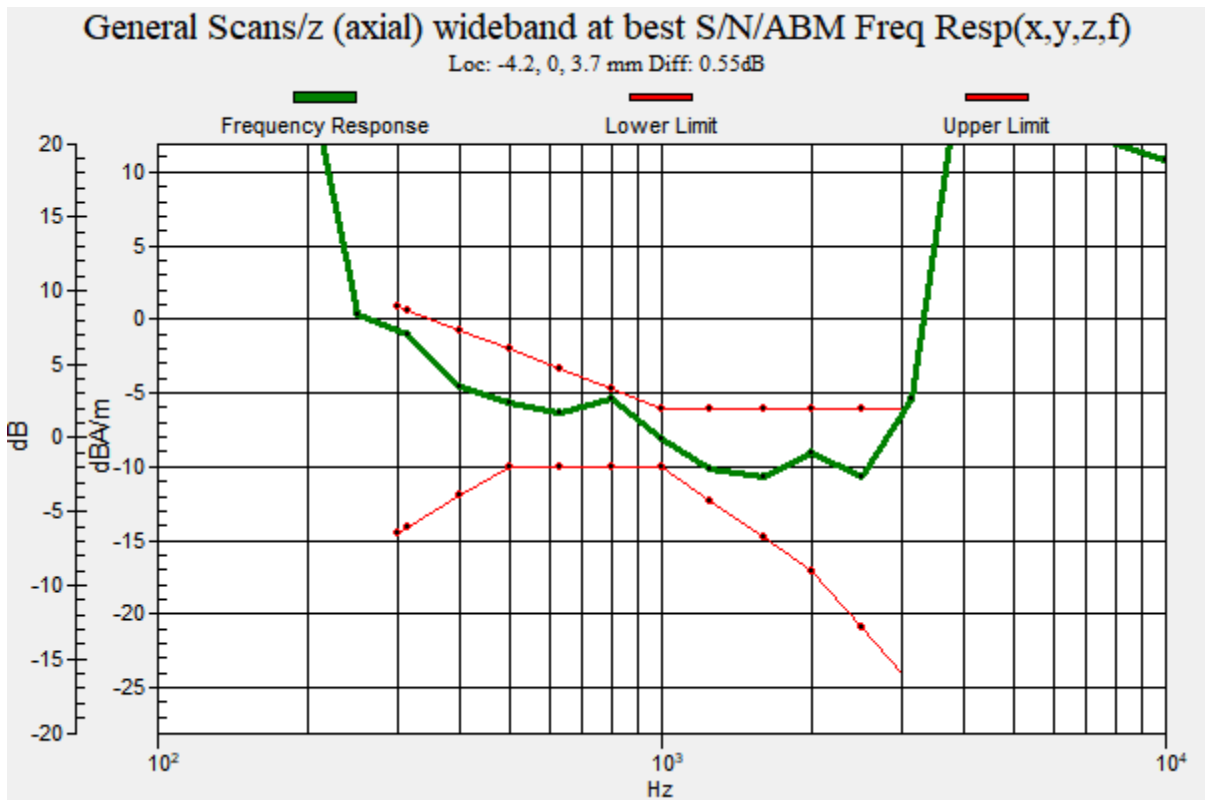

**Plot 53 T-Coil GSM 1900 Y transversal**

Date: 2022/7/8

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**GSM1900 HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 30.37 dB

ABM1 comp = -7.27 dBA/m

BWC Factor = 0.17 dB

Location: -4.2, 8.3, 3.7 mm

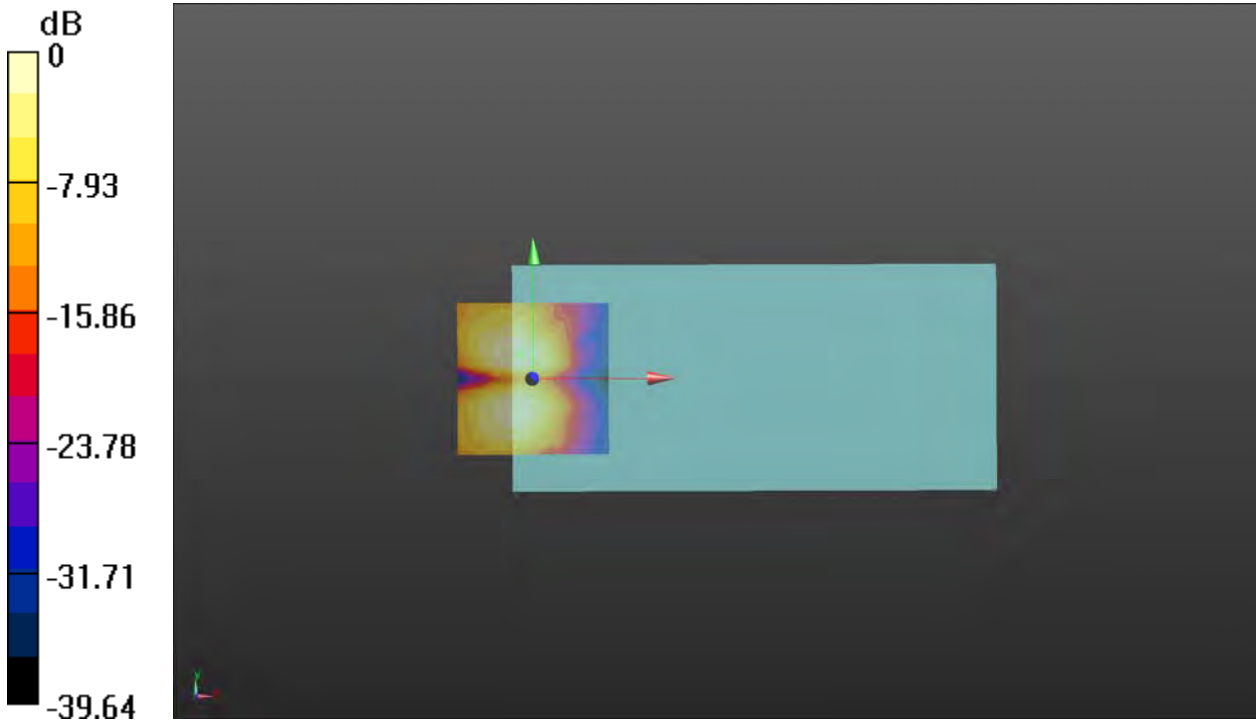

0 dB = 33.01 = 30.37 dB

**Plot 54 T-Coil GSM 1900 Z Axial**

Date: 2022/7/8

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**GSM1900 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z)****(13x13x1)**: Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 36.03 dB

ABM1 comp = -1.88 dBA/m

BWC Factor = 0.17 dB

Location: -4.2, 0, 3.7 mm

**GSM1900 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq****Resp(x,y,z,f) (1x1x1)**: Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 0.00 dB

BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm

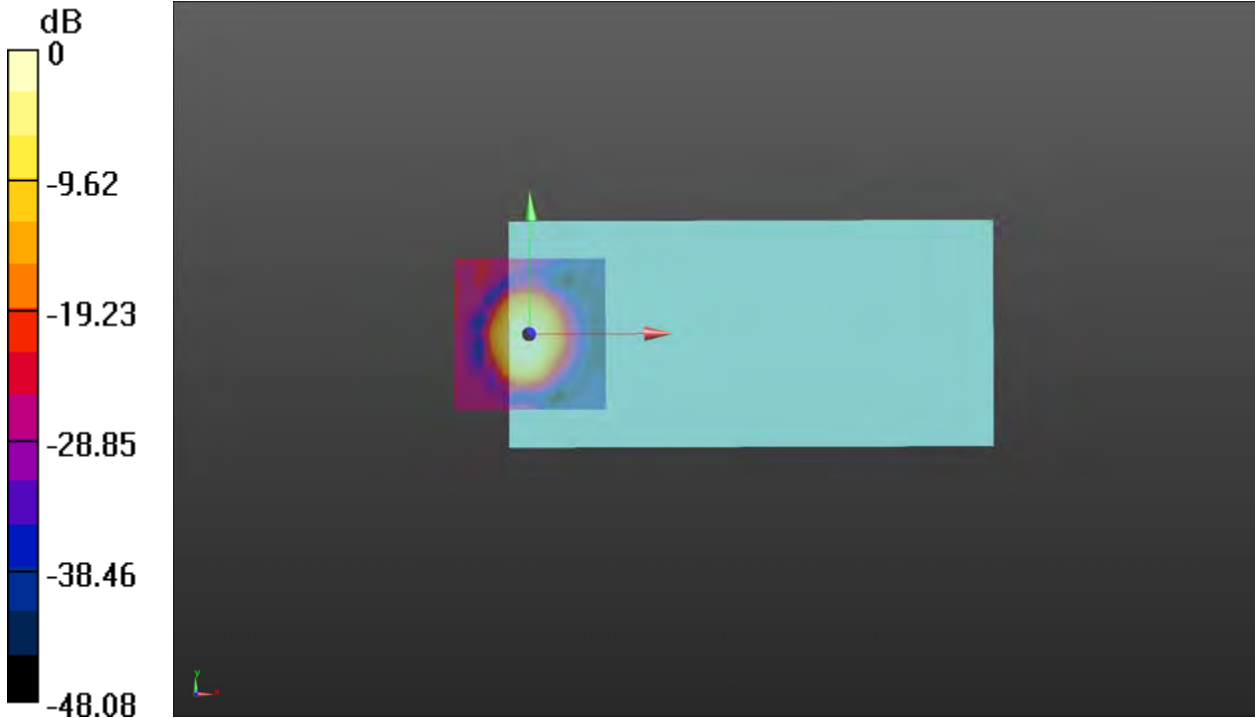

0 dB = 63.29 = 36.03 dB

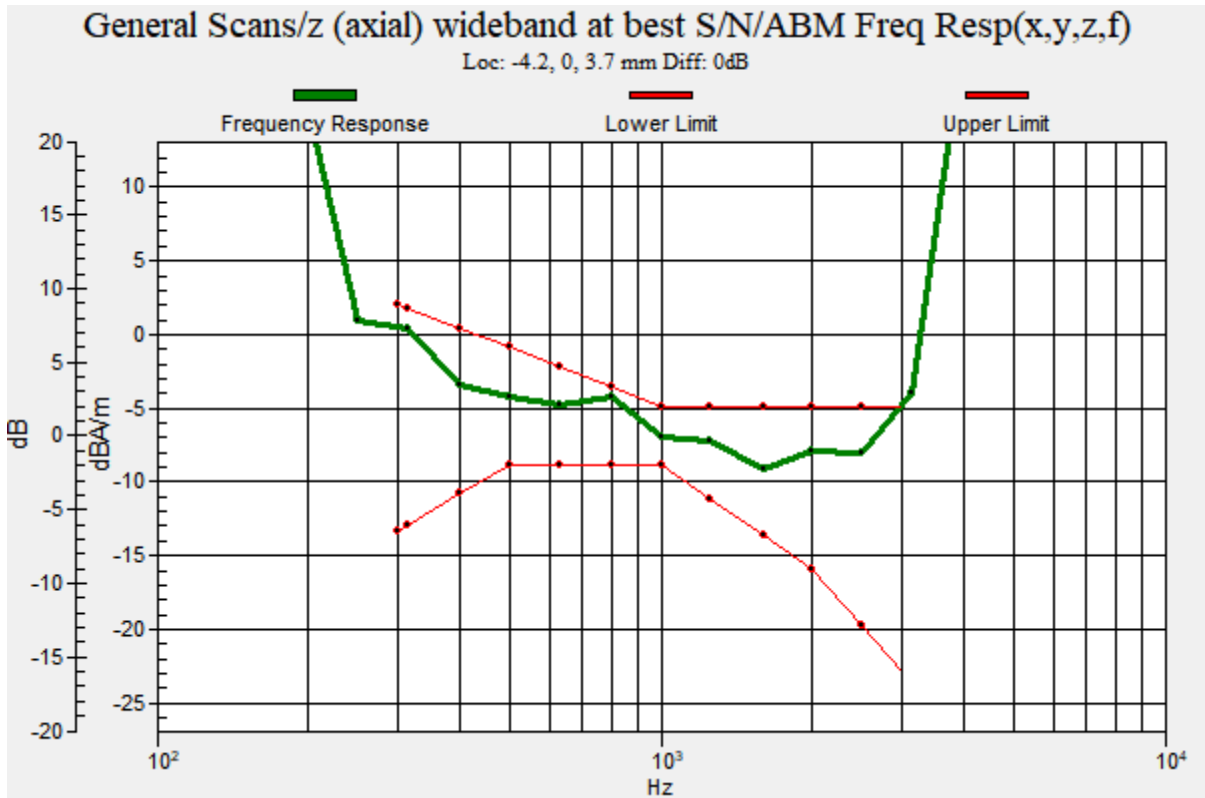

**Plot 55 T-Coil WCDMA Band II Y transversal**

Date: 2022/7/8

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WCDMA B2 HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 20.26 dB

ABM1 comp = -15.04 dBA/m

BWC Factor = 0.17 dB

Location: -4.2, 8.3, 3.7 mm

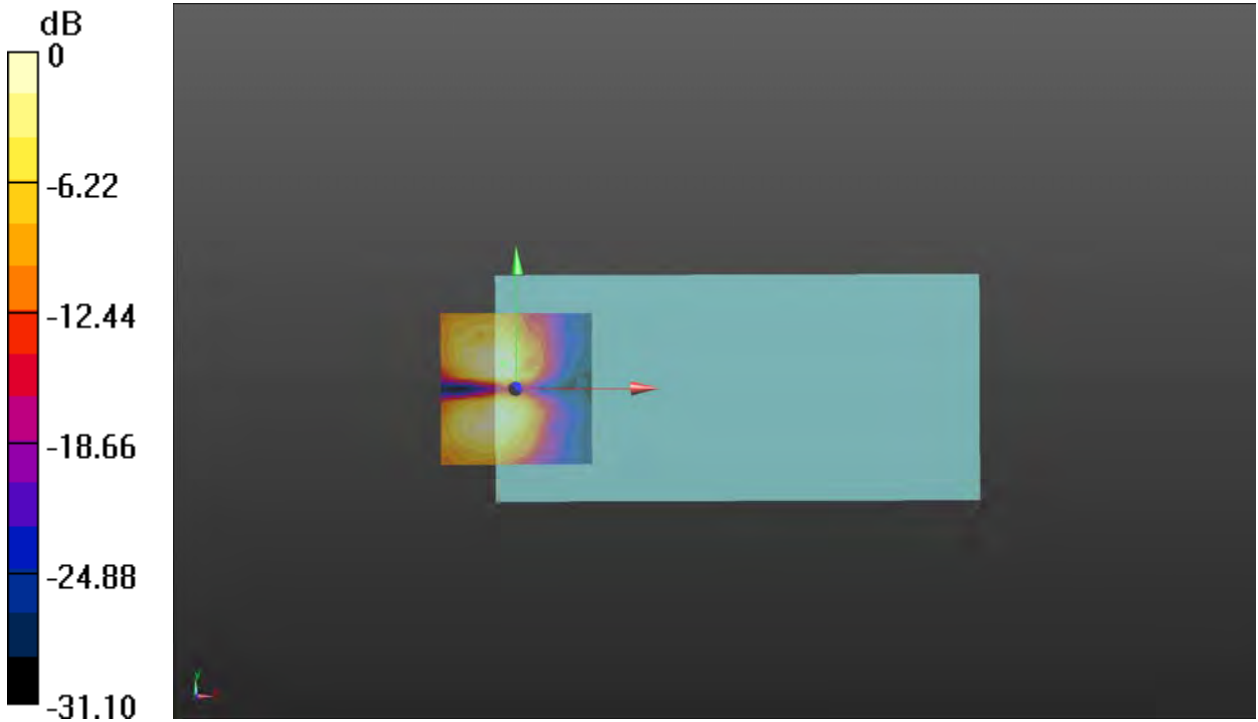

0 dB = 10.31 = 20.27 dB

**Plot 56 T-Coil WCDMA Band II Z Axial**

Date: 2022/7/8

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WCDMA B2 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z)****(13x13x1)**: Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 26.92 dB

ABM1 comp = -6.12 dBA/m

BWC Factor = 0.17 dB

Location: 0, 0, 3.7 mm

**WCDMA B2 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq****Resp(x,y,z,f) (1x1x1)**: Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 0.56 dB


BWC Factor = 10.81 dB

Location: 0, 0, 3.7 mm



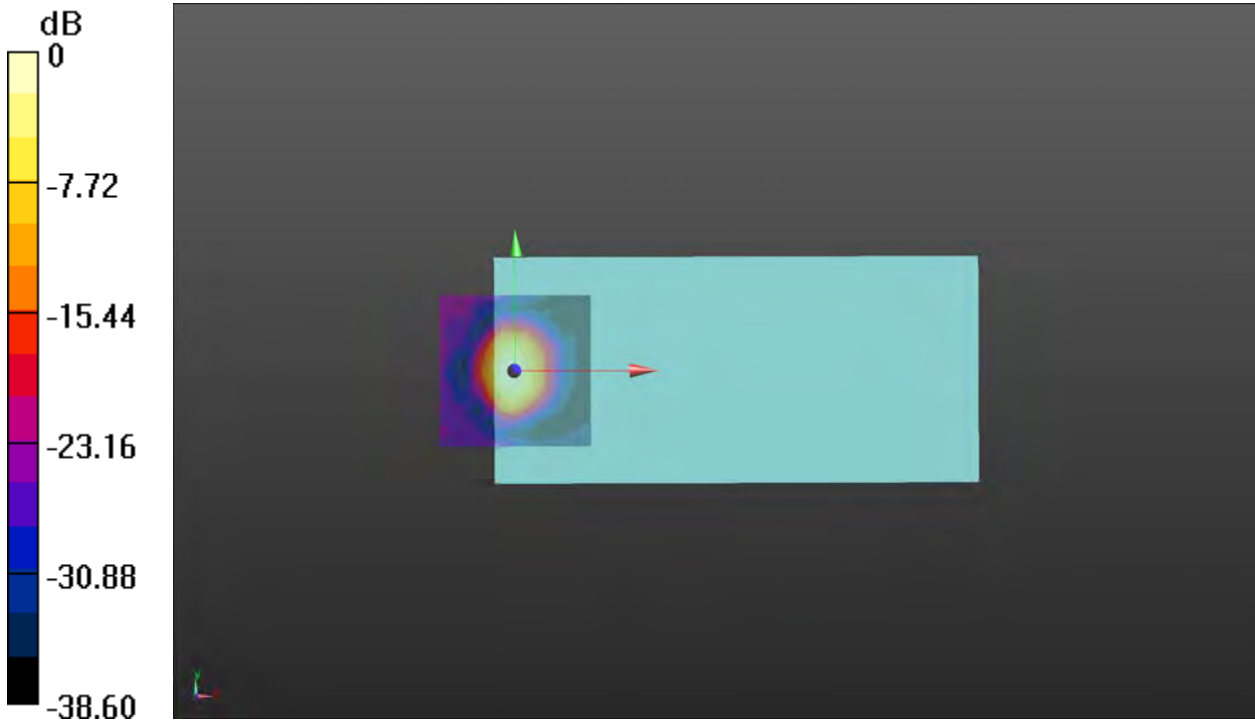

0 dB = 22.19 = 26.92 dB

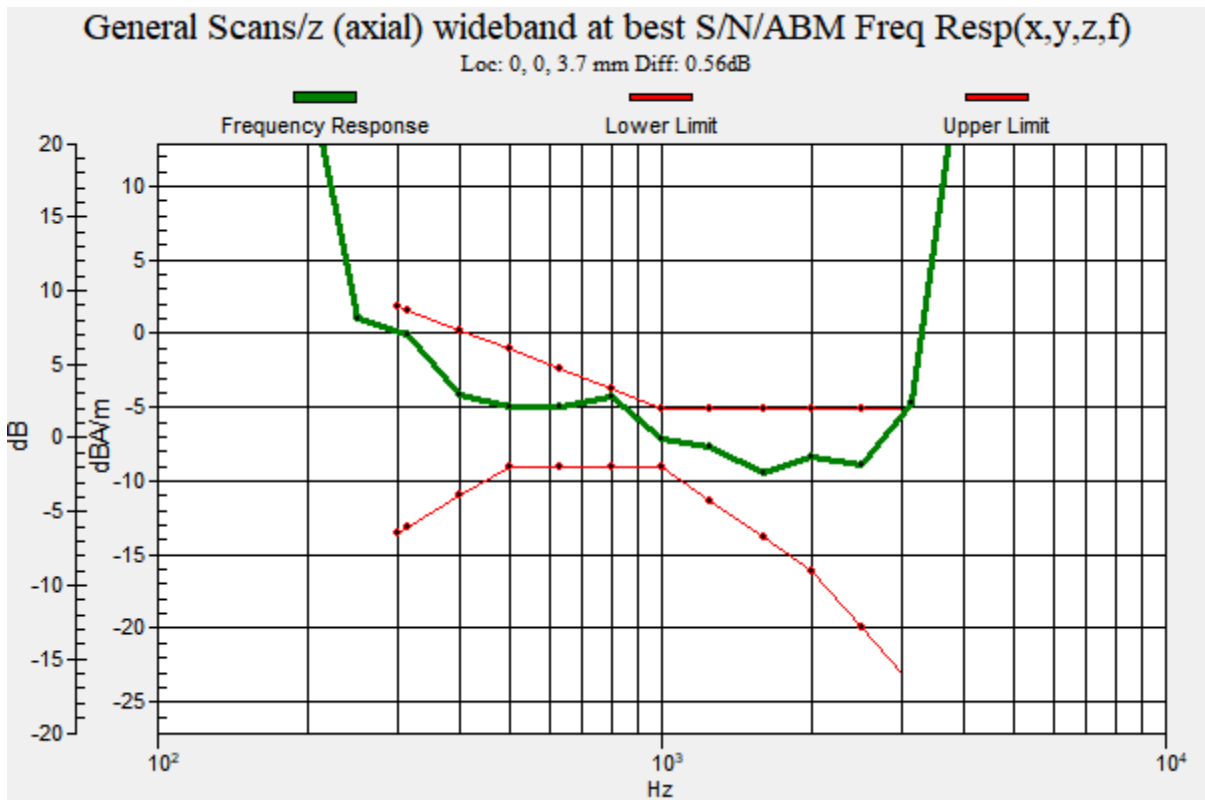

**Plot 57 T-Coil WCDMA Band IV Y transversal**

Date: 2022/7/8

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WCDMA B4 HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 20.41 dB

ABM1 comp = -16.22 dBA/m

BWC Factor = 0.17 dB

Location: 0, 4.2, 3.7 mm

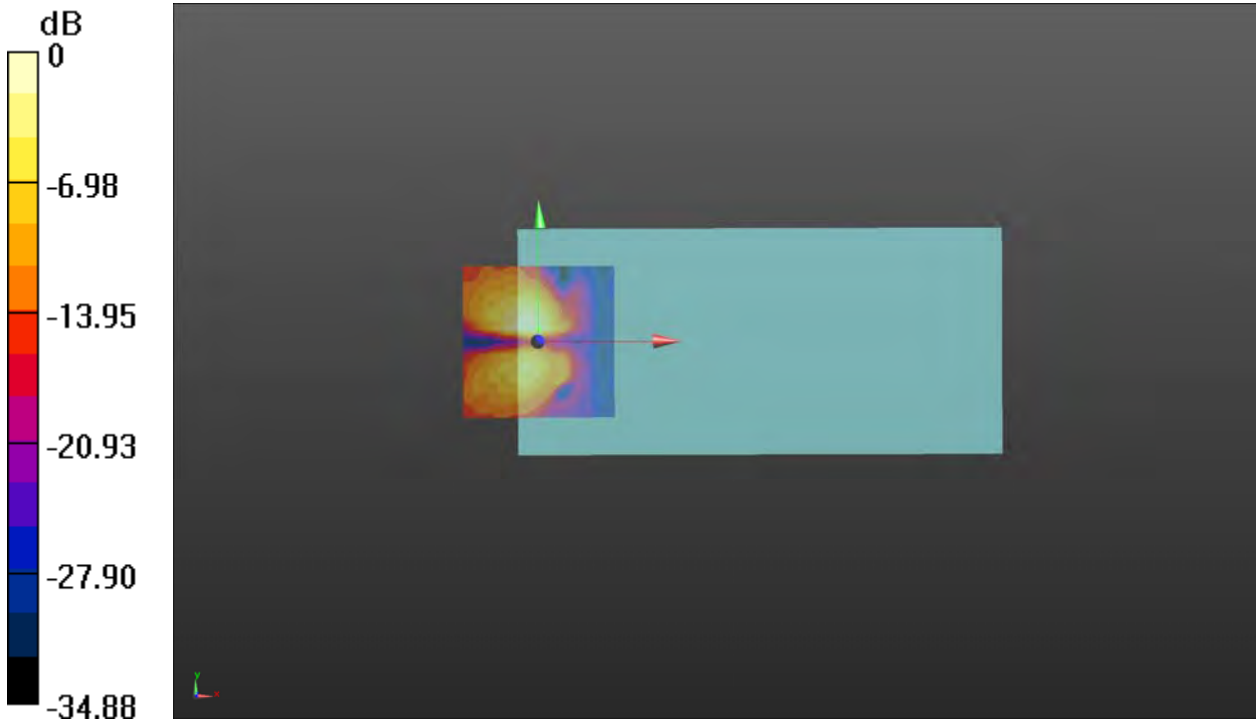

0 dB = 10.48 = 20.41 dB

**Plot 58 T-Coil WCDMA Band IV Z Axial**

Date: 2022/7/8

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WCDMA B4 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z)****(13x13x1)**: Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 26.83 dB

ABM1 comp = -9.70 dBA/m

BWC Factor = 0.17 dB

Location: -4.2, -4.2, 3.7 mm

**WCDMA B4 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq****Resp(x,y,z,f) (1x1x1)**: Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 0.63 dB

BWC Factor = 10.81 dB

Location: -4.2, -4.2, 3.7 mm

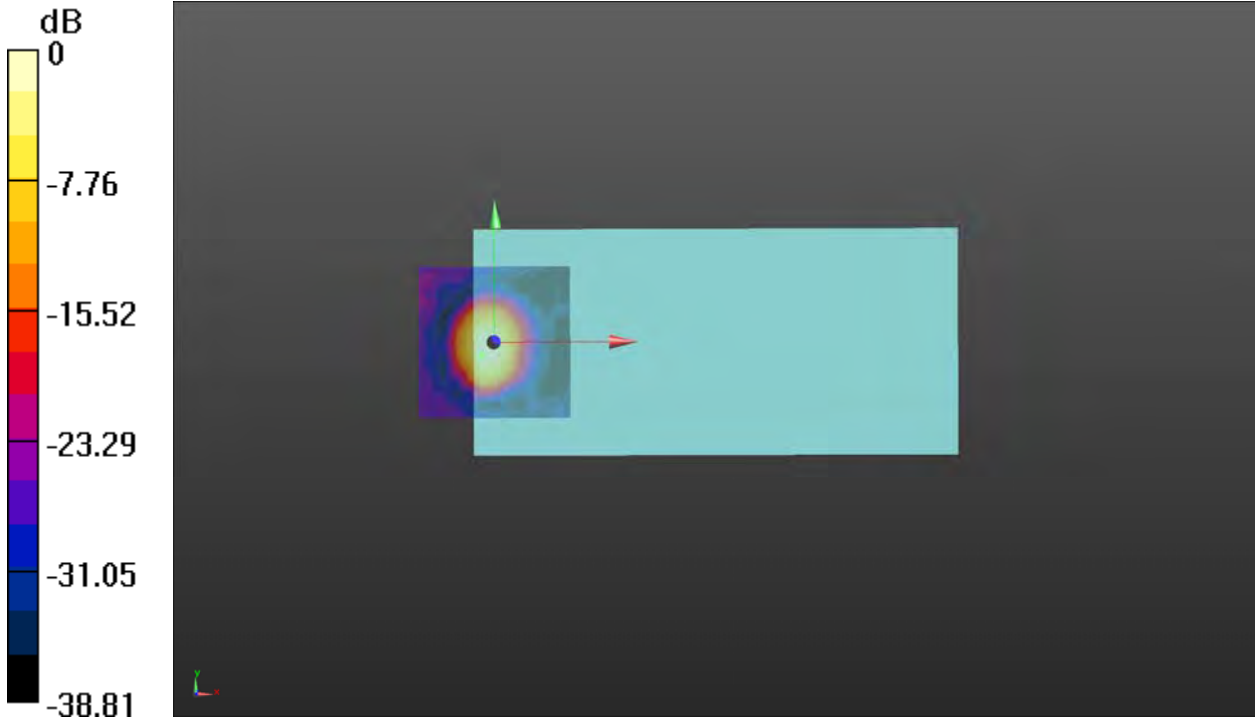

0 dB = 21.96 = 26.83 dB

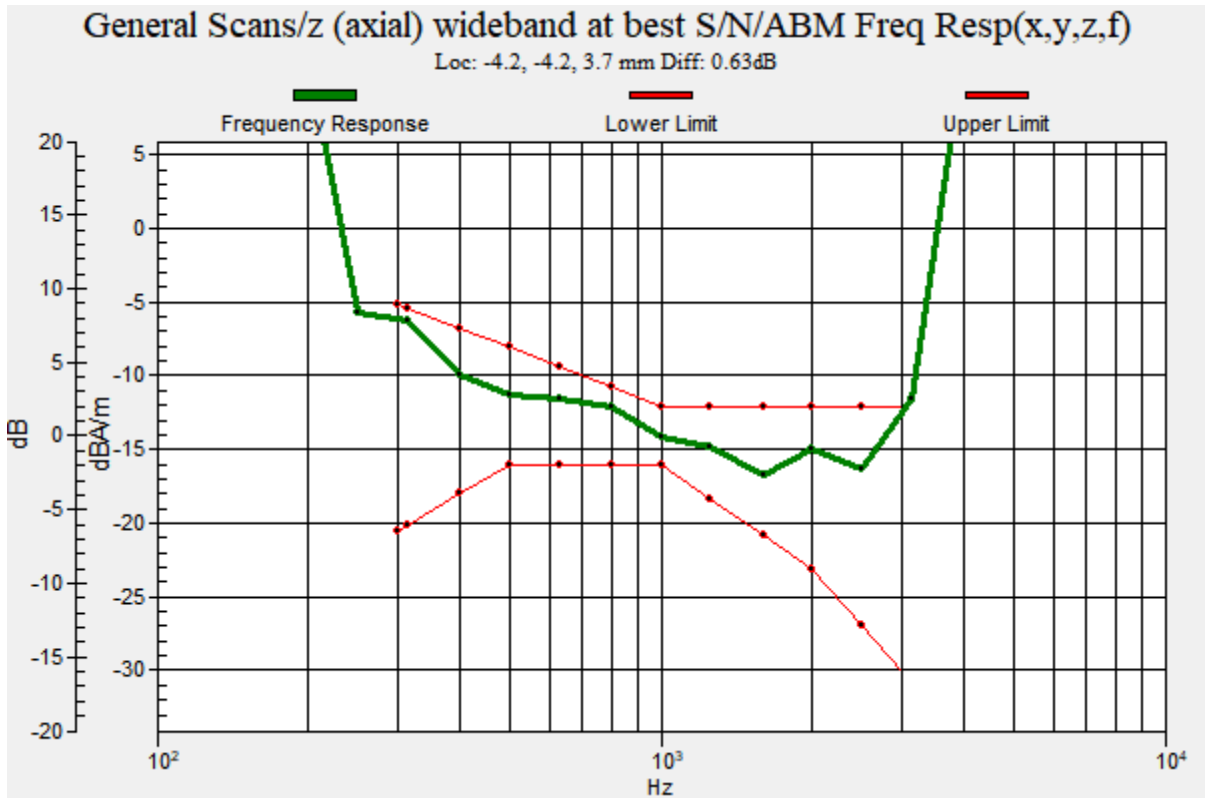

**Plot 59 T-Coil WCDMA Band V Y transversal**

Date: 2022/7/8

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WCDMA B5 HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 20.15 dB

ABM1 comp = -16.26 dBA/m

BWC Factor = 0.17 dB

Location: 0, 4.2, 3.7 mm

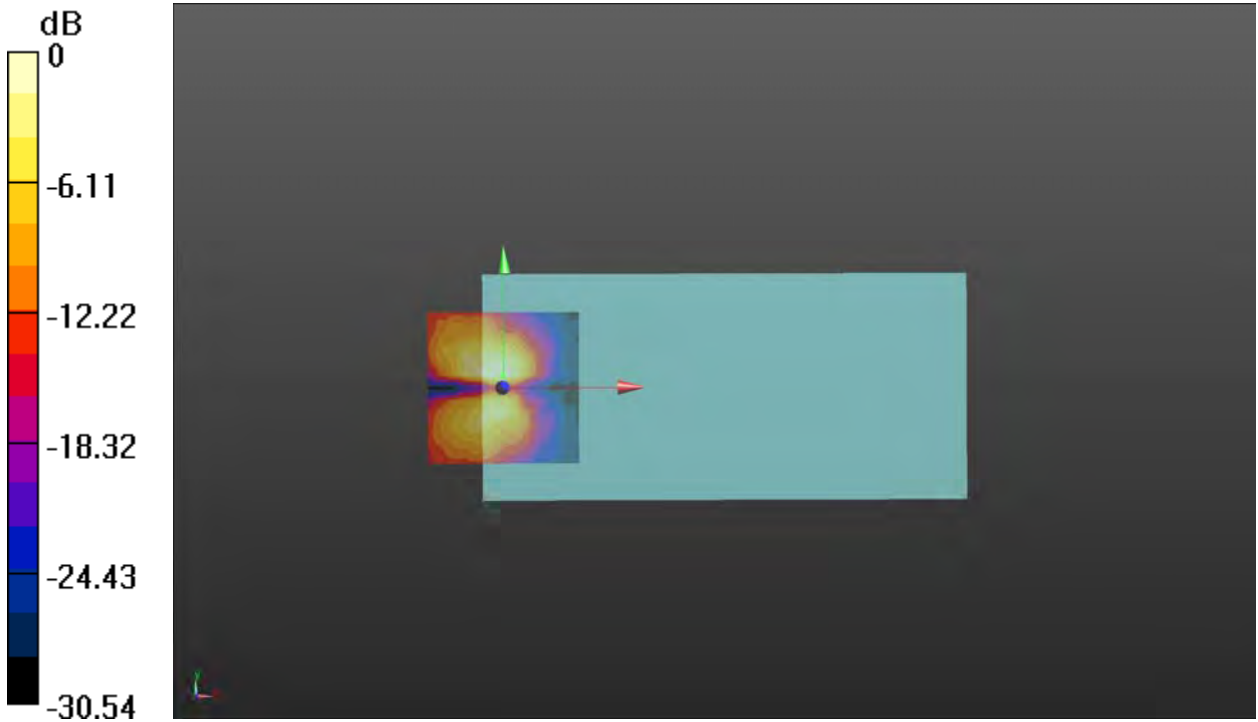

0 dB = 10.17 = 20.15 dB

**Plot 60 T-Coil WCDMA Band V Z Axial**

Date: 2022/7/8

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**WCDMA B5 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z)****(13x13x1)**: Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 22.86 dB

ABM1 comp = -14.37 dBA/m

BWC Factor = 0.17 dB

Location: -4.2, 0, 3.7 mm

**WCDMA B5 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq****Resp(x,y,z,f) (1x1x1)**: Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 1.89 dB


BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm



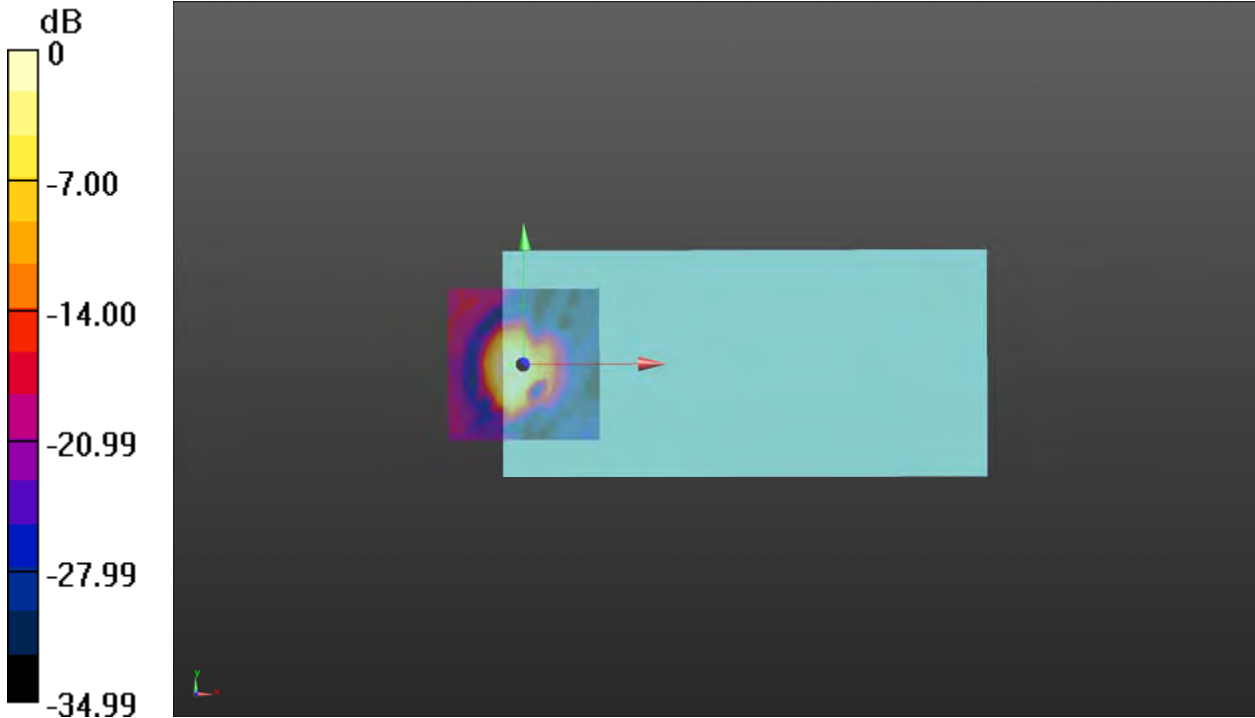

0 dB = 13.90 = 22.86 dB

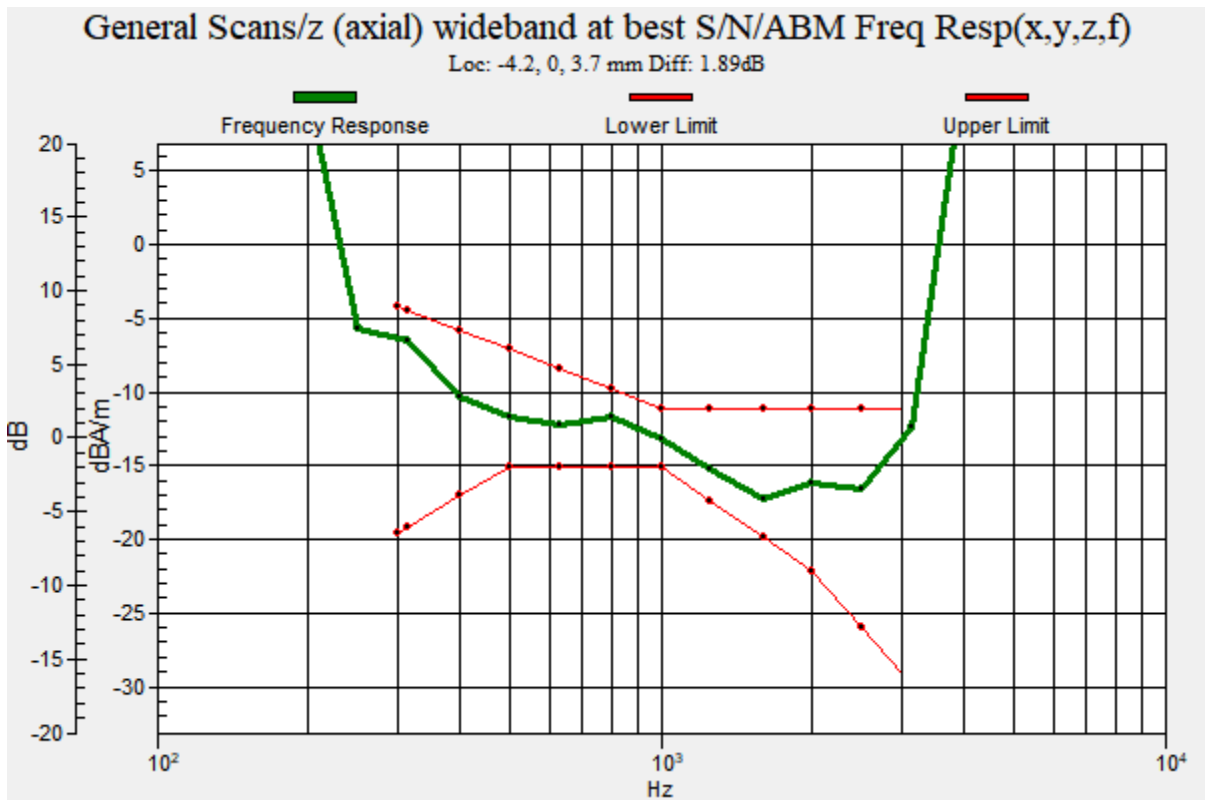

**Plot 61 T-Coil LTE Band 2 Y transversal**

Date: 2022/7/6




Communication System: UID 10100 - CAE, LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK);  
Frequency: 1880 MHz; Duty Cycle: 1:3.68638  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C  
Phantom section: TCoil Section  
DASY5 Configuration:  
Sensor-Surface: 0mm (Mechanical Surface Detection)  
Probe: AM1DV3 - 3082; Calibrated: 2022/2/23  
Electronics: DAE4 SN1692; Calibrated: 2021/10/4  
Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;  
Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B2 1005RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 33.76  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.16 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 29.08 dB  
ABM1 comp = -10.76 dBA/m  
BWC Factor = 0.16 dB  
Location: -4.2, -8.3, 3.7 mm

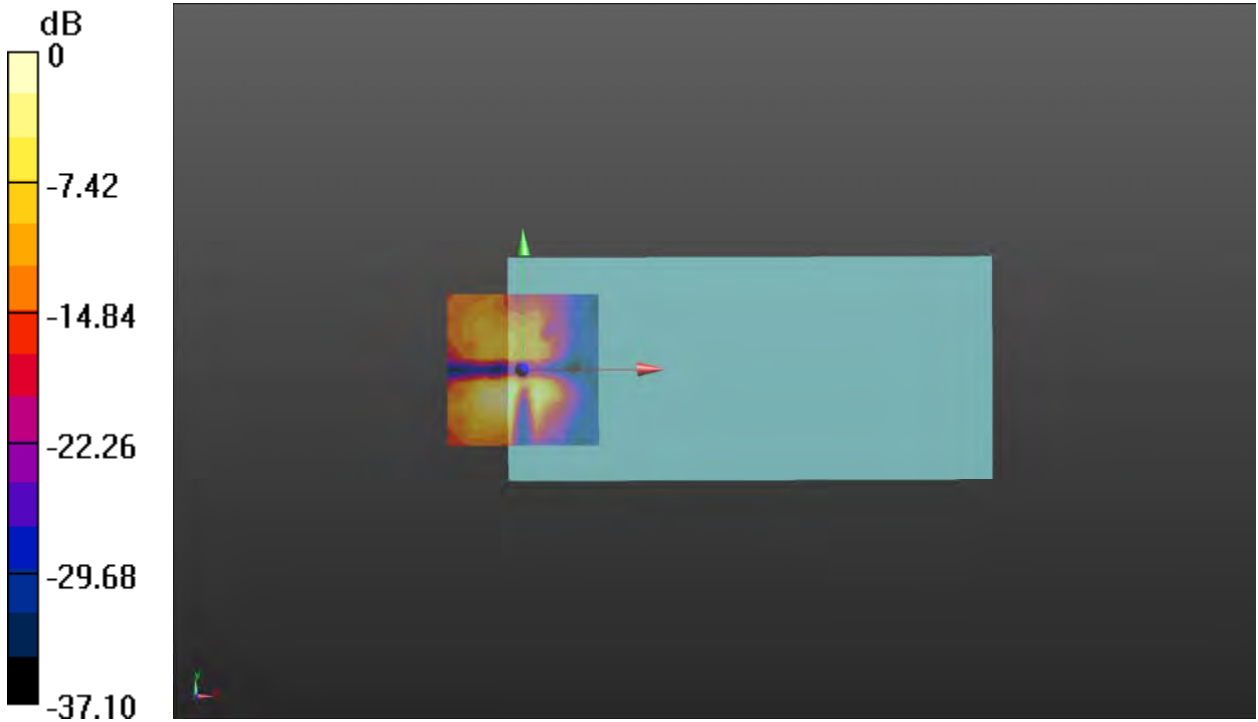

0 dB = 28.45 = 29.08 dB

**Plot 62 T-Coil LTE Band 2 Z Axial**

Date: 2022/7/6

Communication System: UID 10100 - CAE, LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK);

Frequency: 1880 MHz; Duty Cycle: 1:3.68638

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B2 1005RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 33.95 dB

ABM1 comp = -2.31 dBA/m

BWC Factor = 0.16 dB

Location: 0, 4.2, 3.7 mm

**LTE B2 1005RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 1.15 dB

BWC Factor = 10.81 dB

Location: 0, 4.2, 3.7 mm

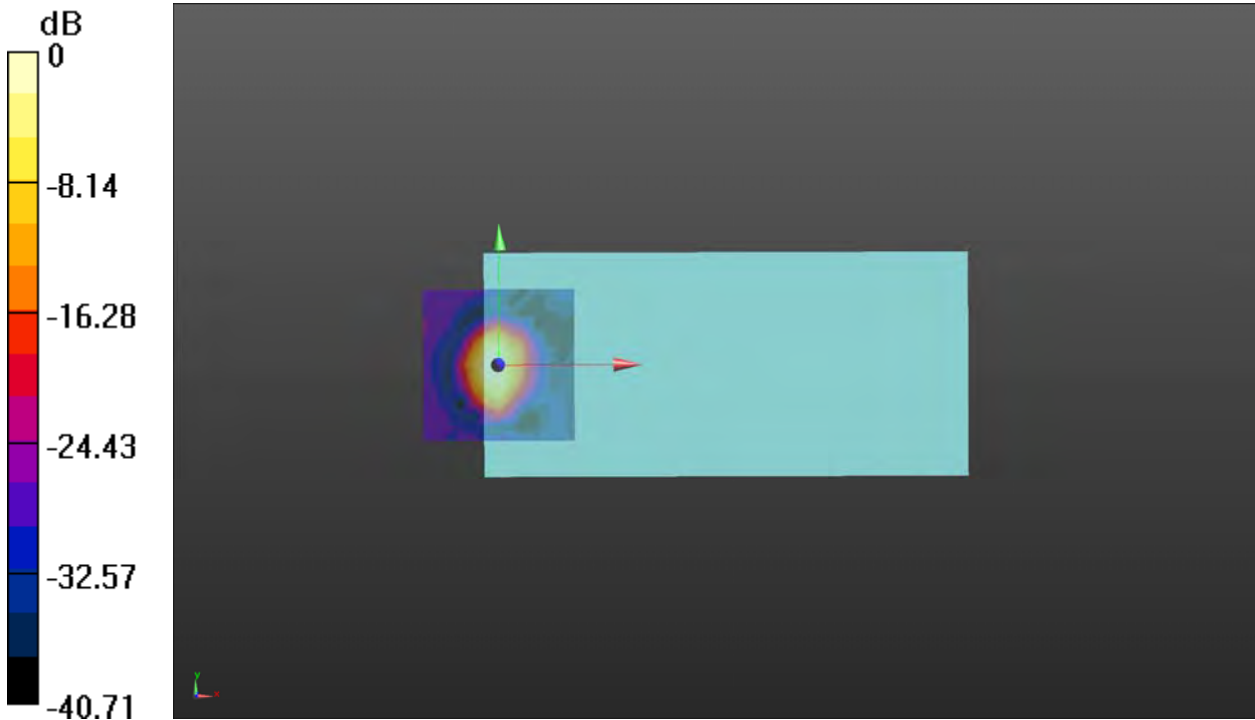

0 dB = 49.83 = 33.95 dB

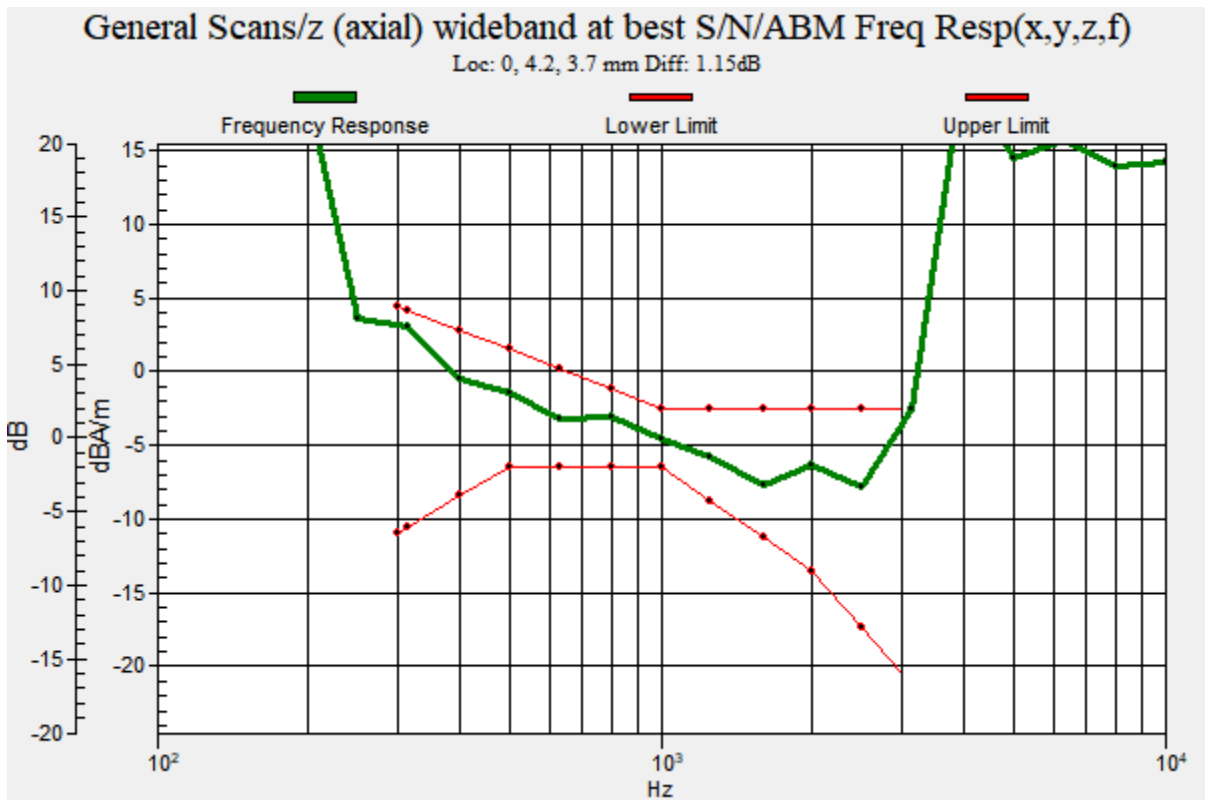

**Plot 63 T-Coil LTE Band 4 Y transversal**

Date: 2022/7/7

Communication System: UID 10100 - CAE, LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK);

Frequency: 1732.5 MHz; Duty Cycle: 1:3.68638

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B4 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x****50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 30.59 dB

ABM1 comp = -10.19 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

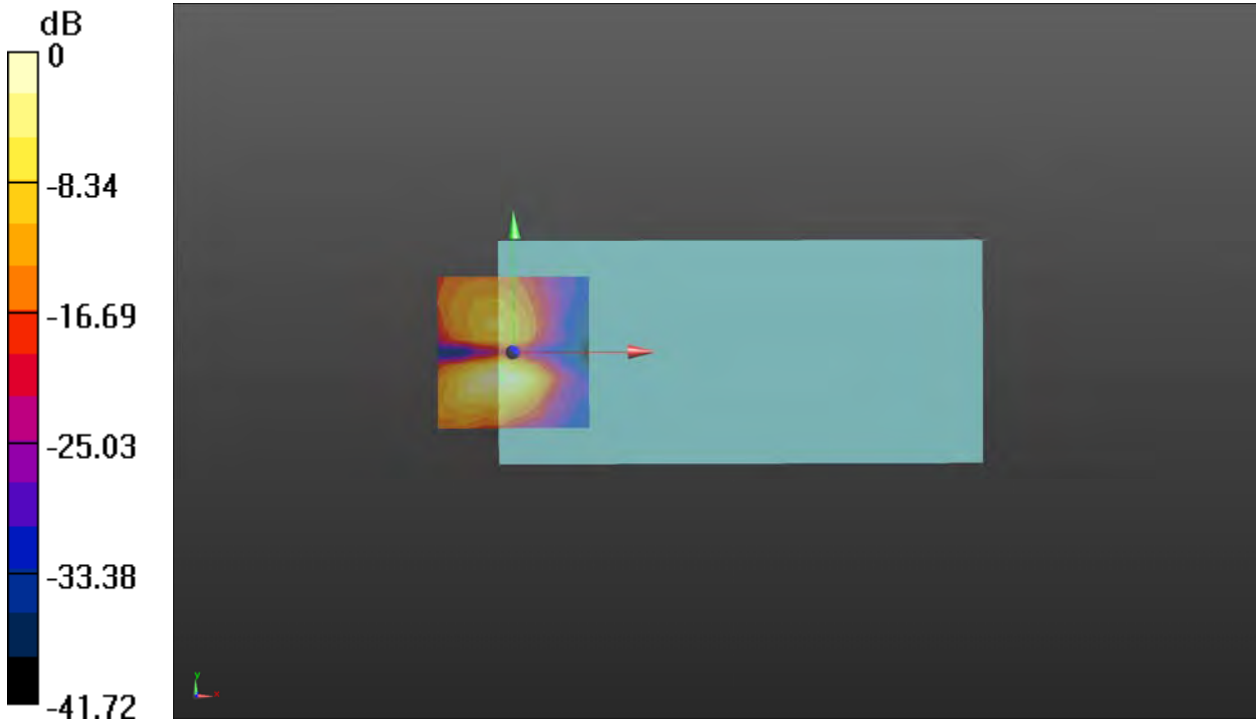

0 dB = 33.83 = 30.59 dB

**Plot 64 T-Coil LTE Band 4 Z Axial**

Date: 2022/7/6

Communication System: UID 10100 - CAE, LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK);

Frequency: 1732.5 MHz; Duty Cycle: 1:3.68638

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B4 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 36.18 dB

ABM1 comp = -2.38 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B4 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 0.55 dB


BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm



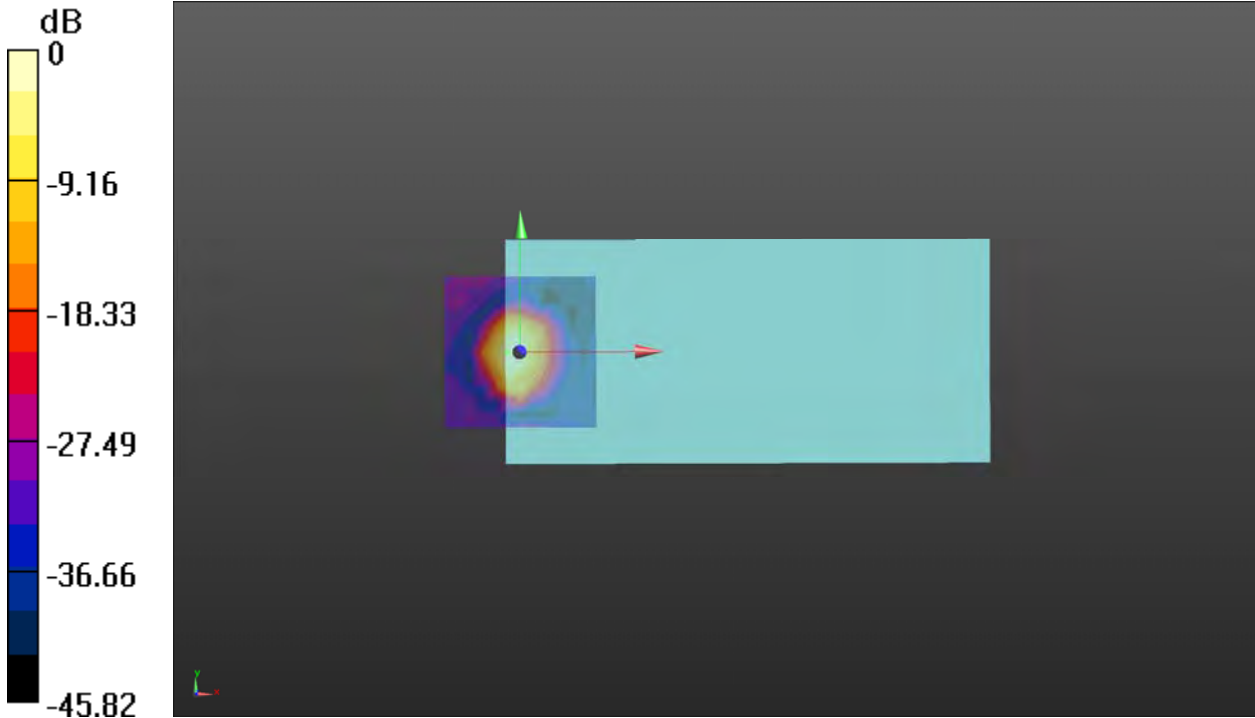

0 dB = 64.45 = 36.18 dB

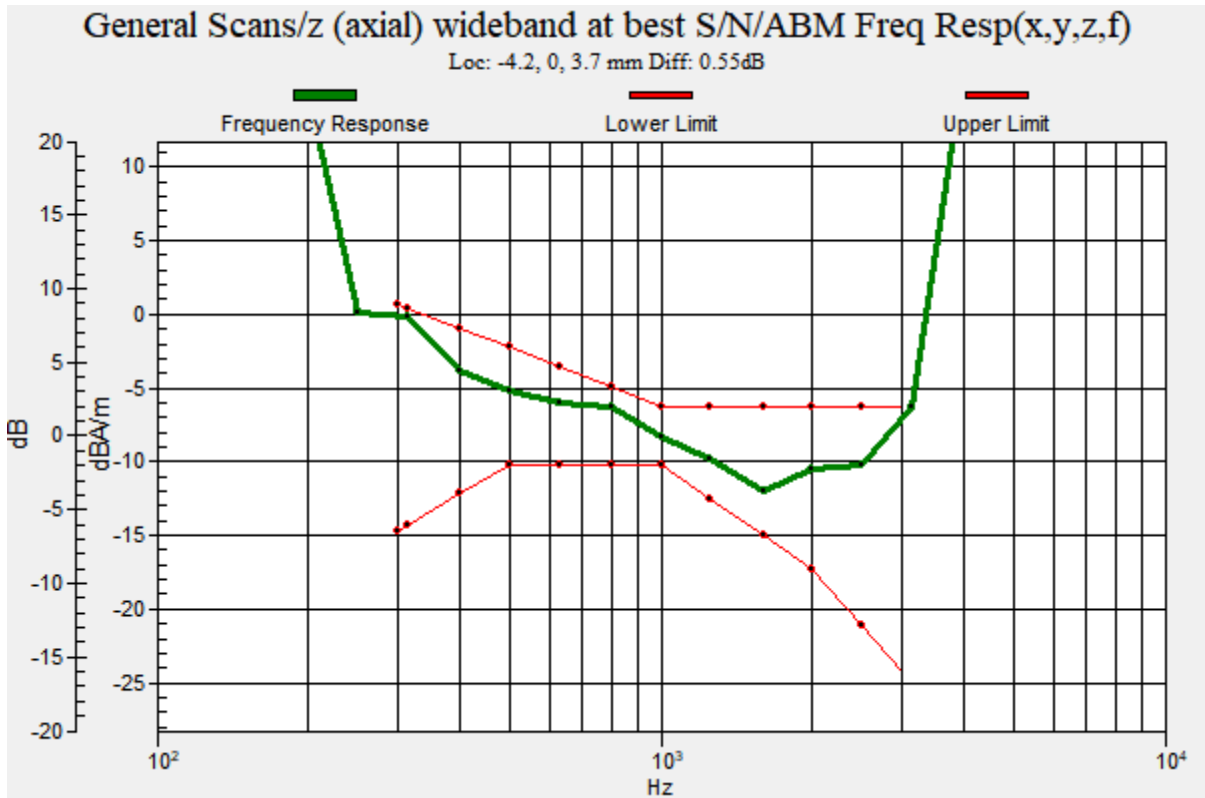

**Plot 65 T-Coil LTE Band 5 Y transversal**

Date: 2022/7/7

Communication System: UID 10108 - CAG, LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK);

Frequency: 836.5 MHz; Duty Cycle: 1:3.80102

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B5 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 27.87 dB

ABM1 comp = -9.57 dBA/m

BWC Factor = 0.16 dB

Location: 0, -8.3, 3.7 mm

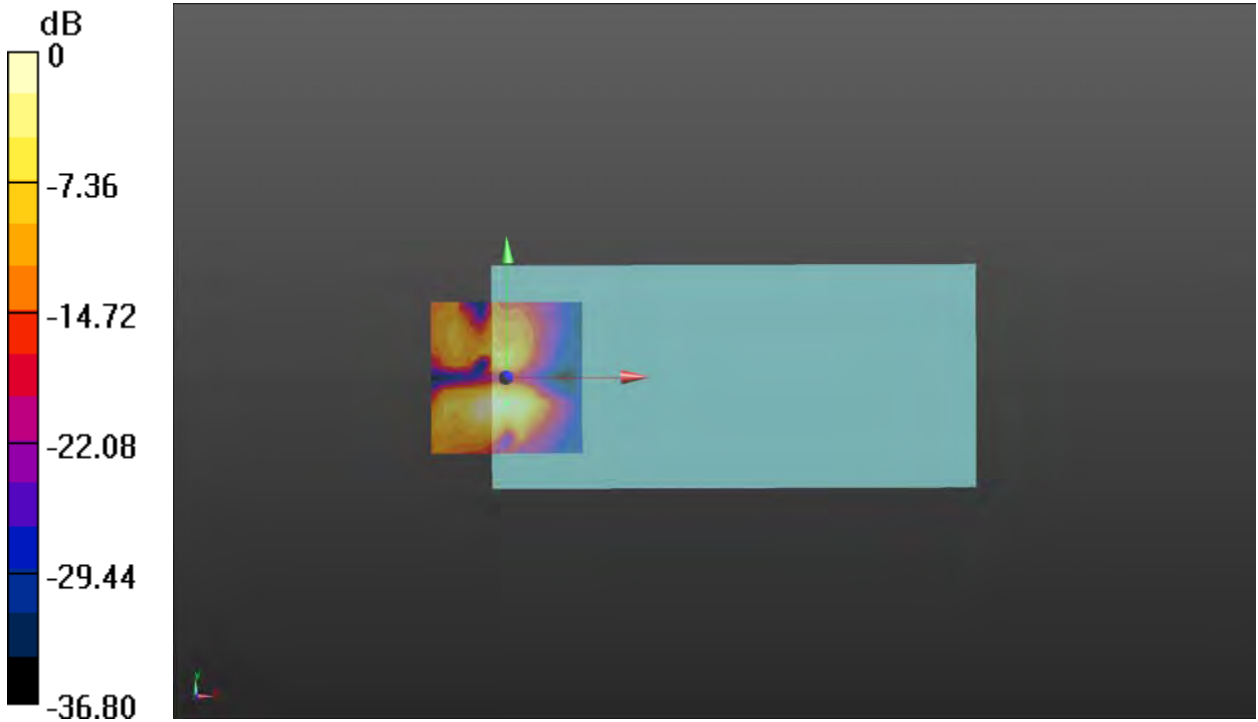

0 dB = 24.74 = 27.87 dB

**Plot 66 T-Coil LTE Band 5 Z Axial**

Date: 2022/7/7

Communication System: UID 10108 - CAG, LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK);

Frequency: 836.5 MHz; Duty Cycle: 1:3.80102

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B5 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 36.43 dB

ABM1 comp = -4.09 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B5 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 0.45 dB

BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm

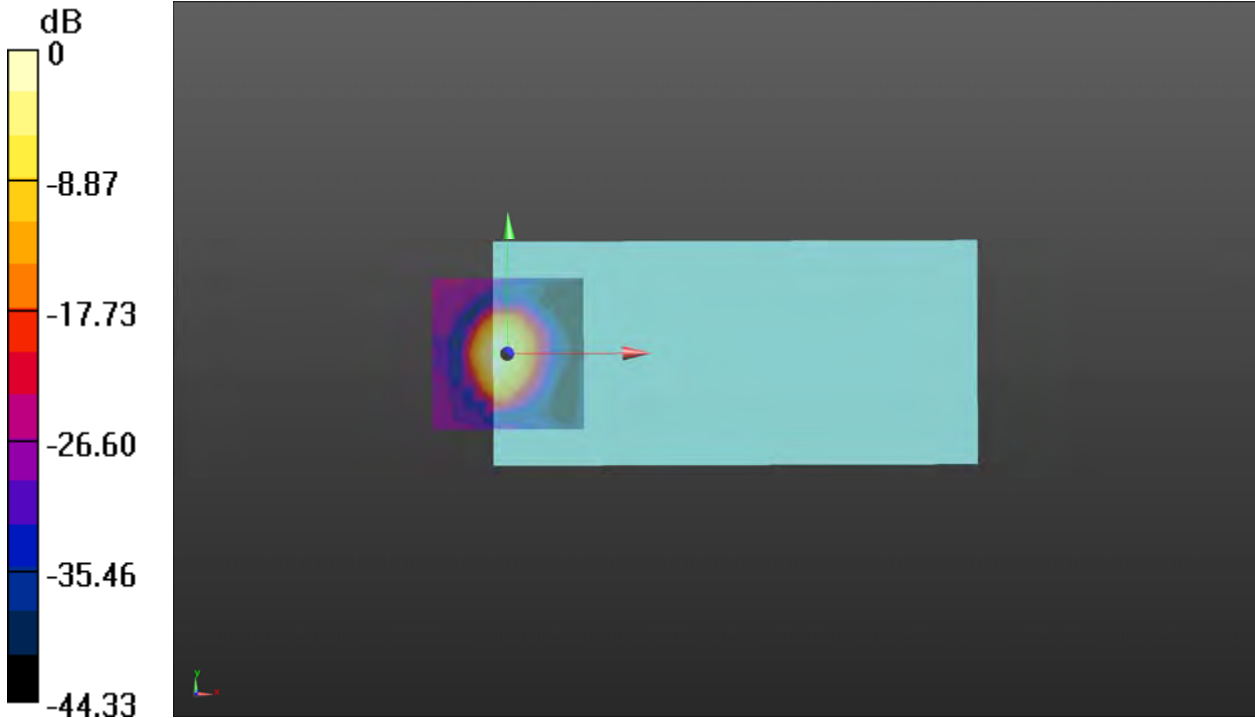

0 dB = 66.26 = 36.43 dB

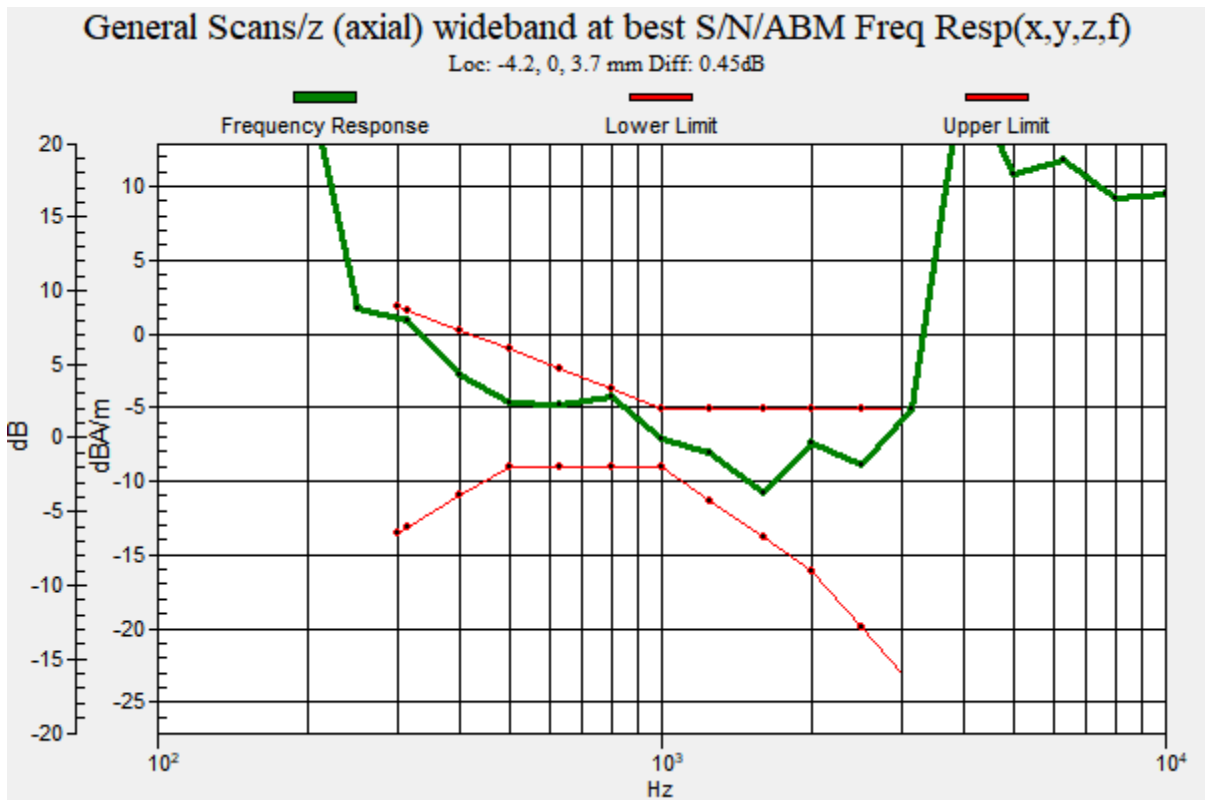

**Plot 67 T-Coil LTE Band 7 Y transversal**

Date: 2022/7/7

Communication System: UID 10100 - CAE, LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK);

Frequency: 2535 MHz; Duty Cycle: 1:3.68638

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B7 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 29.20 dB

ABM1 comp = -11.26 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

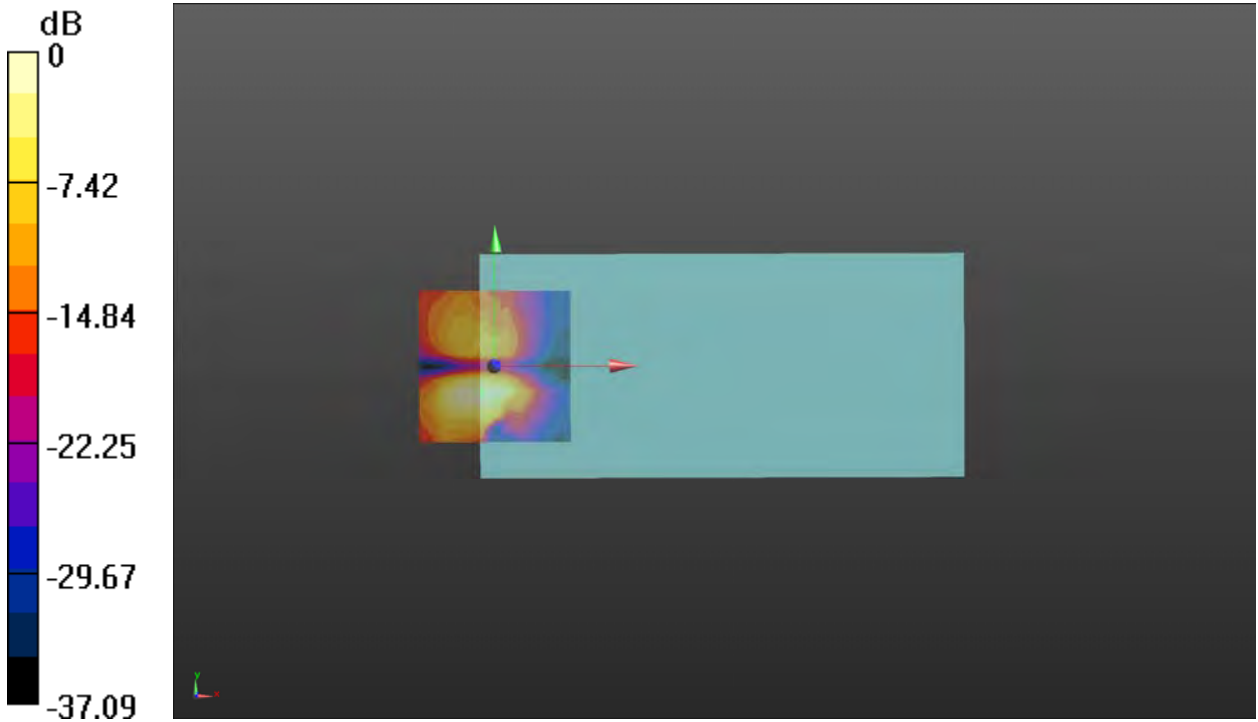

0 dB = 28.86 = 29.21 dB

**Plot 68 T-Coil LTE Band 7 Z Axial**

Date: 2022/7/6

Communication System: UID 10100 - CAE, LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK);

Frequency: 2535 MHz; Duty Cycle: 1:3.68638

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B7 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 34.87 dB

ABM1 comp = -5.19 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B7 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 1.37 dB


BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm



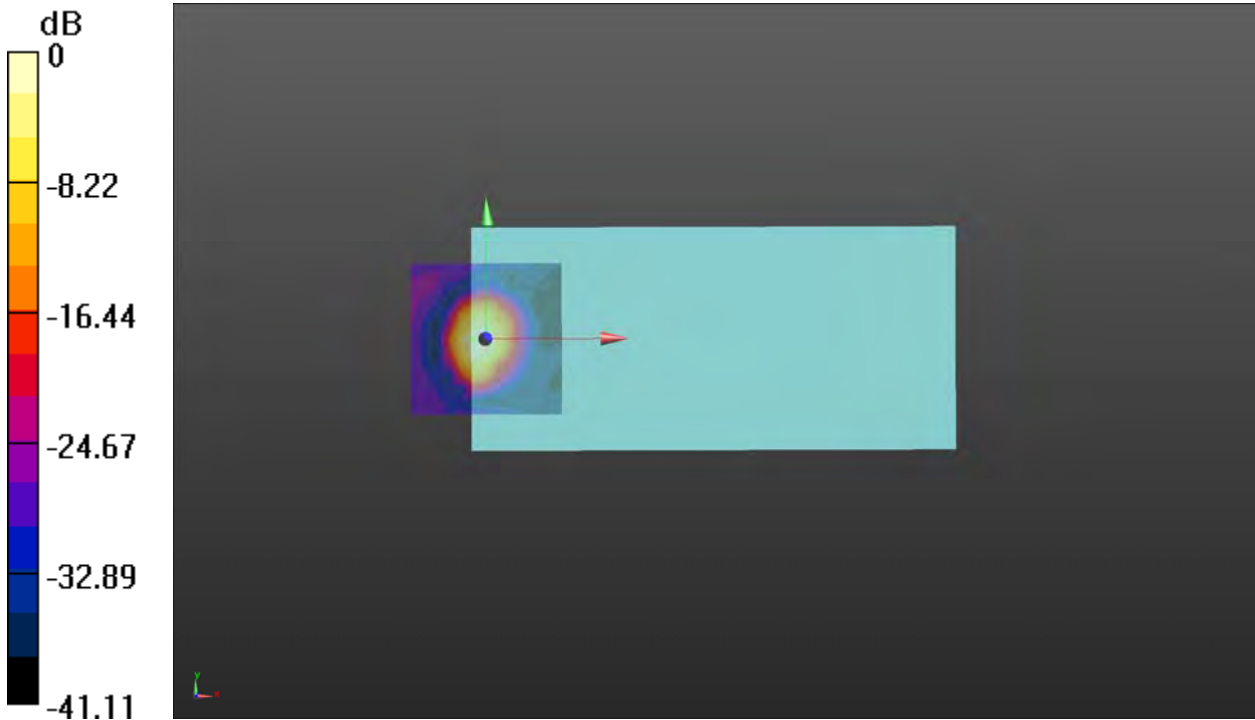

0 dB = 55.42 = 34.87 dB

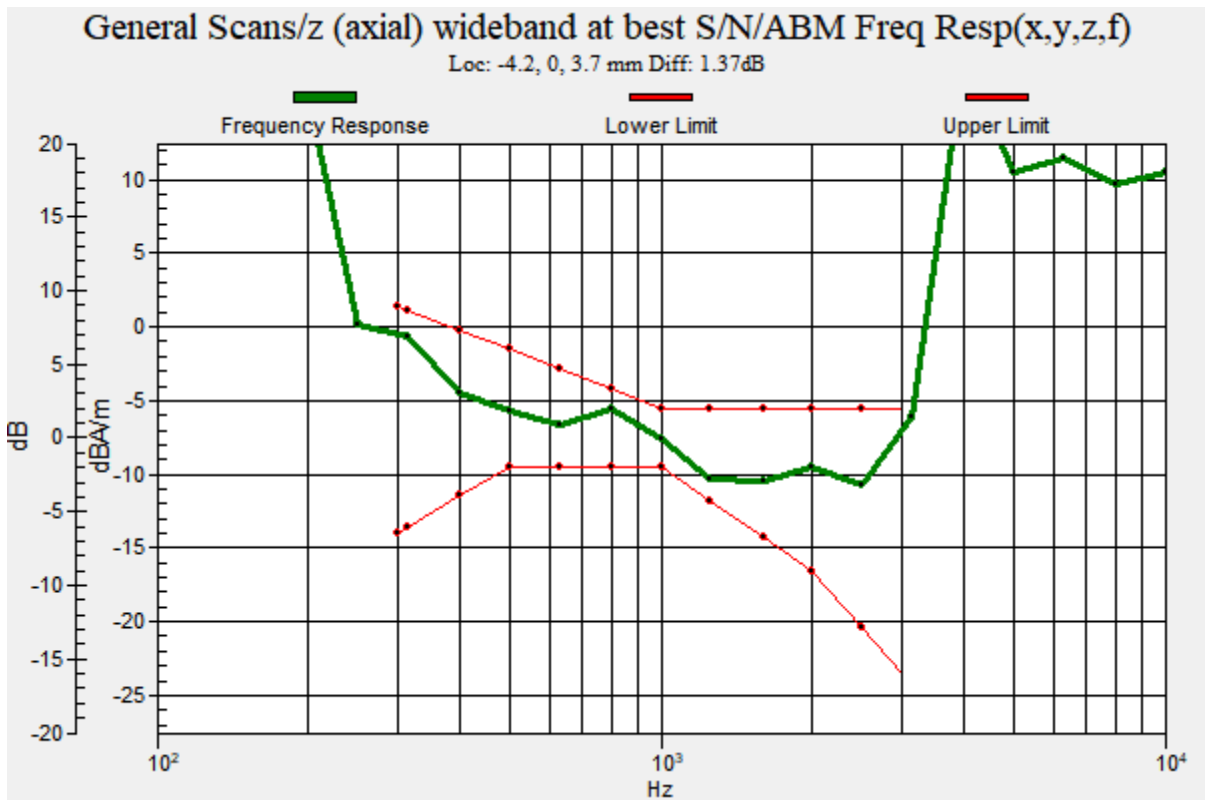

**Plot 69 T-Coil LTE Band 12 Y transversal**

Date: 2022/7/7

Communication System: UID 10108 - CAG, LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK);

Frequency: 707.5 MHz; Duty Cycle: 1:3.80102

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B12 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x****50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 27.71 dB

ABM1 comp = -9.39 dBA/m

BWC Factor = 0.16 dB

Location: 0, -8.3, 3.7 mm

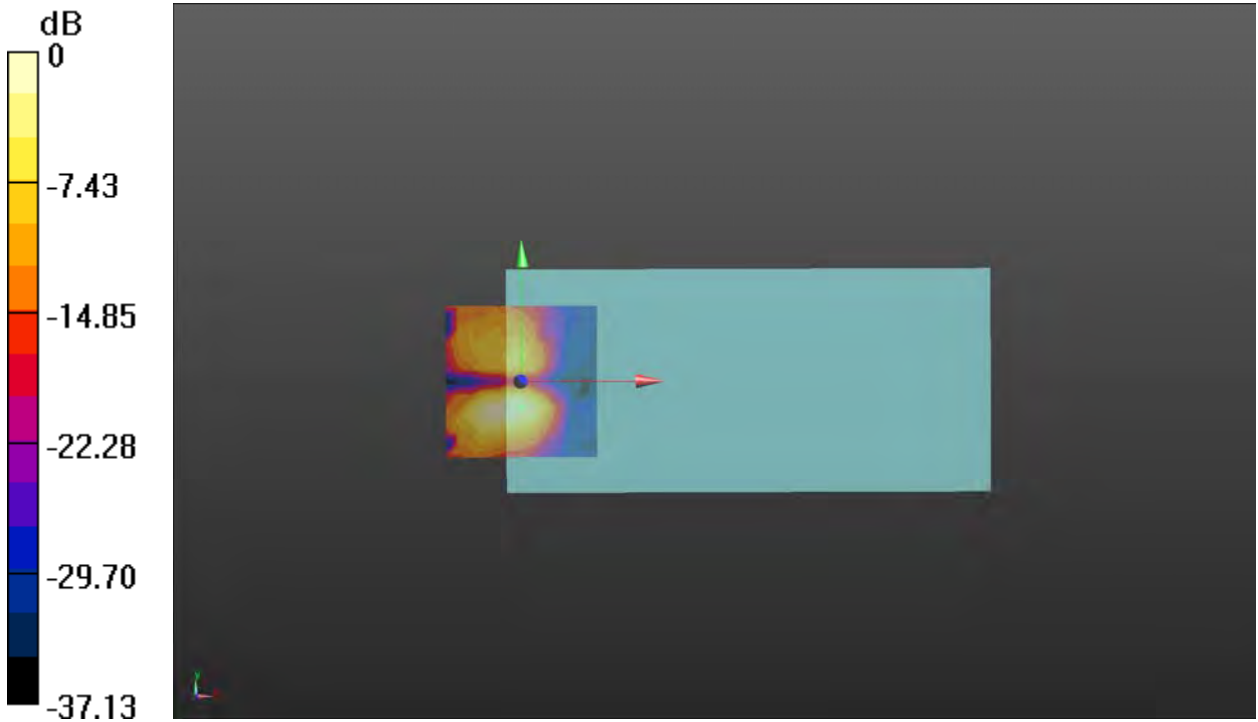

0 dB = 24.29 = 27.71 dB

**Plot 70 T-Coil LTE Band 12 Z Axial**

Date: 2022/7/7

Communication System: UID 10108 - CAG, LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK);

Frequency: 707.5 MHz; Duty Cycle: 1:3.80102

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B12 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 40.83 dB

ABM1 comp = -4.33 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B12 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 0.12 dB

BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm

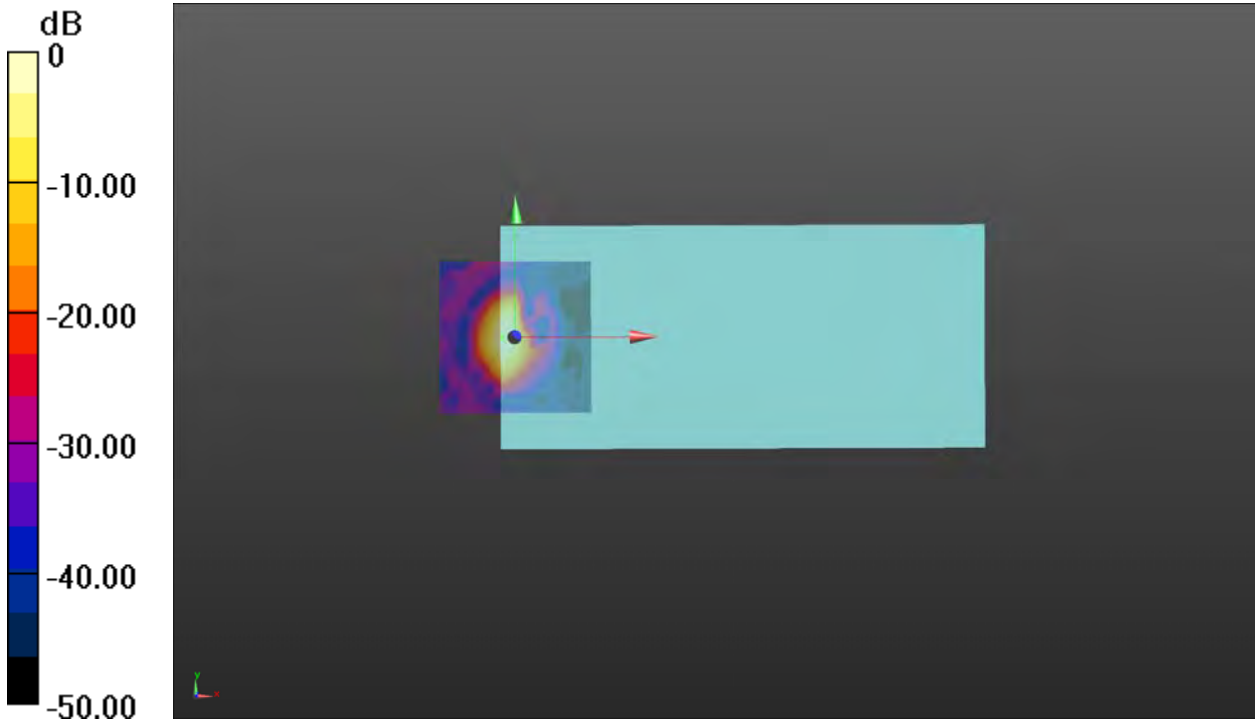

0 dB = 110.1 = 40.84 dB

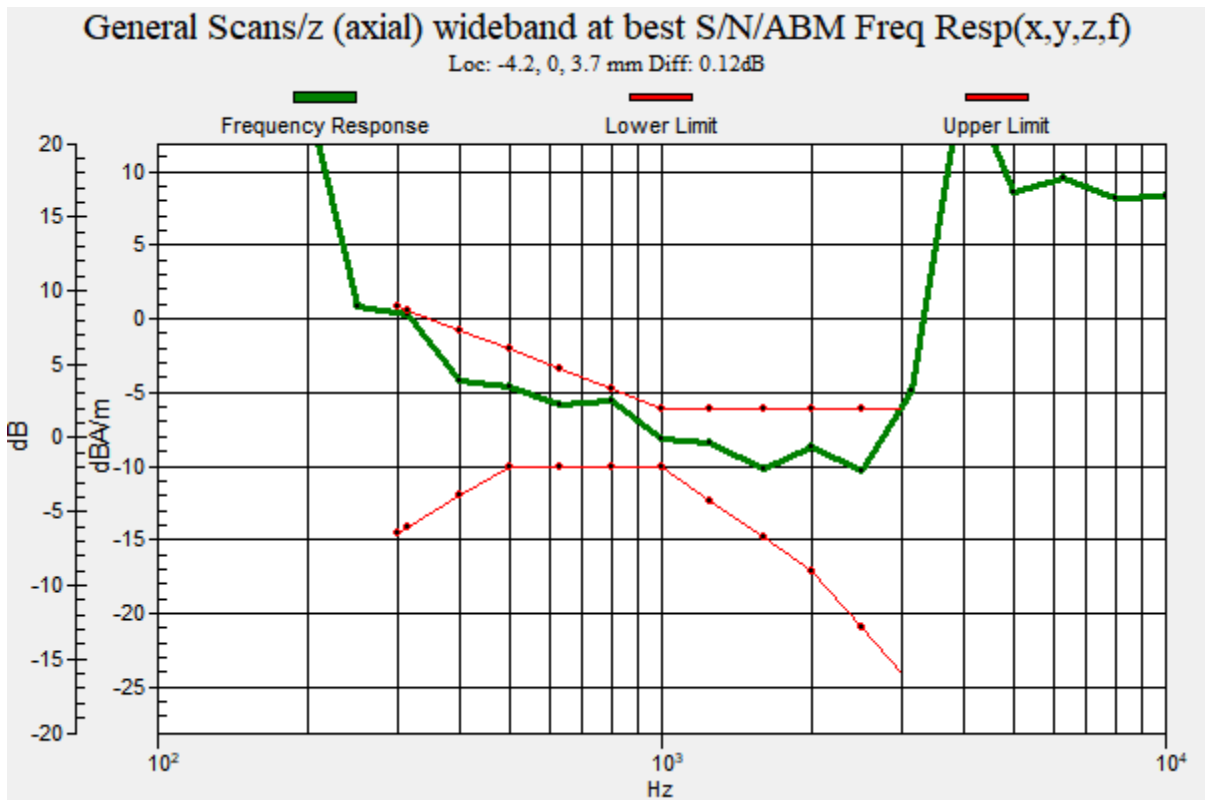

**Plot 71 T-Coil LTE Band 13 Y transversal**

Date: 2022/6/27

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 782 MHz; Duty Cycle: 1:3.73594

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B13 1RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 29.62 dB

ABM1 comp = -14.84 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

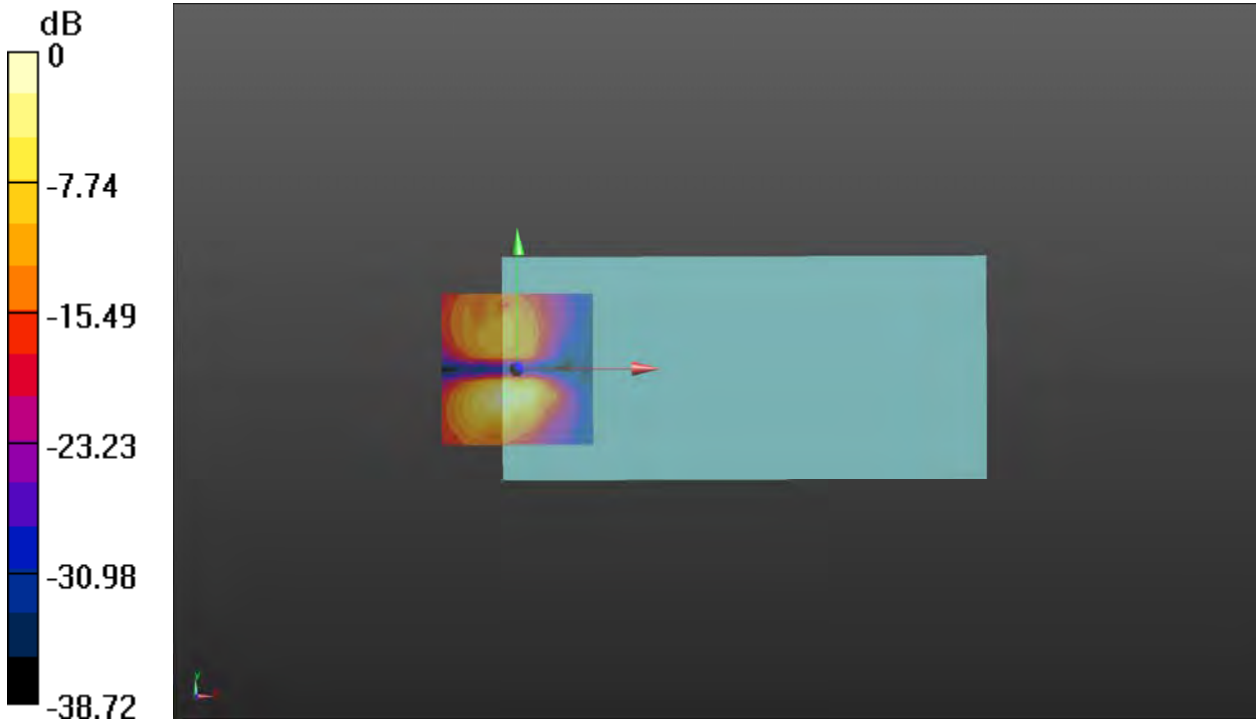

0 dB = 30.27 = 29.62 dB

**Plot 72 T-Coil LTE Band 13 Z Axial**

Date: 2022/6/27

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 782 MHz; Duty Cycle: 1:3.73594

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B13 1RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 35.74 dB

ABM1 comp = -8.58 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B13 1RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 1.67 dB


BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm



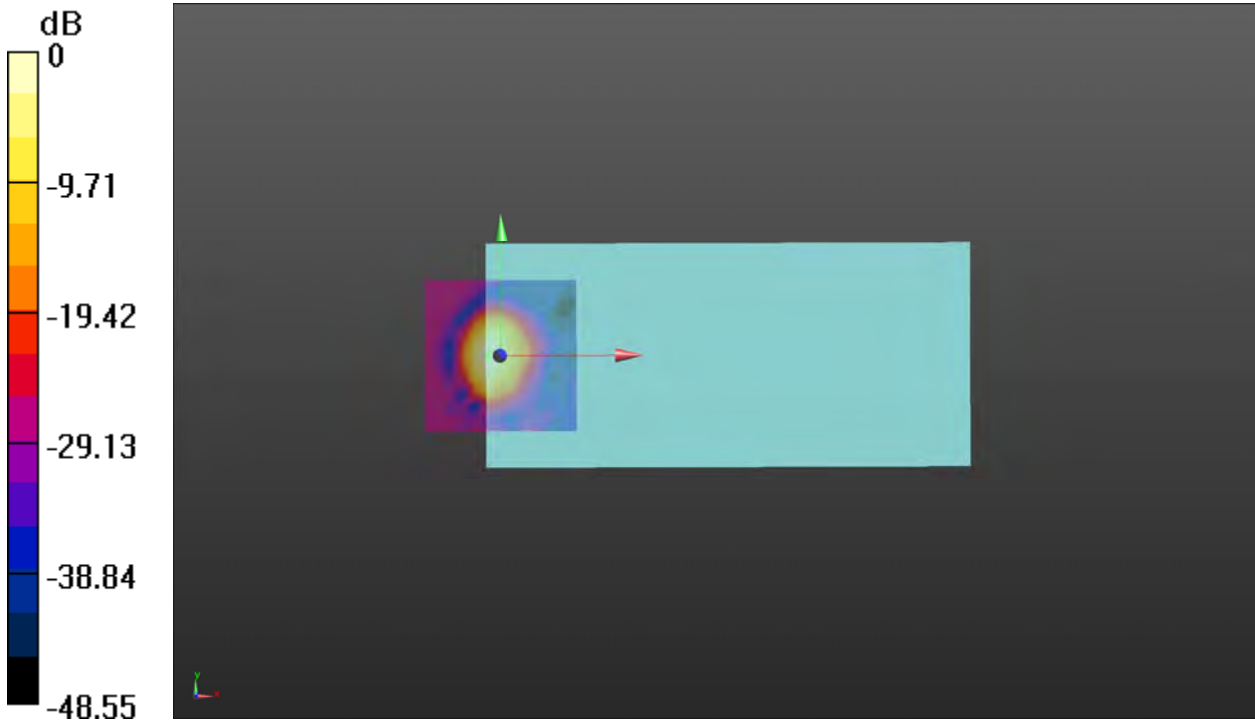

0 dB = 61.26 = 35.74 dB

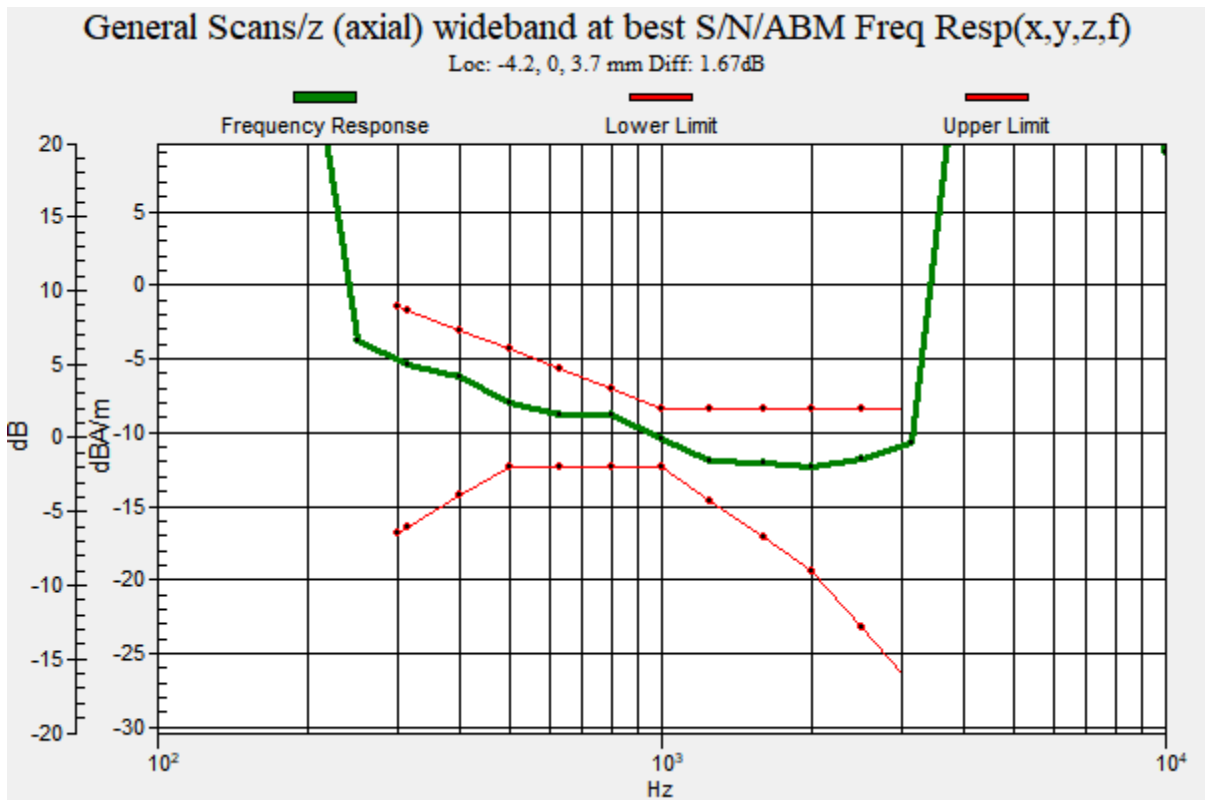

**Plot 73 T-Coil LTE Band 17 Y transversal**

Date: 2022/7/7

Communication System: UID 10108 - CAG, LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK);

Frequency: 710 MHz; Duty Cycle: 1:3.80102

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B17 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 28.91 dB

ABM1 comp = -11.45 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

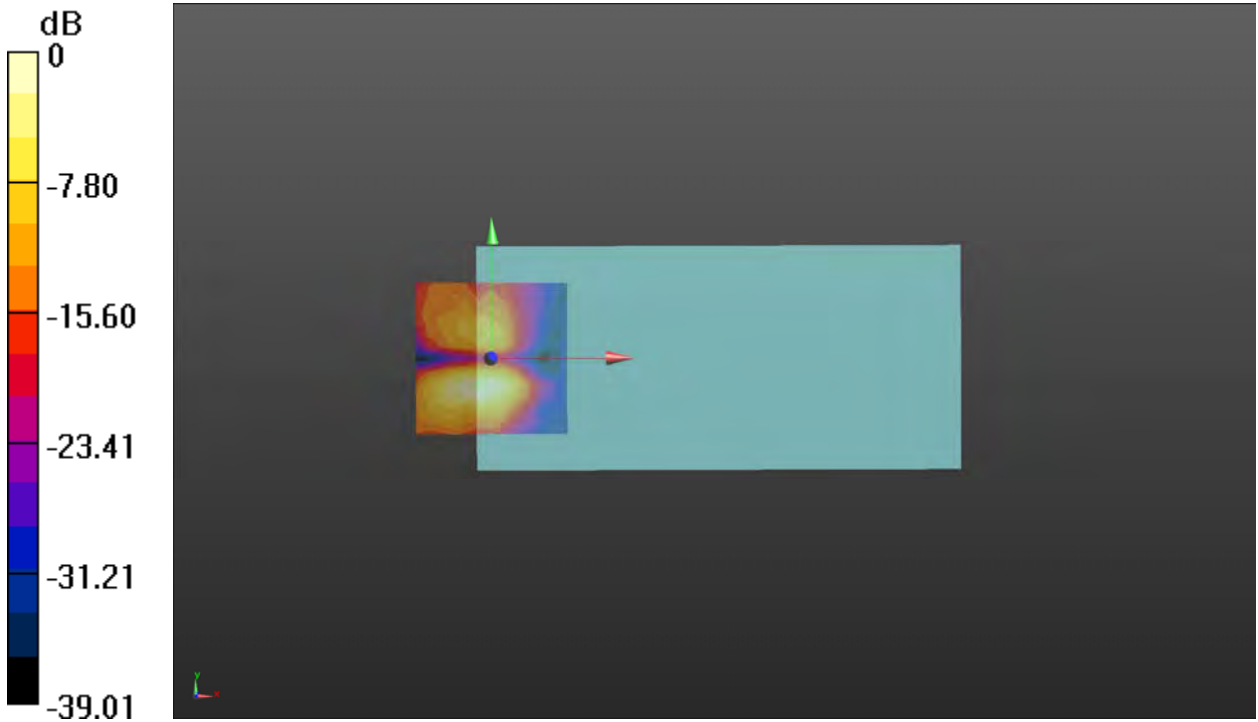

0 dB = 27.90 = 28.91 dB

**Plot 74 T-Coil LTE Band 17 Z Axial**

Date: 2022/7/7

Communication System: UID 10108 - CAG, LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK);

Frequency: 710 MHz; Duty Cycle: 1:3.80102

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B17 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 36.03 dB

ABM1 comp = -4.84 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B17 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 0.43 dB

BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm

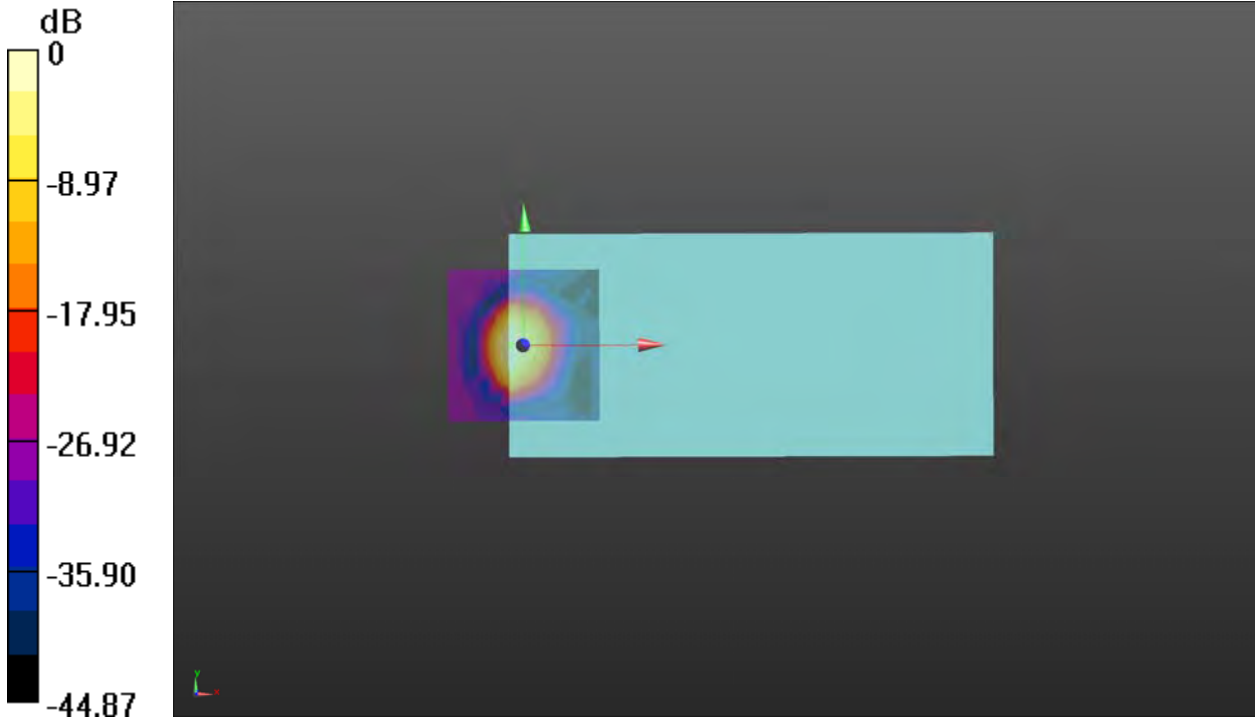

0 dB = 63.31 = 36.03 dB

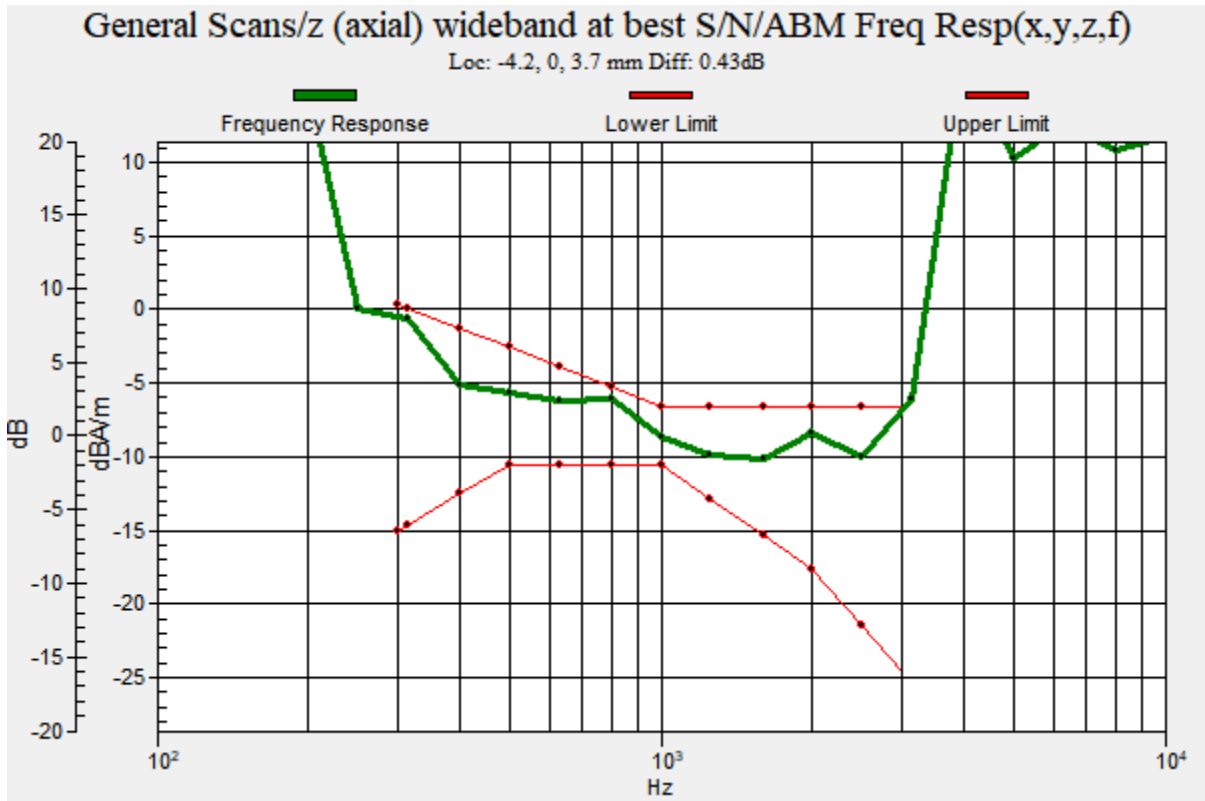

**Plot 75 T-Coil LTE Band 19 Y transversal**

Date: 2022/7/7

Communication System: UID 10311 - AAD, LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK);

Frequency: 837.5 MHz; Duty Cycle: 1:4.03738

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B19 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x****50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 29.08 dB

ABM1 comp = -8.05 dBA/m

BWC Factor = 0.16 dB

Location: 0, -8.3, 3.7 mm

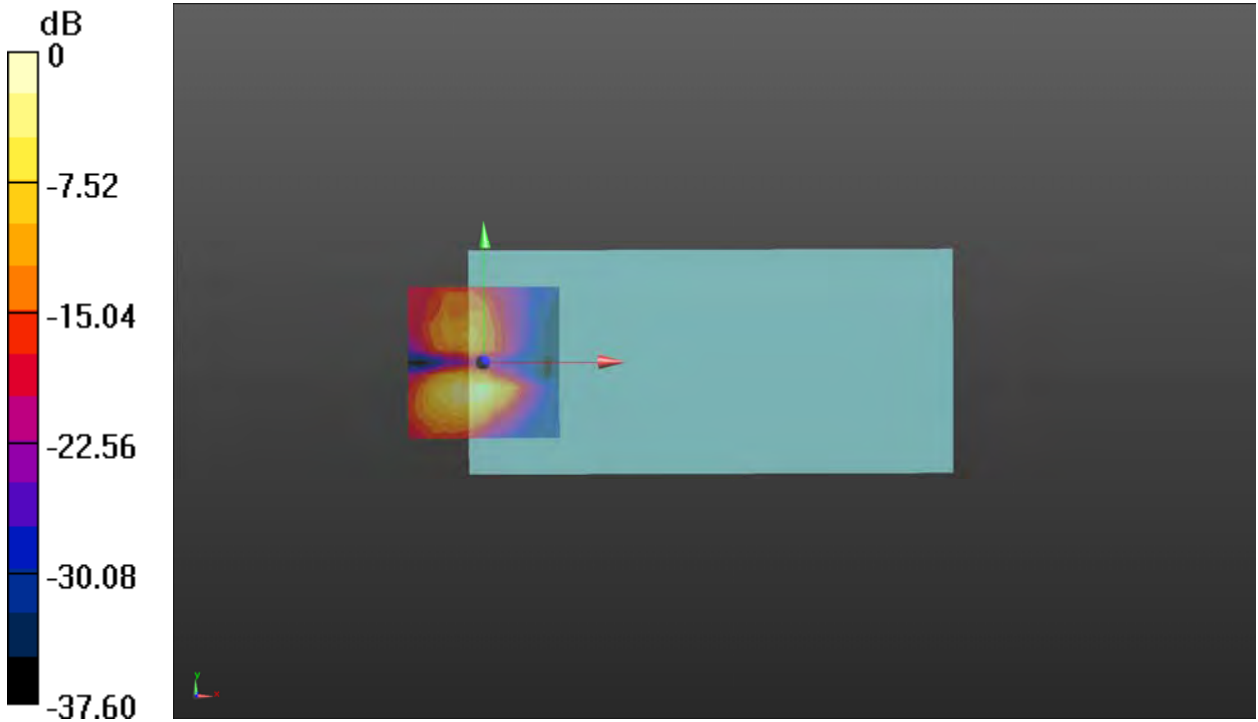

0 dB = 28.44 = 29.08 dB

**Plot 76 T-Coil LTE Band 19 Z Axial**

Date: 2022/7/7

Communication System: UID 10311 - AAD, LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK);

Frequency: 837.5 MHz; Duty Cycle: 1:4.03738

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B19 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 34.94 dB

ABM1 comp = -4.55 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B19 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 1.00 dB


BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm



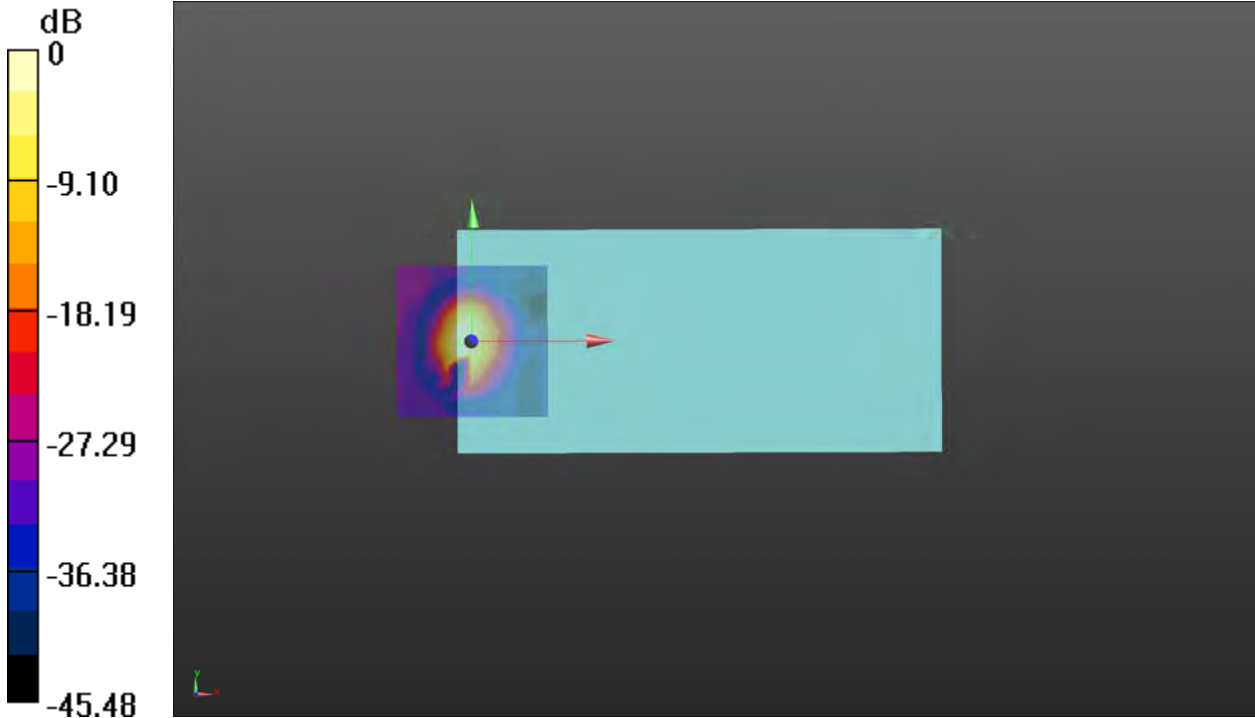

0 dB = 55.82 = 34.94 dB

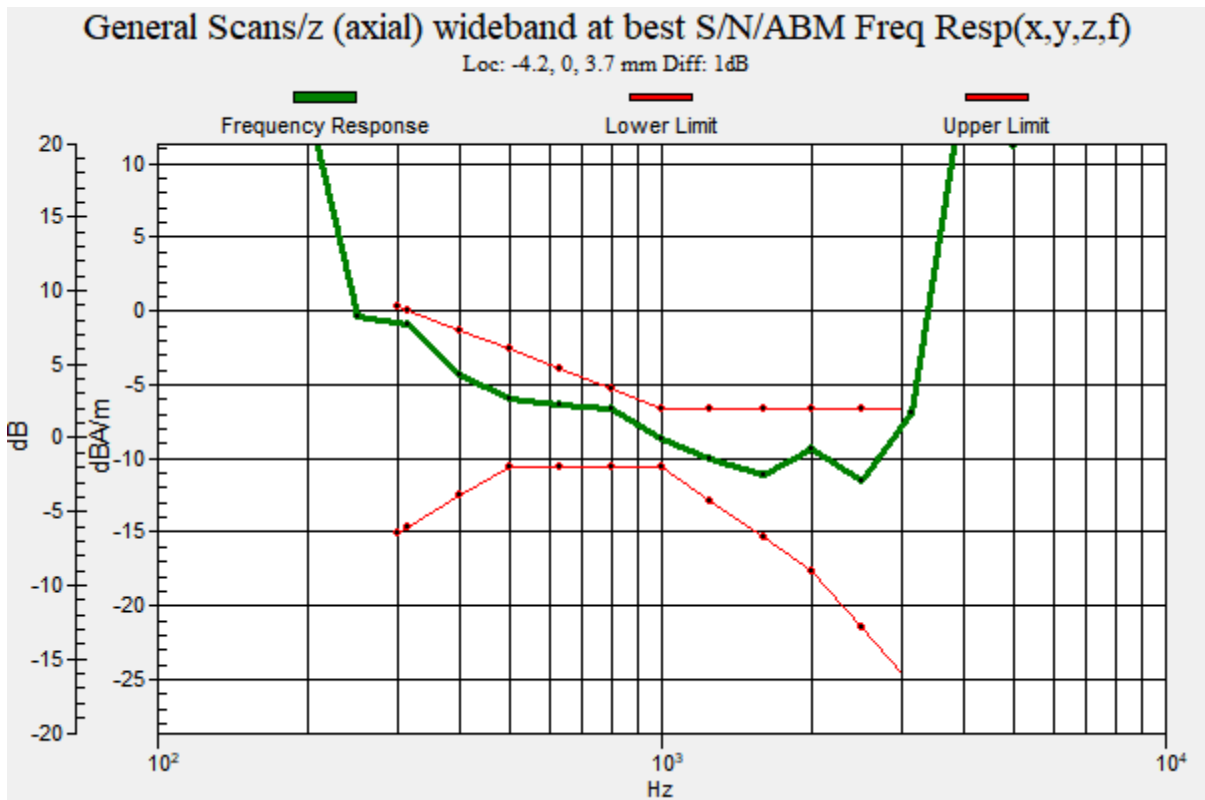

**Plot 77 T-Coil LTE Band 25 Y transversal**

Date: 2022/7/7

Communication System: UID 10100 - CAE, LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK);

Frequency: 1882.5 MHz; Duty Cycle: 1:3.68638

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B25 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x****50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 27.77 dB

ABM1 comp = -12.21 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

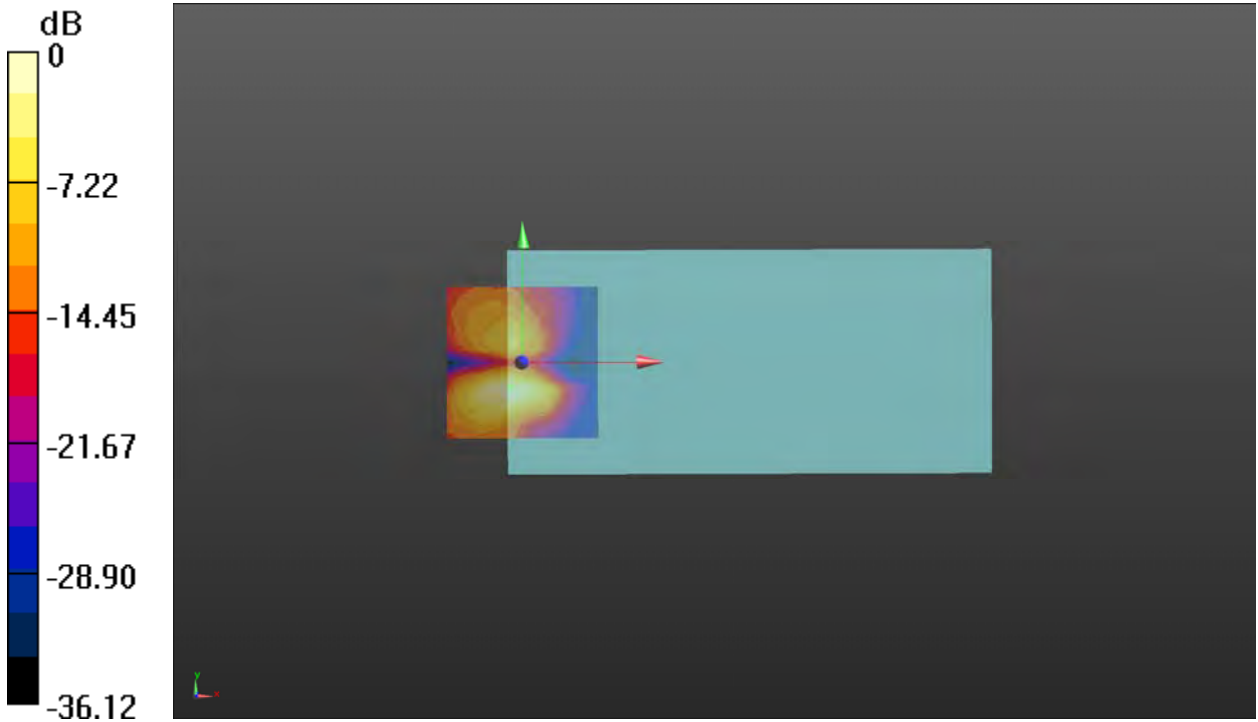

0 dB = 24.45 = 27.77 dB

**Plot 78 T-Coil LTE Band 25 Z Axial**

Date: 2022/7/7

Communication System: UID 10100 - CAE, LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK);

Frequency: 1882.5 MHz; Duty Cycle: 1:3.68638

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B25 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 33.99 dB

ABM1 comp = -6.70 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -4.2, 3.7 mm

**LTE B25 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 0.61 dB

BWC Factor = 10.81 dB

Location: -4.2, -4.2, 3.7 mm

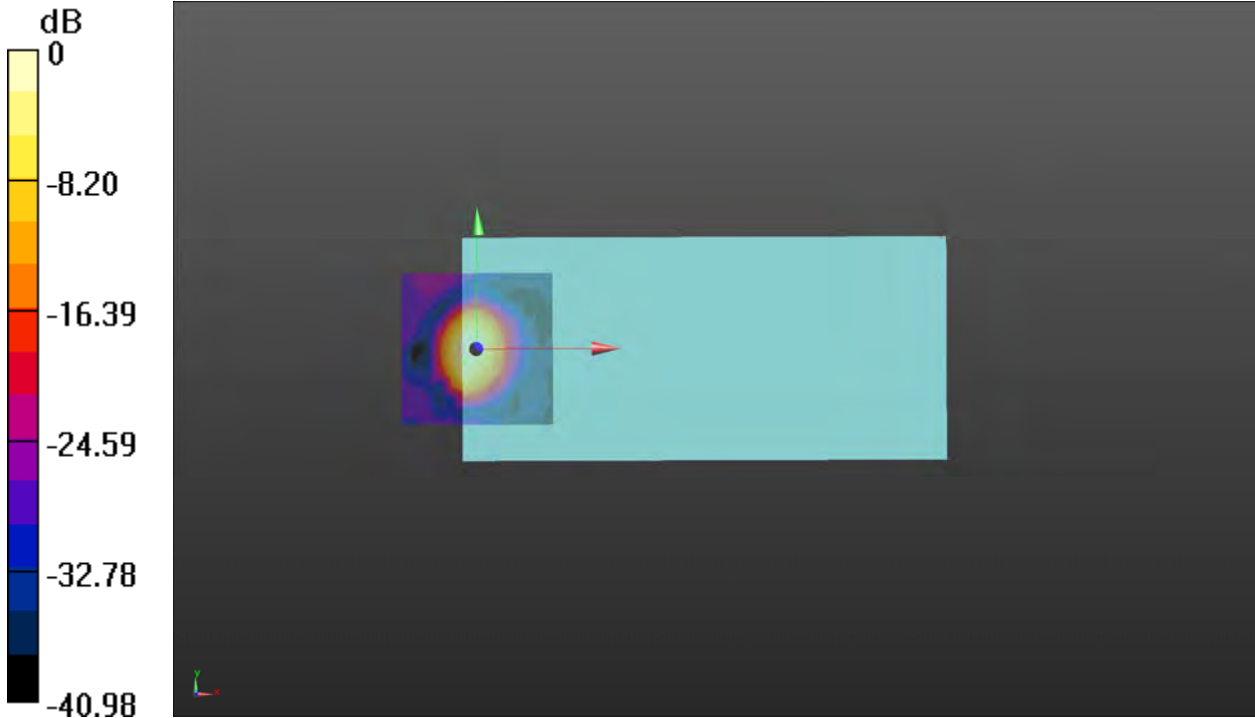

0 dB = 50.04 = 33.99 dB

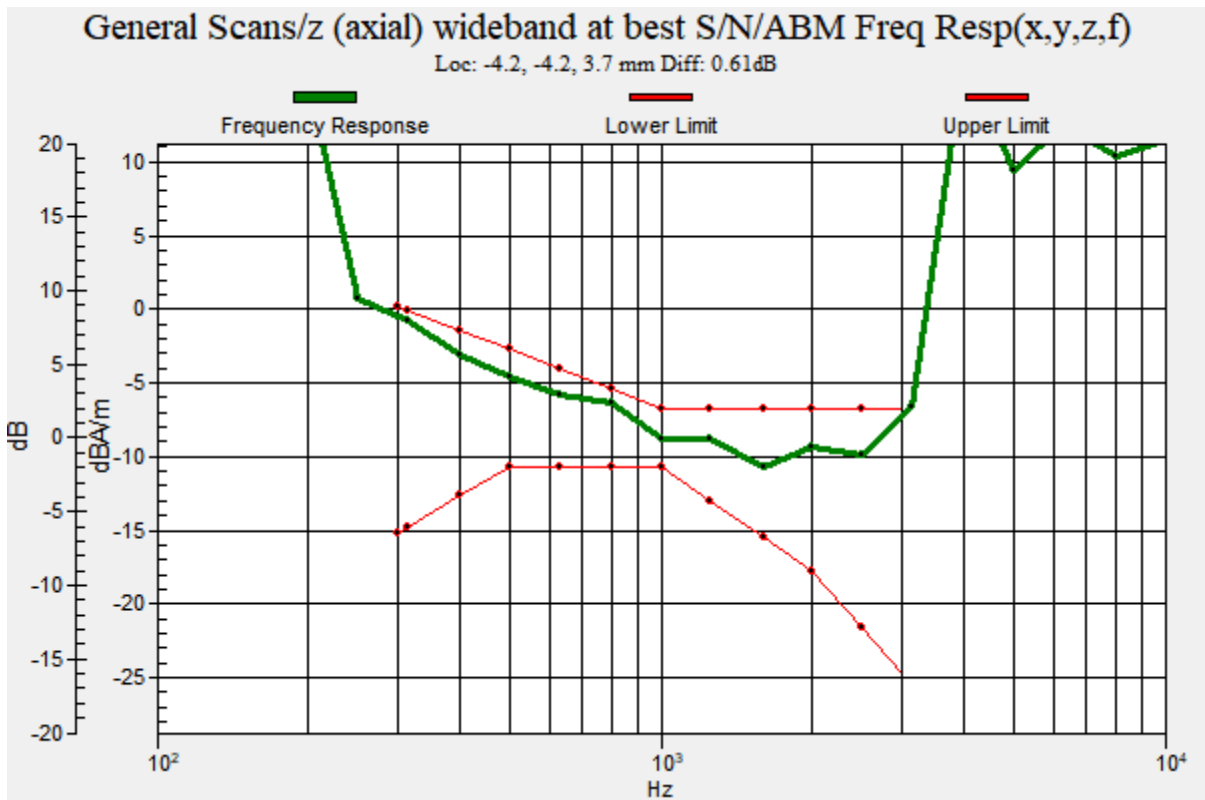

**Plot 79 T-Coil LTE Band 26 Y transversal**

Date: 2022/7/7

Communication System: UID 10311 - AAD, LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK);

Frequency: 831.5 MHz; Duty Cycle: 1:4.03738

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B26 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x****50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 28.90 dB

ABM1 comp = -8.03 dBA/m

BWC Factor = 0.16 dB

Location: 0, -8.3, 3.7 mm

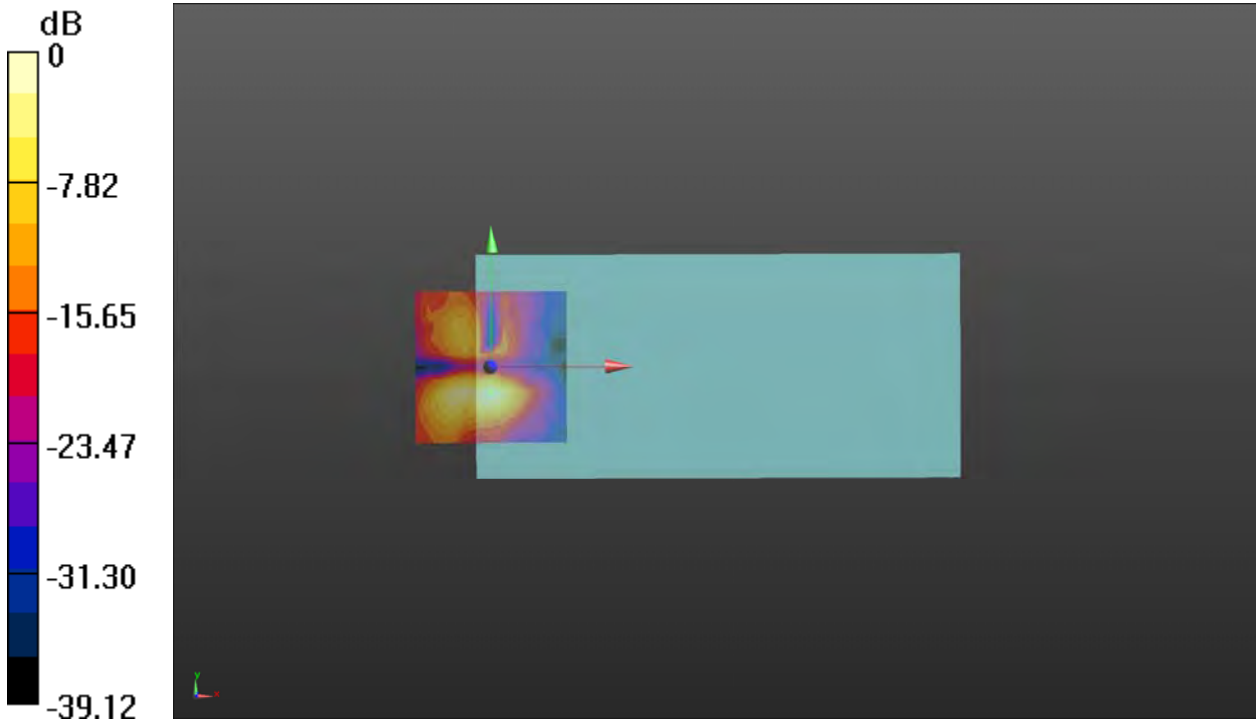

0 dB = 27.86 = 28.90 dB

**Plot 80 T-Coil LTE Band 26 Z Axial**

Date: 2022/7/7

Communication System: UID 10311 - AAD, LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK);

Frequency: 831.5 MHz; Duty Cycle: 1:4.03738

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B26 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 33.95 dB

ABM1 comp = -7.62 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 4.2, 3.7 mm

**LTE B26 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 0.71 dB


BWC Factor = 10.81 dB

Location: -4.2, 4.2, 3.7 mm



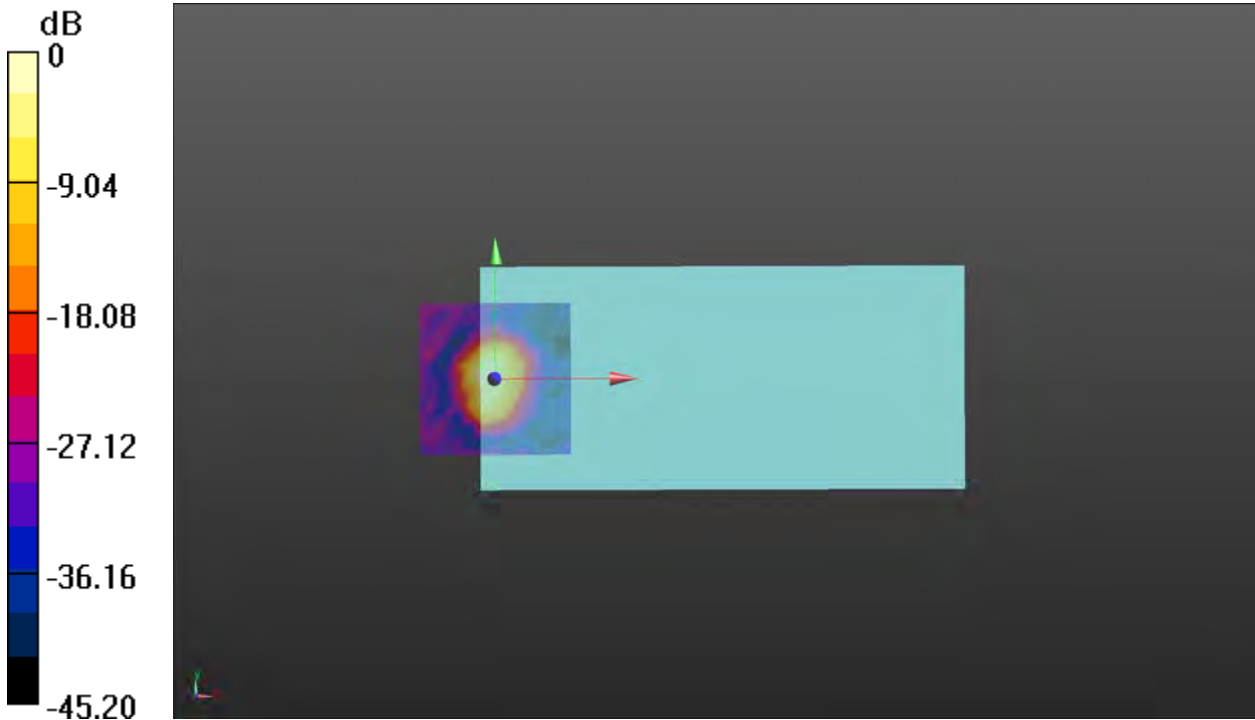

0 dB = 49.85 = 33.95 dB

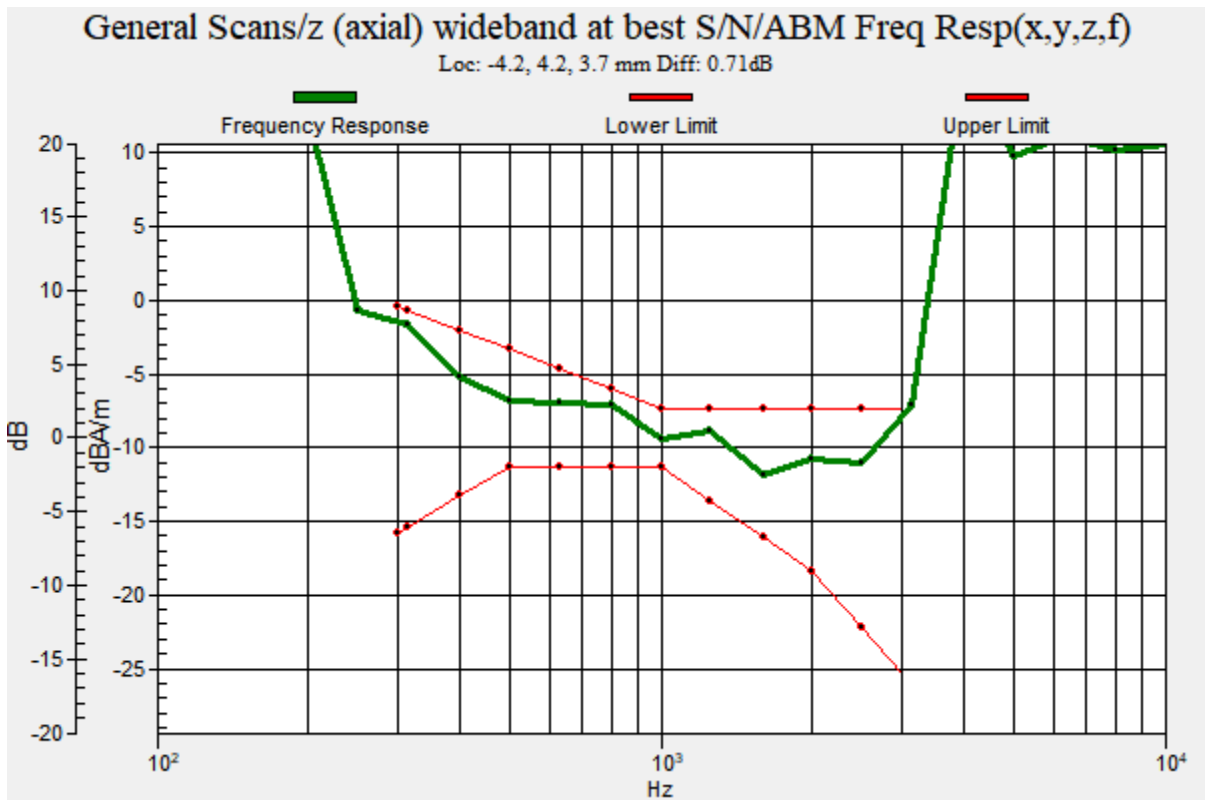

**Plot 81 T-Coil LTE Band 30 Y transversal**

Date: 2022/7/7

Communication System: UID 10108 - CAG, LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK);

Frequency: 2310 MHz; Duty Cycle: 1:3.80102

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B30 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x****50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 28.36 dB

ABM1 comp = -11.81 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

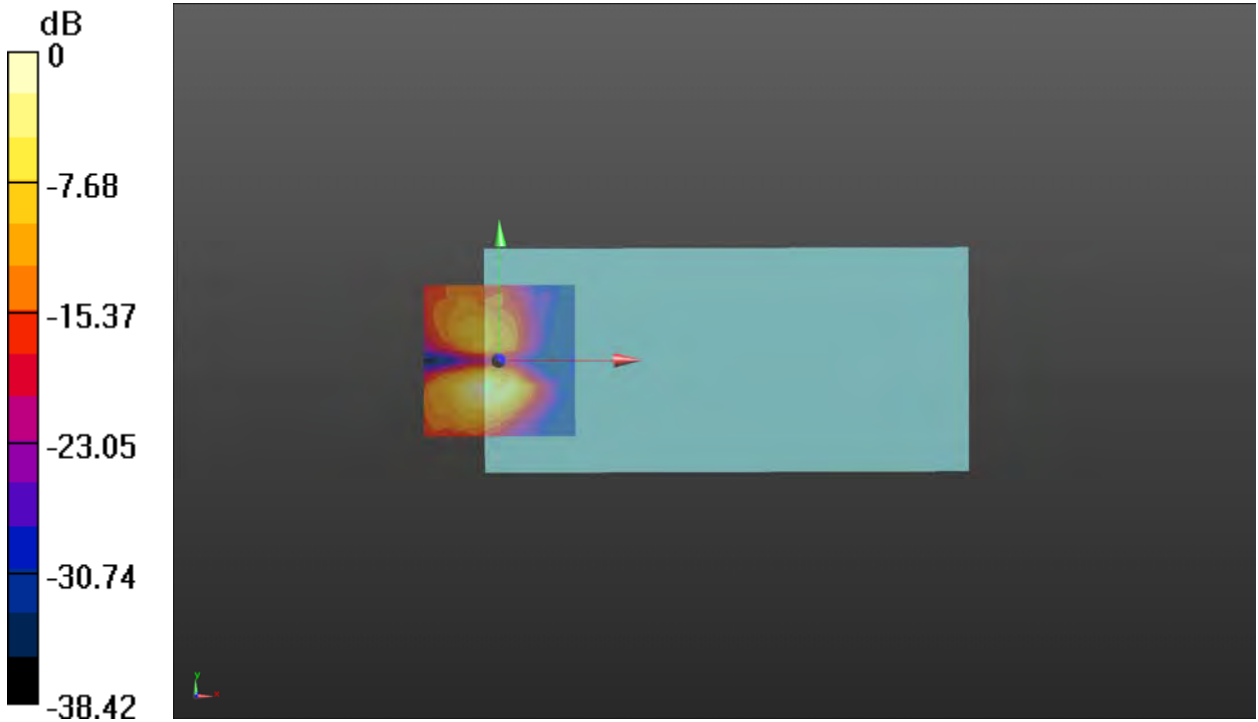

0 dB = 26.19 = 28.36 dB

**Plot 82 T-Coil LTE Band 30 Z Axial**

Date: 2022/7/7

Communication System: UID 10108 - CAG, LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK);

Frequency: 2310 MHz; Duty Cycle: 1:3.80102

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B30 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 28.94 dB

ABM1 comp = -5.60 dBA/m

BWC Factor = 0.16 dB

Location: 0, 4.2, 3.7 mm

**LTE B30 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 0.17 dB

BWC Factor = 10.81 dB

Location: 0, 4.2, 3.7 mm

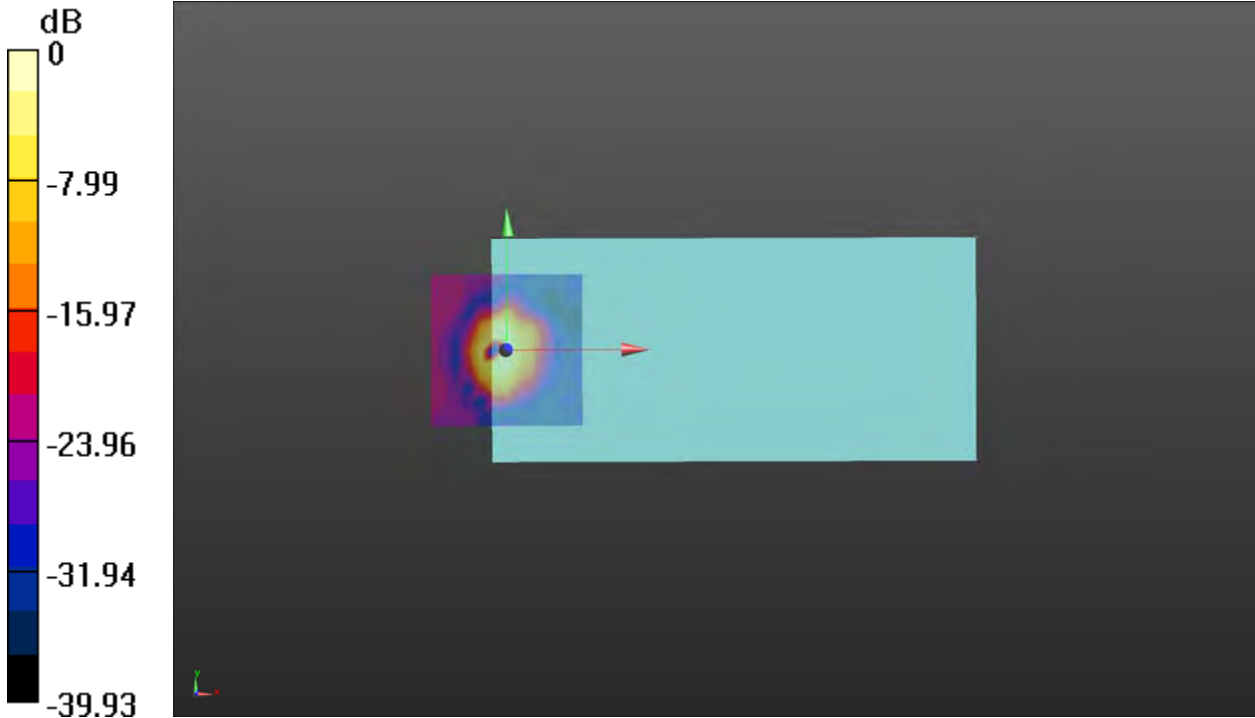

0 dB = 27.99 = 28.94 dB

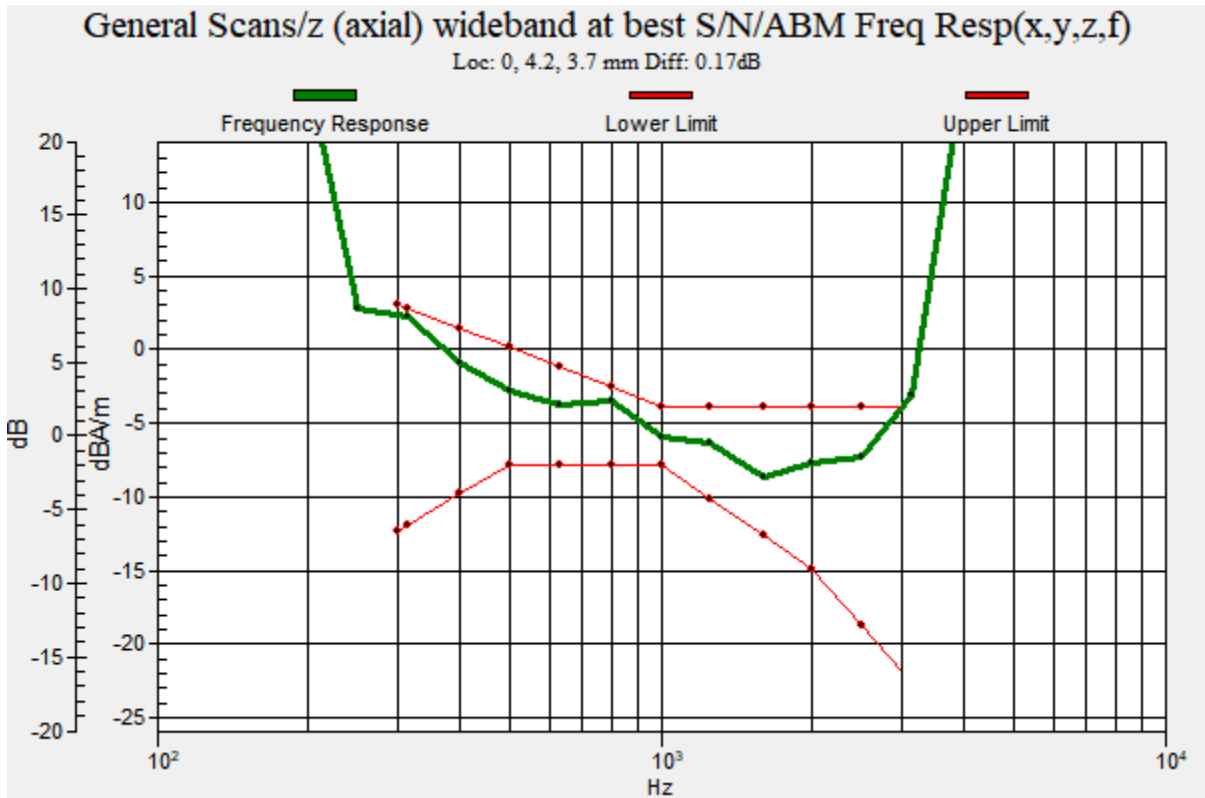

**Plot 83 T-Coil LTE Band 38 Y transversal**

Date: 2022/7/7

Communication System: UID 10103 - CAG, LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK);

Frequency: 2595 MHz; Duty Cycle: 1:8.4918

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B17 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x****50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 23.16 dB

ABM1 comp = -10.05 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

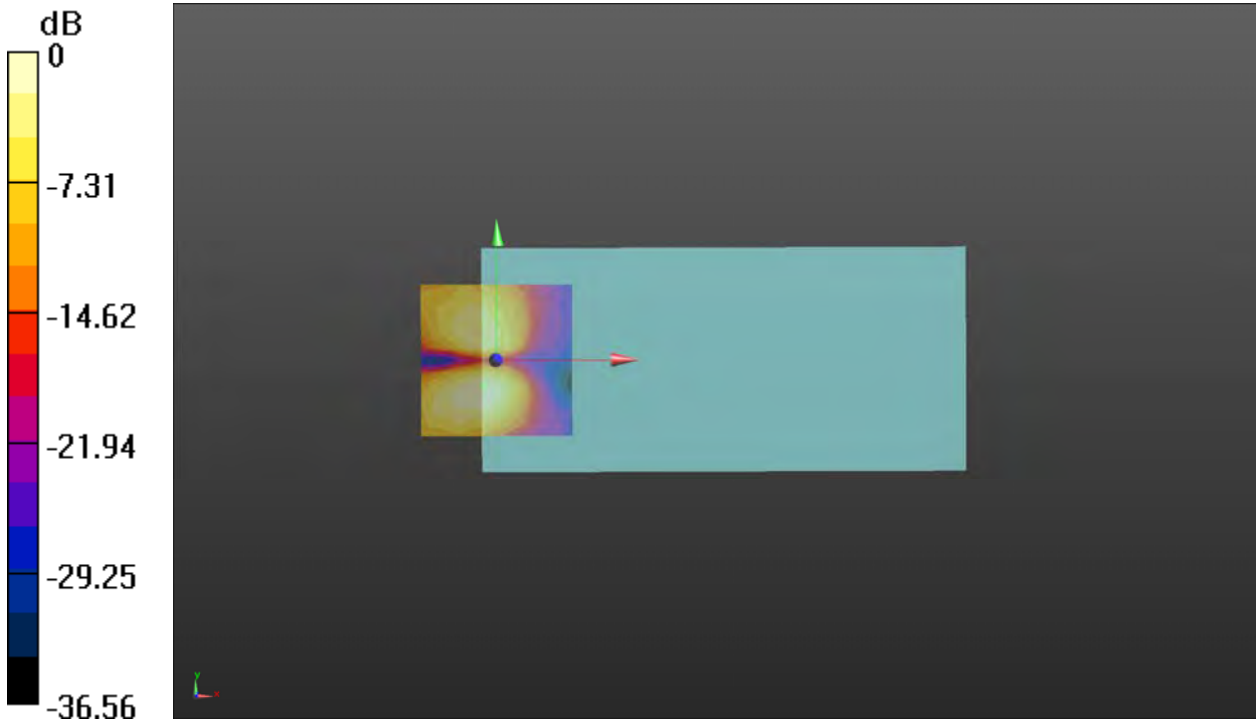

0 dB = 14.38 = 23.16 dB

**Plot 84 T-Coil LTE Band 38 Z Axial**

Date: 2022/7/7

Communication System: UID 10103 - CAG, LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK);

Frequency: 2595 MHz; Duty Cycle: 1:8.4918

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B17 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 30.73 dB

ABM1 comp = -5.00 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B17 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 1.35 dB


BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm



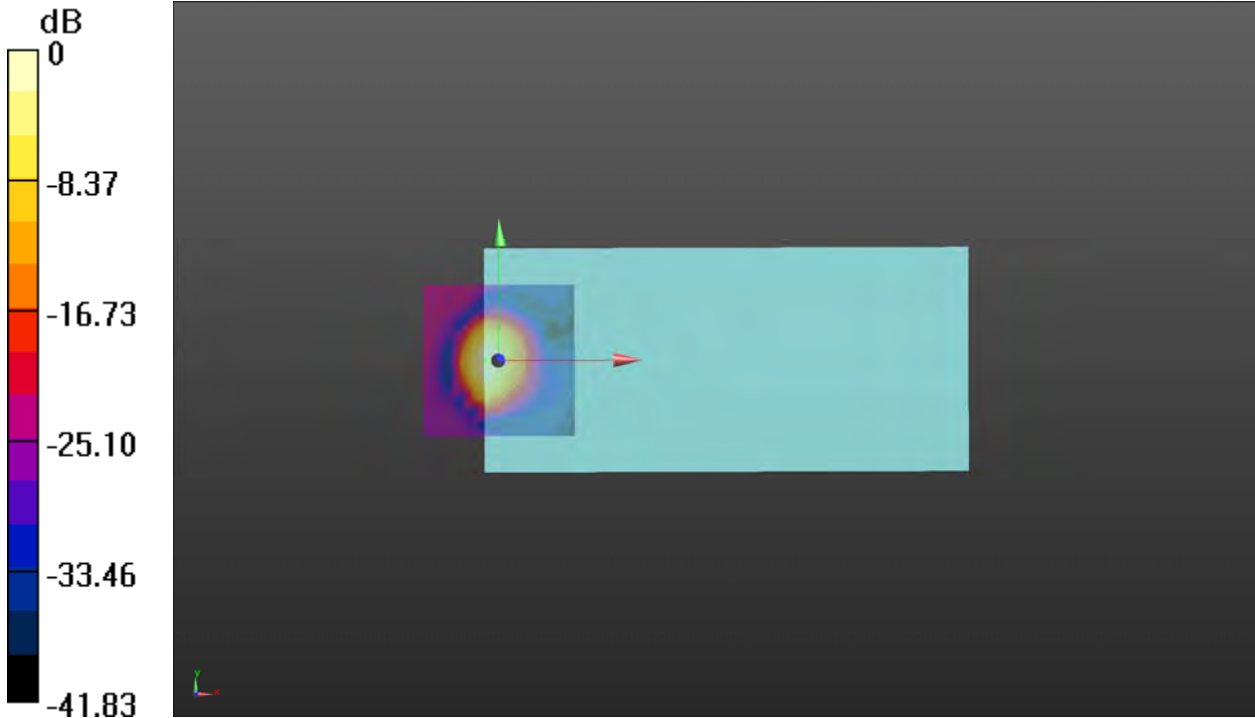

0 dB = 34.41 = 30.73 dB

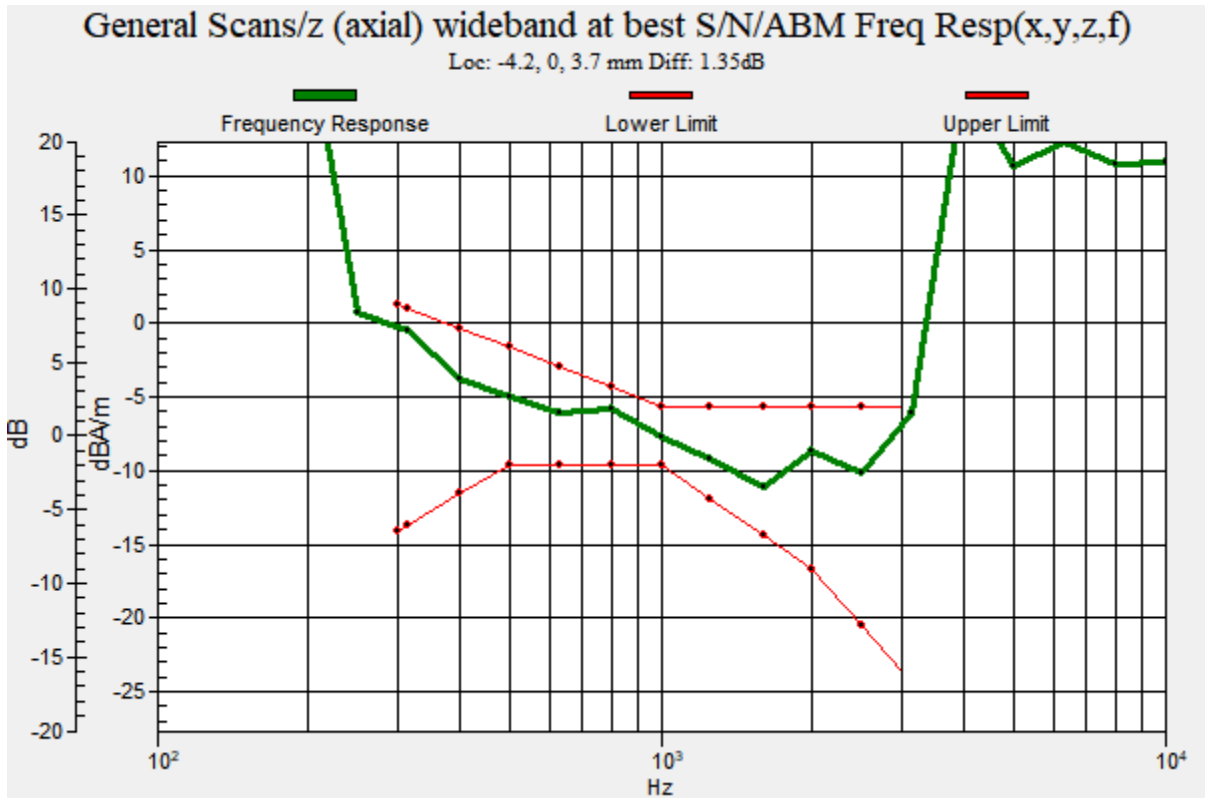

**Plot 85 T-Coil LTE Band 40 Y transversal**

Date: 2022/7/7

Communication System: UID 10103 - CAG, LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK);

Frequency: 2350 MHz; Duty Cycle: 1:8.4918

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B17 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x****50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 24.02 dB

ABM1 comp = -9.58 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

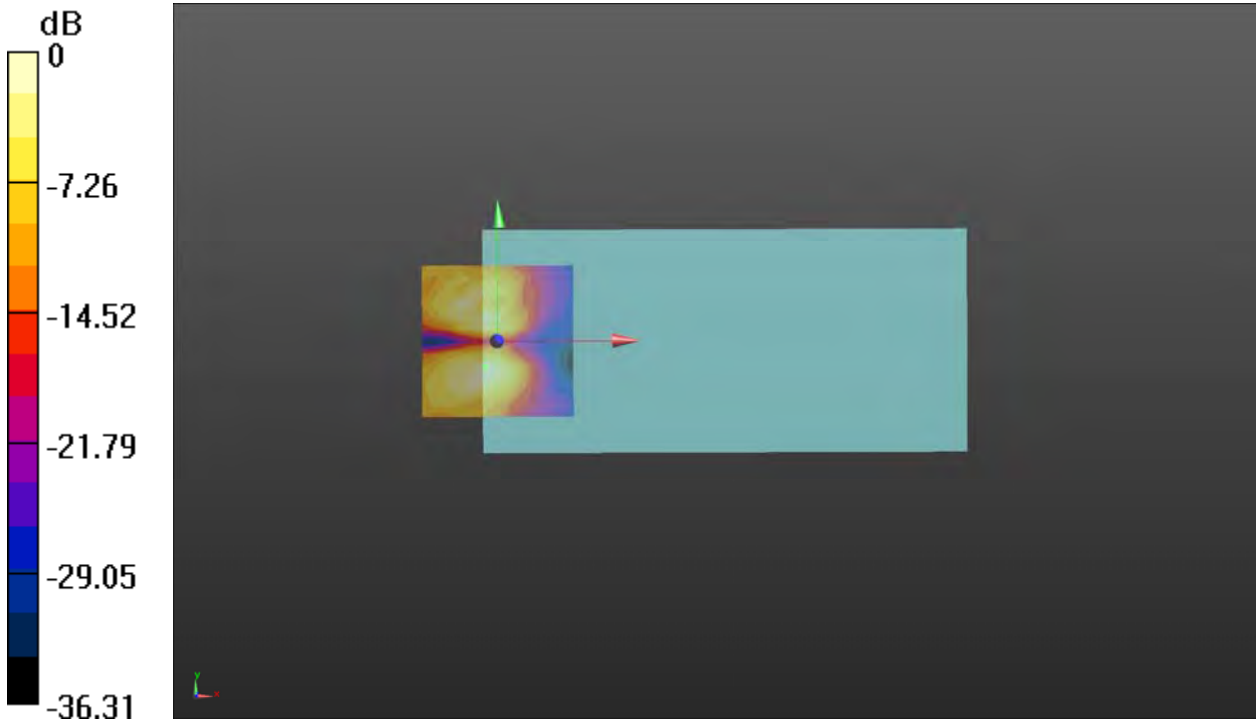

0 dB = 15.88 = 24.02 dB

**Plot 86 T-Coil LTE Band 40 Z Axial**

Date: 2022/7/7

Communication System: UID 10103 - CAG, LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK);

Frequency: 2350 MHz; Duty Cycle: 1:8.4918

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B17 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 31.55 dB

ABM1 comp = -4.71 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B17 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 0.78 dB

BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm

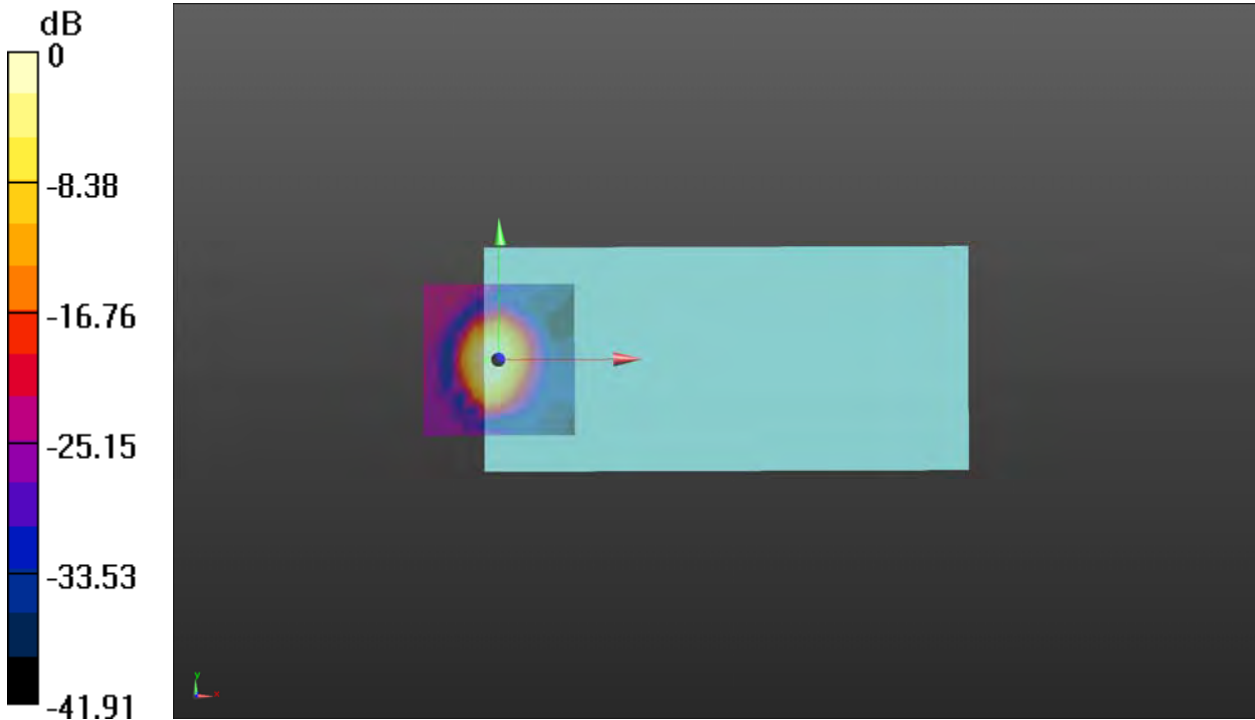

0 dB = 37.81 = 31.55 dB

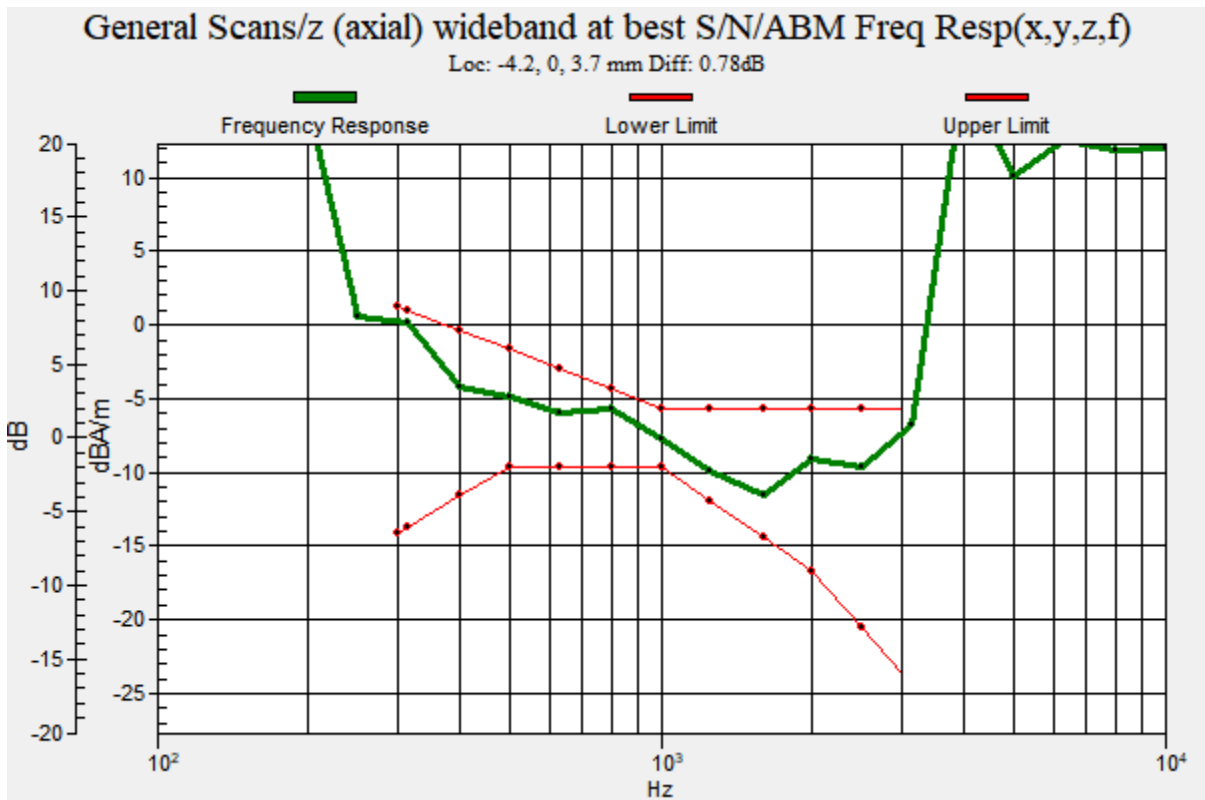

**Plot 87 T-Coil LTE Band 41 Y transversal**

Date: 2022/7/7

Communication System: UID 10103 - CAG, LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK);

Frequency: 2600 MHz; Duty Cycle: 1:8.4918

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B41 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x****50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 22.72 dB

ABM1 comp = -9.85 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

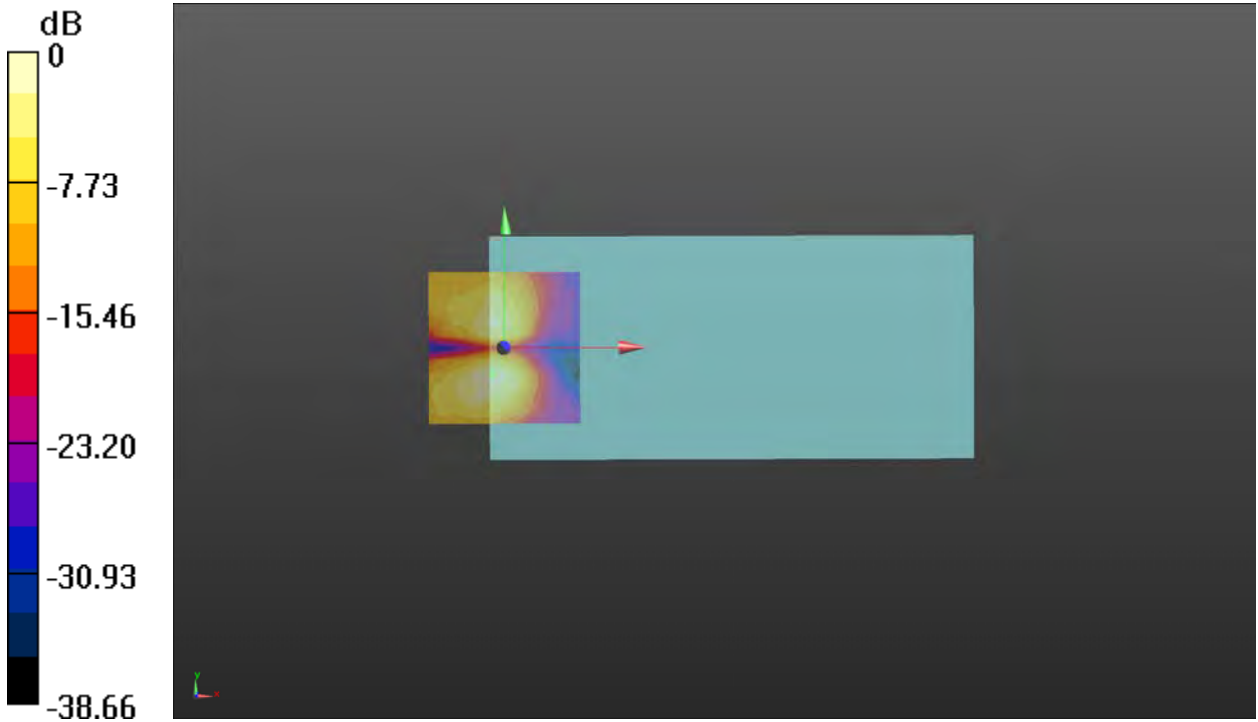

0 dB = 13.68 = 22.72 dB

**Plot 88 T-Coil LTE Band 41 Z Axial**

Date: 2022/7/7

Communication System: UID 10103 - CAG, LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK);

Frequency: 2600 MHz; Duty Cycle: 1:8.4918

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B41 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x****50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 31.08 dB

ABM1 comp = -3.78 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B41 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 0.54 dB


BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm



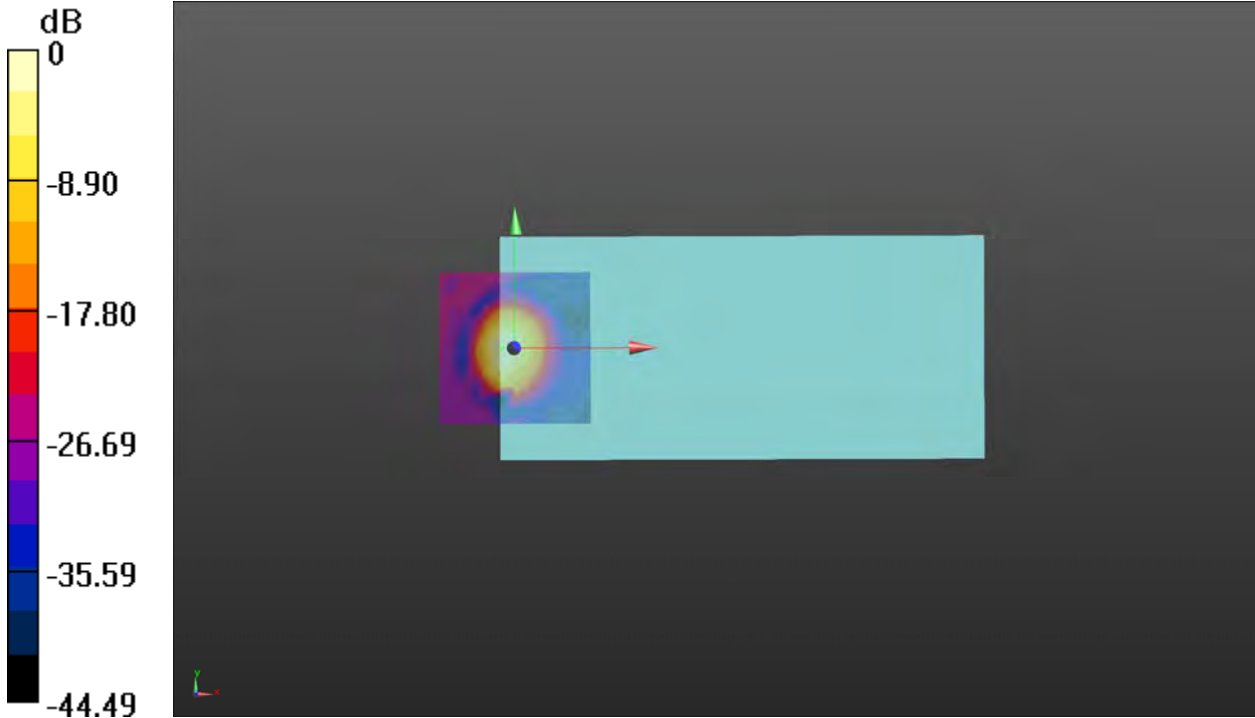

0 dB = 35.81 = 31.08 dB

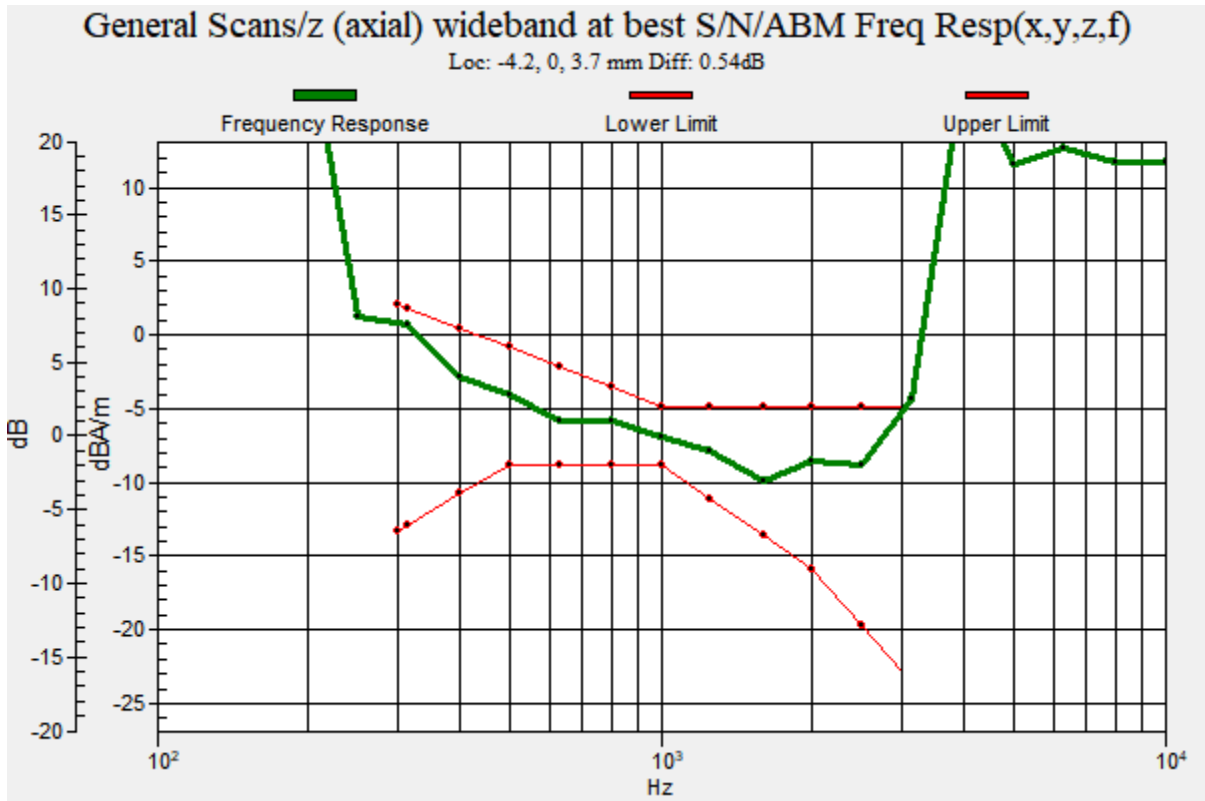

**Plot 89 T-Coil LTE Band 66 Y transversal**

Date: 2022/7/7

Communication System: UID 10100 - CAE, LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK);

Frequency: 1745 MHz; Duty Cycle: 1:3.68638

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B66 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x****50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 30.72 dB

ABM1 comp = -9.89 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -8.3, 3.7 mm

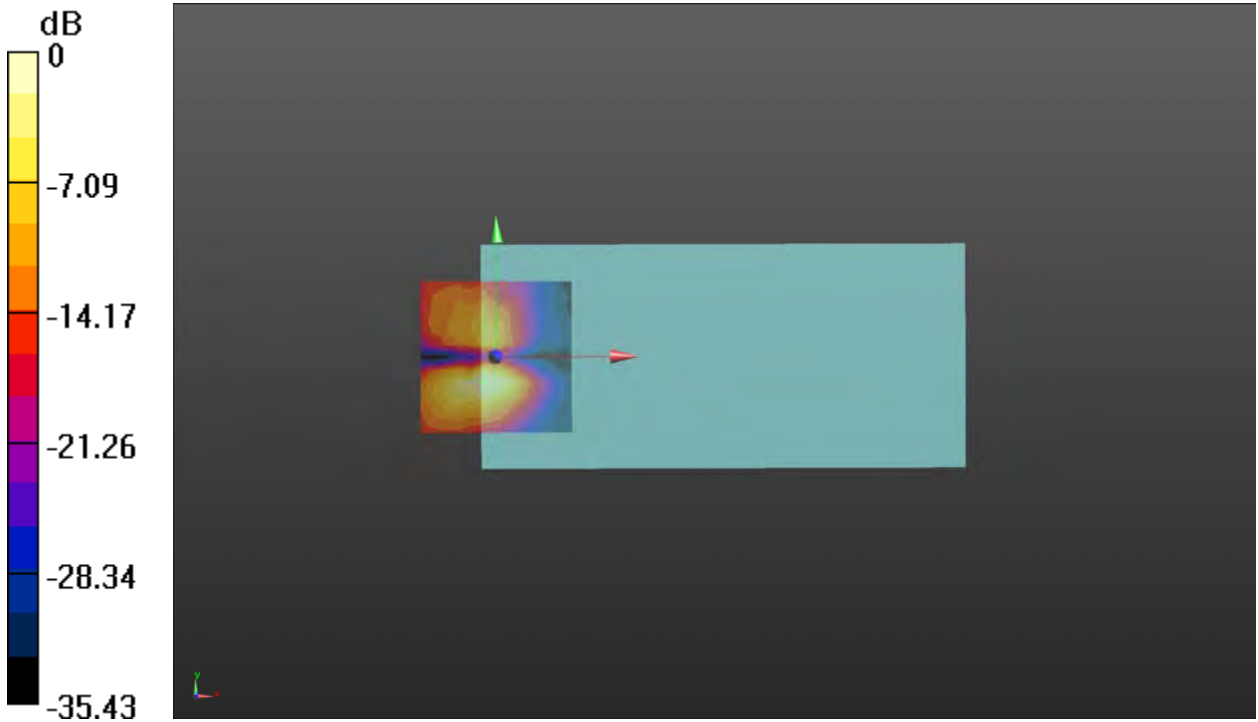

0 dB = 34.37 = 30.72 dB

**Plot 90 T-Coil LTE Band 66 Z Axial**

Date: 2022/7/7

Communication System: UID 10100 - CAE, LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK);

Frequency: 1745 MHz; Duty Cycle: 1:3.68638

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**LTE B66 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x****50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 35.76 dB

ABM1 comp = -3.50 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**LTE B66 100%RB HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 0.43 dB

BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm

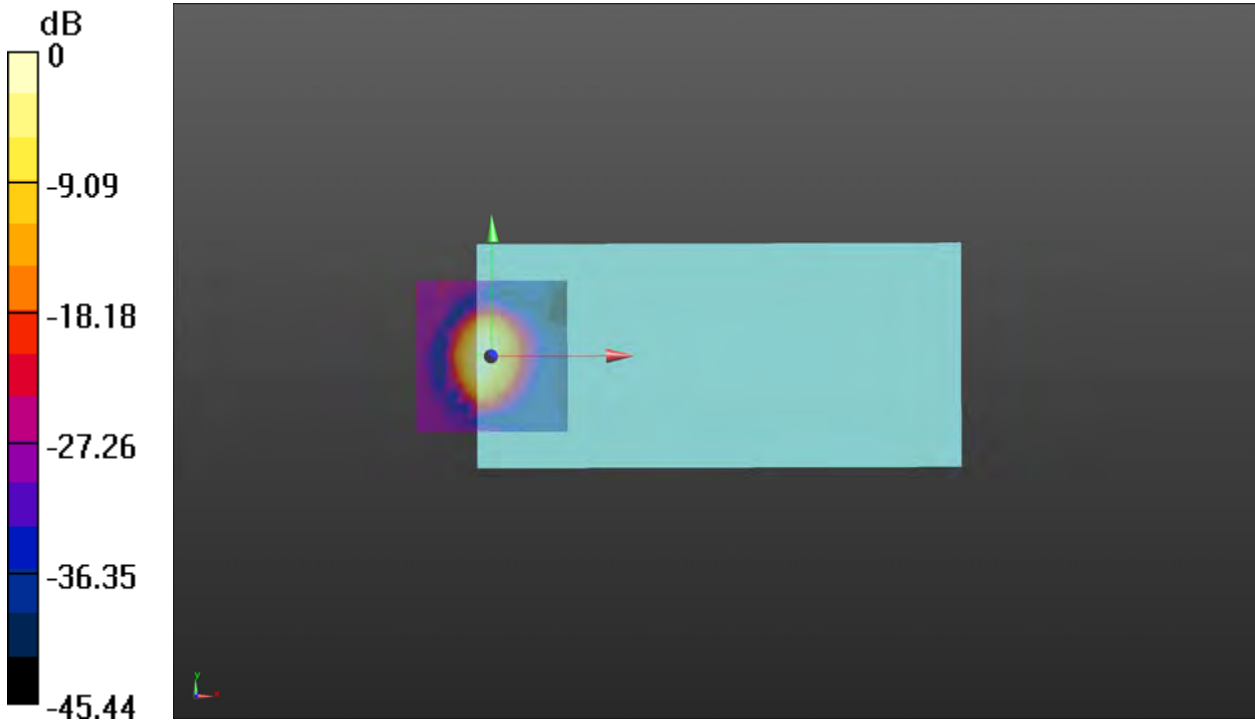

0 dB = 61.36 = 35.76 dB

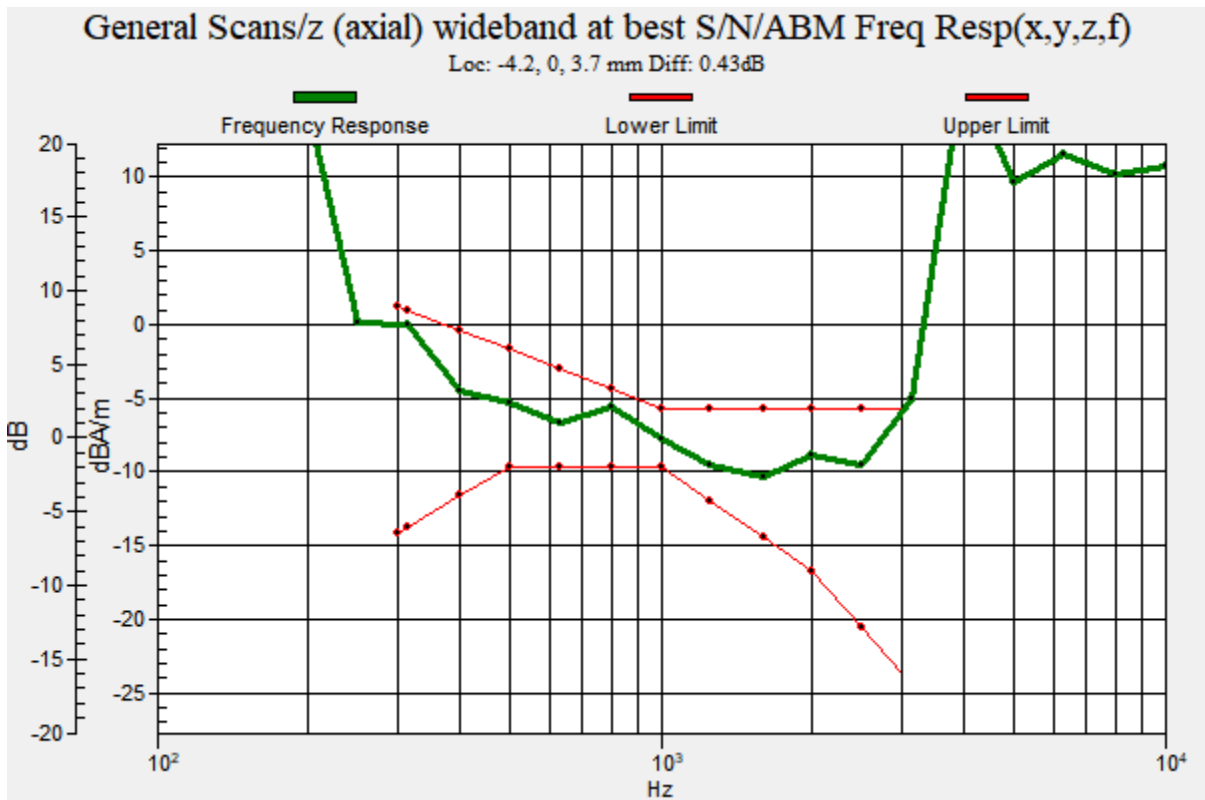

**Plot 91 T-Coil Wi-Fi 2.4G 802.11b Y transversal**

Date: 2022/7/7

Communication System: UID 10061 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps);

Frequency: 2437 MHz; Duty Cycle: 1:2.29034

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11b HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM**

**SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 29.92 dB

ABM1 comp = -12.99 dBA/m

BWC Factor = 0.16 dB

Location: -8.3, 8.3, 3.7 mm

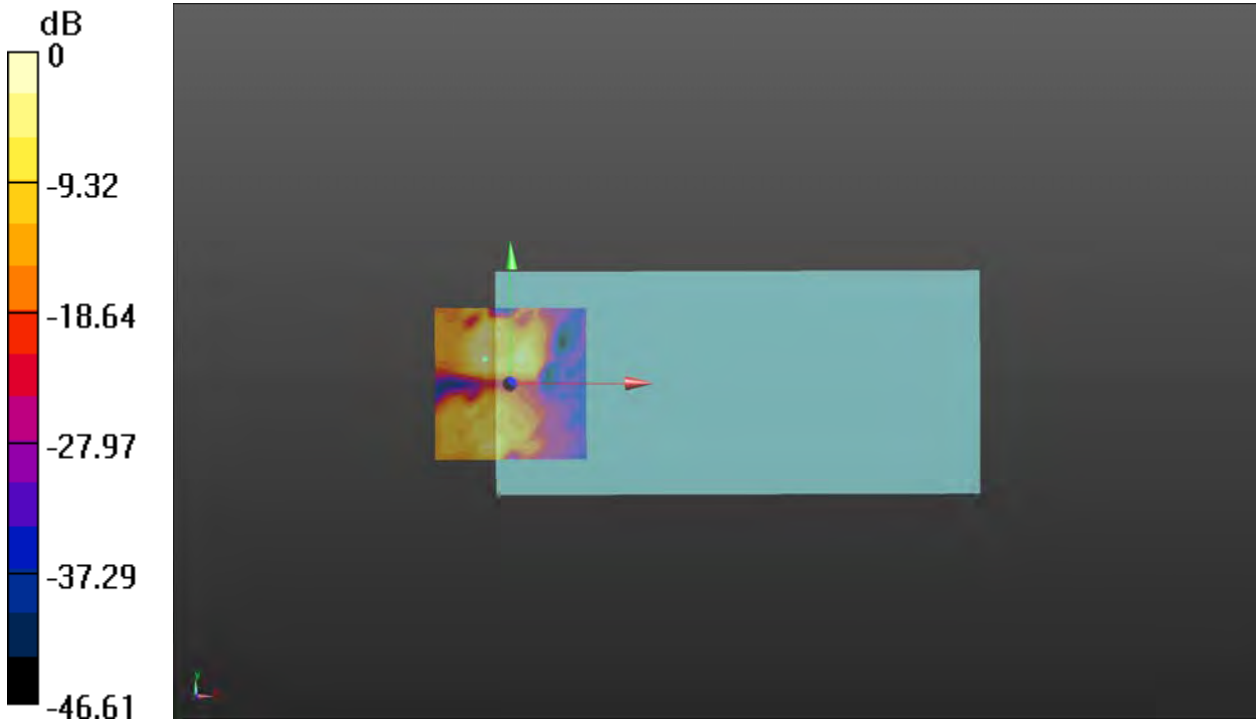

0 dB = 31.34 = 29.92 dB

**Plot 92 T-Coil Wi-Fi 2.4G 802.11b Z Axial**

Date: 2022/7/7

Communication System: UID 10061 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps);

Frequency: 2437 MHz; Duty Cycle: 1:2.29034

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11b HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 28.87 dB

ABM1 comp = 1.18 dBA/m

BWC Factor = 0.16 dB

Location: 0, 0, 3.7 mm

**802.11b HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best S/N/ABM****Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 1.56 dB


BWC Factor = 10.81 dB

Location: 0, 0, 3.7 mm



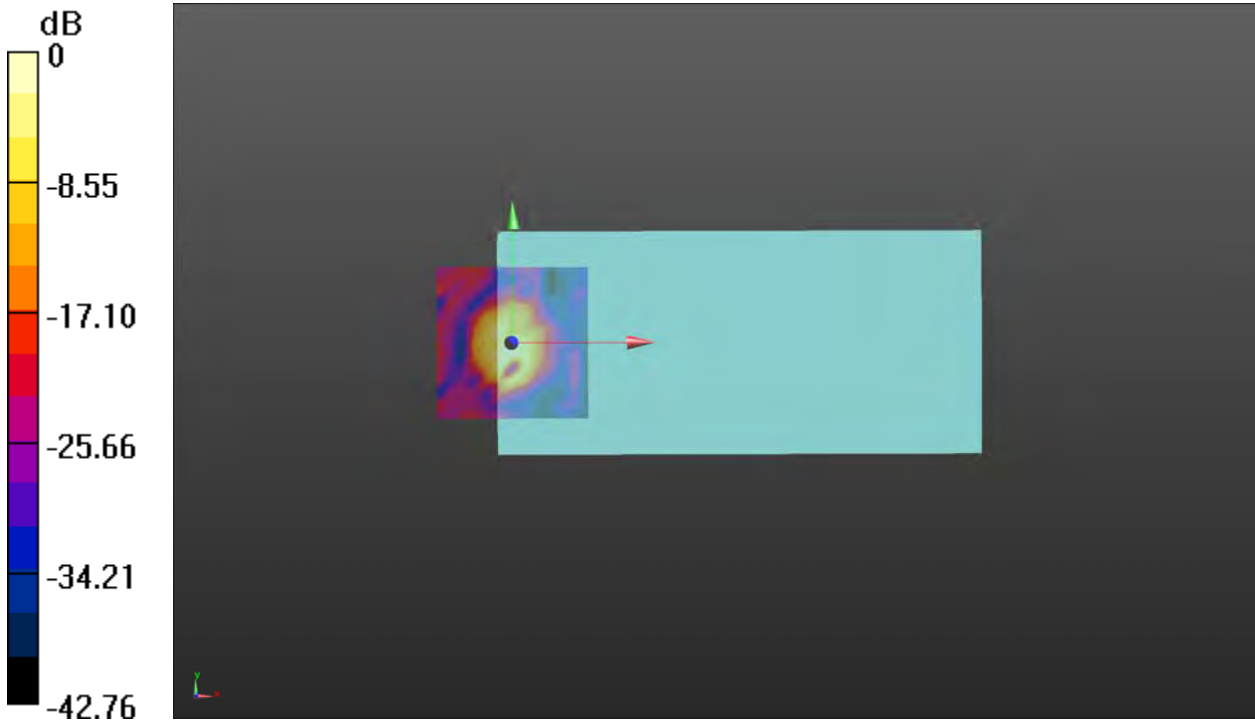

0 dB = 27.77 = 28.87 dB

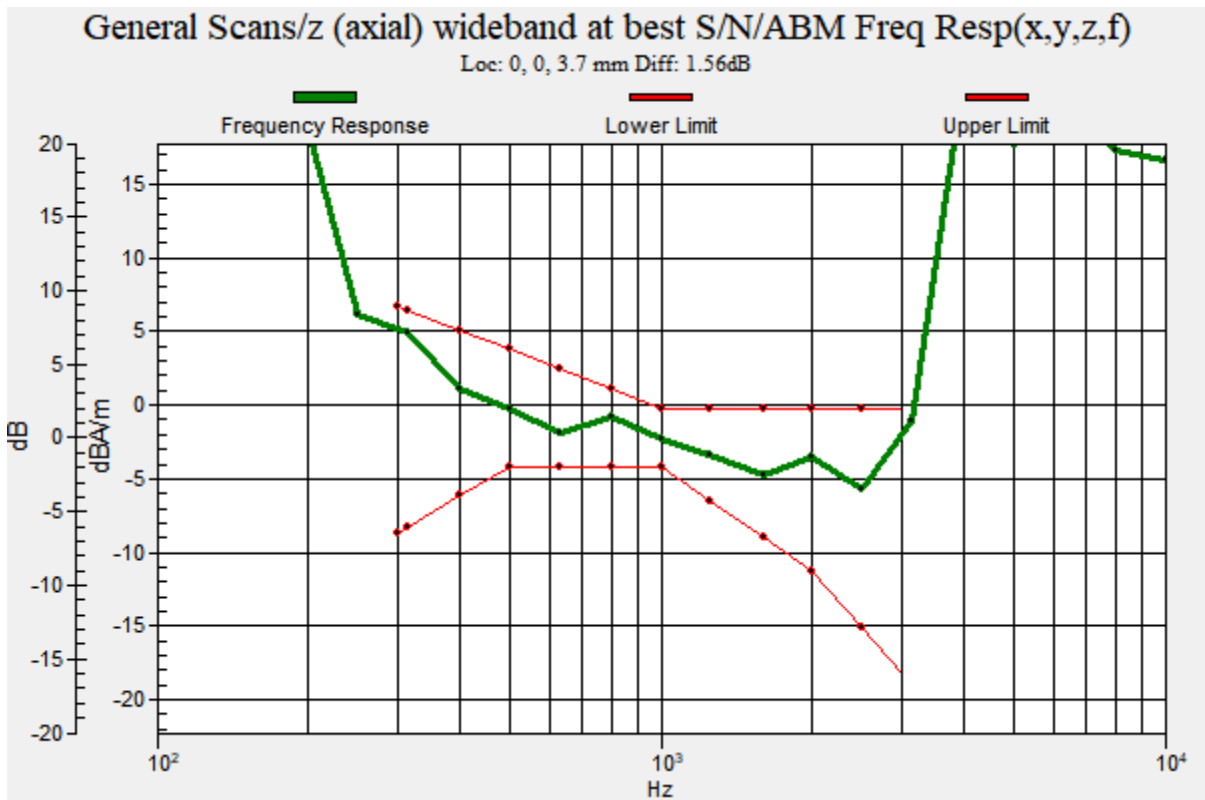

**Plot 93 T-Coil Wi-Fi 2.4G 802.11g Y transversal**

Date: 2022/7/7

Communication System: UID 10013 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps);

Frequency: 2437 MHz; Duty Cycle: 1:8.82673

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11g HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 21.32 dB

ABM1 comp = -15.97 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 12.5, 3.7 mm

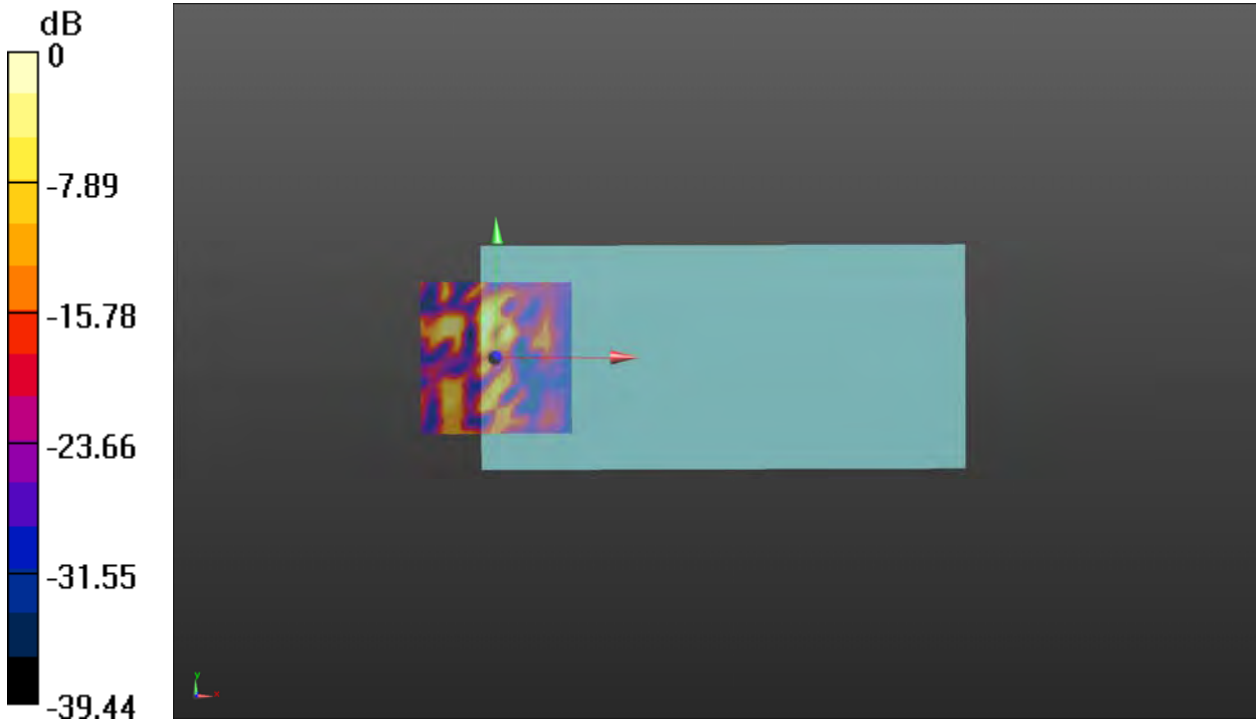

0 dB = 11.64 = 21.32 dB

**Plot 94 T-Coil Wi-Fi 2.4G 802.11g Z Axial**

Date: 2022/7/7

Communication System: UID 10013 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps);

Frequency: 2437 MHz; Duty Cycle: 1:8.82673

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11g HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 27.95 dB

ABM1 comp = -4.08 dBA/m

BWC Factor = 0.16 dB

Location: 0, 0, 3.7 mm

**802.11g HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best S/N/ABM****Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 0.39 dB

BWC Factor = 10.81 dB

Location: 0, 0, 3.7 mm

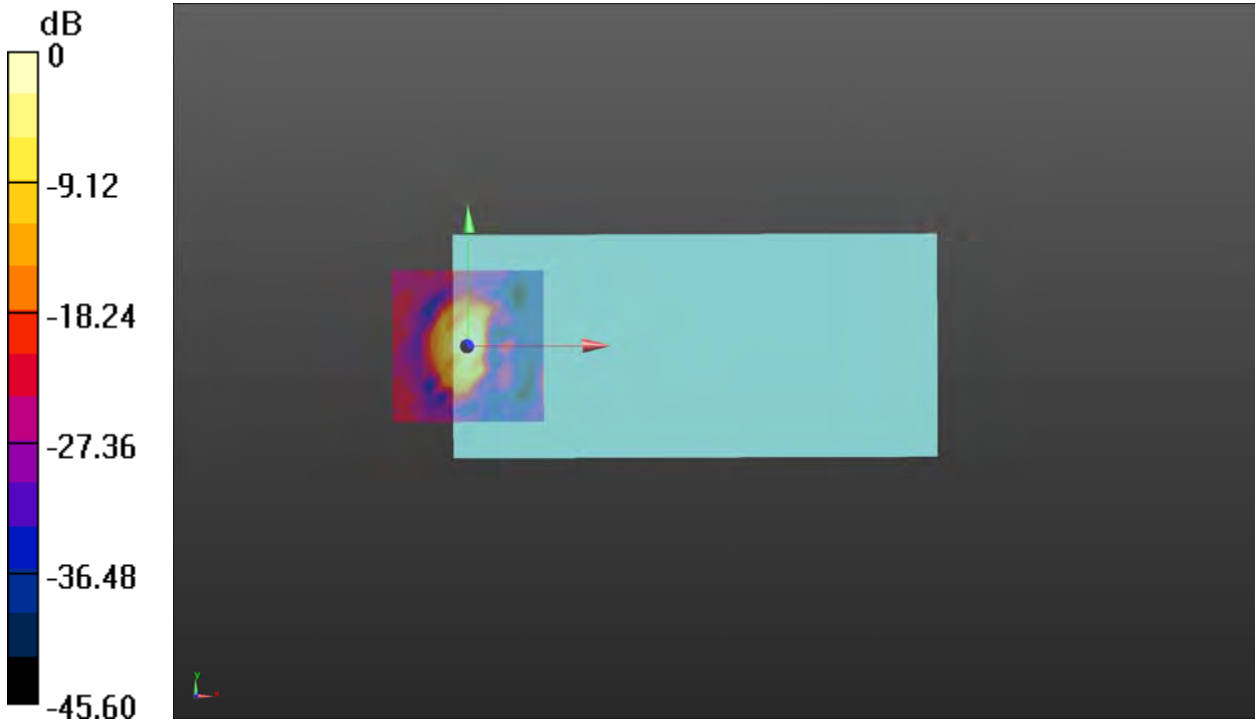

0 dB = 24.98 = 27.95 dB

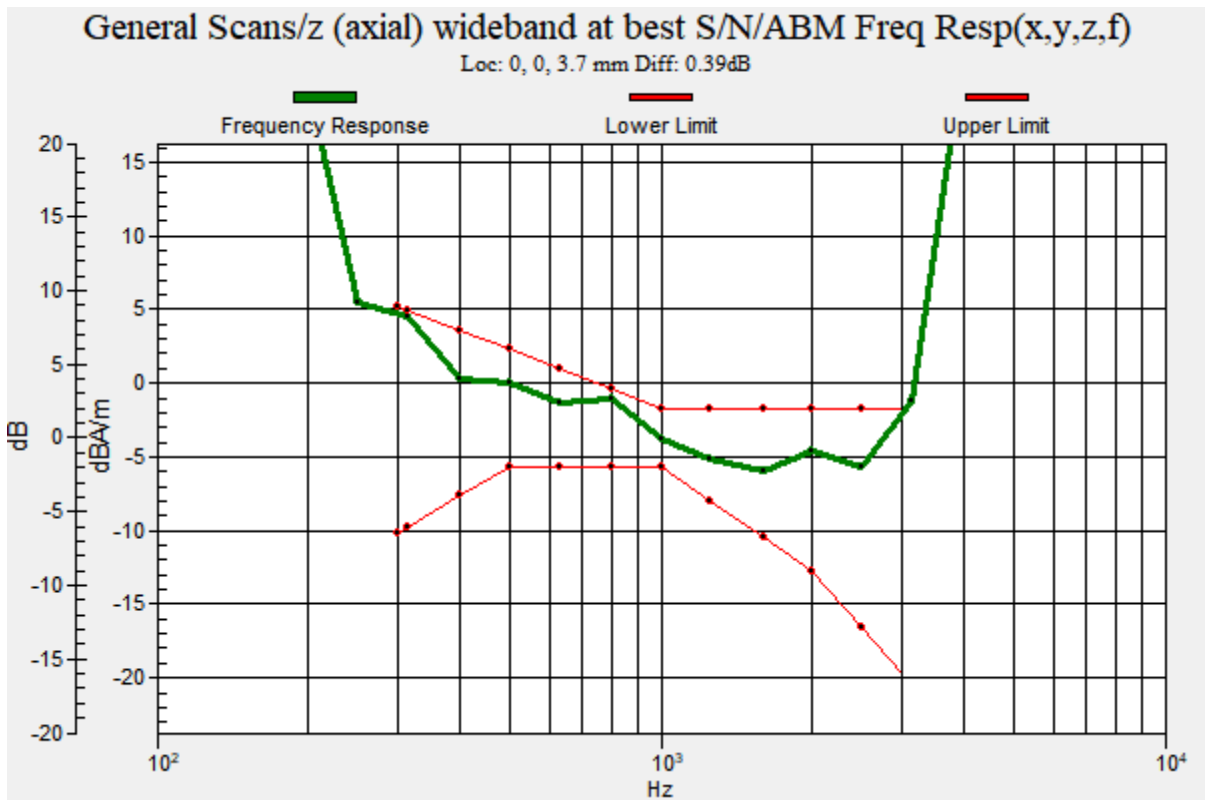

**Plot 95 T-Coil Wi-Fi 2.4G 802.11n Y transversal**

Date: 2022/7/7

Communication System: UID 10591 - AAB, IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle); Frequency: 2437 MHz; Duty Cycle: 1:7.29122

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11n HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 27.01 dB

ABM1 comp = -16.32 dBA/m

BWC Factor = 0.16 dB

Location: -8.3, 12.5, 3.7 mm

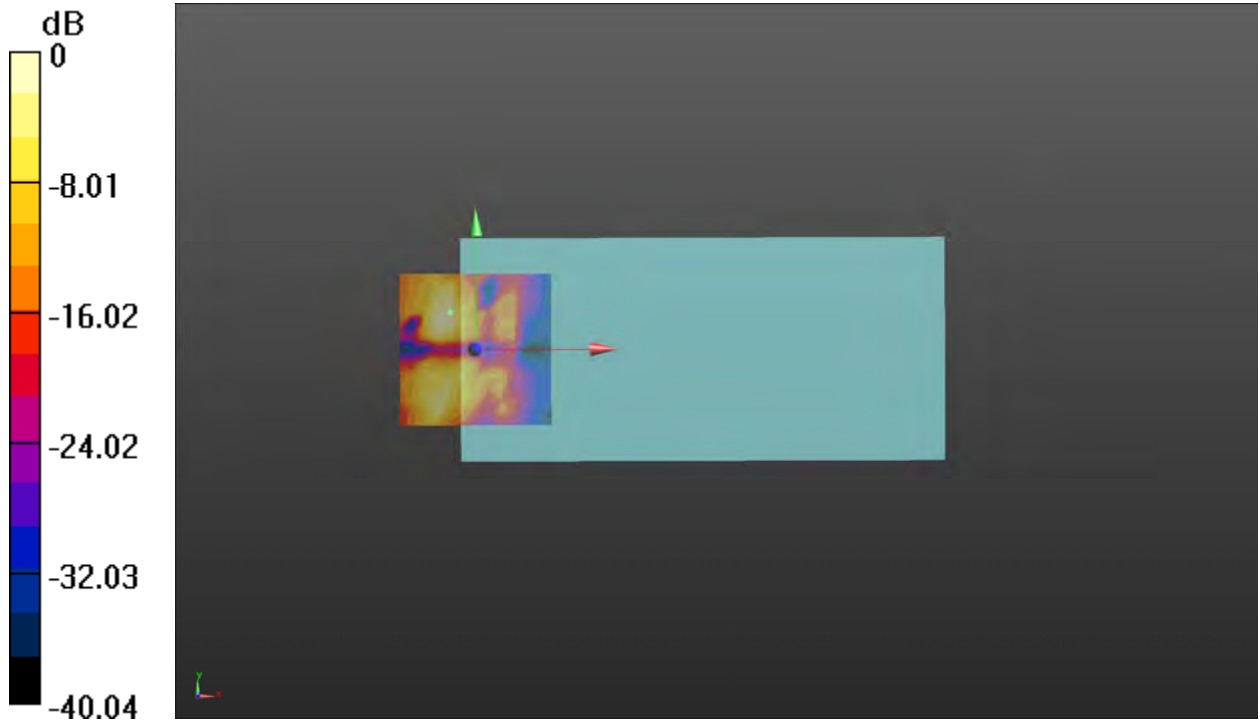

0 dB = 22.42 = 27.01 dB

**Plot 96 T-Coil Wi-Fi 2.4G 802.11n Z Axial**

Date: 2022/7/7

Communication System: UID 10591 - AAB, IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle); Frequency: 2437 MHz; Duty Cycle: 1:7.29122

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11n HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 31.09 dB

ABM1 comp = -8.37 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -4.2, 3.7 mm

**802.11n HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best S/N/ABM****Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 1.29 dB


BWC Factor = 10.81 dB

Location: -4.2, -4.2, 3.7 mm



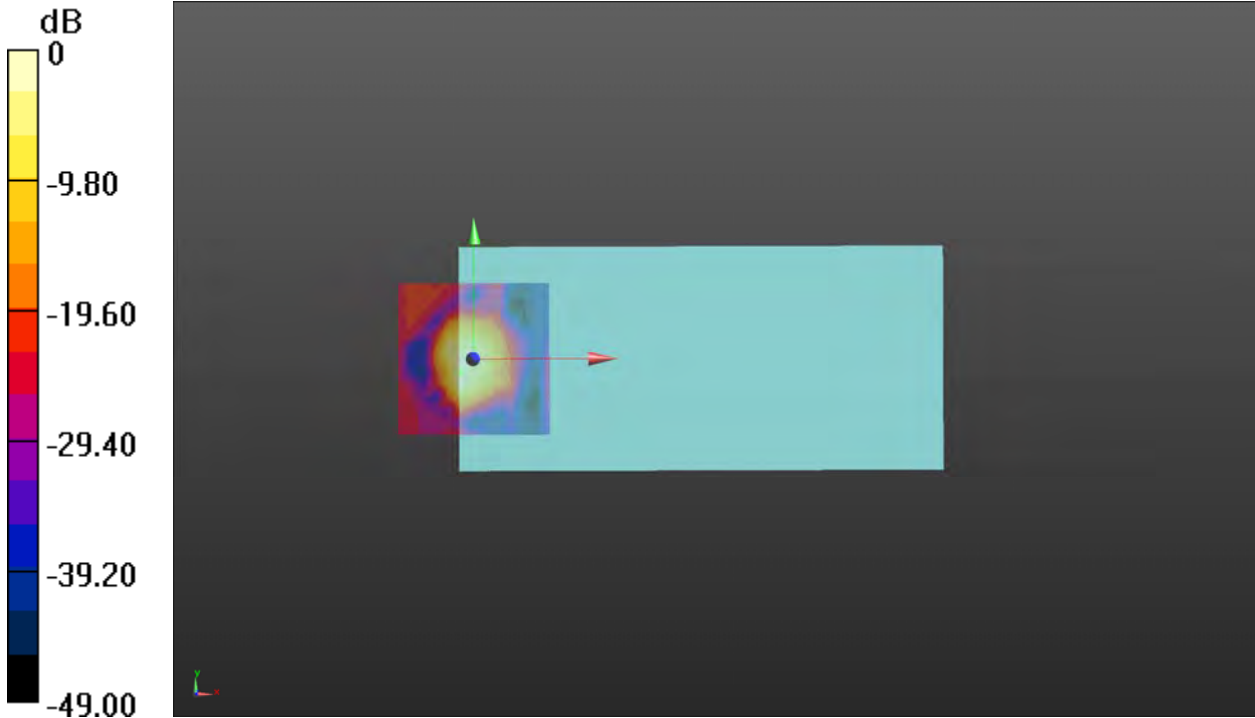

0 dB = 35.87 = 31.09 dB

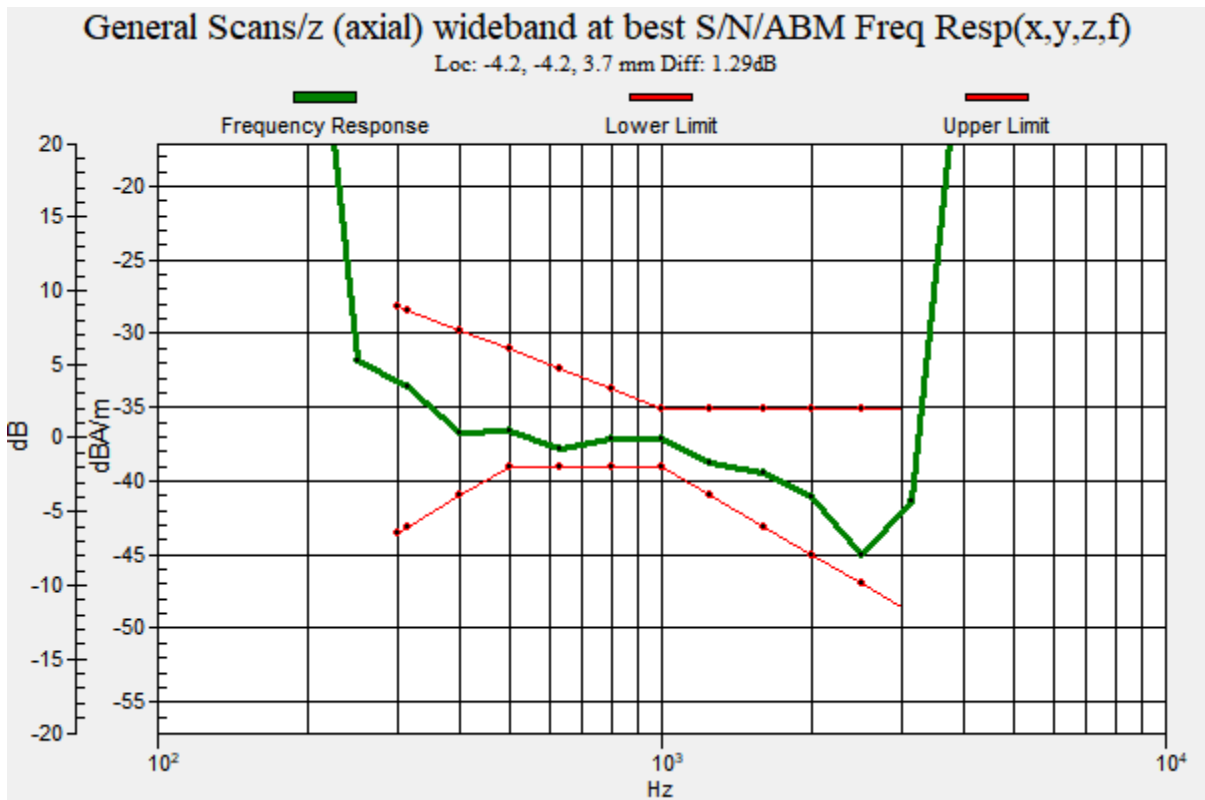

**Plot 97 T-Coil Wi-Fi 5G U-NII-1 802.11a Y transversal**

Date: 2022/7/7

Communication System: UID 10317 - AAC, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5180 MHz; Duty Cycle: 1:6.85962

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11a HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 29.01 dB

ABM1 comp = -9.91 dBA/m

BWC Factor = 0.16 dB

Location: 0, -8.3, 3.7 mm

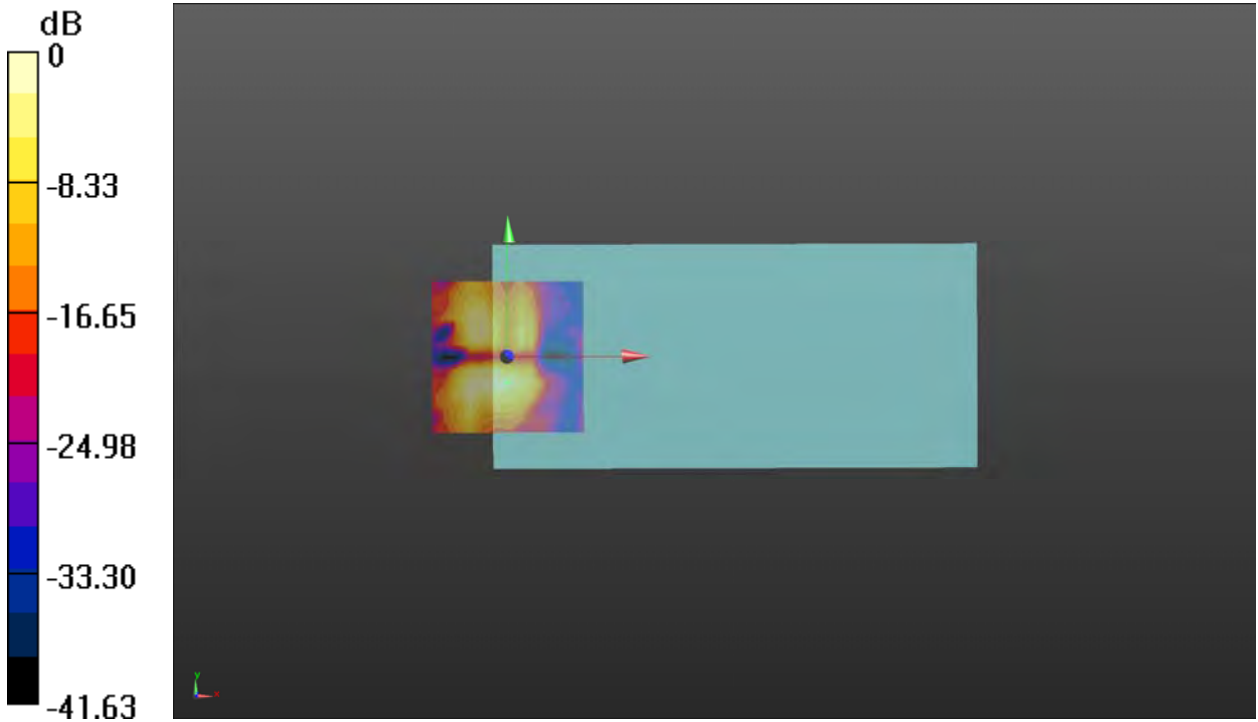

0 dB = 28.23 = 29.01 dB

**Plot 98 T-Coil Wi-Fi 5G U-NII-1 802.11a Z Axial**

Date: 2022/7/7

Communication System: UID 10317 - AAC, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5180 MHz; Duty Cycle: 1:6.85962

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11a HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 35.36 dB

ABM1 comp = -5.99 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**802.11a HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best S/N/ABM****Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB


Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


Diff = 0.51 dB

BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm

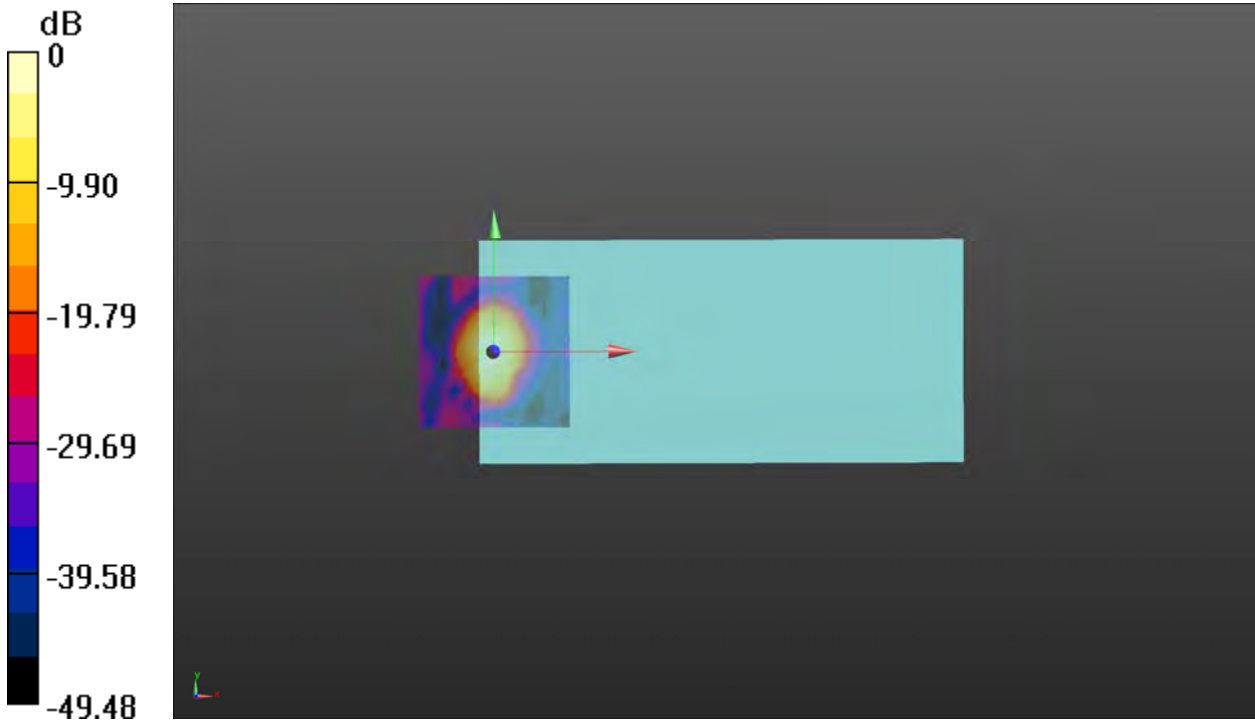

0 dB = 58.58 = 35.35 dB

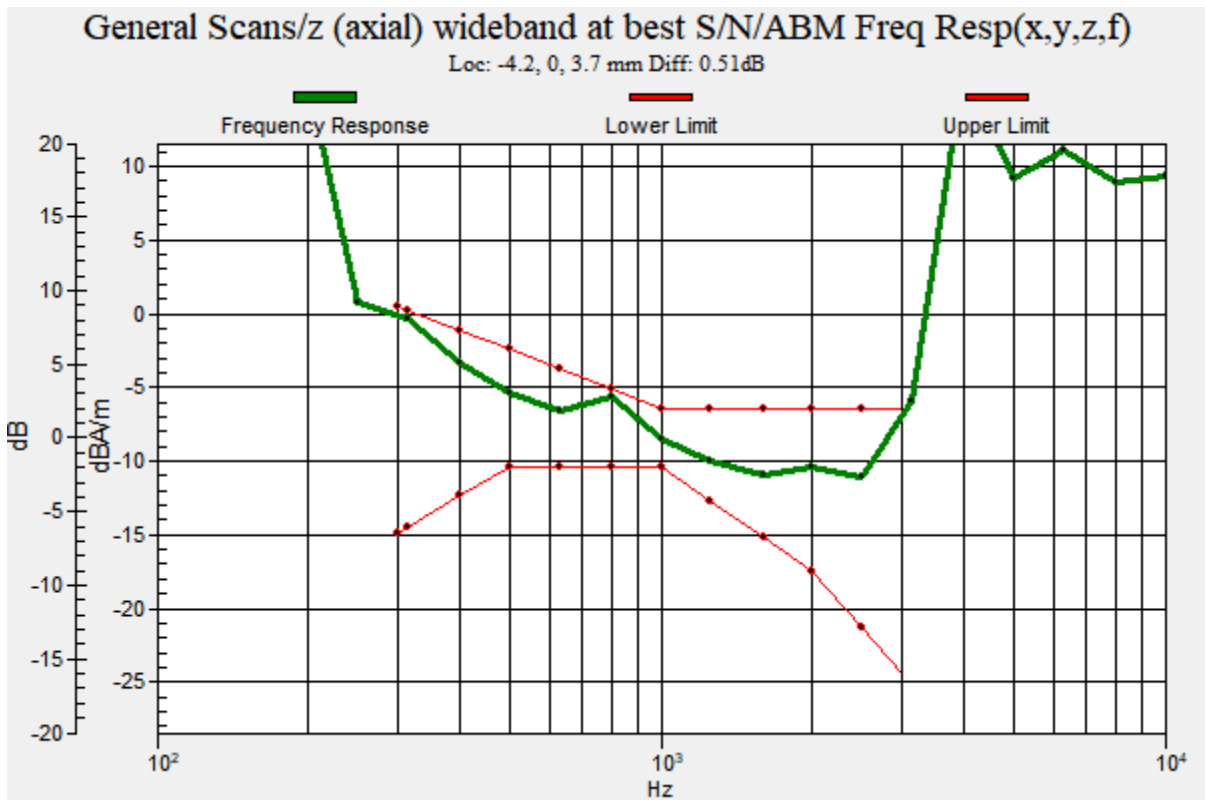

**Plot 99 T-Coil Wi-Fi 5G U-NII-3 802.11a Y transversal**

Date: 2022/7/7

Communication System: UID 10317 - AAC, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5785 MHz; Duty Cycle: 1:6.85962

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11a HAC\_TCoil\_WD\_Emission-6kbps/General Scans/y (transversal) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

ABM1/ABM2 = 24.61 dB

ABM1 comp = -12.71 dBA/m

BWC Factor = 0.16 dB

Location: 0, -12.5, 3.7 mm

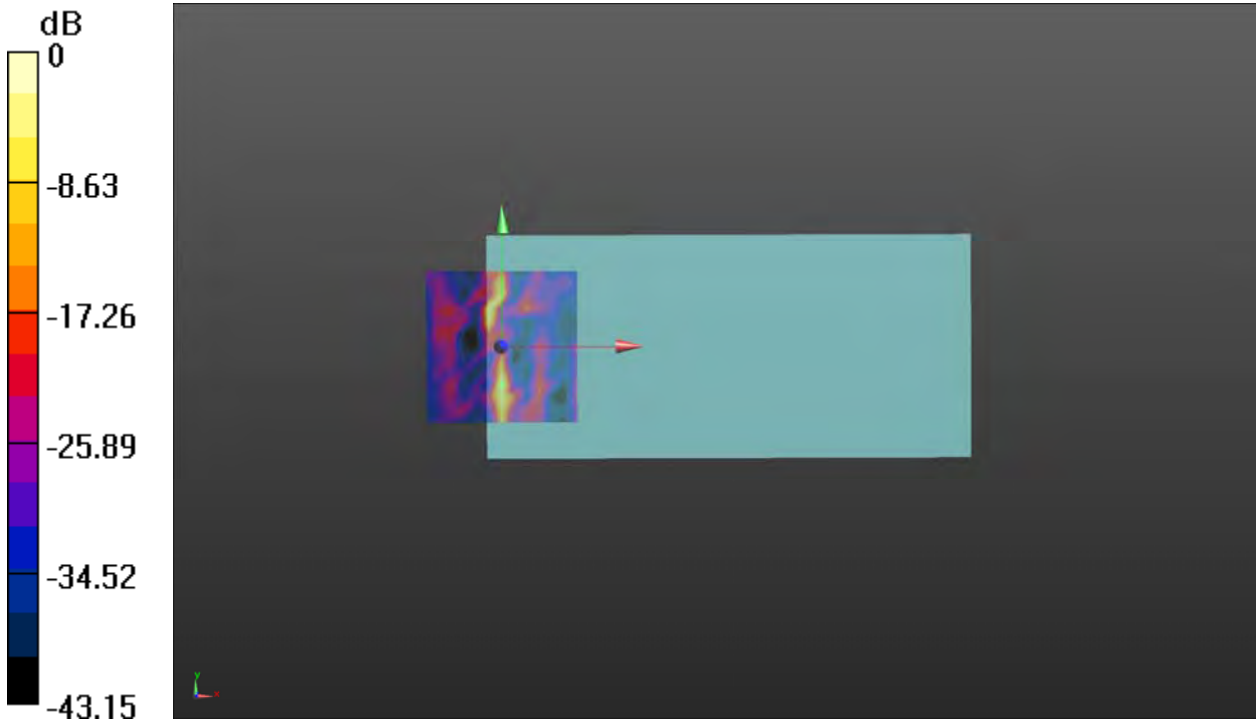

0 dB = 17.00 = 24.61 dB

**Plot 100 T-Coil Wi-Fi 5G U-NII-3 802.11a Z Axial**

Date: 2022/7/7

Communication System: UID 10317 - AAC, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5785 MHz; Duty Cycle: 1:6.85962

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 0mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2022/2/23

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**802.11a HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 29.25 dB

ABM1 comp = -12.68 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 0, 3.7 mm

**802.11a HAC\_TCoil\_WD\_Emission-6kbps/General Scans/z (axial) wideband at best S/N/ABM****Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


**Cursor:**

Diff = 1.43 dB


BWC Factor = 10.81 dB

Location: -4.2, 0, 3.7 mm



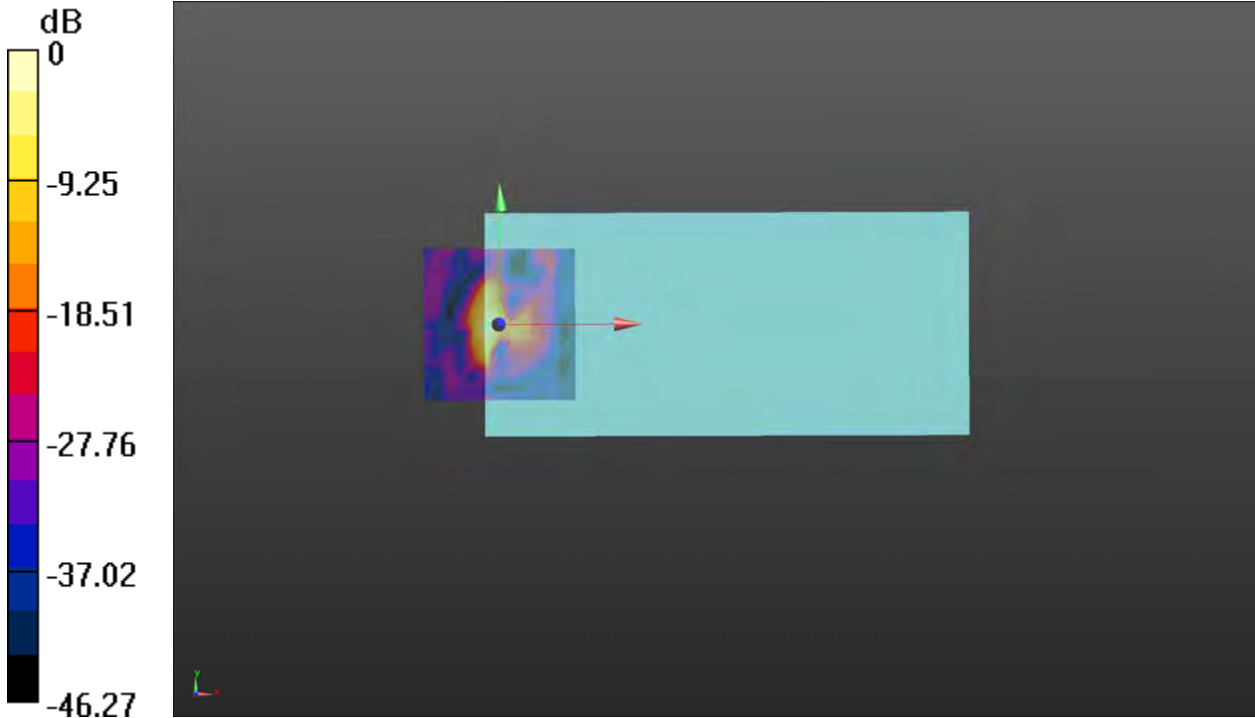

0 dB = 29.02 = 29.25 dB

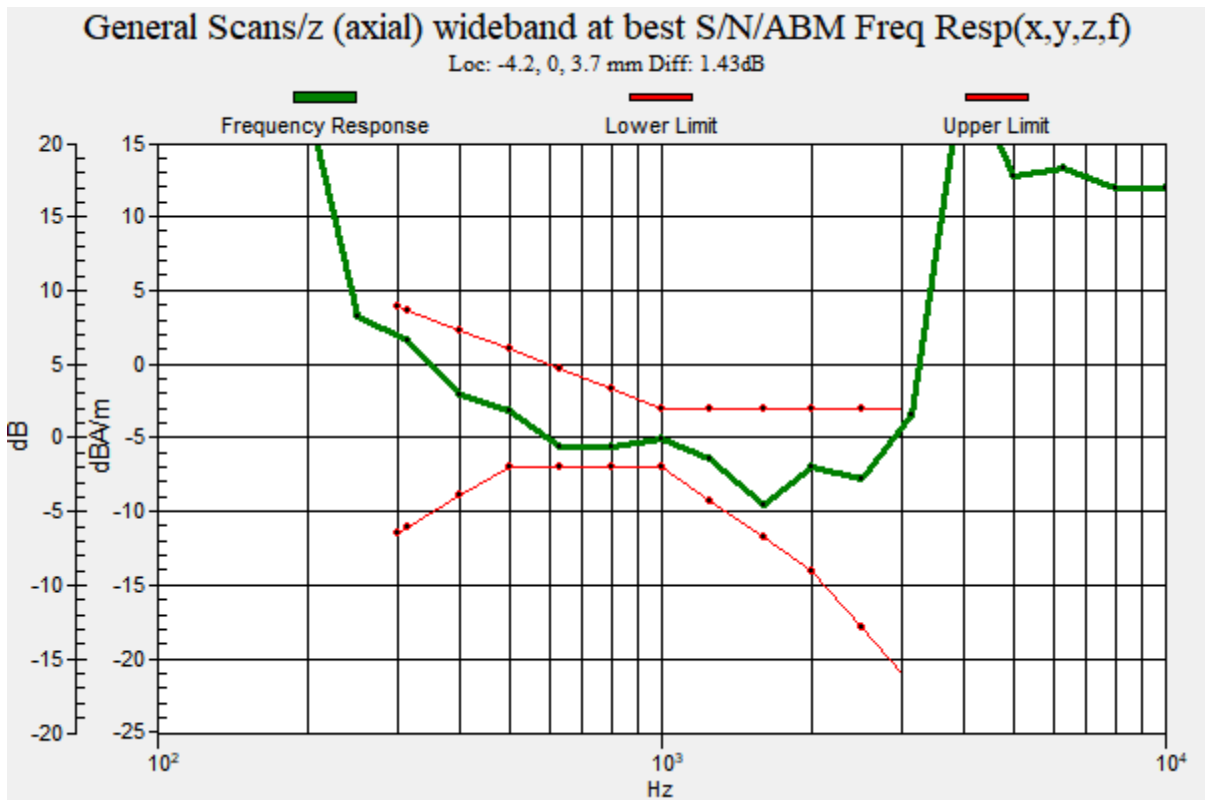



# ANNEX C: Probe Calibration Certificate

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **TA-SH (Auden)**

Certificate No: **AM1DV3-3082\_Feb22**

CALIBRATION CERTIFICATE																															
Object	AM1DV3 - SN: 3082																														
Calibration procedure(s)	QA CAL-24.v4 Calibration procedure for AM1D magnetic field probes and TMFS in the audio range																														
Calibration date:	February 23, 2022																														
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Keithley Multimeter Type 2001</td> <td>SN: 0810278</td> <td>31-Aug-21 (No. 31368)</td> <td>Aug-22</td> </tr> <tr> <td>Reference Probe AM1DV2</td> <td>SN: 1008</td> <td>28-Dec-21 (No. AM1DV2-1008_Dec21)</td> <td>Dec-22</td> </tr> <tr> <td>DAE4</td> <td>SN: 781</td> <td>22-Dec-21 (No. DAE4-781_Dec21)</td> <td>Dec-22</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>AMCC</td> <td>SN: 1050</td> <td>01-Oct-13 (in house check Oct-20)</td> <td>Oct-23</td> </tr> <tr> <td>AMMI Audio Measuring Instrument</td> <td>SN: 1062</td> <td>26-Sep-12 (in house check Oct-20)</td> <td>Oct-23</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Keithley Multimeter Type 2001	SN: 0810278	31-Aug-21 (No. 31368)	Aug-22	Reference Probe AM1DV2	SN: 1008	28-Dec-21 (No. AM1DV2-1008_Dec21)	Dec-22	DAE4	SN: 781	22-Dec-21 (No. DAE4-781_Dec21)	Dec-22	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	AMCC	SN: 1050	01-Oct-13 (in house check Oct-20)	Oct-23	AMMI Audio Measuring Instrument	SN: 1062	26-Sep-12 (in house check Oct-20)	Oct-23
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																												
Keithley Multimeter Type 2001	SN: 0810278	31-Aug-21 (No. 31368)	Aug-22																												
Reference Probe AM1DV2	SN: 1008	28-Dec-21 (No. AM1DV2-1008_Dec21)	Dec-22																												
DAE4	SN: 781	22-Dec-21 (No. DAE4-781_Dec21)	Dec-22																												
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																												
AMCC	SN: 1050	01-Oct-13 (in house check Oct-20)	Oct-23																												
AMMI Audio Measuring Instrument	SN: 1062	26-Sep-12 (in house check Oct-20)	Oct-23																												
Calibrated by:	Name Leif Klysner	Function Laboratory Technician	Signature 																												
Approved by:	Name Niels Kuster	Function Quality Manager	Signature 																												
			Issued: February 28, 2022																												
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																															

## References

- [1] ANSI-C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] ANSI-C63.19-2019 (ANSI-C63.19-2011)  
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [3] DASY5 manual, Chapter: Hearing Aid Compatibility (HAC) T-Coil Extension

## Description of the AM1D probe

The AM1D Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1+2]. The probe includes a symmetric low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface.

The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted nominally 35.3° above the measurement plane, using the connector rotation and sensor angle stated below.

The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1+2] without additional shielding.

## Handling of the item

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in a DASY system, the probe must be operated with the special probe cup provided (larger diameter).

## Methods Applied and Interpretation of Parameters

- *Coordinate System:* The AM1D probe is mounted in the DASY system for operation with a HAC Test Arch phantom with AMCC Helmholtz calibration coil according to [3], with the tip pointing to "southwest" orientation.
- *Functional Test:* The functional test preceding calibration includes test of Noise level RF immunity (1kHz AM modulated signal). The shield of the probe cable must be well connected. Frequency response verification from 100 Hz to 10 kHz.
- *Connector Rotation:* The connector at the end of the probe does not carry any signals and is used for fixation to the DAE only. The probe is operated in the center of the AMCC Helmholtz coil using a 1 kHz magnetic field signal. Its angle is determined from the two minima at nominally +120° and -120° rotation, so the sensor in the tip of the probe is aligned to the vertical plane in z-direction, corresponding to the field maximum in the AMCC Helmholtz calibration coil.
- *Sensor Angle:* The sensor tilting in the vertical plane from the ideal vertical direction is determined from the two minima at nominally +120° and -120°. DASY system uses this angle to align the sensor for radial measurements to the x and y axis in the horizontal plane.
- *Sensitivity:* With the probe sensor aligned to the z-field in the AMCC, the output of the probe is compared to the magnetic field in the AMCC at 1 kHz. The field in the AMCC Helmholtz coil is given by the geometry and the current through the coil, which is monitored on the precision shunt resistor of the coil.



**AM1D probe identification and configuration data**

Item	AM1DV3 Audio Magnetic 1D Field Probe
Type No	SP AM1 001 BA
Serial No	3082

Overall length	296 mm
Tip diameter	6.0 mm (at the tip)
Sensor offset	3.0 mm (centre of sensor from tip)
Internal Amplifier	20 dB

Manufacturer / Origin	Schmid & Partner Engineering AG, Zurich, Switzerland
-----------------------	--

**Calibration data**

Connector rotation angle	(in DASY system)	<b>8.7 °</b>	+/- 3.6 ° (k=2)
Sensor angle	(in DASY system)	<b>0.58 °</b>	+/- 0.5 ° (k=2)
Sensitivity at 1 kHz	(in DASY system)	<b>0.00739 V/(A/m)</b>	+/- 2.2 % (k=2)

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

# ANNEX D: DAE4 Calibration Certificate

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **TA-SH (Auden)**

Certificate No: **DAE4-1692\_Oct21**

CALIBRATION CERTIFICATE			
Object	DAE4 - SD 000 D04 BO - SN: 1692		
Calibration procedure(s)	QA CAL-06.v30 Calibration procedure for the data acquisition electronics (DAE)		
Calibration date:	October 04, 2021		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p>			
<b>Primary Standards</b>	<b>ID #</b>	<b>Cal Date (Certificate No.)</b>	<b>Scheduled Calibration</b>
Keithley Multimeter Type 2001	SN: 0810278	31-Aug-21 (No:31368)	Aug-22
<b>Secondary Standards</b>	<b>ID #</b>	<b>Check Date (in house)</b>	<b>Scheduled Check</b>
Auto DAE Calibration Unit	SE UWS 053 AA 1001	07-Jan-21 (in house check)	In house check: Jan-22
Calibrator Box V2.1	SE UMS 006 AA 1002	07-Jan-21 (in house check)	In house check: Jan-22
Calibrated by:	Name	Function	Signature
	Adrian Gehring	Laboratory Technician	
Approved by:	Name	Function	Signature
	Sven Kühn	Deputy Manager	
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			Issued: October 4, 2021

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

## Glossary

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

## Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
  - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
  - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
  - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
  - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - **Input resistance:** Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
  - **Power consumption:** Typical value for information. Supply currents in various operating modes.

**DC Voltage Measurement**

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 $\mu$ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.451 $\pm$ 0.02% (k=2)	404.531 $\pm$ 0.02% (k=2)	404.388 $\pm$ 0.02% (k=2)
Low Range	3.95023 $\pm$ 1.50% (k=2)	4.00333 $\pm$ 1.50% (k=2)	3.97913 $\pm$ 1.50% (k=2)

**Connector Angle**

Connector Angle to be used in DASY system	334.5 $\pm$ 1 $^{\circ}$
---	--------------------------



**Appendix (Additional assessments outside the scope of SCS0108)**

**1. DC Voltage Linearity**

High Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	199998.31	2.10	0.00
Channel X + Input	20004.35	2.07	0.01
Channel X - Input	-19997.45	4.22	-0.02
Channel Y + Input	199996.63	0.87	0.00
Channel Y + Input	20001.14	-1.08	-0.01
Channel Y - Input	-20002.28	-0.47	0.00
Channel Z + Input	199998.12	1.98	0.00
Channel Z + Input	20002.54	0.26	0.00
Channel Z - Input	-20001.19	0.53	-0.00

Low Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	2001.64	0.32	0.02
Channel X + Input	202.20	0.58	0.29
Channel X - Input	-197.54	0.78	-0.39
Channel Y + Input	1999.35	-1.87	-0.09
Channel Y + Input	200.36	-1.25	-0.62
Channel Y - Input	-199.29	-0.98	0.49
Channel Z + Input	2000.89	-0.32	-0.02
Channel Z + Input	200.91	-0.59	-0.29
Channel Z - Input	-199.57	-1.16	0.58

**2. Common mode sensitivity**

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading ( $\mu\text{V}$ )	Low Range Average Reading ( $\mu\text{V}$ )
Channel X	200	15.85	13.56
	- 200	-12.16	-14.19
Channel Y	200	21.51	20.97
	- 200	-24.04	-24.35
Channel Z	200	-6.87	-7.13
	- 200	6.28	5.75

**3. Channel separation**

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X ( $\mu\text{V}$ )	Channel Y ( $\mu\text{V}$ )	Channel Z ( $\mu\text{V}$ )
Channel X	200	-	-0.88	-2.39
Channel Y	200	6.27	-	2.31
Channel Z	200	8.86	3.02	-



**4. AD-Converter Values with Inputs shorted**

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec.

	High Range (LSB)	Low Range (LSB)
Channel X	15949	15587
Channel Y	15899	16485
Channel Z	15825	15999

**5. Input Offset Measurement**DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec  
Input 10M $\Omega$ 

	Average ( $\mu$ V)	min. Offset ( $\mu$ V)	max. Offset ( $\mu$ V)	Std. Deviation ( $\mu$ V)
Channel X	1.24	-0.39	2.50	0.44
Channel Y	-0.70	-1.86	0.77	0.48
Channel Z	-0.23	-1.42	0.54	0.37

**6. Input Offset Current**

Nominal input circuitry offset current on all channels: &lt;25fA

**7. Input Resistance** (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

**8. Low Battery Alarm Voltage** (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

**9. Power Consumption** (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9



## **ANNEX E: The EUT Appearances and Test Configuration**

The EUT Appearance and Test Setup Photos are submitted separately.