

Exhibit C - Measurement Report



ELECTROMAGNETIC COMPATIBILITY TEST REPORT

Company : ACCTON TECHNOLOGY CORP.
 Address : NO.1,Creation Rd. III, Science-Based Industrial Park, Hsinchu
30077, Taiwan, R.O.C.
 Sample Name : 10/100 Mbs 'Retail' Hub
 Model : 3C19261
 Date Received : JUN. 01, 1999
 Date Tested : JUN. 01, 1999

MEASUREMENT PROCEDURE USED :

FCC RULES AND REGULATION PART 15 SUBPART B
 CLASS B OCTOBER 1996 AND ANSI C63.4 MAY 1992
 CISPR 22, CLASS B, 1996

WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.

	Name	Signature	Date
Testing Engineer	C.F.Wu/NVLAP	<i>C.F. Wu</i>	<i>Jun 01 1999</i>
Approving Manager	Paul Y. Liau/NVLAP	<i>Paul Y. Liau</i>	<i>Jun. 14, 1999</i>

Notes :

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to test, and is invalid as separately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the date issued.
5. This is a NIST/NVLAP accredited report but not constituted and endorsed by US government.



TABLE OF CONTENTS

<u>TITLE</u>	<u>PAGE NO.</u>
1. GENERAL INFORMATION	3
1.1 DESCRIPTION OF EUT & POWER.....	3
1.2 DESCRIPTION OF PERIPHERALS	4
1.3 EUT & PERIPHERALS SETUP DIAGRAM	5
1.4 EUT OPERATING CONDITION	6
1.5 DESCRIPTION OF TEST SITE.....	6
2. CONDUCTED POWERLINE TEST	7
2.1 TEST EQUIPMENTS.....	7
2.2 TEST SETUP.....	7
2.3 CONDUCTED POWER LINE EMISSION LIMIT	8
2.4 TEST PROCEDURE	8
2.5 UNCERTAINTY OF CONDUCTED EMISSION.....	8
2.6 LINE CONDUCTED RF VOLTAGE MEASUREMENT	9
2.7 PHOTOS OF CONDUCTION TEST	10
3. RADIATED EMISSION TEST	11
3.1 TEST EQUIPMENTS.....	11
3.2 TEST SETUP.....	11
3.3 RADIATION LIMIT.....	12
3.4 TEST PROCEDURE	12
3.5 UNCERTAINTY OF RADIATED EMISSION	12
3.6 RADIATED RF NOISE MEASUREMENT	13
3.7 PHOTOS OF OPEN SITE	14-15



1. GENERAL INFORMATION

1.1 DESCRIPTION OF EUT & POWER

MANUFACTURER : ACCTON TECHNOLOGY CORP.

SAMPLE NAME : 10/100 Mbs 'Retail' Hub

MODEL NUMBER : 3C19261

POWER SUPPLY : 9VDC(from power adapter)

POWER CORD : Unshielded cable, 1.8m



1.2 DESCRIPTION OF PERIPHERALS

(1) PC

MODEL NUMBER : Vectra VE 5/133 series 3
SERIAL NUMBER : SG72200521
MANUFACTURER : HP CORP.
F.C.C. ID : B94VECTRAVE53
POWER CORD : Unshielded , Detachable , 1.8m

(2) MONITOR

MODEL NUMBER : JC-1571VMA-2
SERIAL NUMBER : 6Z001162EA
MANUFACTURER : NEC CORP.
F.C.C. ID : A3DJC-1571VMA-2
POWER CORD : UnShielded , Detachable , 1.8m

(3) KEYBOARD

MODEL NUMBER : E03633WLTW-C
PART NUMBER : -----
MANUFACTURER : HP CORP.
F.C.C. ID : CIGE03633

(4) PC

MODEL NUMBER : Vectra VE 5/133 series 3
SERIAL NUMBER : SG72200556
MANUFACTURER : HP CORP.
F.C.C. ID : B94VECTRAVE53
POWER CORD : Unshielded , Detachable , 1.8m

(5) MONITOR

MODEL NUMBER : JC-1404HMA
SERIAL NUMBER : 08D00346
MANUFACTURER : NEC CORP.
F.C.C. ID : A3D5YRJC-1404HMA
POWER CORD : UnShielded , Detachable , 1.8m

(6) KEYBOARD


MODEL NUMBER : E03633WLTW-C
PART NUMBER : -----
MANUFACTURER : HP CORP.



(7) Cables

	Type	Connector	Shielded	length
(A)	Uncross-over twisted-pair	RJ-45, plastic	No	15m
(B)	Cross-over Twisted-pair	RJ-45, plastic	No	3m

1.3 EUT & PERIPHERALS SETUP DIAGRAM

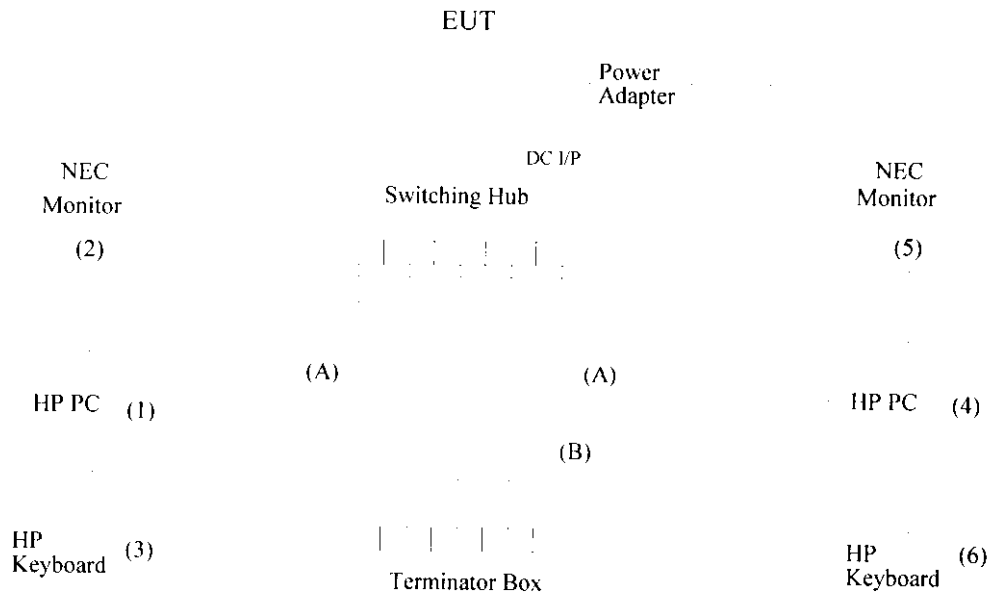

The indicated numbers (1)(2)(A)-----please refer to item 1.2



1.4 EUT OPERATING CONDITION

1. Powered on all equipments.
2. Run "ACCTEST.EXE" on both PCs.
3. PC(1) chose 10Mbps and PC(4) chose 100Mbps.
4. Pressed "F2" to start working
5. Start testing.

1.5 DESCRIPTION OF TEST SITE

SITE DESCRIPTION : FCC certificate NO. :31040/SIT
DNV certificate NO. : 510-96-1016
TUV certificate NO. :I9664582-9610
Lloyd's certificate NO. :LA003
BCIQ certificate NO. :SL2-IN-E-02
NVLAP Lab code : 200118-0
CNLA certificate NO. :CNLA-ZL97018
VCCI certificate NO. : R-706, C-650

NAME OF SITE : Electronics Research & Service Organization
Industrial Technology Research Institute

SITE LOCATION : K500, 195-4 , sec. 4, Chung Hsing Rd.,
Chu-Tung Chen. Hsin-Chu, Taiwan 31015 R.O.C.




2. CONDUCTED POWERLINE TEST

2.1 TEST EQUIPMENTS

The following test equipments are used during the conducted powerline tests :

MANUFACTURER OR TYPE	MODEL No	SERIAL NO.	DATE OF CALIBRATION	CALIBRATION PERIOD	REMARK
SPECTRUM ANALYZER & DISPLAY	HP 8568A	2235A02320	MAR. 18, 1999	1 Year	PRETEST
QUASI-PEAK ADAPTER	HP 85650 A	2341A00672	MAR. 18, 1999	1 Year	PRETEST
ISOLATION TRANSFORMER	SOLAR 7032-1	N/A	N/A	N/A	FINAL
L.I.S.N.	EMCO 3850/2	9311-1025 9401-1028	MAR. 25, 1999 For Characteristic impedance JUN. 11, 1999 For Insertion loss	1 Year	FINAL
TEST RECEIVER	R/S ESH3	8720791118	JUL. 29, 1999	1 Year	FINAL
SHIELDED ROOM	KEENE 5983	NO.1	N/A	N/A	FINAL
PULSE LIMIT	R/S EHS3Z2	357.8810.52	JUL. 22, 1999	1 Year	FINAL
N TYPE COAXIAL CABLE	-----	-----	JUL. 05, 1999	1 Year	FINAL
50Ω TERMINATOR	-----	-----	JUL. 14, 1999	1 Year	FINAL

2.2 TEST SETUP

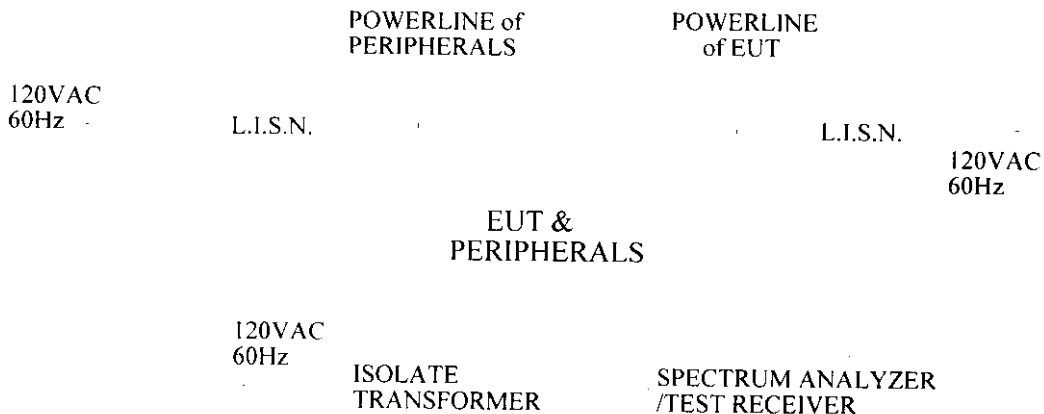



2.3 CONDUCTED POWER LINE EMISSION LIMIT

FREQUENCY (MHz)	MAXIMUM RF LINE VOLTAGE (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56	56-46
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

2.4 TEST PROCEDURE

The test procedure is performed in a 12ft \times 12ft \times 8ft(L \times W \times H) shielded room. the EUT along with its peripherals were placed on a 1.0m(W) \times 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chasis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chasis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

2.5 UNCERTAINTY OF CONDUCTED EMISSION

The uncertainty of conducted emission is ± 1.36 dB.



2.6 LINE CONDUCTED RF VOLTAGE MEASUREMENT

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

All readings are Quasi-peak values.

Temperature : 25°C

Humidity : 50 % RH

FREQUENCY (MHz)	READING(dB μ V)				LIMITS (dB μ V)	
	ONE END & GRD'D		THE OTHER END & GRD'D		Q.P.	Ave.
	Q.P.	Ave.	Q.P.	Ave.		
0.150	*	*	*	*	66.00	56.00
0.152	51.00	*	50.30	*	65.91	55.91
0.191	*	*	47.90	*	63.98	53.98
0.215	48.10	*	*	*	63.01	53.01
0.239	*	*	45.60	*	62.13	52.13
0.329	42.90	*	*	*	59.49	49.49
0.440	*	*	44.39	*	57.07	47.07
0.641	*	*	41.71	*	56.00	46.00
0.690	45.82	*	*	*	56.00	46.00
3.140	*	*	37.09	*	56.00	46.00
3.681	40.70	*	*	*	56.00	46.00
20.162	38.38	*	40.18	*	60.00	50.00
30.000	*	*	*	*	60.00	50.00

REMARKS : 1. * Undetectable or the Q.P.values is lower than the limits of Ave



3. RADIATED EMISSION TEST


3.1 TEST EQUIPMENTS

The following test equipments are utilized in making the measurements contained in this report.

MANUFACTURER OR TYPE	MODEL NO	SERIAL NO	DATE OF CALIBRATION	CALIBRATION PERIOD	REMARK
CHASE BI-LOG ANTENNA	CBL6111A	1546	MAY.23, 1999	1 Year	FINAL
R/S TEST RECEIVER	ESMI	842088/005 841978/008	JUL.29, 1999	1 Year	FINAL
OPEN SITE	-----	No.1	JUN. 29, 1999	1 Year	FINAL
N TYPE COAXIAL CABLE	CHA9525	015	JUL. 06, 1999	1 Year	FINAL

3.2 TEST SETUP

The diagram below shows the test setup which is utilized to make these measurements.

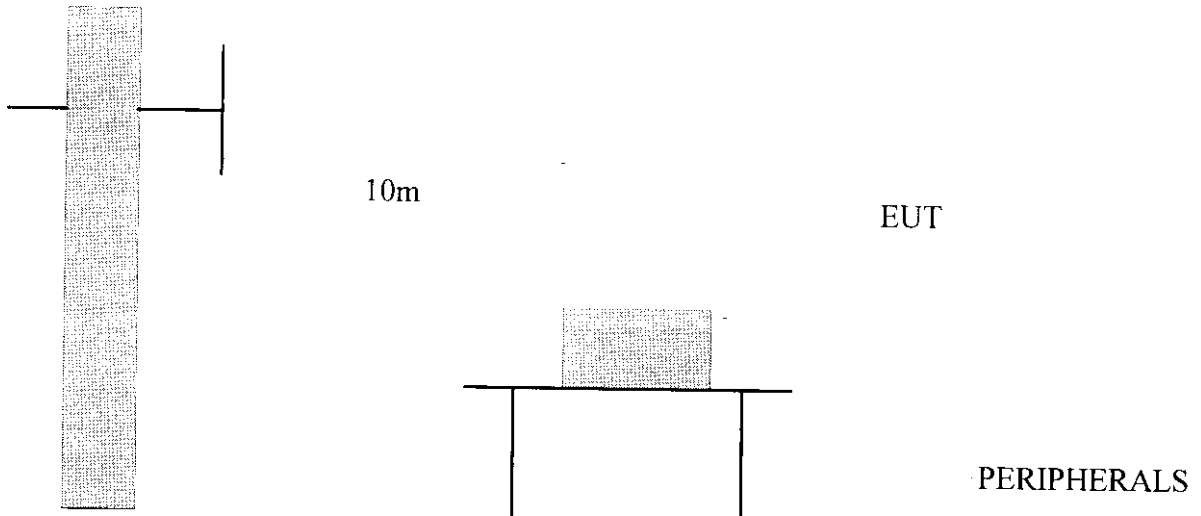

Antenna Elevation Variable



3.3 RADIATION LIMIT

All emanation from a class B computing device or system , including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below :

FREQUENCY (MHz)	DISTANCE (METERS)	FIELD STRENGTHS(dB μ V/M)	
		CLASS A	CLASS B
30-230	10	40	30
230-1000	10	47	37

- Note : (1)The tighter limit shall apply at the edge between two frequency bands.
(2)Distance refers to the distance in meters between the measuring instrument antenna and the closest point of any part of the device or system.

3.4 TEST PROCEDURE

The devices under test were placed on a rotatable table top 0.8 meter above ground. The table was rotated 360 degrees to determine the position of the highest radiation. EUT is set 10 meters from the interference receiving antenna which is mounted on the top of a variable height mast. The antenna height is varied between one meter and four meters above ground to find the maximum value of the field strength Both horizontal polarization and vertical polarization of the antenna are set to make the measurement. The bandwidth setting on the E.M.I. meter (R/S TEST RECEIVER ESMI) is 120 KHz. The levels are quasi peak value readings. The frequency spectrum from 30MHz to 1000MHz was investigated.

3.5 UNCERTAINTY OF RADIATED EMISSION

The uncertainty of radiated emission is ± 2.72 dB.



3.6 RADIATED RF NOISE MEASUREMENT

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

All readings are quasi-peak values.

Temperature : 23°C

Humidity : 80% RH

FREQ- UENCY (MHz)	ANTENNA FACTOR (dB)	CABLE LOSS (dB)	METER READING AT10m(dB μ V/M)		LIMITS (dB μ V/M)	EMISSION LEVEL AT10m(dB μ V/M)	
			HORIZON- TAL	VERTICAL		HORIZON- TAL	VERTICAL
30.00	19.50	1.06	*	*	30.00	*	*
125.00	12.05	2.06	7.30	13.60	30.00	21.41	27.71
200.00	9.34	2.63	1.80	7.00	30.00	13.77	18.97
375.00	15.01	3.75	12.40	11.70	37.00	31.16	30.46
500.00	19.17	4.00	12.00	7.00	37.00	35.17	30.17
625.00	22.95	5.03	4.70	2.40	37.00	32.68	30.38
800.00	23.38	5.90	4.90	4.20	37.00	34.18	33.48
825.00	23.61	6.03	5.00	4.40	37.00	34.64	34.04
837.50	23.72	6.09	5.20	1.90	37.00	35.01	31.71
850.00	23.83	6.15	3.80	3.10	37.00	33.78	33.08
875.00	24.06	6.28	5.20	*	37.00	35.54	*
1000.00	24.86	6.80	*	*	37.00	*	*

REMARKS : 1. * Undetectable

2. Emission level (dB μ V/M) = Antenna Factor (dB) + Cable loss (dB)
 + Meter Reading (dB μ V/M).

3. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.