



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Accton Technology Corporation
Applicant Address	No. 1 Creation Rd., Ill, Science-based Industrial Park, Hsinchu 300, Taiwan, R.O.C.
FCC ID	HEDSMCWBR14SNL
Manufacturer's company	U-MEDIA Communications, Inc.
Manufacturer Address	9F, No. 1, Jin-Shan 7th St., Hsinchu 300, Taiwan, R.O.C.

Product Name	Drafft 11n Wireless 4-port Broadband Router
Brand Name	SMC
Model Name	SMCWBR14S-NL
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Jan. 23, 2009
Final Test Date	Feb. 13, 2009
Submission Type	Original Equipment



Statement

Test result included in this report is for the Drafft n and 802.11b/g part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes.....	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units	9
3.8. Table for Parameters of Test Software Setting	10
3.9. Test Configurations	11
4. TEST RESULT	13
4.1. AC Power Line Conducted Emissions Measurement.....	13
4.2. Maximum Conducted Output Power Measurement.....	17
4.3. Power Spectral Density Measurement	30
4.4. 6dB Spectrum Bandwidth Measurement	39
4.5. Radiated Emissions Measurement	48
4.6. Band Edge Emissions Measurement	78
4.7. Antenna Requirements	87
5. LIST OF MEASURING EQUIPMENTS	88
6. TEST LOCATION.....	90
7. TAF CERTIFICATE OF ACCREDITATION	91
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A11
APPENDIX B. TEST PHOTOS.....	B1 ~ B5
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~C3



History of This Test Report

Original Issue Date: Feb. 16, 2009

Report No.: FR912313

- No additional attachment.
- Additional attachment were issued as following record:

Attachment No.	Issue Date	Description



1. CERTIFICATE OF COMPLIANCE

Product Name : Draft 11n Wireless 4-port Broadband Router
Brand Name : SMC
Model Name : SMCWBR14S-NL
Applicant : Accton Technology Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 23, 2009 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink, appearing to read 'Wayne Hsu 2009.2.19', is written over a horizontal line.

Wayne Hsu

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	12.07 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	0.57 dB
4.3	15.247(e)	Power Spectral Density	Complies	12.54 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.94 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.03 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Draft n

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	Power Adapter
Modulation	see the below table for draft n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for Draft n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS8 (20MHz) : 17.52 MHz MCS8 (40MHz) : 35.92 MHz
Conducted Output Power	MCS8 (20MHz) : 29.43 dBm MCS8 (40MHz) : 25.40 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

802.11b/g

Items	Description
Product Type	802.11b/g :WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	Power Adapter
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 15.08 MHz ; 11g: 16.40 MHz
Conducted Output Power	11b: 24.19 dBm ; 11g: 25.46 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Single (TX)		Two (TX)	
	20 MHz	40 MHz	20 MHz	40 MHz
Band width Mode				
802.11b	V	X	X	X
802.11g	V	X	X	X
Draft n	X	X	V	V

Draft n spec

MCS Index	Nss	Modulation	R	NBPS	NCBPS		NDBPS		Datarate(Mbps)			
					20MHz	40MHz	20MHz	40MHz	800nsGI		400nsGI	
									20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

3.2. Accessories

Power	Brand	Model	Rating
Adapter	BesTec	EA0061WAA	Input:100-120VAC, 50/60Hz, 0.5A Output:12VDC, 0.5A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
A (0)	N/A	N/A	Printed Antenna	N/A	2	TX / RX Ant.
B (1)	N/A	N/A	Printed Antenna	N/A	2	TX / RX Ant.

Note: The EUT has two antennas (2TX, 2RX).

Connector 0: Ant. A


Connector 1: Ant. B

For 802.11b/g mode:

Only antenna A can be used as transmitting antenna and receiving antenna.

For Draft n mode:

Ant. A & Ant. B could transmit/receive simultaneously.

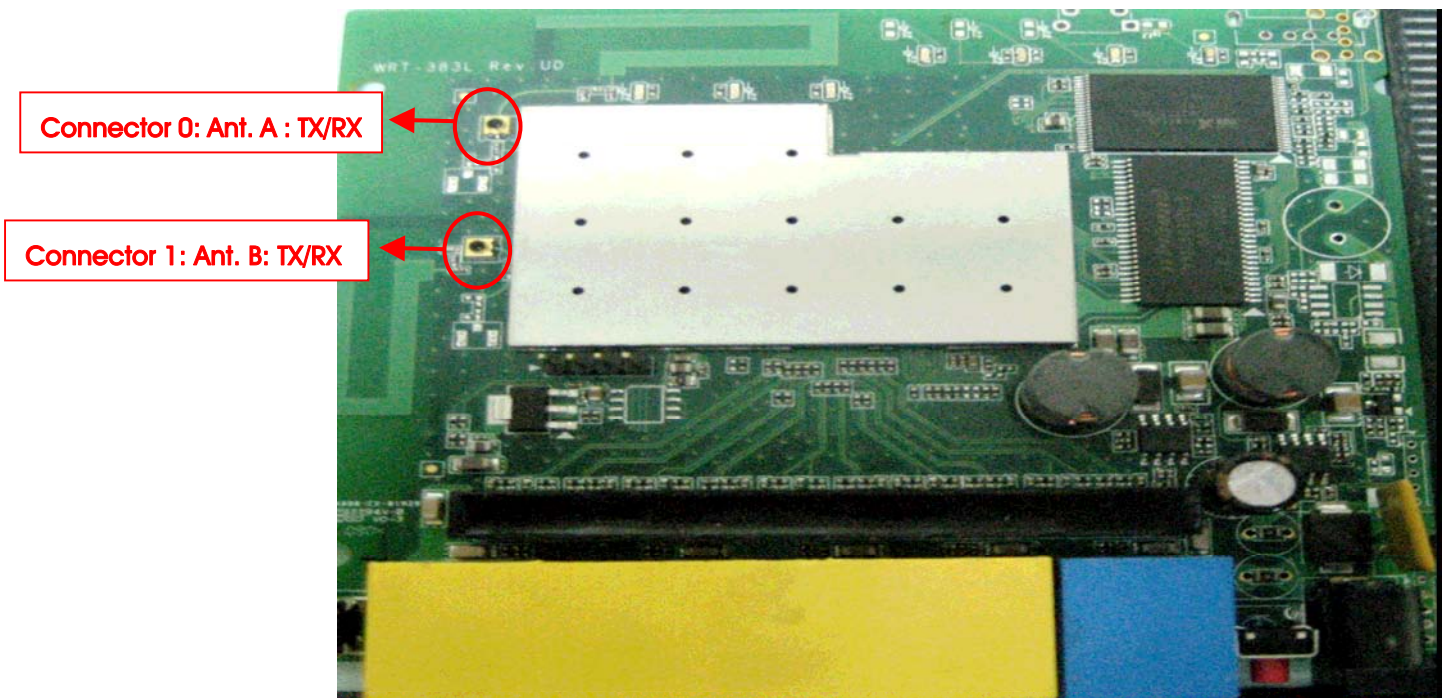

3.4. Table for Carrier Frequencies

There are two bandwidth systems for draft n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Peak Conducted Output Power	MCS8/20MHz	13 Mbps	1/6/11	A / B / A+B
	MCS8/40MHz	27 Mbps	3/6/9	A / B / A+B
	11b/BPSK	1 Mbps	1/6/11	A
	11g/BPSK	6 Mbps	1/6/11	A
Power Spectral Density 6dB Spectrum Bandwidth	MCS8/20MHz	13 Mbps	1/6/11	A+B
	MCS8/40MHz	27 Mbps	3/6/9	A+B
	11b/BPSK	1 Mbps	1/6/11	A
	11g/BPSK	6 Mbps	1/6/11	A
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	MCS8/20MHz	13 Mbps	1/6/11	A+B
	MCS8/40MHz	27 Mbps	3/6/9	A+B
	11b/BPSK	1 Mbps	1/6/11	A
	11g/BPSK	6 Mbps	1/6/11	A
Band Edge Emissions	MCS8/20MHz	13 Mbps	1/11	A+B
	MCS8/40MHz	27 Mbps	3/9	A+B
	11b/BPSK	1 Mbps	1/11	A
	11g/BPSK	6 Mbps	1/11	A

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D400	E2K24GBRL
Notebook	DELL	D400	E2K24GBRL
Notebook	DELL	M1330	E2KWM3945ABG
HUB	Laneed	LD-LSW16C/AT	N/A

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of Draft n MCS8 20MHz

Test Software Version	QA		
Frequency	2412 MHz	2437 MHz	2462 MHz
Draft n Ant. A	19	1F	1D
Draft n Ant. B	14	1F	18

Power Parameters of Draft n MCS8 40MHz

Test Software Version	QA		
Frequency	2422 MHz	2437 MHz	2452 MHz
Draft n Ant. A	16	14	19
Draft n Ant. B	11	0F	14

Power Parameters of IEEE 802.11b/g

Test Software Version	QA		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b Ant. A	11	1F	12
IEEE 802.11g Ant. A	1F	1F	1D


During the test, "Ping.exe" under WIN XP was executed to link with the remote workstation to receive and transmit signal by LAN and WLAN

At the same time, "QA" was executed the test program to control the EUT continuously transmit RF signal.


3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration


Test Configuration: 30KHz~1GHz

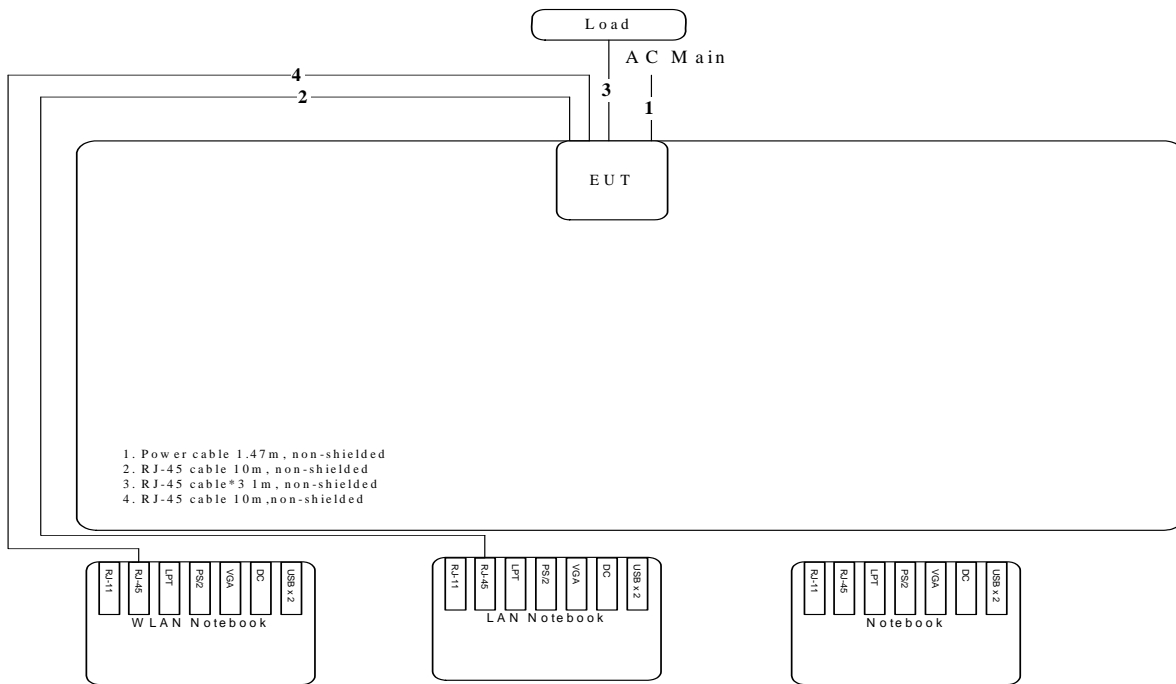

Test Configuration: above 1GHz

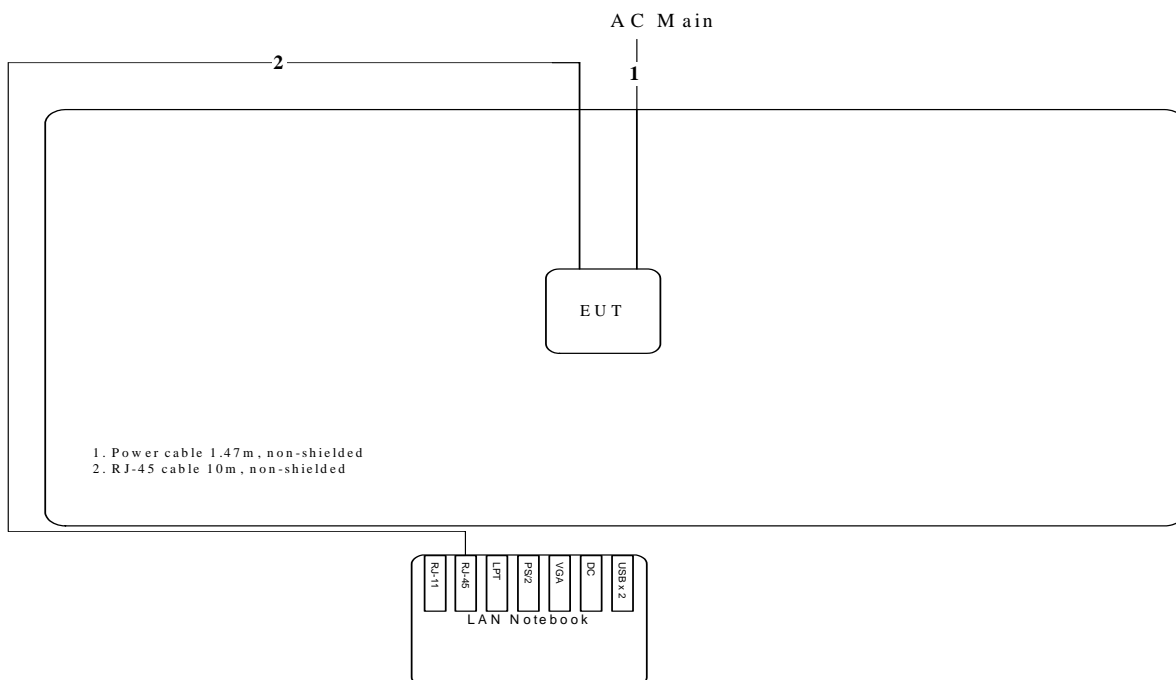

3.9.2. AC Power Line Conduction Emissions Test Configuration

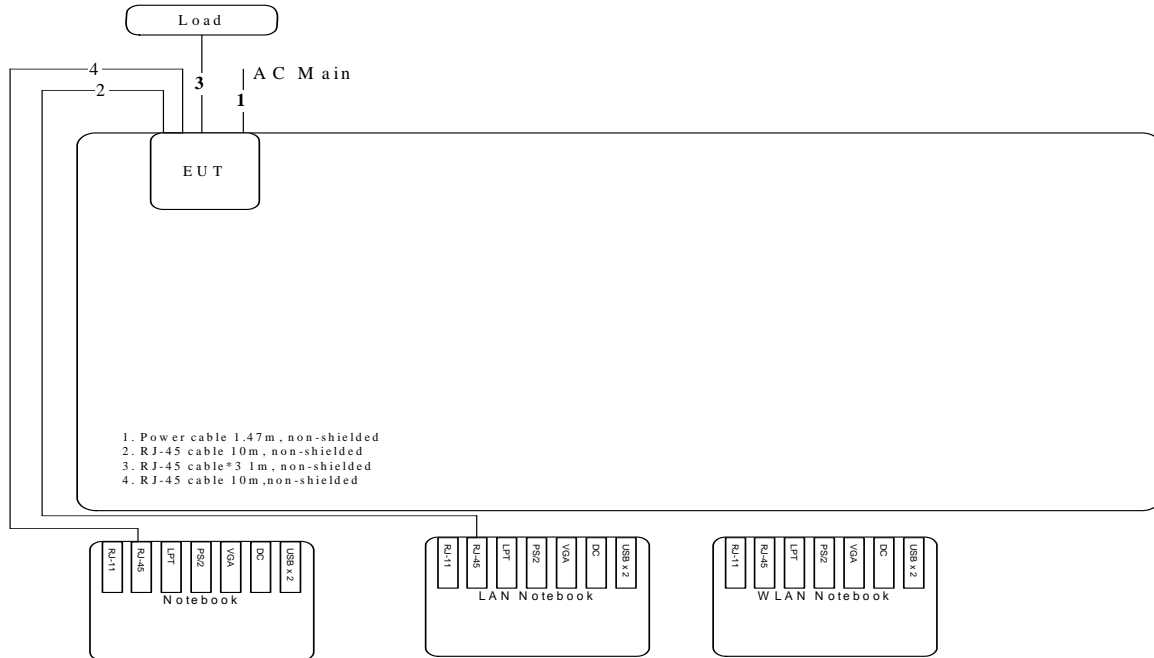

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

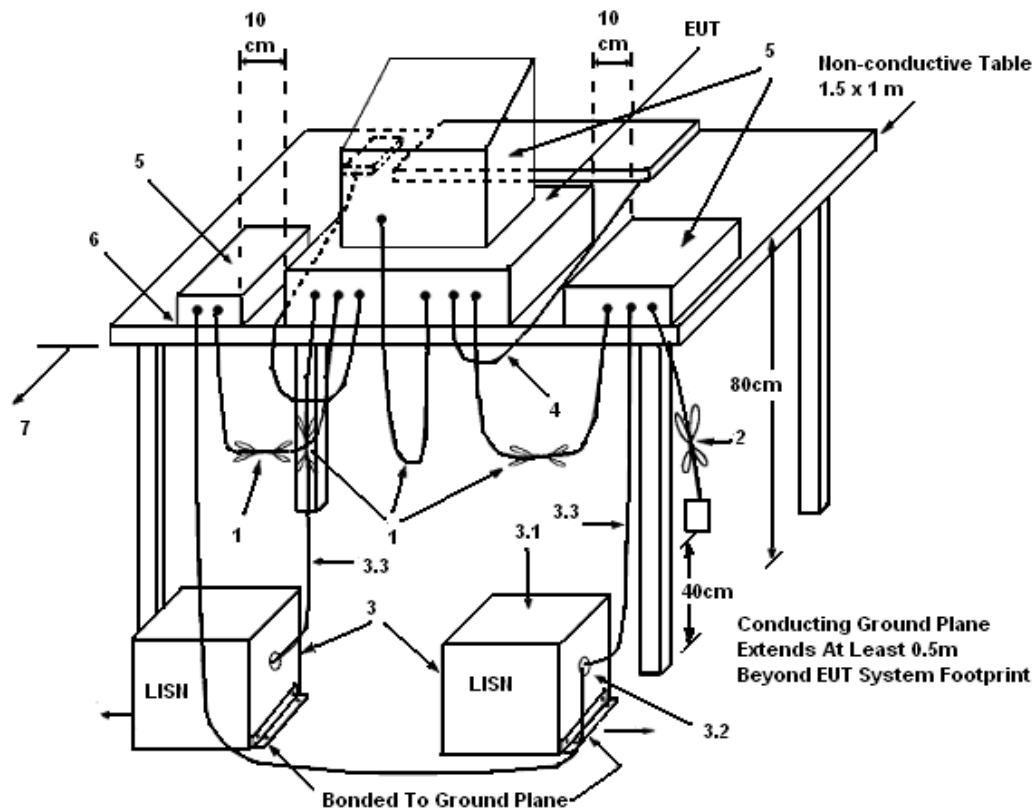

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	56.1%
Test Engineer	Howar Sung	Phase	Line
Configuration	Normal Link		

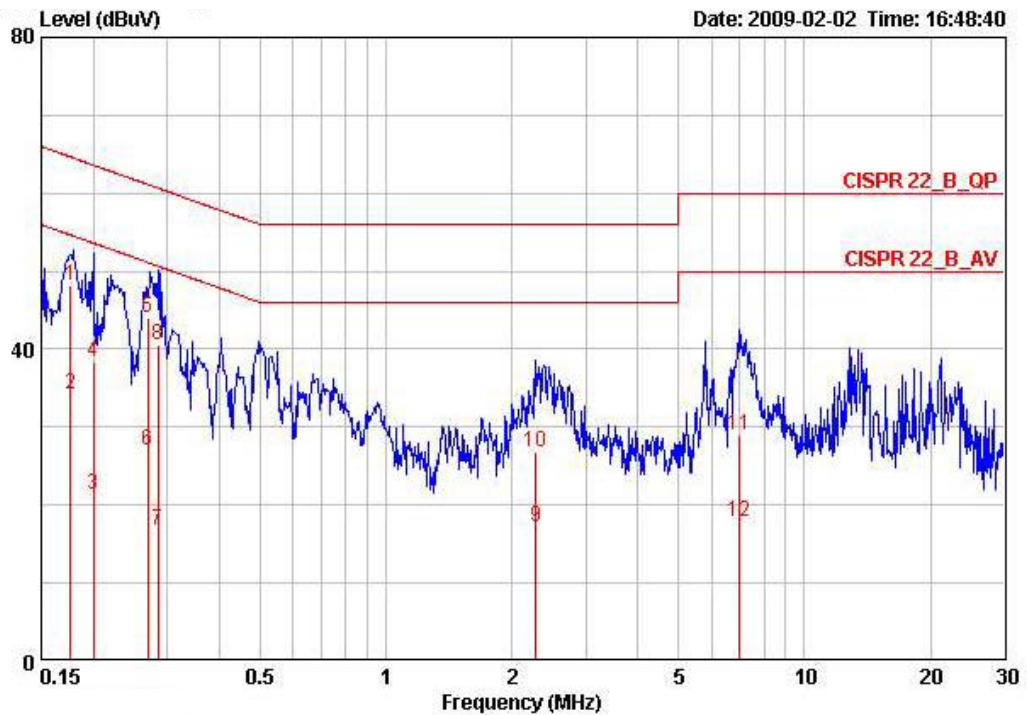

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17626	48.27	-16.39	64.66	48.01	0.06	0.20	QP
2	0.17626	34.17	-20.49	54.66	33.91	0.06	0.20	AVERAGE
3	0.19969	21.36	-32.26	53.62	21.11	0.05	0.20	AVERAGE
4	0.19969	38.34	-25.28	63.62	38.09	0.05	0.20	QP
5	0.26998	44.04	-17.08	61.12	43.80	0.04	0.20	QP
6	0.26998	27.06	-24.06	51.12	26.82	0.04	0.20	AVERAGE
7	0.28478	16.83	-33.85	50.68	16.59	0.04	0.20	AVERAGE
8	0.28478	40.63	-20.05	60.68	40.39	0.04	0.20	QP
9	2.285	17.27	-28.73	46.00	17.01	0.06	0.20	AVERAGE
10	2.285	26.75	-29.25	56.00	26.49	0.06	0.20	QP
11	6.951	29.07	-30.93	60.00	28.51	0.25	0.31	QP
12	6.951	17.88	-32.12	50.00	17.32	0.25	0.31	AVERAGE

Temperature	25°C	Humidity	56.1%
Test Engineer	Howar Sung	Phase	Neutral
Configuration	Normal Link		

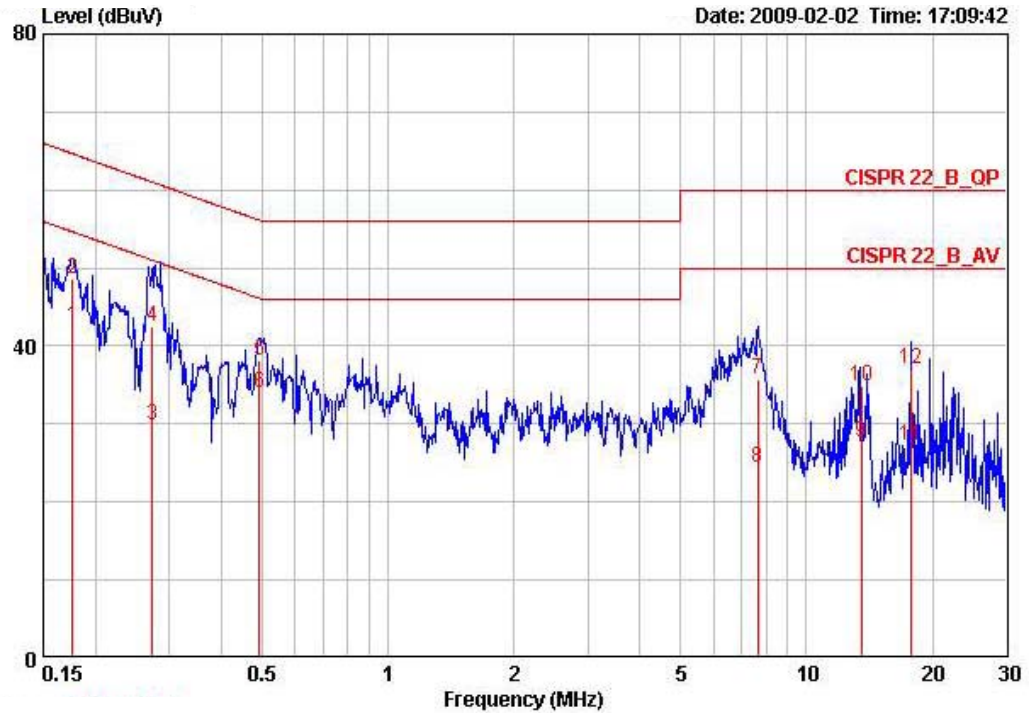

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17584	42.61	-12.07	54.68	42.32	0.09	0.20	AVERAGE
2	0.17584	48.54	-16.14	64.68	48.25	0.09	0.20	QP
3	0.27310	29.88	-21.15	51.02	29.60	0.08	0.20	AVERAGE
4	0.27310	42.47	-18.56	61.02	42.19	0.08	0.20	QP
5	0.49150	38.10	-18.05	56.14	37.90	0.07	0.13	QP
6	0.49150	33.95	-12.20	46.14	33.75	0.07	0.13	AVERAGE
7	7.646	35.83	-24.17	60.00	35.11	0.32	0.40	QP
8	7.646	24.51	-25.49	50.00	23.79	0.32	0.40	AVERAGE
9	13.506	27.67	-22.33	50.00	26.75	0.52	0.40	AVERAGE
10	13.506	34.88	-25.12	60.00	33.96	0.52	0.40	QP
11	17.694	27.31	-22.69	50.00	26.11	0.70	0.50	AVERAGE
12	17.694	37.12	-22.88	60.00	35.92	0.70	0.50	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	PEAK
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.2.4. Test Setup Layout

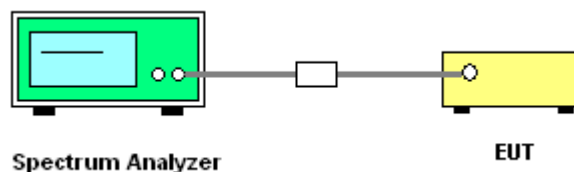

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	24°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	Draft n
Test Date	Feb. 13, 2009		

Configuration Draft n MCS8 20MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	22.24	30.00	Complies
6	2437 MHz	25.26	30.00	Complies
11	2462 MHz	24.43	30.00	Complies

Configuration Draft n MCS8 20MHz Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	21.62	30.00	Complies
6	2437 MHz	27.34	30.00	Complies
11	2462 MHz	25.14	30.00	Complies

Configuration Draft n MCS8 20MHz Ant. A + Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	24.95	30.00	Complies
6	2437 MHz	29.43	30.00	Complies
11	2462 MHz	27.81	30.00	Complies

Configuration Draft n MCS8 40MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	21.31	30.00	Complies
6	2437 MHz	20.30	30.00	Complies
9	2452 MHz	22.70	30.00	Complies

Configuration Draft n MCS8 40MHz Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	21.07	30.00	Complies
6	2437 MHz	19.95	30.00	Complies
9	2452 MHz	22.06	30.00	Complies

Configuration Draft n MCS8 40MHz Ant. A + Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	24.20	30.00	Complies
6	2437 MHz	23.14	30.00	Complies
9	2452 MHz	25.40	30.00	Complies

Temperature	24°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	802.11b/g
Test Date	Feb. 13, 2009		


Configuration IEEE 802.11b Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	18.47	30.00	Complies
6	2437 MHz	24.19	30.00	Complies
11	2462 MHz	18.89	30.00	Complies

Configuration IEEE 802.11g Ant. A


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	25.38	30.00	Complies
6	2437 MHz	25.46	30.00	Complies
11	2462 MHz	24.79	30.00	Complies

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. A / 2412 MHz

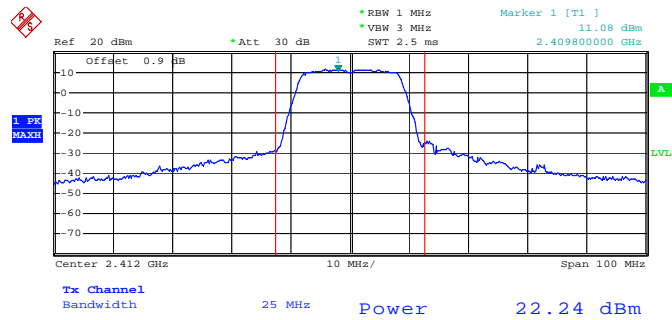


Date: 13.FEB.2009 21:15:49

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. A / 2437 MHz

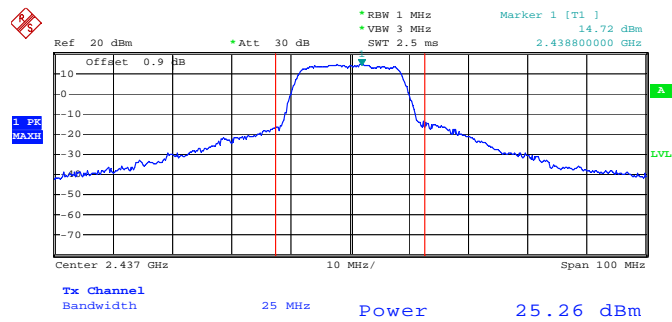


Date: 13.FEB.2009 21:19:21

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. A / 2462 MHz

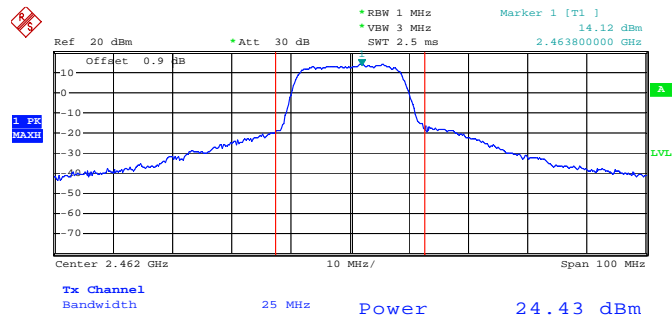


Date: 13.FEB.2009 21:23:19

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B / 2412 MHz

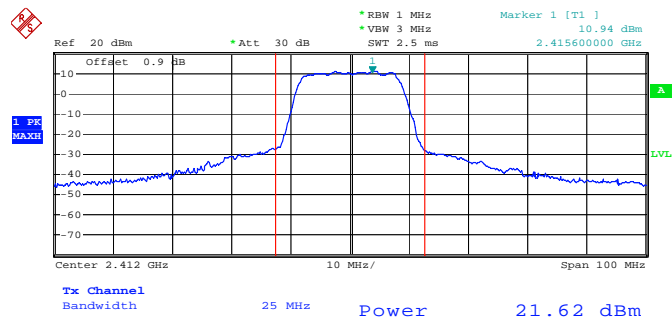


Date: 13.FEB.2009 21:16:27

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B / 2437 MHz

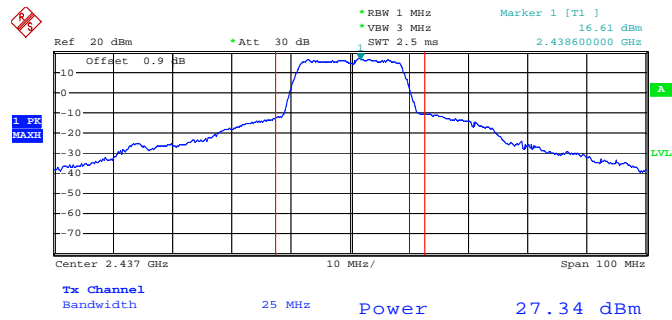


Date: 13.FEB.2009 21:20:09

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B / 2462 MHz

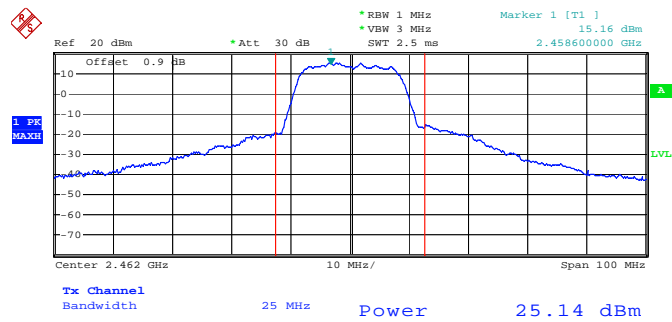


Date: 13.FEB.2009 21:22:42

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. A / 2422 MHz

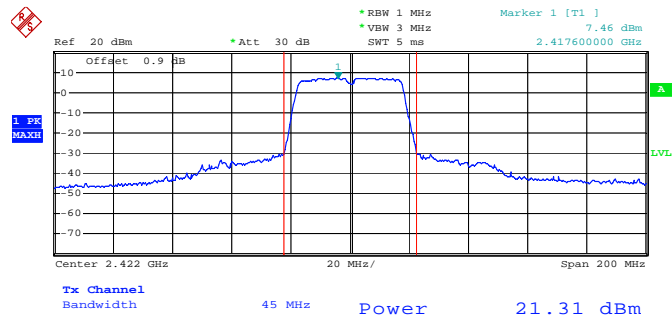


Date: 13.FEB.2009 21:26:38

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. A / 2437 MHz

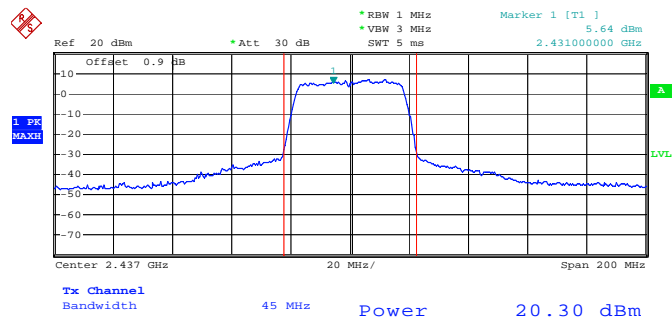


Date: 13.FEB.2009 21:29:03

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. A / 2452 MHz

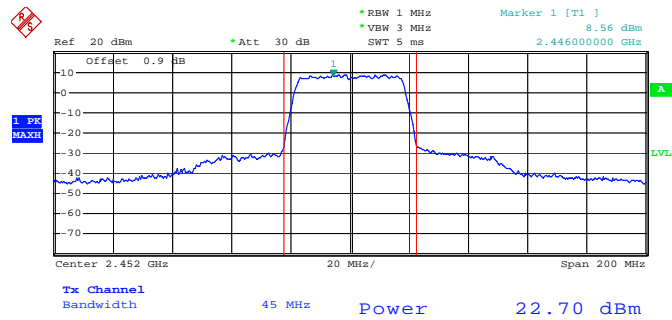


Date: 13.FEB.2009 21:35:04

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B / 2422 MHz

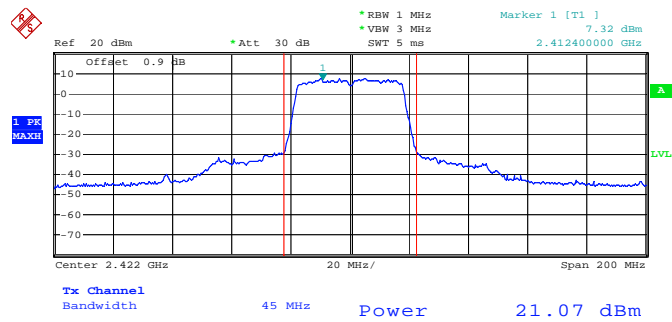


Date: 13.FEB.2009 21:27:50

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B / 2437 MHz

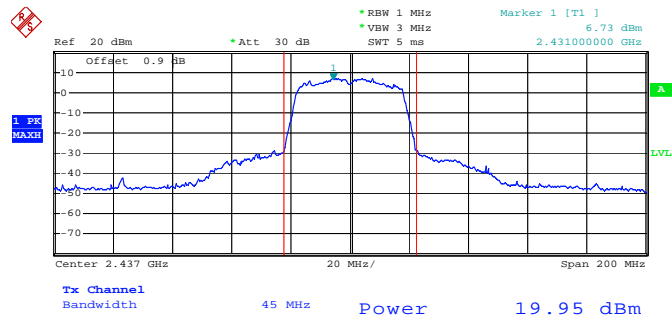


Date: 13.FEB.2009 21:28:41

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B / 2452 MHz

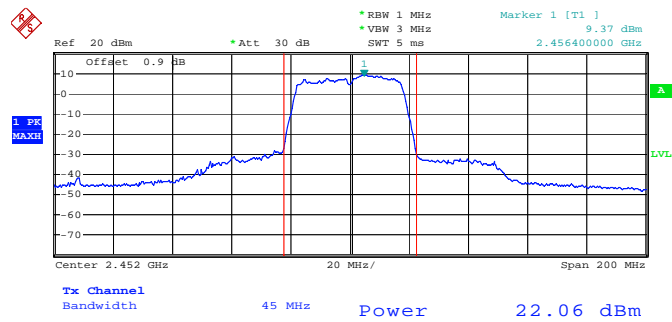


Date: 13.FEB.2009 21:35:28

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. A / 2412 MHz

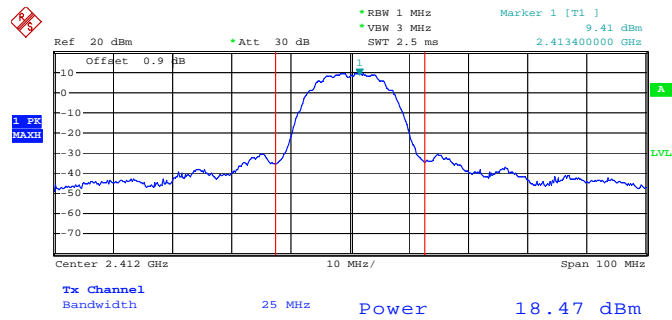


Date: 13.FEB.2009 21:06:07

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. A / 2437 MHz

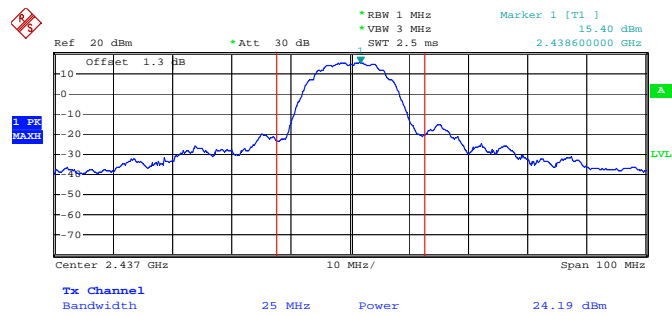


Date: 6.FEB.2009 18:09:29

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. A / 2437 MHz

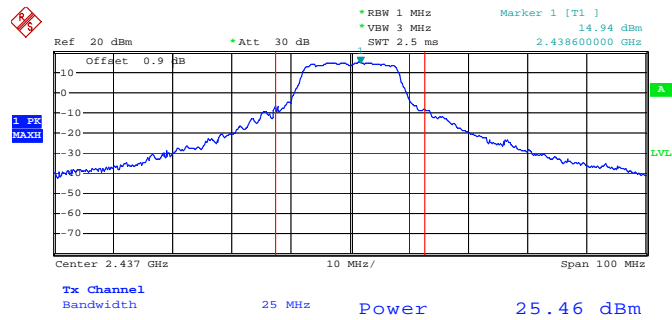

Date: 13.FEB.2009 21:10:37

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. A / 2462 MHz

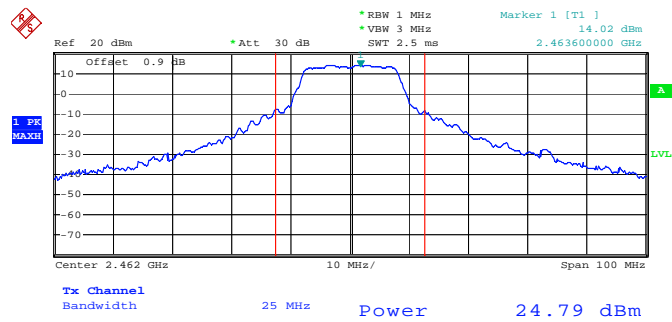

Date: 13.FEB.2009 21:11:19

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500S

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Measuring multiple antennas, the connector is required to link with spectrum analyser through a combiner.

4.3.4. Test Setup Layout

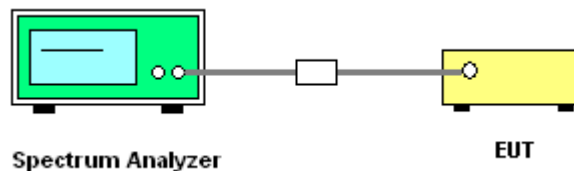

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	24°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	Draft n
Test Date	Feb. 13, 2009		

Configuration Draft n MCS8 20MHz Ant. A + Ant. B

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
1	2412 MHz	-4.54	8.00	Complies
6	2437 MHz	-7.09	8.00	Complies
11	2462 MHz	-4.62	8.00	Complies

Configuration Draft n MCS8 40MHz Ant. A + Ant. B

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
3	2422 MHz	-14.34	8.00	Complies
6	2437 MHz	-14.86	8.00	Complies
9	2452 MHz	-12.07	8.00	Complies

Temperature	24°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	802.11b/g
Test Date	Feb. 13, 2009		


Configuration IEEE 802.11b Ant. A

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
1	2412 MHz	-13.03	8.00	Complies
6	2437 MHz	-11.58	8.00	Complies
11	2462 MHz	-12.30	8.00	Complies

Configuration IEEE 802.11g Ant. A


Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
1	2412 MHz	-7.27	8.00	Complies
6	2437 MHz	-13.14	8.00	Complies
11	2462 MHz	-7.25	8.00	Complies

Power Density Plot on Configuration Drafft n MCS8 20MHz Ant. A + Ant. B / 2412 MHz

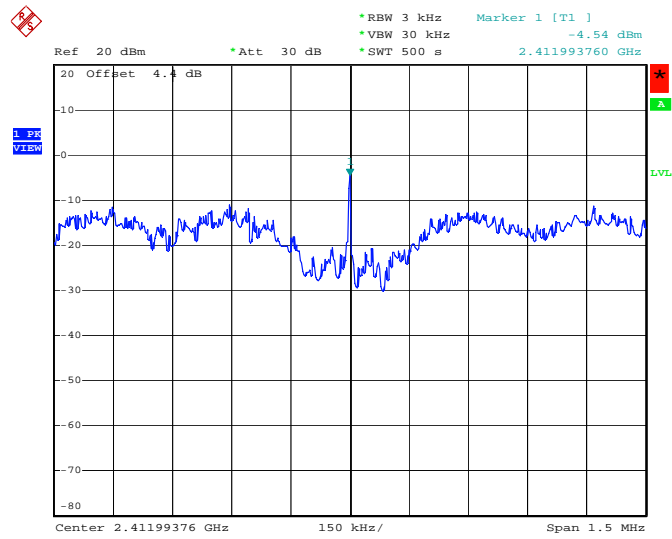


Date: 13.FEB.2009 22:09:37

Power Density Plot on Configuration Drafft n MCS8 20MHz Ant. A + Ant. B / 2437 MHz

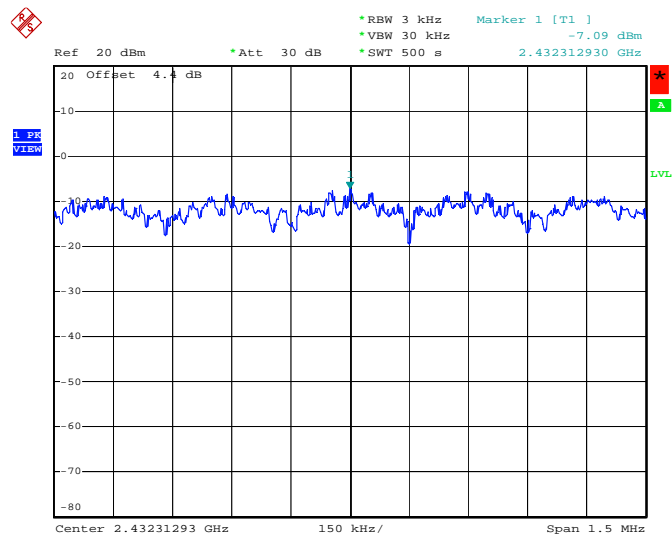


Date: 13.FEB.2009 22:13:24

Power Density Plot on Configuration Draft n MCS8 20MHz Ant. A + Ant. B / 2462 MHz

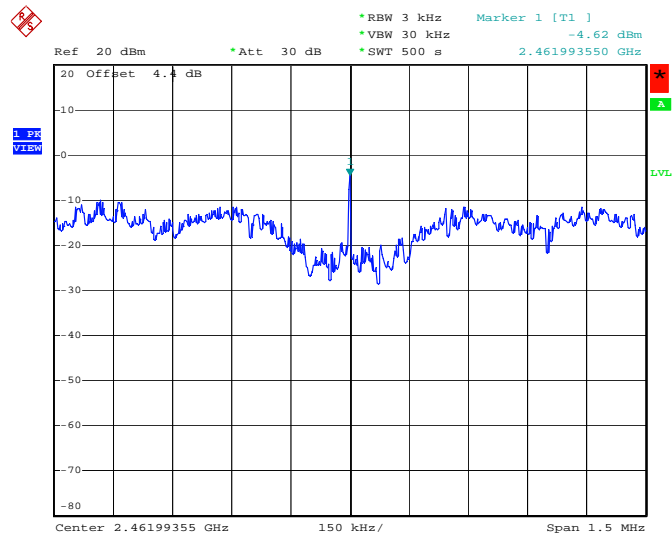


Date: 13.FEB.2009 22:15:32

Power Density Plot on Configuration Draft n MCS8 40MHz Ant. A + Ant. B / 2422 MHz

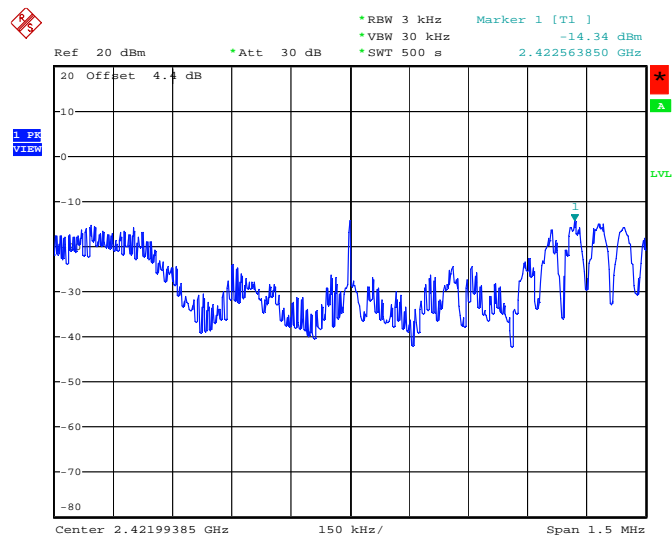


Date: 13.FEB.2009 22:17:22

Power Density Plot on Configuration Drafft n MCS8 40MHz Ant. A + Ant. B / 2437 MHz

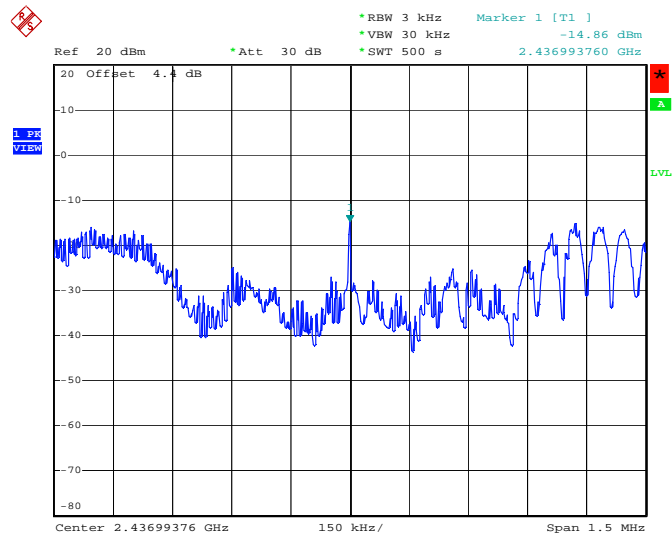


Date: 13.FEB.2009 22:19:47

Power Density Plot on Configuration Drafft n MCS8 40MHz Ant. A + Ant. B / 2452 MHz

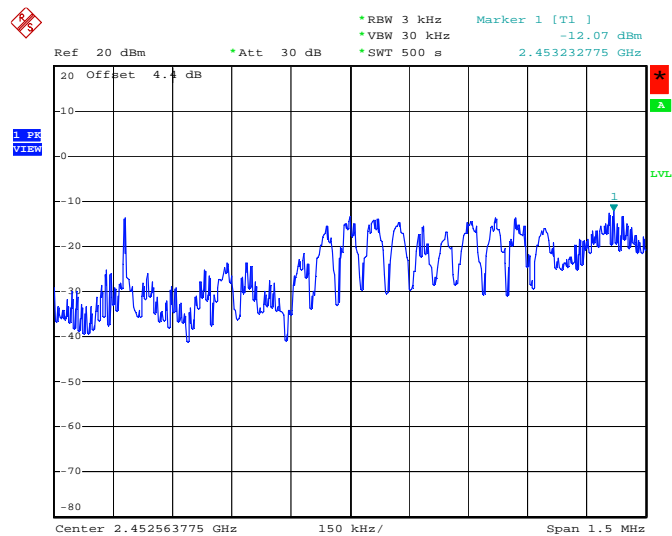


Date: 13.FEB.2009 22:21:12

Power Density Plot on Configuration IEEE 802.11b Ant. A / 2412 MHz

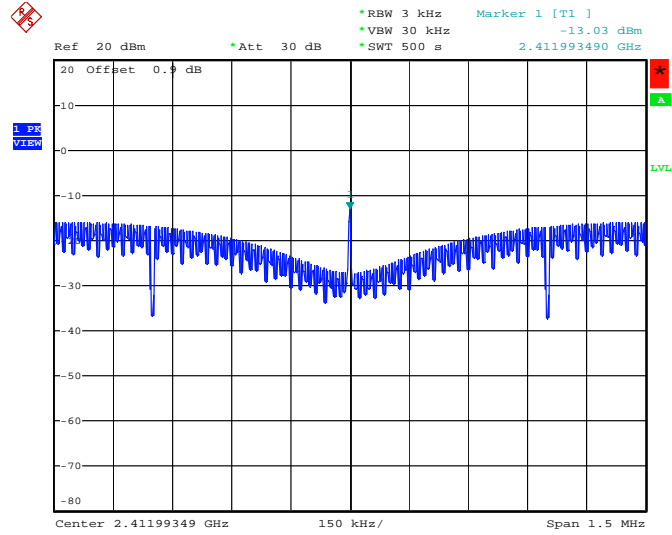


Date: 13.FEB.2009 21:45:06

Power Density Plot on Configuration IEEE 802.11b Ant. A / 2437 MHz

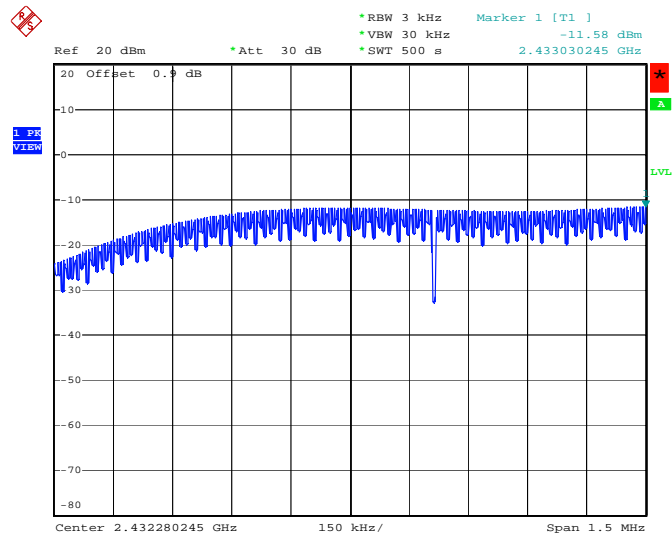


Date: 13.FEB.2009 21:47:40

Power Density Plot on Configuration IEEE 802.11b Ant. A / 2462 MHz

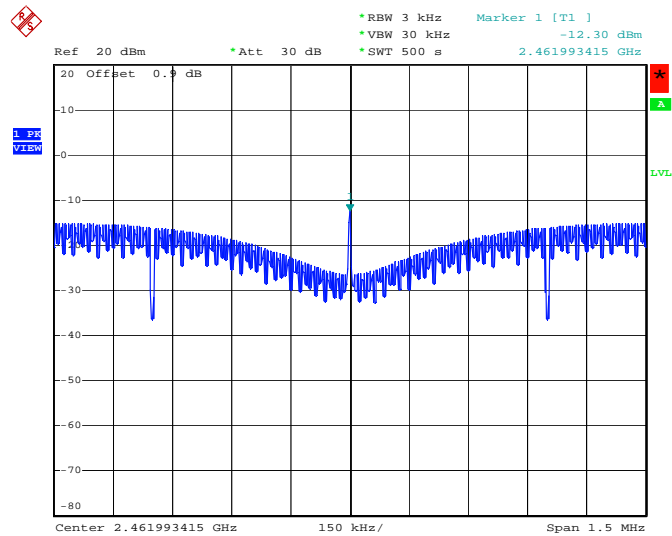

Date: 13.FEB.2009 21:49:01

Power Density Plot on Configuration IEEE 802.11g Ant. A / 2412 MHz

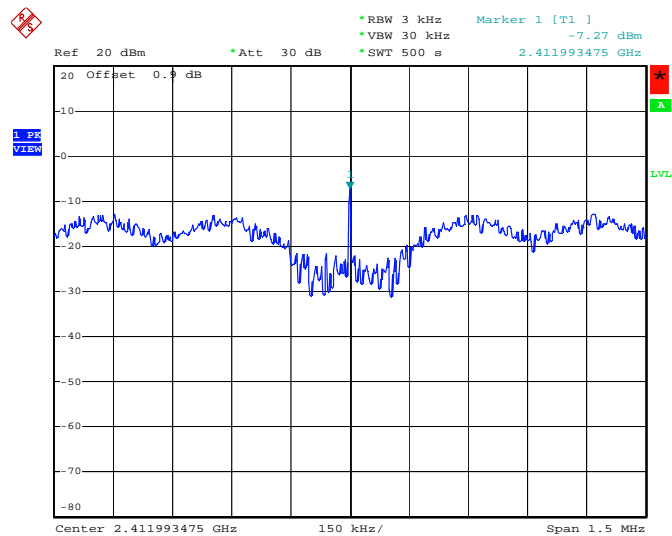

Date: 13.FEB.2009 21:54:42