



FCC TEST REPORT (15.247)

REPORT NO.: RF940609L03
MODEL NO.: TA1 (with Intel WM3B2915ABG)
RECEIVED: Jun. 27, 2005
TESTED: Jun. 16 ~ Jun. 22, 2005
ISSUED: Jun. 27, 2005

APPLICANT: QUANTA COMPUTER INC.

ADDRESS: 7F, 116, Hou Kang St., Shih Lin, Taipei,
Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 109 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



No. 2177-01



Table of Contents

1.	CERTIFICATION	5
2.	SUMMARY OF TEST RESULTS	6
2.1	MEASUREMENT UNCERTAINTY	6
3.	GENERAL INFORMATION.....	7
3.1	GENERAL DESCRIPTION OF EUT.....	7
3.2	DESCRIPTION OF TEST MODES.....	9
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	10
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:.....	11
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	13
3.4	DESCRIPTION OF SUPPORT UNITS	13
4.	TEST TYPES AND RESULTS (802.11b & g 2412~2462MHz BAND)	13
4.1	CONDUCTED EMISSION MEASUREMENT	14
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	14
4.1.2	TEST INSTRUMENTS.....	14
4.1.3	TEST PROCEDURES	15
4.1.4	DEVIATION FROM TEST STANDARD	15
4.1.5	TEST SETUP	16
4.1.6	EUT OPERATING CONDITIONS	16
4.1.7	TEST RESULTS	17
4.2	RADIATED EMISSION MEASUREMENT	29
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	29
4.2.2	TEST INSTRUMENTS.....	30
4.2.3	TEST PROCEDURES	31
4.2.4	DEVIATION FROM TEST STANDARD	31
4.2.5	TEST SETUP	32
4.2.6	EUT OPERATING CONDITIONS	32
4.2.7	TEST RESULTS	33
4.3	6dB BANDWIDTH MEASUREMENT	41
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	41
4.3.2	TEST INSTRUMENTS.....	41
4.3.3	TEST PROCEDURE.....	42
4.3.4	DEVIATION FROM TEST STANDARD	42
4.3.5	TEST SETUP	42
4.3.6	EUT OPERATING CONDITIONS	42
4.3.7	TEST RESULTS	43
4.4	MAXIMUM PEAK OUTPUT POWER	49
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	49
4.4.2	INSTRUMENTS.....	49
4.4.1	TEST PROCEDURES	50
4.4.2	DEVIATION FROM TEST STANDARD	50
4.4.3	TEST SETUP	50
4.4.4	EUT OPERATING CONDITIONS	50
4.4.3	TEST RESULTS	51
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	52
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	52
4.5.2	TEST INSTRUMENTS.....	52
4.5.3	TEST PROCEDURE.....	53



4.5.4	DEVIATION FROM TEST STANDARD	53
4.5.5	TEST SETUP	53
4.5.6	EUT OPERATING CONDITION	53
4.5.7	TEST RESULTS	54
4.6	BAND EDGES MEASUREMENT	60
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	60
4.6.2	TEST INSTRUMENTS.....	60
4.6.3	TEST PROCEDURE.....	60
4.6.4	DEVIATION FROM TEST STANDARD	60
4.6.5	EUT OPERATING CONDITION	60
4.6.6	TEST RESULTS	61
4.7	ANTENNA REQUIREMENT	69
4.7.1	STANDARD APPLICABLE	69
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	69
5.	TEST TYPES AND RESULTS (802.11a 5725~5850MHz BAND)	70
5.1	CONDUCTED EMISSION MEASUREMENT	70
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	70
5.1.2	TEST INSTRUMENTS.....	70
5.1.3	TEST PROCEDURES	71
5.1.4	DEVIATION FROM TEST STANDARD	71
5.1.5	TEST SETUP	72
5.1.6	EUT OPERATING CONDITIONS	72
5.1.7	TEST RESULTS	73
5.2	RADIATED EMISSION MEASUREMENT	77
5.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	77
5.2.2	TEST INSTRUMENTS.....	78
5.2.3	TEST PROCEDURES	79
5.2.4	DEVIATION FROM TEST STANDARD	79
5.2.5	TEST SETUP	80
5.2.6	EUT OPERATING CONDITIONS	80
5.2.7	TEST RESULTS	81
5.3	6dB BANDWIDTH MEASUREMENT	86
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	86
5.3.2	TEST INSTRUMENTS.....	86
5.3.3	TEST PROCEDURE.....	87
5.3.4	DEVIATION FROM TEST STANDARD	87
5.3.5	TEST SETUP	87
5.3.6	EUT OPERATING CONDITIONS	87
5.3.7	TEST RESULTS	88
5.4	MAXIMUM PEAK OUTPUT POWER	91
5.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	91
5.4.2	INSTRUMENTS.....	91
5.4.3	TEST PROCEDURES	92
5.4.4	DEVIATION FROM TEST STANDARD	92
5.4.5	TEST SETUP	92
5.4.6	EUT OPERATING CONDITIONS	92
5.4.7	TEST RESULTS	93
5.5	POWER SPECTRAL DENSITY MEASUREMENT.....	94
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	94
5.5.2	TEST INSTRUMENTS.....	94



5.5.3	TEST PROCEDURE.....	95
5.5.4	DEVIATION FROM TEST STANDARD	95
5.5.5	TEST SETUP	95
5.5.6	EUT OPERATING CONDITION	95
5.5.7	TEST RESULTS	96
5.6	BAND EDGES MEASUREMENT	99
5.6.1	LIMITS OF BAND EDGES MEASUREMENT	99
5.6.2	TEST INSTRUMENTS.....	99
5.6.3	TEST PROCEDURE.....	99
5.6.4	DEVIATION FROM TEST STANDARD	99
5.6.5	EUT OPERATING CONDITION	100
5.6.6	TEST RESULTS	100
5.7	ANTENNA REQUIREMENT	104
5.7.1	STANDARD APPLICABLE	104
5.7.2	ANTENNA CONNECTED CONSTRUCTION.....	104
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	105
7.	INFORMATION ON THE TESTING LABORATORIES	109



1. CERTIFICATION

PRODUCT: notebook computer
BRAND NAME: Gateway
MODEL NO.: TA1 (with Intel WM3B2915ABG)
APPLICANT: QUANTA COMPUTER INC.
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: Jun. 16 ~ Jun. 22, 2005
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia, **DATE:** Jun. 27, 2005
(Andrea Hsia)

TECHNICAL
ACCEPTANCE : Gary Chang, **DATE:** Jun. 27, 2005
Responsible for RF
(Gary Chang)

APPROVED BY : Cody Chang, **DATE:** Jun. 27, 2005
(Cody Chang, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.51dB at 0.201MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -3.08dB at 188.43MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.73 dB
	200MHz ~1000MHz	3.74 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	notebook computer
MODEL NO.	TA1 (with Intel WM3B2915ABG)
POWER SUPPLY	19Vdc from AC adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11a: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	802.11b & 802.11g: 2.412 ~ 2.462GHz 802.11a: 5.150 ~ 5.350GHz and 5.725 ~ 5.850GHz
NUMBER OF CHANNEL	802.11b & 802.11g: 11 802.11a: 13
CHANNEL SPACING	802.11b & 802.11g: 5MHz 802.11a: 20MHz
OUTPUT POWER	51.286mW for 802.11b 32.211mW for 802.11g 41.020mW for 5.150 ~ 5.350GHz 31.769mW for 5.725 ~ 5.850GHz
ANTENNA TYPE	Refer to Note 2 as below
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT were tested with the following adapters:

BRAND	LITEON
MODEL	PA-1900-03
INPUT	100-240Vac, 50-60Hz, 1.6A
OUTPUT	19Vdc, 4.74A
POWER LINE	AC 1.8m non-shielded cable without core DC 1.8m non-shielded cable with one core

BRAND	LITEON
MODEL	PA-1650-01
INPUT	100-240Vac, 50-60Hz, 1.6A
OUTPUT	19Vdc, 3.42A
POWER LINE	AC 1.8m non-shielded cable without core DC 1.8m non-shielded cable with one core



2. The following antennas were provided to this EUT.

Antenna Type	P/N	Brand	Connector	Gain (dBi) 2.4GHz	5.0GHz	
					Frequency	Gain (dBi)
PIFA (Main Antenna)	WDAN- GQTA1001	HON HAI	SGX	2.15	4500 ~ 5350 MHz	1.90
					5470 ~ 5785 MHz	1.26
PIFA (Aux. Antenna)	WDAN- GQTA1001	HON HAI	SGX	1.95	4500 ~ 5350 MHz	0.65
					5470 ~ 5785 MHz	1.09

* We have tested for each type of antennas and chosen the highest gain of each type for worst case and presented in following section.

3. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.
4. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
5. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g: Eleven channels are provided to this EUT.


Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

Operated in 5725 ~ 5850MHz band:

For 802.11a: Five channels are provided to this EUT.

Channel	Frequency
1	5745 MHz
2	5765 MHz
3	5785 MHz
4	5805 MHz
5	5825 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

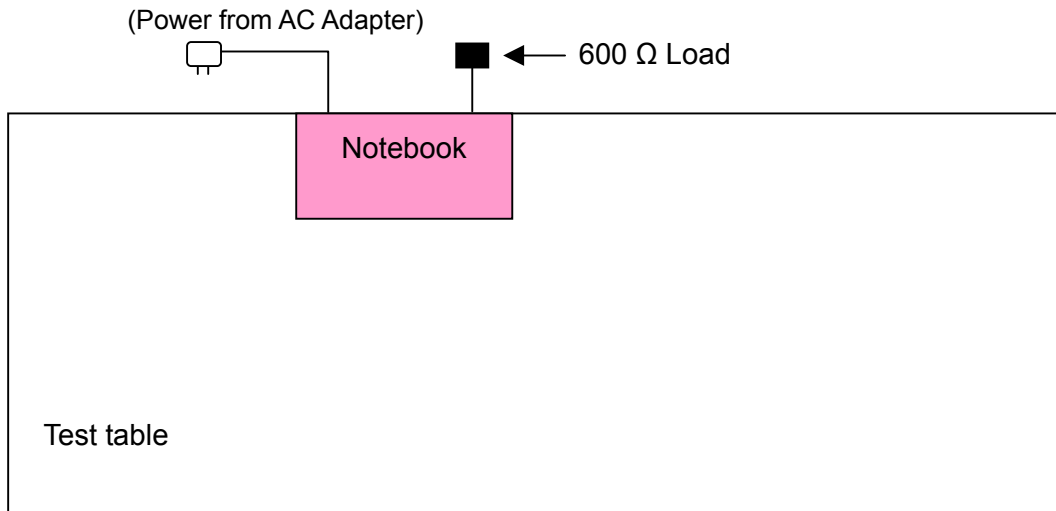



3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
1	√	√	Note1	Note 2	Power from AC Adapter (PA-1900-03)
2	√	√	Note1	Note 2	Power from AC Adapter (PA-1650-01)

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz
 RE≥1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement
 Note 1: No effect on Radiated Emission above 1GHz.
 Note 2: No effect on Conducted RF measurement.

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
1	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
2	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
1	802.11a	1 to 5	3	OFDM	BPSK	6
2	802.11a	1 to 5	3	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
1	802.11g	1 to 11	11	OFDM	BPSK	6
2	802.11g	1 to 11	11	OFDM	BPSK	6
1	802.11a	1 to 5	3	OFDM	BPSK	6
2	802.11a	1 to 5	3	OFDM	BPSK	6

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
1	802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
1	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
1	802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6



Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6
802.11a	1 to 5	1, 5	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a notebook computer. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	600 Ω LOAD	NA	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE: All power cords of the above support units are non shielded (1.8m).



4. TEST TYPES AND RESULTS (802.11b & g 2412~2462MHz Band)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 06, 2005
RF signal cable Woken	5D-FB	Cable-HyC02-01	Jan. 09, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 20, 2006
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 20, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 3.
 3. The VCCI Site Registration No. is C-2047.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

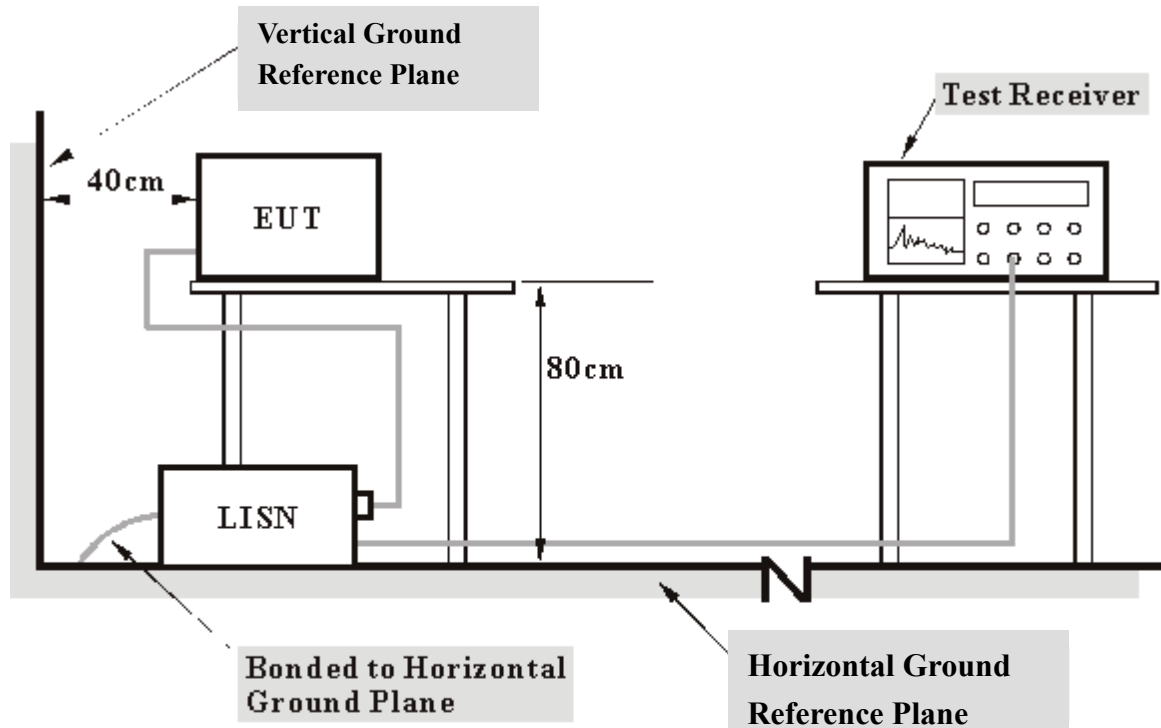

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on a testing table.
- b. The EUT ran a test program (provided by manufacturer) to enable all functions under transmission/receiving condition continuously at specific channel frequency.
- c. The notebook system sent "H" messages to its screen.
- d. Step c was repeated.




4.1.7 TEST RESULTS

Conducted Worst-Case Data (Power from AC Adapter: PA-1900-03)

EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.166	0.10	45.94	20.98	46.04	21.08	65.18
2	0.213	0.10	40.17	-	40.27	-	63.11	53.11	-22.84	-
3	0.529	0.12	34.32	-	34.44	-	56.00	46.00	-21.56	-
4	0.978	0.20	23.84	-	24.04	-	56.00	46.00	-31.96	-
5	1.781	0.20	24.77	-	24.97	-	56.00	46.00	-31.03	-
6	5.313	0.22	22.11	-	22.33	-	60.00	50.00	-37.67	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

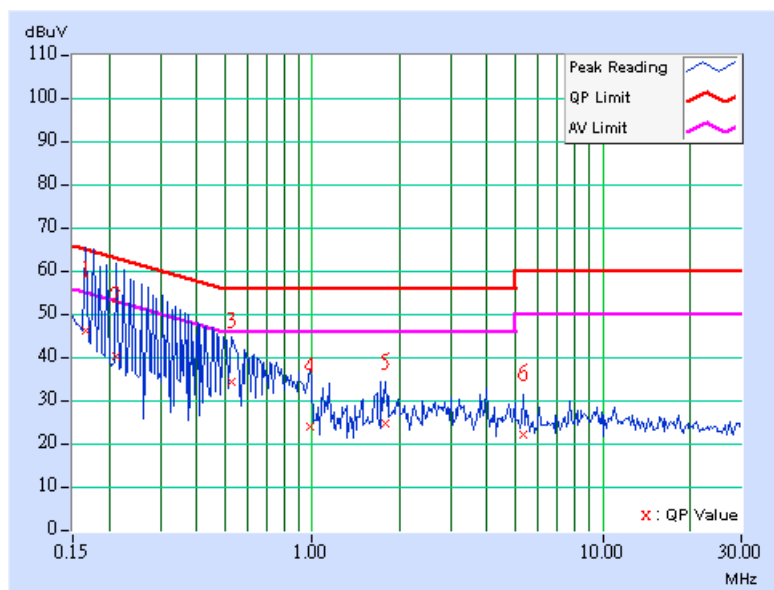




EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.162	0.10	46.24	20.07	46.34	20.17	65.38
2	0.193	0.10	42.45	-	42.55	-	63.91	53.91	-21.36	-
3	0.494	0.12	30.13	-	30.25	-	56.10	46.10	-25.86	-
4	0.978	0.20	24.83	-	25.03	-	56.00	46.00	-30.97	-
5	3.668	0.20	17.75	-	17.95	-	56.00	46.00	-38.05	-
6	6.387	0.28	17.70	-	17.98	-	60.00	50.00	-42.02	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

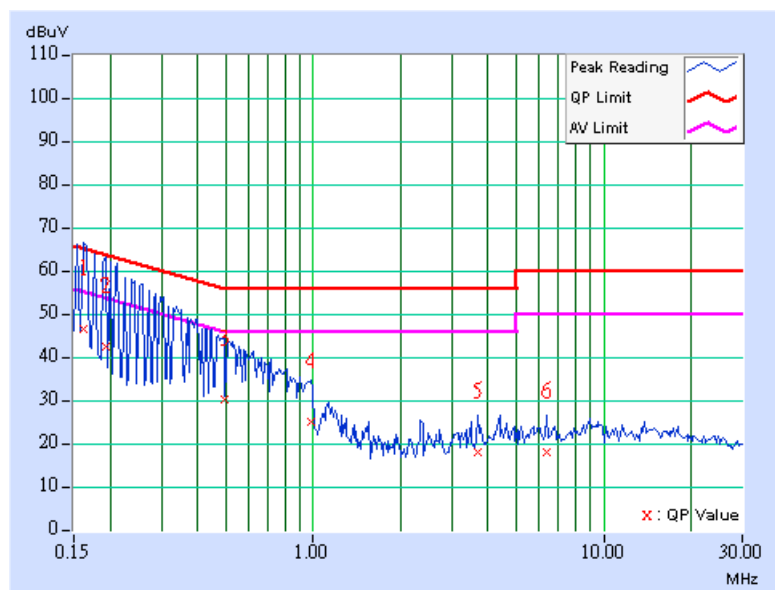




EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	0.10	48.41	21.27	48.51	21.37	66.00
2	0.189	0.10	42.88	-	42.98	-	64.08	54.08	-21.10	-
3	0.564	0.13	25.76	-	25.89	-	56.00	46.00	-30.11	-
4	1.473	0.20	25.07	-	25.27	-	56.00	46.00	-30.73	-
5	1.867	0.20	24.54	-	24.74	-	56.00	46.00	-31.26	-
6	8.461	0.27	24.16	-	24.43	-	60.00	50.00	-35.57	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

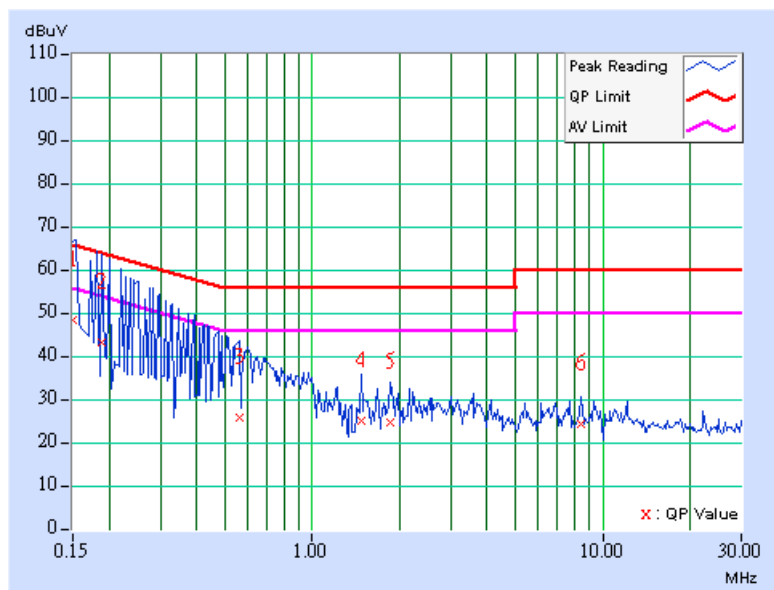




EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.154	0.10	47.41	21.39	47.51	21.49	65.79
2	0.197	0.10	41.43	-	41.53	-	63.74	53.74	-22.21	-
3	0.548	0.12	27.48	-	27.60	-	56.00	46.00	-28.40	-
4	0.994	0.20	25.69	-	25.89	-	56.00	46.00	-30.11	-
5	3.418	0.20	16.96	-	17.16	-	56.00	46.00	-38.84	-
6	5.441	0.25	17.73	-	17.98	-	60.00	50.00	-42.02	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

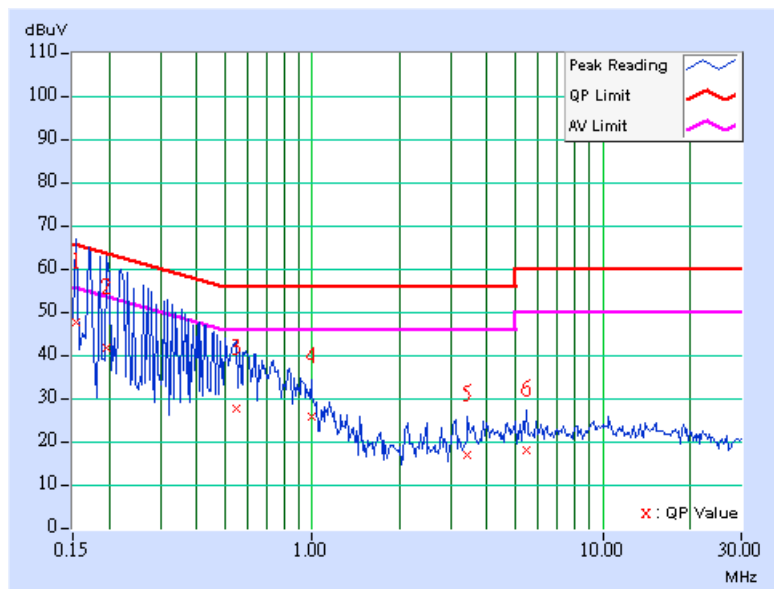




EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.158	0.10	46.93	22.38	47.03	22.48	65.58
2	0.220	0.10	39.54	-	39.64	-	62.81	52.81	-23.17	-
3	0.263	0.10	37.16	-	37.26	-	61.33	51.33	-24.07	-
4	0.500	0.12	29.52	-	29.64	-	56.00	46.00	-26.36	-
5	2.246	0.20	24.33	-	24.53	-	56.00	46.00	-31.47	-
6	7.910	0.27	22.44	-	22.71	-	60.00	50.00	-37.29	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

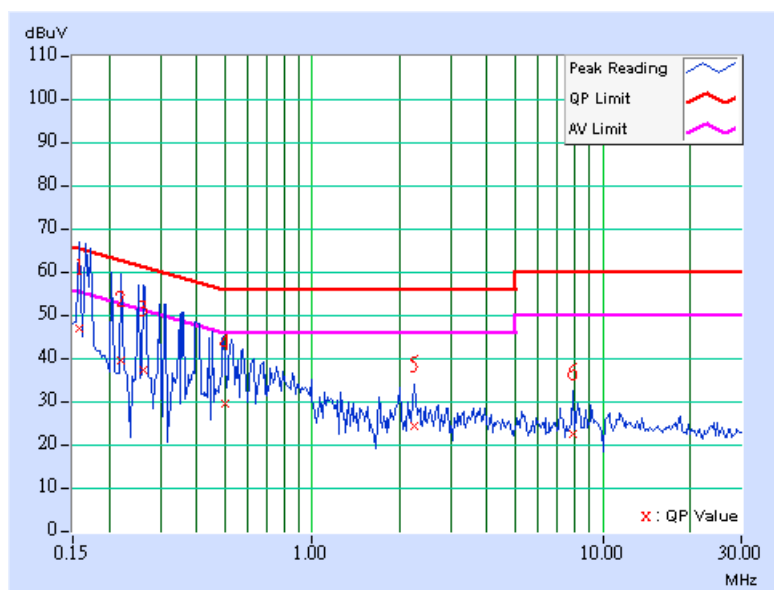




EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.170	0.10	44.56	-	44.66	-	64.98
2	0.205	0.10	41.68	-	41.78	-	63.42	53.42	-21.64	-
3	0.500	0.12	30.54	-	30.66	-	56.00	46.00	-25.34	-
4	1.133	0.20	29.05	-	29.25	-	56.00	46.00	-26.75	-
5	3.270	0.20	17.23	-	17.43	-	56.00	46.00	-38.57	-
6	9.645	0.39	19.53	-	19.92	-	60.00	50.00	-40.08	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

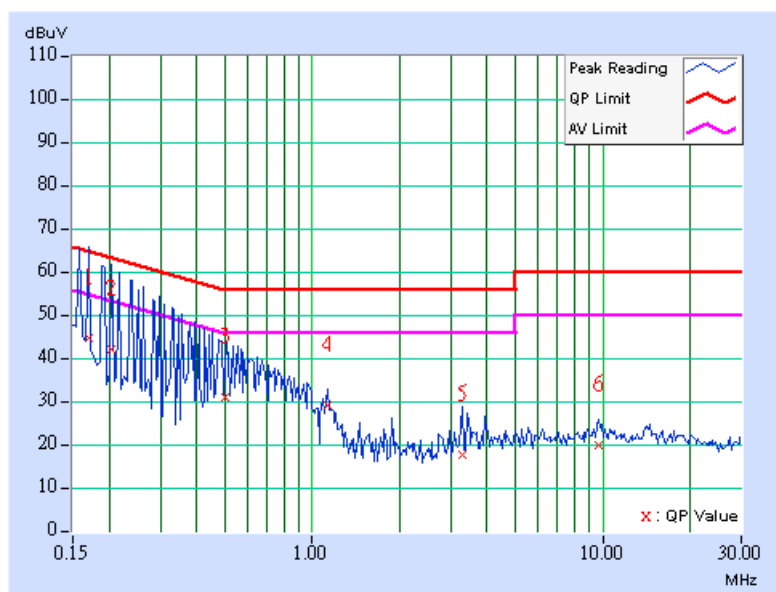




Conducted Worst-Case Data (Power from AC Adapter: PA-1650-01)

EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.199	0.10	47.80	38.40	47.90	38.50	63.66
2	0.267	0.10	40.87	-	40.97	-	61.20	51.20	-20.23	-
3	0.334	0.10	35.95	-	36.05	-	59.36	49.36	-23.31	-
4	1.262	0.20	29.60	-	29.80	-	56.00	46.00	-26.20	-
5	4.516	0.21	29.80	-	30.01	-	56.00	46.00	-25.99	-
6	19.132	0.73	32.45	-	33.18	-	60.00	50.00	-26.82	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

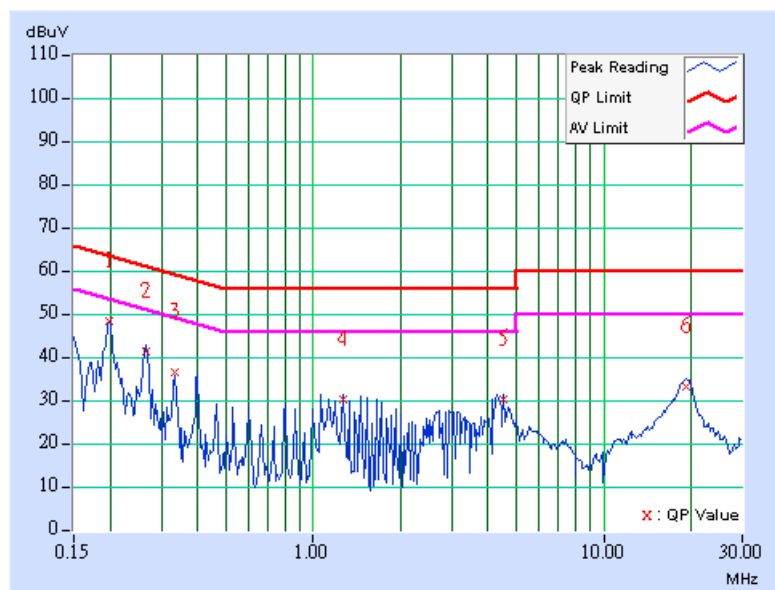




EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.201	0.10	48.97	38.90	49.07	39.00	63.58
2	0.268	0.10	42.33	36.07	42.43	36.17	61.19	51.19	-18.76	-15.02
3	0.399	0.10	34.85	-	34.95	-	57.87	47.87	-22.92	-
4	1.461	0.20	29.86	-	30.06	-	56.00	46.00	-25.94	-
5	4.520	0.22	29.32	-	29.54	-	56.00	46.00	-26.46	-
6	18.875	0.73	30.63	-	31.36	-	60.00	50.00	-28.64	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

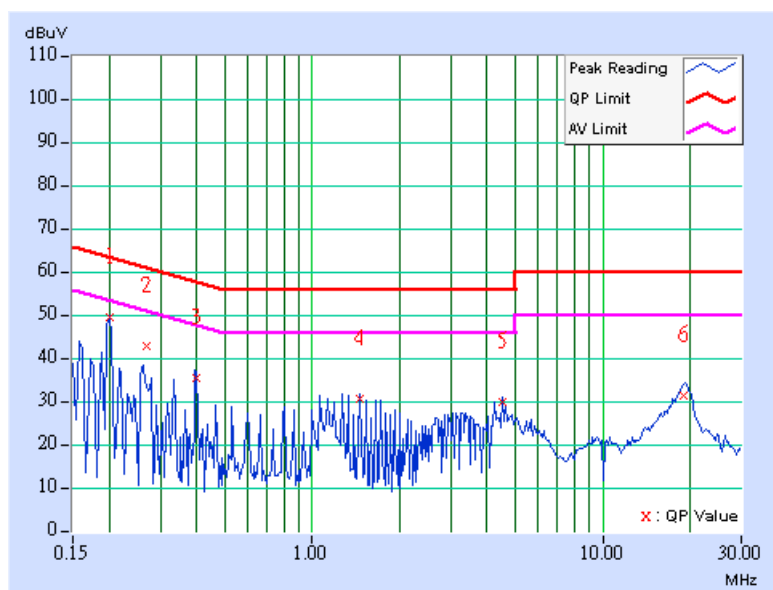




EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.200	0.10	45.23	34.08	45.33	34.18	63.63
2	0.267	0.10	39.72	-	39.82	-	61.20	51.20	-21.38	-
3	0.400	0.10	33.66	-	33.76	-	57.85	47.85	-24.09	-
4	1.395	0.20	29.78	-	29.98	-	56.00	46.00	-26.02	-
5	4.316	0.21	29.09	-	29.30	-	56.00	46.00	-26.70	-
6	19.391	0.75	32.18	-	32.93	-	60.00	50.00	-27.07	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

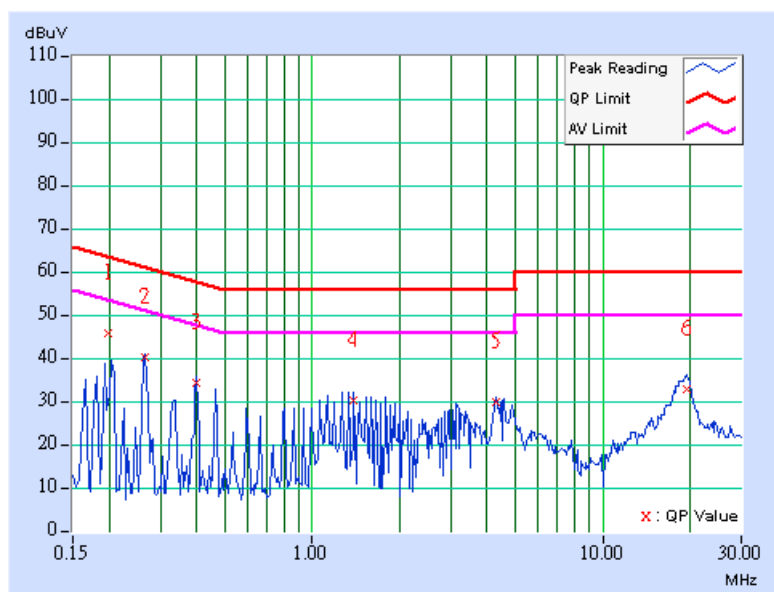




EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.201	0.10	45.41	36.56	45.51	36.66	63.58
2	0.267	0.10	40.18	-	40.28	-	61.20	51.20	-20.92	-
3	0.334	0.10	35.93	-	36.03	-	59.36	49.36	-23.33	-
4	1.328	0.20	31.66	-	31.86	-	56.00	46.00	-24.14	-
5	4.316	0.21	27.57	-	27.78	-	56.00	46.00	-28.22	-
6	18.793	0.73	30.94	-	31.67	-	60.00	50.00	-28.33	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

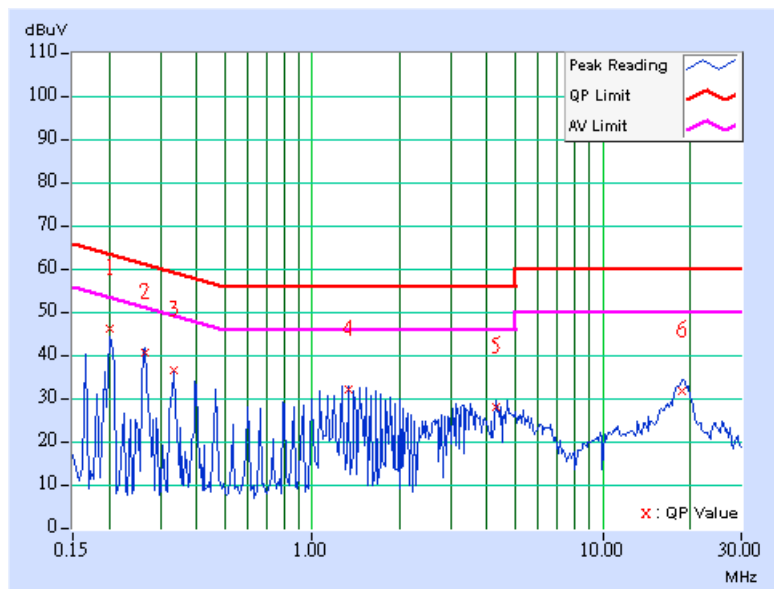




EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.197	0.10	43.96	36.02	44.06	36.12	63.74
2	0.263	0.10	39.14	-	39.24	-	61.33	51.33	-22.09	-
3	0.330	0.10	34.38	-	34.48	-	59.46	49.46	-24.98	-
4	1.461	0.20	30.90	-	31.10	-	56.00	46.00	-24.90	-
5	4.516	0.21	29.88	-	30.09	-	56.00	46.00	-25.91	-
6	19.121	0.73	32.53	-	33.26	-	60.00	50.00	-26.74	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

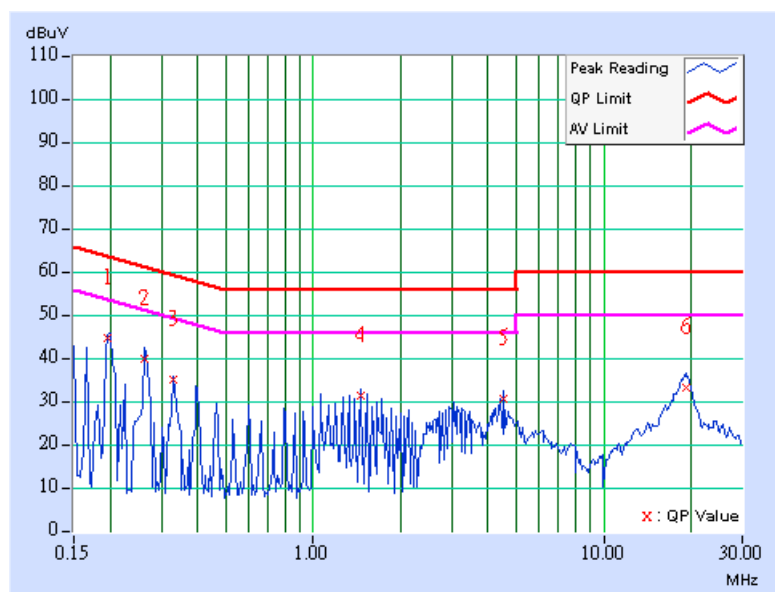




EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.201	0.10	44.79	36.70	44.89	36.80	63.58
2	0.267	0.10	40.10	-	40.20	-	61.20	51.20	-21.00	-
3	0.334	0.10	35.97	-	36.07	-	59.36	49.36	-23.29	-
4	1.328	0.20	31.83	-	32.03	-	56.00	46.00	-23.97	-
5	3.320	0.20	27.14	-	27.34	-	56.00	46.00	-28.66	-
6	19.523	0.77	29.52	-	30.29	-	60.00	50.00	-29.71	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

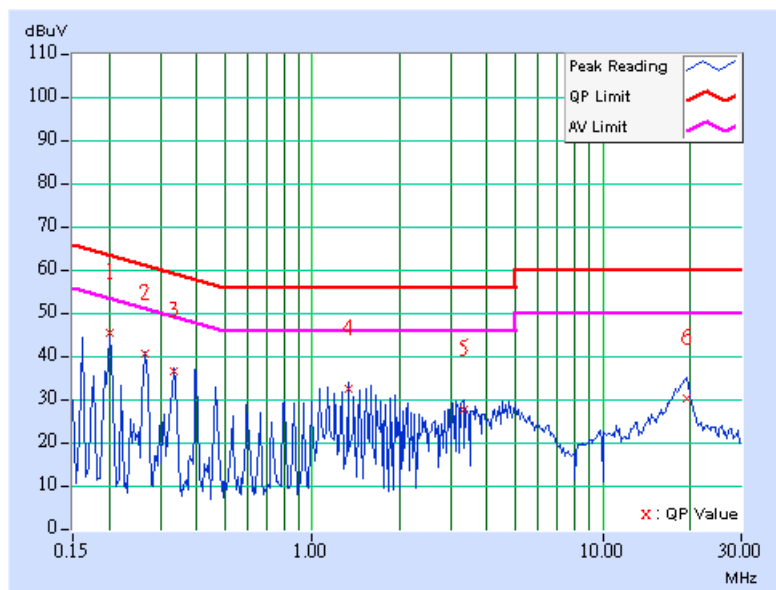



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	May. 19, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 21, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Jun. 01, 2006
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 17, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10633	Nov. 09, 2005
Preamplifier Agilent	8449B	3008A01964	Nov. 06, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218183/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218195/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 2.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The VCCI Site Registration No. is R-237.
 5. The IC Site Registration No. is IC4924-3.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

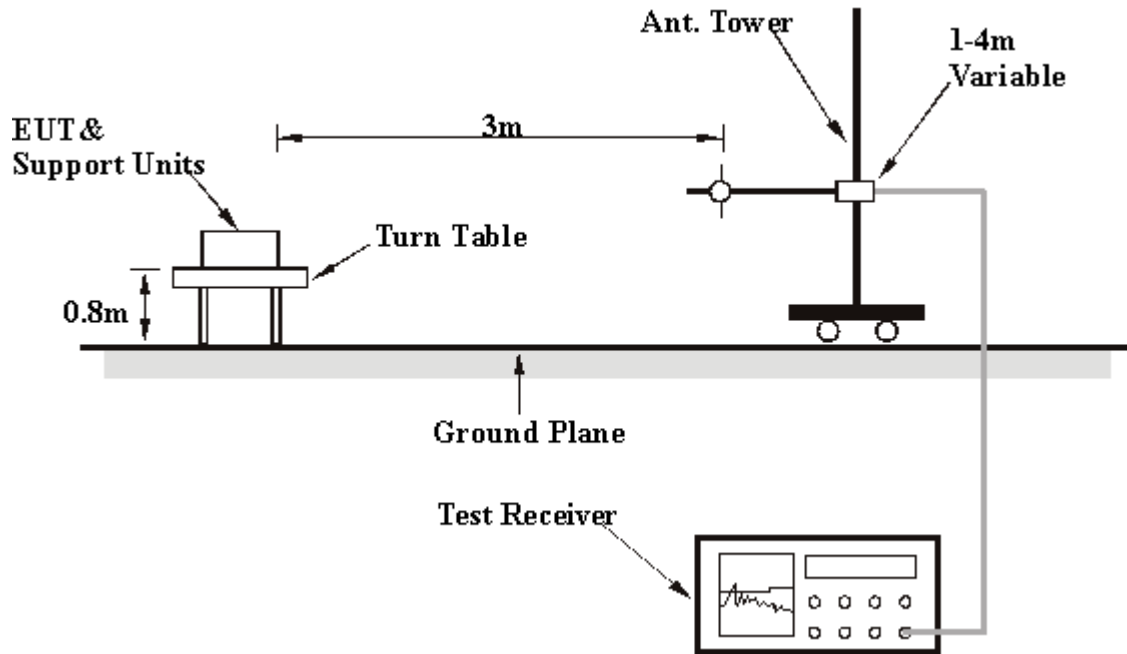

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

Below 1GHz Worst-Case Data (Power from AC Adapter PA-1900-03)

EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	26deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.92	33.80 QP	43.50	-9.70	2.00 H	328	20.56	13.24
2	188.43	40.42 QP	43.50	-3.08	2.00 H	76	28.40	12.03
3	221.84	35.18 QP	46.00	-10.82	1.00 H	52	23.51	11.67
4	278.97	38.78 QP	46.00	-7.22	1.00 H	250	24.89	13.88
5	368.42	39.06 QP	46.00	-6.94	1.00 H	172	23.33	15.73
6	801.69	36.51 QP	46.00	-9.46	1.00 H	346	13.16	23.35

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	139.93	34.85 QP	43.50	-8.65	1.00 V	304	20.65	14.19
2	193.82	35.92 QP	43.50	-7.58	2.00 V	322	24.31	11.60
3	277.89	38.78 QP	46.00	-7.22	2.00 V	148	24.94	13.84
4	401.83	39.30 QP	46.00	-6.70	1.00 V	334	22.88	16.43
5	435.24	35.24 QP	46.00	-10.76	1.00 V	34	17.94	17.30
6	798.46	40.23 QP	46.00	-5.77	2.00 V	340	16.91	23.33

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value


Below 1GHz Worst-Case Data (Power from AC Adapter PA-1650-01)

EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	26deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	190.59	38.58 QP	43.50	-4.92	2.00 H	58	26.72	11.86
2	222.92	34.67 QP	46.00	-11.33	1.50 H	52	22.94	11.74
3	278.97	40.25 QP	46.00	-5.72	1.00 H	52	26.36	13.88
4	368.42	33.91 QP	46.00	-12.09	1.00 H	16	18.18	15.73
5	502.07	36.93 QP	46.00	-9.07	2.00 H	64	18.58	18.35
6	799.53	38.49 QP	46.00	-7.51	1.00 H	364	15.16	23.33

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	138.86	33.05 QP	43.50	-10.45	1.00 V	100	18.93	14.12
2	187.36	35.38 QP	43.50	-8.12	2.00 V	16	23.27	12.11
3	278.97	39.59 QP	46.00	-6.14	2.00 V	166	25.70	13.88
4	416.92	37.57 QP	46.00	-8.43	1.00 V	16	20.74	16.82
5	498.83	36.35 QP	46.00	-9.65	1.00 V	370	18.05	18.30
6	813.54	38.14 QP	46.00	-7.86	1.00 V	328	14.67	23.48

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value



802.11b DSSS modulation

EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25deg. C, 75%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.77 PK	74.00	-16.23	1.00 H	246	23.94	33.83
1	2390.00	47.36 AV	54.00	-6.64	1.00 H	246	13.53	33.83
2	*2412.00	107.45 PK			1.00 H	241	73.58	33.87
2	*2412.00	99.55 AV			1.00 H	241	65.68	33.87
3	4824.00	51.39 PK	74.00	-22.61	1.00 H	292	10.61	40.78
3	4824.00	38.19 AV	54.00	-15.81	1.00 H	292	-2.59	40.78

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.25 PK	74.00	-16.75	1.00 V	73	23.42	33.83
1	2390.00	47.37 AV	54.00	-6.63	1.00 V	73	13.54	33.83
2	*2412.00	109.21 PK			1.00 V	73	75.34	33.87
2	*2412.00	101.45 AV			1.00 V	73	67.58	33.87
3	4824.00	51.91 PK	74.00	-22.09	1.00 V	91	11.13	40.78
3	4824.00	38.39 AV	54.00	-15.61	1.00 V	91	-2.39	40.78

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25deg. C, 75%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.02 PK			1.03 H	34	75.08	33.94
1	*2437.00	101.46 AV			1.03 H	34	67.52	33.94
2	4874.00	51.44 PK	74.00	-22.56	1.10 H	214	10.43	41.00
2	4874.00	38.77 AV	54.00	-15.23	1.10 H	214	-2.24	41.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.12 PK			1.00 V	76	74.19	33.94
1	*2437.00	101.57 AV			1.00 V	76	67.64	33.94
2	4874.00	51.06 PK	74.00	-22.94	1.10 V	236	10.05	41.00
2	4874.00	40.09 AV	54.00	-13.91	1.10 V	236	-0.92	41.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25deg. C, 75%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.66 PK			1.01 H	31	75.66	34.00
1	*2462.00	102.06 AV			1.01 H	31	68.06	34.00
2	2486.00	60.45 PK	74.00	-13.55	1.01 H	31	26.39	34.06
2	2486.00	48.49 AV	54.00	-5.51	1.01 H	31	14.43	34.06
3	4924.00	56.65 PK	74.00	-17.35	1.01 H	180	15.48	41.18
3	4924.00	47.59 AV	54.00	-6.41	1.01 H	180	6.42	41.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.01 PK			1.41 V	116	74.01	34.00
1	*2462.00	100.39 AV			1.41 V	116	66.39	34.00
2	2486.00	58.31 PK	74.00	-15.69	1.41 V	116	24.25	34.06
2	2486.00	47.89 AV	54.00	-6.11	1.41 V	116	13.83	34.06
3	4924.00	56.07 PK	74.00	-17.93	1.40 V	94	14.90	41.18
3	4924.00	46.16 AV	54.00	-7.84	1.40 V	94	4.99	41.18

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

802.11g OFDM modulation

EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 75%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.36 PK	74.00	-13.64	1.27 H	35	26.53	33.83
1	2390.00	48.15 AV	54.00	-5.85	1.27 H	35	14.32	33.83
2	*2412.00	105.38 PK			1.27 H	35	71.51	33.87
2	*2412.00	94.34 AV			1.27 H	35	60.47	33.87
3	4824.00	51.27 PK	74.00	-22.73	1.00 H	295	10.49	40.78
3	4824.00	38.13 AV	54.00	-15.87	1.00 H	295	-2.65	40.78

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.95 PK	74.00	-13.05	1.00 V	71	27.12	33.83
1	2390.00	49.51 AV	54.00	-4.49	1.00 V	71	15.68	33.83
2	*2412.00	107.55 PK			1.00 V	71	73.68	33.87
2	*2412.00	95.87 AV			1.00 V	71	62.00	33.87
3	4824.00	51.63 PK	74.00	-22.37	1.05 V	342	10.85	40.78
3	4824.00	38.20 AV	54.00	-15.80	1.05 V	342	-2.58	40.78

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 75%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.84 PK			1.30 H	290	72.90	33.94
1	*2437.00	95.40 AV			1.30 H	290	61.46	33.94
2	4874.00	50.56 PK	74.00	-23.44	1.14 H	322	9.55	41.00
2	4874.00	36.58 AV	54.00	-17.42	1.14 H	322	-4.43	41.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.16 PK			1.00 V	73	72.22	33.94
1	*2437.00	95.30 AV			1.00 V	73	61.36	33.94
2	4874.00	50.68 PK	74.00	-23.32	1.00 V	216	9.67	41.00
2	4874.00	37.66 AV	54.00	-16.34	1.00 V	216	-3.35	41.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 75%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.52 PK			1.00 H	30	70.52	34.00
1	*2462.00	94.70 AV			1.00 H	30	60.70	34.00
2	2462.00	59.71 PK	74.00	-14.29	1.00 H	30	25.71	34.00
2	2462.00	47.81 AV	54.00	-6.19	1.00 H	30	13.81	34.00
3	4924.00	51.59 PK	74.00	-22.41	1.00 H	227	10.42	41.18
3	4924.00	38.85 AV	54.00	-15.15	1.00 H	227	-2.32	41.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.47 PK			1.00 V	71	70.47	34.00
1	*2462.00	94.04 AV			1.00 V	71	60.04	34.00
2	2483.50	58.86 PK	74.00	-15.14	1.00 V	71	24.80	34.06
2	2483.50	47.81 AV	54.00	-6.19	1.00 V	71	13.75	34.06
3	4924.00	52.38 PK	74.00	-21.62	1.00 V	218	11.21	41.18
3	4924.00	38.75 AV	54.00	-15.25	1.00 V	218	-2.42	41.18

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK 30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

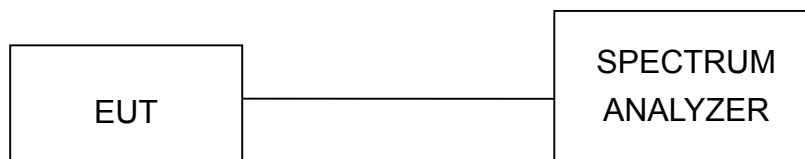

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS


802.11b DSSS modulation

EUT	notebook computer	MODEL	TA1 (with Intel WM3B2915ABG)
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Jamison Chan		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	8.72	0.5	PASS
6	2437	9.08	0.5	PASS
11	2462	9.00	0.5	PASS



CH 1

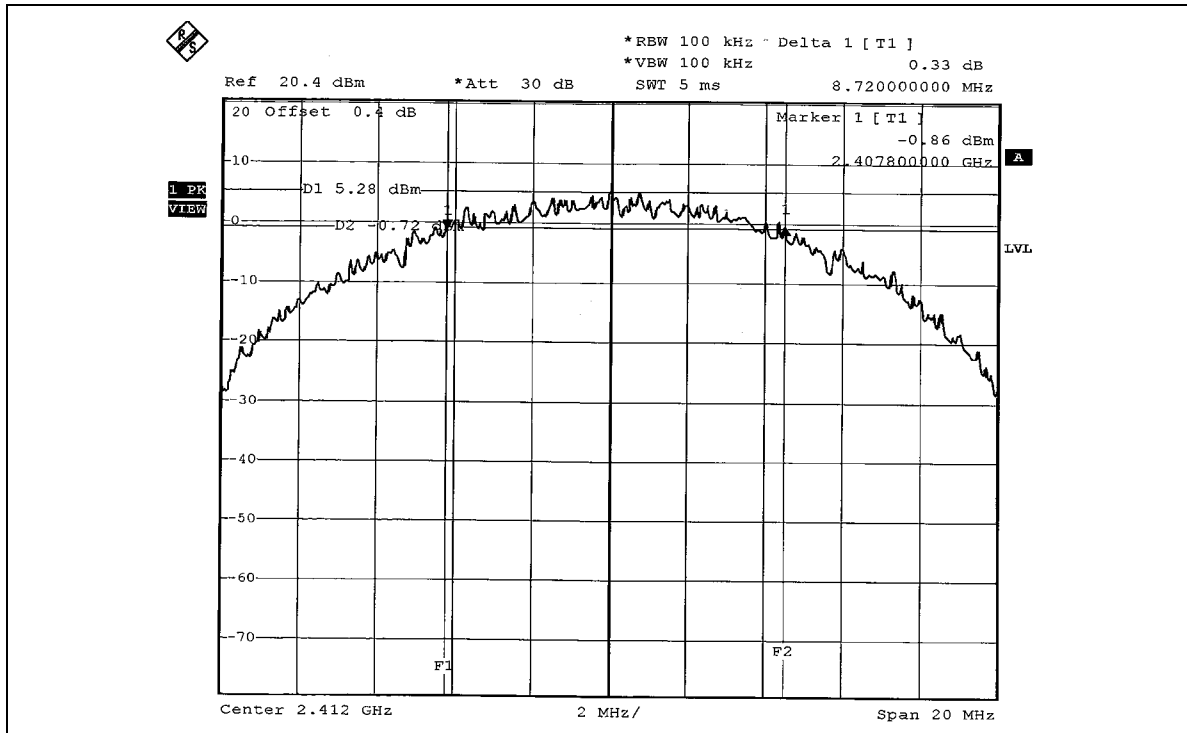


CH 6

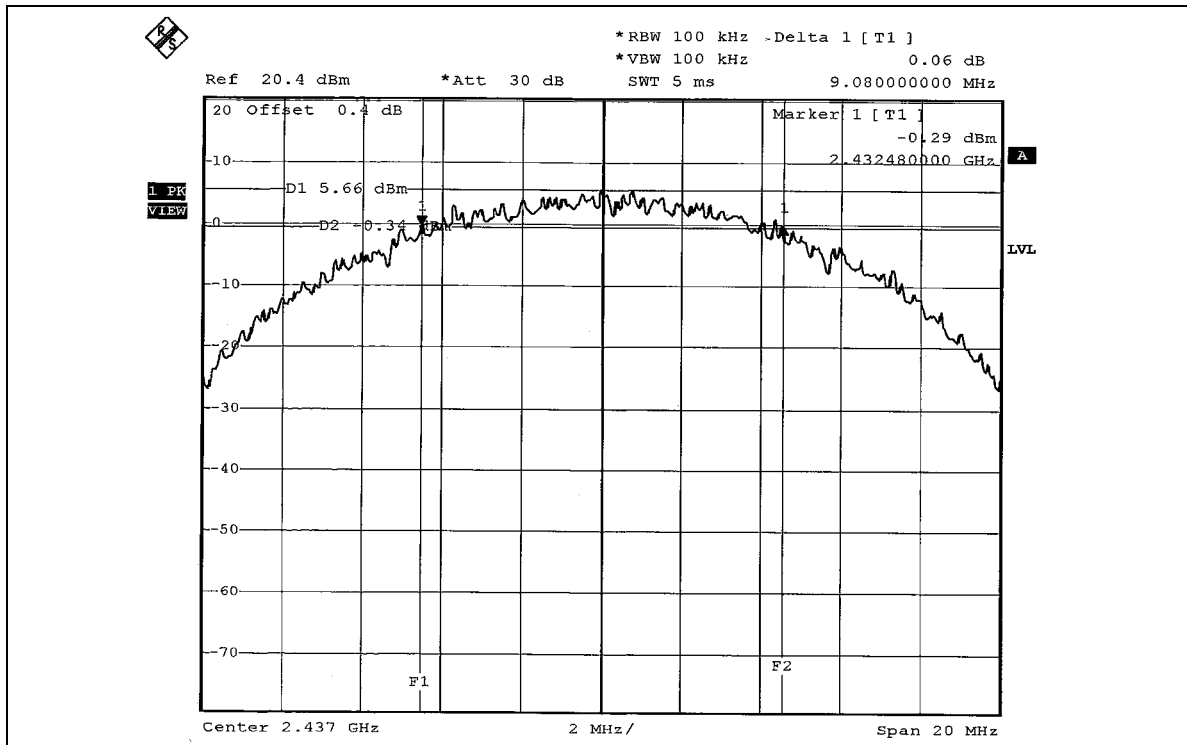



CH 11

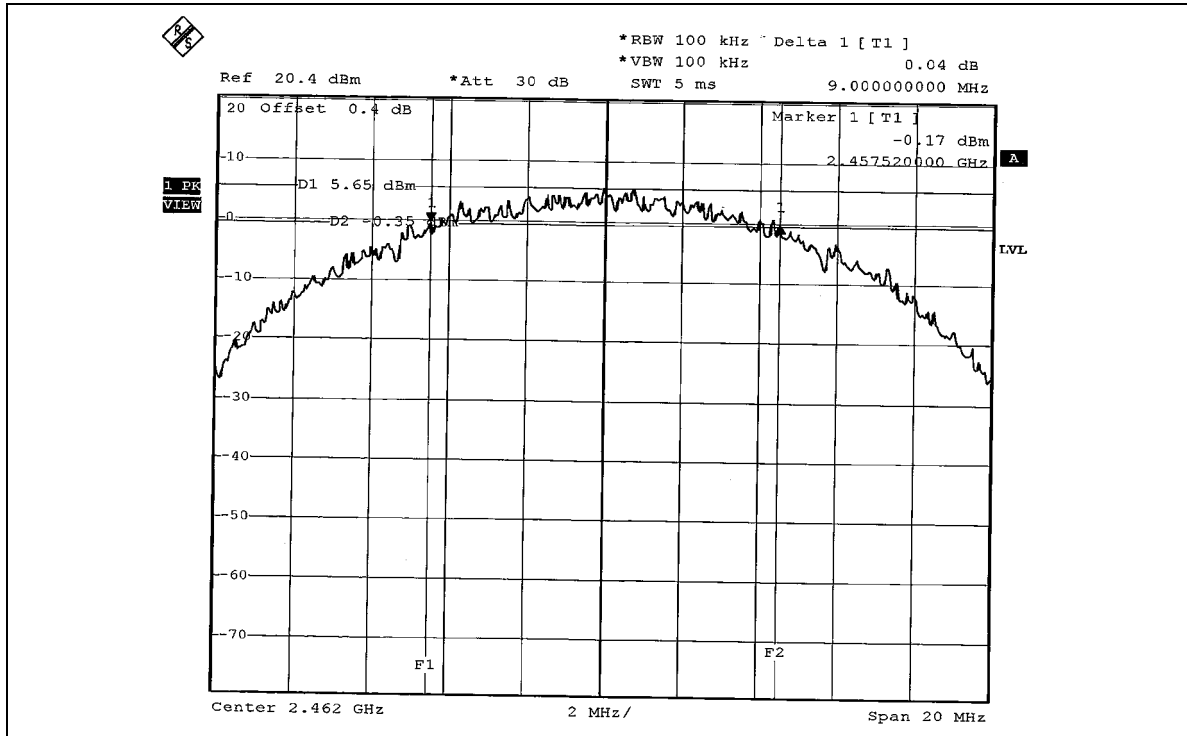


**802.11g OFDM modulation**

EUT	notebook computer	MODEL	TA1 (with Intel WM3B2915ABG)
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Jamison Chan		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.40	0.5	PASS
6	2437	16.36	0.5	PASS
11	2462	15.12	0.5	PASS



CH 1

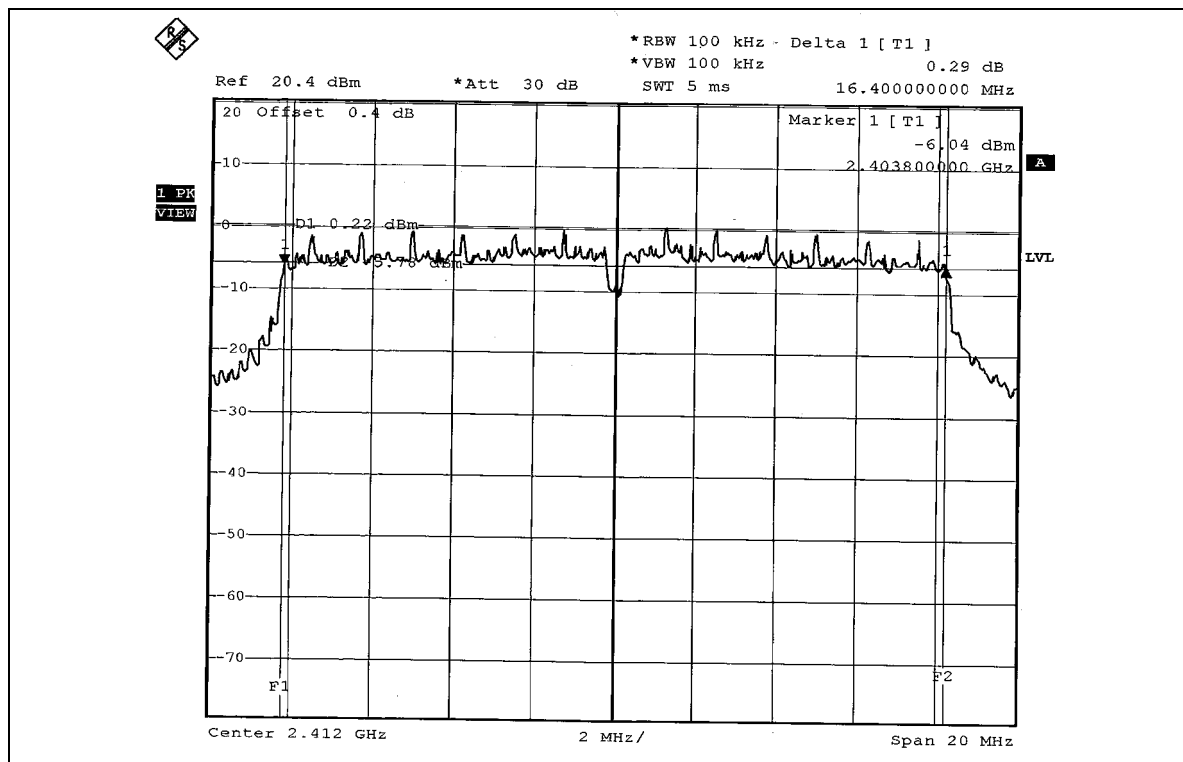


CH 6

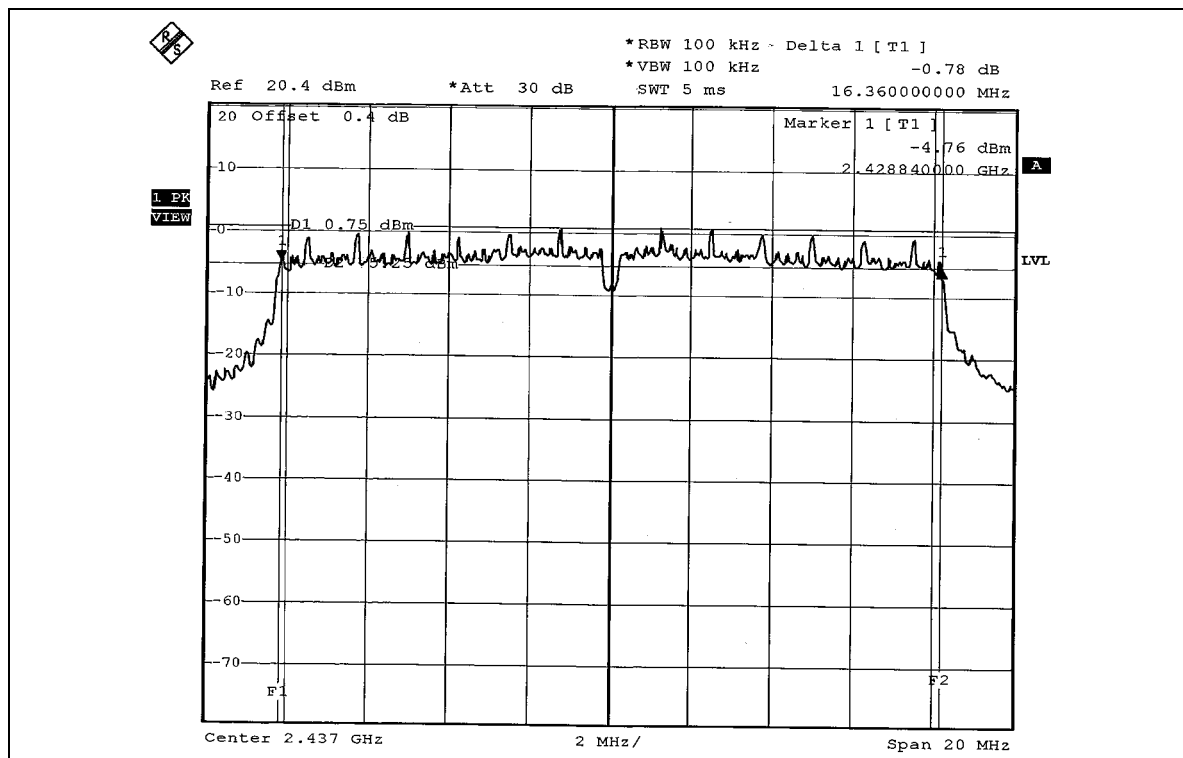



CH 11

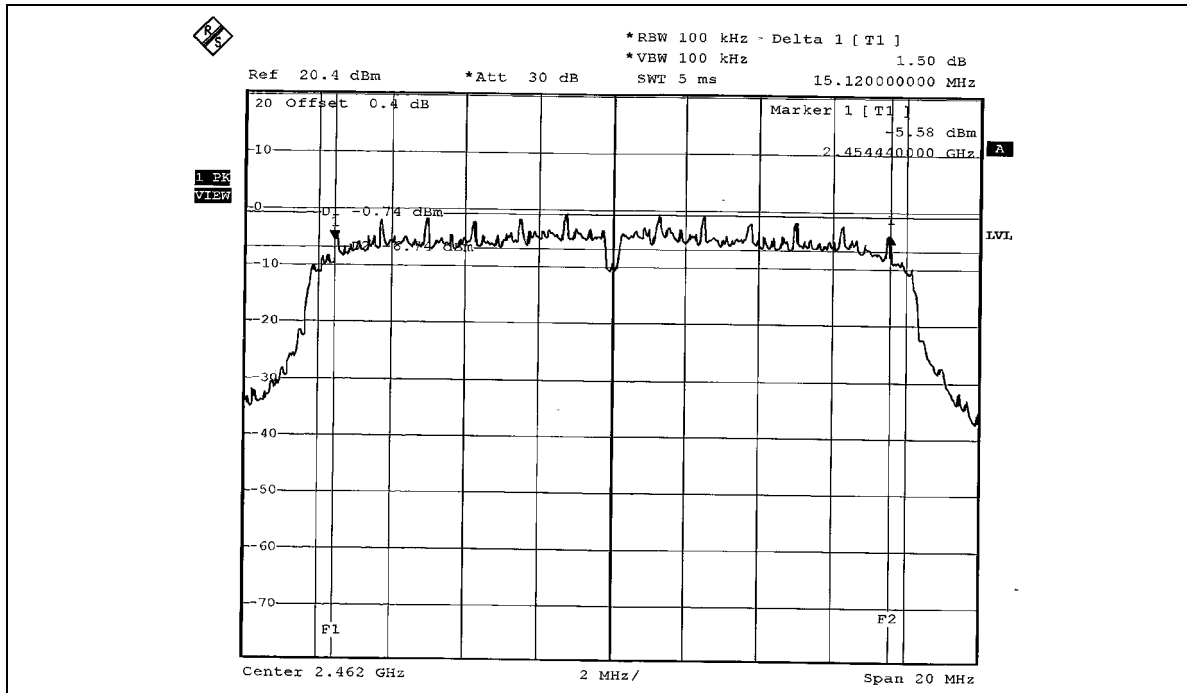



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2005
TEKTRONIX OSCILLOSCOPE	TDS 1012	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.1 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.2 DEVIATION FROM TEST STANDARD

No deviation

4.4.3 TEST SETUP



4.4.4 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.3 TEST RESULTS

802.11b DSSS modulation

EUT	notebook computer	MODEL	TA1 (with Intel WM3B2915ABG)
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Jamison Chan		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	51.286	17.10	30	PASS
6	2437	50.350	17.02	30	PASS
11	2462	50.350	17.02	30	PASS

802.11g OFDM modulation

EUT	notebook computer	MODEL	TA1 (with Intel WM3B2915ABG)
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Jamison Chan		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	31.696	15.01	30	PASS
6	2437	31.696	15.01	30	PASS
11	2462	32.211	15.08	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



4.5.7 TEST RESULTS


802.11b DSSS modulation

EUT	notebook computer	MODEL	TA1 (with Intel WM3B2915ABG)
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Jamison Chan		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-7.02	8	PASS
6	2437	-7.04	8	PASS
11	2462	-6.96	8	PASS



CH 1

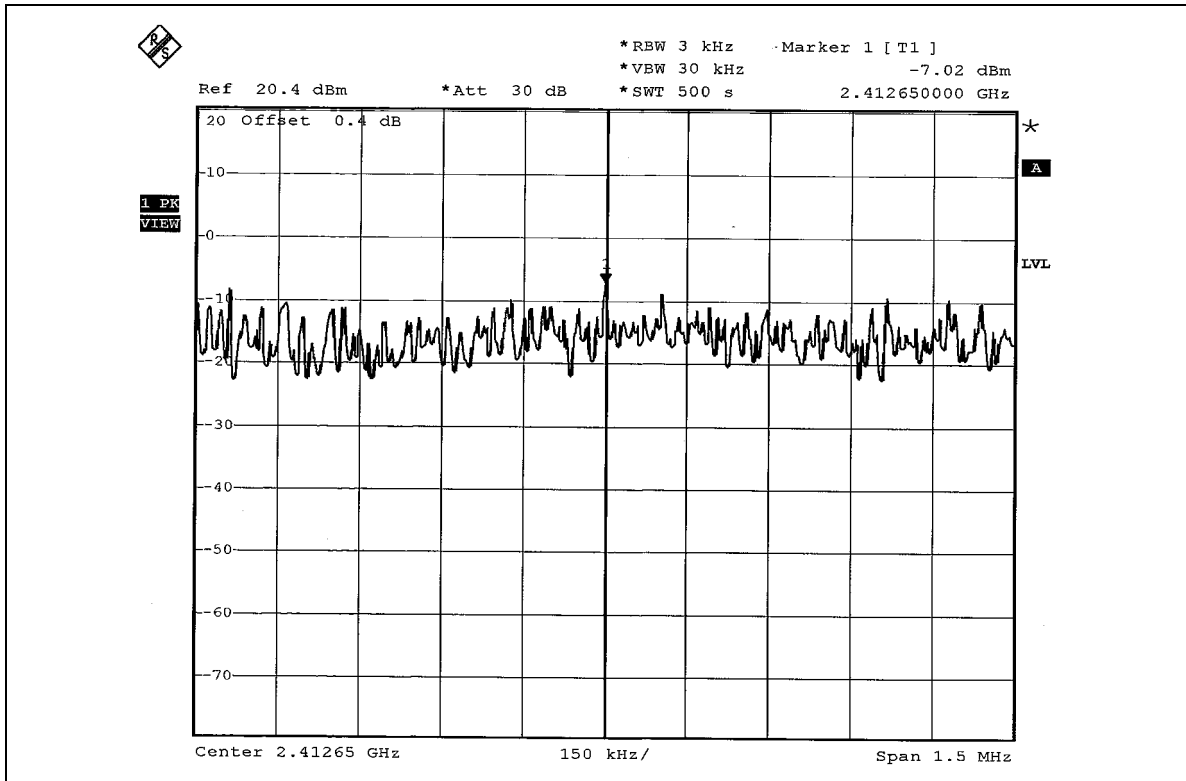


CH 6

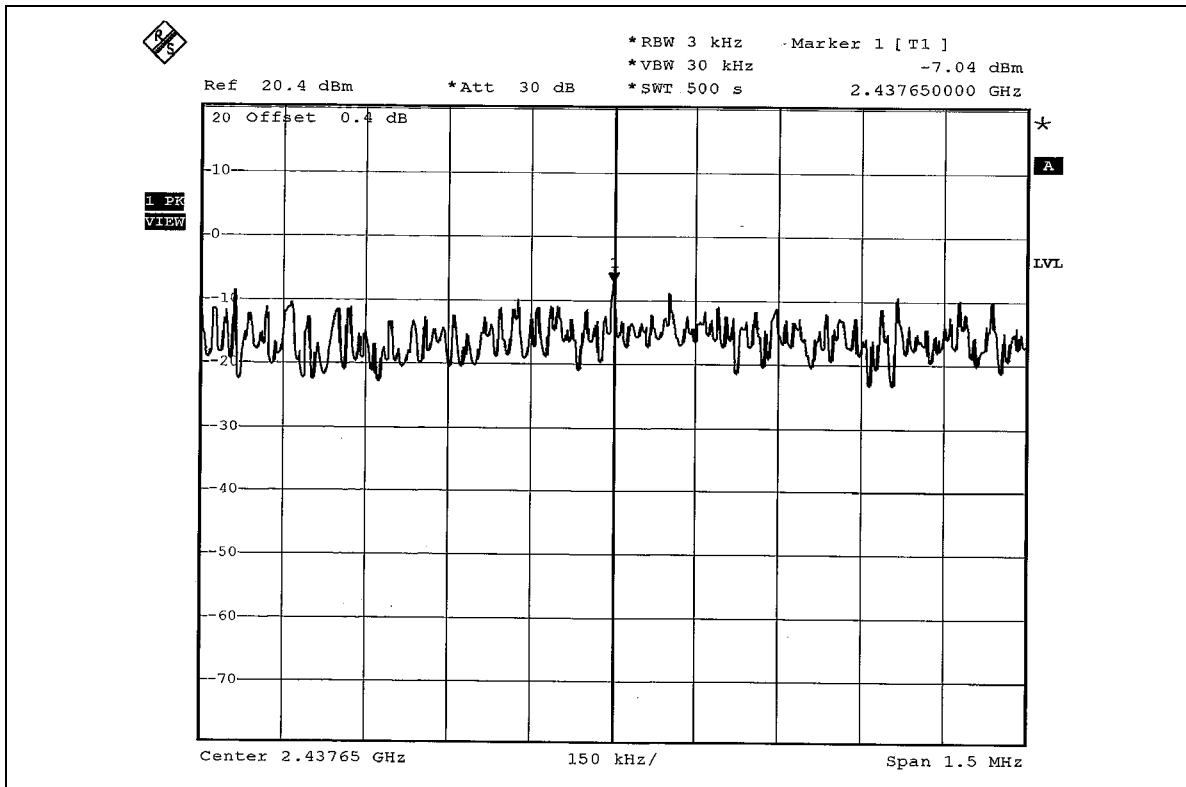



CH 11

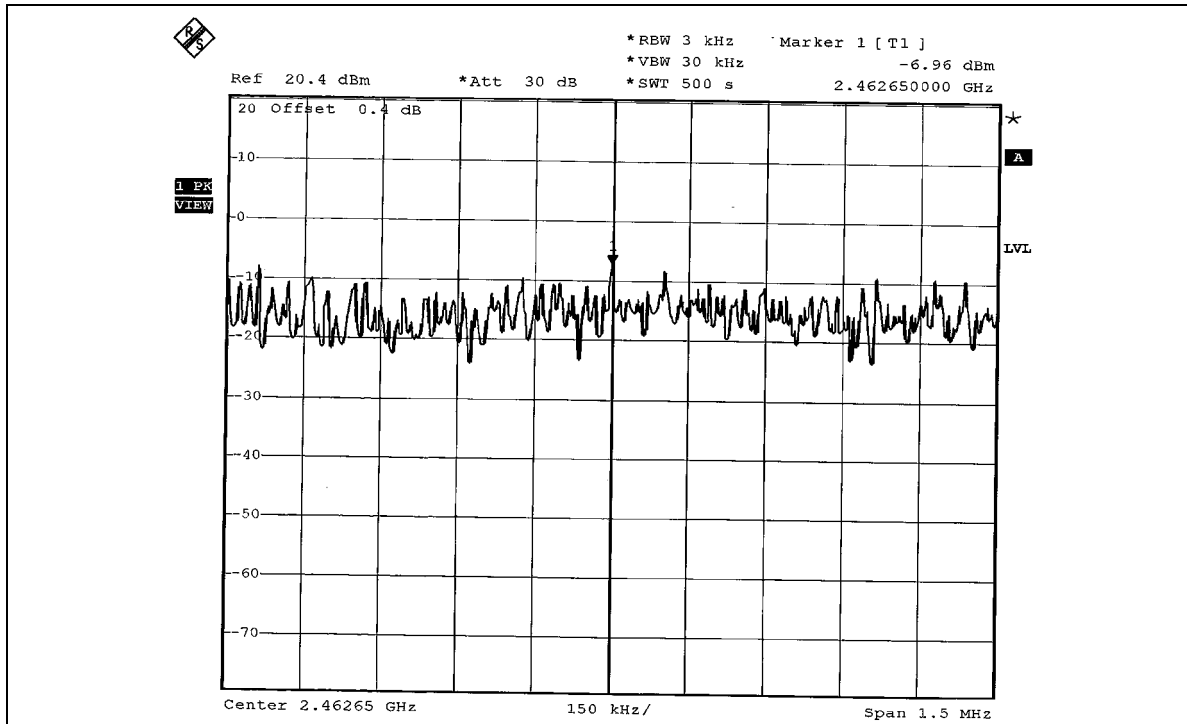


**802.11g OFDM modulation**

EUT	notebook computer	MODEL	TA1 (with Intel WM3B2915ABG)
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Jamison Chan		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.81	8	PASS
6	2437	-13.79	8	PASS
11	2462	-13.78	8	PASS



CH 1

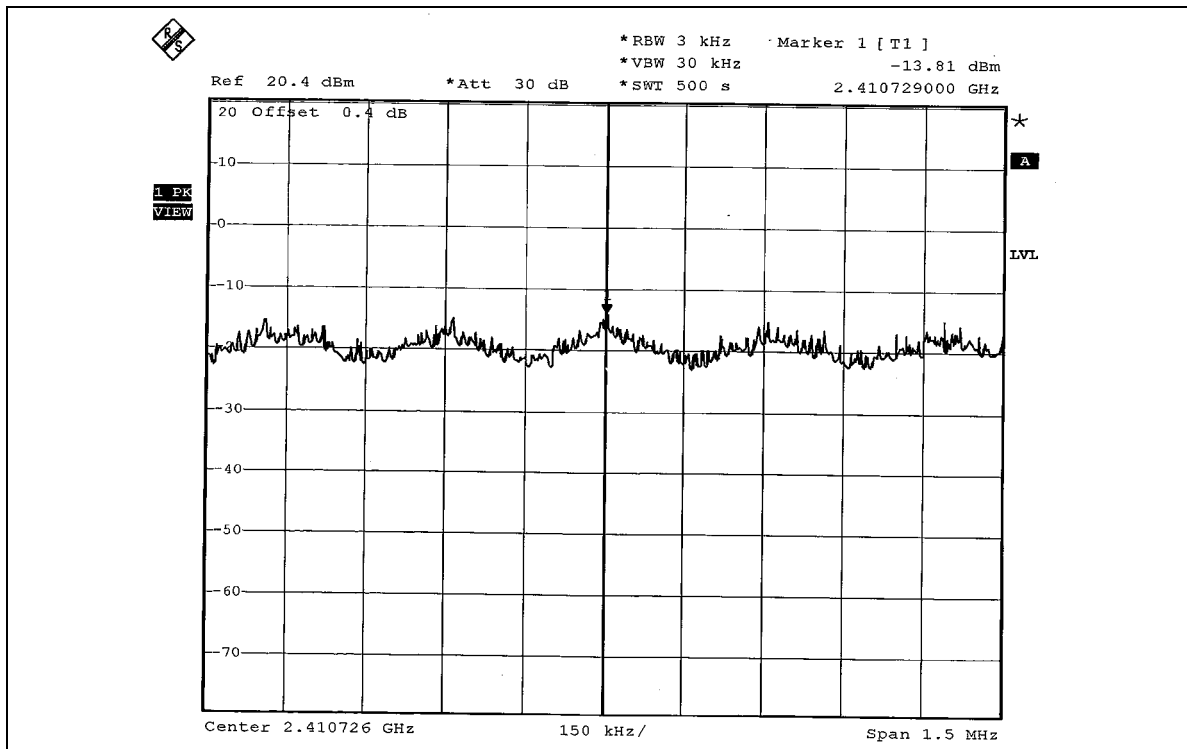


CH 6

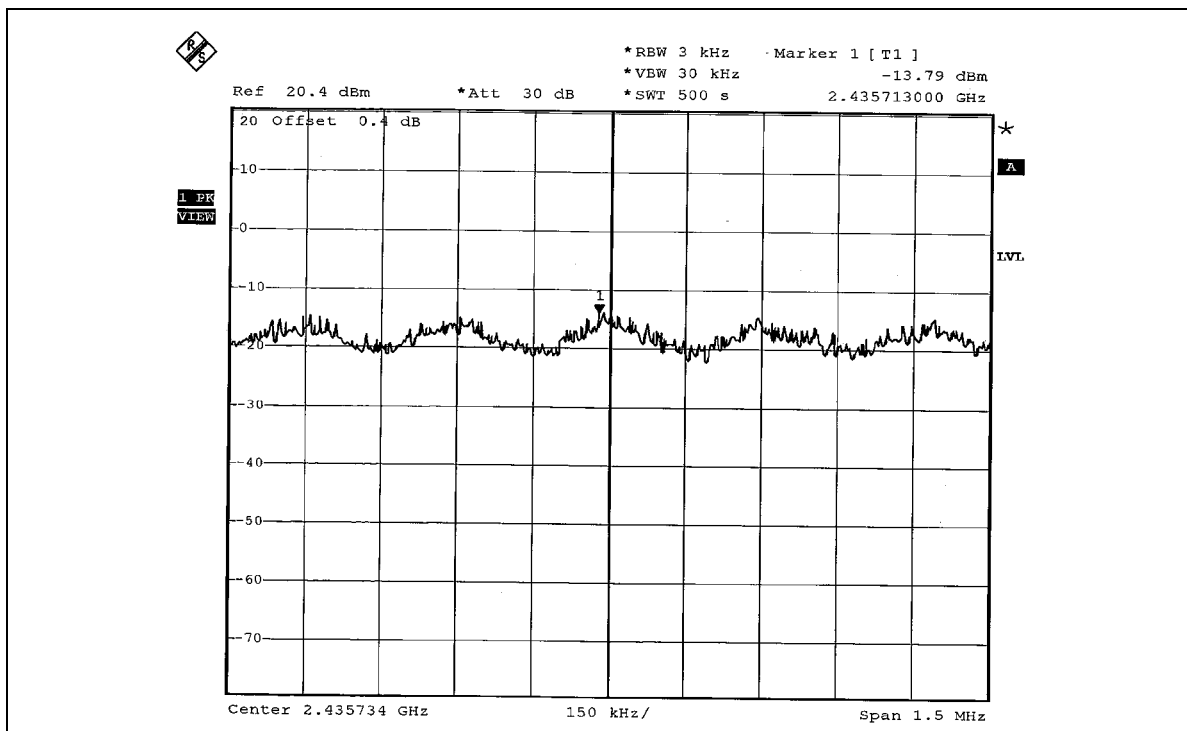



CH 11

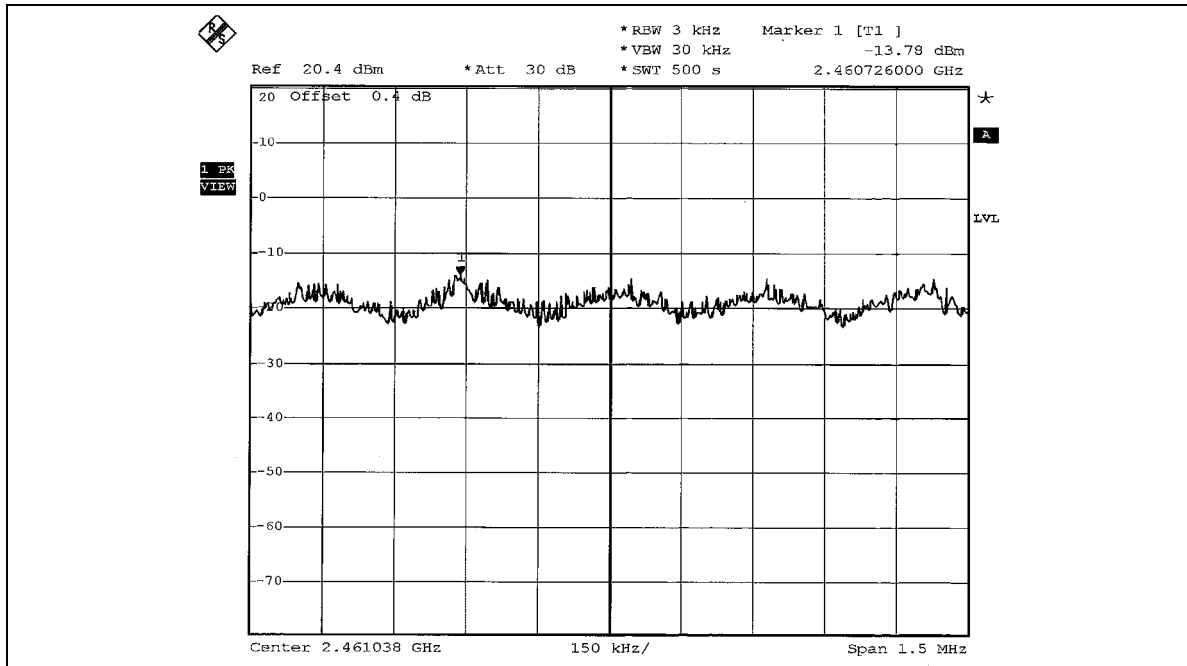



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.6 TEST RESULTS

The spectrum plots are attached on the following 12 images. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS modulation

NOTE 1: The band edge emission plot on page 63 shows 52.53dBc between carrier maximum power and local maximum emission in restrict band (2.3888GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 109.21dBuV/m (Peak), so the maximum field strength in restrict band is $109.21 - 52.53 = 56.68$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of on page 63 shows 58.60dBc between carrier maximum power and local maximum emission in restrict band (2.3878GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 101.45dBuV/m (Average), so the maximum field strength in restrict band is $101.45 - 58.60 = 42.86$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 64 shows 51.40dBc between carrier maximum power and local maximum emission in restrict band (2.4849GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 109.66dBuV/m (Peak), so the maximum field strength in restrict band is $109.66 - 51.40 = 58.26$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 65 shows 57.88dBc between carrier maximum power and local maximum emission in restrict band (2.4865GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 102.06dBuV/m (Average), so the maximum field strength in restrict band is $102.06 - 57.88 = 44.18$ dBuV/m which is under 54dBuV/m limit.



802.11g OFDM modulation

NOTE 1: The band edge emission plot on page 66 shows 47.12dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 107.55dBuV/m (Peak), so the maximum field strength in restrict band is $107.55 - 47.12 = 60.43$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on page 66 shows 50.05dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 95.87dBuV/m (Average), so the maximum field strength in restrict band is $95.87 - 50.05 = 45.82$ dBuV/m which is under 54dBuV/m limit.



NOTE 2: The band edge emission plot on page 67 shows 47.00dBc between carrier maximum power and local maximum emission in restrict band (2.4879GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 104.52dBuV/m (Peak), so the maximum field strength in restrict band is $104.52 - 47.00 = 57.52$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on page 68 shows 50.89dBc between carrier maximum power and local maximum emission in restrict band (2.4945GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 94.70dBuV/m (Average), so the maximum field strength in restrict band is $94.70 - 50.89 = 43.81$ dBuV/m which is under 54dBuV/m limit.



802.11b DSSS modulation

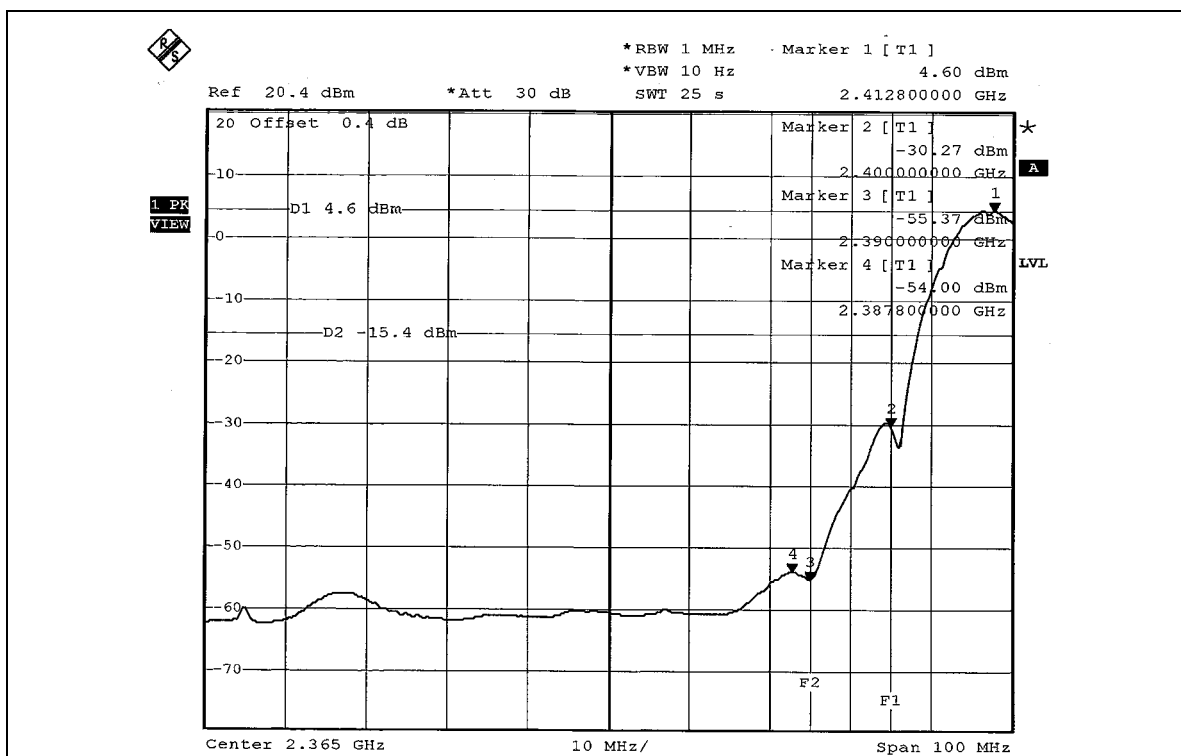
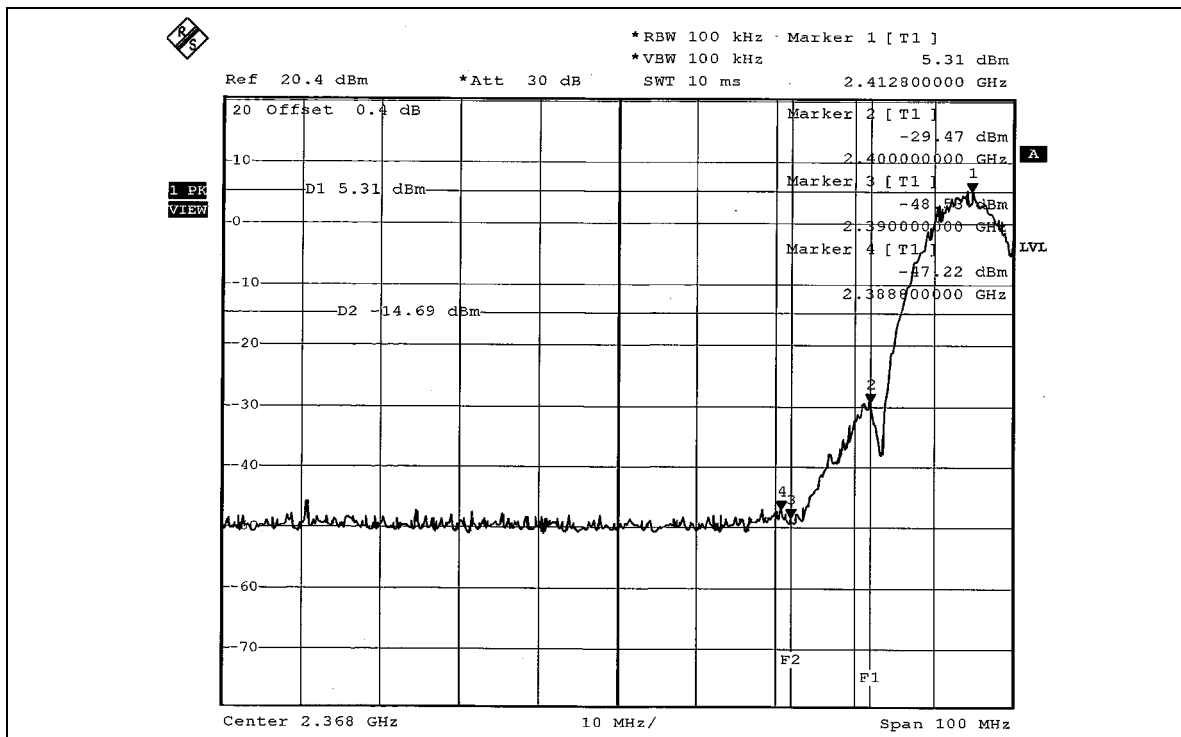


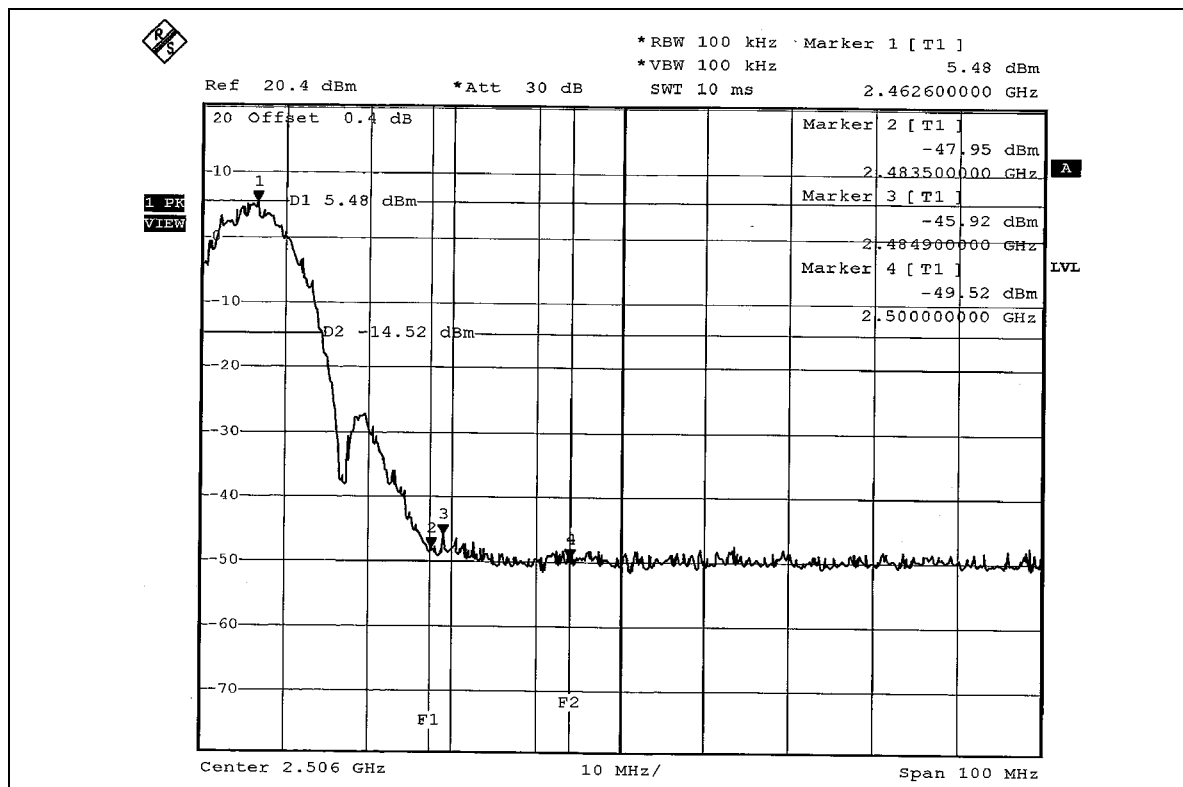
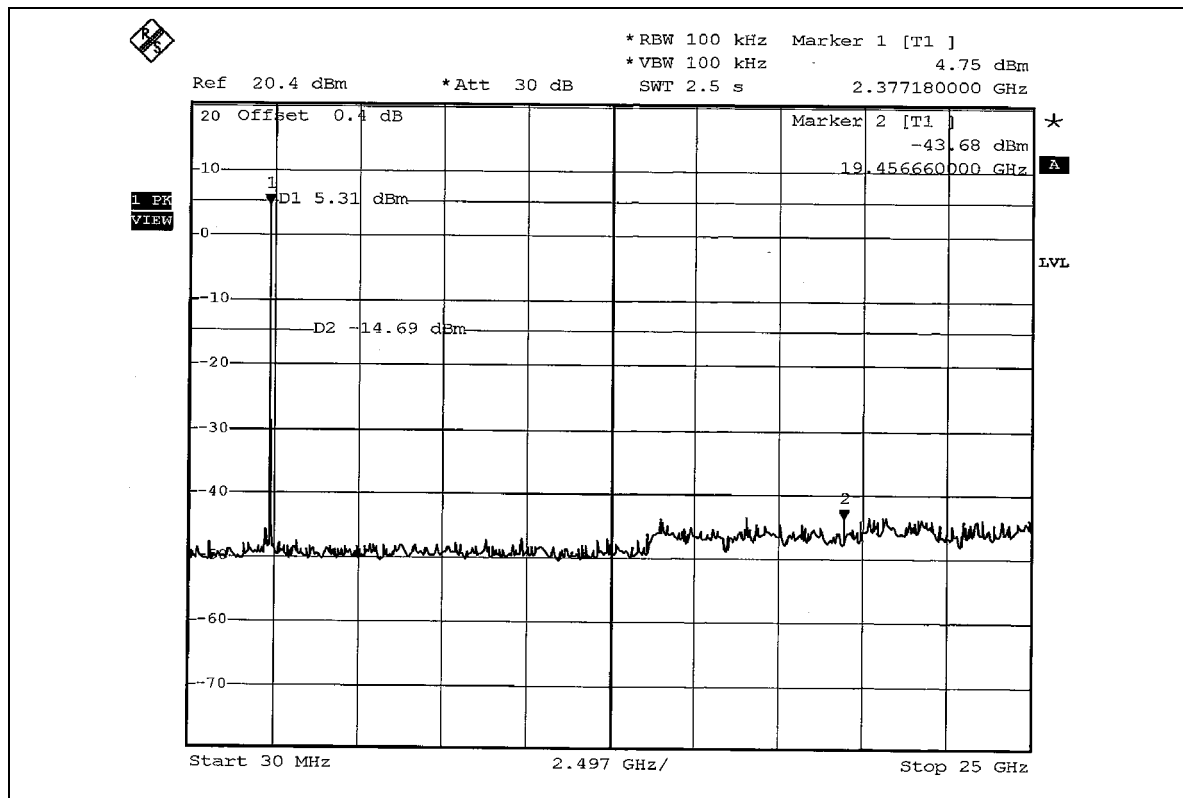


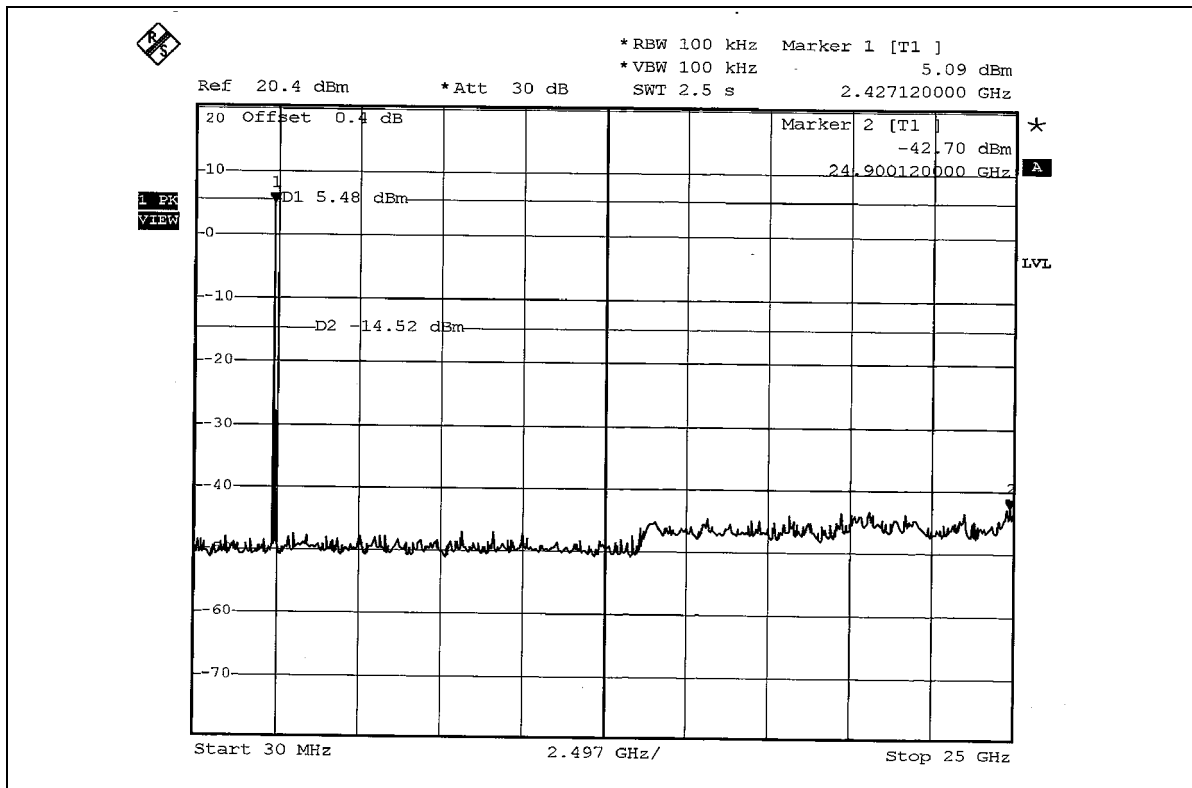
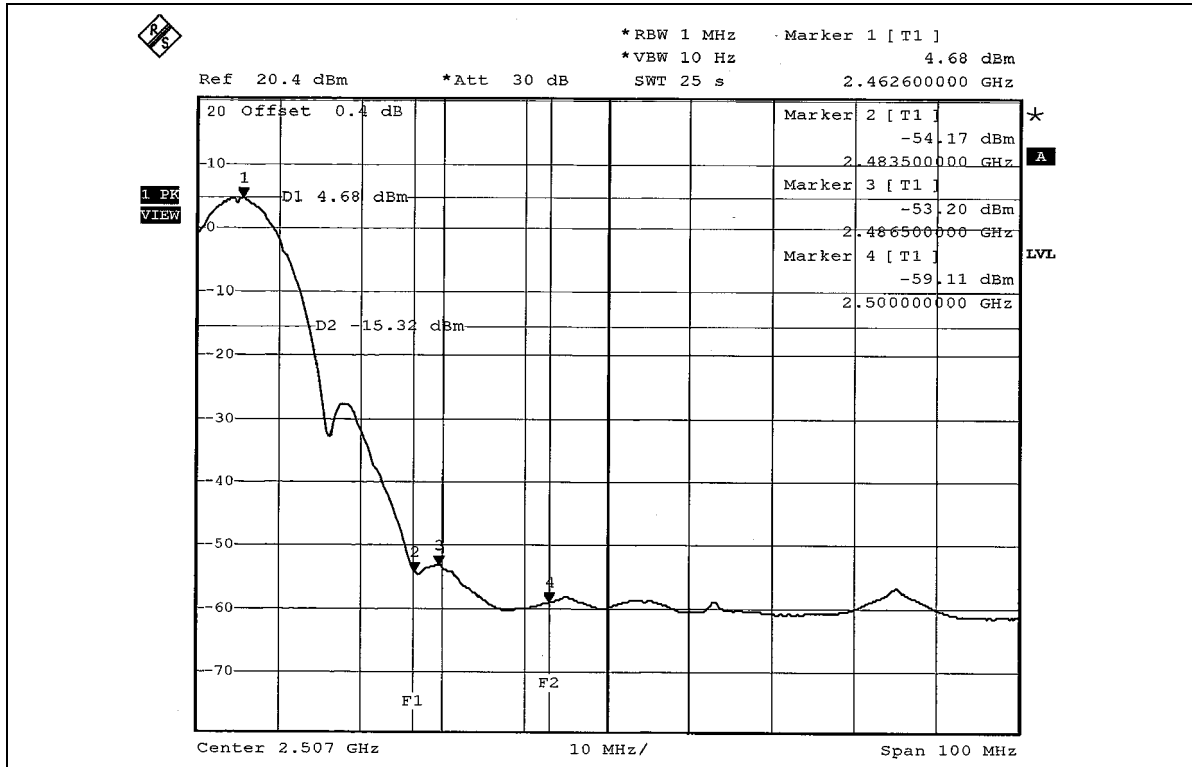




802.11g OFDM modulation

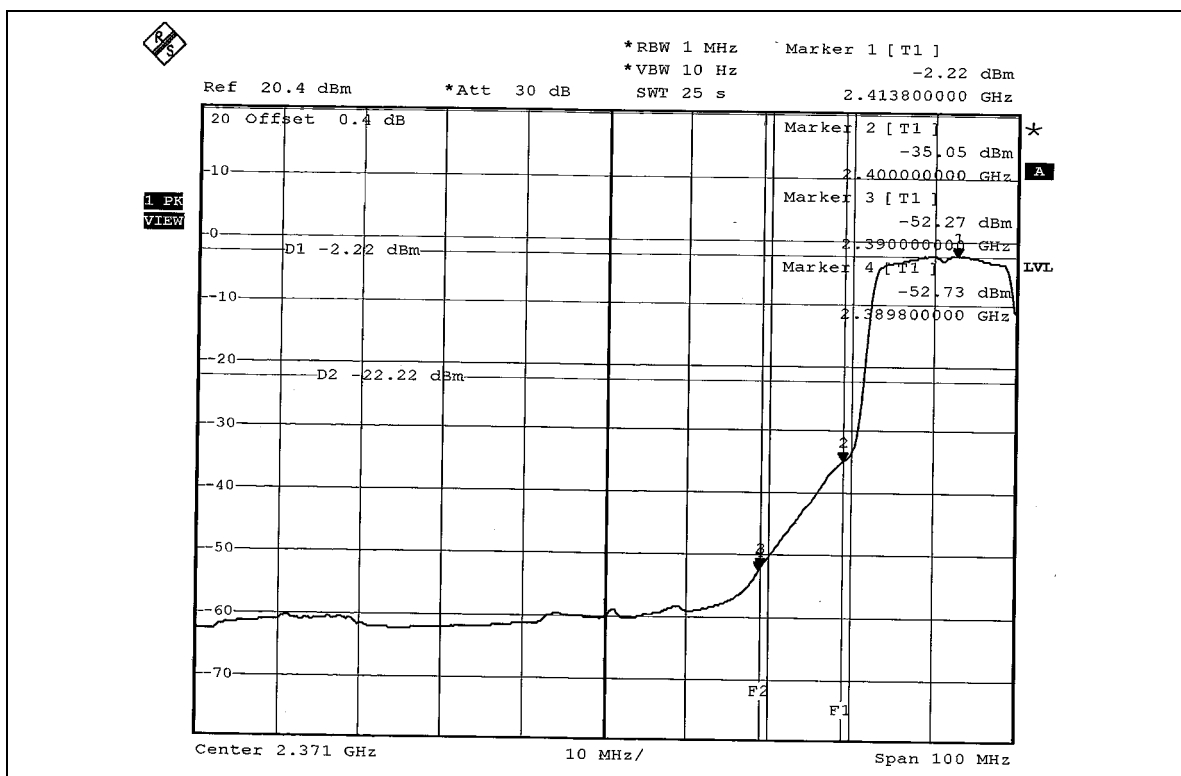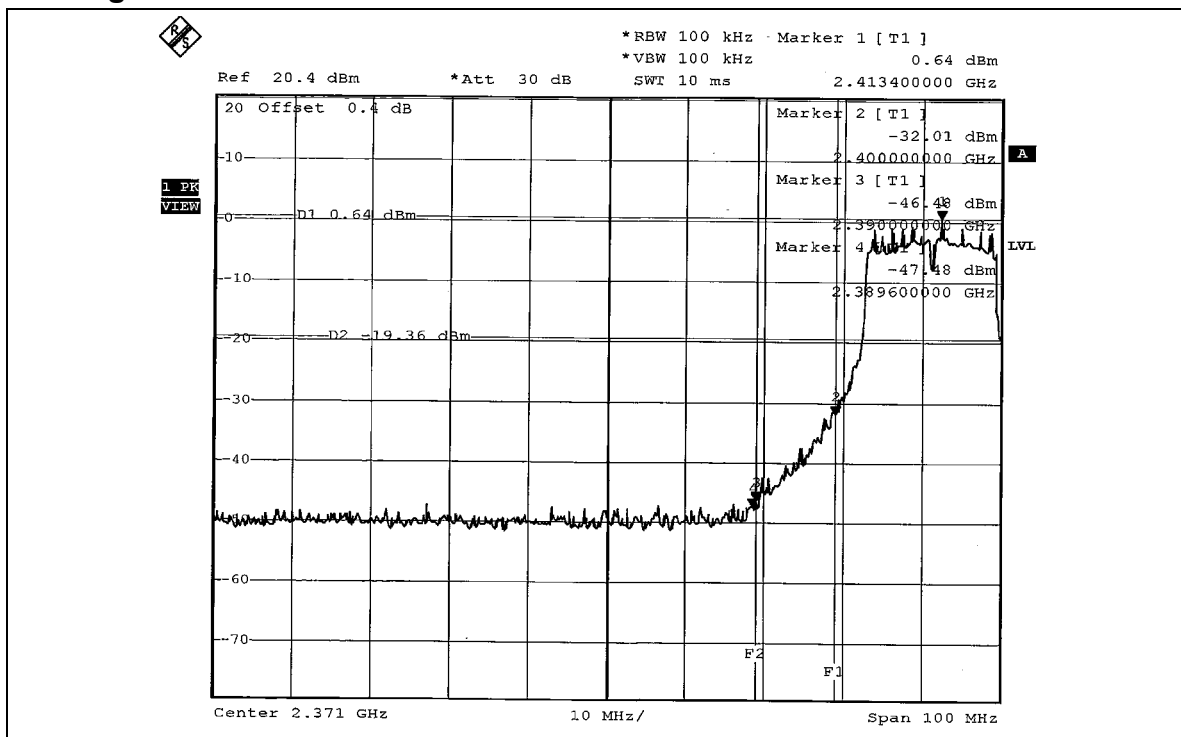

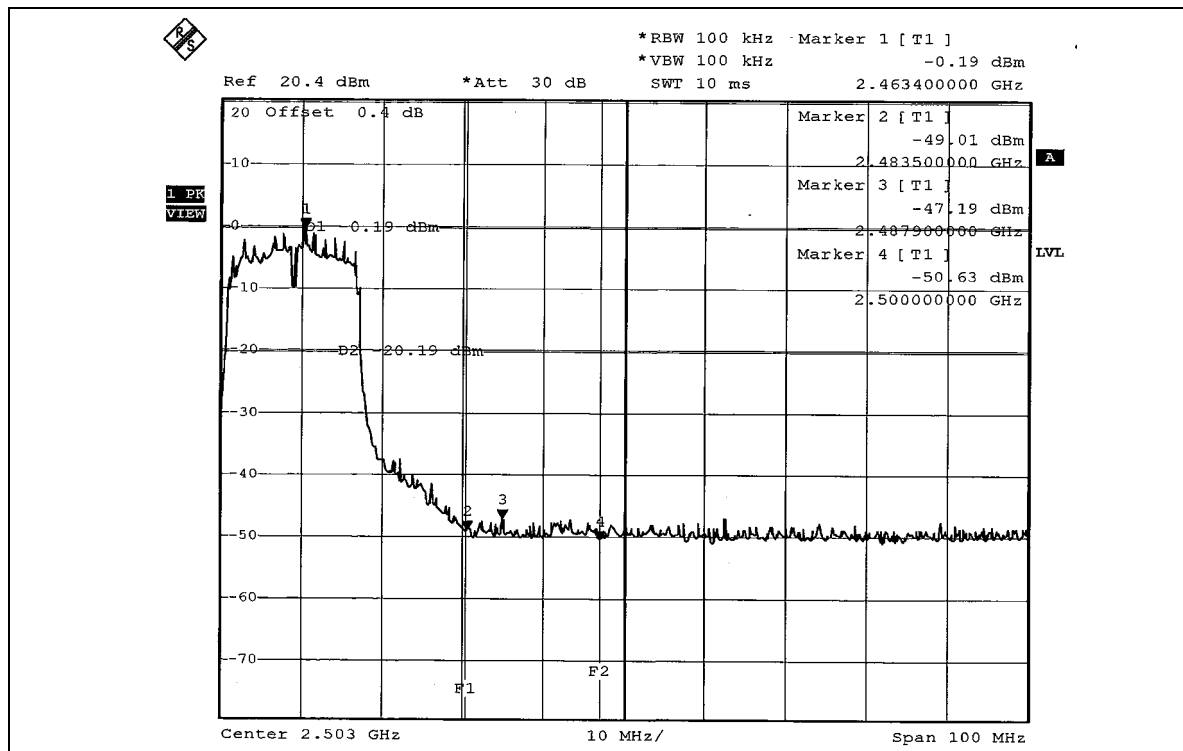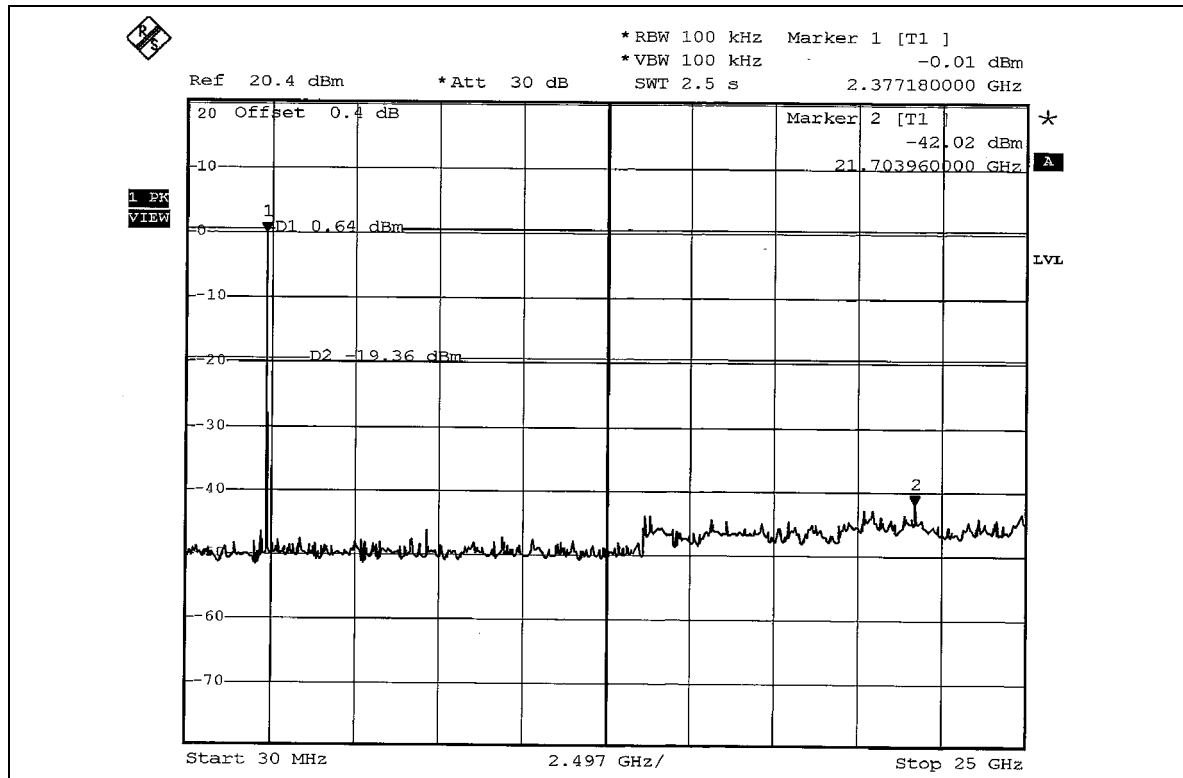

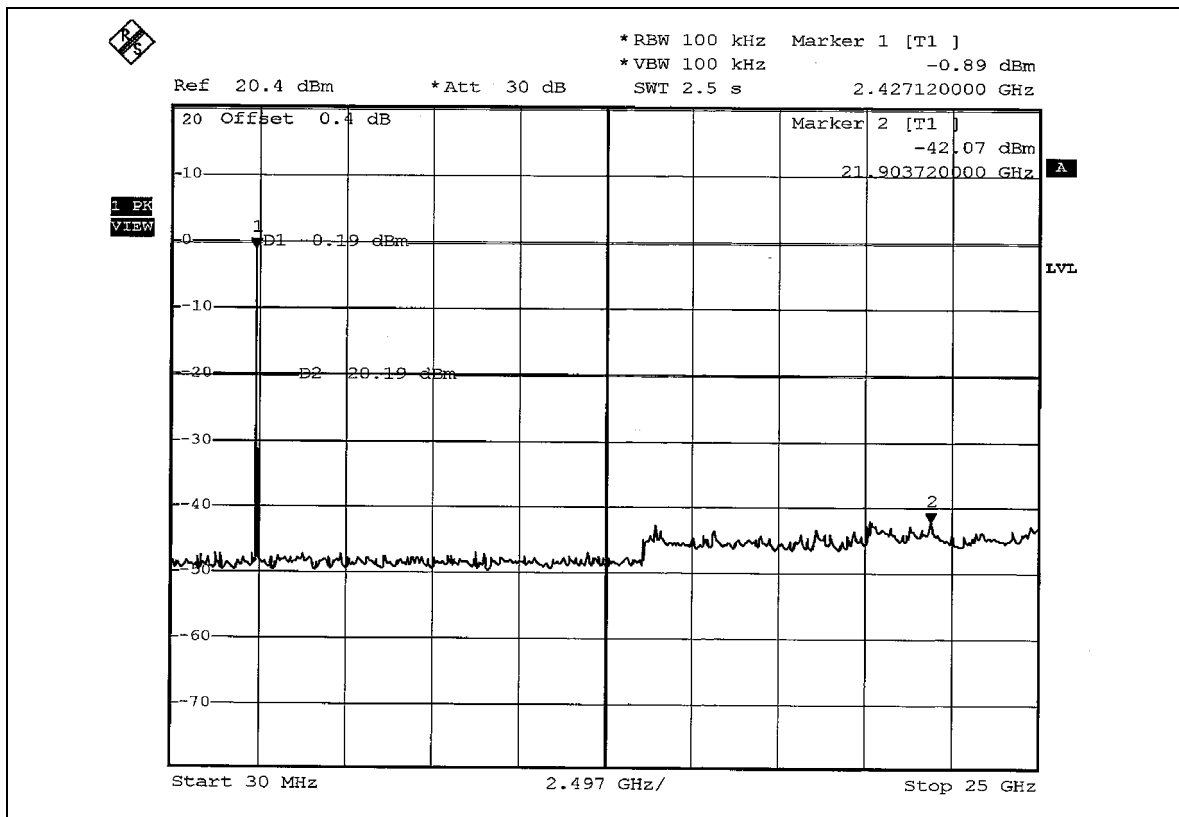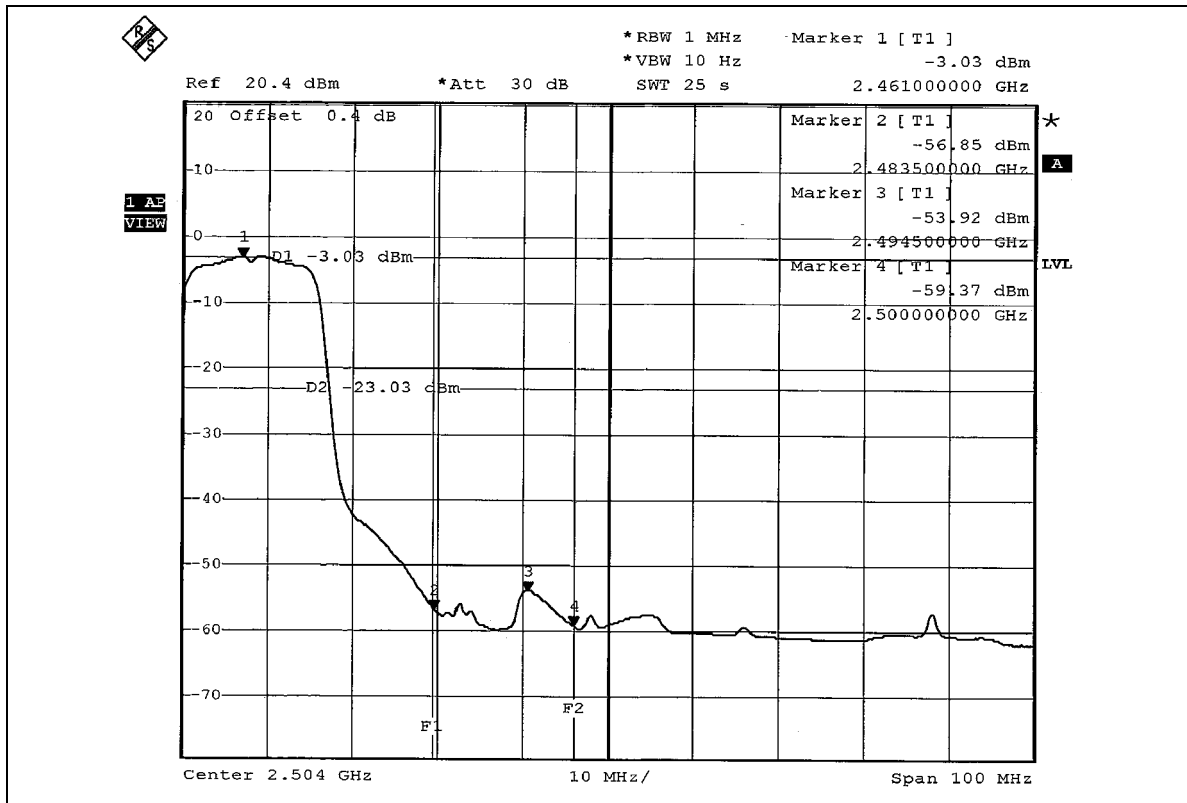



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is PIFA antenna with UFL connector. The maximum Gain of the antenna is 2.15dBi.



5. TEST TYPES AND RESULTS (802.11a 5725~5850MHz Band)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
- The lower limit shall apply at the transition frequencies.
 - The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 - All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 06, 2005
RF signal cable Woken	5D-FB	Cable-HyC02-01	Jan. 09, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 20, 2006
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 20, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
- The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 - The test was performed in HwaYa Shielded Room 3.
 - The VCCI Site Registration No. is C-2047.




5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) was not recorded.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

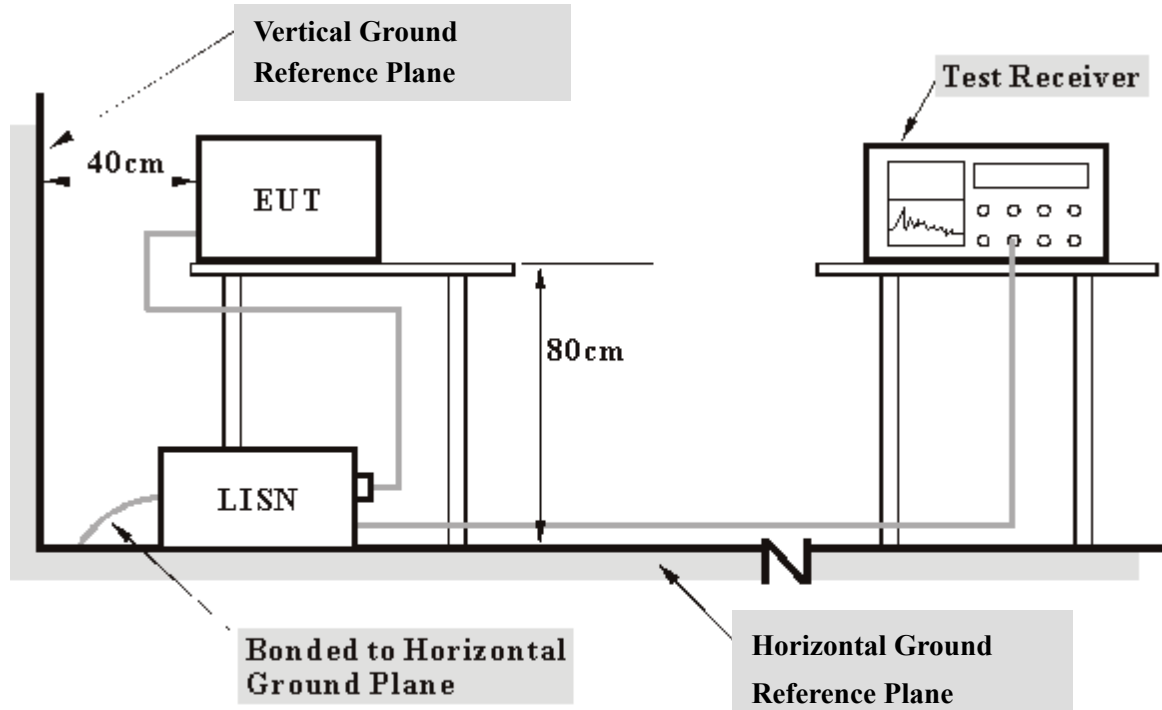

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6




5.1.7 TEST RESULTS

Conducted Worst-Case Data (Power from AC Adapter PA-1900-03)

EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	PHASE	Line 1
CHANNEL	Channel 3	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.170	0.10	45.58	20.86	45.68	20.96	64.98
2	0.185	0.10	43.44	-	43.54	-	64.25	54.25	-20.71	-
3	0.560	0.13	26.39	-	26.52	-	56.00	46.00	-29.48	-
4	0.998	0.20	25.32	-	25.52	-	56.00	46.00	-30.48	-
5	1.730	0.20	25.20	-	25.40	-	56.00	46.00	-30.60	-
6	5.527	0.23	20.73	-	20.96	-	60.00	50.00	-39.04	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

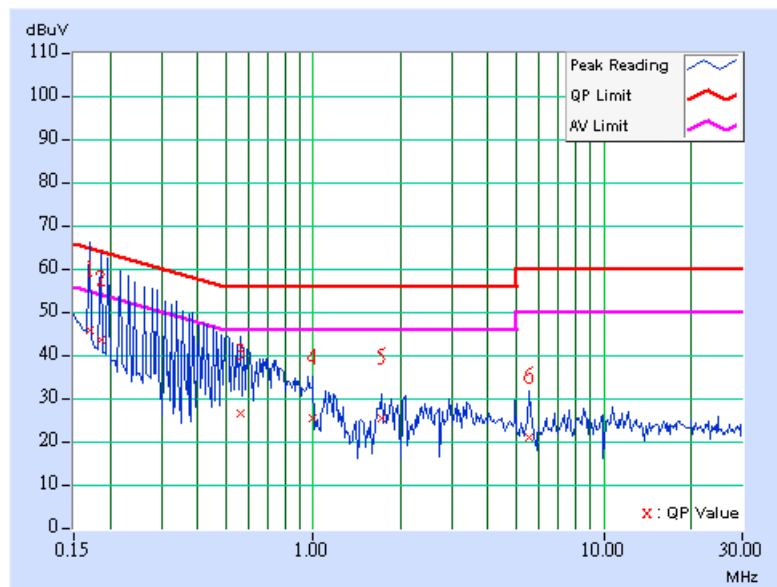




EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	PHASE	Line 2
CHANNEL	Channel 3	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.177	0.10	43.05	-	43.15	-	64.61
2	0.220	0.10	39.68	-	39.78	-	62.81	52.81	-23.03	-
3	0.509	0.12	29.80	-	29.92	-	56.00	46.00	-26.08	-
4	0.927	0.19	23.45	-	23.64	-	56.00	46.00	-32.36	-
5	1.500	0.20	18.45	-	18.65	-	56.00	46.00	-37.35	-
6	9.703	0.39	18.97	-	19.36	-	60.00	50.00	-40.64	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

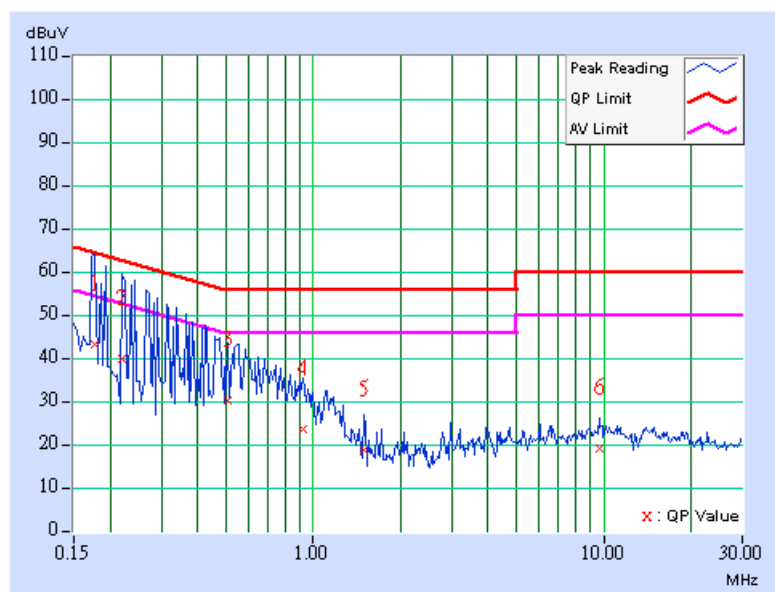




Conducted Worst-Case Data (Power from AC Adapter PA-1650-01)

EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	PHASE	Line 1
CHANNEL	Channel 3	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.201	0.10	43.96	36.02	44.06	36.12	63.58
2	0.265	0.10	40.09	-	40.19	-	61.28	51.28	-21.09	-
3	0.334	0.10	34.96	-	35.06	-	59.36	49.36	-24.30	-
4	1.461	0.20	31.02	-	31.22	-	56.00	46.00	-24.78	-
5	4.314	0.21	29.35	-	29.56	-	56.00	46.00	-26.44	-
6	19.316	0.75	32.39	-	33.14	-	60.00	50.00	-26.86	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

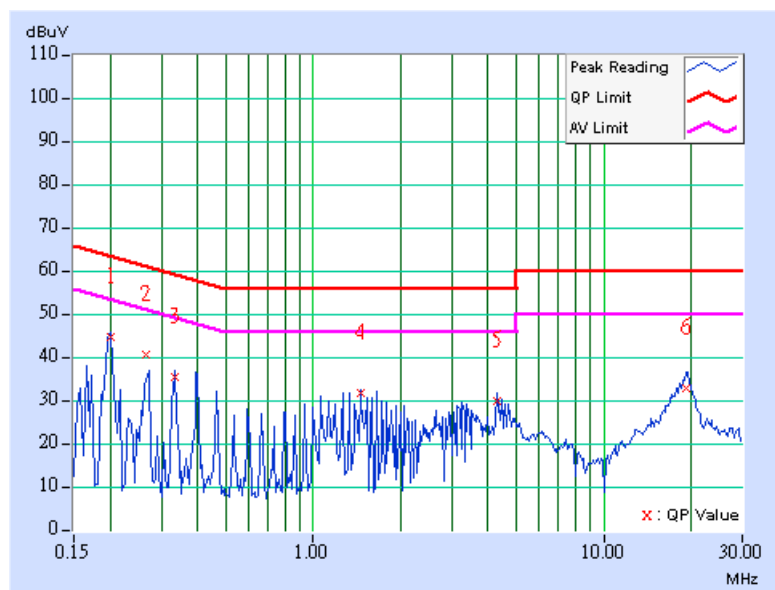




EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	PHASE	Line 2
CHANNEL	Channel 3	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.201	0.10	44.52	36.43	44.62	36.53	63.58
2	0.267	0.10	40.14	-	40.24	-	61.21	51.21	-20.97	-
3	0.334	0.10	35.77	-	35.87	-	59.35	49.35	-23.48	-
4	1.461	0.20	31.65	-	31.85	-	56.00	46.00	-24.15	-
5	3.520	0.20	26.57	-	26.77	-	56.00	46.00	-29.23	-
6	19.184	0.75	31.39	-	32.14	-	60.00	50.00	-27.86	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

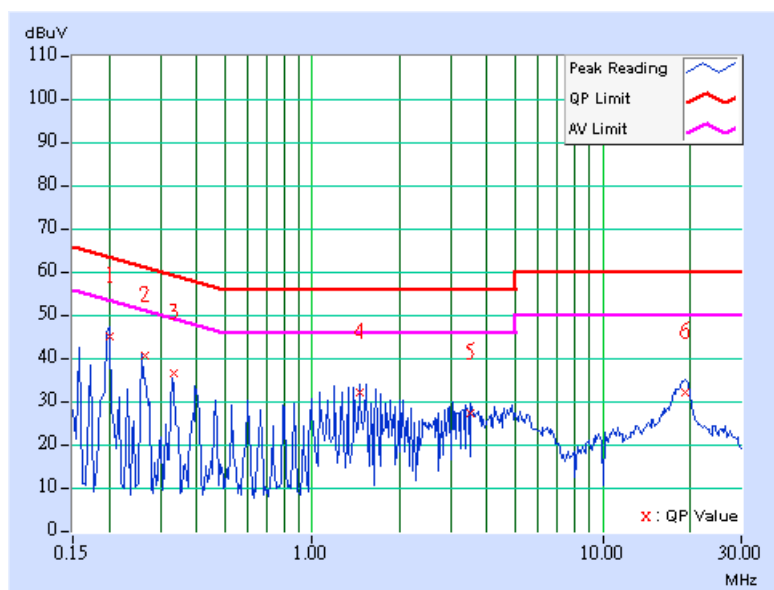



5.2 RADIATED EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



5.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	May. 19, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 21, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Jun. 01, 2006
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 17, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10633	Nov. 09, 2005
Preamplifier Agilent	8449B	3008A01964	Nov. 06, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218183/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218195/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 2.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The VCCI Site Registration No. is R-237.
 5. The IC Site Registration No. is IC4924-3.



5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation

5.2.5 TEST SETUP

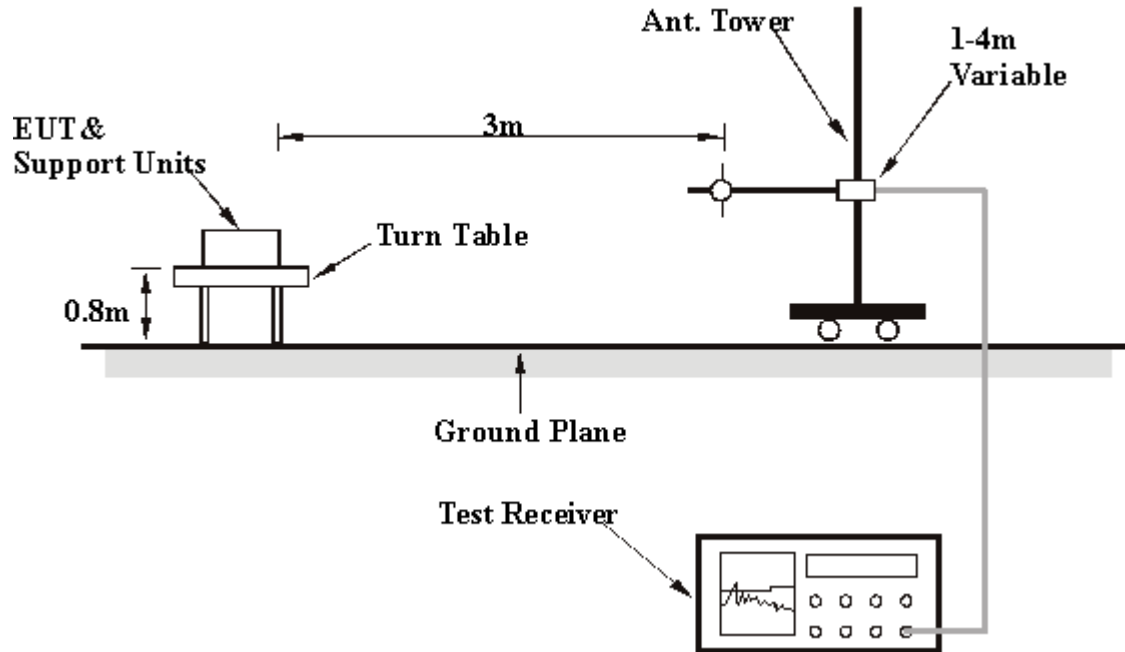

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



5.2.7 TEST RESULTS

Below 1GHz Worst-Case Data (Power from AC Adapter PA-1900-03)

EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 3	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	26deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	151.79	34.96 QP	43.50	-8.54	2.00 H	328	20.51	14.45
2	192.74	39.50 QP	43.50	-4.00	1.50 H	82	27.82	11.69
3	278.97	39.13 QP	46.00	-6.87	1.00 H	274	25.25	13.88
4	368.42	34.03 QP	46.00	-11.97	1.00 H	310	18.30	15.73
5	500.99	36.95 QP	46.00	-9.05	2.00 H	76	18.62	18.33
6	798.46	37.69 QP	46.00	-8.31	1.00 H	40	14.37	23.33

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	137.78	35.36 QP	43.50	-8.14	1.00 V	274	21.31	14.05
2	206.76	35.34 QP	43.50	-8.16	2.00 V	118	24.07	11.26
3	277.89	38.88 QP	46.00	-7.12	2.00 V	178	25.04	13.84
4	415.84	37.49 QP	46.00	-8.51	1.00 V	358	20.70	16.79
5	502.07	37.14 QP	46.00	-8.86	1.00 V	358	18.78	18.35
6	800.61	36.80 QP	46.00	-9.20	1.50 V	352	13.46	23.34

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value


Below 1GHz Worst-Case Data (Power from AC Adapter PA-1650-01)

EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 3	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	26deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	190.59	39.42 QP	43.50	-4.08	2.00 H	82	27.56	11.86
2	222.92	34.62 QP	46.00	-11.38	1.50 H	34	22.88	11.74
3	278.97	39.13 QP	46.00	-6.87	1.00 H	46	25.25	13.88
4	368.42	33.81 QP	46.00	-12.19	1.00 H	178	18.07	15.73
5	500.99	36.24 QP	46.00	-9.76	2.00 H	76	17.91	18.33
6	800.61	39.72 QP	46.00	-6.28	1.00 H	10	16.38	23.34

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	139.93	34.39	43.50	-9.11	1.00 V	76	20.20	14.19
2	211.07	35.53	43.50	-7.97	1.00 V	106	24.17	11.36
3	278.97	39.13	46.00	-6.87	2.00 V	160	25.25	13.88
4	418.00	37.26	46.00	-8.74	1.00 V	352	20.41	16.85
5	500.99	36.44	46.00	-9.56	1.00 V	16	18.11	18.33
6	802.77	37.72	46.00	-8.28	1.00 V	10	14.36	23.36

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

802.11a OFDM modulation

EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 75%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3830.00	48.16 PK	74.00	-25.84	1.10 H	180	13.68	34.48
1	#3830.00	42.45 AV	54.00	-11.55	1.10 H	180	7.97	34.48
2	5725.00	63.79 PK	79.11	-15.32	1.10 H	163	26.23	37.56
3	*5745.00	99.11 PK			1.10 H	163	61.50	37.61
3	*5745.00	88.81 AV			1.10 H	163	51.20	37.61
4	#11490.00	54.56 PK	74.00	-19.44	1.08 H	208	7.43	47.13
4	#11490.00	41.10 AV	54.00	-12.90	1.08 H	208	-6.03	47.13

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3830.00	46.81 PK	74.00	-27.19	1.10 V	187	12.33	34.48
1	#3830.00	37.60 AV	54.00	-16.40	1.10 V	187	3.12	34.48
2	5725.00	65.12 PK	77.79	-12.67	1.15 V	257	27.56	37.56
3	*5745.00	97.79 PK			1.15 V	257	60.18	37.61
3	*5745.00	87.29 AV			1.15 V	257	49.68	37.61
4	#11490.00	54.81 PK	74.00	-19.19	1.05 V	152	7.68	47.13
4	#11490.00	41.88 AV	54.00	-12.12	1.05 V	152	-5.25	47.13

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 3	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 75%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3856.60	48.54 PK	74.00	-25.46	1.09 H	179	13.94	34.60
1	#3856.60	42.74 AV	54.00	-11.26	1.09 H	179	8.14	34.60
2	*5785.00	100.09 PK			1.00 H	246	62.38	37.71
2	*5785.00	89.35 AV			1.00 H	246	51.64	37.71
3	#11570.00	54.97 PK	74.00	-19.03	1.05 H	188	8.04	46.93
3	#11570.00	42.13 AV	54.00	-11.87	1.05 H	188	-4.80	46.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3856.60	46.37 PK	74.00	-27.63	1.10 V	188	11.77	34.60
1	#3856.60	39.15 AV	54.00	-14.85	1.10 V	188	4.55	34.60
2	*5785.00	97.51 PK			1.09 V	201	59.80	37.71
2	*5785.00	86.91 AV			1.09 V	201	49.20	37.71
3	#11570.00	55.25 PK	74.00	-18.75	1.05 V	164	8.32	46.93
3	#11570.00	42.59 AV	54.00	-11.41	1.05 V	164	-4.34	46.93

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247



EUT	notebook computer	MEASUREMENT DETAIL	
MODEL	TA1 (with Intel WM3B2915ABG)	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 5	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 75%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3883.30	49.88 PK	74.00	-24.12	1.05 H	167	15.16	34.72
1	#3883.30	46.06 AV	54.00	-7.94	1.05 H	167	11.34	34.72
2	*5825.00	99.92 PK			1.00 H	245	62.20	37.72
2	*5825.00	89.45 AV			1.00 H	245	51.73	37.72
3	5850.00	64.92 PK	79.92	-15.00	1.00 H	245	27.23	37.69
4	11650.00	54.87 PK	74.00	-19.13	1.10 H	205	7.94	46.93
4	11650.00	41.72 AV	54.00	-12.28	1.10 H	205	-5.21	46.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3883.30	46.85 PK	74.00	-27.15	1.10 V	204	12.13	34.72
1	#3883.30	41.61 AV	54.00	-12.39	1.10 V	204	6.89	34.72
2	*5825.00	98.09 PK			1.12 V	262	60.37	37.72
2	*5825.00	87.33 AV			1.12 V	262	49.61	37.72
3	5850.00	65.30 PK	78.09	-12.79	1.12 V	262	27.61	37.69
4	11650.00	54.93 PK	74.00	-19.07	1.12 V	161	8.00	46.93
4	11650.00	42.08 AV	54.00	-11.92	1.12 V	161	-4.85	46.93

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247



5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


5.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP

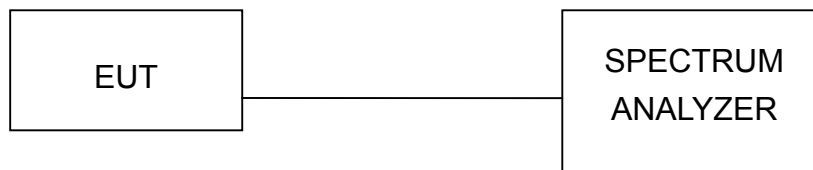

5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



5.3.7 TEST RESULTS


802.11a OFDM modulation

EUT	notebook computer	MODEL	TA1 (with Intel WM3B2915ABG)
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Jamison Chan		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	5745	16.36	0.5	PASS
3	5785	16.36	0.5	PASS
5	5825	16.36	0.5	PASS



CH 1

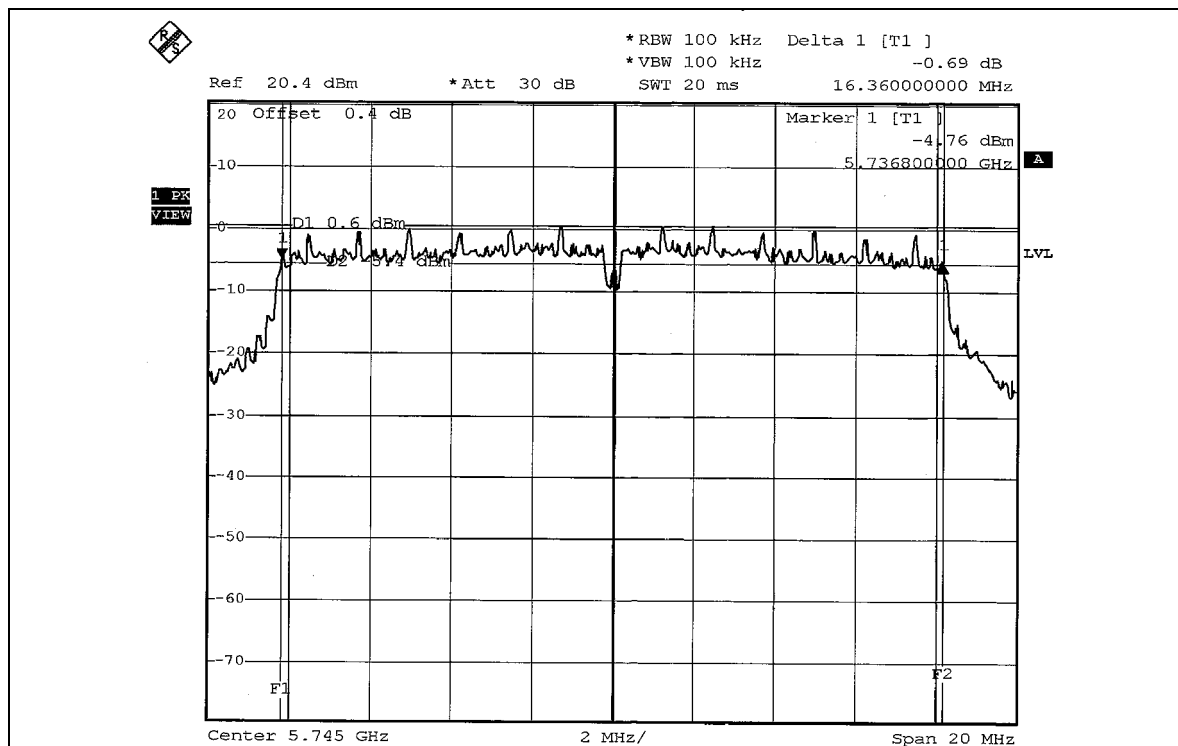


CH 3

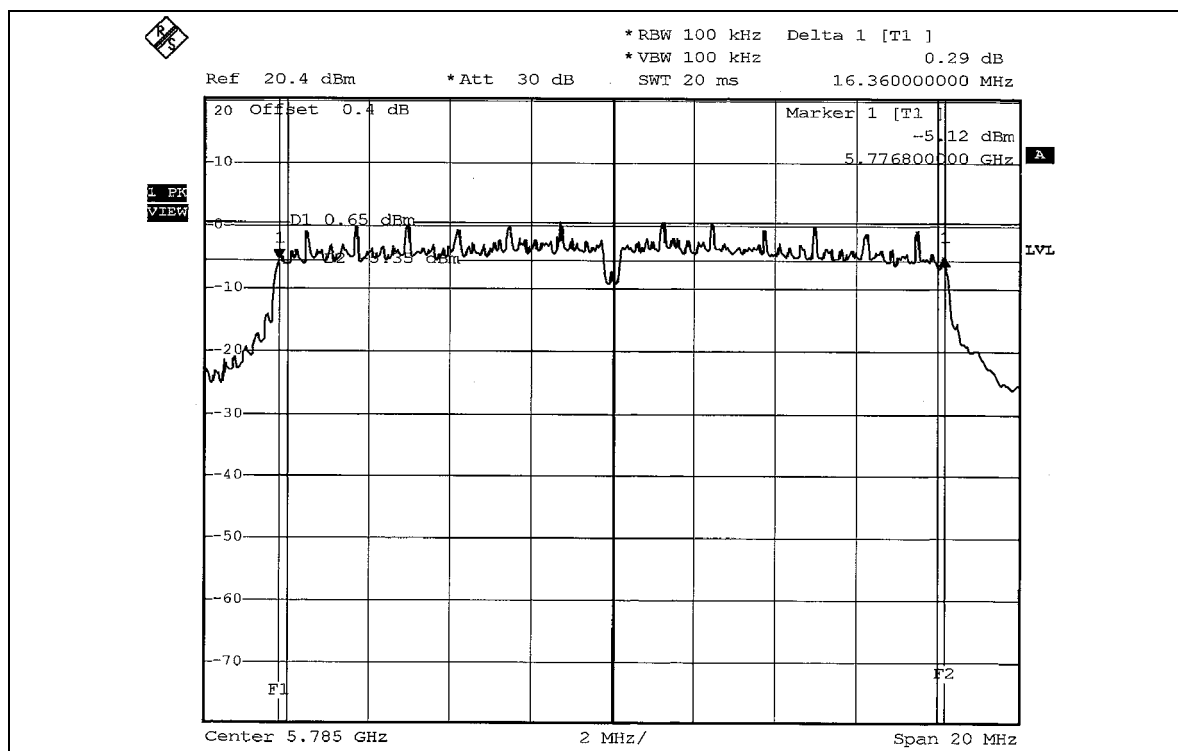



CH 5

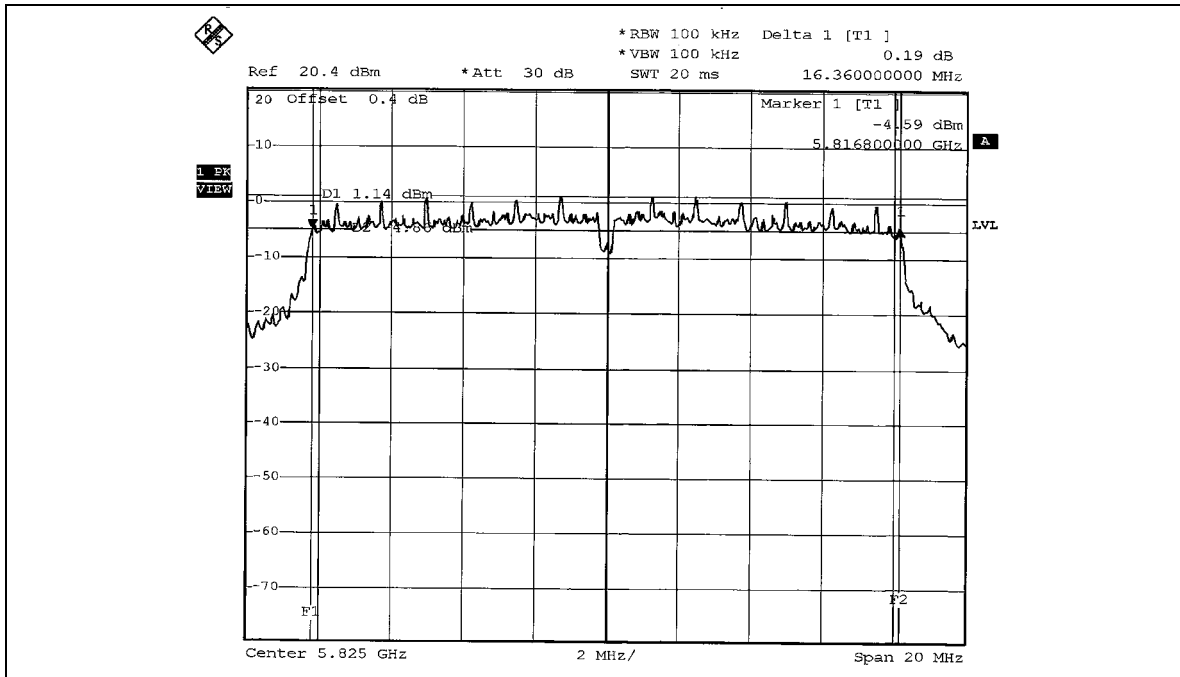



5.4 MAXIMUM PEAK OUTPUT POWER

5.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

5.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2005
TEKTRONIX OSCILLOSCOPE	TDS 1012	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA..

5.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator . The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation

5.4.5 TEST SETUP



5.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6



5.4.7 TEST RESULTS

802.11a OFDM modulation

EUT	notebook computer	MODEL	TA1 (with Intel WM3B2915ABG)
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Jamison Chan		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	5745	31.769	15.02	30	PASS
3	5785	31.696	15.01	30	PASS
5	5825	31.623	15.00	30	PASS



5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

5.5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5.5 TEST SETUP



5.5.6 EUT OPERATING CONDITION

Same as Item 5.3.6



5.5.7 TEST RESULTS


802.11a OFDM modulation

EUT	notebook computer	MODEL	TA1 (with Intel WM3B2915ABG)
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Jamison Chan		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5745	-14.53	8	PASS
3	5785	-14.39	8	PASS
5	5825	-14.43	8	PASS



CH 1

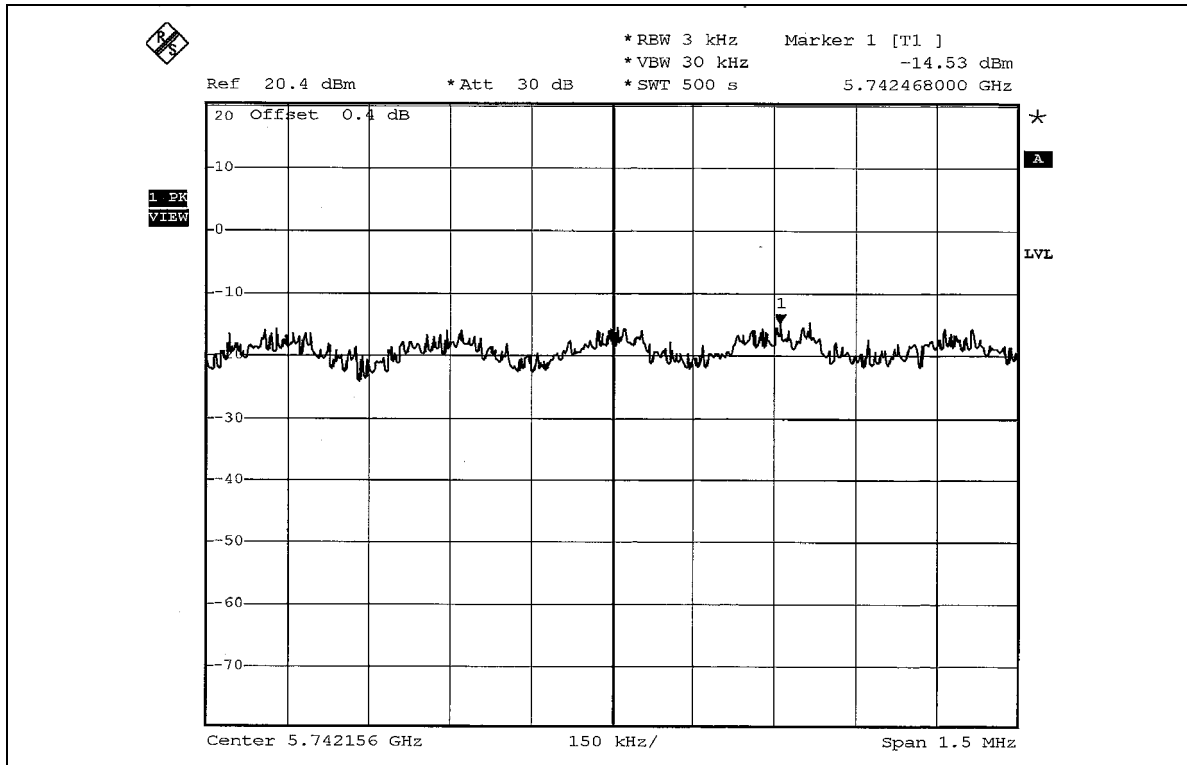


CH 3

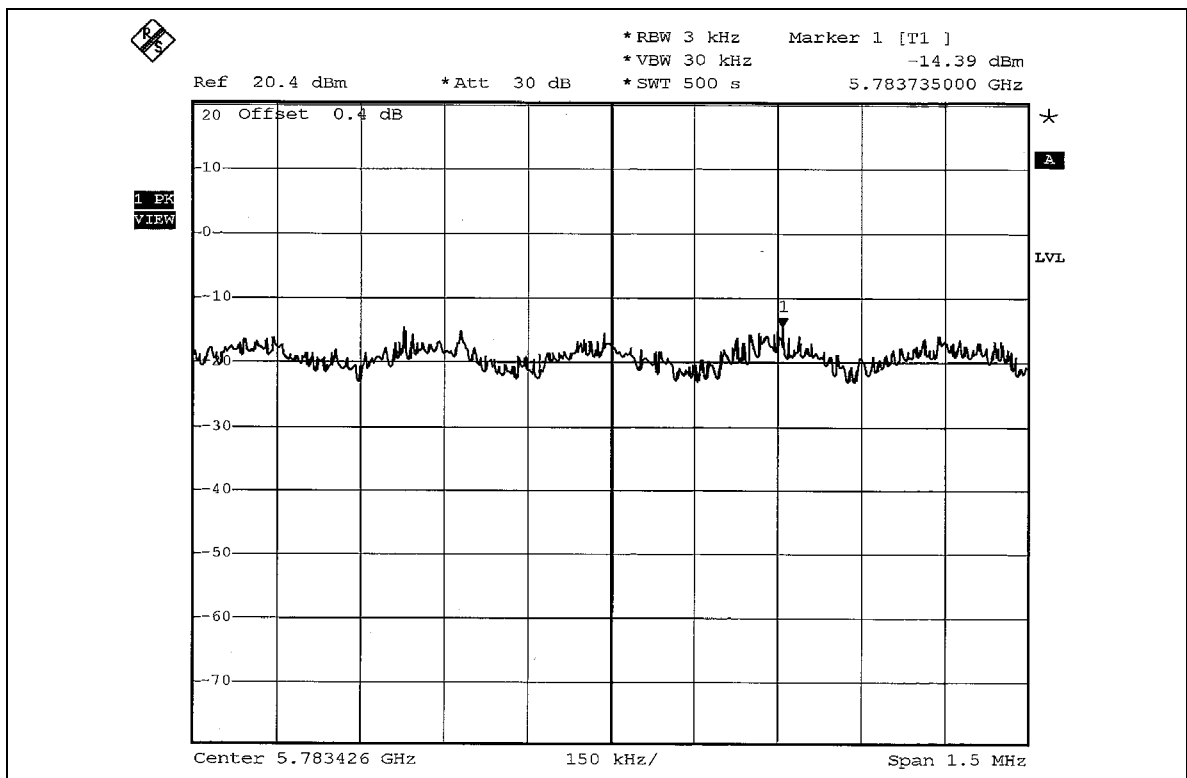



CH 5

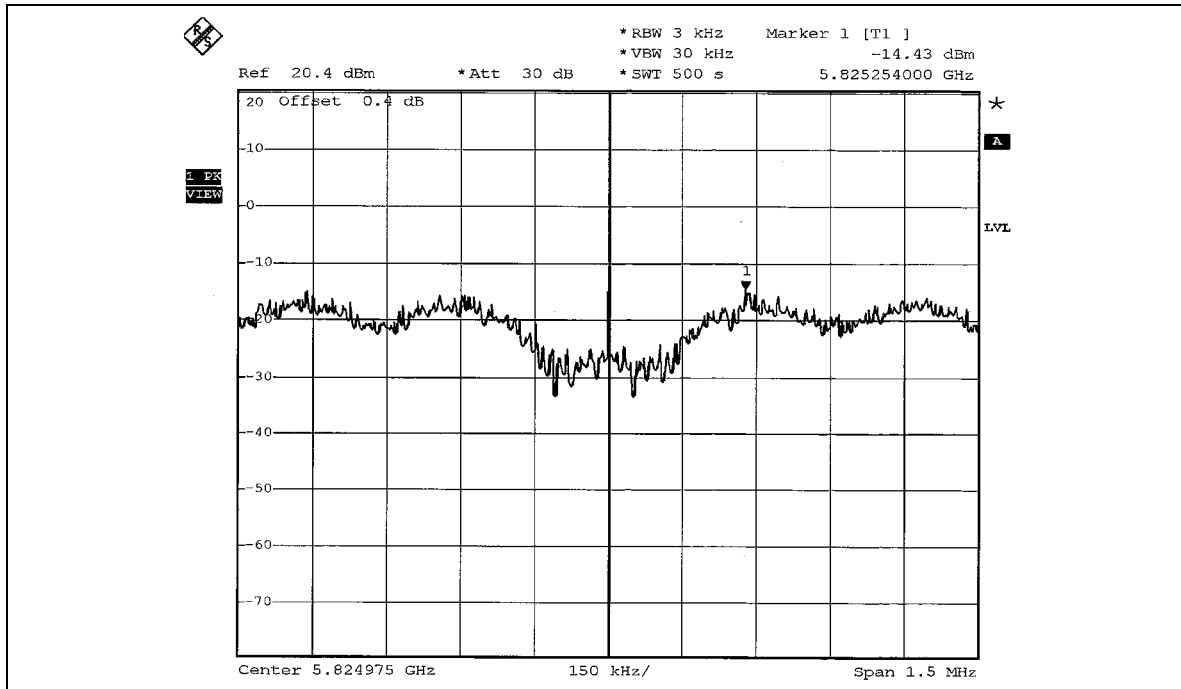



5.6 BAND EDGES MEASUREMENT

5.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

5.6.4 DEVIATION FROM TEST STANDARD

No deviation



5.6.5 EUT OPERATING CONDITION



Same as Item 5.9.6



5.6.6 TEST RESULTS



The spectrum plots are attached on the following pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).



802.11a OFDM modulation

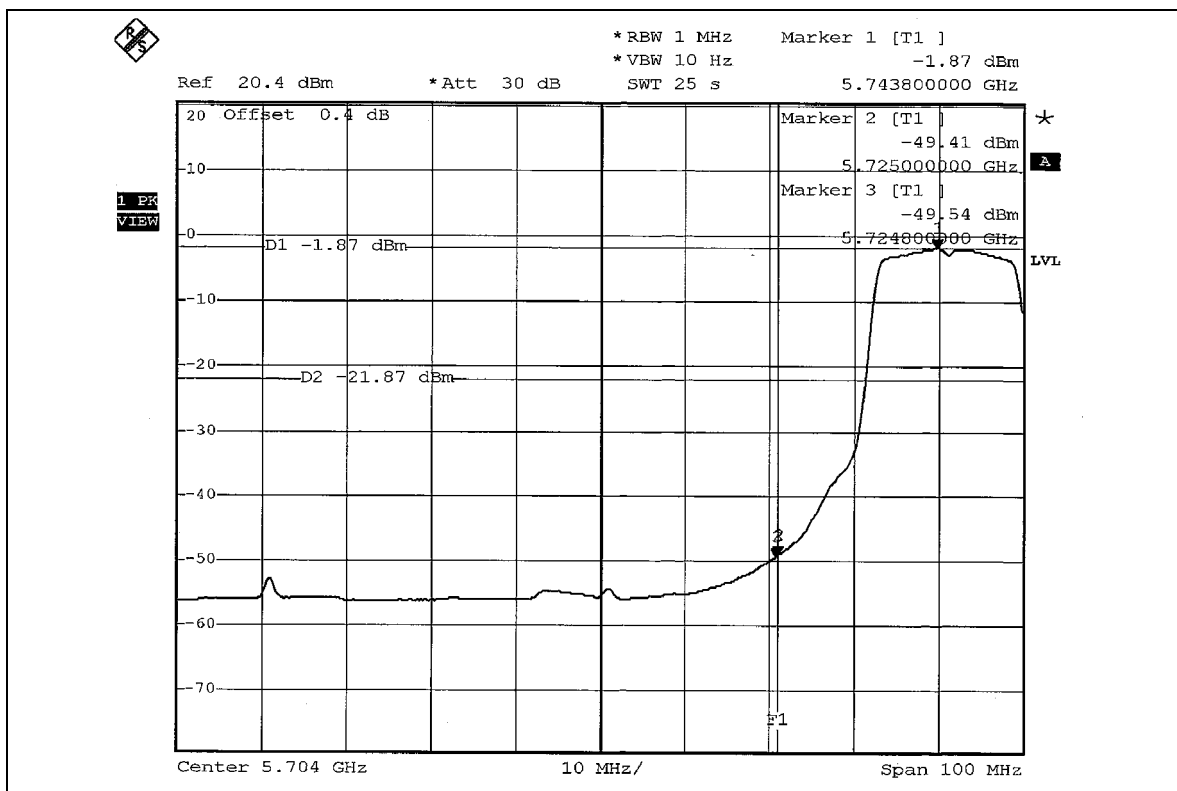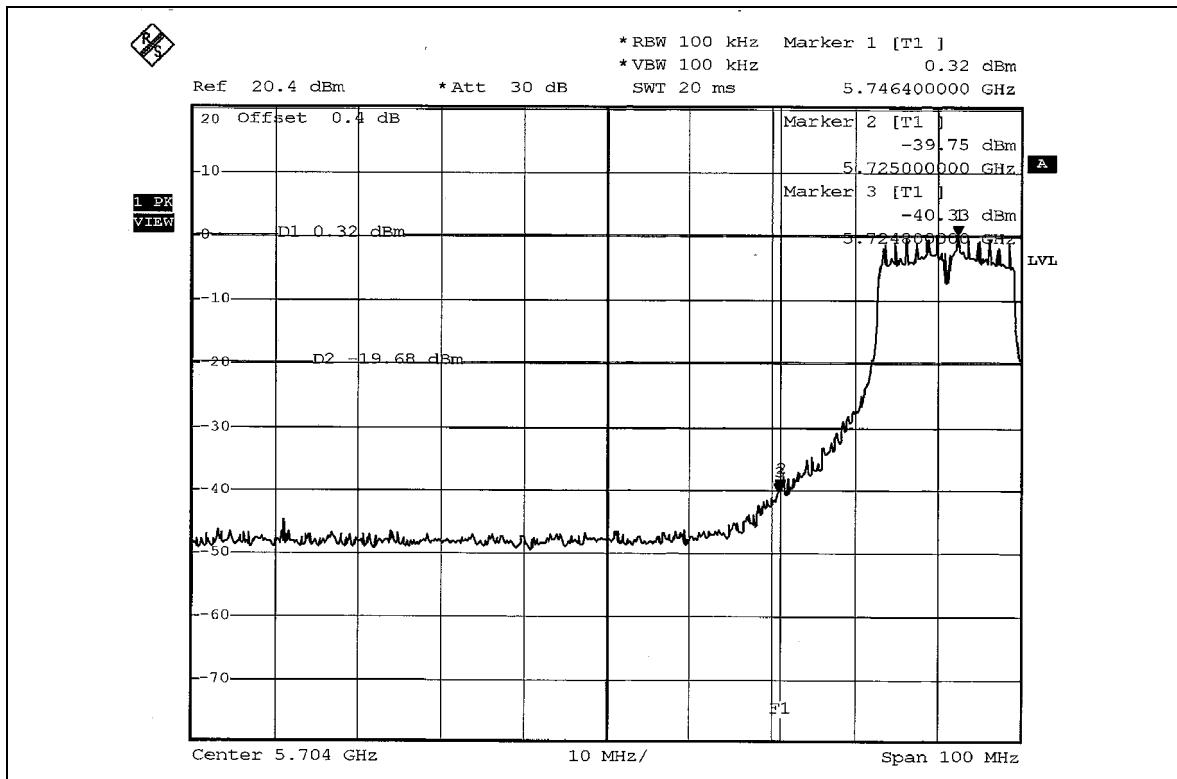

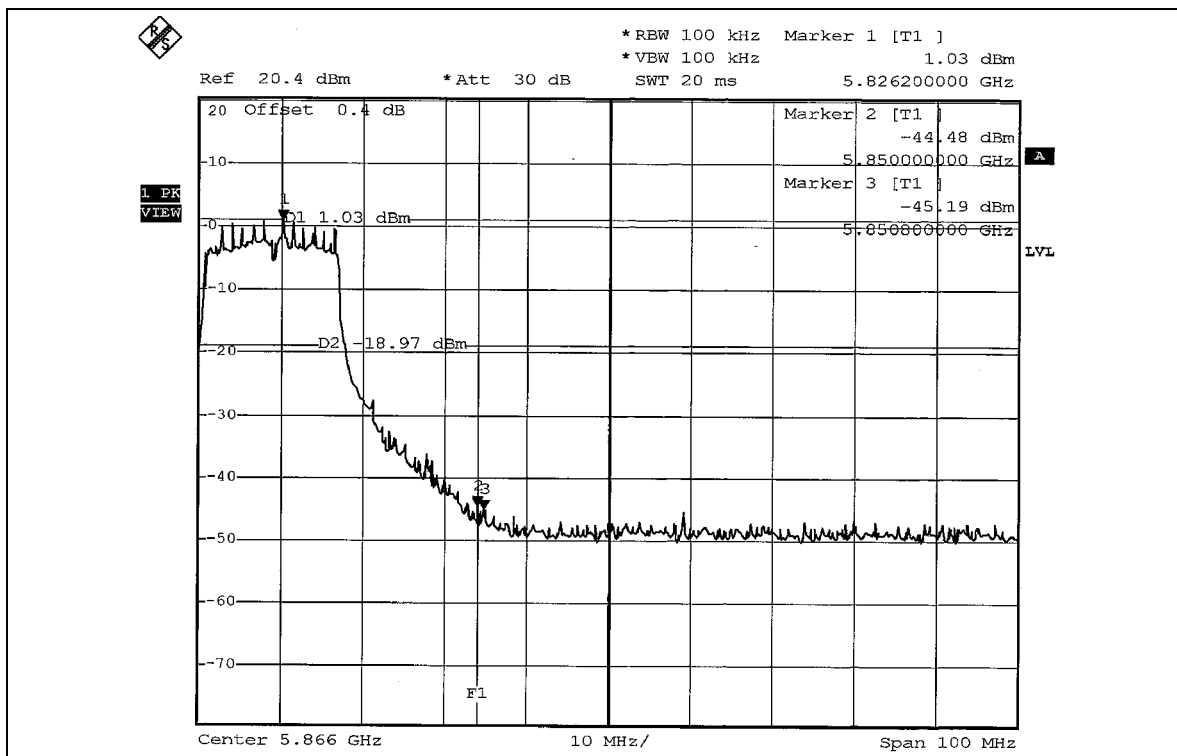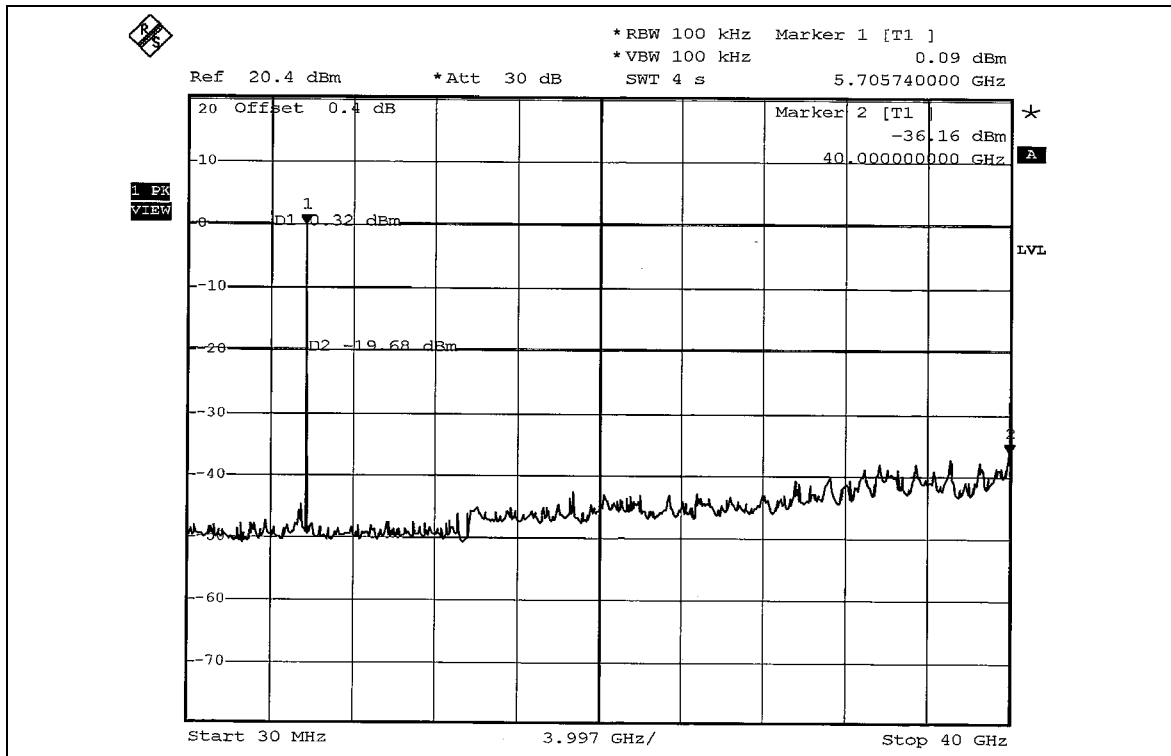

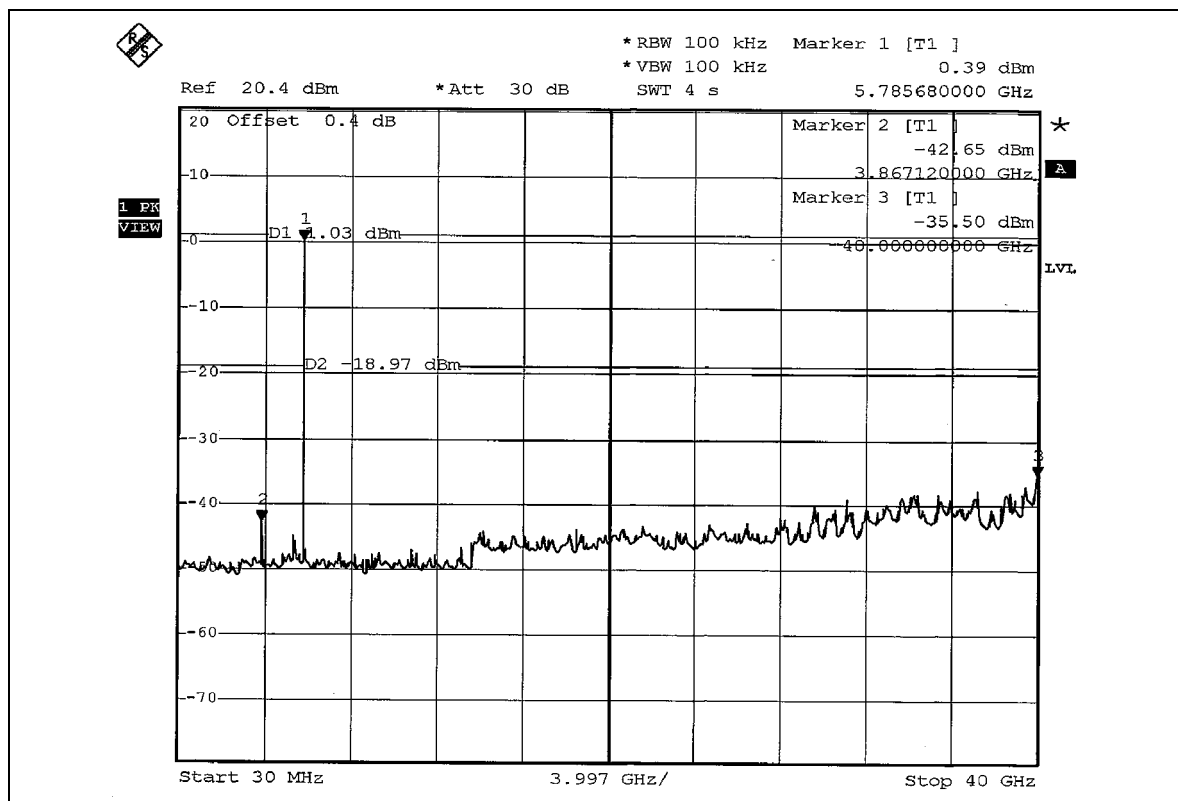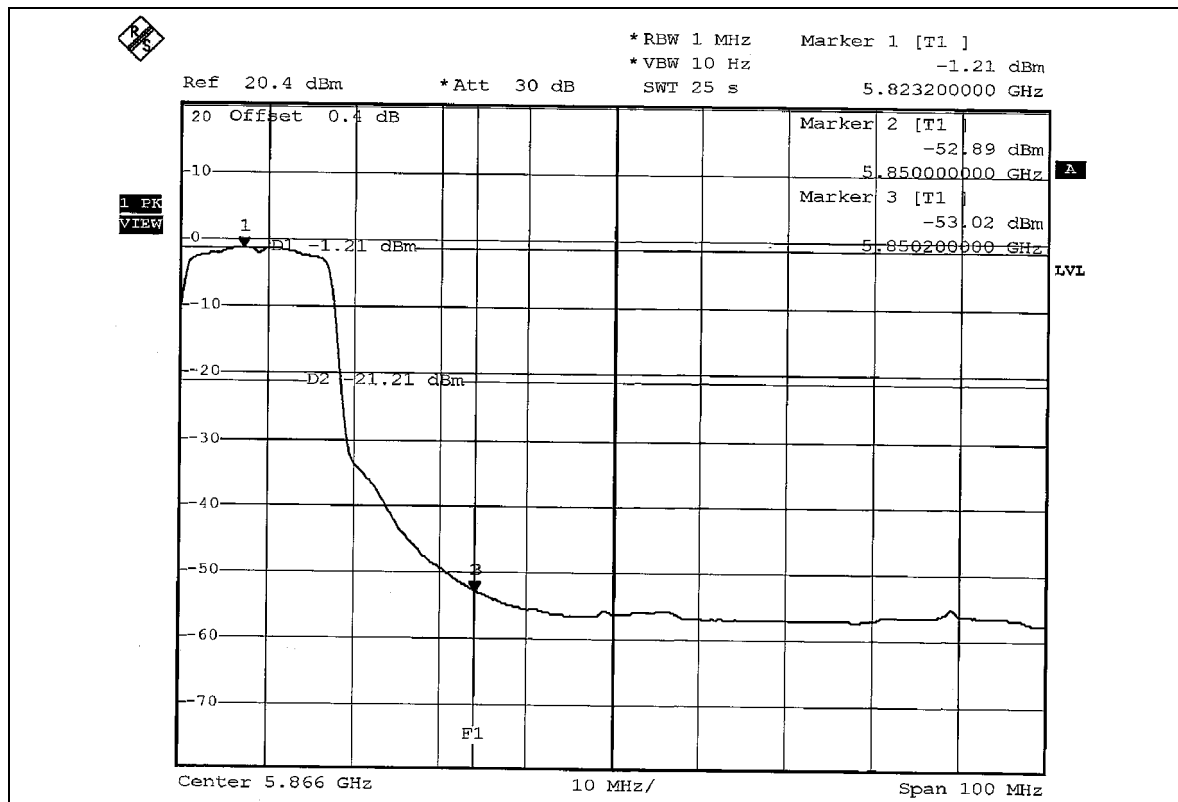



5.7 ANTENNA REQUIREMENT

5.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.



5.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is PIFA antenna with UFL connector. The maximum Gain of the antenna is 1.90dBi.


6. PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



Test Mode 1

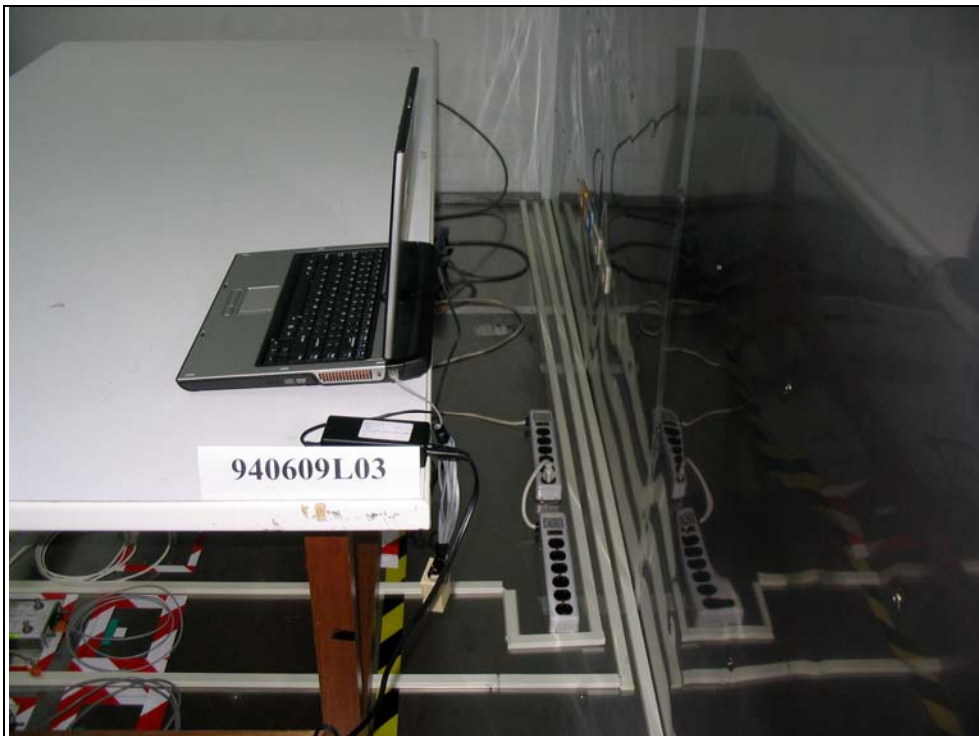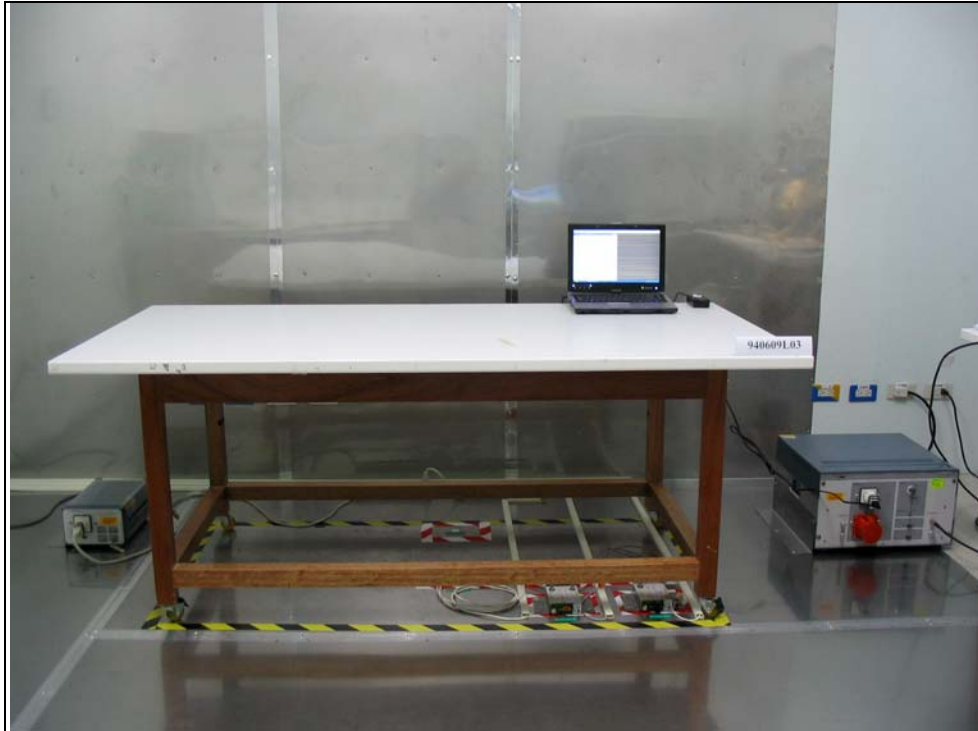


Test Mode 2

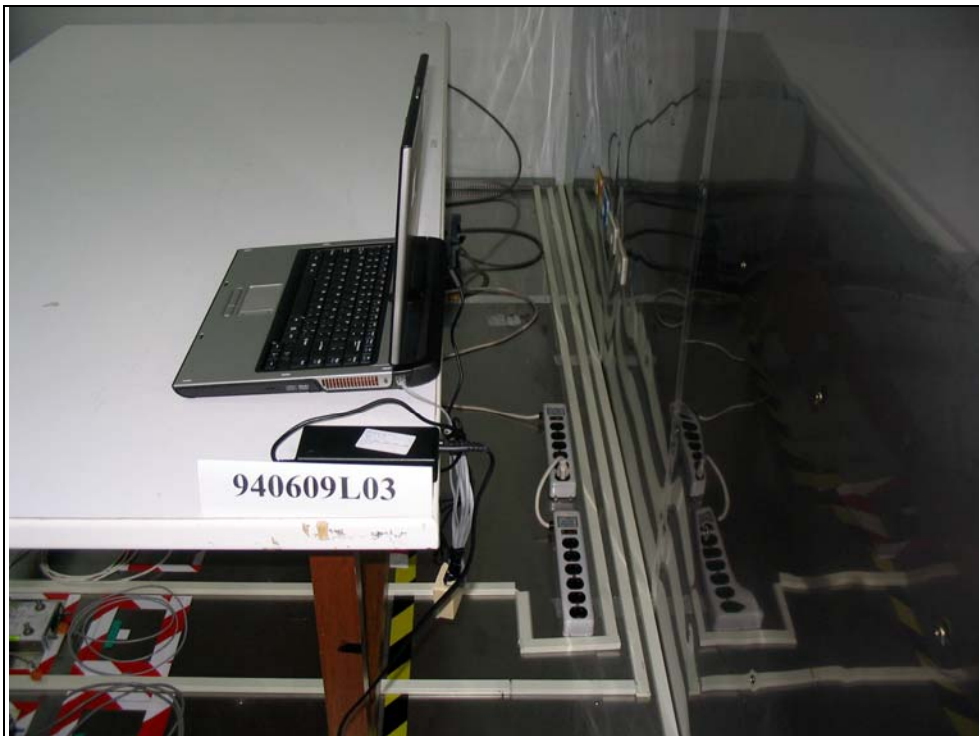

RADIATED EMISSION TEST
Test Mode 1

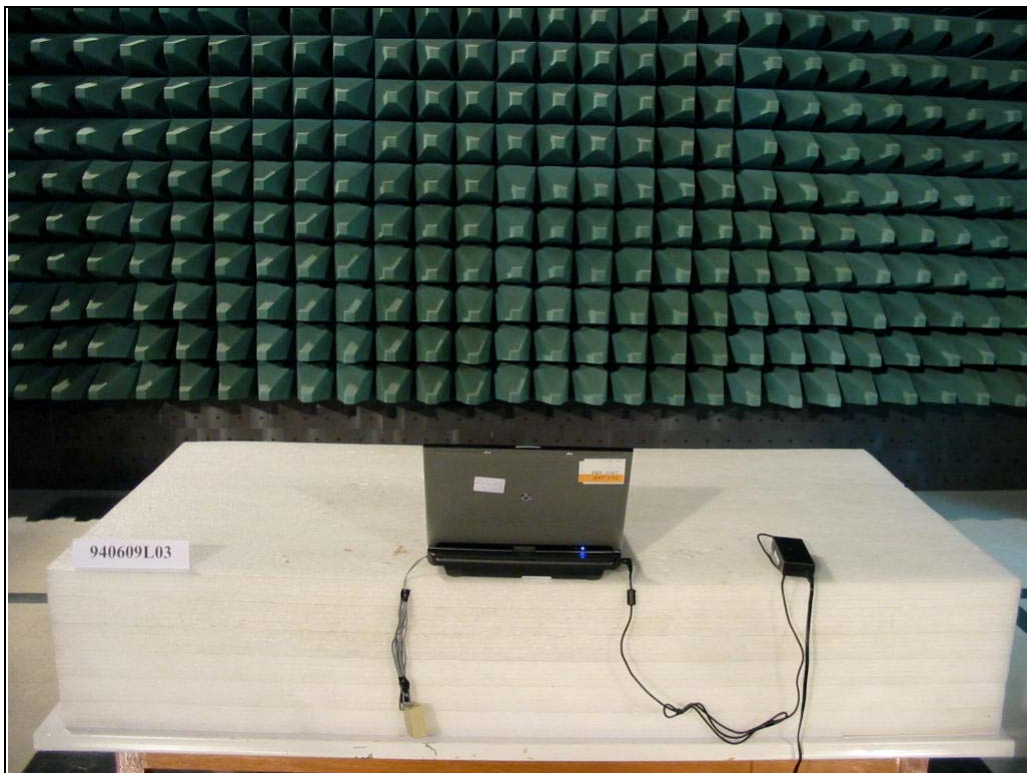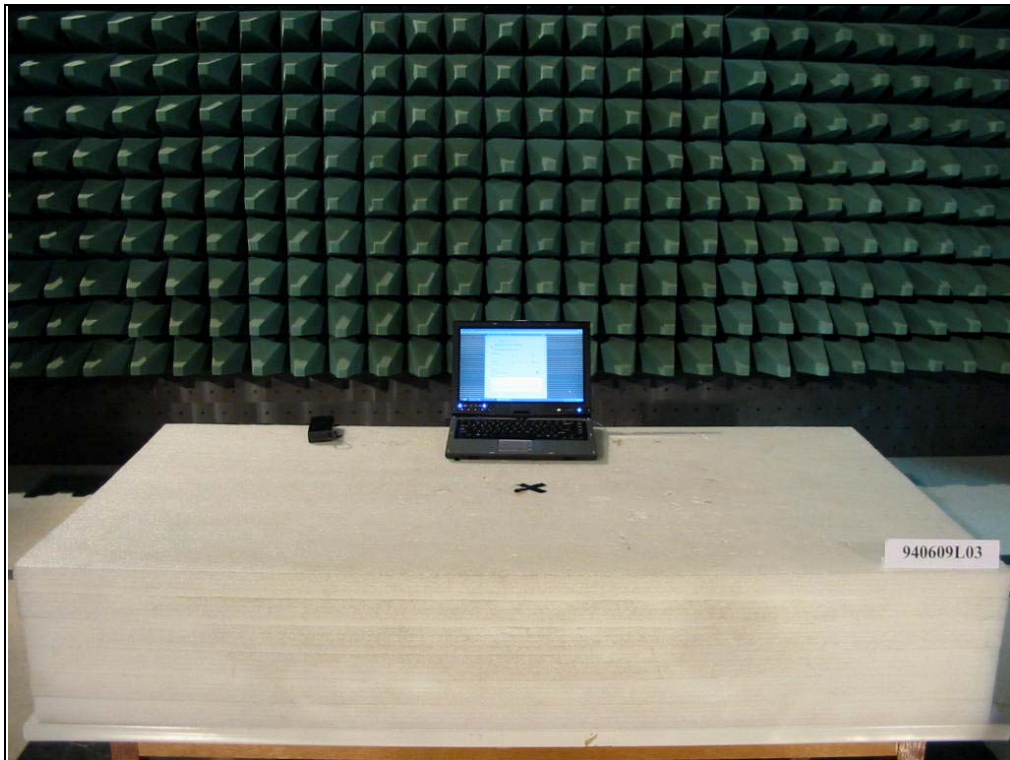

Test Mode 2

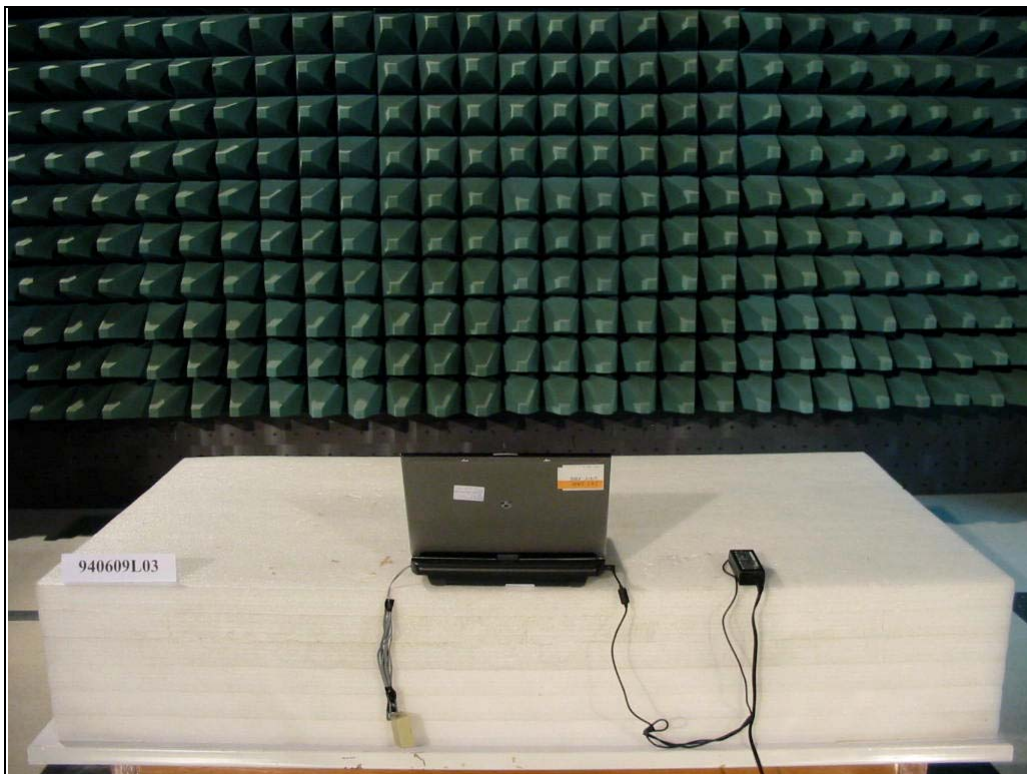



7. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also