

FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

IoT Gateway

Model:

XI*(*=0~9, A~Z or Blank), Cube

Trade Name: N/A

Issued to

Quanta Computer Inc.

No.188, Wenhua 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C.)

Issued by

Compliance Certification Services Inc.

No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)

<http://www.ccsrf.com>

service@ccsrf.com

Issued Date: January 14, 2016



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	January 14, 2016	Initial Issue	ALL	Becca Chen
01	January 20, 2016	<ol style="list-style-type: none">1. Added model no.: Cube2. Modify IEEE 802.11n HT 20MHz Peak Power3. Modify radiated emission setting states test.4. Modify ANSI C63.10:2013 to ANSI C63.10:2009.5. Modify Un-restricted Band Emissions data.	P1, P4, P5, P6, P11, P23, P40~P45	Becca Chen
02	January 26, 2016	<ol style="list-style-type: none">1. Modify PPSD data	P47~P53	Becca Chen

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION.....	5
3. TEST METHODOLOGY.....	6
3.1 EUT CONFIGURATION.....	6
3.2 EUT EXERCISE.....	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5 DESCRIPTION OF TEST MODES.....	8
4. INSTRUMENT CALIBRATION.....	9
4.1 MEASURING INSTRUMENT CALIBRATION.....	9
4.2 MEASUREMENT EQUIPMENT USED.....	9
4.3 MEASUREMENT UNCERTAINTY.....	10
5. FACILITIES AND ACCREDITATIONS.....	11
5.1 FACILITIES.....	11
5.2 EQUIPMENT.....	11
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	12
6. SETUP OF EQUIPMENT UNDER TEST.....	13
6.1 SETUP CONFIGURATION OF EUT.....	13
6.2 SUPPORT EQUIPMENT.....	13
7. FCC PART 15.247 REQUIREMENTS.....	14
7.1 6DB BANDWIDTH.....	14
7.2 PEAK POWER.....	22
7.3 AVERAGE POWER.....	24
7.4 BAND EDGES MEASUREMENT.....	26
7.5 PEAK POWER SPECTRAL DENSITY.....	46
7.6 RADIATED EMISSIONS.....	54
7.7 POWERLINE CONDUCTED EMISSIONS.....	87
APPENDIX I PHOTOGRAPHS OF TEST SETUP.....	90
APPENDIX 1 - PHOTOGRAPHS OF EUT	

1. TEST RESULT CERTIFICATION

Applicant: Quanta Computer Inc.
 No.188, Wenhua 2nd Rd., Guishan Dist., Taoyuan City 33377,
 Taiwan (R.O.C.)

Equipment Under Test: IoT Gateway

Trade Name: N/A

Model: XI*(*=0~9, A~Z or Blank), Cube

Date of Test: January 7 ~ 11, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:




 Miller Lee
 Manager
 Compliance Certification Services Inc.

 Angel Cheng
 Section Manager
 Compliance Certification Services Inc.

2. EUT DESCRIPTION

Product	IoT Gateway
Trade Name	N/A
Model Number	XI*(*=0~9, A~Z or Blank), Cube
Model Discrepancy	All the above models are identical except for the designation of model numbers. The suffix of (*=0~9, A~Z or Blank) on model number is just for marketing purpose only.
Received Date	December 28, 2015
EUT Power Rating	Powered from host device: I/P: 100-240Vac, 0.2A, 50/60Hz O/P: 5Vdc, 0.5A
Frequency Range	2412 ~ 2462 MHz
Transmit Power	IEEE 802.11b mode: 18.78 dBm IEEE 802.11g mode: 23.96 dBm IEEE 802.11n HT 20 MHz mode: 23.75 dBm
Modulation Technique	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) IEEE 802.11n HT 20 MHz mode: OFDM (6.5, 7.2, 13, 14.4, 19.5, 21.7, 26, 28.9, 39, 43.3, 52, 57.8, 58.5, 65.0, 72.2, Mbps)
Number of Channels	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT 20 MHz mode: 11 Channels
Antenna Specification	Gain: 2.19 dBi
Antenna Designation	Monopole-coupled Antenna

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **HFSX11** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2009 and FCC CFR 47 Part 15.207, 15.209, 15.247, KDB558074.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

According to the requirements in ANSI C63.10: 2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turntable, Above 1 GHz is 1.5m high and below 1 GHz is 0.8m high above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in ANSI C63.10: 2009.

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT (model: XI1) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Y axis) and the worst case was recorded.

4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	12/07/2016
Thermostatic/Humidity Chamber	TAICHY	MHG-150LF	930619	10/07/2016
AC Power Source	EXTECH	6205	1140845	N.C.R
DC Power Supply	ABM	8301HD	D011531	N.C.R
Power Meter	Anritsu	ML2495A	1012009	07/07/2016
Power Sensor	Anritsu	MA2411A	0917072	07/07/2016
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40	101073	07/19/2016

Wugu 966 Chamber A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510268	01/25/2016
EMI Test Receiver	R&S	ESCI	100064	06/03/2016
Bilog Antenna	Sunol Sciences	JB3	A030105	08/05/2016
Horn Antenna	EMCO	3117	00055165	01/26/2016
Horn Antenna	EMCO	3116	26370	12/24/2016
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Pre-Amplifier	MITEQ	1652-3000	1490939	08/09/2016
Pre-Amplifier	EMC	EMC 012635	980151	06/04/2016
Pre-Amplifier	MITEQ	AMF-6F-260400-40-8P	985646	12/24/2016
Coaxial Cable	Huber+Suhner	102	29212/2	12/24/2016
Coaxial Cable	Huber+Suhner	102	29406/2	12/24/2016
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission room # B				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	101073	09/08/2016
LISN	R&S	ENV216	101054	06/06/2016
LISN	SCHWARZBECK	NSLK 8127	8127-541	11/22/2016
Capacitive Voltage Probe	FCC	F-CVP-1	100185	03/12/2016
Test S/W	CCS-3A1-CE			

Note:

- The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
- N.C.R. = No Calibration Request.

4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2575
3M Semi Anechoic Chamber / <200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.139, Wugong Rd., Wugu Dist., New Taipei City 24886, Taiwan (R.O.C.)
Tel: 886-2-2298-4086 / Fax: 886-2-2298-1470
- No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN,
R.O.C.
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10: 2009 and CISPR Publication 22.

5.2 EQUIPMENT




Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1309) to perform FCC Part 15 measurements	 FCC MRA: TW1309
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.

6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Notebook PC	TOSHIBA	Satellite M840	N/A	PPD-AR5B225	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. Set the RBW=100kHz the emission bandwidth, VBW $\geq 3 \times$ RBW, Detector = Peak, Trace mode = max hold, Sweep = auto couple. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
2412	9.0384	>500	PASS
2437	9.4711		PASS
2462	10.000		PASS

Test mode: IEEE 802.11g mode


Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
2412	16.0576	>500	PASS
2437	16.2980		PASS
2462	16.0576		PASS

Test mode: IEEE 802.11n HT 20 MHz mode

Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
2412	17.5480	>500	PASS
2437	17.5961		PASS
2462	17.5961		PASS

IEEE 802.11b mode / 2412 MHz


6dB Bandwidth

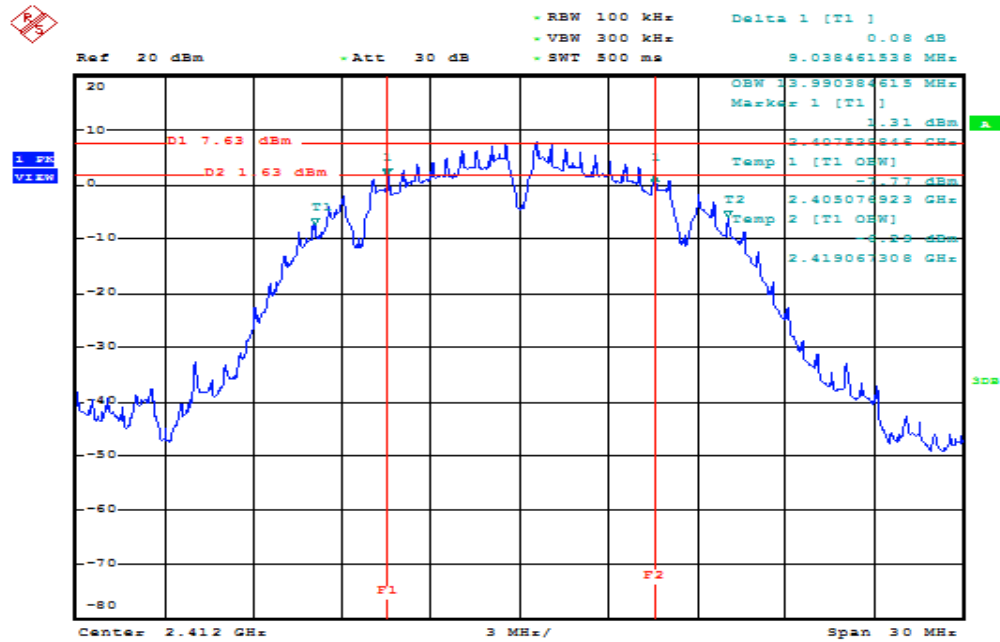

Date: 7.JAN.2016 14:18:13

IEEE 802.11b mode / 2437 MHz


6dB Bandwidth

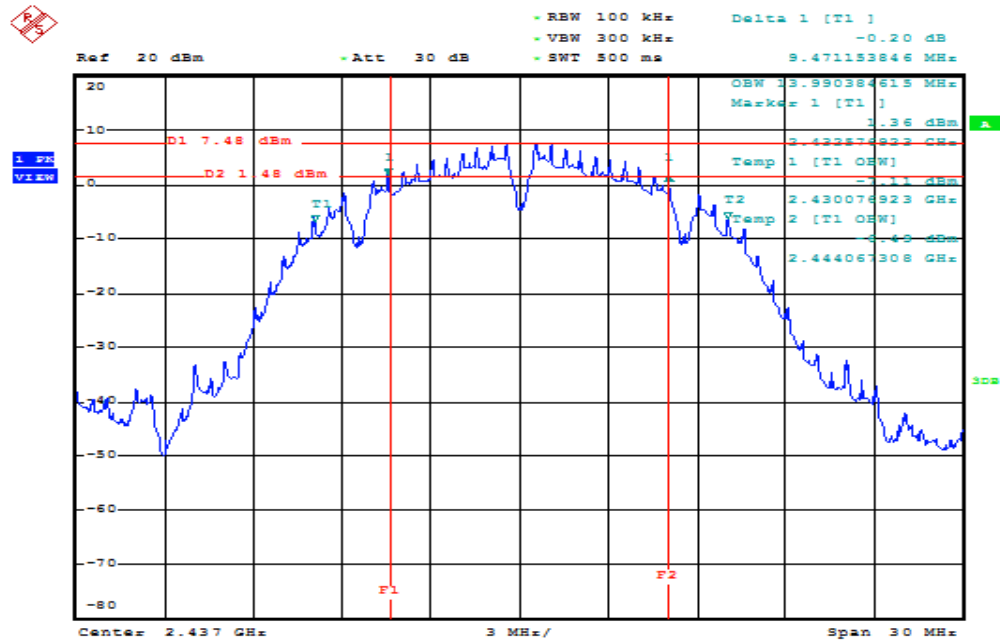

Date: 7.JAN.2016 14:24:38


IEEE 802.11b mode / 2462 MHz

6dB Bandwidth

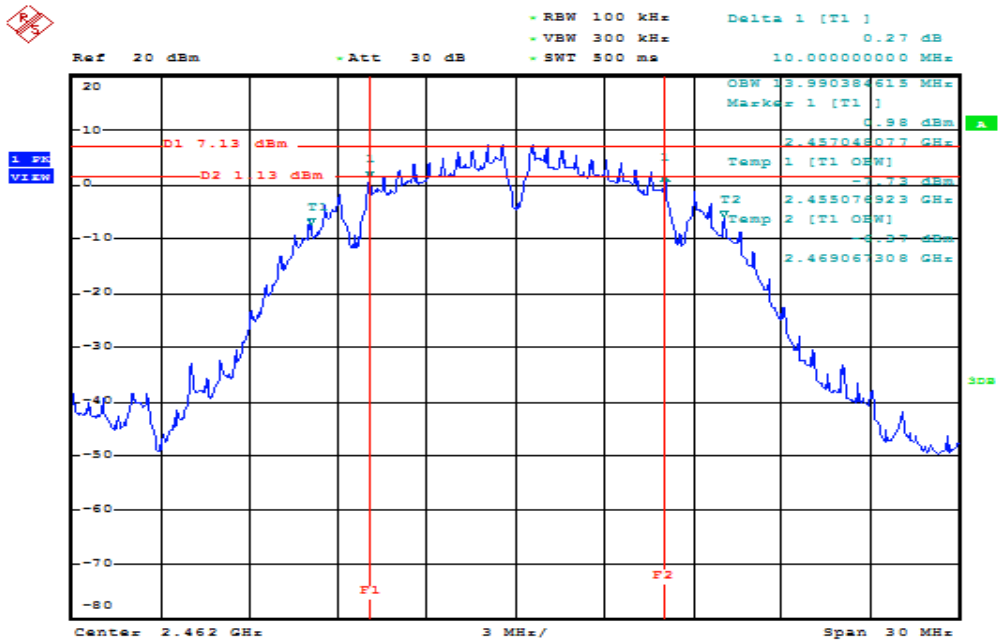


Date: 7.JAN.2016 14:33:03

IEEE 802.11g mode / 2412 MHz
6dB Bandwidth

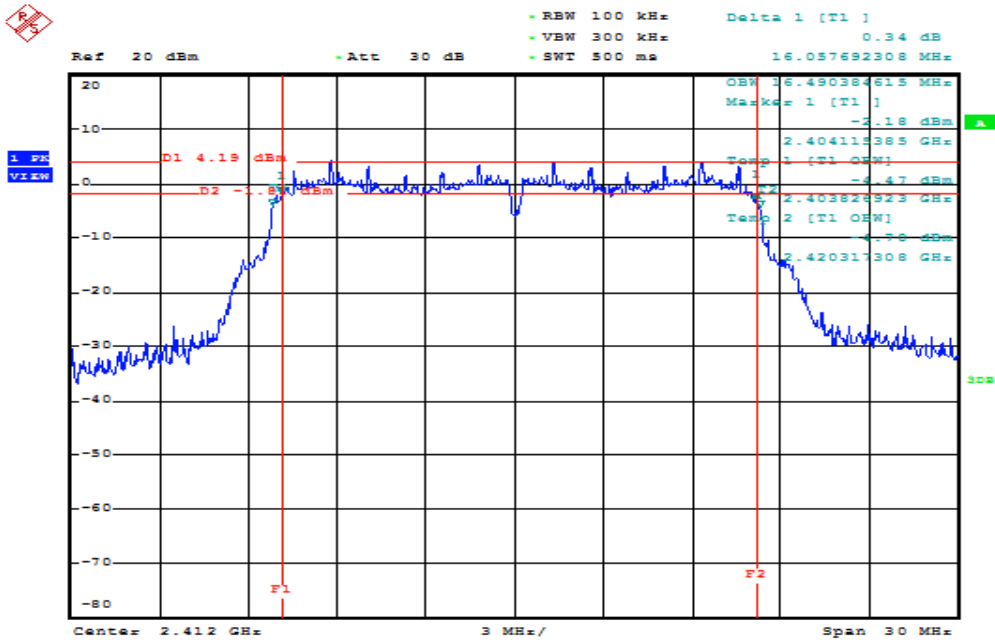

Date: 7.JAN.2016 14:37:29


IEEE 802.11g mode / 2437 MHz
6dB Bandwidth

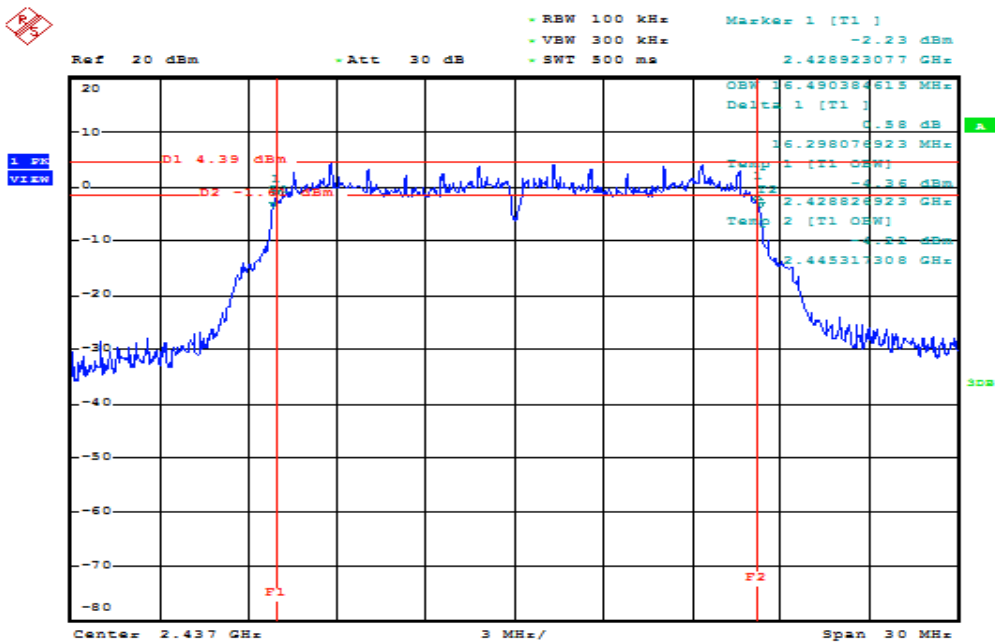

Date: 7.JAN.2016 14:42:36

IEEE 802.11g mode / 2462 MHz


6dB Bandwidth

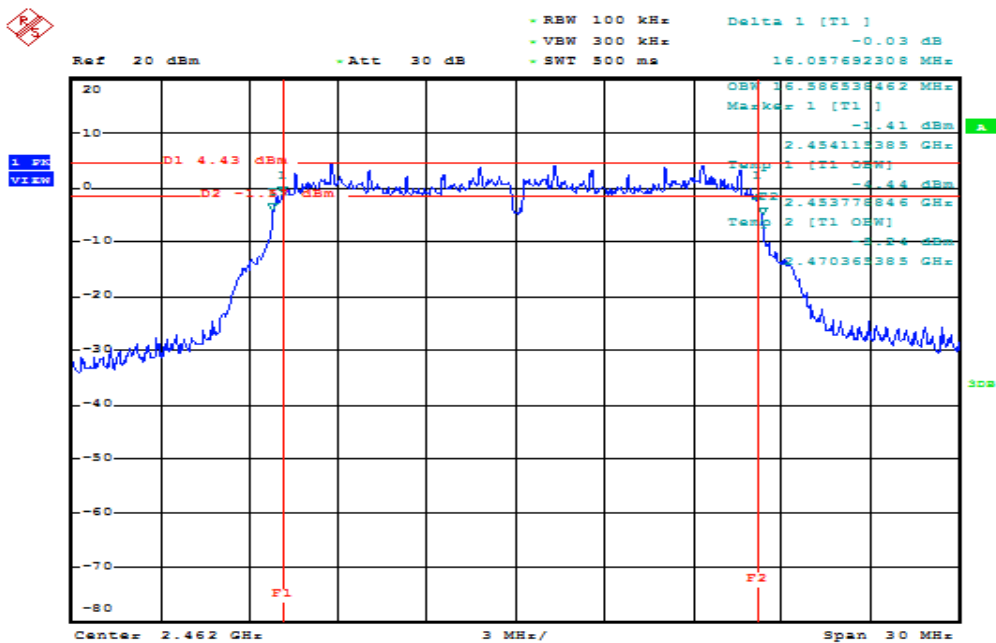

Date: 7.JAN.2016 14:49:50

IEEE 802.11n HT 20 MHz mode / 2412 MHz


6dB Bandwidth

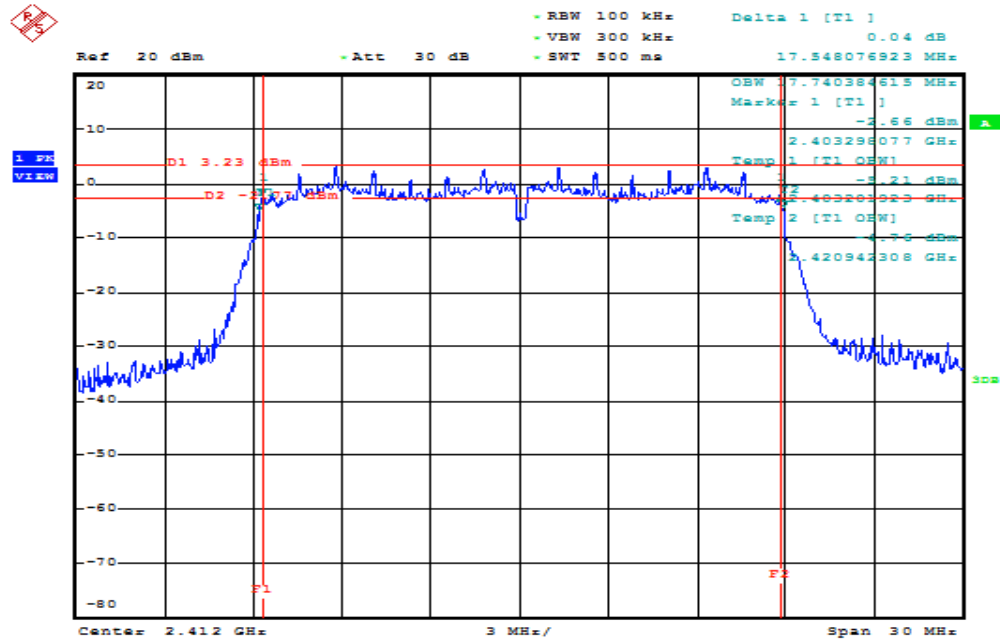

Date: 7.JAN.2016 14:53:39


IEEE 802.11n HT 20 MHz mode / 2437 MHz

6dB Bandwidth

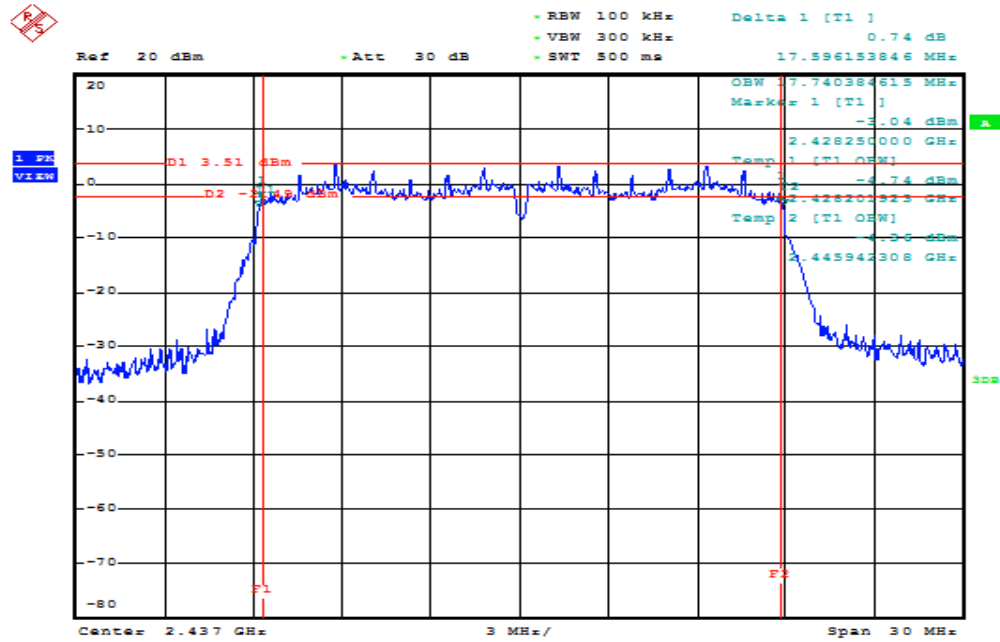

Date: 7.JAN.2016 14:58:46

IEEE 802.11n HT 20 MHz mode / 2462 MHz
6dB Bandwidth

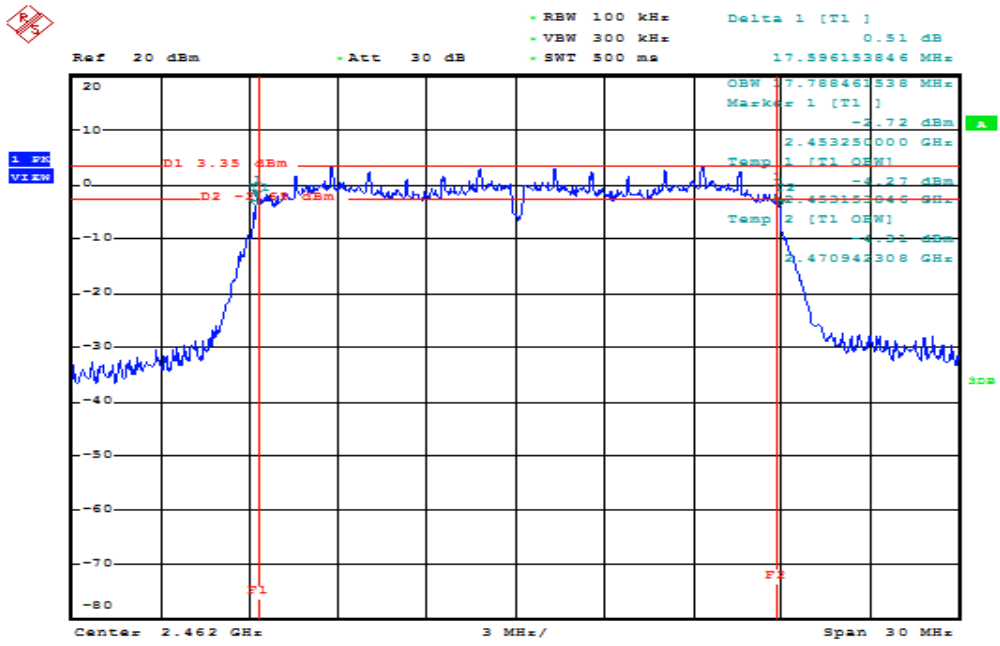

Date: 7.JAN.2016 15:07:06


7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration

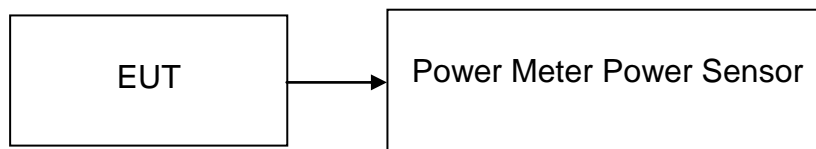

TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
2412	18.71	0.0743	1.00	PASS
2437	*18.78	0.0755		PASS
2462	18.76	0.0752		PASS

Test mode: IEEE 802.11g mode

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
2412	23.91	0.2460	1.00	PASS
2437	23.85	0.2427		PASS
2462	*23.96	0.2489		PASS

Test mode: IEEE 802.11n HT 20 MHz mode


Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
2412	23.62	0.2301	1.00	PASS
2437	23.73	0.2360		PASS
2462	*23.75	0.2371		PASS

7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration

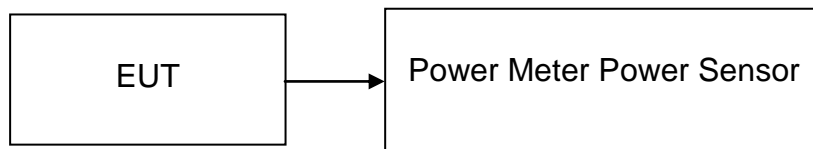

TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the avg power detection.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

Frequency (MHz)	Output Power (dBm)	Output Power (W)
2412	*16.49	0.0446
2437	16.42	0.0439
2462	16.44	0.0441

Test mode: IEEE 802.11g mode

Frequency (MHz)	Output Power (dBm)	Output Power (W)
2412	*15.77	0.0378
2437	15.57	0.0361
2462	15.64	0.0366

Test mode: IEEE 802.11n HT 20 MHz mode

Frequency (MHz)	Output Power (dBm)	Output Power (W)
2412	14.72	0.0296
2437	14.75	0.0299
2462	*14.78	0.0301


7.4 BAND EDGES MEASUREMENT

LIMIT


According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

For Radiated Emission above 1GHz

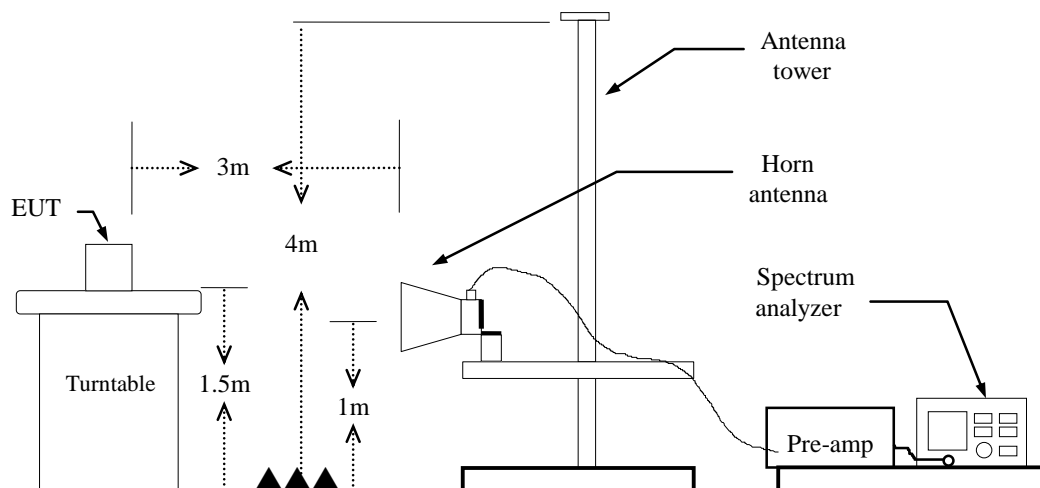

For Conducted

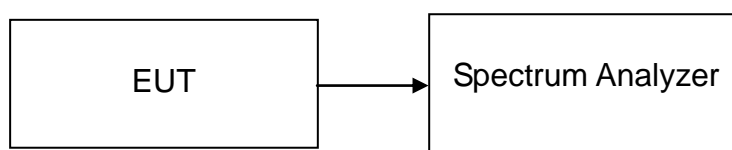

TEST PROCEDURE

For Radiated

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz,
if duty cycle \geq 98%, VBW=10Hz.
if duty cycle < 98% VBW=1/T.
IEEE 802.11b mode: \geq 98%, VBW=10Hz
IEEE 802.11g mode: \geq 96%, VBW=750Hz
IEEE 802.11n HT 20 MHz mode: \geq 96%, VBW=750Hz
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.
6. Result = Spectrum Reading + cable loss(spectrum to Amp) - Amp Gain + Cable loss(Amp to receive Ant)+ Receive Ant

For Un-restricted Band Emissions


The peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

TEST RESULTS

Refer to attach spectrum analyzer data chart.


Band Edges (IEEE 802.11b mode / 2412 MHz)

Polarity: Vertical

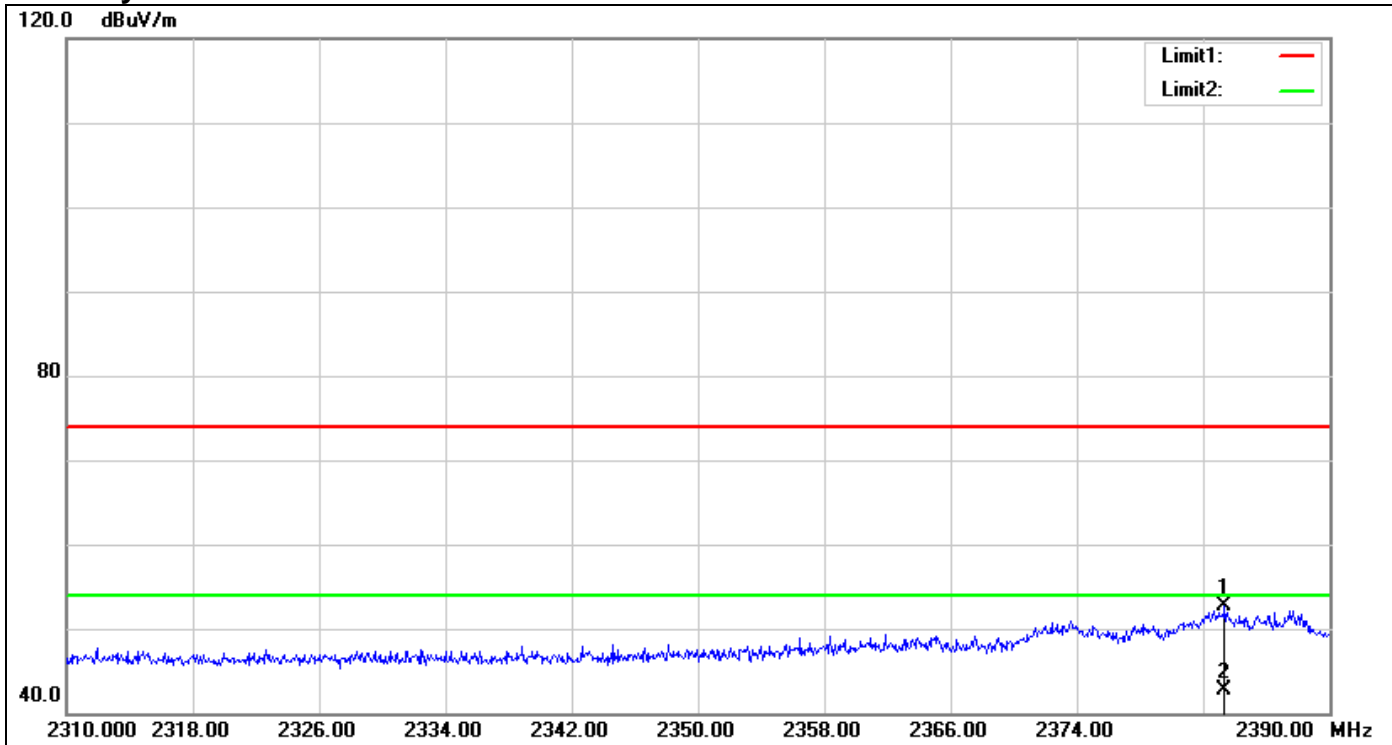

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2383.360	55.29	-2.55	52.74	74.00	-21.26	150	273	peak
2	2383.360	45.24	-2.55	42.69	54.00	-11.31	150	273	AVG


Polarity: Horizontal

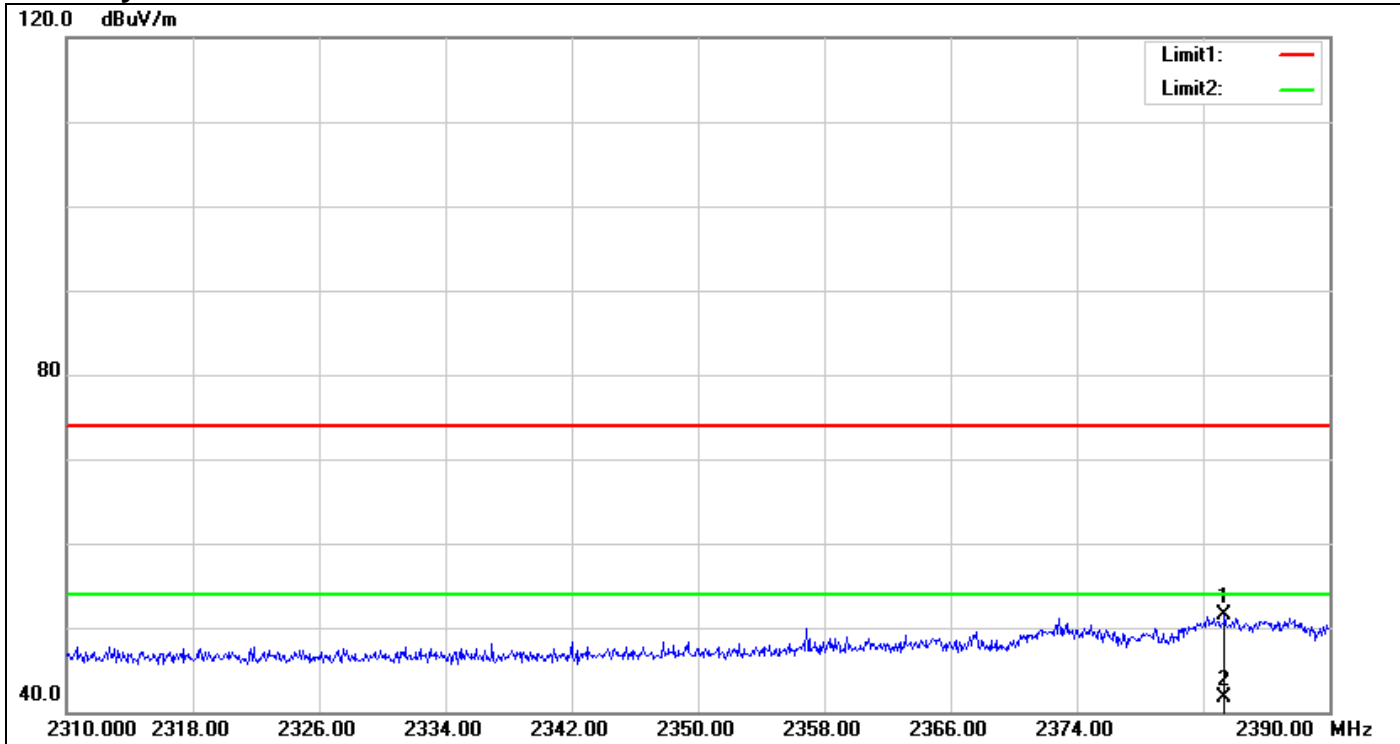

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2383.360	54.09	-2.55	51.54	74.00	-22.46	150	273	peak
2	2383.360	44.15	-2.55	41.60	54.00	-12.40	150	273	AVG


Band Edges (IEEE 802.11b mode / 2462 MHz)

Polarity: Vertical

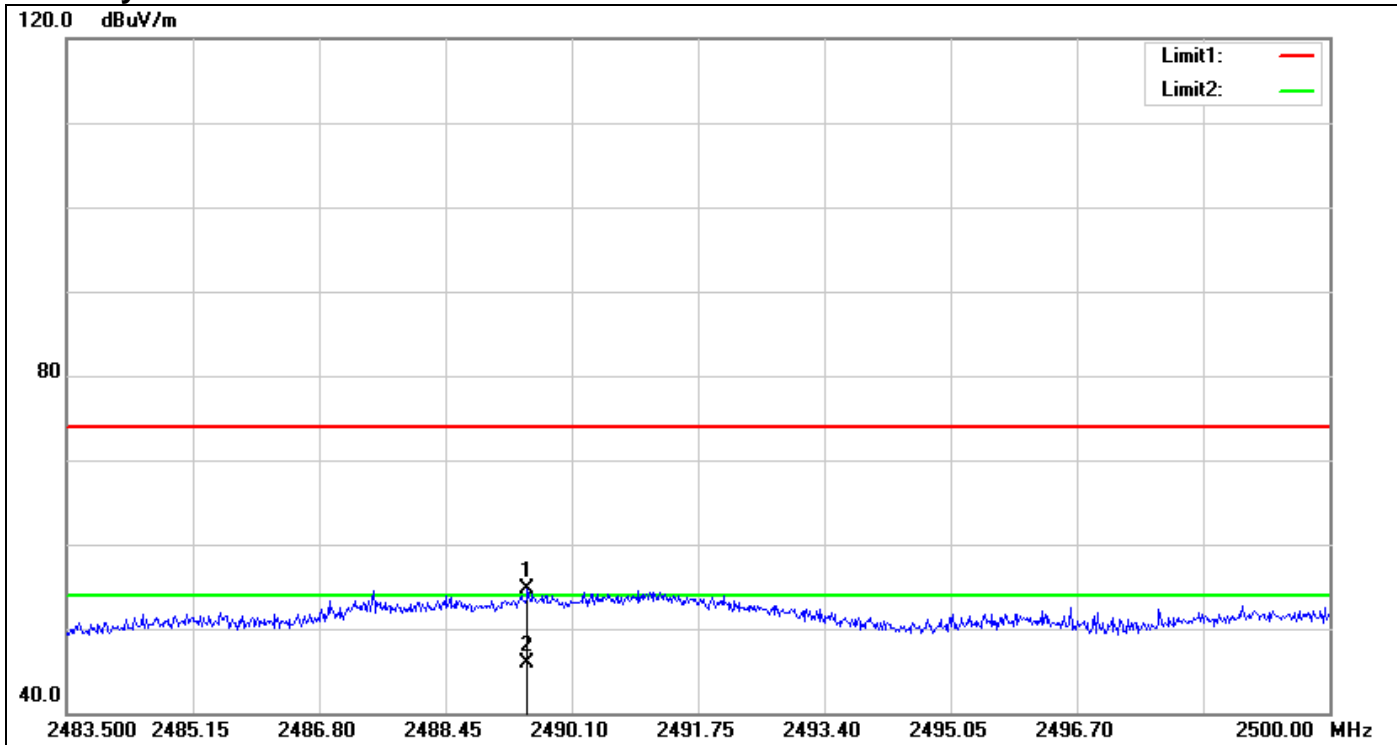

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2489.523	56.59	-1.93	54.66	74.00	-19.34	150	106	peak
2	2489.523	47.87	-1.93	45.94	54.00	-8.06	150	106	AVG


Polarity: Horizontal

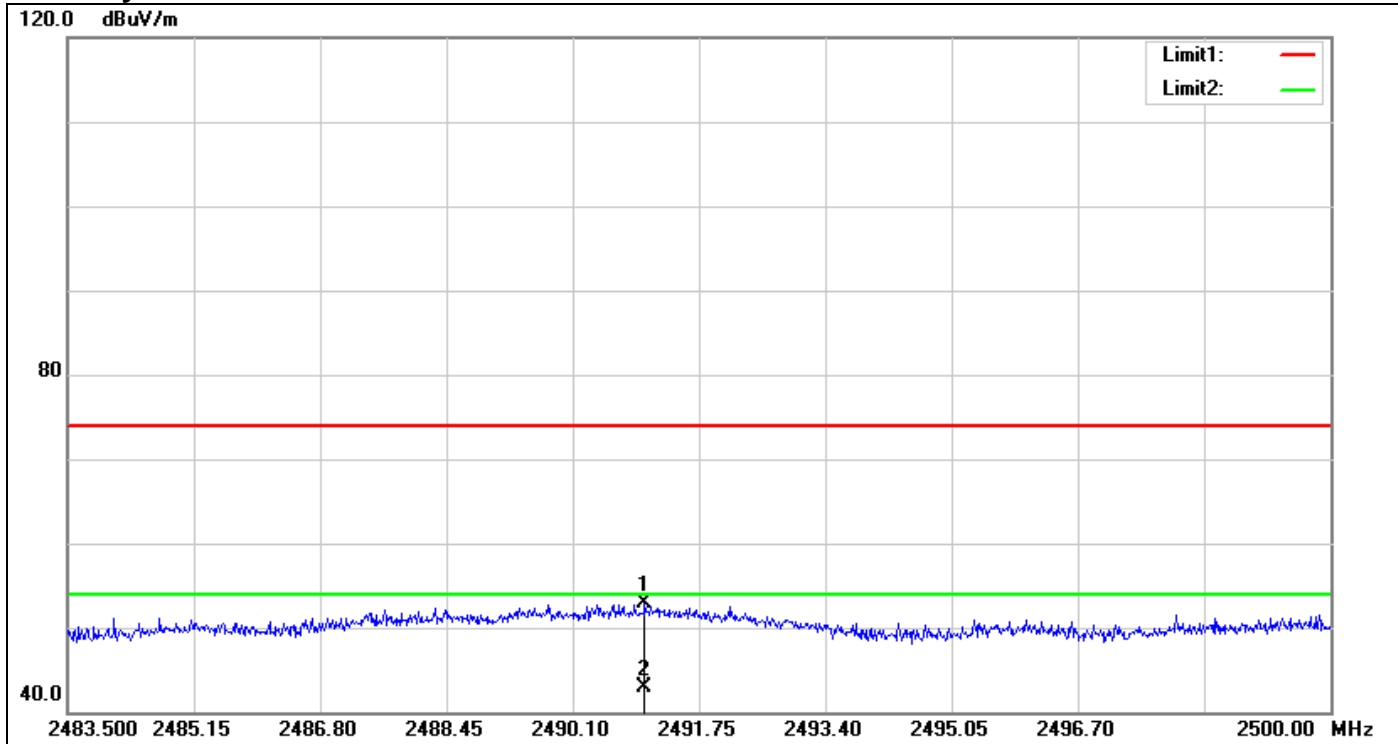

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2491.041	54.82	-1.92	52.90	74.00	-21.10	150	57	peak
2	2491.041	44.91	-1.92	42.99	54.00	-11.01	150	57	AVG


Band Edges (IEEE 802.11g mode / 2412 MHz)

Polarity: Vertical

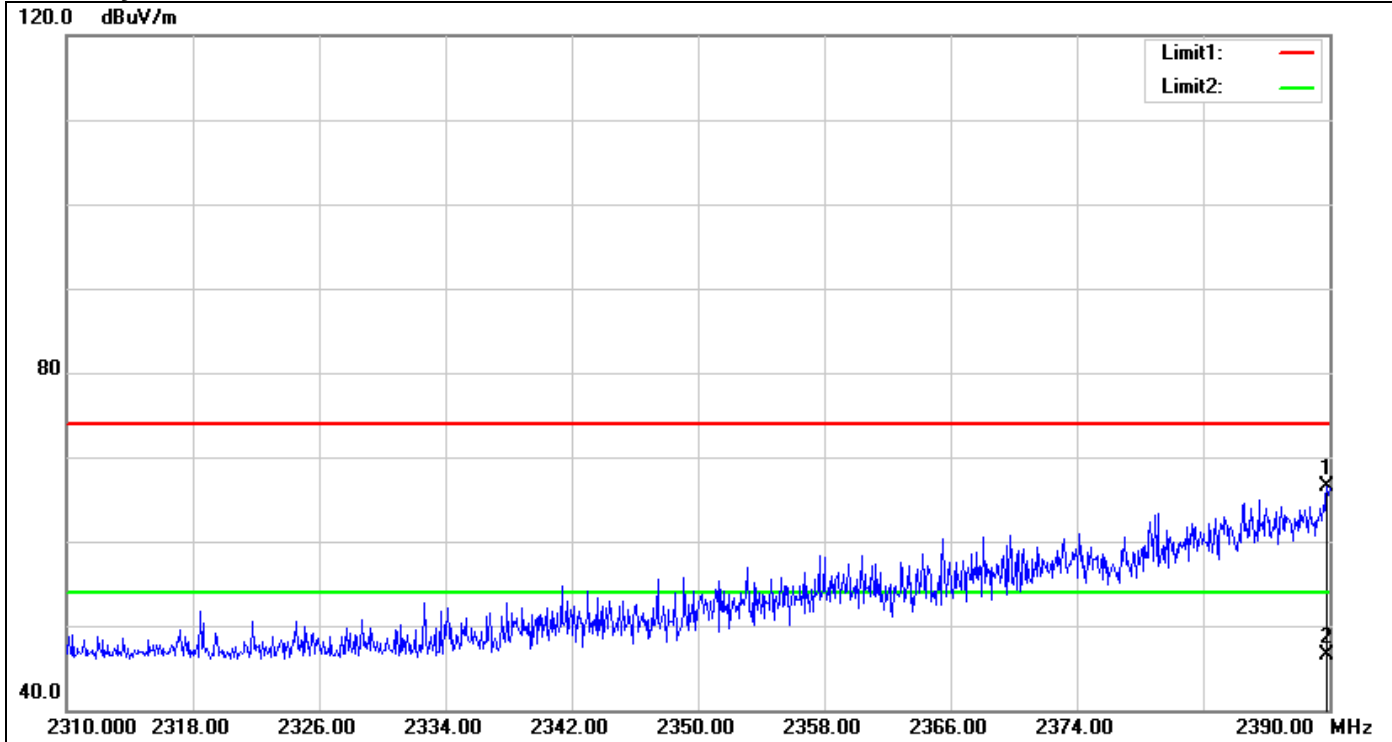

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.840	69.05	-2.49	66.56	74.00	-7.44	150	170	peak
2	2389.840	49.06	-2.49	46.57	54.00	-7.43	150	170	AVG


Polarity: Horizontal

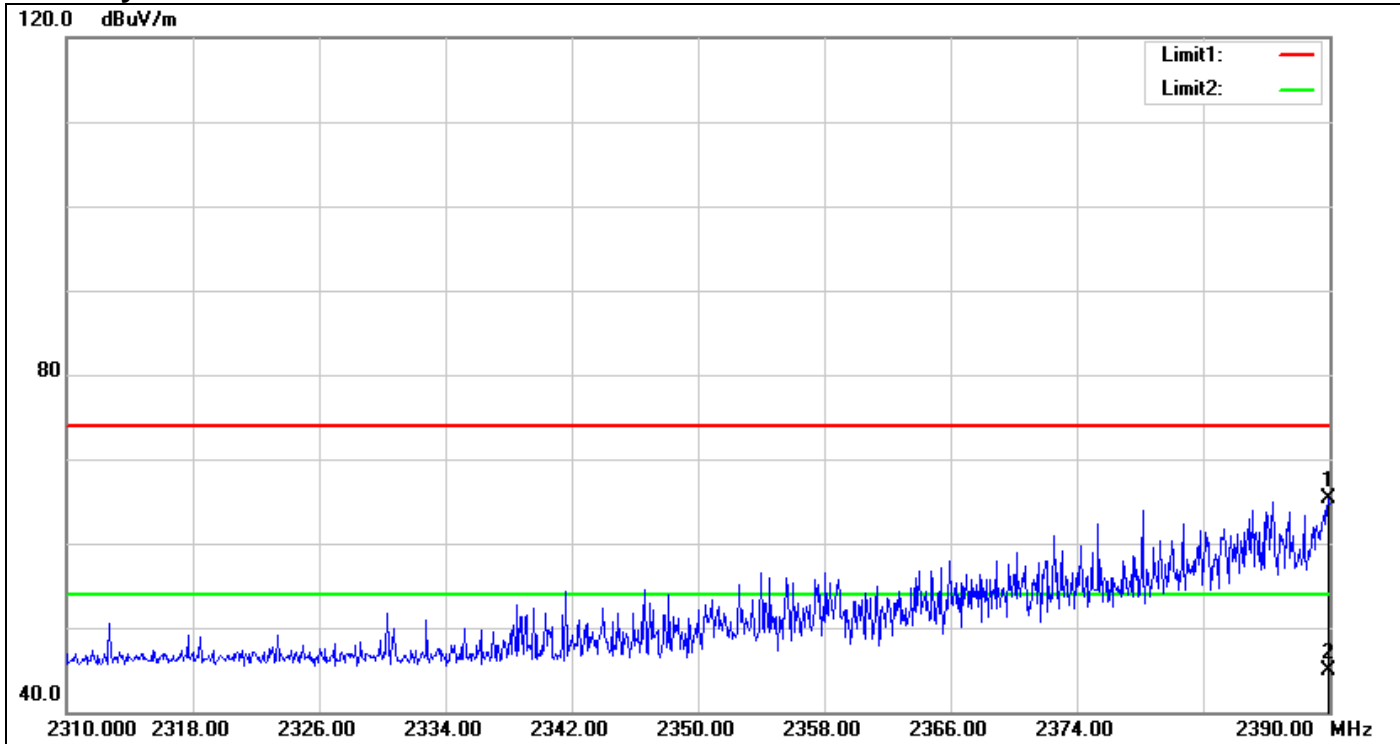

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.920	67.87	-2.49	65.38	74.00	-8.62	150	220	peak
2	2389.920	47.36	-2.49	44.87	54.00	-9.13	150	220	AVG


Band Edges (IEEE 802.11g mode / 2462 MHz)

Polarity: Vertical

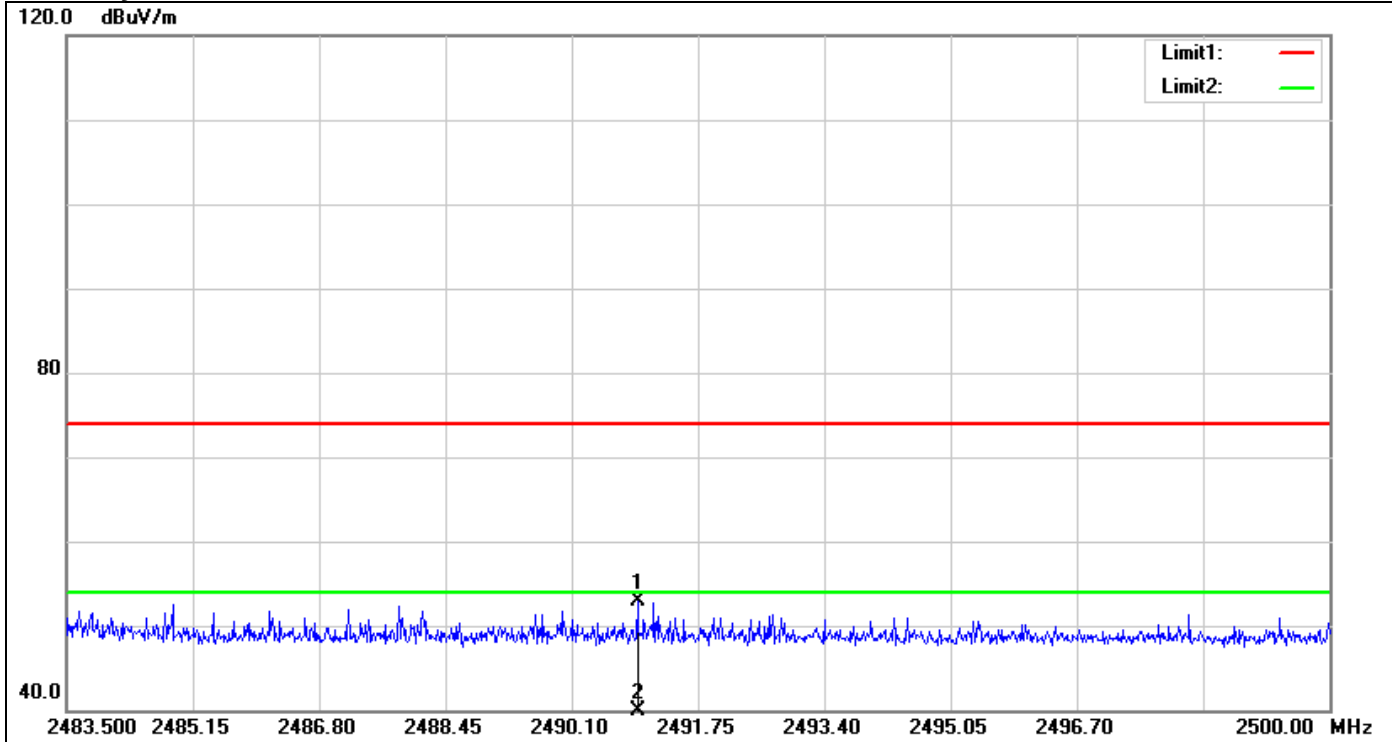

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2490.958	54.79	-1.92	52.87	74.00	-21.13	150	270	peak
2	2490.958	38.87	-1.92	36.95	54.00	-17.05	150	270	AVG


Polarity: Horizontal

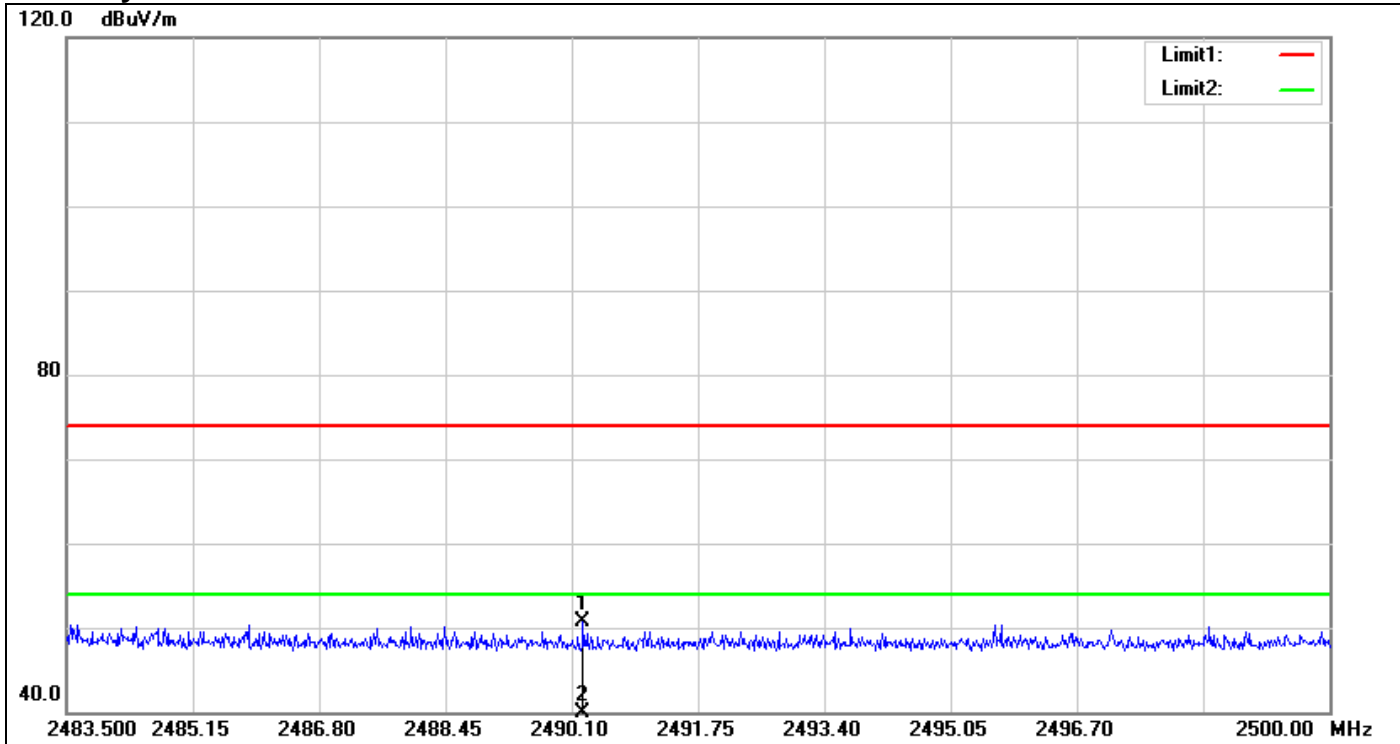

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2490.249	52.56	-1.93	50.63	74.00	-23.37	150	224	peak
2	2490.249	38.01	-1.93	36.08	54.00	-17.92	150	105	AVG


Band Edges (IEEE 802.11n HT 20 MHz mode / 2412 MHz)

Polarity: Vertical

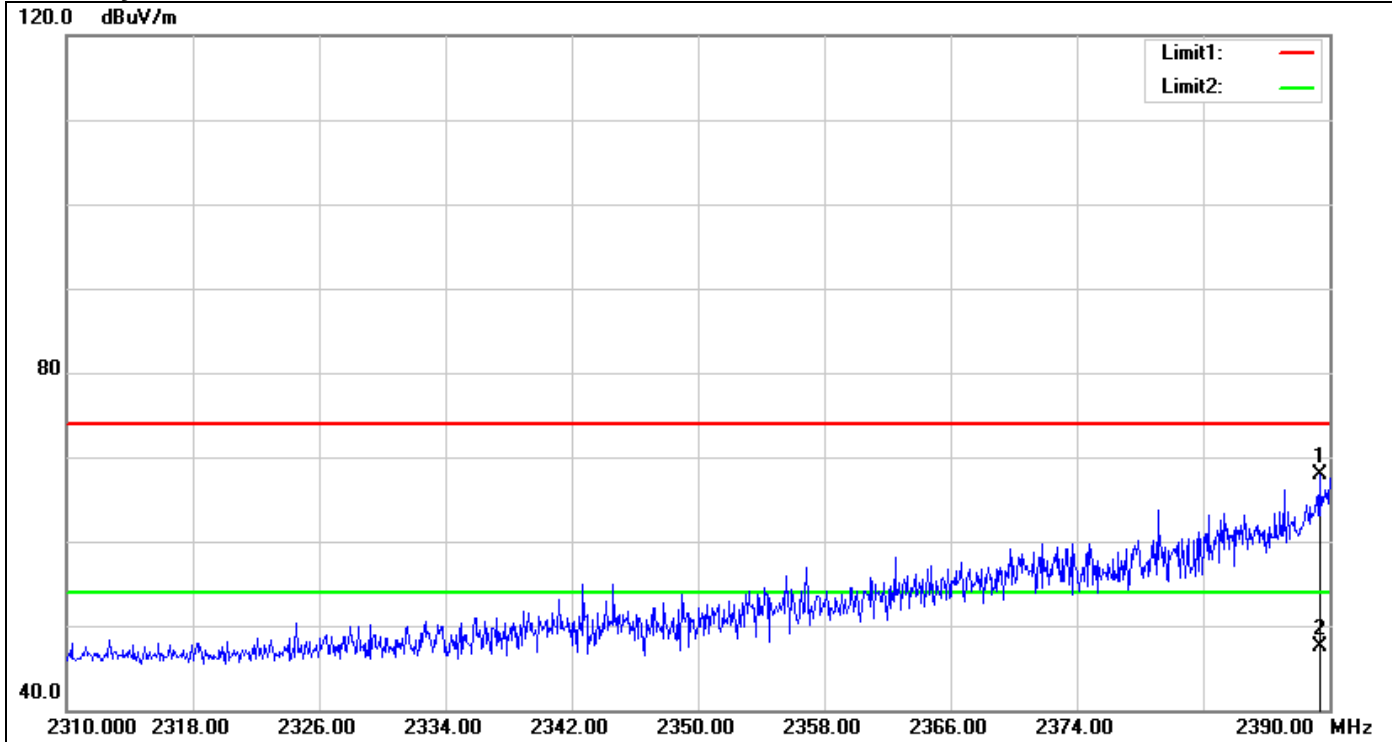

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.360	70.43	-2.50	67.93	74.00	-6.07	150	346	peak
2	2389.360	49.92	-2.50	47.42	54.00	-6.58	150	346	AVG


Polarity: Horizontal

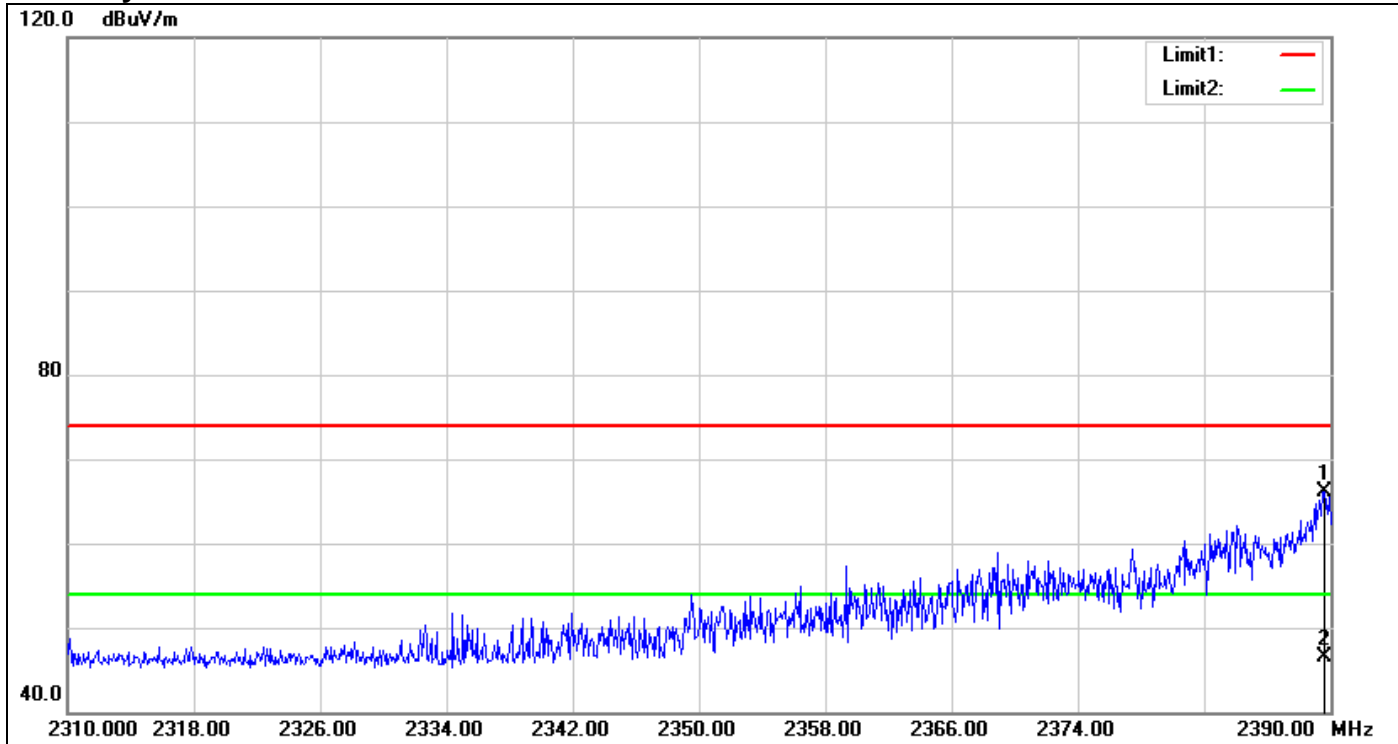

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.600	68.68	-2.49	66.19	74.00	-7.81	150	120	peak
2	2389.600	48.94	-2.49	46.45	54.00	-7.55	150	120	AVG


Band Edges (IEEE 802.11n HT 20 MHz mode / 2462 MHz)

Polarity: Vertical

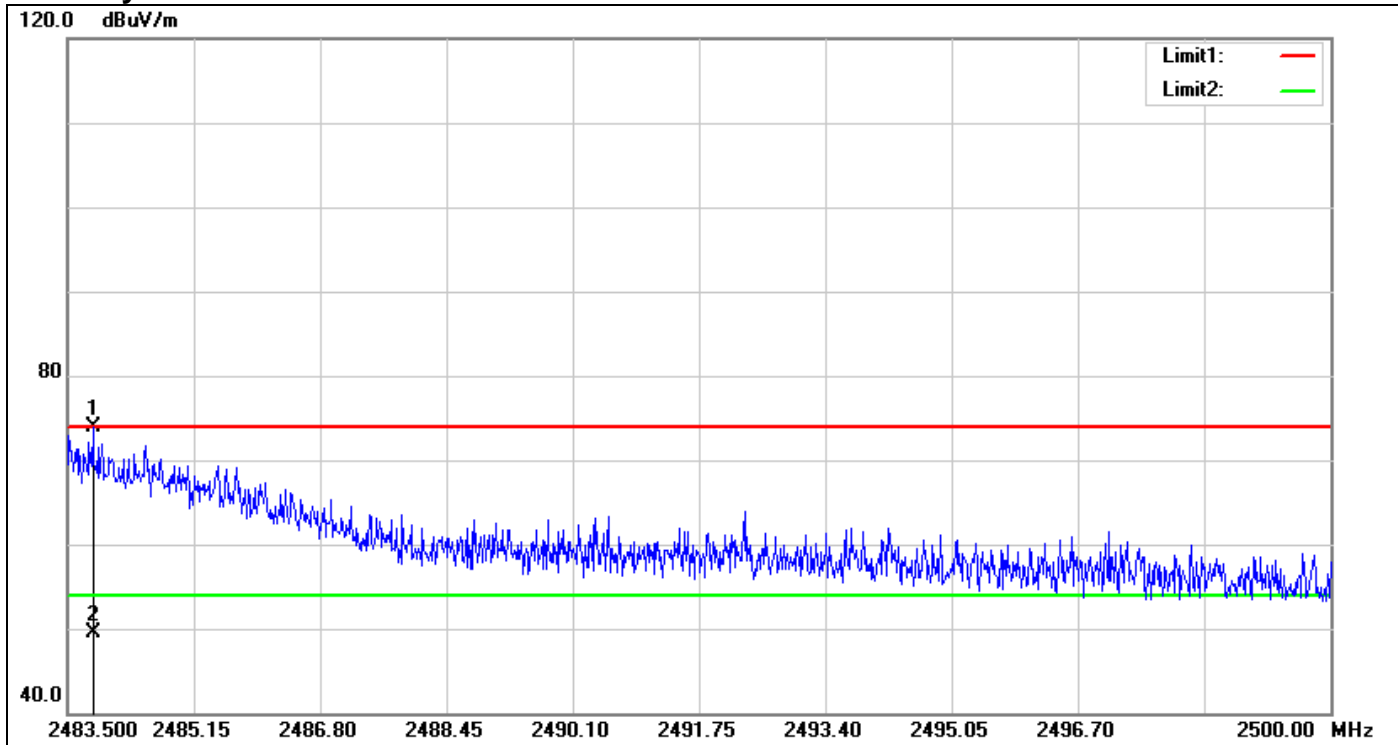

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.830	75.84	-1.99	73.85	74.00	-0.15	150	273	peak
2	2483.830	51.58	-1.99	49.59	54.00	-4.41	150	273	AVG


Polarity: Horizontal

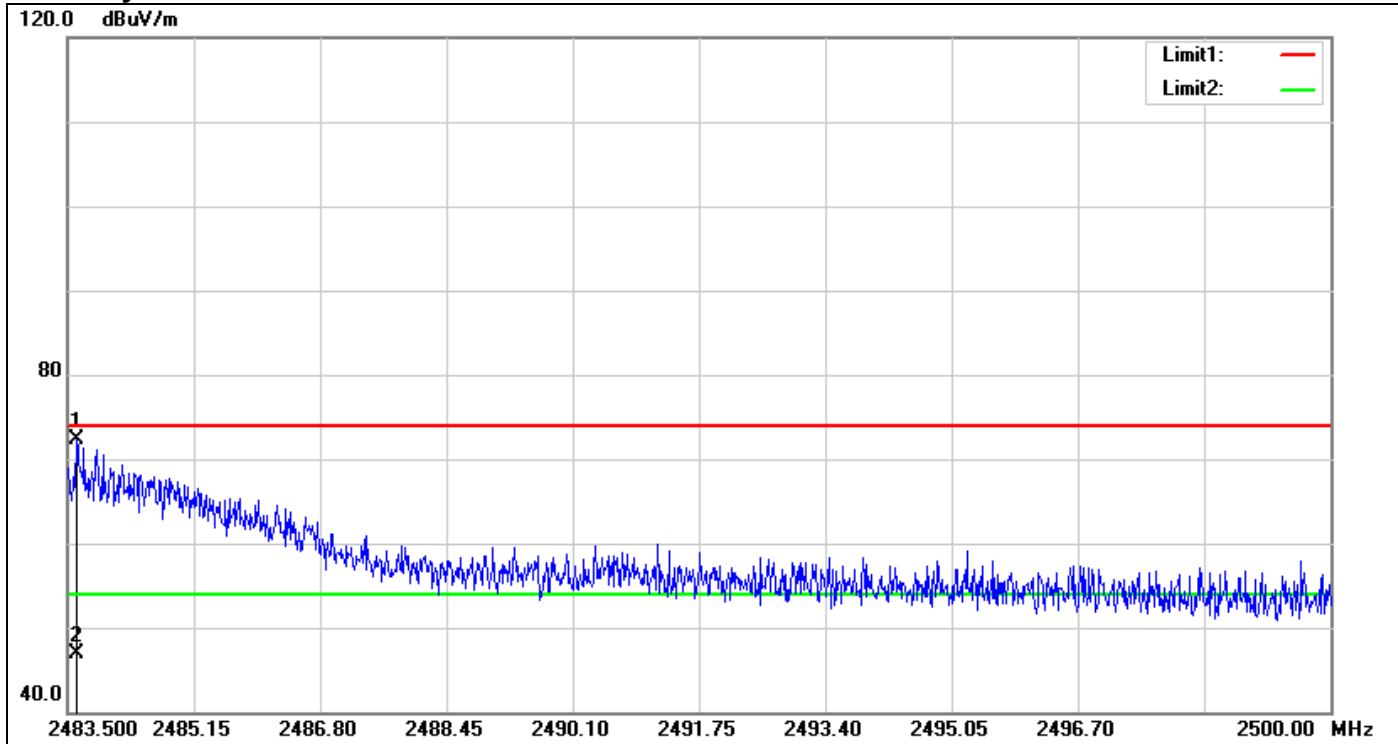

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.615	74.24	-1.99	72.25	74.00	-1.75	150	0	peak
2	2483.615	48.91	-1.99	46.92	54.00	-7.08	150	0	AVG

Test Plot


Un-restricted Band Emissions (IEEE 802.11b mode / 2412 MHz)

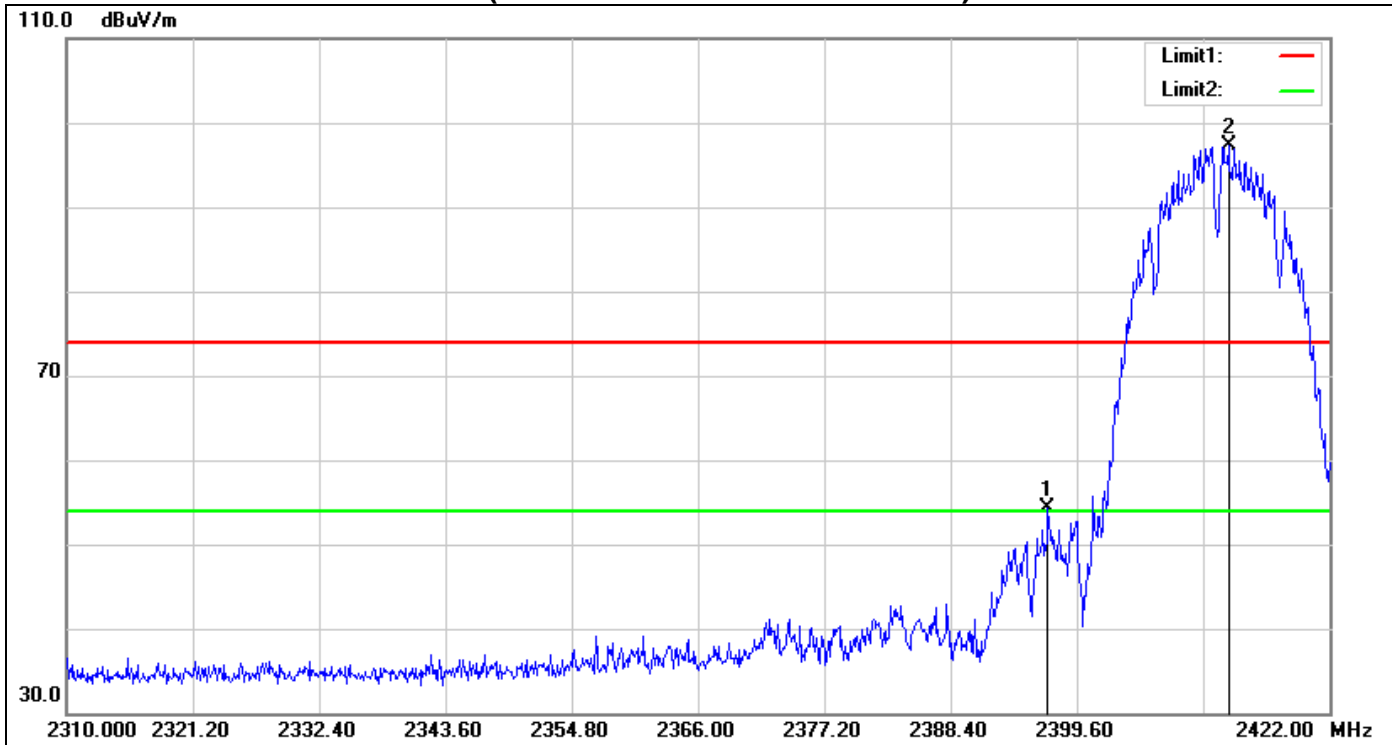

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Height (cm)	Degree (°)	Remark
1	2397.024	56.76	-2.43	54.33	150	235	peak
2	2413.040	99.80	-2.41	97.39	150	194	peak

Note: Spurious emission levels that exceed the level of 20 dB below the applicable limit.


Un-restricted Band Emissions (IEEE 802.11b mode / 2462 MHz)

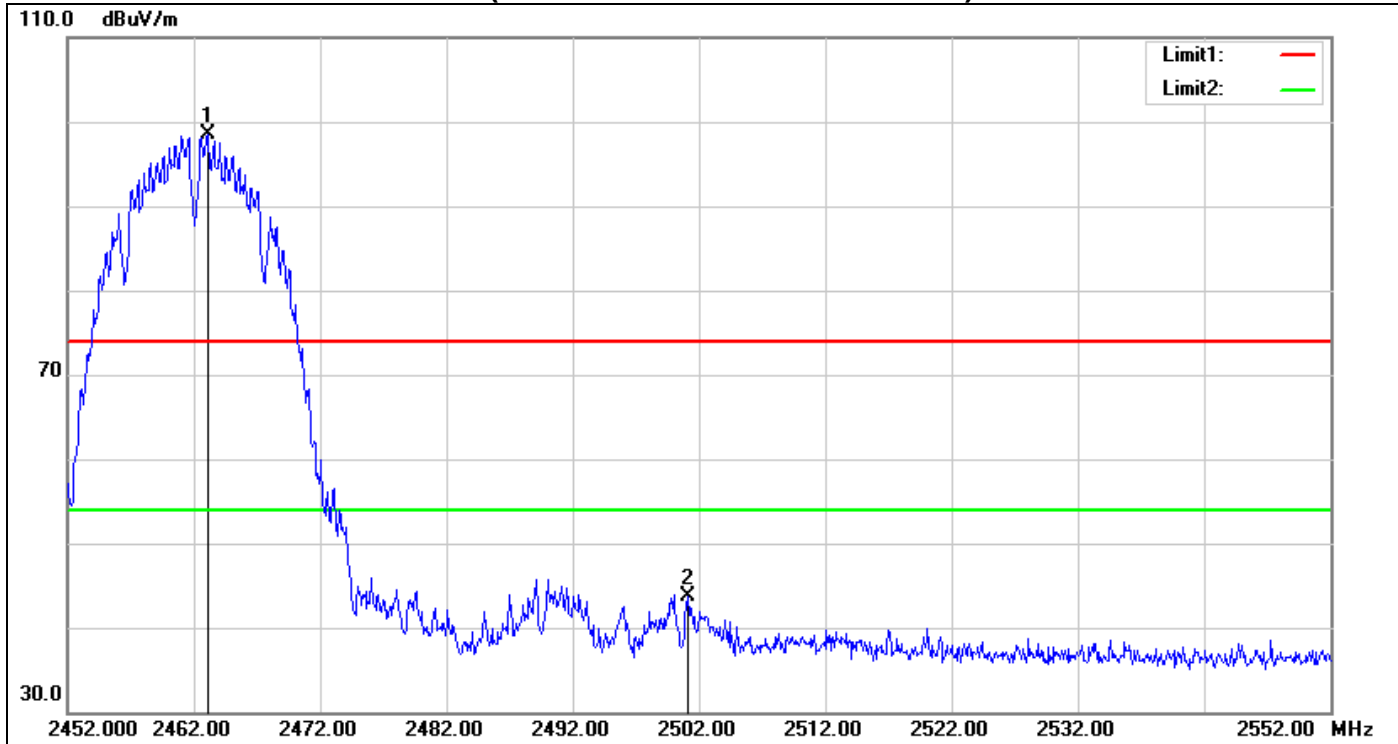

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Height (cm)	Degree (°)	Remark
1	2463.100	100.51	-2.09	98.42	150	264	peak
2	2501.100	45.60	-1.86	43.74	150	109	peak

Note: Spurious emission levels that exceed the level of 20 dB below the applicable limit.


Un-restricted Band Emissions (IEEE 802.11g mode / 2412 MHz)

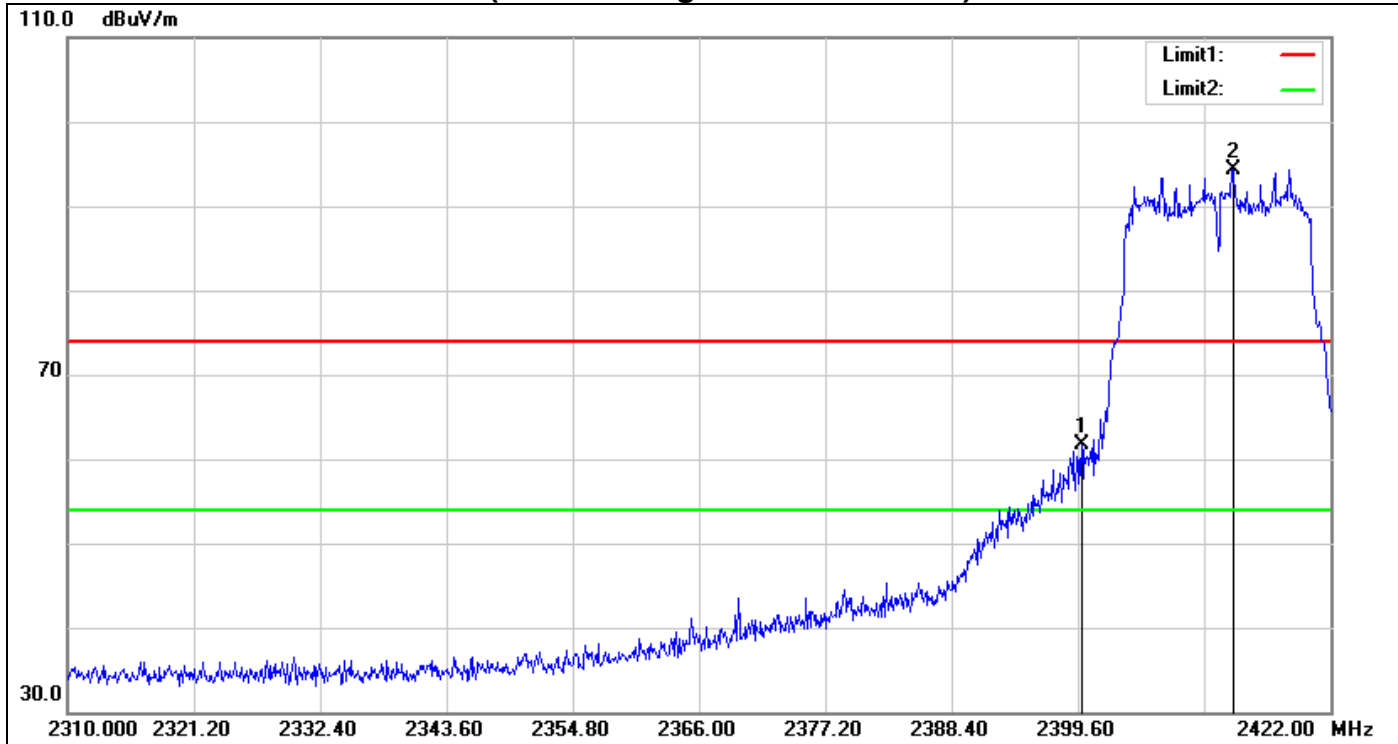

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Height (cm)	Degree (°)	Remark
1	2399.936	64.21	-2.41	61.80	150	167	peak
2	2413.376	96.76	-2.41	94.35	150	325	peak

Note: Spurious emission levels that exceed the level of 20 dB below the applicable limit.


Un-restricted Band Emissions (IEEE 802.11g mode / 2462 MHz)

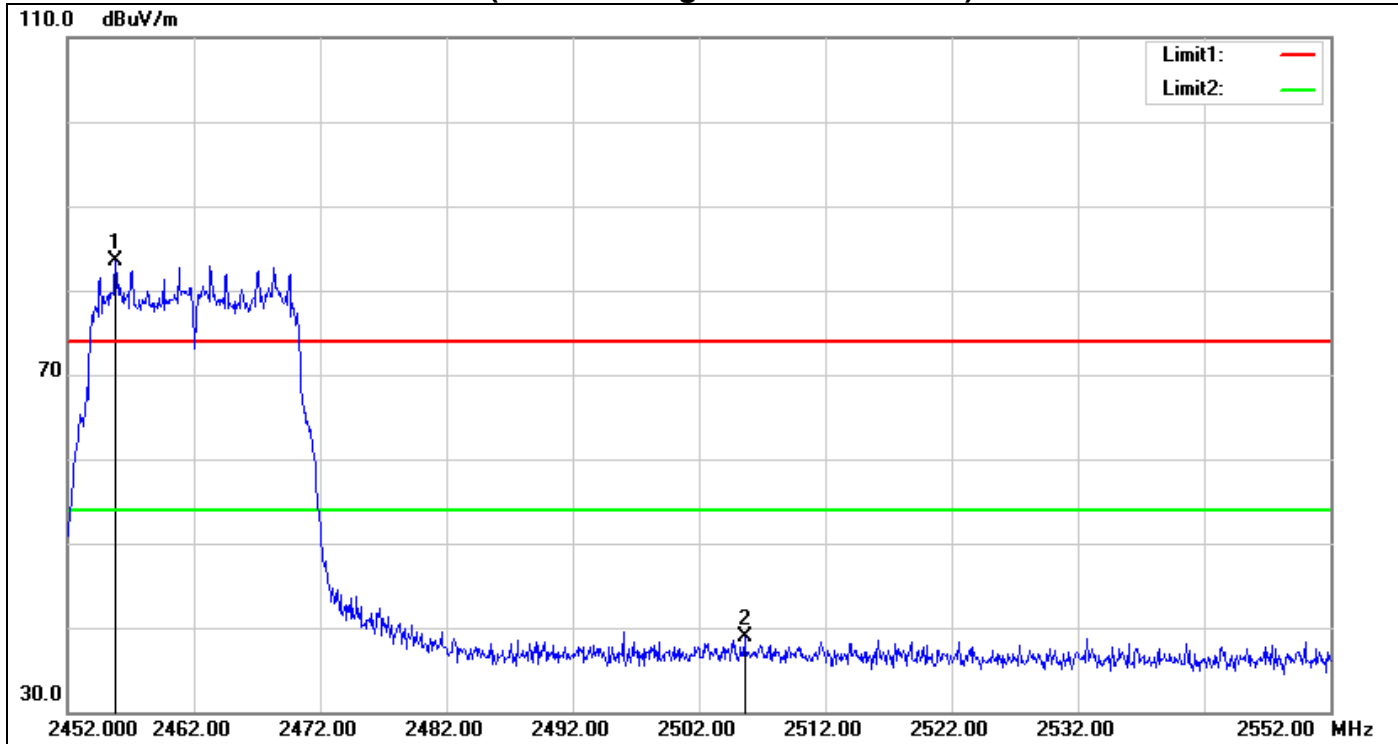

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Height (cm)	Degree (°)	Remark
1	2455.800	85.69	-2.12	83.57	150	323	peak
2	2505.600	40.68	-1.85	38.83	150	358	peak

Note: Spurious emission levels that exceed the level of 20 dB below the applicable limit.


Un-restricted Band Emissions (IEEE 802.11n HT 20 MHz mode / 2412 MHz)

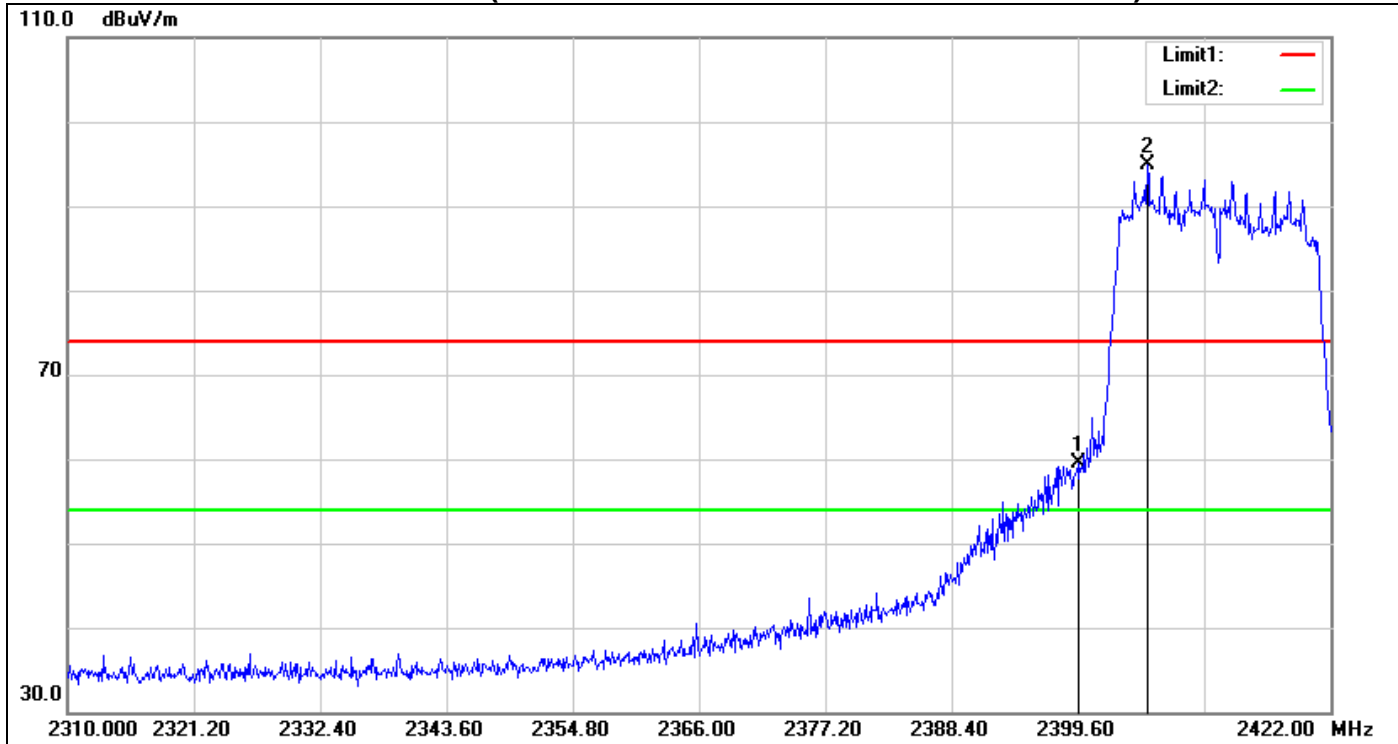

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Height (cm)	Degree (°)	Remark
1	2399.600	61.82	-2.41	59.41	150	97	peak
2	2405.760	97.29	-2.42	94.87	150	36	peak

Note: Spurious emission levels that exceed the level of 20 dB below the applicable limit.

Un-restricted Band Emissions (IEEE 802.11n HT 20 MHz mode / 2462 MHz)

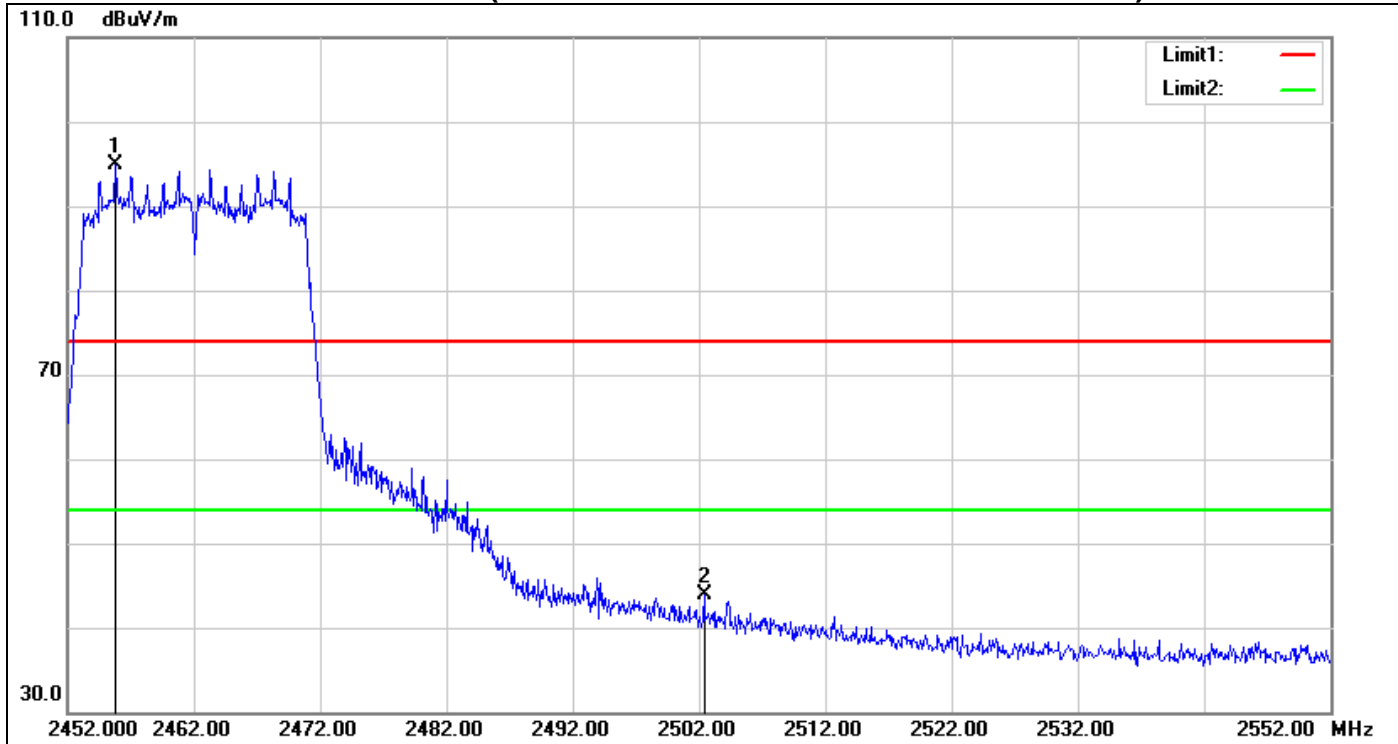

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Height (cm)	Degree (°)	Remark
1	2455.800	97.06	-2.12	94.94	150	164	peak
2	2502.400	45.66	-1.85	43.81	150	144	peak


Note: Spurious emission levels that exceed the level of 20 dB below the applicable limit.

7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. Set the RBW = 3 kHz, VBW = 30 kHz, span to 1.5 times the DTS bandwidth, Detector = peak, Trace mode = max hold, Sweep = auto couple. Use the peak marker function to determine the maximum amplitude level within the RBW.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
2412	-7.51	8.00	PASS
2437	-6.72		PASS
2462	-6.30		PASS

Test mode: IEEE 802.11g mode

Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
2412	-10.46	8.00	PASS
2437	-11.00		PASS
2462	-10.74		PASS


Test mode: IEEE 802.11n HT 20 MHz mode

Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
2412	-11.62	8.00	PASS
2437	-12.03		PASS
2462	-12.68		PASS

Test Plot


IEEE 802.11b mode / 2412 MHz

PPSD

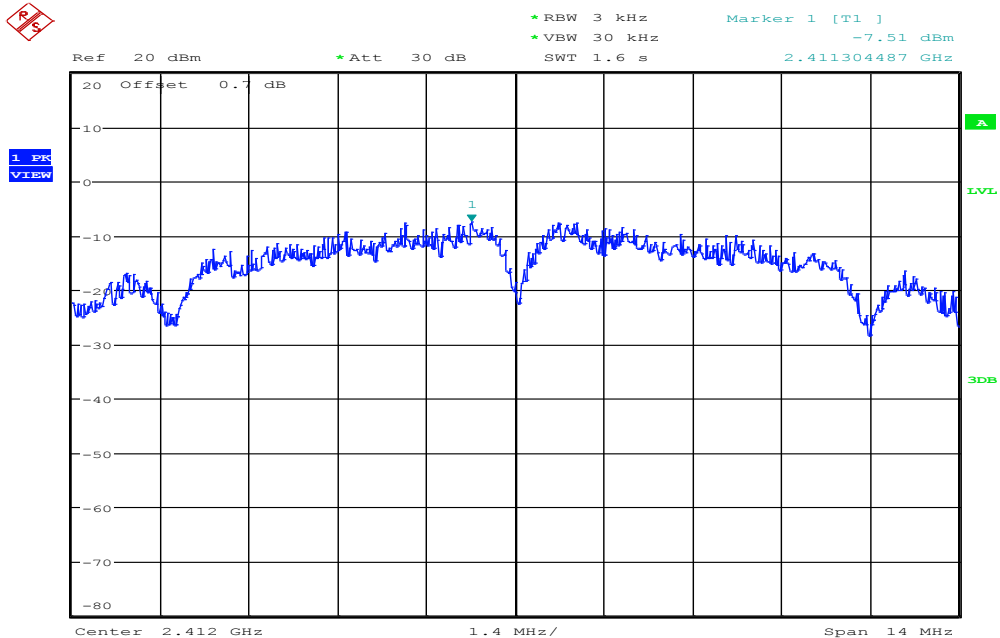


IEEE 802.11b mode / 2437 MHz

PPSD

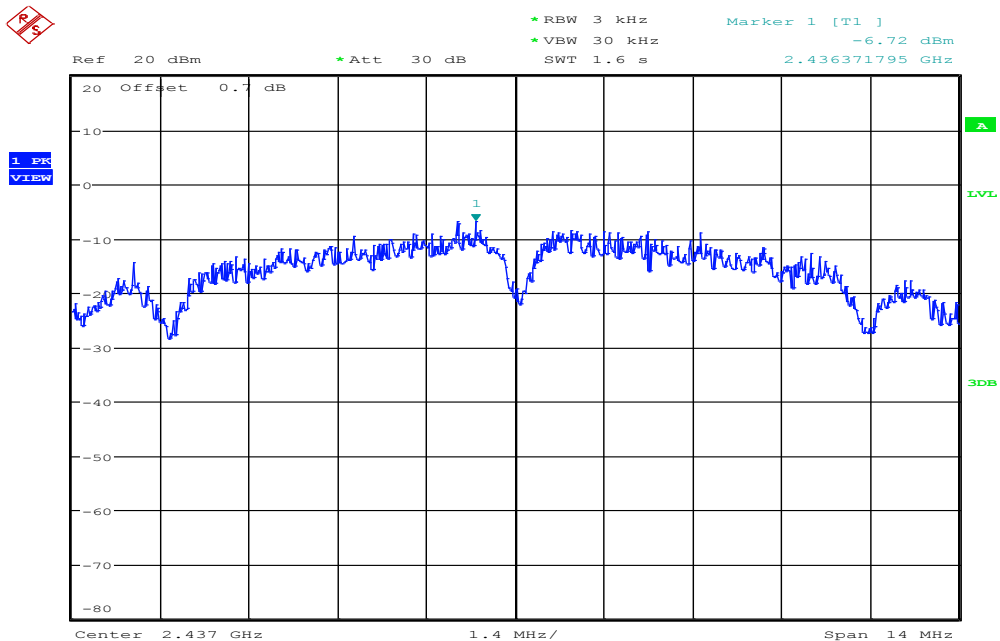


IEEE 802.11b mode / 2462 MHz

PPSD

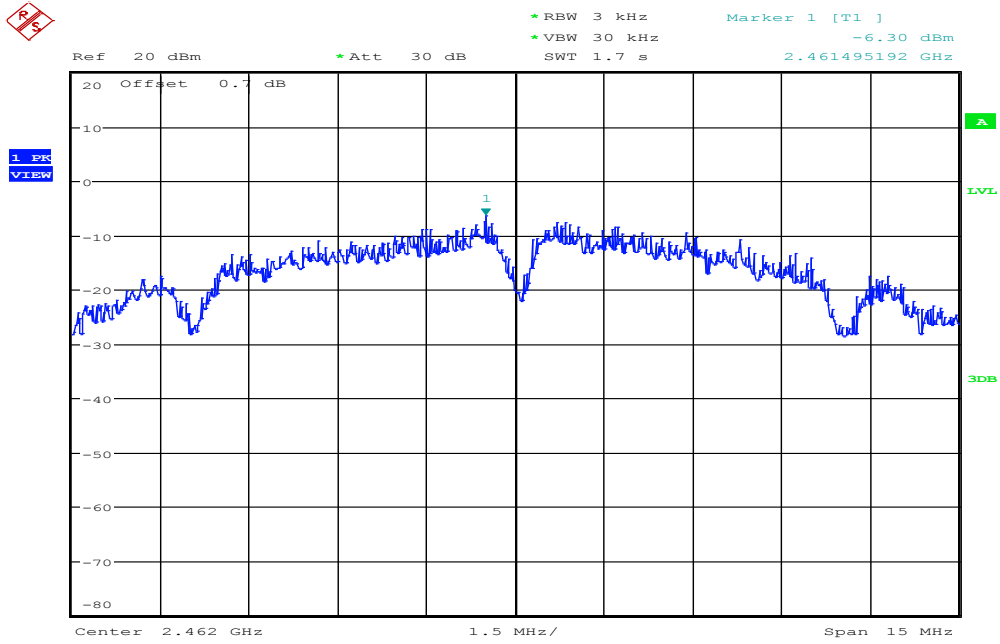


IEEE 802.11g mode / 2412 MHz

PPSD

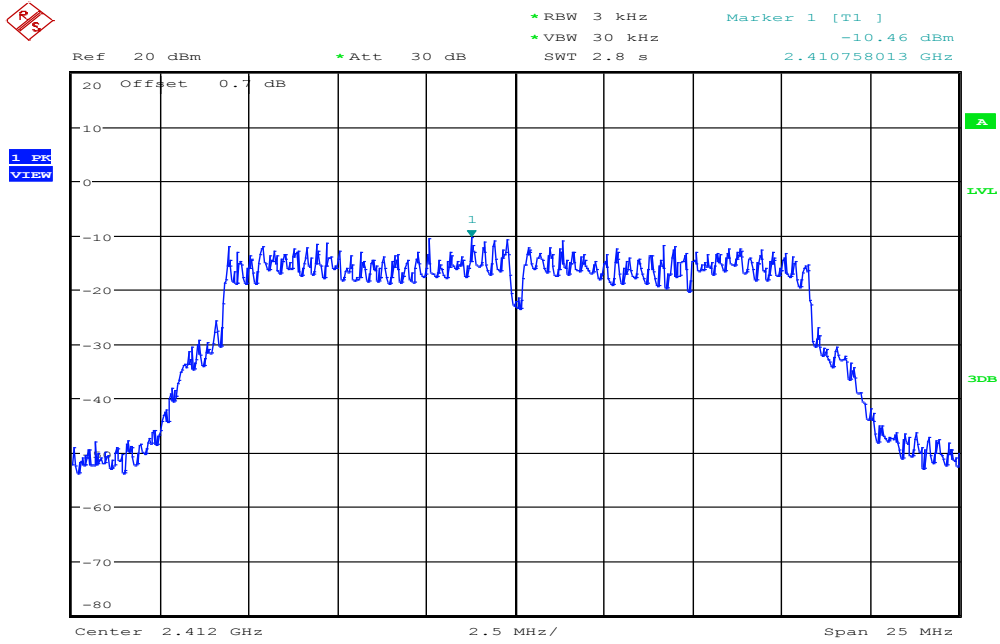


IEEE 802.11g mode / 2437 MHz

PPSD

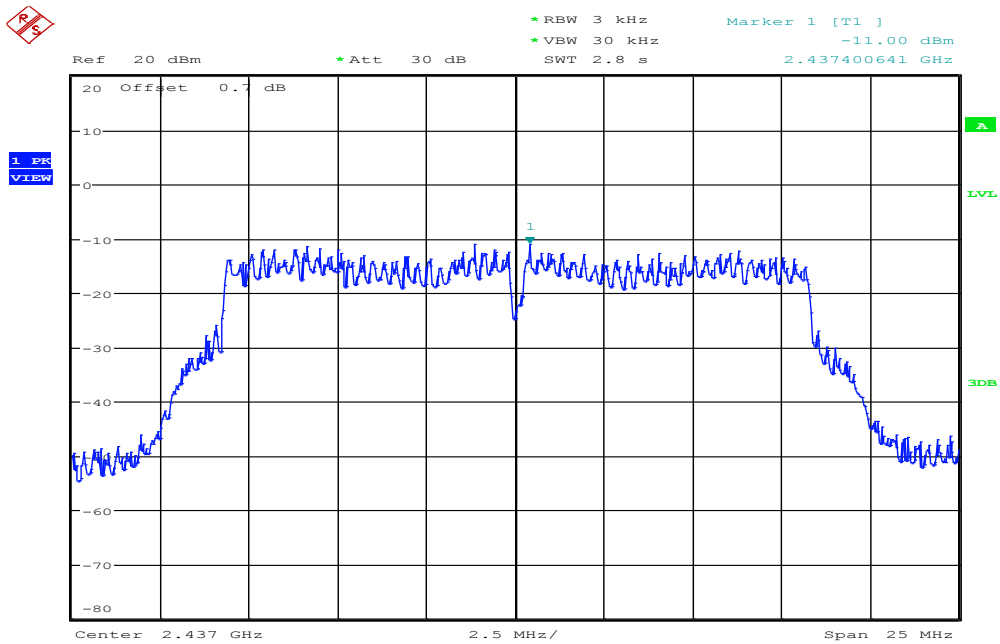


IEEE 802.11g mode / 2462 MHz

PPSD

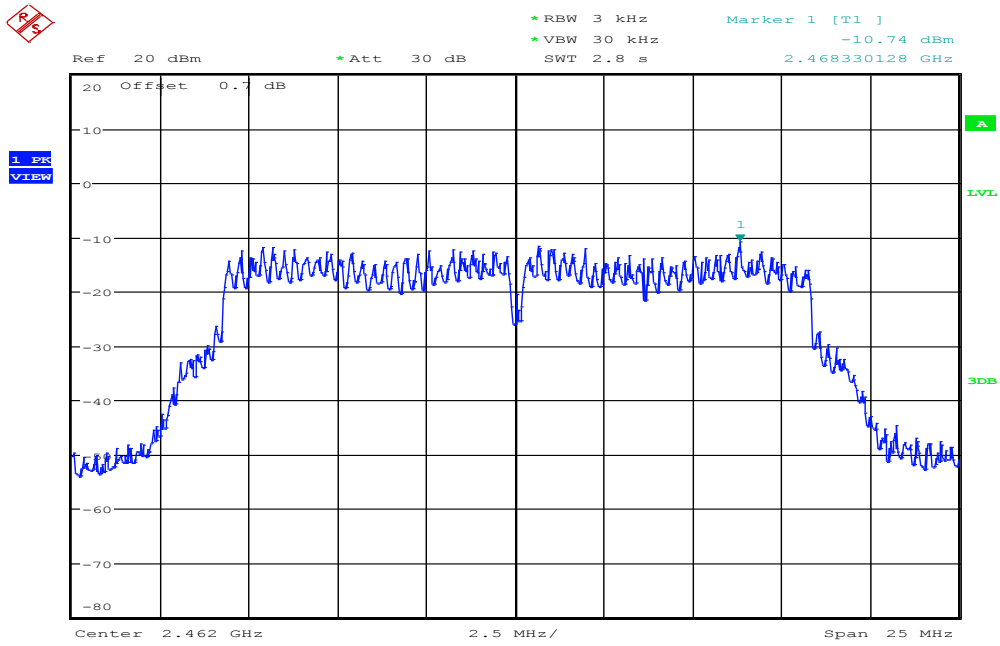


IEEE 802.11n HT 20 MHz mode / 2412 MHz

PPSD

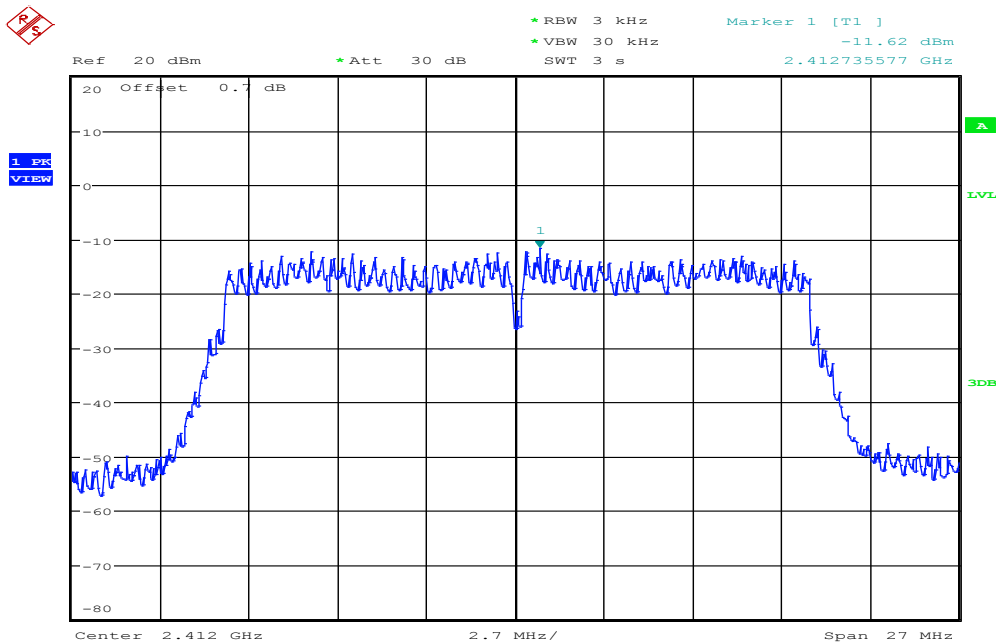


IEEE 802.11n HT 20 MHz mode / 2437 MHz

PPSD

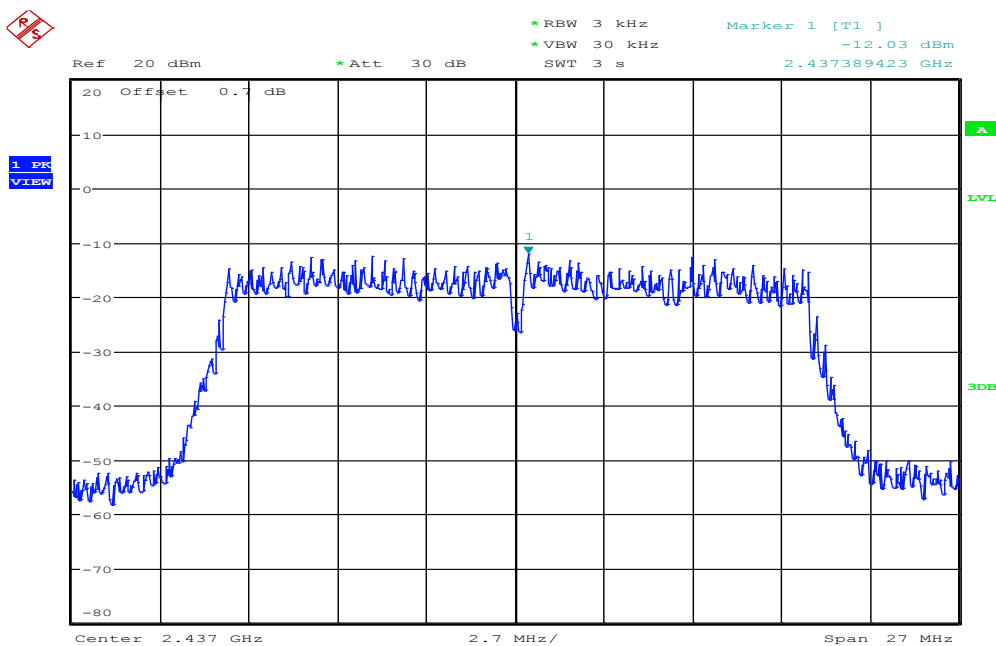

IEEE 802.11n HT 20 MHz mode / 2462 MHz

PPSD

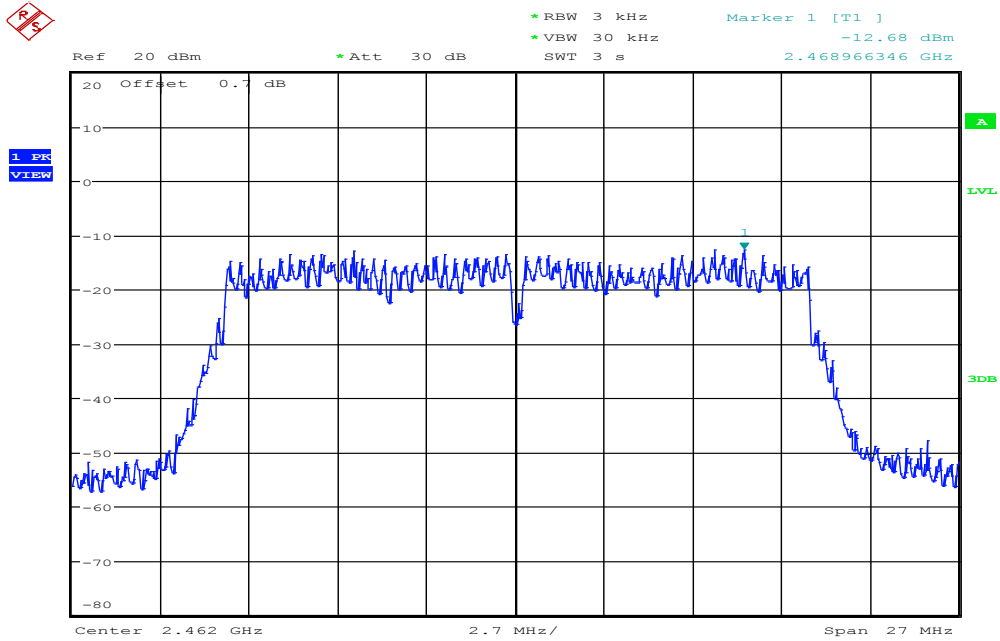

7.6 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
0.009 - 0.490	2400/F(kHz) +80	20LOG((2400/F(kHz))+80)
0.490 - 1.705	24000/F(kHz) +40	20LOG((24000/F(kHz))+40)
1.705 – 30.0	30	69.54
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration


9kHz ~ 30MHz

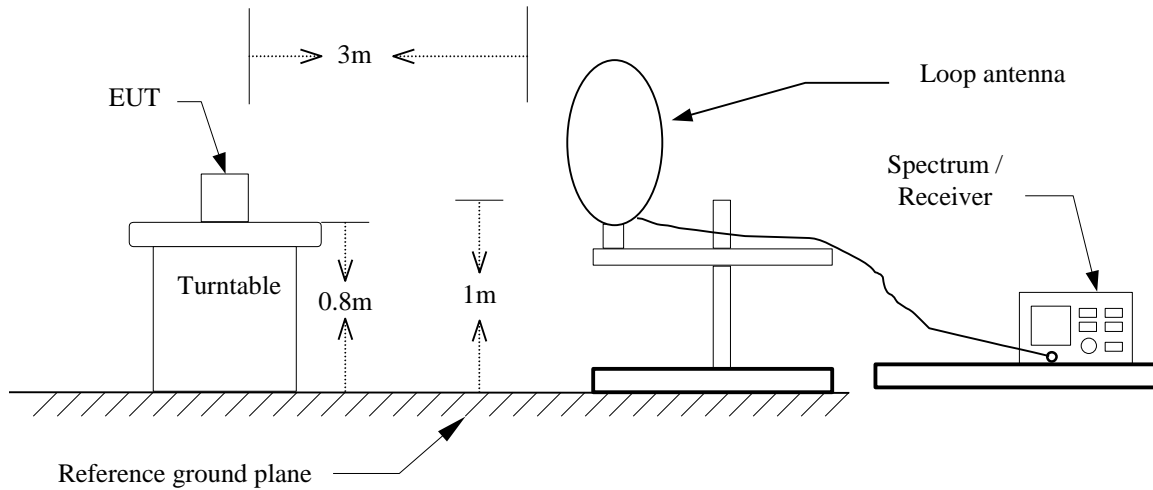

30MHz ~ 1GHz

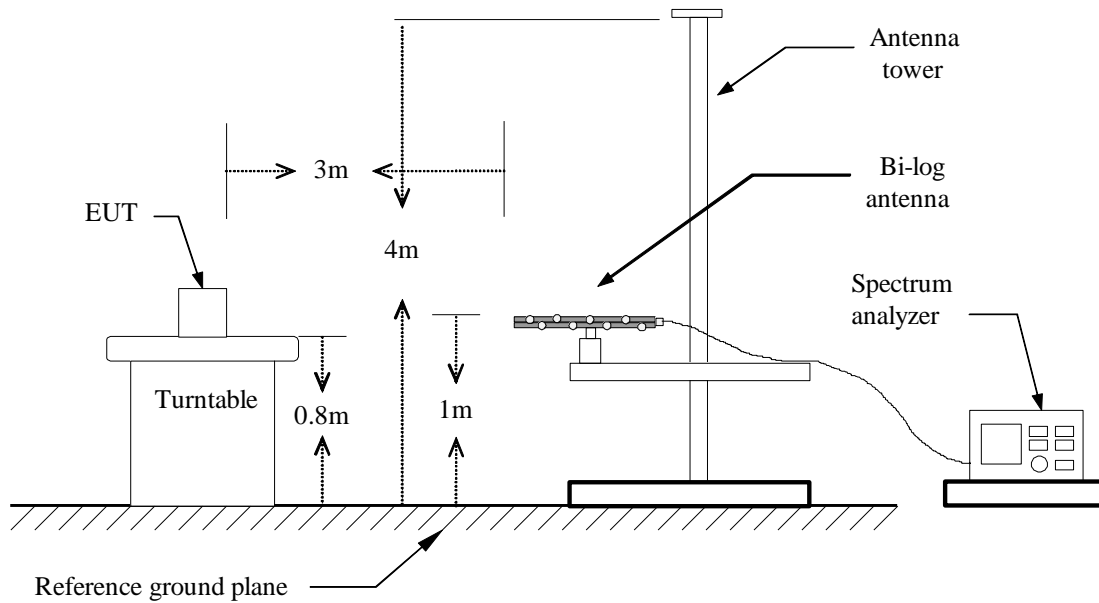

Above 1 GHz

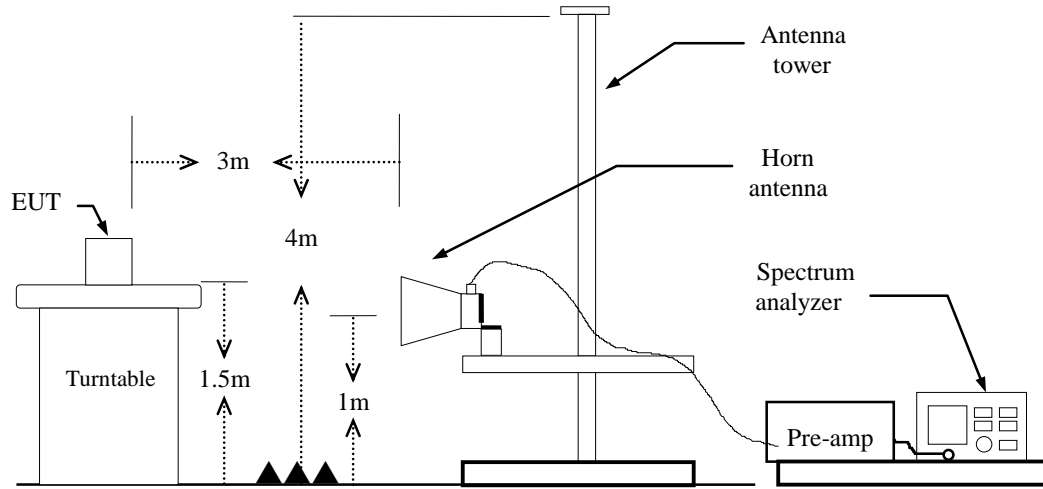

TEST PROCEDURE

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m high and below 1 GHz is 0.8m high above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW : 1MHz / VBW : 3MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz,
if duty cycle \geq 98%, VBW=10Hz.
if duty cycle < 98% VBW=1/T.

IEEE 802.11b mode: \geq 98%, VBW=10Hz

IEEE 802.11g mode: \geq 96%, VBW=750Hz

IEEE 802.11n HT 20 MHz mode: \geq 96%, VBW=750Hz

7. Repeat above procedures until the measurements for all frequencies are complete.
8. Result = Spectrum Reading + cable loss(spectrum to Amp) - Amp Gain + Cable loss(Amp to receive Ant)+ Receive Ant

Note: We checked every harmonics frequencies from Fundamental frequencies with reduced VBW, and we mark a point to prove pass or not if we find any emission. For this case, there are no emissions hidden in the noise floor.

TEST RESULTS

Below 1GHz

Operation Mode: Normal Link


Test Date: January 10, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver.

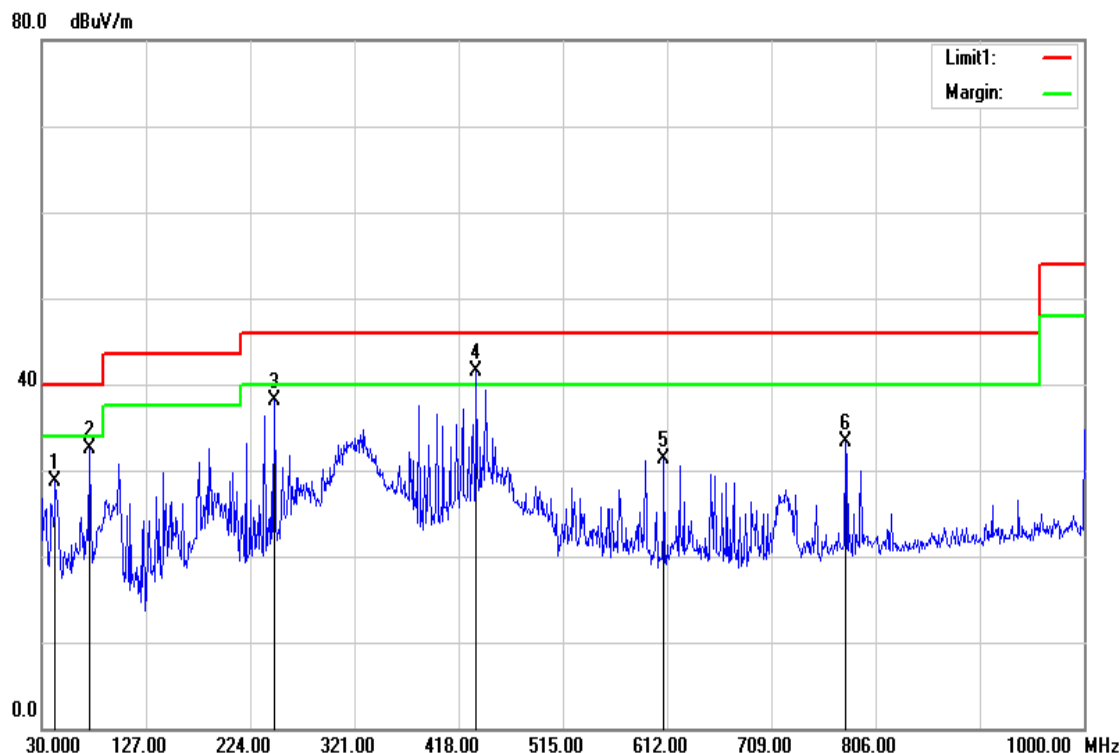

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
42.6100	45.48	-16.84	28.64	40.00	-11.36	peak	V
74.6200	53.38	-20.96	32.42	40.00	-7.58	peak	V
246.3100	54.47	-16.36	38.11	46.00	-7.89	peak	V
434.4900	52.17	-10.66	41.51	46.00	-4.49	peak	V
609.0900	38.87	-7.54	31.33	46.00	-14.67	peak	V
777.8700	38.08	-4.69	33.39	46.00	-12.61	peak	V

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

Operation Mode: Normal Link


Test Date: January 10, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Hor.

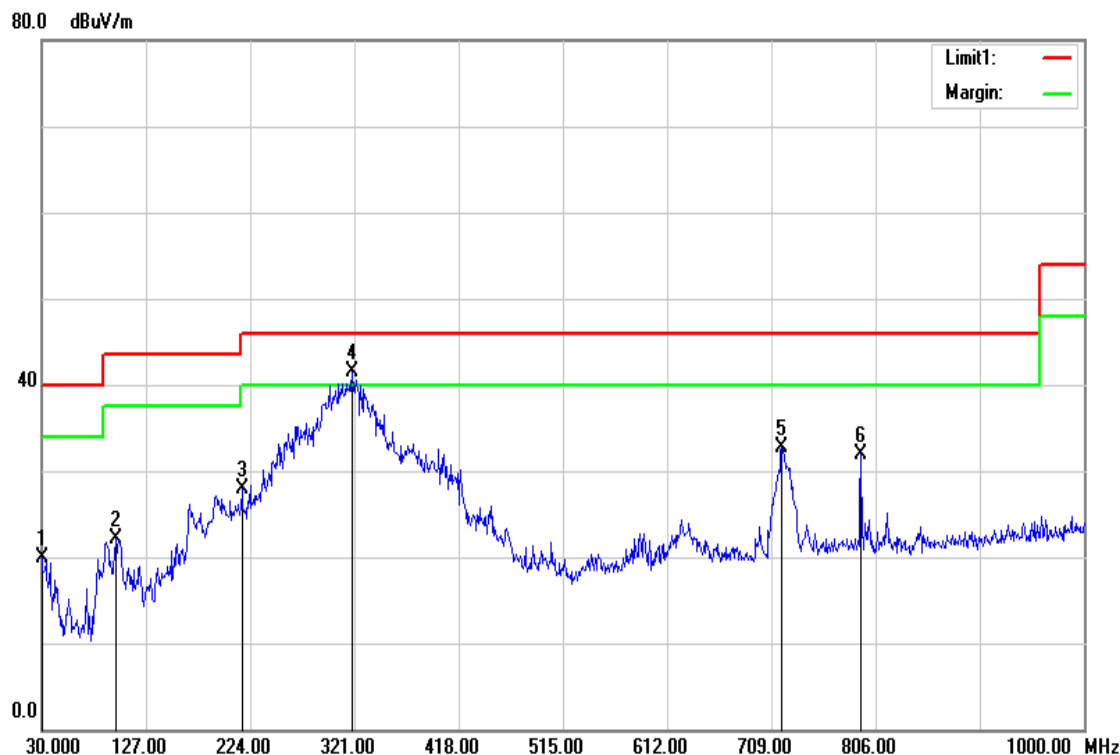

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
30.0000	27.74	-7.91	19.83	40.00	-20.17	peak	H
98.8700	41.48	-19.31	22.17	43.50	-21.33	peak	H
216.2400	44.50	-16.69	27.81	46.00	-18.19	peak	H
319.0600	55.22	-13.73	41.49	46.00	-4.51	peak	H
718.7000	38.37	-5.64	32.73	46.00	-13.27	peak	H
792.4200	36.39	-4.56	31.83	46.00	-14.17	peak	H





Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. $Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)$.





Above 1 GHz

TX / IEEE 802.11b / 2412 MHz

Polarity: Vertical

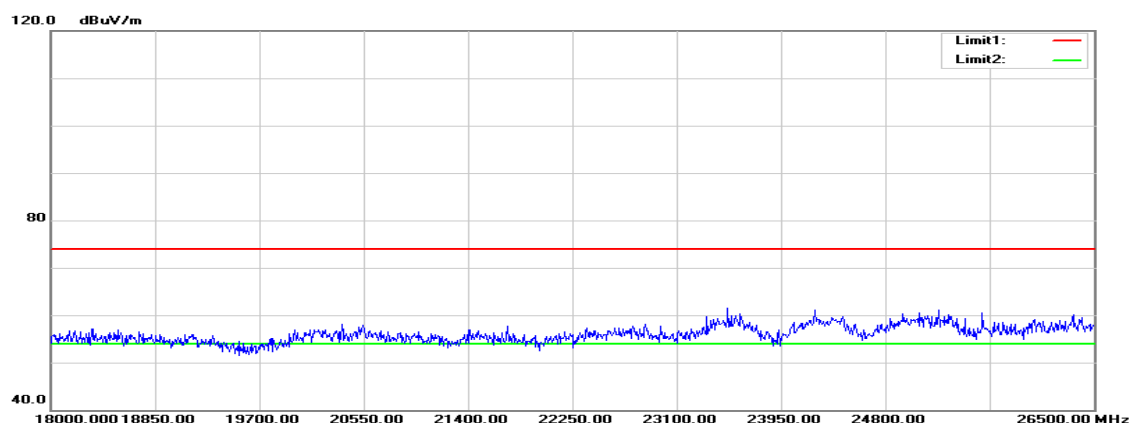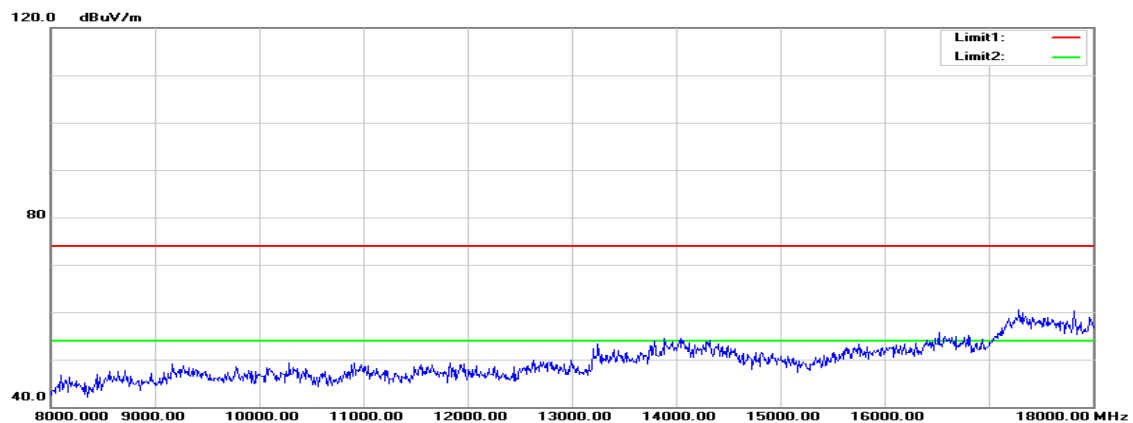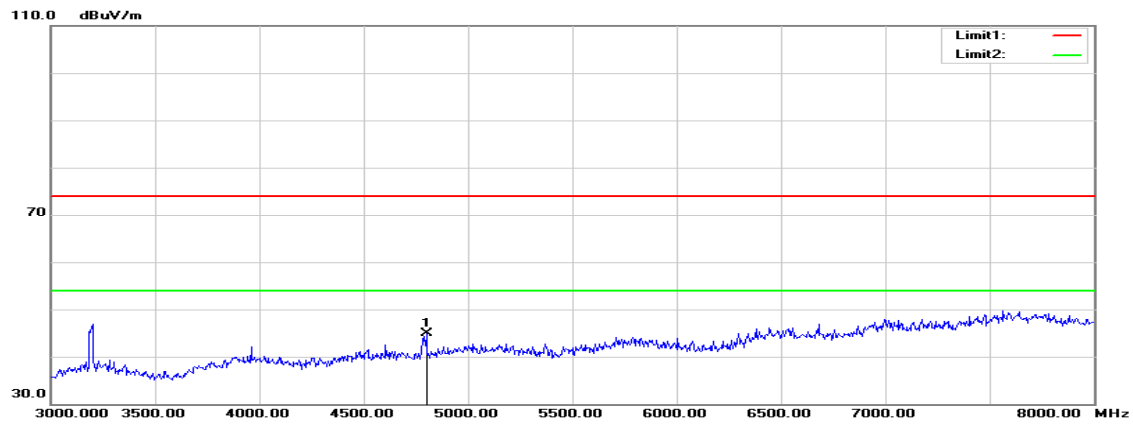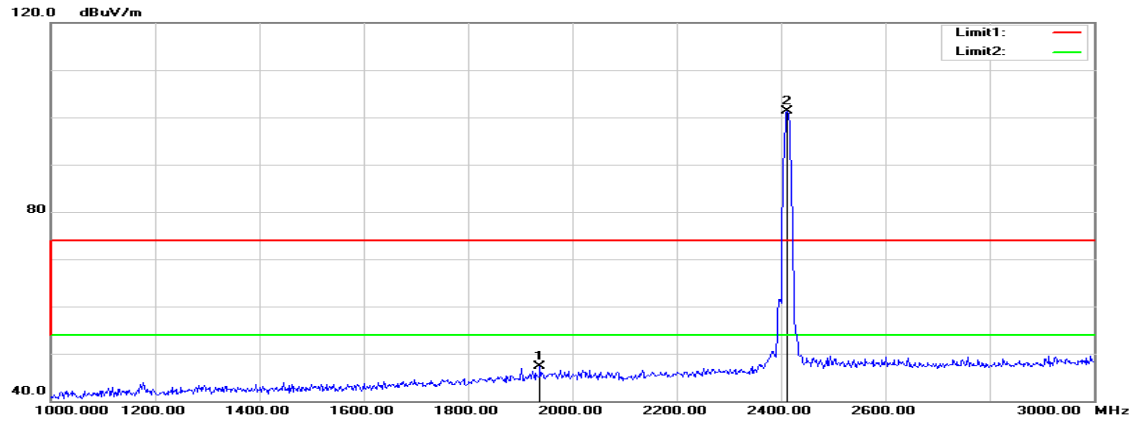

Polarity: Horizontal

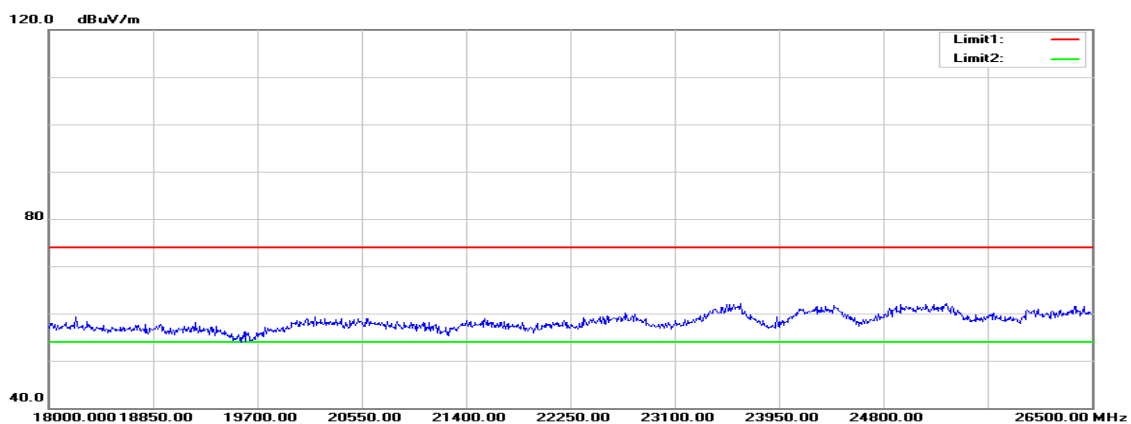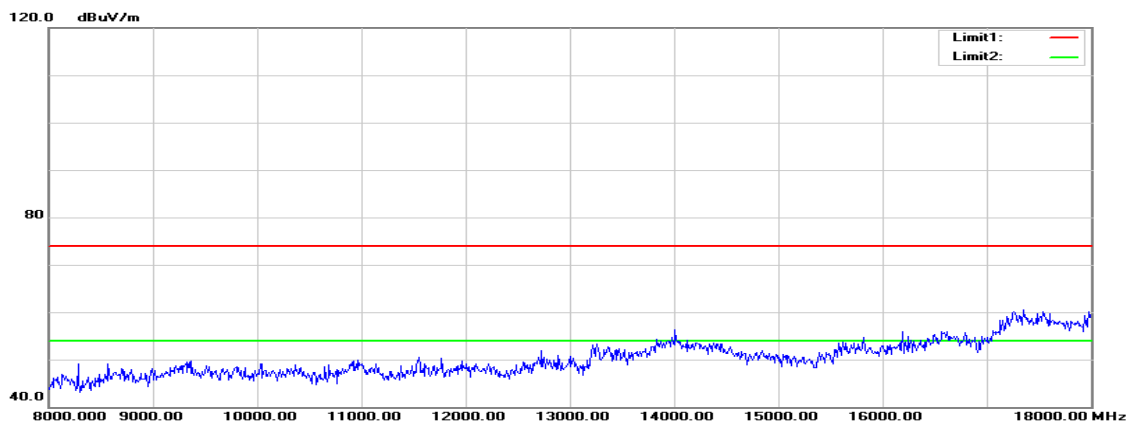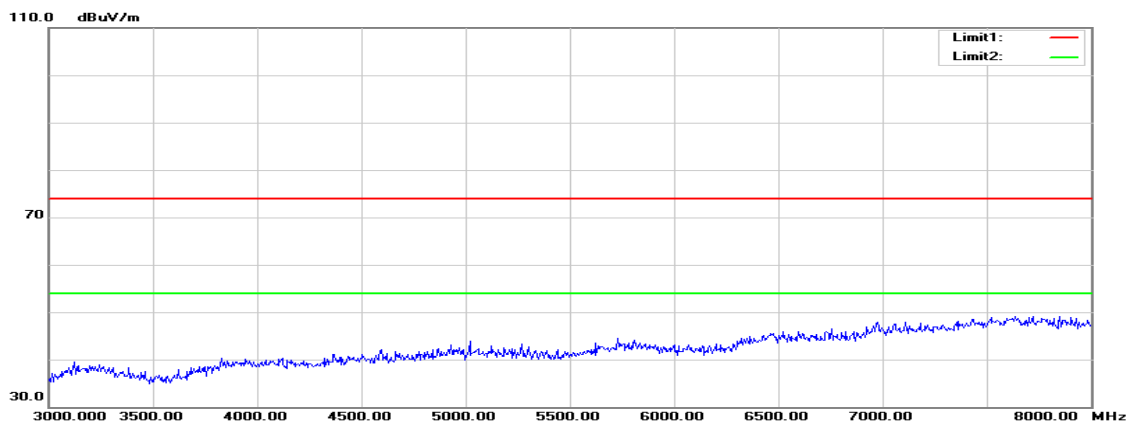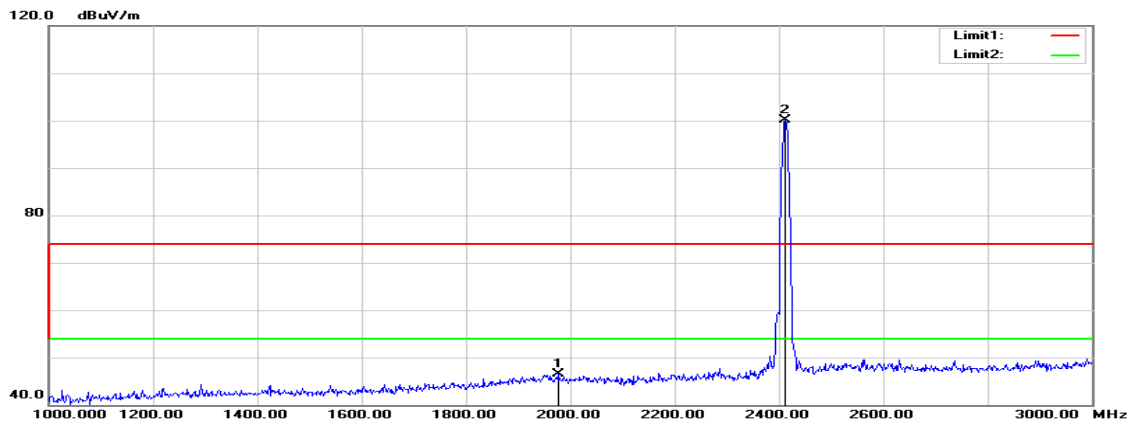

Above 1 GHz

Operation Mode: TX / IEEE 802.11b / 2412 MHz

Test Date: January 10, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1938.000	51.26	-3.92	47.34	74.00	-26.66	peak	V
4800.000	39.79	5.03	44.82	74.00	-29.18	peak	V
N/A							
1978.000	50.13	-3.71	46.42	74.00	-27.58	peak	H
N/A							

Remark:





1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Result (dBuV/m) – limit (dBuV/m).

TX / IEEE 802.11b / 2437 MHz

Polarity: Vertical

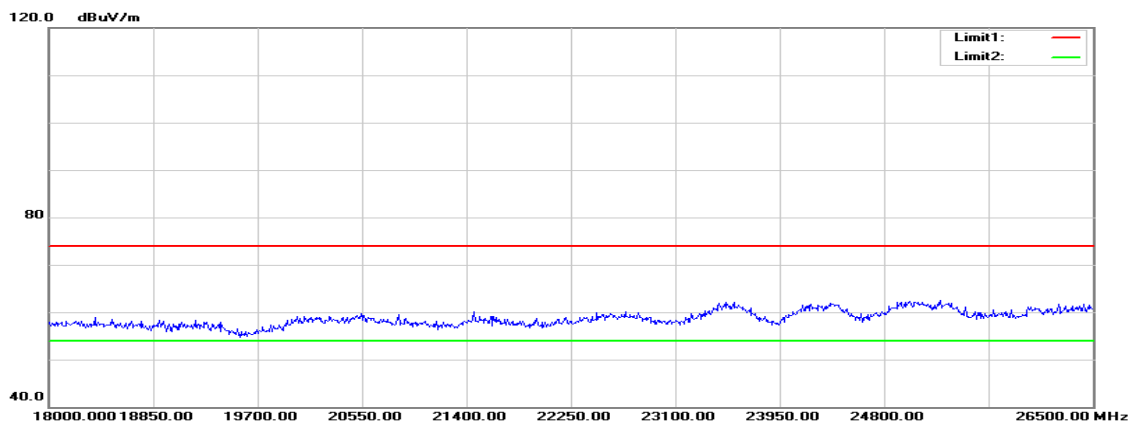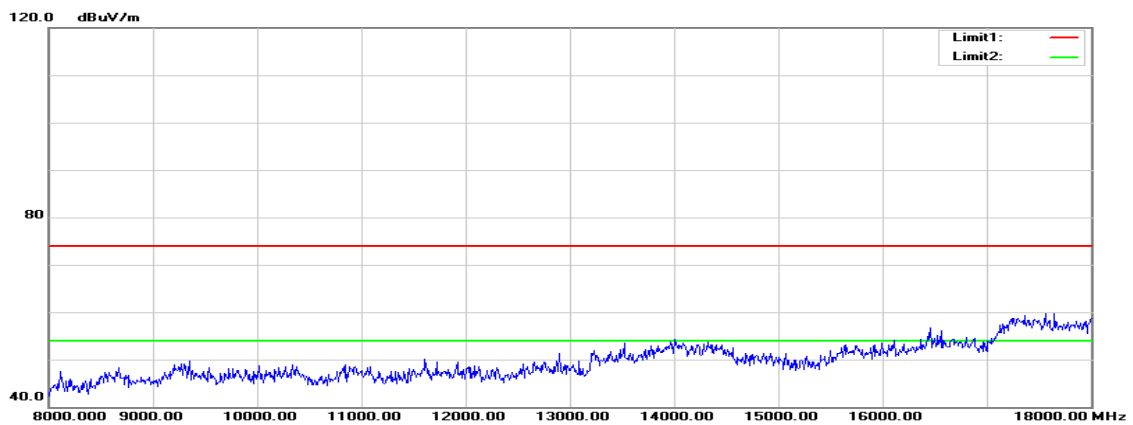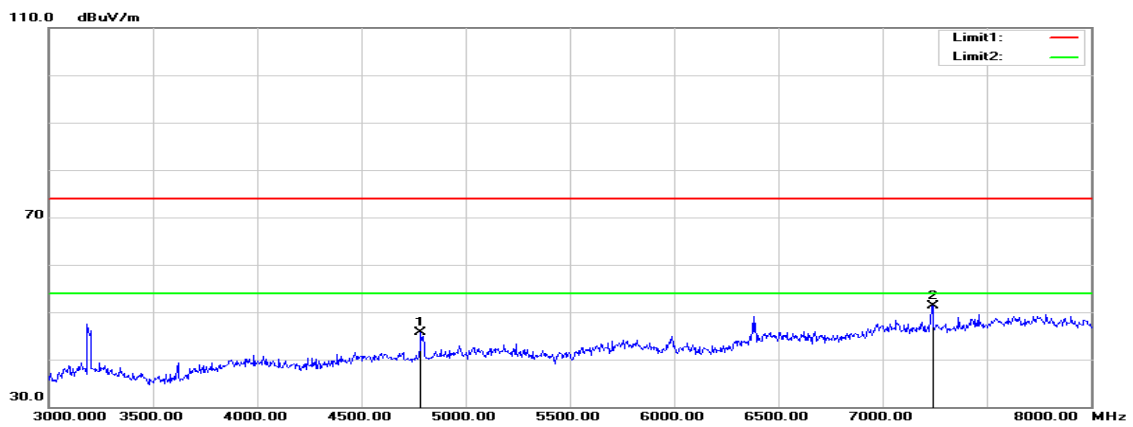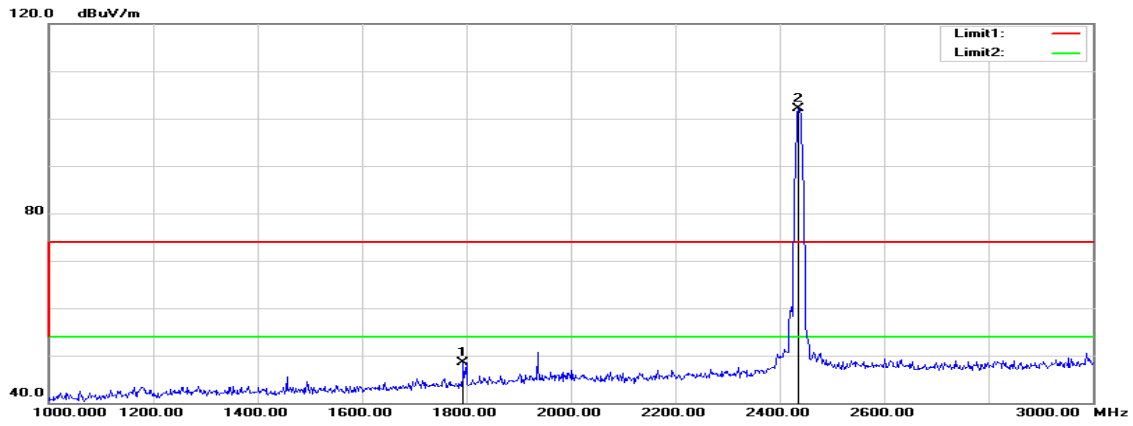

Polarity: Horizontal

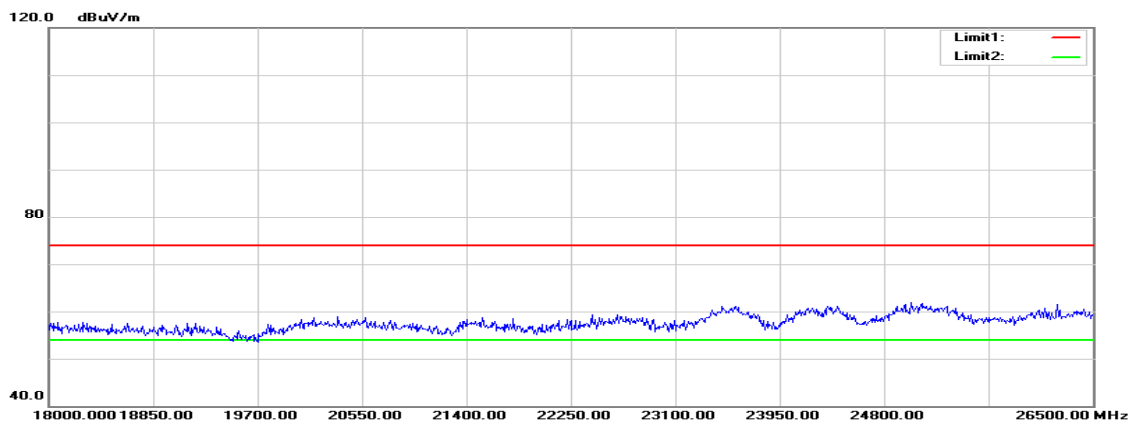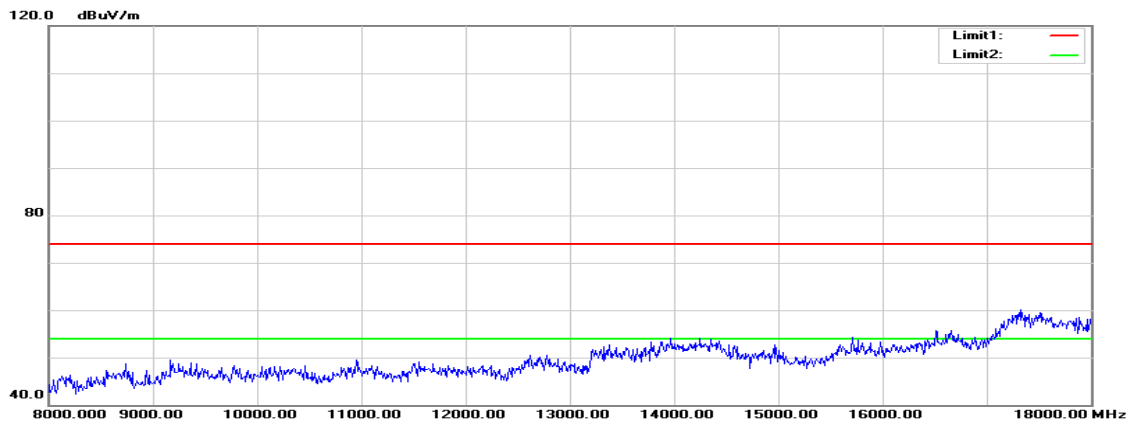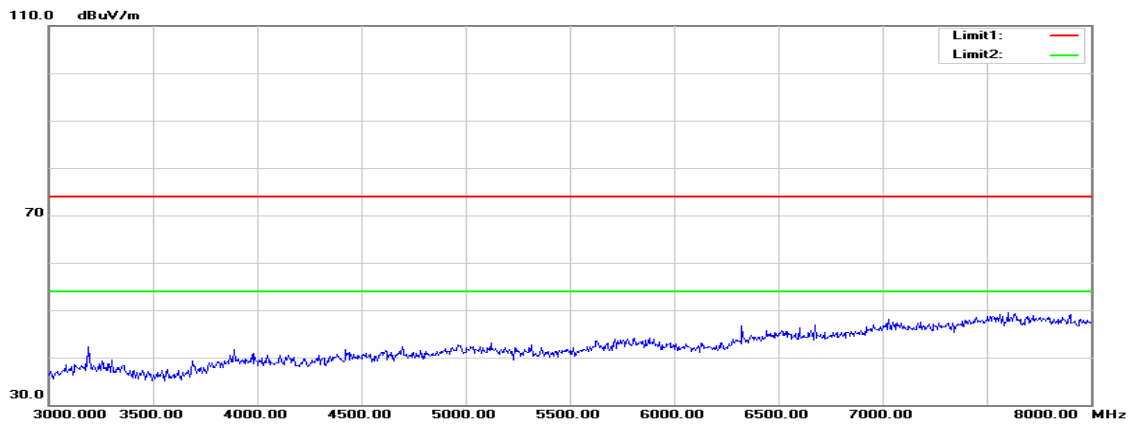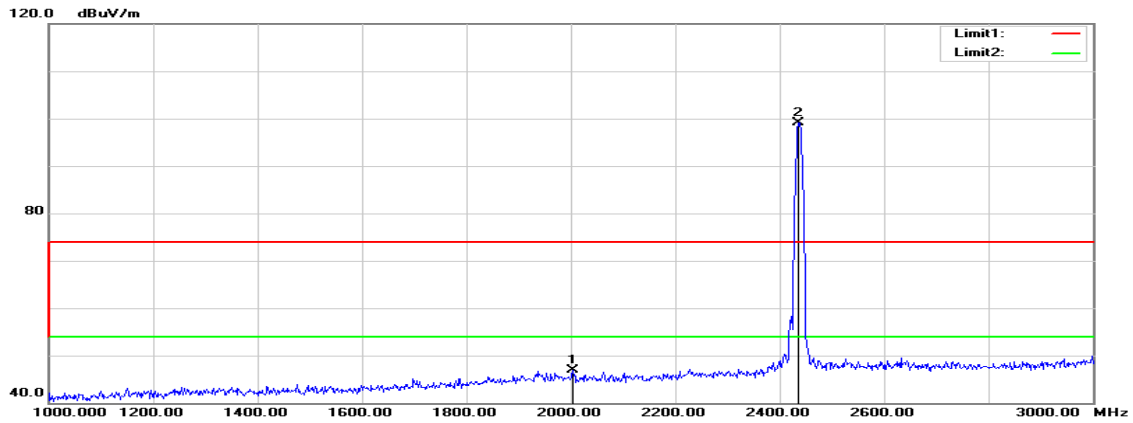

Operation Mode: TX / IEEE 802.11b / 2437 MHz

Test Date: January 10, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1794.000	53.22	-4.67	48.55	74.00	-25.45	peak	V
4785.000	40.75	4.99	45.74	74.00	-28.26	peak	V
7240.000	38.64	12.72	51.36	74.00	-22.64	peak	V
N/A							
2004.000	50.44	-3.60	46.84	74.00	-27.16	peak	H
N/A							

Remark:





1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Result (dBuV/m) – limit (dBuV/m).

TX / IEEE 802.11b / 2462 MHz

Polarity: Vertical

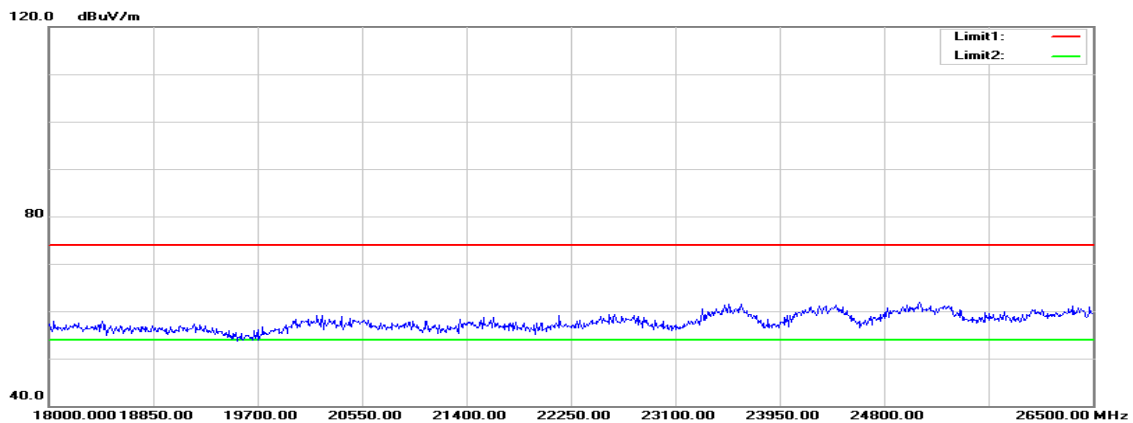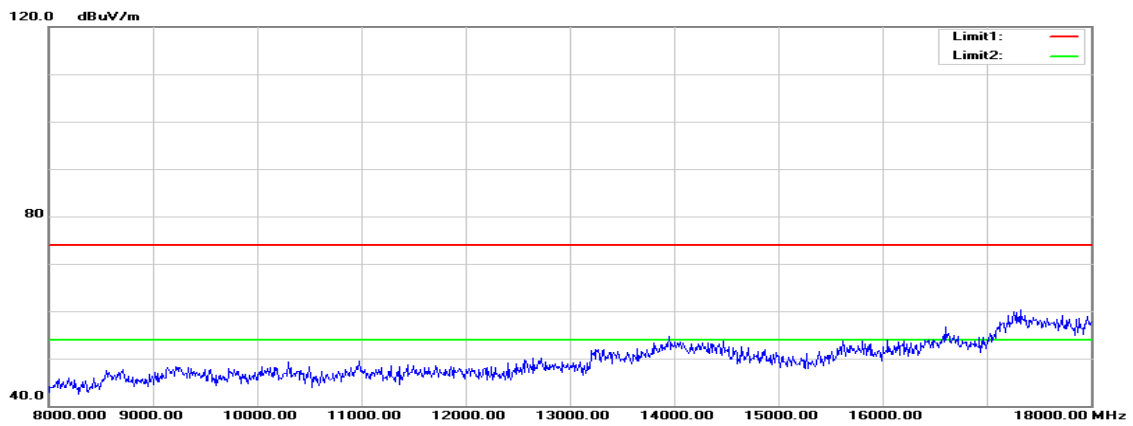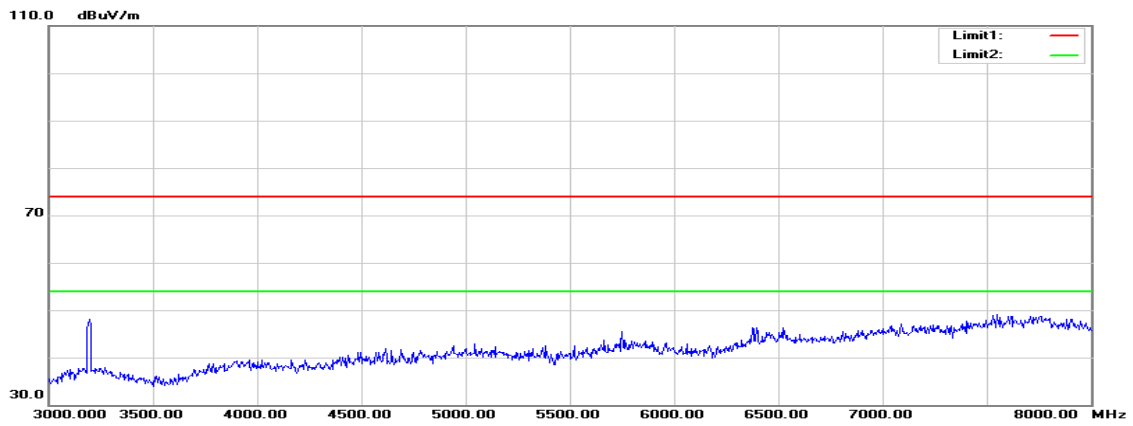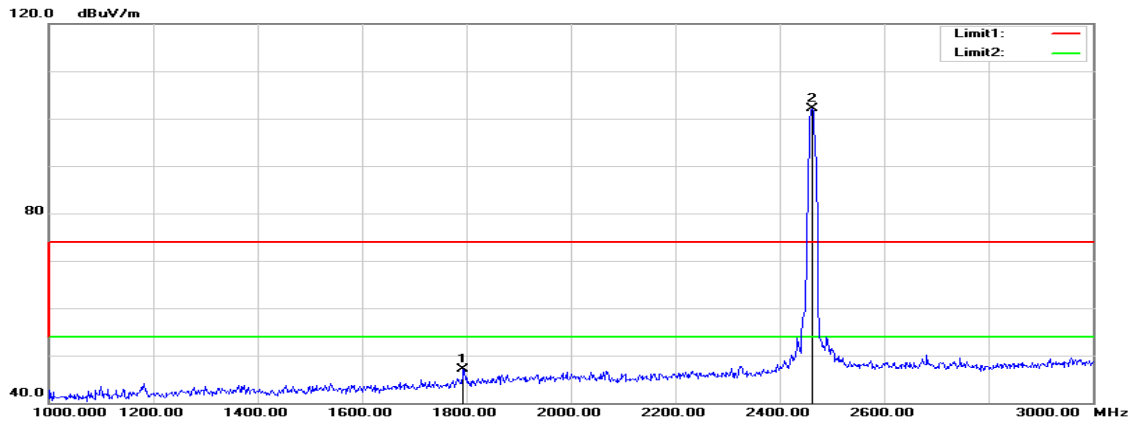

Polarity: Horizontal

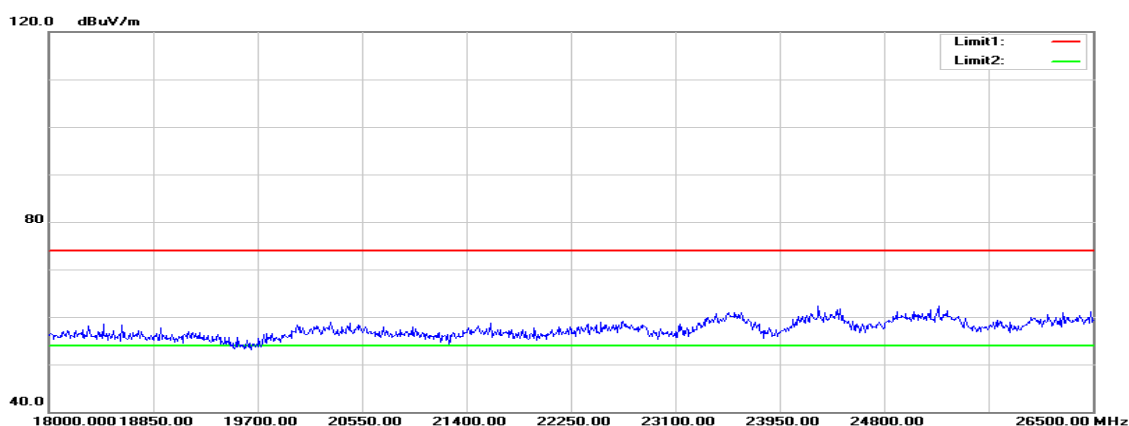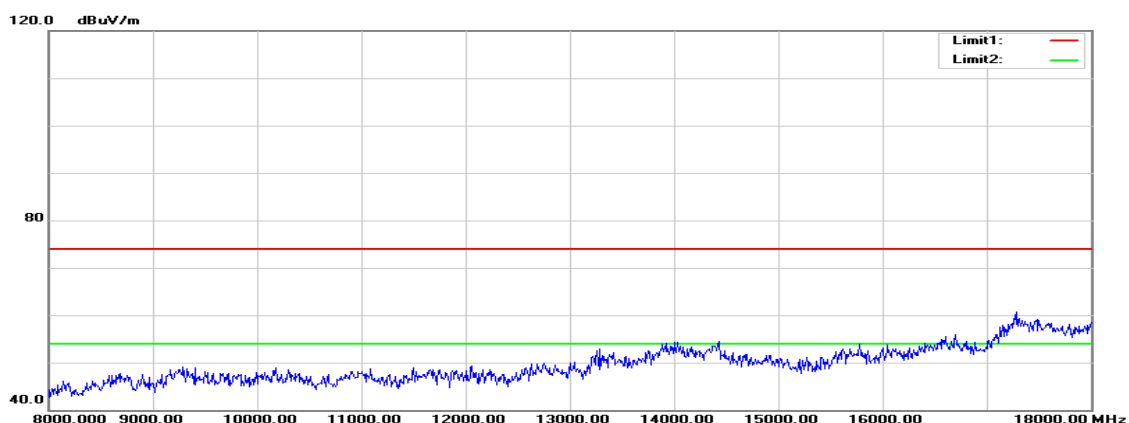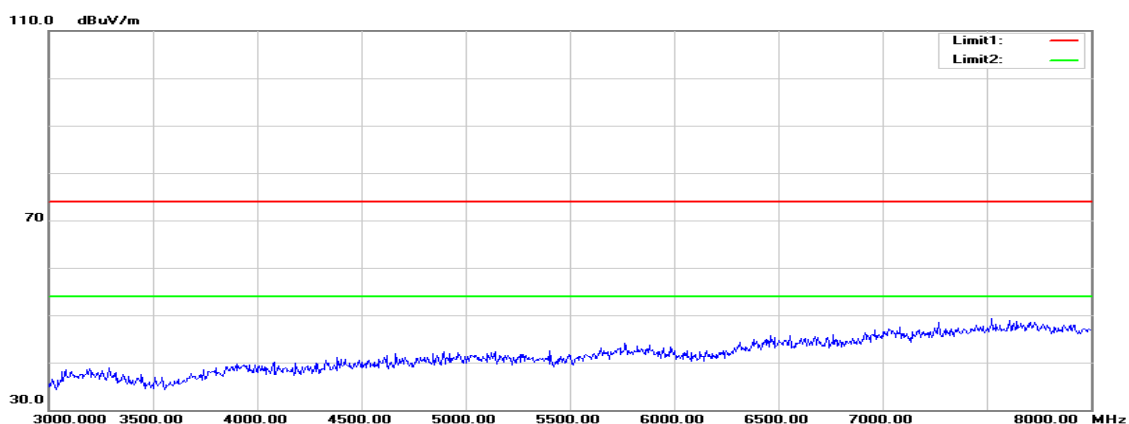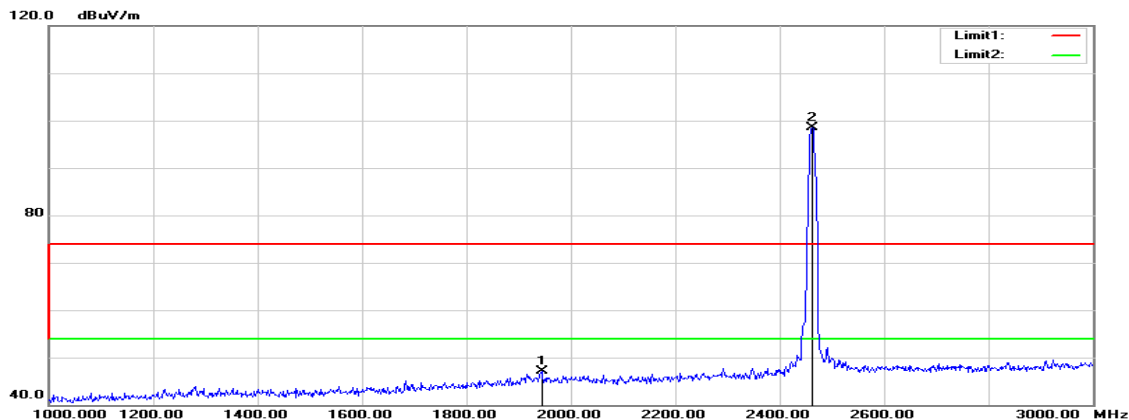

Operation Mode: TX / IEEE 802.11b / 2462 MHz

Test Date: January 10, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1794.000	51.69	-4.67	47.02	74.00	-26.98	peak	V
N/A							
1944.000	50.97	-3.89	47.08	74.00	-26.92	peak	H
N/A							

Remark:





1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Result (dBuV/m) – limit (dBuV/m).

TX / IEEE 802.11g / 2412 MHz

Polarity: Vertical

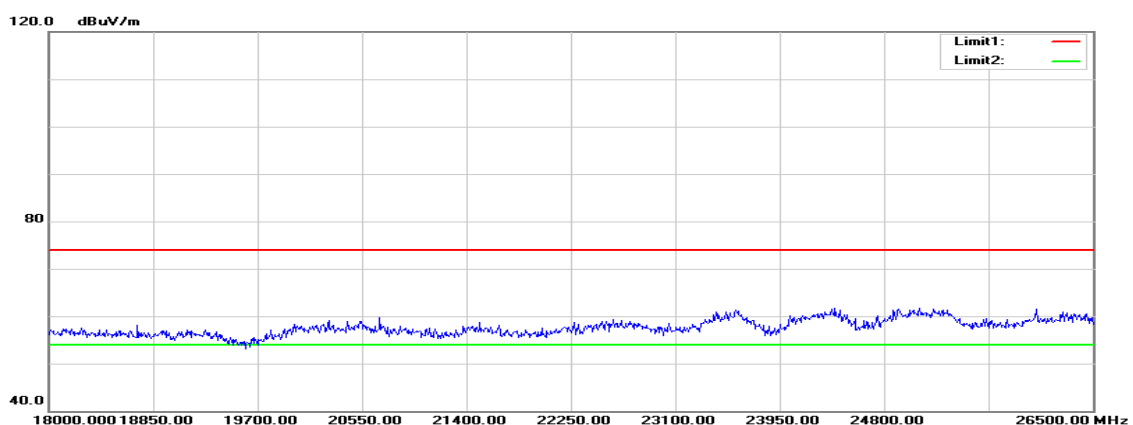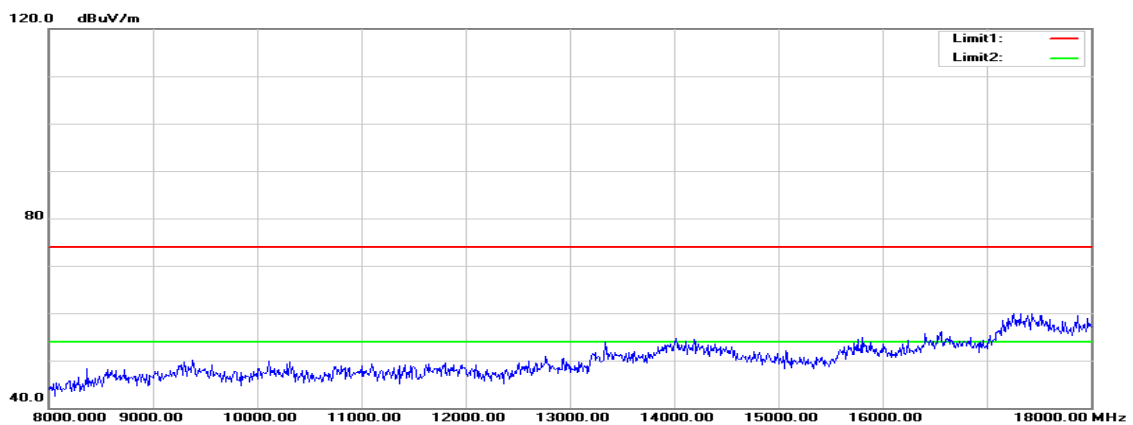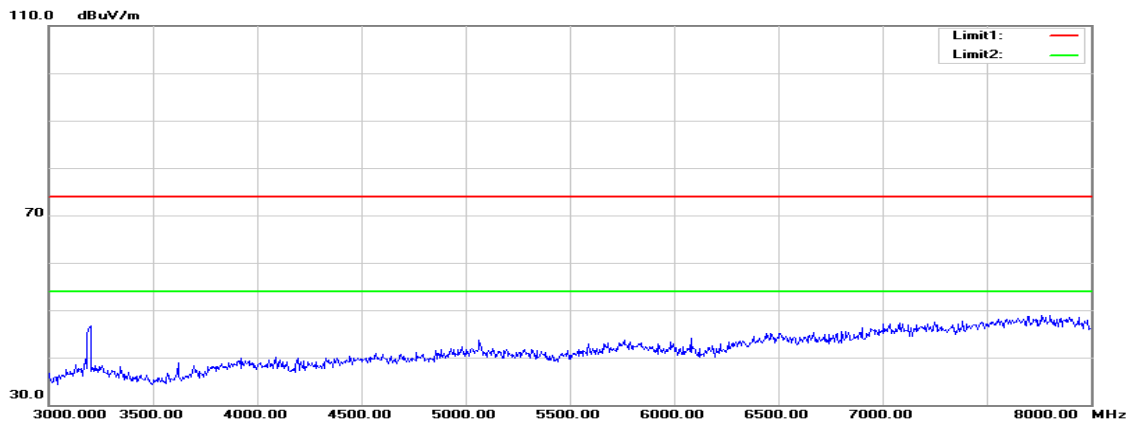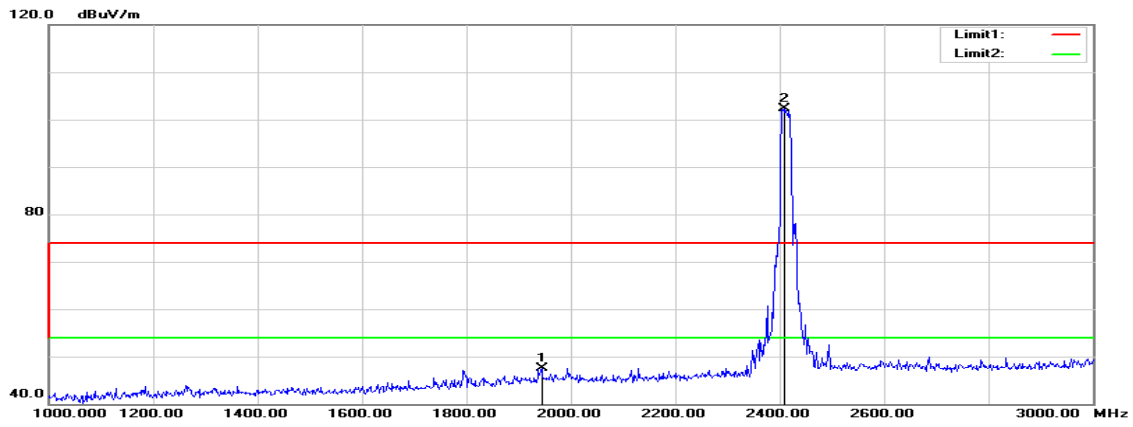

Polarity: Horizontal

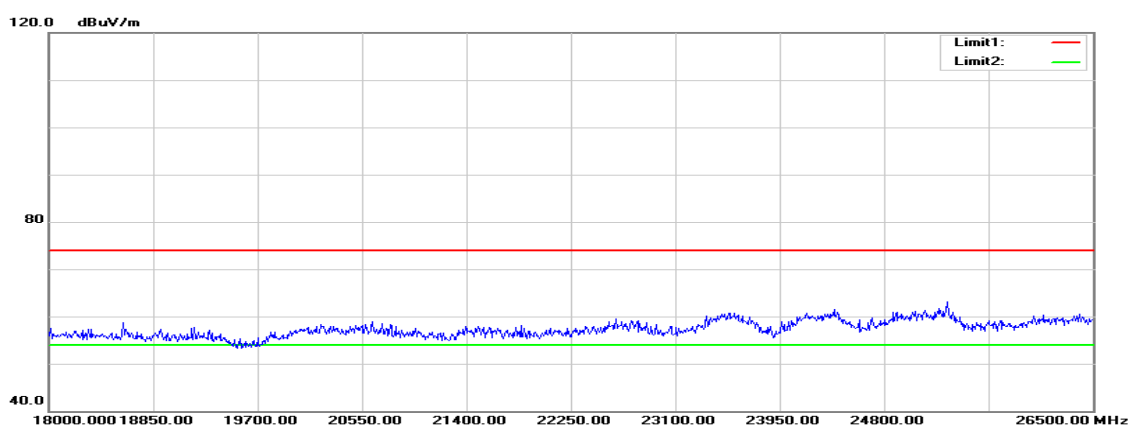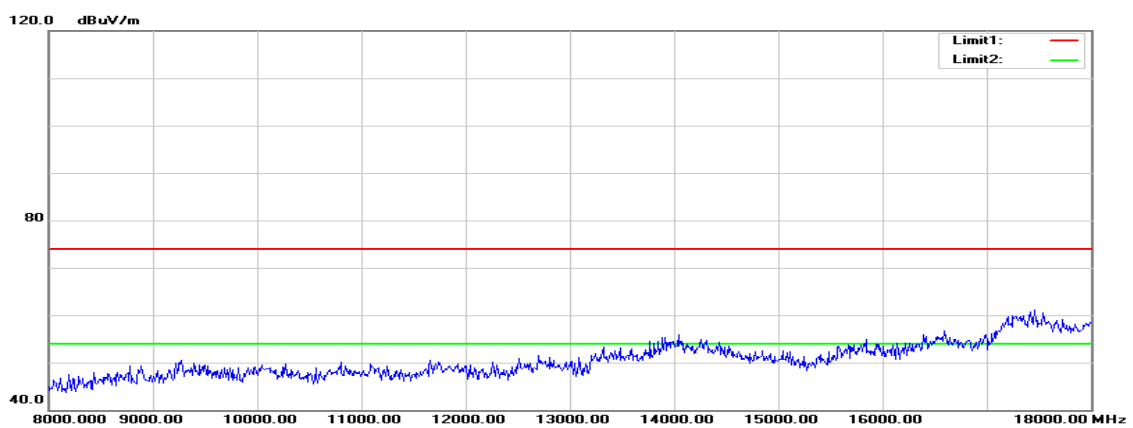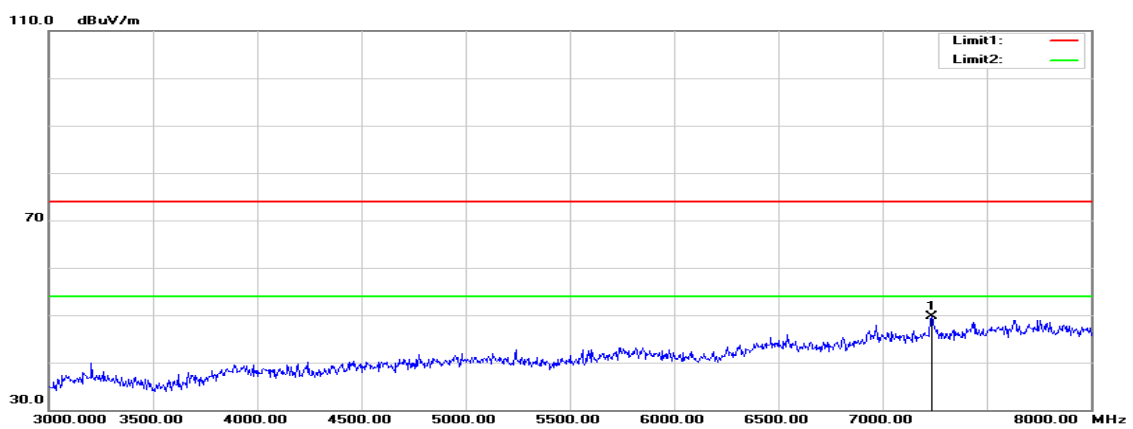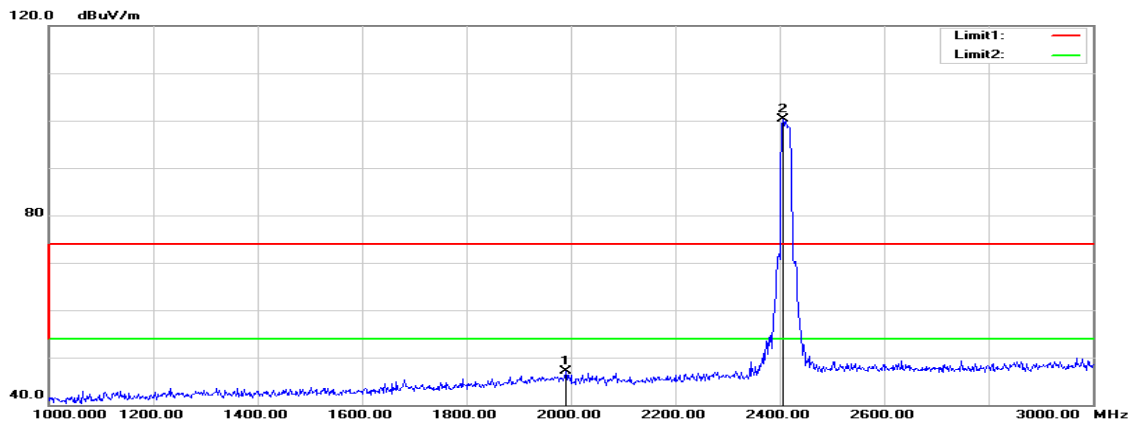

Operation Mode: TX / IEEE 802.11g / 2412 MHz

Test Date: January 10, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1944.000	51.34	-3.89	47.45	74.00	-26.55	peak	V
N/A							
1990.000	50.81	-3.65	47.16	74.00	-26.84	peak	H
7235.000	36.91	12.71	49.62	74.00	-24.38	peak	H
N/A							

Remark:





1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Result (dBuV/m) – limit (dBuV/m).

TX / IEEE 802.11g / 2437 MHz

Polarity: Vertical

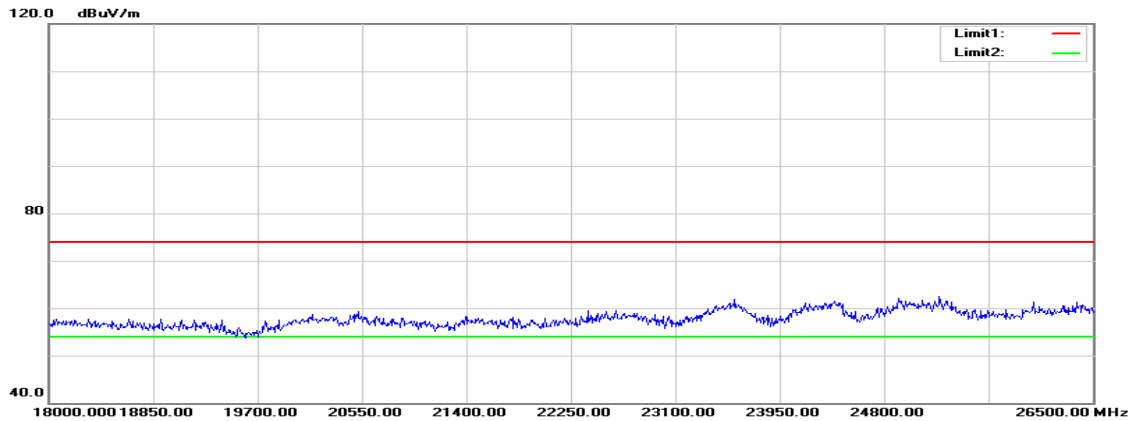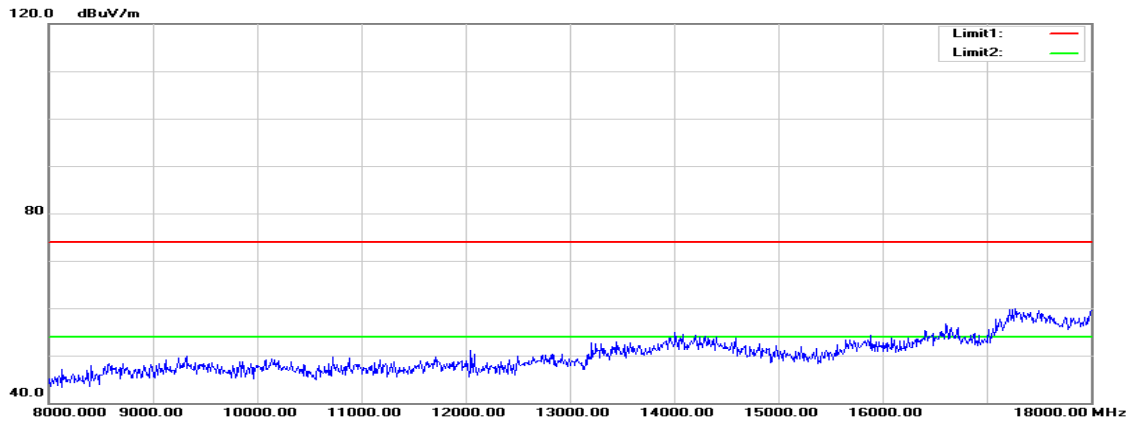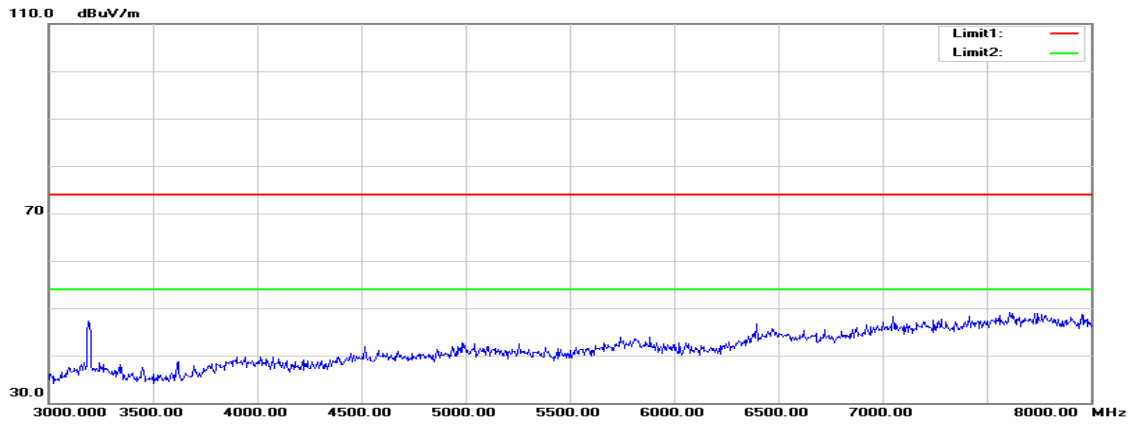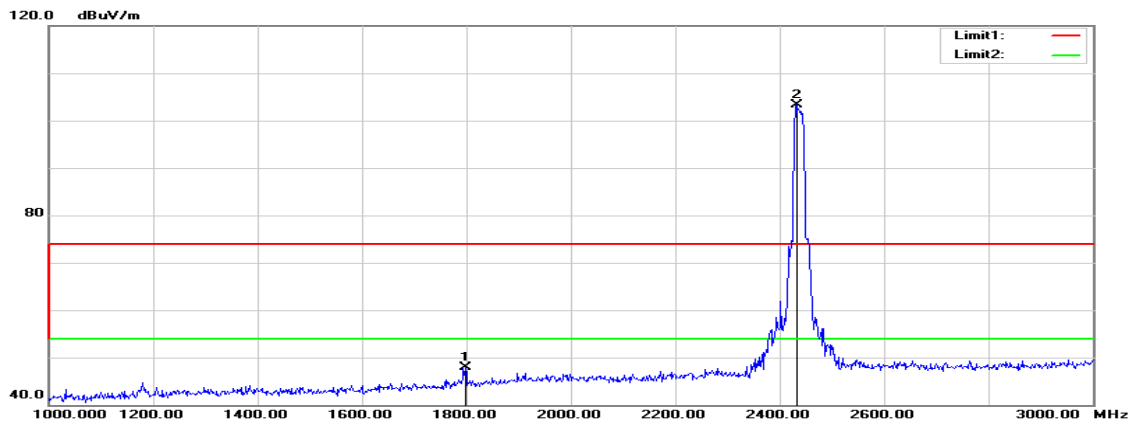

Polarity: Horizontal

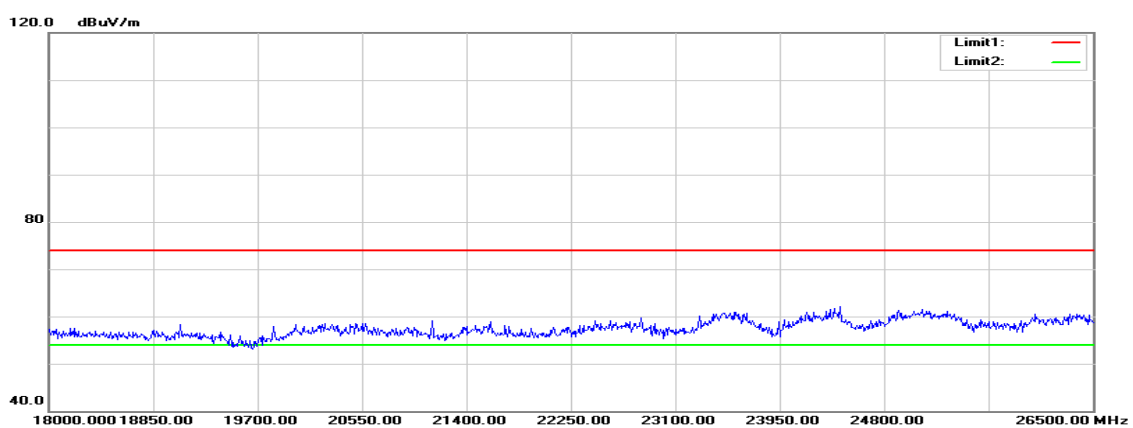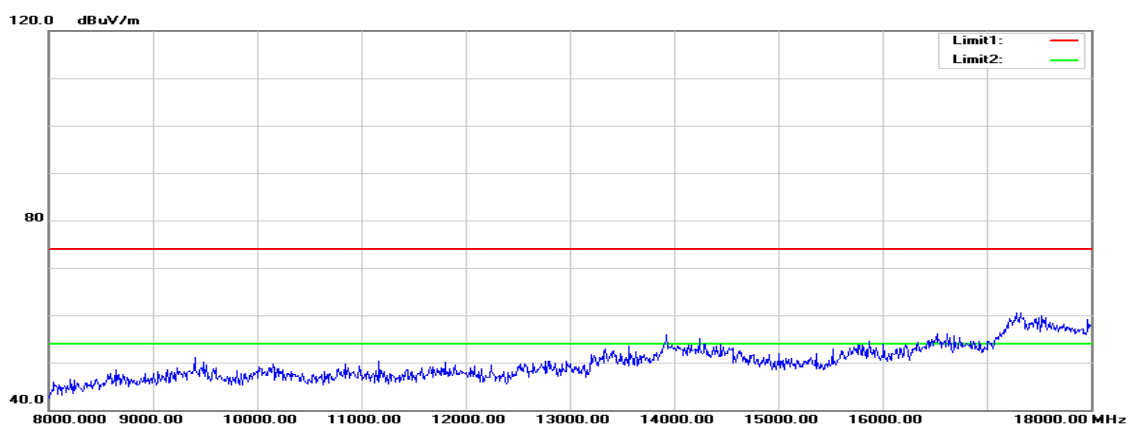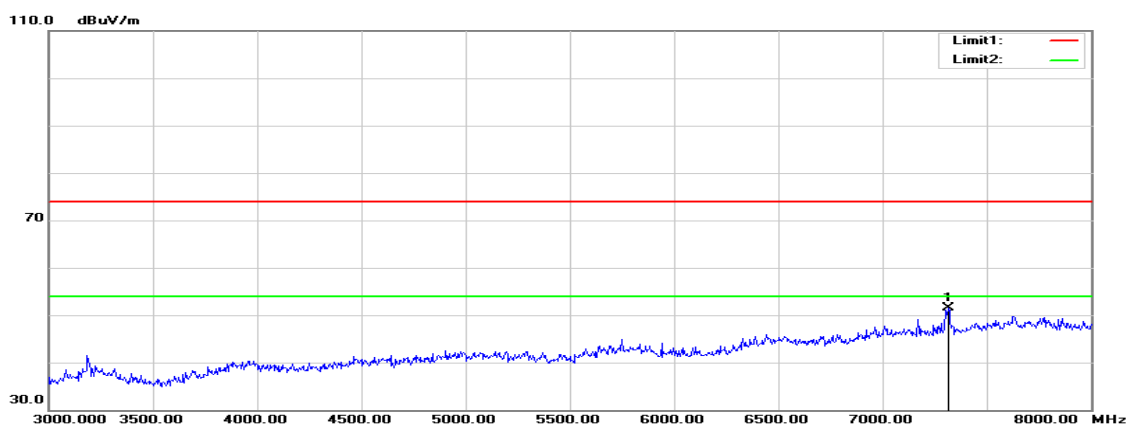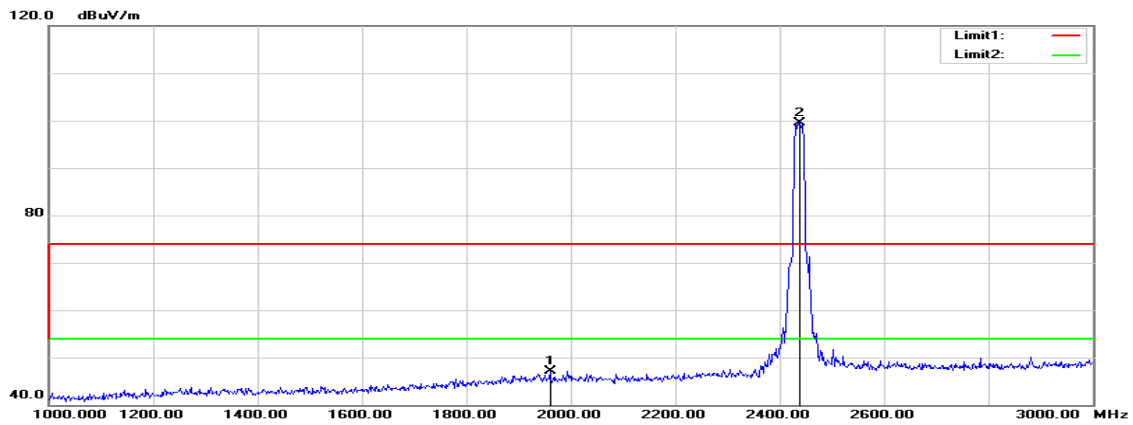

Operation Mode: TX / IEEE 802.11g / 2437 MHz

Test Date: January 10, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1798.000	52.64	-4.65	47.99	74.00	-26.01	peak	V
N/A							
1960.000	50.96	-3.81	47.15	74.00	-26.85	peak	H
7315.000	38.63	12.95	51.58	74.00	-22.42	peak	H
N/A							

Remark:





1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Result (dBuV/m) – limit (dBuV/m).

TX / IEEE 802.11g / 2462 MHz

Polarity: Vertical

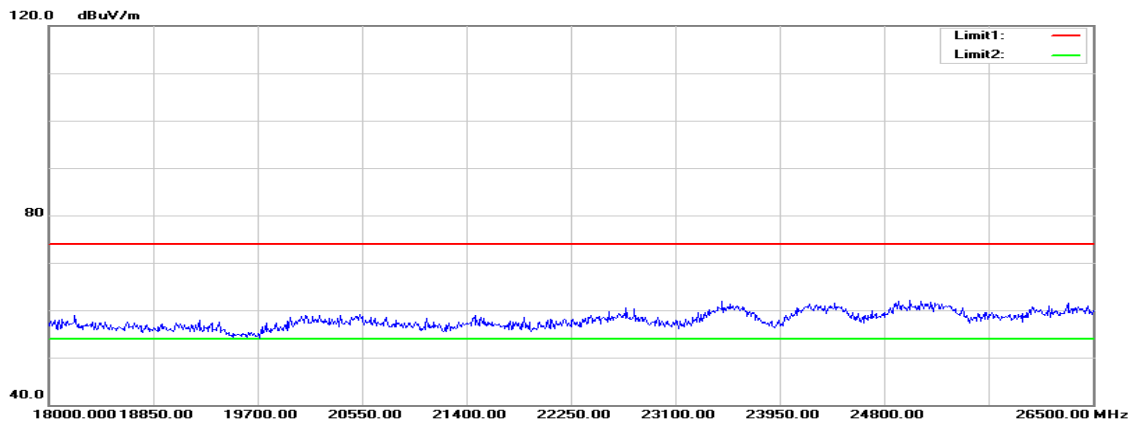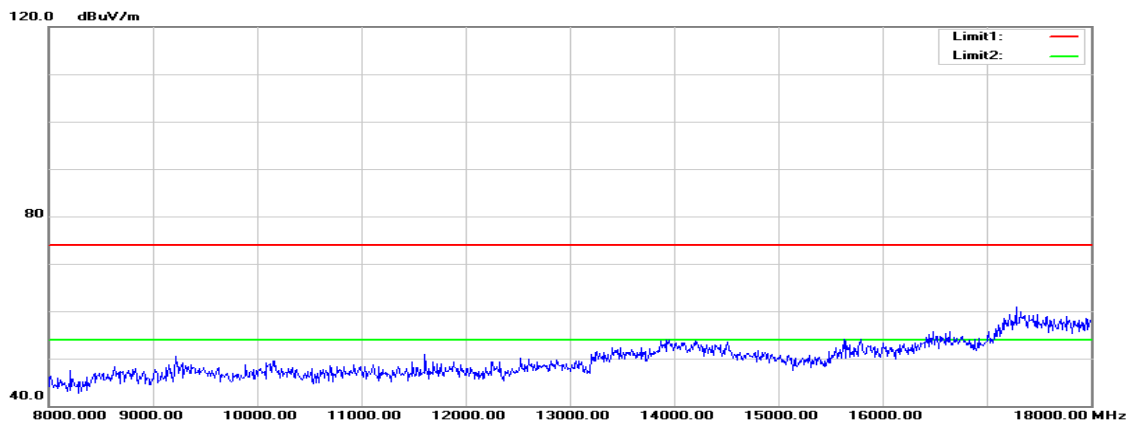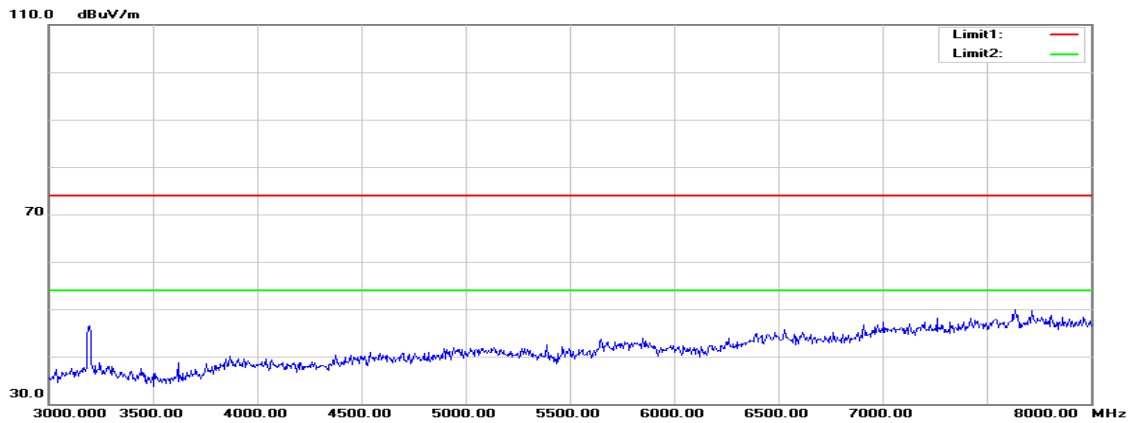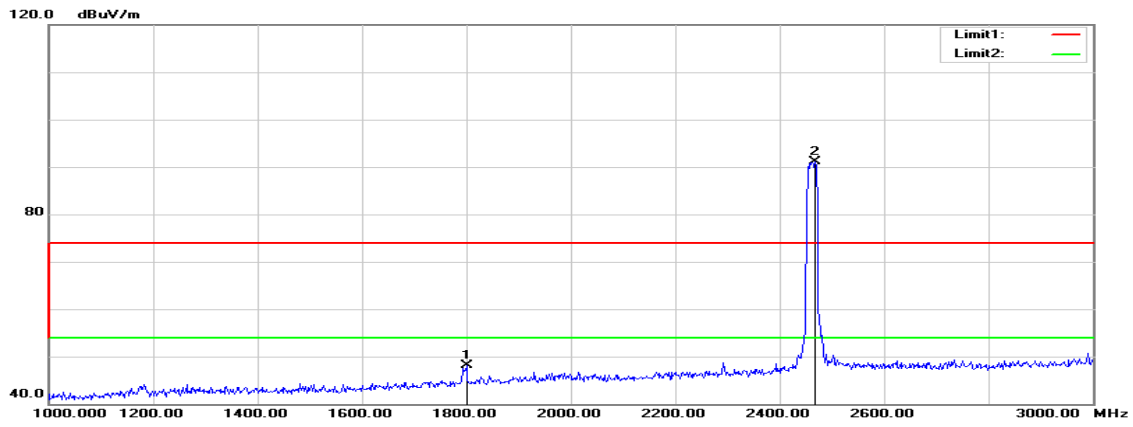

Polarity: Horizontal

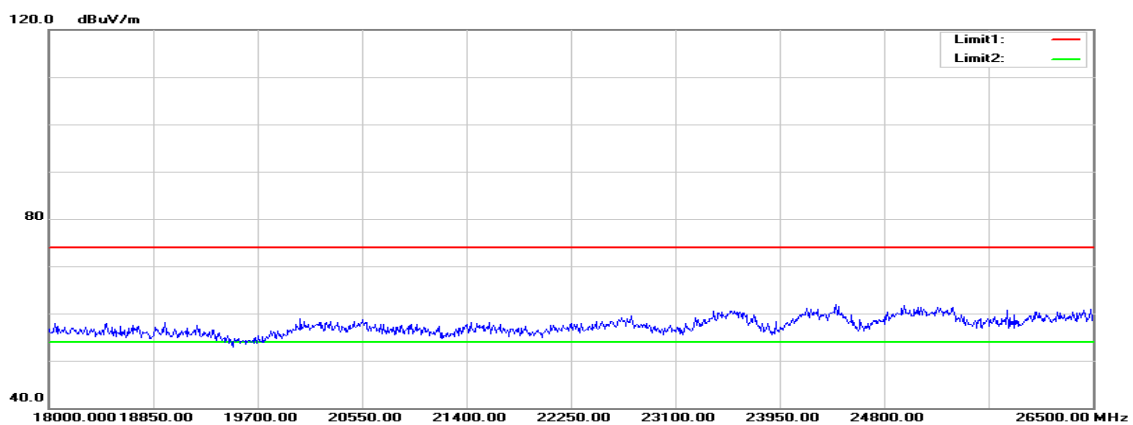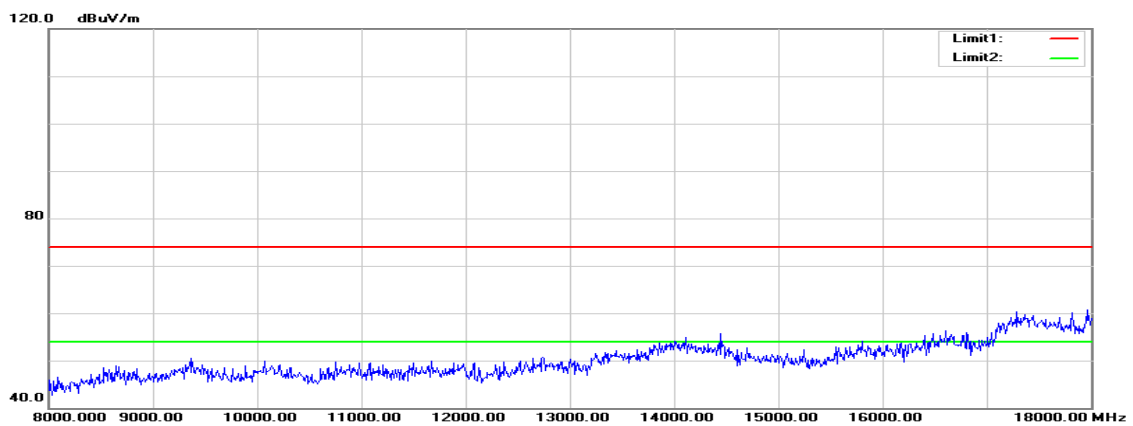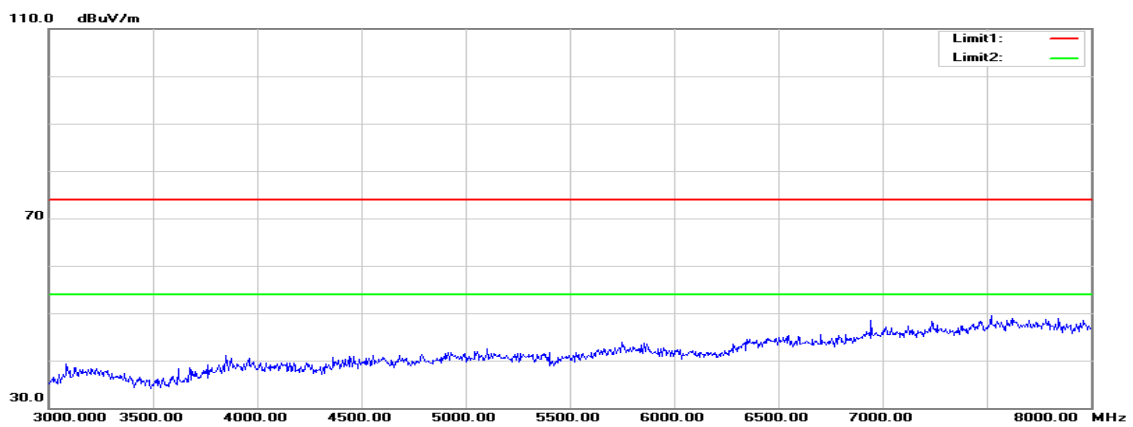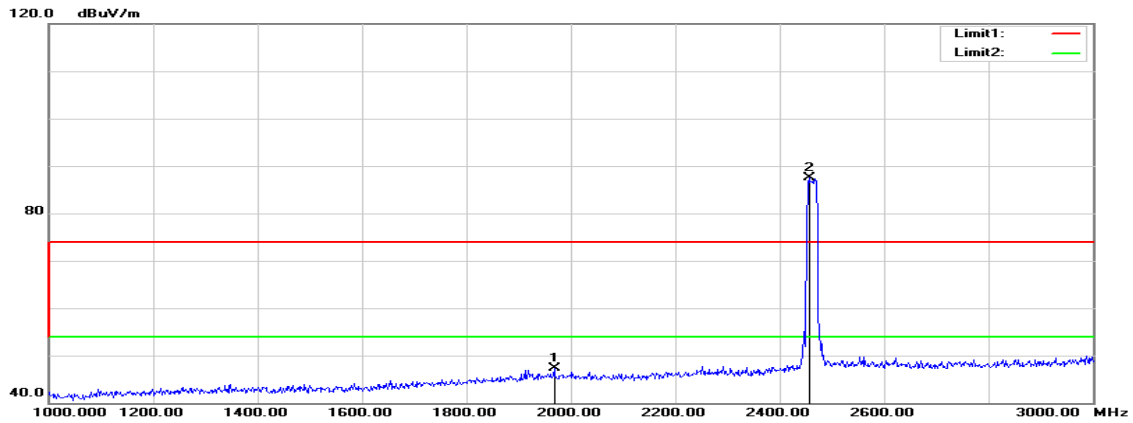

Operation Mode: TX / IEEE 802.11g / 2462 MHz

Test Date: January 10, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1800.000	52.79	-4.64	48.15	74.00	-25.85	peak	V
N/A							
1968.000	51.04	-3.77	47.27	74.00	-26.73	peak	H
N/A							

Remark:





1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Result (dBuV/m) – limit (dBuV/m).

TX / IEEE 802.11n HT 20 MHz / 2412 MHz

Polarity: Vertical

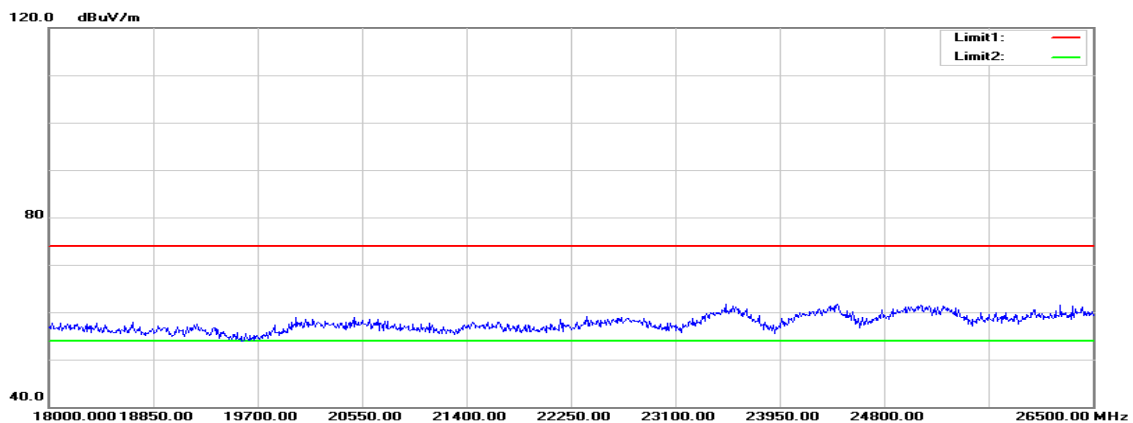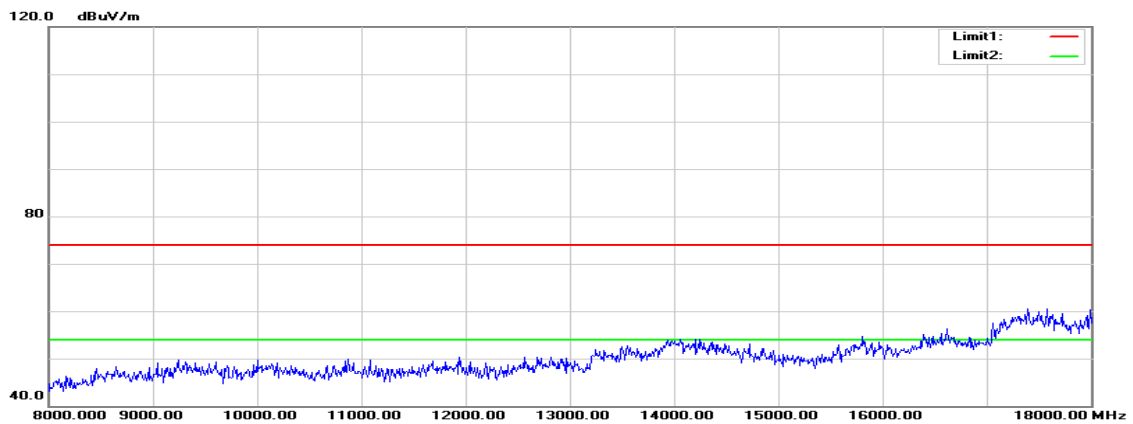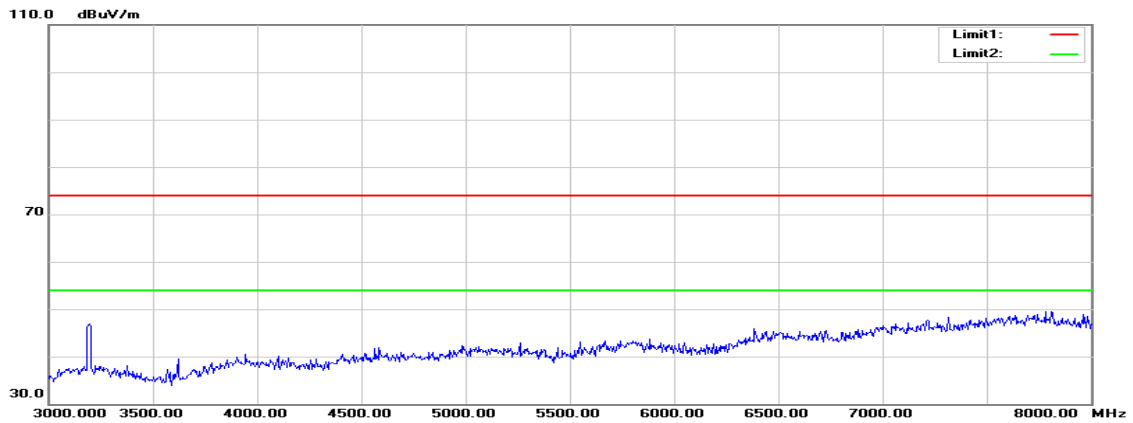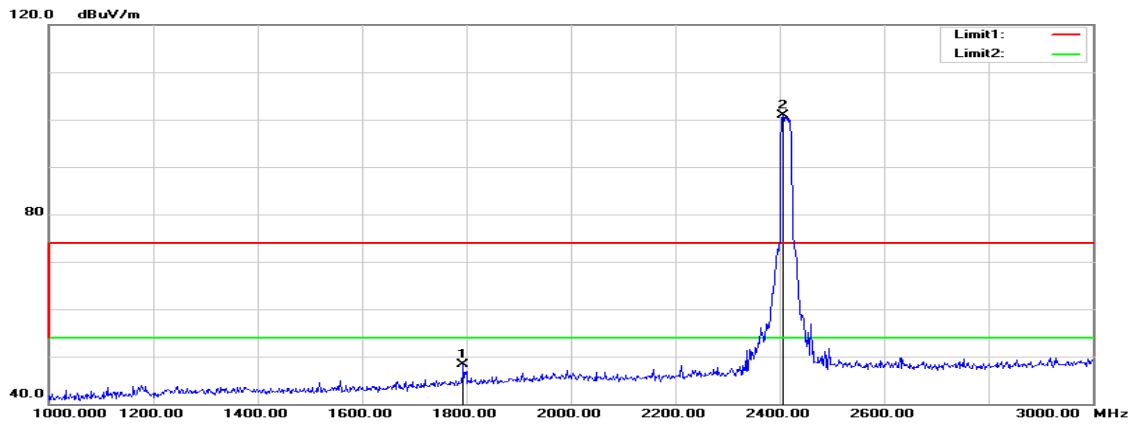

Polarity: Horizontal

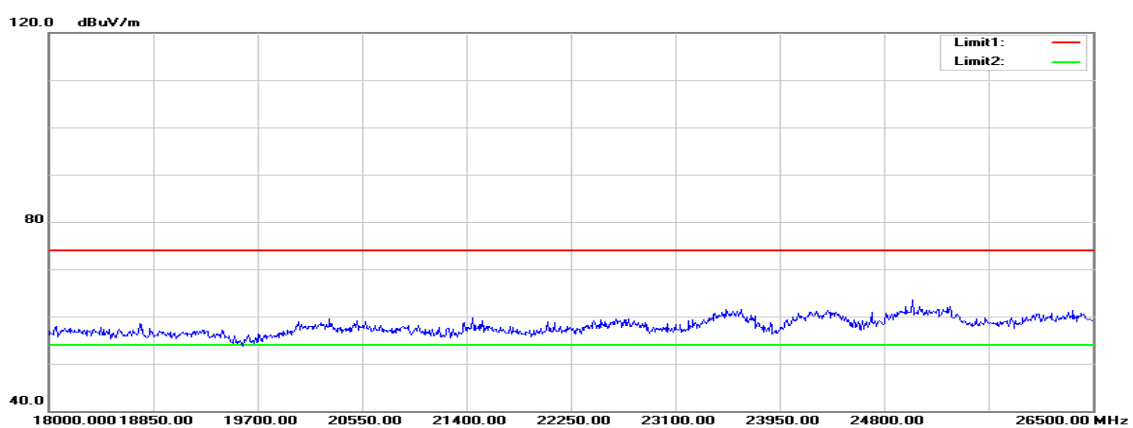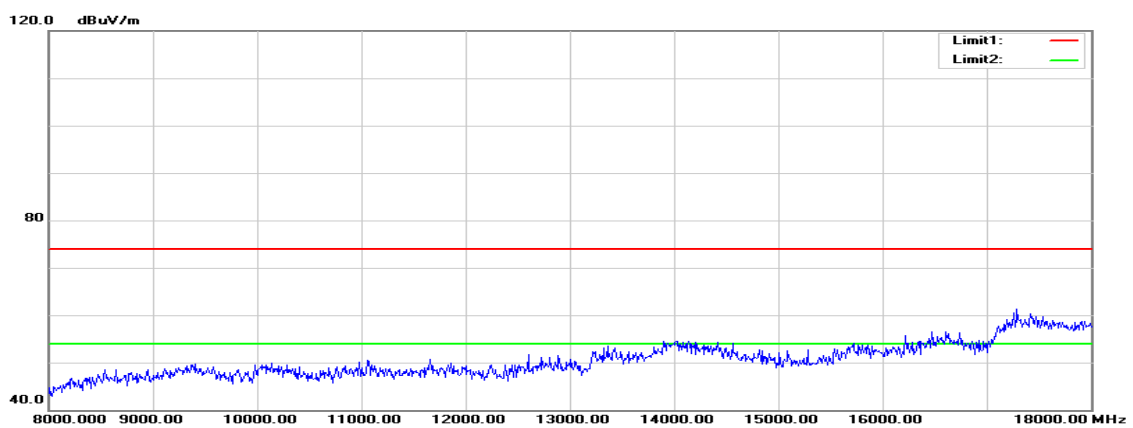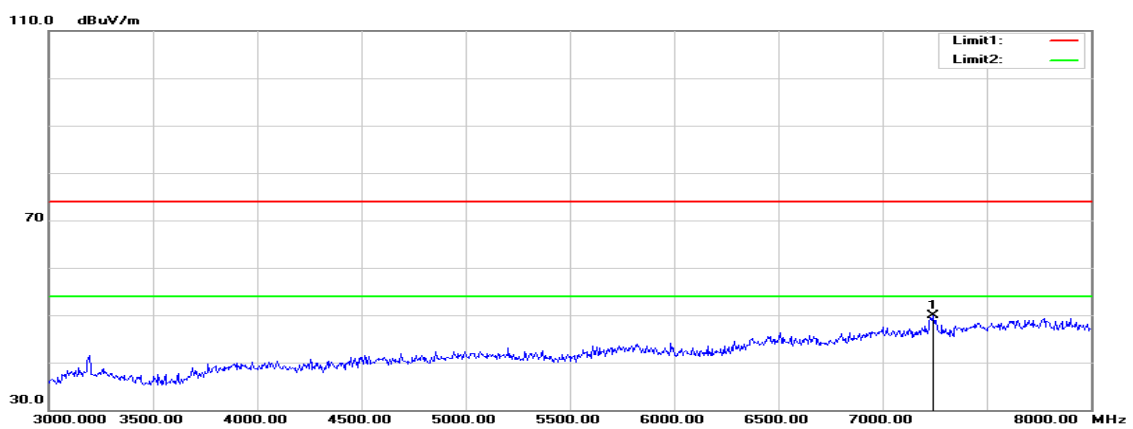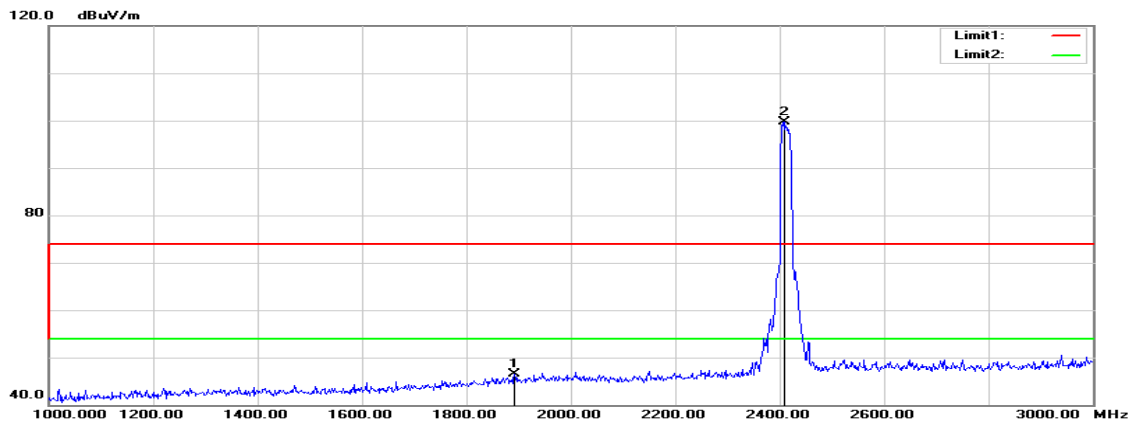

Operation Mode: TX / IEEE 802.11n HT 20 MHz / 2412 MHz **Test Date:** January 10, 2016

Temperature: 27°C **Tested by:** Jason Lu

Humidity: 53% RH **Polarity:** Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1794.000	52.99	-4.67	48.32	74.00	-25.68	peak	V
N/A							
1892.000	50.65	-4.16	46.49	74.00	-27.51	peak	H
7245.000	37.14	12.74	49.88	74.00	-24.12	peak	H
N/A							

Remark:





1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Result (dBuV/m) – limit (dBuV/m).

TX / IEEE 802.11n HT 20 MHz / 2437 MHz

Polarity: Vertical

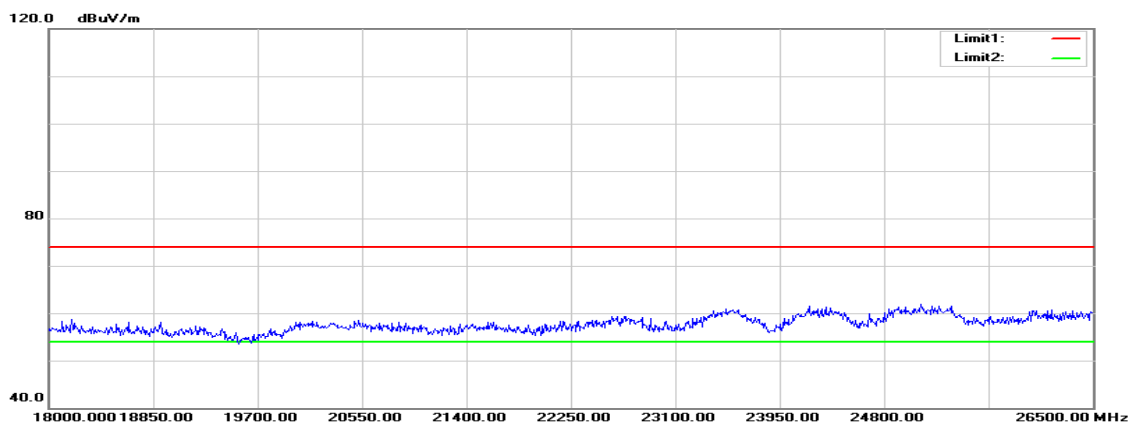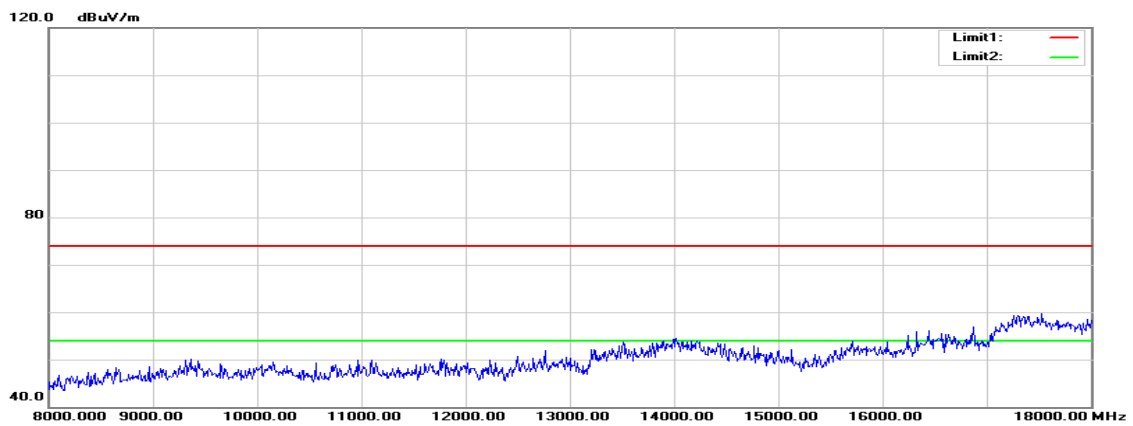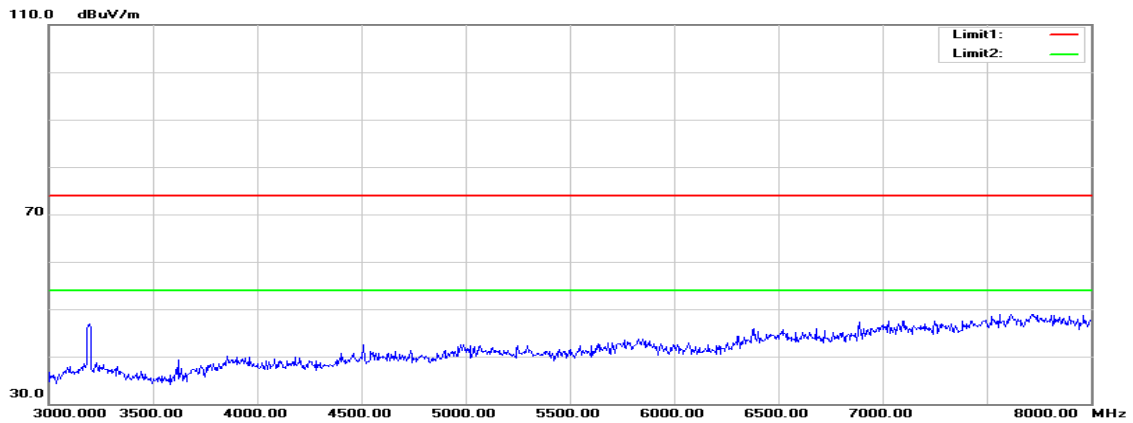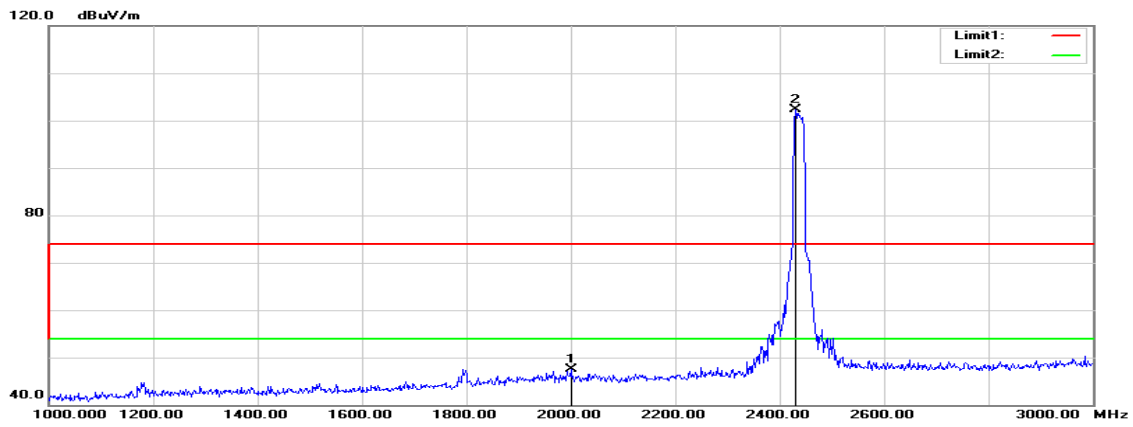

Polarity: Horizontal

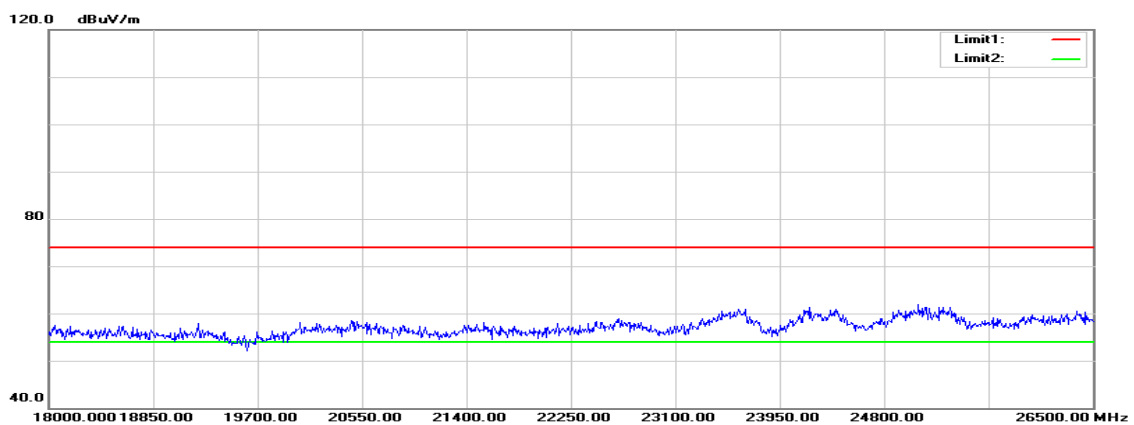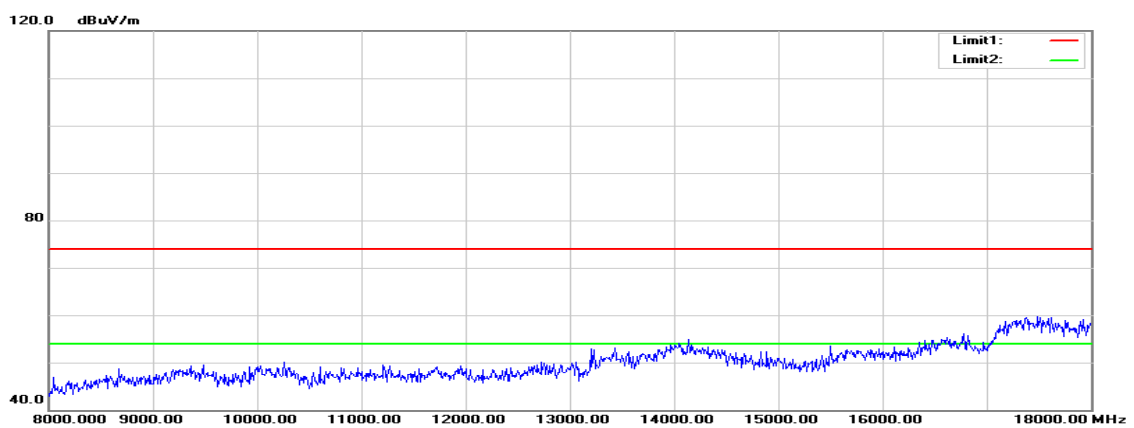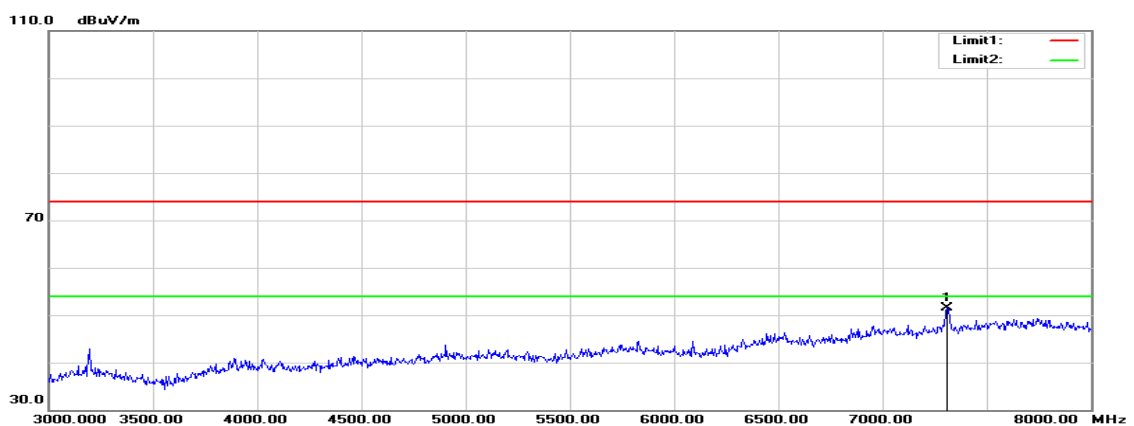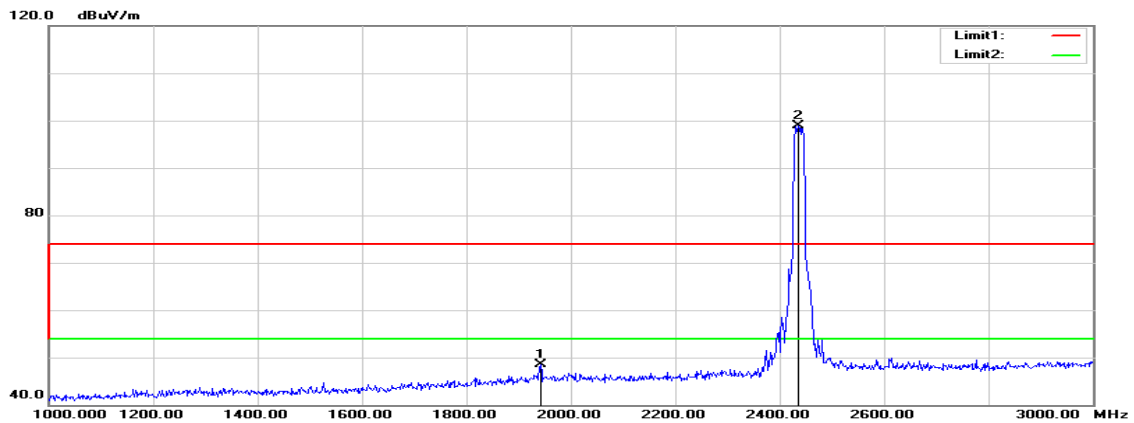

Operation Mode: TX / IEEE 802.11n HT 20 MHz / 2437 MHz **Test Date:** January 10, 2016

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53% RH

Polarity: Ver. / Hor.





Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2000.000	51.15	-3.60	47.55	74.00	-26.45	peak	V
N/A							
1942.000	52.40	-3.90	48.50	74.00	-25.50	peak	H
7310.000	38.50	12.94	51.44	74.00	-22.56	peak	H
N/A							

Remark:





1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Result (dBuV/m) – limit (dBuV/m).

TX / IEEE 802.11n HT 20 MHz / 2462 MHz

Polarity: Vertical

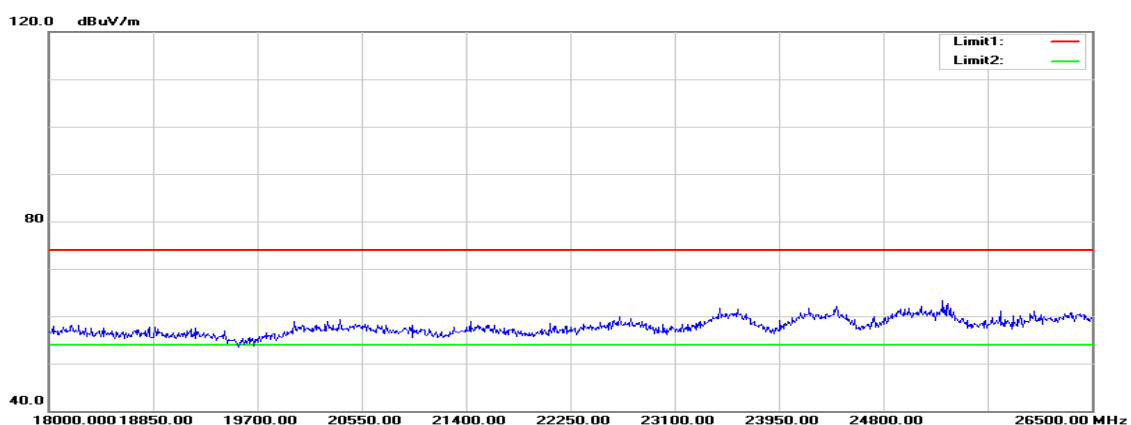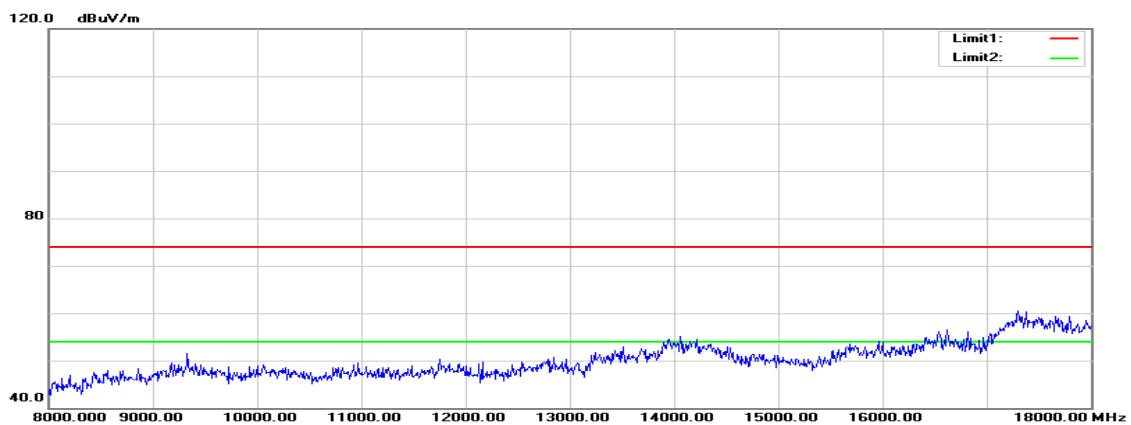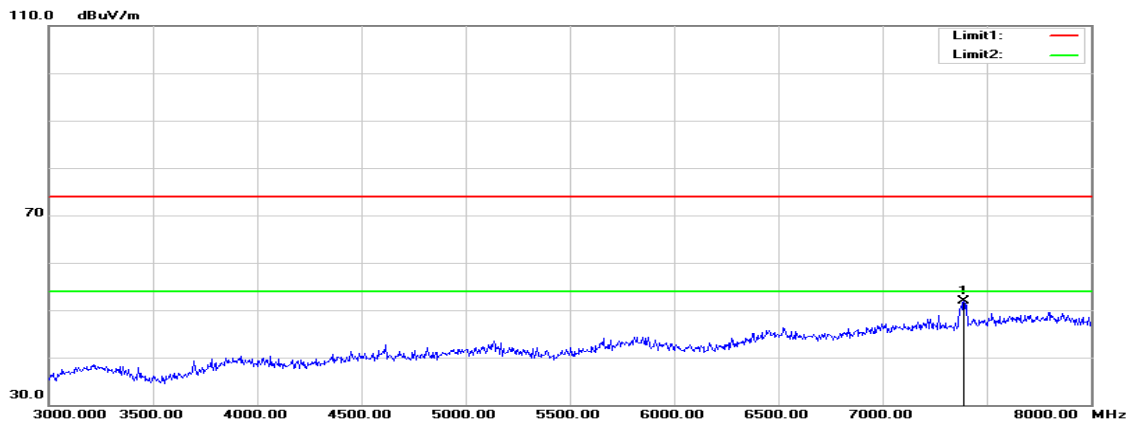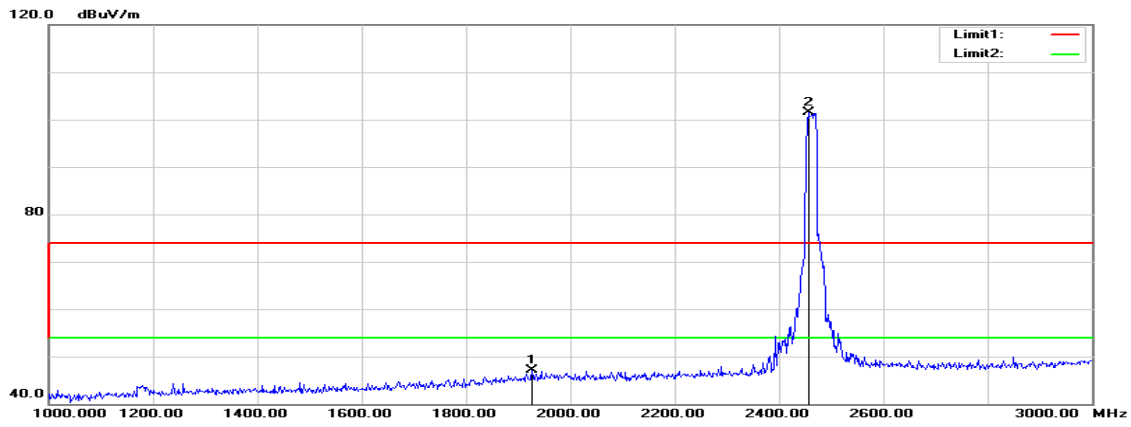

Polarity: Horizontal

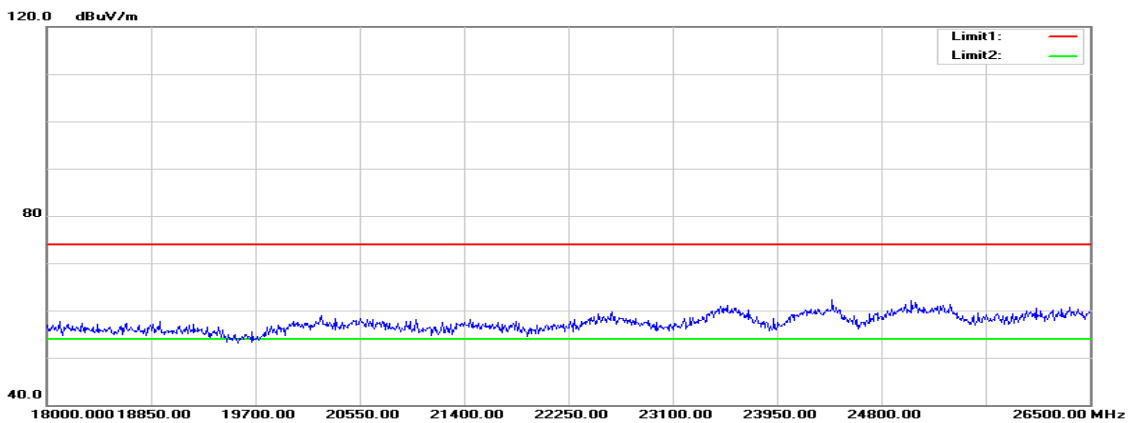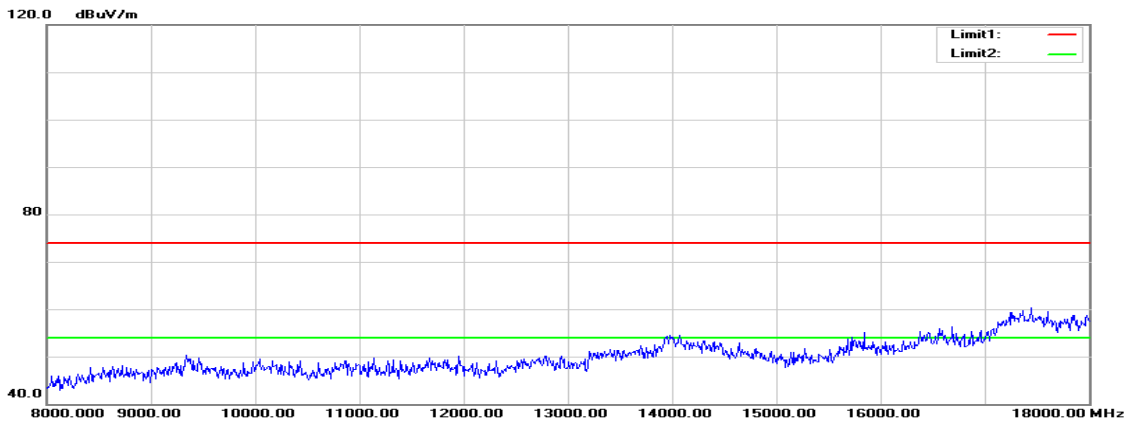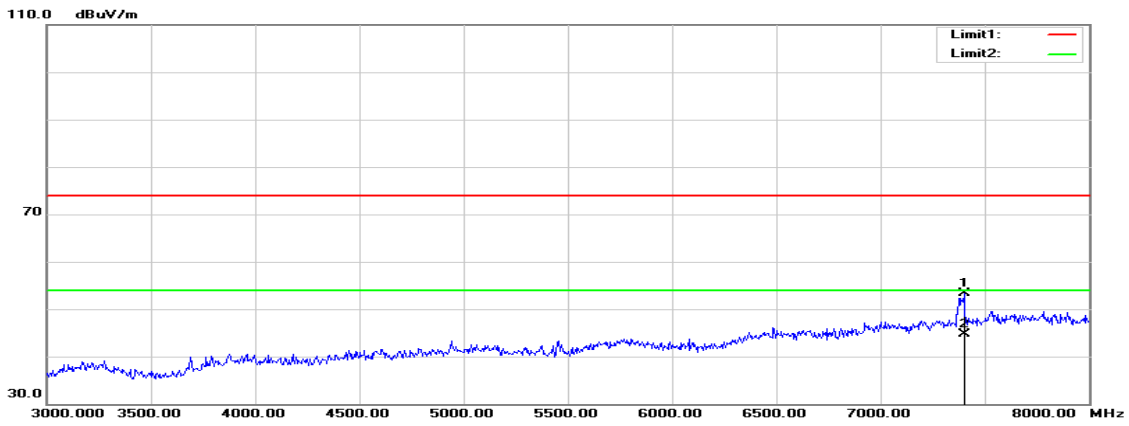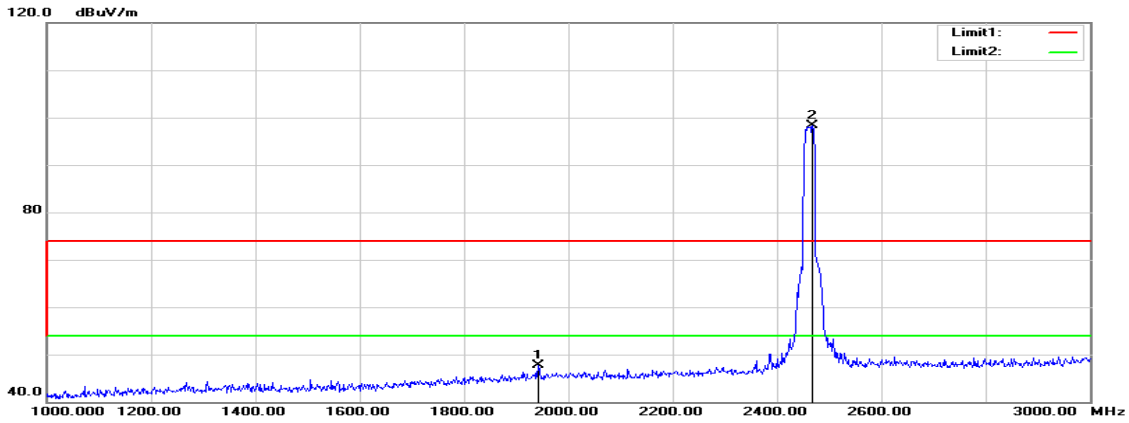

Operation Mode: TX / IEEE 802.11n HT 20 MHz / 2462 MHz **Test Date:** January 10, 2016

Temperature: 27°C **Tested by:** Jason Lu

Humidity: 53% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1926.000	51.06	-3.98	47.08	74.00	-26.92	peak	V
7390.000	38.75	13.18	51.93	74.00	-22.07	peak	V
N/A							
1942.000	51.56	-3.90	47.66	74.00	-26.34	peak	H
7400.000	40.11	13.21	53.32	74.00	-20.68	peak	H
7400.000	31.52	13.21	44.73	54.00	-9.27	AVG	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Result (dBuV/m) – limit (dBuV/m).

7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** January 11, 2016
Temperature: 24°C **Tested by:** Dennis Li
Humidity: 50% RH


Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1539	37.06	20.82	9.69	46.75	30.51	65.78	55.79	-19.03	-25.28	L1
0.1660	36.55	24.48	9.69	46.24	34.17	65.15	55.16	-18.91	-20.99	L1
0.1780	34.97	17.41	9.68	44.65	27.09	64.57	54.58	-19.92	-27.49	L1
0.1900	34.82	20.97	9.68	44.50	30.65	64.03	54.04	-19.53	-23.39	L1
0.2260	31.85	13.81	9.68	41.53	23.49	62.59	52.60	-21.06	-29.11	L1
0.5380	17.87	11.20	9.88	27.75	21.08	56.00	46.00	-28.25	-24.92	L1
0.1539	36.23	20.54	9.64	45.87	30.18	65.78	55.79	-19.91	-25.61	L2
0.1660	36.63	24.57	9.64	46.27	34.21	65.15	55.16	-18.88	-20.95	L2
0.1860	34.25	20.59	9.64	43.89	30.23	64.21	54.21	-20.32	-23.98	L2
0.2020	32.96	17.55	9.64	42.60	27.19	63.52	53.53	-20.92	-26.34	L2
0.2340	30.74	14.43	9.64	40.38	24.07	62.30	52.31	-21.92	-28.24	L2
1.0140	15.81	10.70	10.47	26.28	21.17	56.00	46.00	-29.72	-24.83	L2

Remark:

1. *Measuring frequencies from 0.15 MHz to 30MHz.*
2. *The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.*
3. *The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;*
4. *L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)*

Test Plots

Conducted emissions (Line 1)

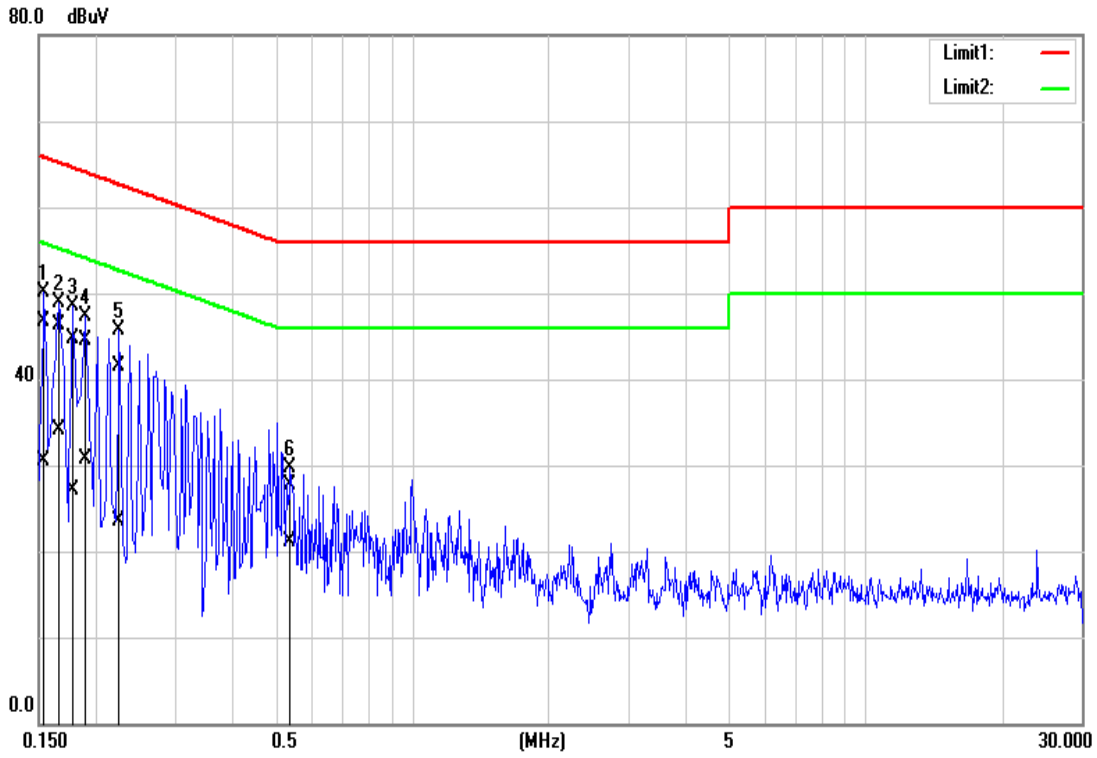

Conducted emissions (Line 2)

