




<TOP VIEW>

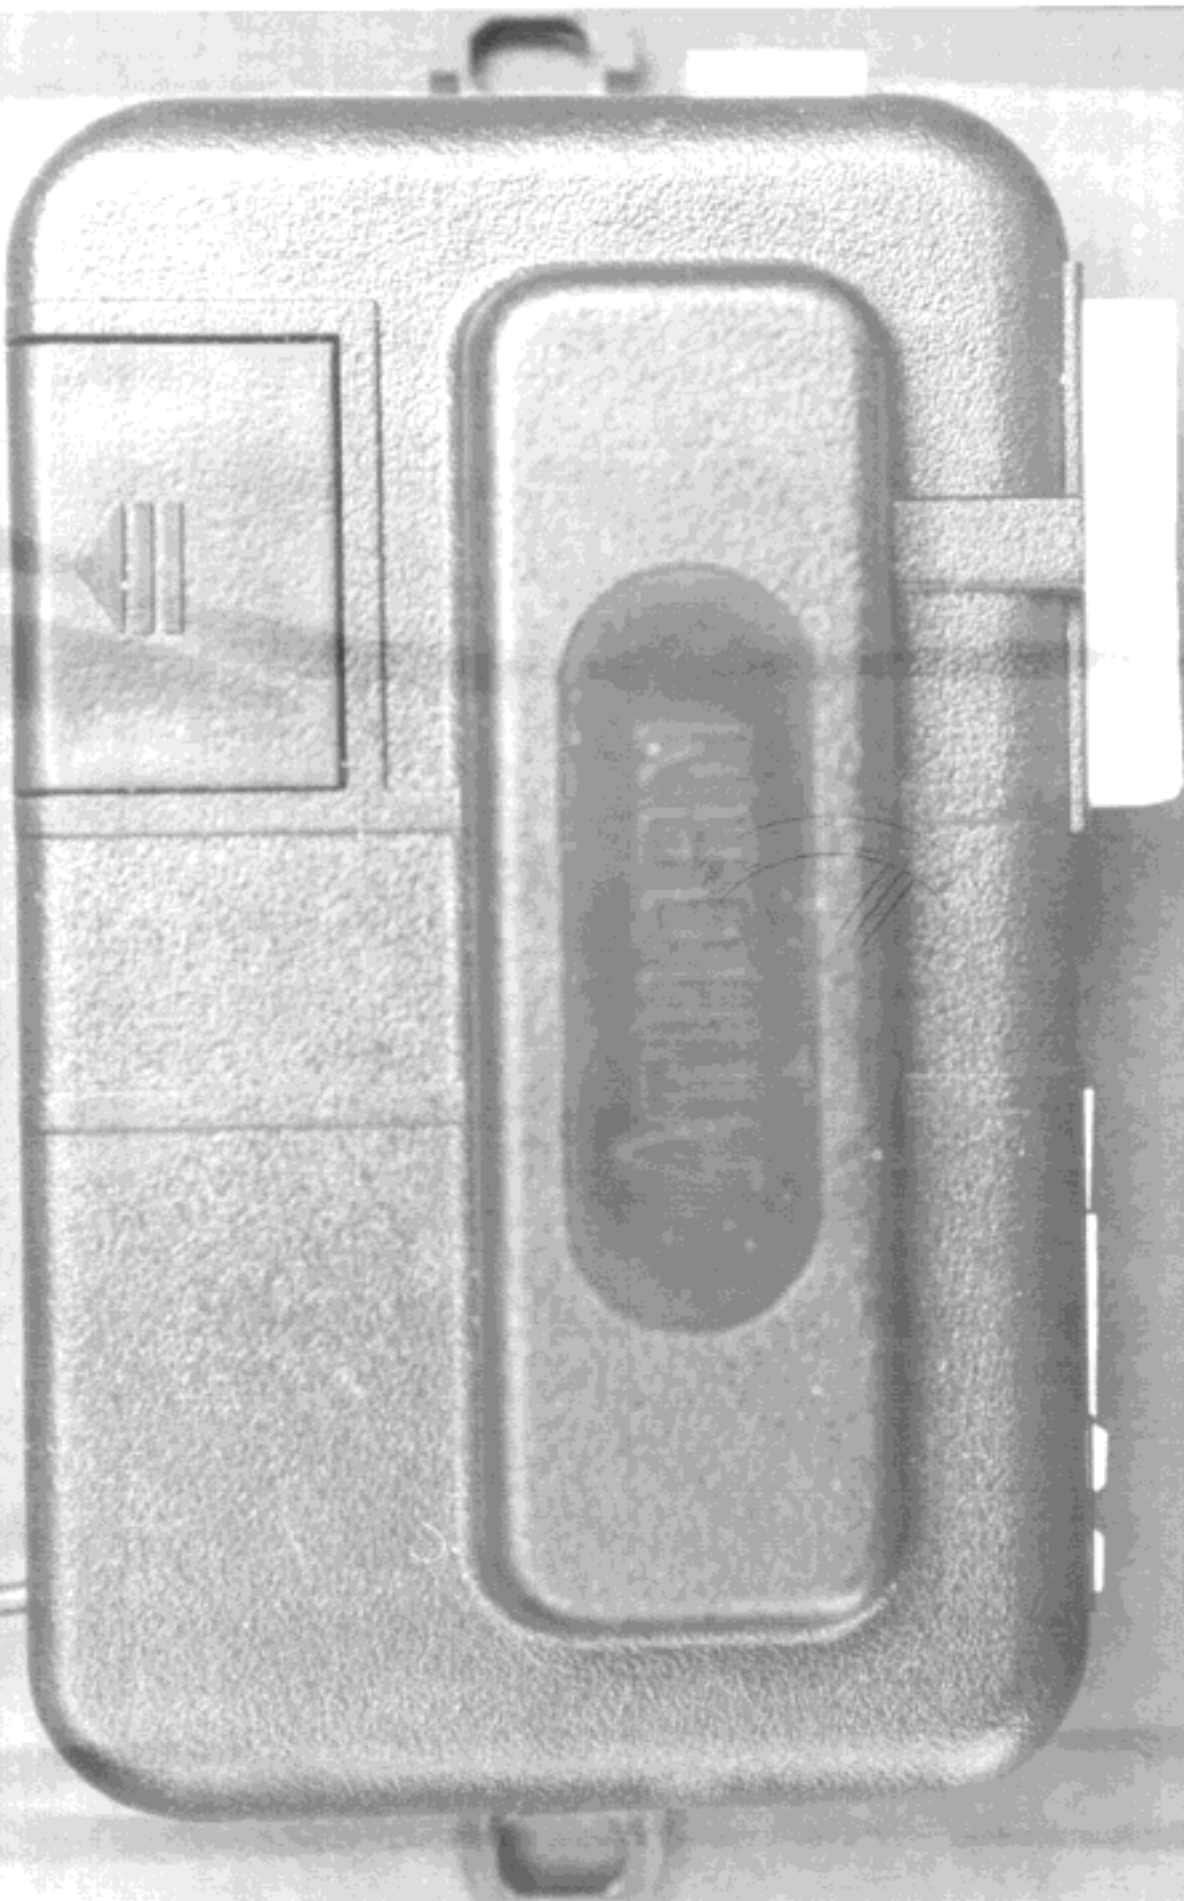

GREEN : (-/+) 500mA OUT LOCK
 BLUE : (+/-) 500mA OUT UNLOCK

- RED : (+) IN 12V DC POWER
- BLACK : (-) IN GROUND CHASSIS
- ORANGE : (-) 500mA OUT START KILL
- WHITE/GREEN : (+/-) 500mA ALL DOOR UNLOCK
- WHITE : (+) 10A OUT PARKING LIGHT
- SKY BLUE : (-) PRE WARN
- WHITE/BLACK : (-) 500mA OUT DOME LIGHT
- GREEN : (-) IN DOOR SWITCH
- WHITE/BLUE : (-) 500mA OUT CHANNEL 3
- BLUE : (-) IN TRUNK/HOOD SWITCH
- RED/WHITE : (-) 500mA OUT CHANNEL 2
- YELLOW : (+) IN SWITCHED IGNITION
- BROWN : (+) 3A OUT SIREN
- VIOLET : (+) IN DOOR SWITCH



Plug In VALET SW



Plug In SHOCK SENSOR
(TWO STAGE)



Plug In LED

FCC ID : HH8-THORN77-RX

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



B-JUMP

ALL UNLOCK (-)

1 DOOR LOCK/UNLOCK TIME (RED)

(CUT 3.5S, UNLOCK 0.5S)

2 ANTI-HI JACK (BLUE)

(CUT ON, UNLOCK OFF)

3 CURRENT SENSING (YELLOW)

(CUT ON, UNLOCK OFF)

< BOTTOM VIEW >