

# TEST REPORT

**Applicant:** Acer Incorporated

**Address of Applicant:** 8F ,88, Sec.1 Xintai 5th Rd. 221 Xizhi, New Taipei City , Taiwan

**Manufacturer:** Acer Incorporated

**Address of Manufacturer:** 8F ,88, Sec.1 Xintai 5th Rd. 221 Xizhi, New Taipei City , Taiwan

**Factory:** Guangxi Century Innovation Display Electronics Co.,Ltd

**Address of Factory:** No.3 standard workshop,Zhongguancun Electronic Industry Park,No. 67 Lianchou Road, Nanning City, China

**Equipment Under Test (EUT)**

Product Name: Rollable smart device

Model No.: 32S1U Pro, 32S1U\_PRO, V32D4U, 32S1U

Trade Mark: acer, AOPEN

**FCC ID:** HLZ-32S1UPRO

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart E Section 15.407

**Date of sample receipt:** July 20, 2023

**Date of Test:** July 20~31, 2023

**Date of report issued:** August 2, 2023

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



**Robinson Luo**


**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	August 2, 2023	Original

Prepared By:



Project Engineer

Date:

August 2, 2023

Check By:



Reviewer

Date:

August 2, 2023

## 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
4.1 MEASUREMENT UNCERTAINTY .....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	7
5.3 DESCRIPTION OF SUPPORT UNITS .....	7
5.4 TEST FACILITY.....	7
5.5 TEST LOCATION .....	7
5.6 ADDITIONAL INSTRUCTIONS.....	7
6 TEST INSTRUMENTS LIST .....	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT .....	10
7.2 CONDUCTED EMISSIONS .....	11
7.3 MAXIMUM CONDUCTED OUTPUT POWER.....	14
7.4 CHANNEL BANDWIDTH AND 99% OCCUPIED BANDWIDTH .....	15
7.5 POWER SPECTRAL DENSITY .....	16
7.6 BAND EDGE.....	17
7.6.1 Radiated Emission Method.....	17
7.7 SPURIOUS EMISSION.....	22
7.7.1 Radiated Emission Method.....	22
7.8 FREQUENCY STABILITY .....	30
8 TEST SETUP PHOTO.....	31
9 EUT CONSTRUCTIONAL DETAILS .....	31

## 4 Test Summary

Test Item	Section	Result
Antenna requirement	FCC part 15.203	Pass
AC Power Line Conducted Emission	FCC part 15.207	Pass
Maximum Conducted Output Power	FCC part 15.407(a)(3)	Pass
Channel Bandwidth and 99% Occupied Bandwidth	FCC part 15.407(e)	Pass
Power Spectral Density	FCC part 15.407(a)(3)	Pass
Band Edge	FCC part 15.407(b)(4)	Pass
Spurious Emission	FCC part 15.205/15.209/15.407(b)(4)	Pass
Frequency Stability	FCC part 15.407(g)	Pass

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013.

### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz-30MHz	3.1dB	(1)
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	Rollable smart device
Model No.:	32S1U Pro, 32S1U_PRO, V32D4U, 32S1U
Test Model No.:	32S1U Pro
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance color and model name for commercial purpose.	
Test sample(s) ID:	GTSL2023080104-1
Sample(s) Status:	Engineer sample
S/N:	N/A
Operation Frequency:	802.11a/802.11n/802.11ac/802.11ax @20M: 5745MHz ~ 5825MHz 802.11n/ 802.11ac/802.11ax @40M: 5755MHz ~ 5795MHz 802.11ac/802.11ax @80M: 5775MHz
Channel numbers:	802.11a/802.11n/802.11ac/802.11ax @20M: 5 802.11n/ 802.11ac/802.11ax @40M: 2 802.11ac/802.11ax @80M: 1
Support bandwidth:	20M, 40M, 80M
Modulation technology:	OFDM(A) MIMO: 802.11n/ac/ax SISO: 802.11a
Antenna Type:	IPEX
Antenna gain:	3.84dBi
Power supply:	AC adapter 1 Model No.: DA-120B19 INPUT: AC 100-240V, 50/60Hz, 2.0A Max OUTPUT: DC 19.0V, 6.32A, 120.08W AC adapter 2 Model No.: AY120EA-ZF190632M INPUT: AC 100-240V, 50/60Hz, 2.0A Max OUTPUT: DC 19.0V, 6.32A, 120.08W  Or DC 14.8V 10000mAh Li-ion polymer battery

**Remark:**

- Both two adapters were tested and found to compliance with the relevant requirement, only the worst data (adapter 1) report.
- Antenna gain information provided by the customer
- The relevant information of the sample is provided by the entrusting company, and the laboratory is not responsible for its authenticity.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745MHz	151	5755MHz	153	5765MHz	155	5775MHz
157	5785MHz	159	5795MHz	161	5805MHz	163	5815MHz
165	5825MHz						

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)		
	802.11 a/n/ac/ax @20M	802.11 n/ac/ax @40M	802.11ac/ax @80M
Lowest channel	5745	5755	<del>5765</del>
Middle channel	5785	<del>5795</del>	5775
Highest channel	5825	5795	<del>5805</del>

## 5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
-------------------	------------------------------------------------

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate	Mode	Data rate
802.11a	6Mbps	802.11n/ac(HT40)	13Mbps
802.11n/ac(HT20)	6.5Mbps	802.11ac(HT80)	29.3Mbps
802.11ax(HEW20)	8.6Mbps	802.11ax(HEW80)	36Mbps
802.11ax(HEW40)	17.2Mbps		

## 5.3 Description of Support Units

None
------

## 5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Designation Number: CN5029

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.

- **ISED—Registration No.: 9079A**

CAB identifier: CN0091

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing.

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

## 5.5 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

## 5.6 Additional Instructions

Test Software	Special test software provided by manufacturer For 802.11ax, special test command used
Power level setup	Default

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	June 23, 2021	June 22, 2024
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	April 14, 2023	April 13, 2024
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	March 19, 2023	March 18, 2025
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	April 17, 2023	April 16, 2025
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Coaxial Cable	GTS	N/A	GTS213	April 21, 2023	April 20, 2024
8	Coaxial Cable	GTS	N/A	GTS211	April 21, 2023	April 20, 2024
9	Coaxial cable	GTS	N/A	GTS210	April 21, 2023	April 20, 2024
10	Coaxial Cable	GTS	N/A	GTS212	April 21, 2023	April 20, 2024
11	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	April 14, 2023	April 13, 2024
12	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov. 29, 2022	Nov. 28, 2023
13	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	April 14, 2023	April 13, 2024
14	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	April 14, 2023	April 13, 2024
15	Horn Antenna (18-26.5GHz)	/	UG-598A/U	GTS664	Oct. 30, 2022	Oct. 29, 2023
16	Horn Antenna (26.5-40GHz)	A.H Systems	SAS-573	GTS665	Oct. 30, 2022	Oct. 29, 2023
17	FSV·Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	March 13, 2023	March 12, 2024
18	Amplifier	/	LNA-1000-30S	GTS650	April 14, 2023	April 13, 2024
19	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS668	Dec. 20,2022	Dec.19,2023
20	Thermo meter	JINCHUANG	GSP-8A	GTS643	April 19, 2023	April 18, 2024



Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	July 12, 2022	July 11, 2027
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 14, 2023	April 13, 2024
3	LISN	ROHDE & SCHWARZ	ENV216	GTS226	April 14, 2023	April 13, 2024
4	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
6	Thermo meter	JINCHUANG	GSP-8A	GTS642	April 19, 2023	April 18, 2024
7	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	April 14, 2023	April 13, 2024
8	ISN	SCHWARZBECK	NTFM 8158	GTS565	April 14, 2023	April 13, 2024
9	High voltage probe	SCHWARZBECK	TK9420	GTS537	April 14, 2023	April 13, 2024
10	Antenna end assembly	Weinschel	1870A	GTS560	April 14, 2023	April 13, 2024

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	April 14, 2023	April 13, 2024
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 14, 2023	April 13, 2024
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	April 14, 2023	April 13, 2024
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	April 14, 2023	April 13, 2024
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	April 14, 2023	April 13, 2024
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	April 14, 2023	April 13, 2024
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	April 14, 2023	April 13, 2024
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	April 14, 2023	April 13, 2024
9	Thermo meter	JINCHUANG	GSP-8A	GTS641	April 19, 2023	April 18, 2024

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	April 19, 2023	April 18, 2024

## 7 Test results and Measurement Data

### 7.1 Antenna requirement

<b>Standard requirement:</b>	FCC Part15 C Section 15.203
<i>15.203 requirement:</i> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>E.U.T Antenna:</b>	
The antenna type is IPEX, reference to the appendix II for details	


## 7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
5-30		60		50		
* Decreases with the logarithm of the frequency.						
Test setup:						
Test procedure:	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li> </ol>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

## Measurement data


Pre-scan all test modes, found worst case at ANT 1 802.11ac(VHT80) 5775MHz, and so only show the test result of it

### Line:

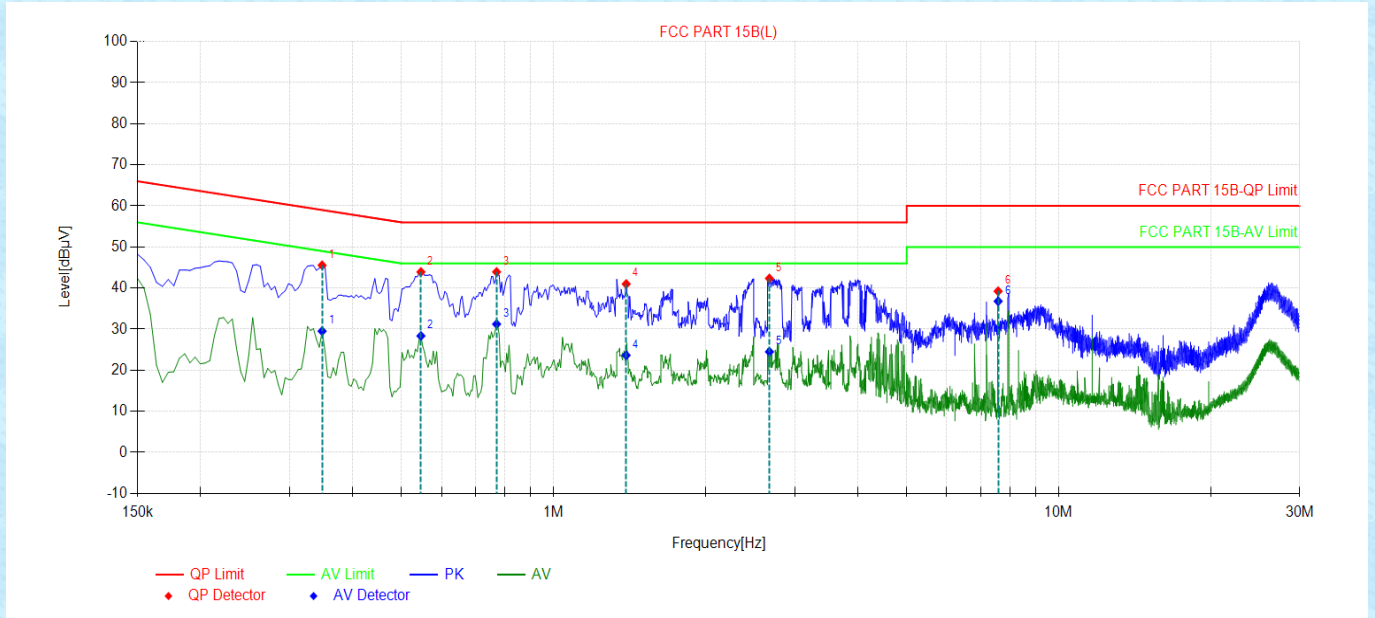

Final Data List									
NO.	Freq. [MHz]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict	Type
1	0.348	45.55	59.01	13.46	29.51	49.01	19.50	PASS	L
2	0.546	43.93	56.00	12.07	28.35	46.00	17.65	PASS	L
3	0.771	43.93	56.00	12.07	31.22	46.00	14.78	PASS	L
4	1.392	40.99	56.00	15.01	23.64	46.00	22.36	PASS	L
5	2.6745	42.34	56.00	13.66	24.49	46.00	21.51	PASS	L
6	7.5885	39.23	60.00	20.77	36.79	50.00	13.21	PASS	L

**Neutral:**

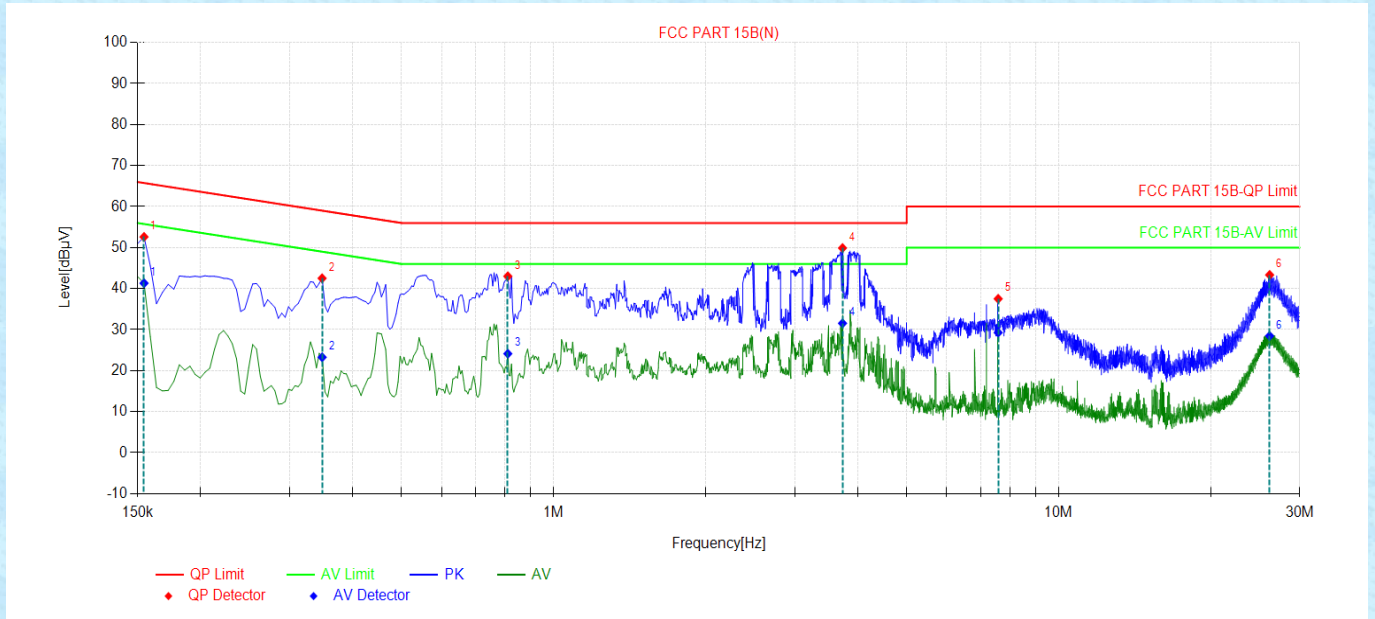


Final Data List									
NO.	Freq. [MHz]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict	Type
1	0.1545	52.61	65.75	13.14	41.32	55.75	14.43	PASS	N
2	0.348	42.52	59.01	16.49	23.27	49.01	25.74	PASS	N
3	0.8115	43.01	56.00	12.99	24.13	46.00	21.87	PASS	N
4	3.732	49.90	56.00	6.10	31.54	46.00	14.46	PASS	N
5	7.5885	37.52	60.00	22.48	29.26	50.00	20.74	PASS	N
6	26.16	43.34	60.00	16.66	28.48	50.00	21.52	PASS	N

**Notes:**


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

## 7.3 Maximum Conducted Output Power

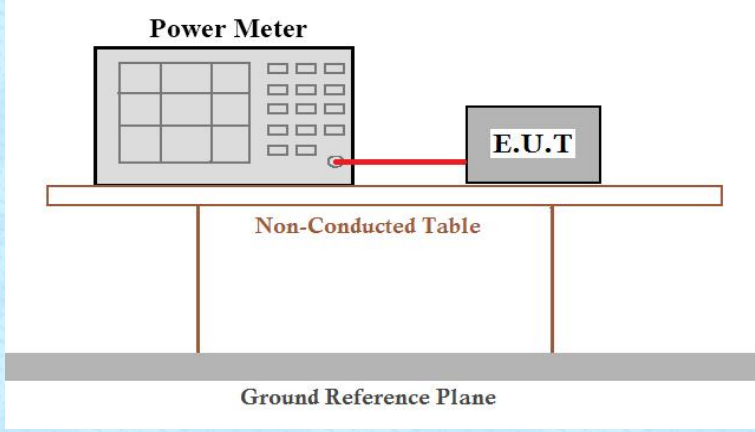Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	30dBm
Duty Cycle set up:	RBW=VBW=8MHz
Test setup:	 <p>The diagram illustrates the test setup. A Power Meter is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


**Measurement Data:** The detailed test data see Appendix for 5G UNII.

## 7.4 Channel Bandwidth and 99% Occupied Bandwidth

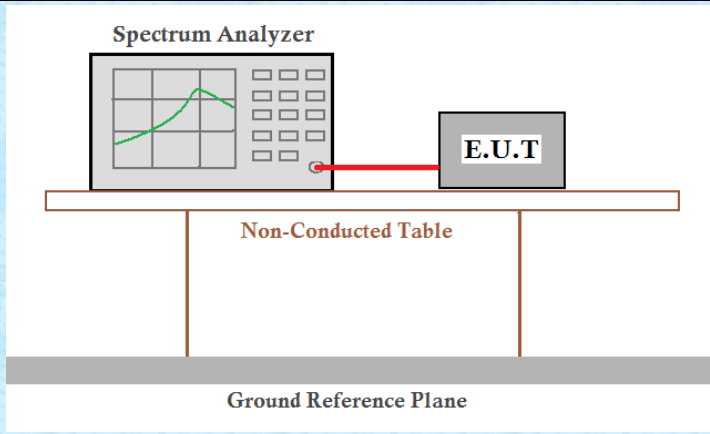Test Requirement:	FCC Part15 E Section 15.407(e)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	>500KHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

**Measurement Data:** The detailed test data see Appendix for 5G UNII.

## 7.5 Power Spectral Density

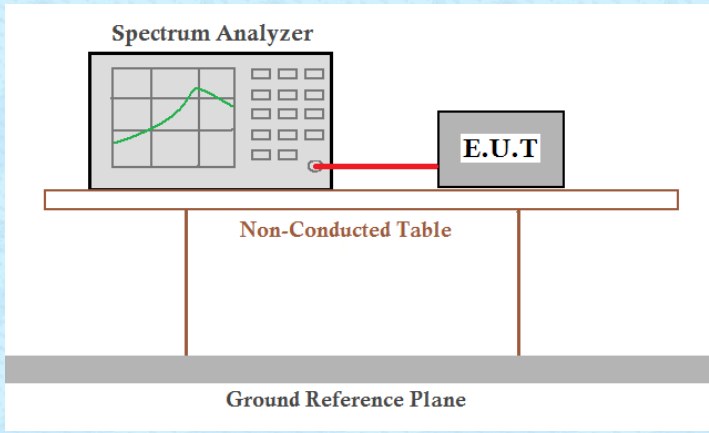
Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	30dBm/500kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

**Measurement Data:** The detailed test data see Appendix for 5G UNII.



## 7.6 Band edge

### 7.6.1 Radiated Emission Method

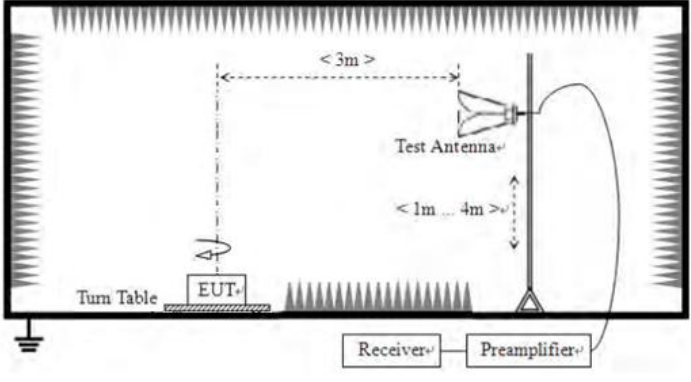Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	9kHz to 40GHz, only worse case is reported				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
RMS		1MHz	3MHz	RMS	
Limit:	All emissions shall be limited to a level of $-27$ dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.				
Test setup:					
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>7. The radiation measurements are performed in X, Y, Z axis positioning.</li> </ol>				

	And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

*Remarks:*

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
3. *The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.*
4. *All antennas and modulation type were tested and passed, only worst condition(ANT 1) report*
5. *According to KDB 789033 D02v02r01 section G) 1) d), for measurements above 1000 MHz @3m distance, the limit of field strength is computed as follows:*  

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2;$$

$$E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m.}$$

$$E[\text{dBuV/m}] = 10 + 95.2 = 105.2\text{dBuV/m.}$$

$$E[\text{dBuV/m}] = 15.6 + 95.2 = 110.8\text{dBuV/m.}$$

$$E[\text{dBuV/m}] = 27 + 95.2 = 122.2\text{dBuV/m}$$

**Measurement data:**


<b>IEEE 802.11ac HT20</b>								
<b>Peak value:</b>								
Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Polarization
5650	53.59	34.16	8.41	53.44	42.72	68.2	-25.48	Horizontal
5700	56.15	34.28	8.45	53.42	45.46	105.2	-59.74	Horizontal
5720	57.84	34.33	8.47	53.41	47.23	110.8	-63.57	Horizontal
5725	54.78	34.34	8.47	53.41	44.18	122.2	-78.02	Horizontal
5850	55.78	34.64	8.57	53.36	45.63	122.2	-76.57	Horizontal
5855	54.14	34.65	8.57	53.36	44	110.8	-66.8	Horizontal
5875	55.16	34.7	8.59	53.35	45.1	105.2	-60.1	Horizontal
5925	55.09	34.82	8.63	53.33	45.21	68.2	-22.99	Horizontal
5650	53.32	34.16	8.41	53.44	42.45	68.2	-25.75	Vertical
5700	55.62	34.28	8.45	53.42	44.93	105.2	-60.27	Vertical
5720	56.58	34.33	8.47	53.41	45.97	110.8	-64.83	Vertical
5725	56.88	34.34	8.47	53.41	46.28	122.2	-75.92	Vertical
5850	53.54	34.64	8.57	53.36	43.39	122.2	-78.81	Vertical
5855	54.68	34.65	8.57	53.36	44.54	110.8	-66.26	Vertical
5875	54.79	34.7	8.59	53.35	44.73	105.2	-60.47	Vertical
5925	56.58	34.82	8.63	53.33	46.7	68.2	-21.5	Vertical


<b>IEEE 802.11ac HT40</b>								
<b>Peak value:</b>								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650	57.56	34.16	8.41	53.44	46.69	68.2	-21.51	Horizontal
5700	57.24	34.28	8.45	53.42	46.55	105.2	-58.65	Horizontal
5720	53.18	34.33	8.47	53.41	42.57	110.8	-68.23	Horizontal
5725	53.02	34.34	8.47	53.41	42.42	122.2	-79.78	Horizontal
5850	53.27	34.64	8.57	53.36	43.12	122.2	-79.08	Horizontal
5855	54.54	34.65	8.57	53.36	44.4	110.8	-66.4	Horizontal
5875	56.71	34.7	8.59	53.35	46.65	105.2	-58.55	Horizontal
5925	55.77	34.82	8.63	53.33	45.89	68.2	-22.31	Horizontal
5650	57.92	34.16	8.41	53.44	47.05	68.2	-21.15	Vertical
5700	54.84	34.28	8.45	53.42	44.15	105.2	-61.05	Vertical
5720	54.66	34.33	8.47	53.41	44.05	110.8	-66.75	Vertical
5725	58.24	34.34	8.47	53.41	47.64	122.2	-74.56	Vertical
5850	56.42	34.64	8.57	53.36	46.27	122.2	-75.93	Vertical
5855	56.16	34.65	8.57	53.36	46.02	110.8	-64.78	Vertical
5875	54.44	34.7	8.59	53.35	44.38	105.2	-60.82	Vertical
5925	53.38	34.82	8.63	53.33	43.5	68.2	-24.7	Vertical

<b>IEEE 802.11ac HT80</b>								
<b>Peak value:</b>								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650	56.32	34.16	8.41	53.44	45.45	68.2	-22.75	Horizontal
5700	54.56	34.28	8.45	53.42	43.87	105.2	-61.33	Horizontal
5720	54.34	34.33	8.47	53.41	43.73	110.8	-67.07	Horizontal
5725	58.78	34.34	8.47	53.41	48.18	122.2	-74.02	Horizontal
5850	58.68	34.64	8.57	53.36	48.53	122.2	-73.67	Horizontal
5855	55.29	34.65	8.57	53.36	45.15	110.8	-65.65	Horizontal
5875	55.78	34.7	8.59	53.35	45.72	105.2	-59.48	Horizontal
5925	55.72	34.82	8.63	53.33	45.84	68.2	-22.36	Horizontal
5650	55.37	34.16	8.41	53.44	44.5	68.2	-23.7	Vertical
5700	58.5	34.28	8.45	53.42	47.81	105.2	-57.39	Vertical
5720	55.31	34.33	8.47	53.41	44.7	110.8	-66.1	Vertical
5725	57.82	34.34	8.47	53.41	47.22	122.2	-74.98	Vertical
5850	56.48	34.64	8.57	53.36	46.33	122.2	-75.87	Vertical
5855	57.45	34.65	8.57	53.36	47.31	110.8	-63.49	Vertical
5875	58.62	34.7	8.59	53.35	48.56	105.2	-56.64	Vertical
5925	56.87	34.82	8.63	53.33	46.99	68.2	-21.21	Vertical


## 7.7 Spurious Emission

### 7.7.1 Radiated Emission Method

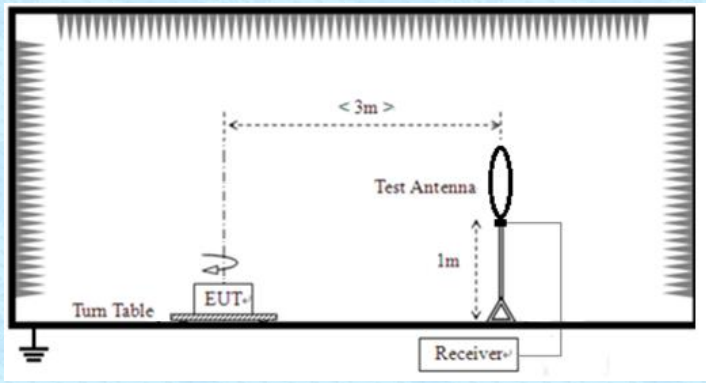Test Requirement:	FCC Part15 C Section 15.209, Part 15E Section 15.407(b)(4)				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 40GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9kHz-150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
AV		1MHz	3MHz	Average Value	
Note: For Duty cycle $\geq 98\%$ , average detector set as above For Duty cycle $< 98\%$ , average detector set as below: $VBW \geq 1 / T$					
Limit:	Frequency (MHz)		Field strength (microvolts/meter)		Measurement distance (meters)
	0.009-0.490		2400/F(kHz)		300
0.490-1.705		24000/F(kHz)		30	
1.705-30.0		30		30	
30-88		100**		3	
88-216		150**		3	
216-960		200**		3	
Above 960		500		3	
The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.					
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
For radiated emissions from 30MHz to 1GHz					

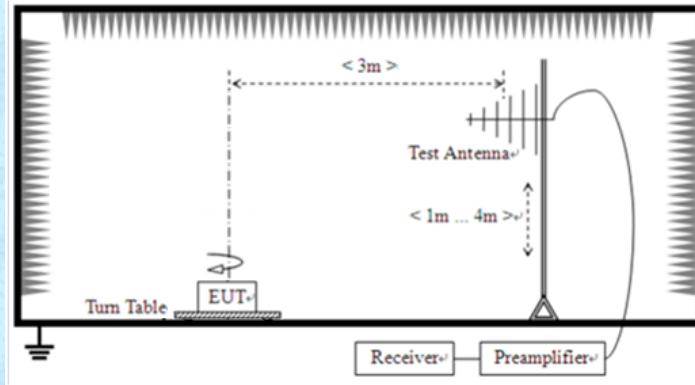

For radiated emissions above 1GHz

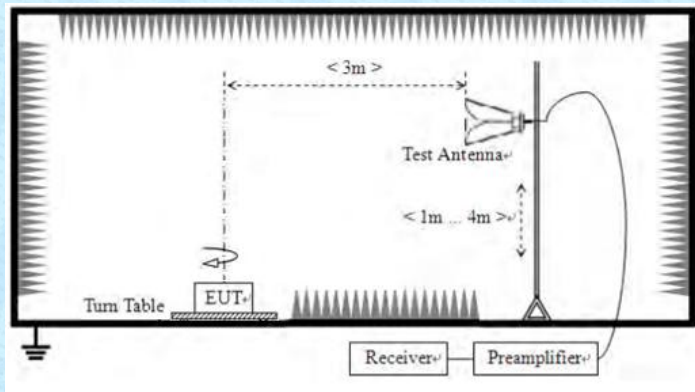

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.1m for below 1GHz and above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
7. The radiation measurements are performed in X, Y, Z axis positioning.

	And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

*Remarks:*

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

**Measurement Data:**

**9 kHz ~ 30 MHz**


The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.



## Below 1GHz


Pre-scan all test modes, found worst case at 802.11ac(VHT80) 5775MHz, and so only show the test result of it

### Horizontal:

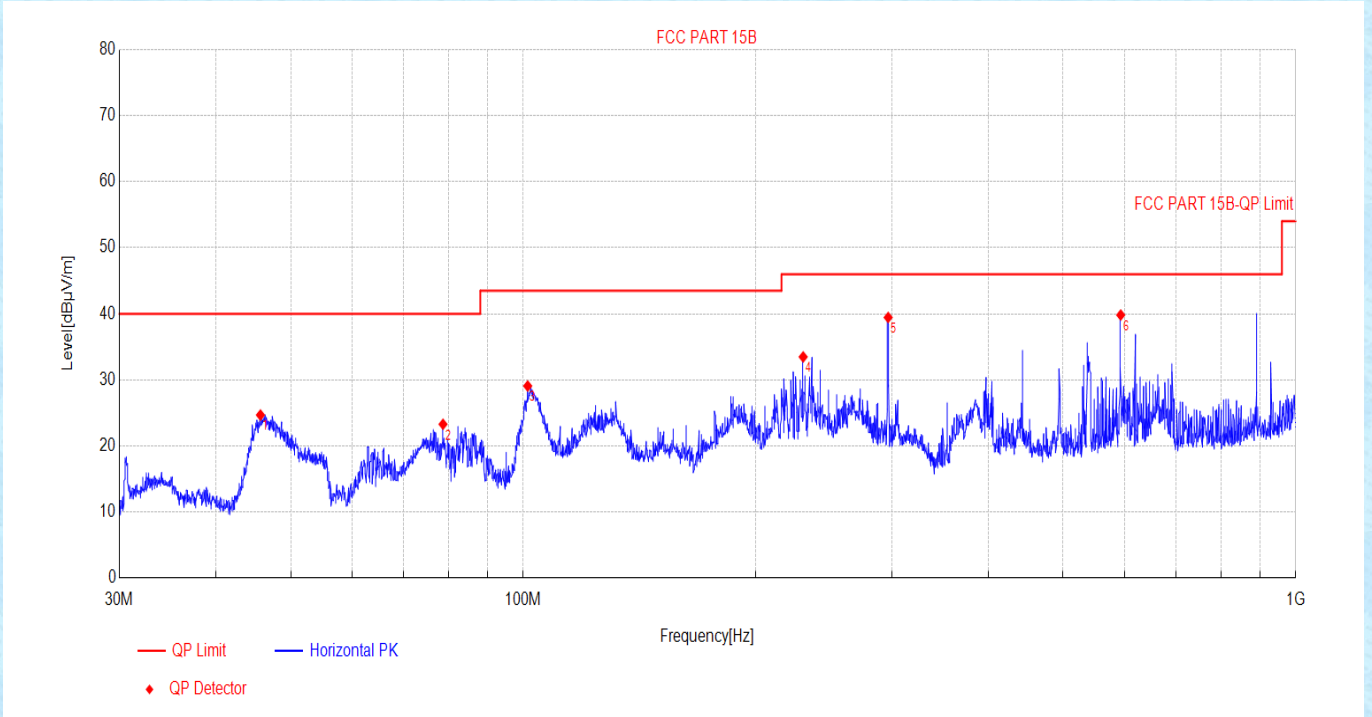

Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	45.69	-16.40	24.69	40.00	15.31	200	347	Horizontal	PASS
2	78.7388	-20.46	23.29	40.00	16.71	200	295	Horizontal	PASS
3	101.346	-18.86	29.08	43.50	14.42	200	347	Horizontal	PASS
4	230.384	-16.37	33.48	46.00	12.52	100	18	Horizontal	PASS
5	296.793	-14.39	39.45	46.00	6.55	100	135	Horizontal	PASS
6	593.647	-8.18	39.82	46.00	6.18	100	176	Horizontal	PASS

**Vertical:**

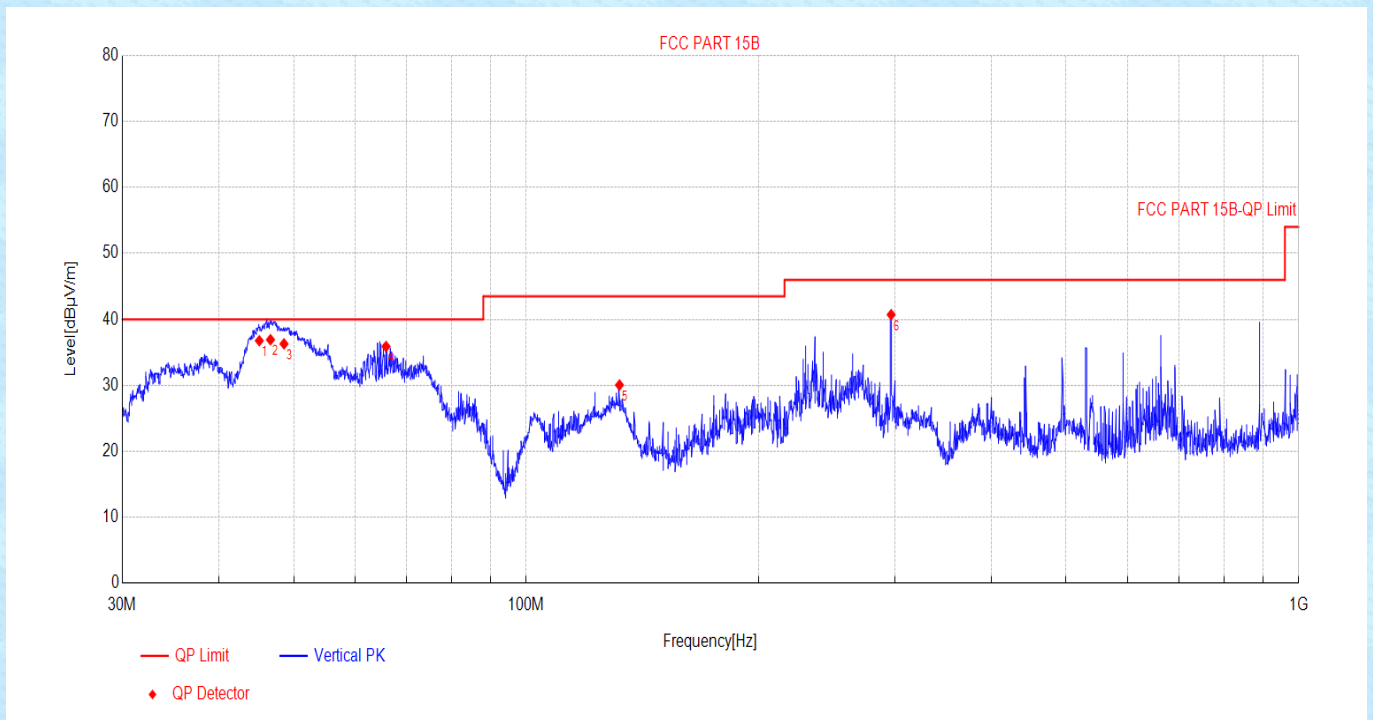

Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	45.1328	-16.50	36.76	40.00	3.24	100	146	Vertical	PASS
2	46.6612	-16.21	36.92	40.00	3.08	100	71	Vertical	PASS
3	48.5808	-15.85	36.29	40.00	3.71	100	117	Vertical	PASS
4	65.8478	-18.29	35.89	40.00	4.11	100	193	Vertical	PASS
5	132.055	-20.05	30.05	43.50	13.45	100	53	Vertical	PASS
6	296.793	-14.39	40.72	46.00	5.28	100	210	Vertical	PASS

**Above 1GHz:**

802.11ac(HT20)					Test Frequency: 5745MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490	53.88	39.2	12.47	53.35	52.2	68.2	-16	Horizontal
17235	52.08	39.81	15.56	51.68	55.77	68.2	-12.43	Horizontal
11490	53.45	39.2	12.47	53.35	51.77	68.2	-16.43	Vertical
17235	54.65	39.81	15.56	51.68	58.34	68.2	-9.86	Vertical
11490	47.27	39.2	12.47	53.35	45.59	54	-8.41	Horizontal
17235	44.87	39.81	15.56	51.68	48.56	54	-5.44	Horizontal
11490	47.34	39.2	12.47	53.35	45.66	54	-8.34	Vertical
17235	47.32	39.81	15.56	51.68	51.01	54	-2.99	Vertical

802.11ac(HT20)					Test Frequency: 5785MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570	53.6	39.53	12.51	53.37	52.27	68.2	-15.93	Horizontal
17355	52.41	40.12	15.61	51.62	56.52	68.2	-11.68	Horizontal
11570	55.04	39.53	12.51	53.37	53.71	68.2	-14.49	Vertical
17355	52.48	40.12	15.61	51.62	56.59	68.2	-11.61	Vertical
11570	47.91	39.53	12.51	53.37	46.58	54	-7.42	Horizontal
17355	47.3	40.12	15.61	51.62	51.41	54	-2.59	Horizontal
11570	45.9	39.53	12.51	53.37	44.57	54	-9.43	Vertical
17355	44.9	40.12	15.61	51.62	49.01	54	-4.99	Vertical

802.11ac(HT20)					Test Frequency: 5825MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650	57.88	39.56	12.55	53.4	56.59	68.2	-11.61	Horizontal
17475	53.4	40.44	15.66	51.56	57.94	68.2	-10.26	Horizontal
11650	52.76	39.56	12.55	53.4	51.47	68.2	-16.73	Vertical
17475	56.61	40.44	15.66	51.56	61.15	68.2	-7.05	Vertical
11650	47.46	39.56	12.55	53.4	46.17	54	-7.83	Horizontal
17475	44.82	40.44	15.66	51.56	49.36	54	-4.64	Horizontal
11650	44.06	39.56	12.55	53.4	42.77	54	-11.23	Vertical
17475	44.14	40.44	15.66	51.56	48.68	54	-5.32	Vertical

802.11ac(HT40)					Test Frequency: 5755MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510	52.34	39.5	12.48	53.35	50.97	68.2	-17.23	Horizontal
17265	56.21	39.89	15.58	51.67	60.01	68.2	-8.19	Horizontal
11510	57.98	39.5	12.48	53.35	56.61	68.2	-11.59	Vertical
17265	55.92	39.89	15.58	51.67	59.72	68.2	-8.48	Vertical
11510	47.44	39.5	12.48	53.35	46.07	54	-7.93	Horizontal
17265	44.69	39.89	15.58	51.67	48.49	54	-5.51	Horizontal
11510	47.33	39.5	12.48	53.35	45.96	54	-8.04	Vertical
17265	45.85	39.89	15.58	51.67	49.65	54	-4.35	Vertical


802.11ac(HT40)					Test Frequency: 5795MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590	57.46	39.54	12.52	53.38	56.14	68.2	-12.06	Horizontal
17385	54.94	40.2	15.62	51.61	59.15	68.2	-9.05	Horizontal
11590	56.54	39.54	12.52	53.38	55.22	68.2	-12.98	Vertical
17385	57.85	40.2	15.62	51.61	62.06	68.2	-6.14	Vertical
11590	46.5	39.54	12.52	53.38	45.18	54	-8.82	Horizontal
17385	46.1	40.2	15.62	51.61	50.31	54	-3.69	Horizontal
11590	43.92	39.54	12.52	53.38	42.6	54	-11.4	Vertical
17385	45.46	40.2	15.62	51.61	49.67	54	-4.33	Vertical

802.11ac(HT80)					Test Frequency: 5775MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11550	55.1	39.52	12.5	53.37	53.75	68.2	-14.45	Horizontal
17325	56.04	40.05	15.6	51.64	60.05	68.2	-8.15	Horizontal
11550	52.69	39.52	12.5	53.37	51.34	68.2	-16.86	Vertical
17325	53.86	40.05	15.6	51.64	57.87	68.2	-10.33	Vertical
11550	43.28	39.52	12.5	53.37	41.93	54	-12.07	Horizontal
17325	47.43	40.05	15.6	51.64	51.44	54	-2.56	Horizontal
11550	47.84	39.52	12.5	53.37	46.49	54	-7.51	Vertical
17325	43.15	40.05	15.6	51.64	47.16	54	-6.84	Vertical

Notes:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. Both 2 antennas and all modulation type were tested and compliance, only worst condition(ANT 1) report.

## 7.8 Frequency stability

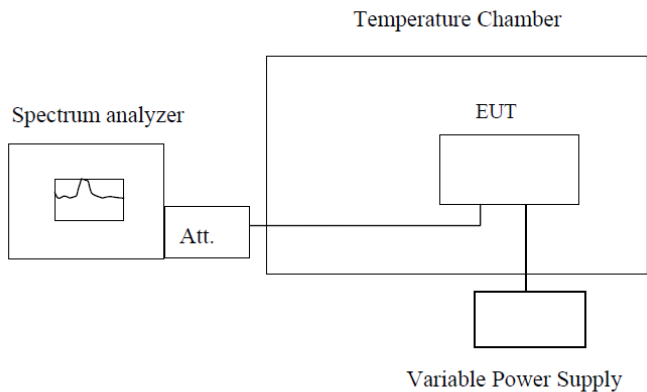Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	 <p><b>Note :</b> Measurement setup for testing on Antenna connector</p>
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

**Measurement Data:** The detailed test data see Appendix for 5G UNII.

## **8 Test Setup Photo**

Reference to the **appendix I** for details.

## **9 EUT Constructional Details**

Reference to the **appendix II** for details.

-----END-----