



# FCC RADIO TEST REPORT

**FCC ID** : HLZA24001  
**Equipment** : Tablet PC  
**Brand Name** : acer  
**Model Name** : A24001  
**Applicant** : Acer Incorporated  
8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist.,  
New Taipei City 22181, Taiwan (R.O.C)  
**Manufacturer** : Acer Incorporated  
8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist.,  
New Taipei City 22181, Taiwan (R.O.C)  
**Standard** : FCC Part 15 Subpart C §15.247

The product was received on Dec. 28, 2023 and testing was performed from Jan. 11, 2024 to Feb. 23, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	6
1.3 Testing Location .....	6
1.4 Applicable Standards.....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Carrier Frequency Channel .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system .....	9
2.5 EUT Operation Test Setup .....	10
2.6 Measurement Results Explanation Example.....	10
<b>3 Test Result.....</b>	<b>11</b>
3.1 6dB and 99% Bandwidth Measurement .....	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement .....	13
3.4 Conducted Band Edges and Spurious Emission Measurement .....	14
3.5 Radiated Band Edges and Spurious Emission Measurement .....	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements .....	21
<b>4 List of Measuring Equipment .....</b>	<b>22</b>
<b>5 Measurement Uncertainty .....</b>	<b>24</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission</b>	
<b>Appendix D. Radiated Spurious Emission Plots</b>	
<b>Appendix E. Duty Cycle Plots</b>	
<b>Appendix F. Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issue Date
FR3D2701B	01	Initial issue of report	Mar. 14, 2024



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	5.38 dB under the limit at 33.51 MHz
3.6	15.207	AC Conducted Emission	Pass	5.44 dB under the limit at 13.08 MHz
3.7	15.203	Antenna Requirement	Pass	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Lewis Ho**

**Report Producer: Lilian Hou**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature		
Sample 1	With PCB 1, Camera 1, DDR 1	
Sample 2	With PCB 2, Camera 2, DDR 2	
Sample 3	With PCB 2, Camera 1, DDR 1	
General Specs	Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, and GNSS.	
Antenna Type	WLAN: FPC Antenna Bluetooth: FPC Antenna GPS / Glonass / BDS: PIFA Antenna	
Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	1.78

**Remark:** The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.



### 1.2 Modification of EUT

No modifications made to the EUT during the testing.

### 1.3 Testing Location

<b>Test Site</b>	Sporton International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b> TH05-HY, CO07-HY, 03CH22-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

### 1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



## 2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
<b>Conducted Test Cases</b>	<b>Bluetooth – LE / GFSK</b>
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
<b>Radiated Test Cases</b>	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
<b>AC Conducted Emission</b>	Mode 1 :Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Earphone + USB Cable (Charging from Adapter) for Sample 1
	Mode 2 Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Earphone + USB Cable (Charging from Adapter) for Sample 2
	Mode 3 Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Earphone + USB Cable (Charging from Adapter) for Sample 3
<b>Remark:</b>	
1. The worst case of Conducted Emission is mode 2; only the test data of it was reported.	
2. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	



### 2.3 Connection Diagram of Test System



### 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded, 1.8m
4.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Earphone + Mic	Samsung	Ecouteur	N/A	Unshielded, 1.8m	N/A



## 2.5 EUT Operation Test Setup

The RF test items, utility “Acer\_AV0U0\_P11-11\_0.004.03\_PAPAP\_GEN1” was installed in EUT which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup



##### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

##### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGP-M-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

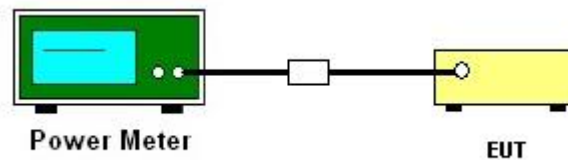

### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

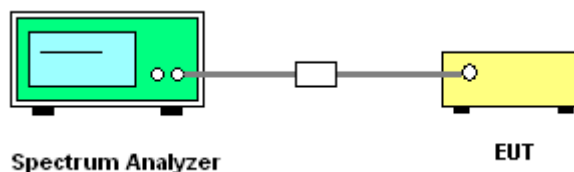

#### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

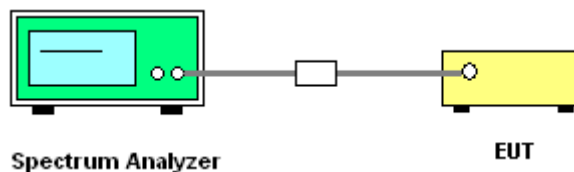

### 3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

### 3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




### 3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW = 3 MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




### 3.5.4 Test Setup


For radiated test below 30MHz

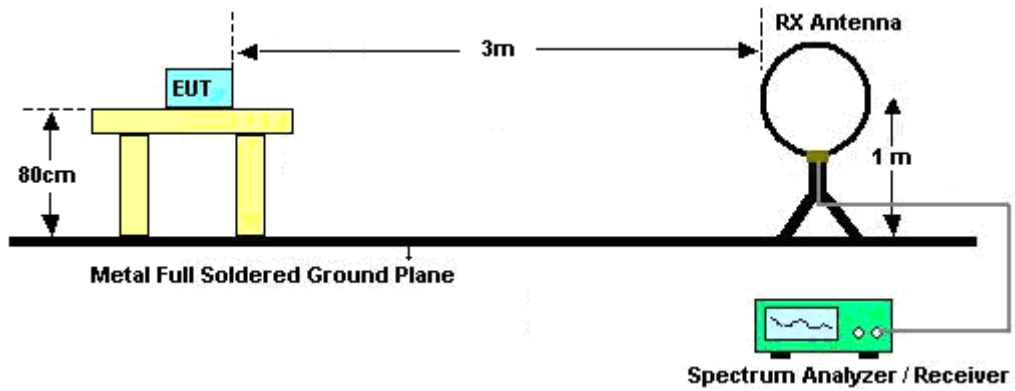


For radiated test from 30MHz to 1GHz

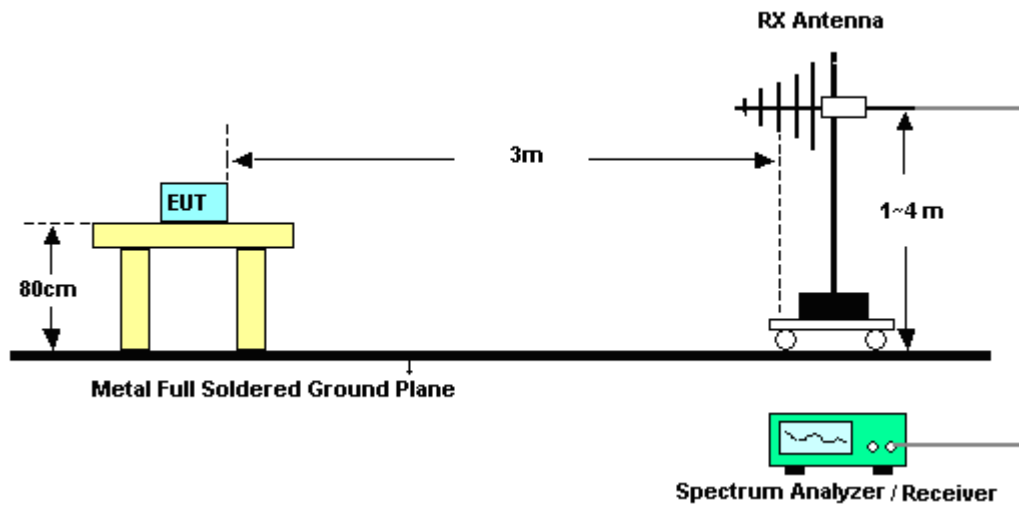

For radiated test from 1GHz to 18GHz

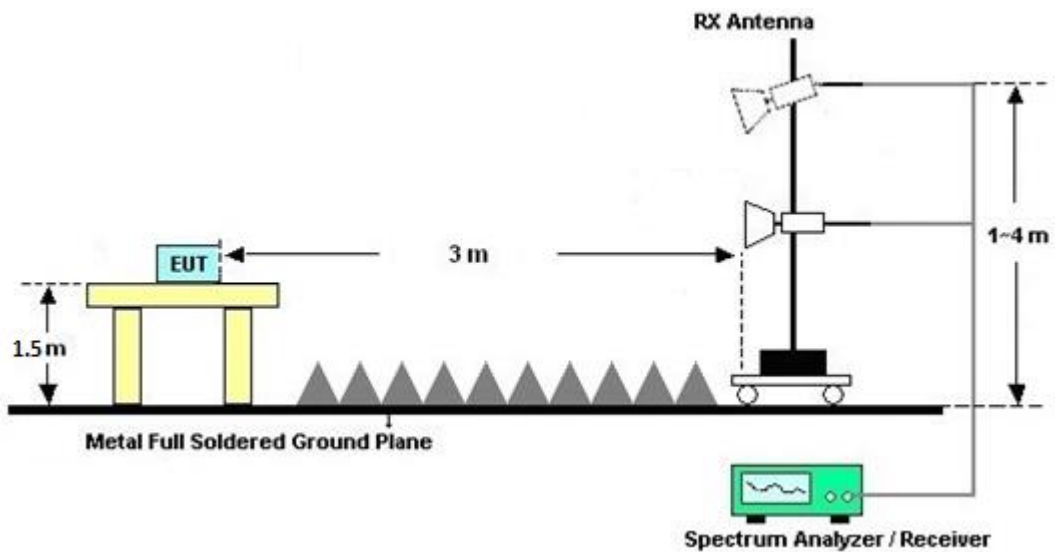

For radiated test above 18GHz

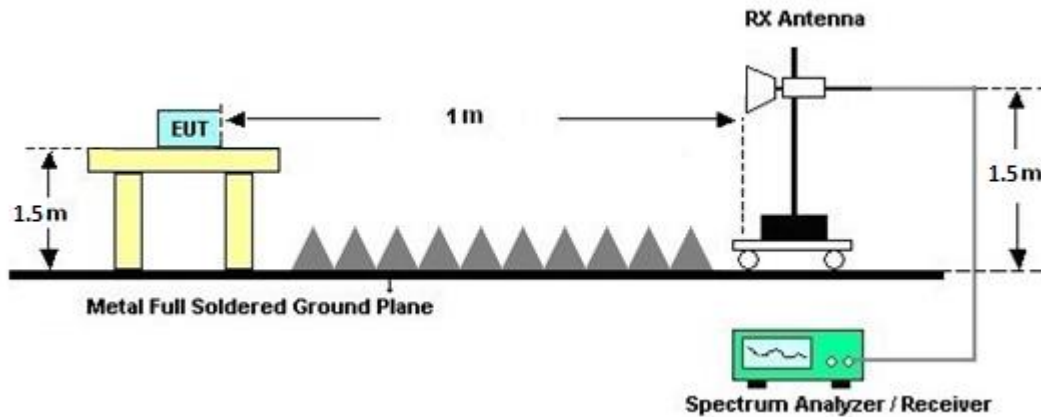

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.5.7 Duty Cycle

Please refer to Appendix E.

### 3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup



### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9kHz~30MHz	Feb. 28, 2023	Feb. 03, 2024~ Feb. 23, 2024	Feb. 27, 2024	Radiation (03CH22-HY)
Bilog Antenna with 6dB	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63304 & 002	30MHz~1GHz	Oct. 15, 2023	Feb. 03, 2024~ Feb. 23, 2024	Oct. 14, 2024	Radiation (03CH22-HY)
Amplifier	SONOMA	310N	421581	N/A	Jul. 15, 2023	Feb. 03, 2024~ Feb. 23, 2024	Jul. 14, 2024	Radiation (03CH22-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C04A18E N	1GHz~18GHz	Jul. 12, 2023	Feb. 03, 2024~ Feb. 23, 2024	Jul. 11, 2024	Radiation (03CH22-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jul. 10, 2023	Feb. 03, 2024~ Feb. 23, 2024	Jul. 09, 2024	Radiation (03CH22-HY)
Amplifier	EMEC	EM01G18GA	060877	N/A	Sep. 28, 2023	Feb. 03, 2024~ Feb. 23, 2024	Sep. 27, 2024	Radiation (03CH22-HY)
Preamplifier	EMEC	EM18G40G	060801	18-40GHz	Jun. 27, 2023	Feb. 03, 2024~ Feb. 23, 2024	Jun. 26, 2024	Radiation (03CH22-HY)
Signal Analyzer	Keysight	N9010B	MY60241058	10Hz~44GHz	Jul. 06, 2023	Feb. 03, 2024~ Feb. 23, 2024	Jul. 05, 2024	Radiation (03CH22-HY)
Hygrometer	TECEPEL	DTM-303A	TP211469	N/A	Jan. 03, 2024	Feb. 03, 2024~ Feb. 23, 2024	Jan. 02, 2025	Radiation (03CH22-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 03, 2024~ Feb. 23, 2024	N/A	Radiation (03CH22-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Feb. 03, 2024~ Feb. 23, 2024	N/A	Radiation (03CH22-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Feb. 03, 2024~ Feb. 23, 2024	N/A	Radiation (03CH22-HY)
Software	Audix	E3 6.09824_2019 122	RK-002347	N/A	N/A	Feb. 03, 2024~ Feb. 23, 2024	N/A	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 07, 2023	Feb. 03, 2024~ Feb. 23, 2024	Mar. 06, 2024	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804390/2,804 611/2,804615/ 2	N/A	Oct. 24, 2023	Feb. 03, 2024~ Feb. 23, 2024	Oct. 23, 2024	Radiation (03CH22-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Feb. 02, 2024~ Feb. 07, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Feb. 02, 2024~ Feb. 07, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2023	Feb. 02, 2024~ Feb. 07, 2024	Oct. 19, 2024	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 15, 2023	Feb. 02, 2024~ Feb. 07, 2024	Mar. 14, 2024	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 05, 2023	Feb. 02, 2024~ Feb. 07, 2024	Mar. 04, 2024	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 13, 2023	Feb. 02, 2024~ Feb. 07, 2024	Mar. 12, 2024	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 20, 2023	Feb. 02, 2024~ Feb. 07, 2024	Sep. 19, 2024	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Jan. 11, 2024~ Jan. 30, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	15I00041SNO 10 (NO:248)	10MHz~6GHz	Jun. 05, 2023	Jan. 11, 2024~ Jan. 30, 2024	Jun. 04, 2024	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2023	Jan. 11, 2024~ Jan. 30, 2024	Aug. 22, 2024	Conducted (TH05-HY)



## 5 Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.44 dB
---	---------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.4 dB
---	--------



**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Junyu Jhou	Temperature:	21~25	°C
Test Date:	2024/1/11~2024/1/30	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.033	0.711	0.50	Pass
BLE	1Mbps	1	19	2440	1.037	0.713	0.50	Pass
BLE	1Mbps	1	39	2480	1.037	0.710	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	5.40	30.00	1.78	7.18	36.00	Pass
BLE	1Mbps	1	19	2440	5.30	30.00	1.78	7.08	36.00	Pass
BLE	1Mbps	1	39	2480	4.30	30.00	1.78	6.08	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**


Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	4.87	-9.67	1.78	8.00	Pass
BLE	1Mbps	1	19	2440	4.76	-9.71	1.78	8.00	Pass
BLE	1Mbps	1	39	2480	3.88	-10.56	1.78	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.



6dB Bandwidth

<1Mbps>

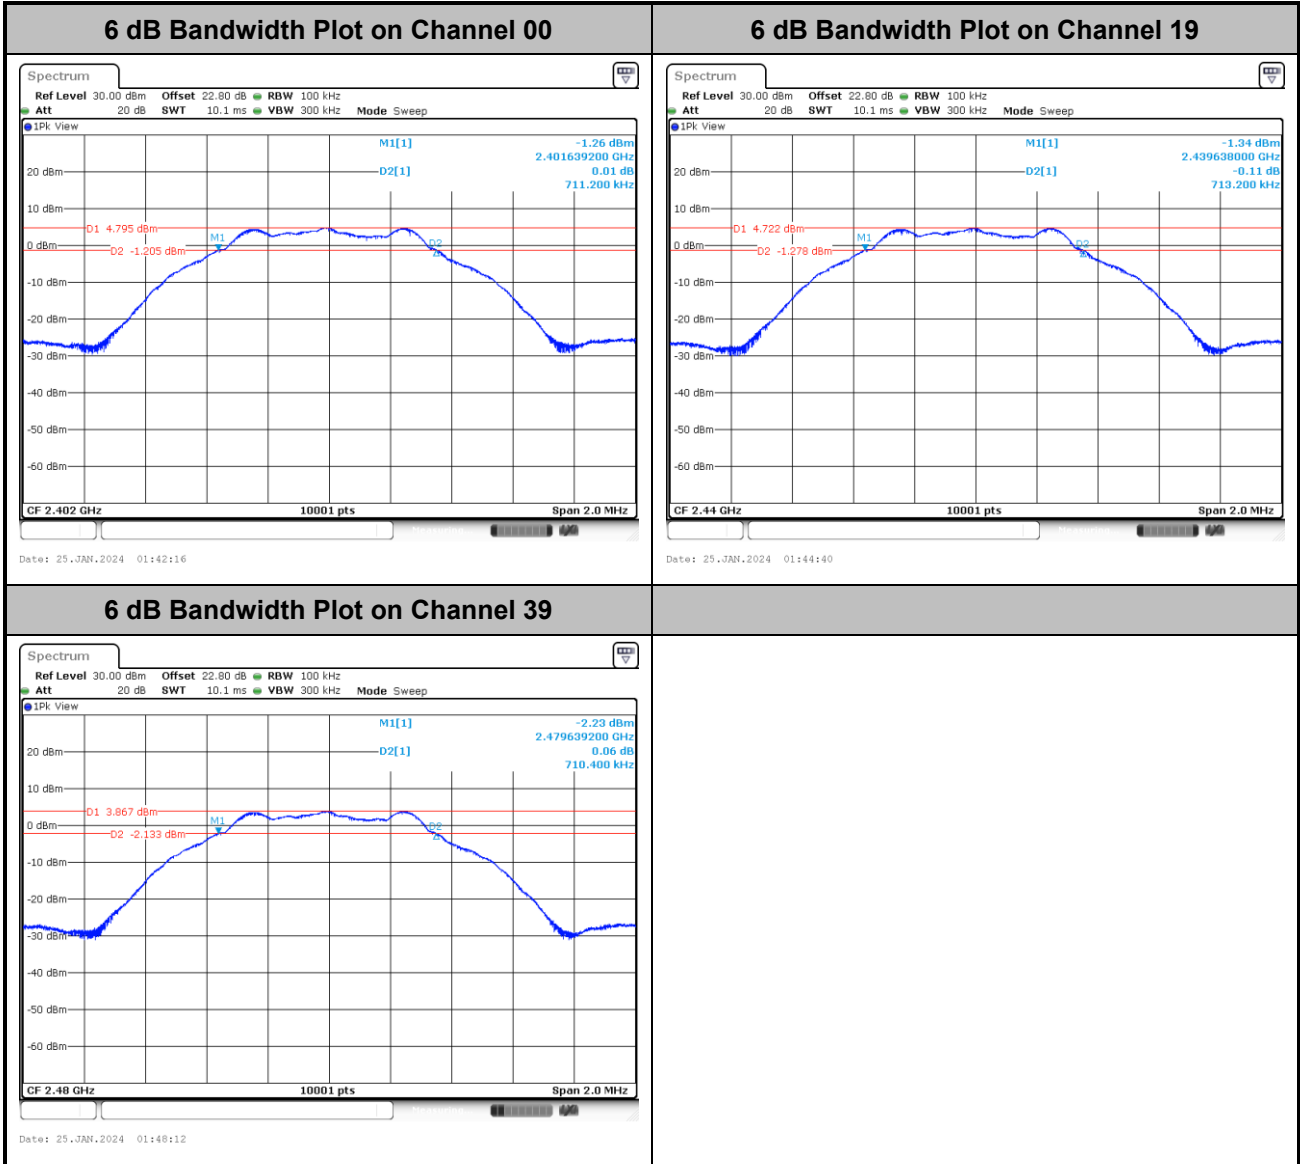





99% Occupied Bandwidth

<1Mbps>


99% Occupied Bandwidth Plot on Channel 00

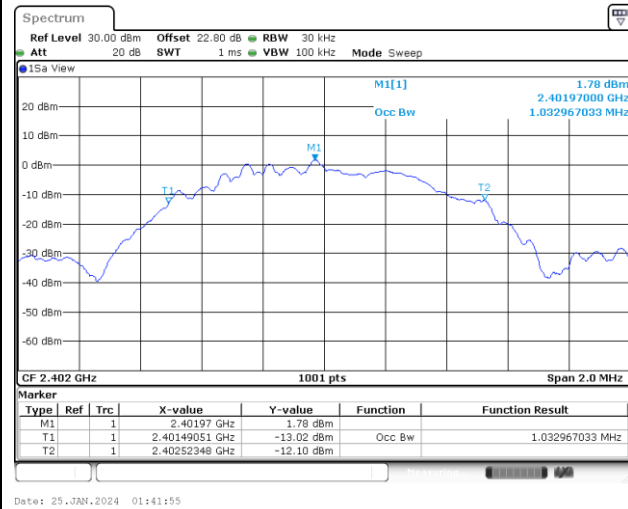

99% Occupied Bandwidth Plot on Channel 19

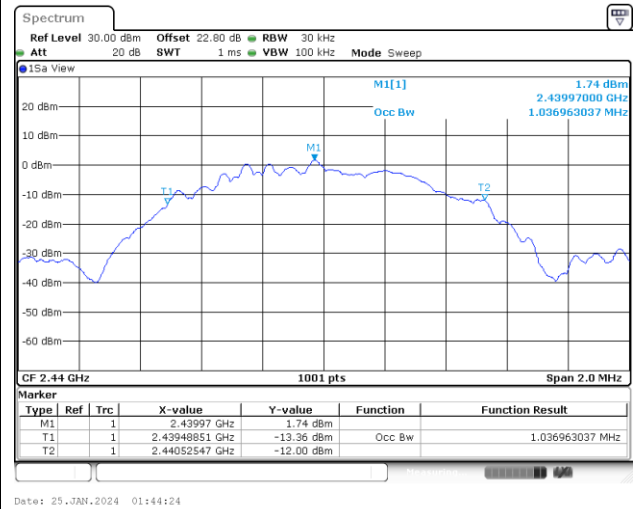


99% Occupied Bandwidth Plot on Channel 39

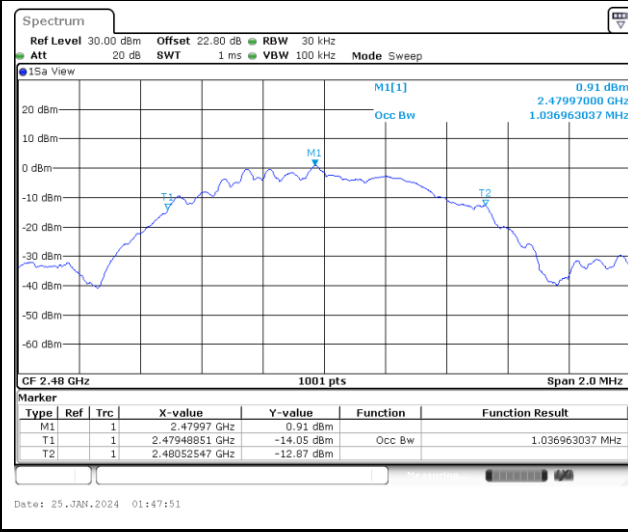



**Power Spectral Density (dBm/3kHz)**

<1Mbps>

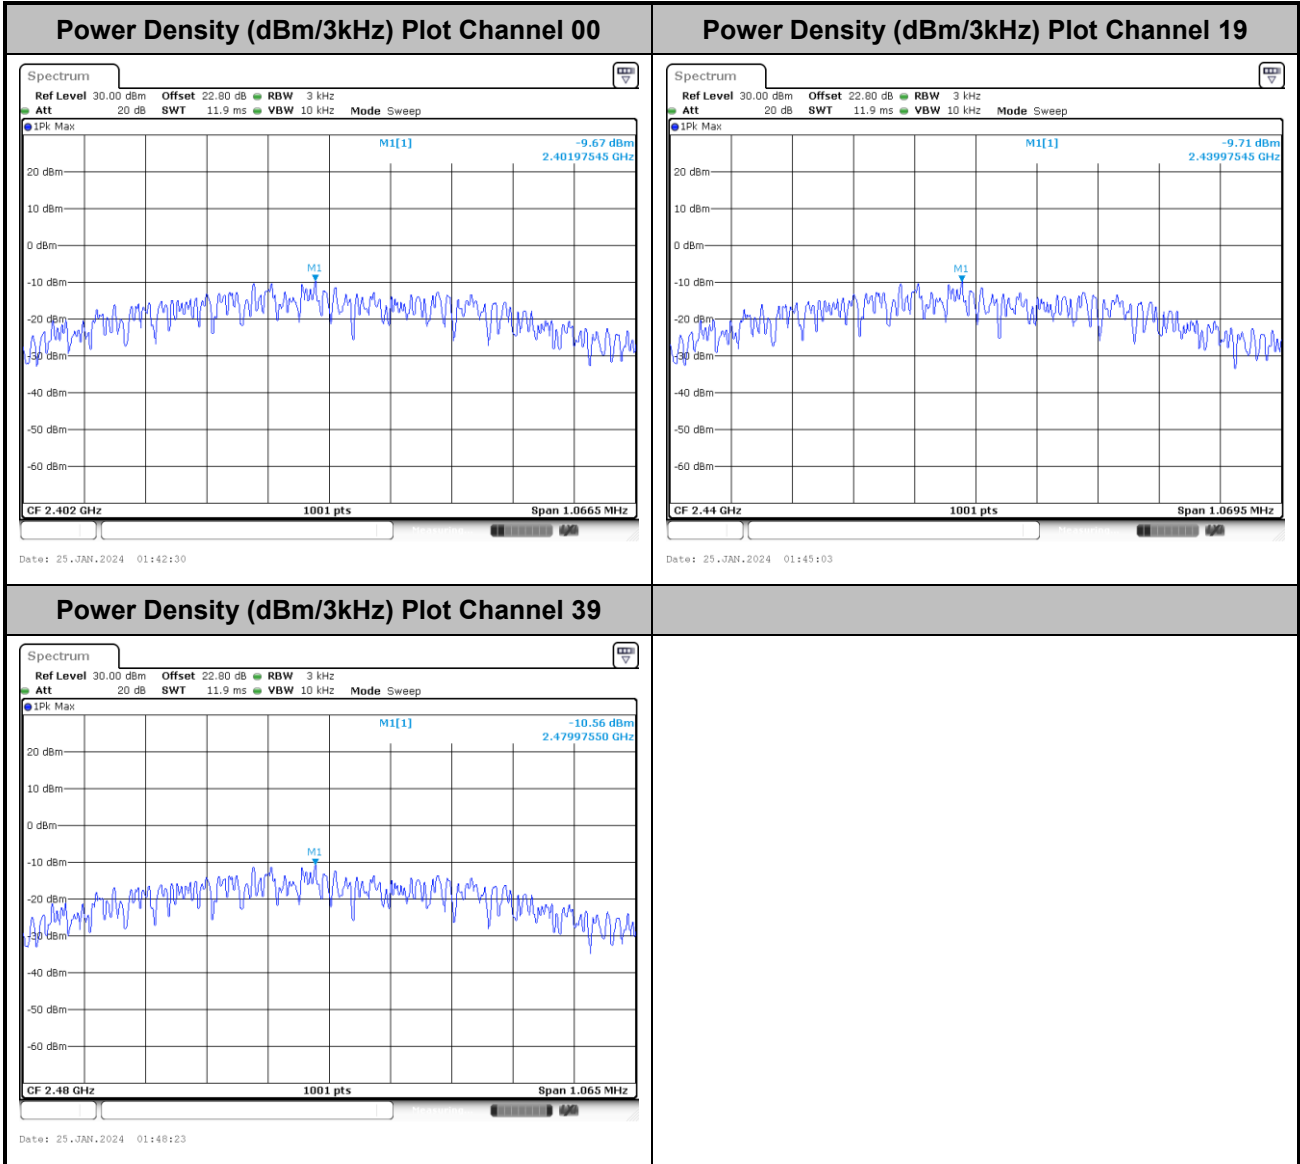




**Band Edge and Conducted Spurious Emission**

<1Mbps>


**Channel 00**

**100kHz PSD reference Level Plot**

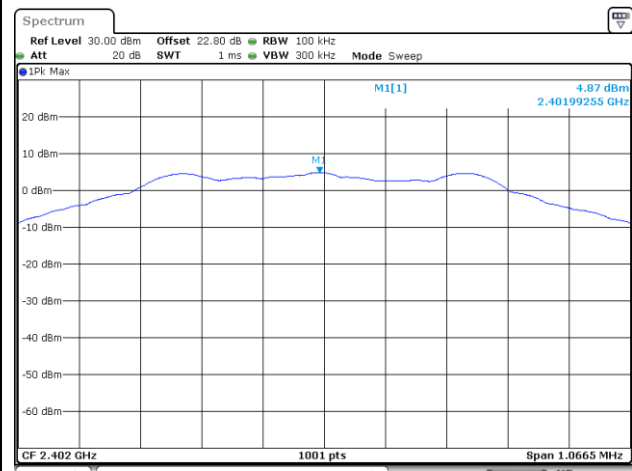


Date: 25 .JAN. 2024 01:42:48

**Low Channel Plot**

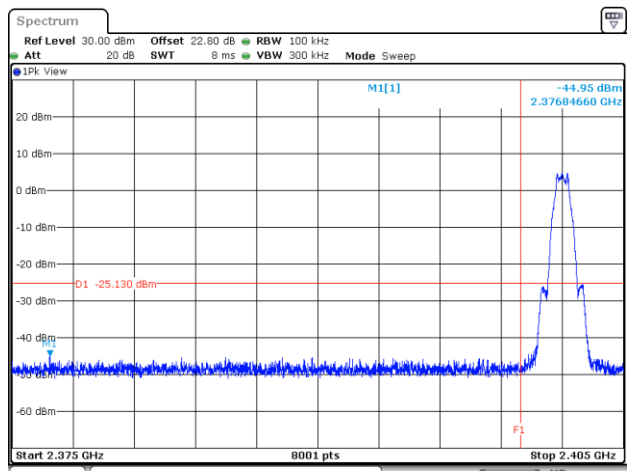


Date: 25 .JAN. 2024 01:43:44

**Spurious Emission 30MHz~1GHz Plot**

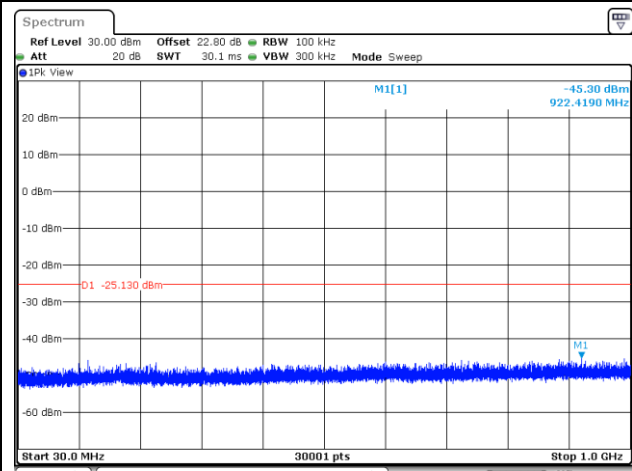

Date: 25 .JAN. 2024 01:43:07

**Spurious Emission 1GHz~26.5GHz Plot**

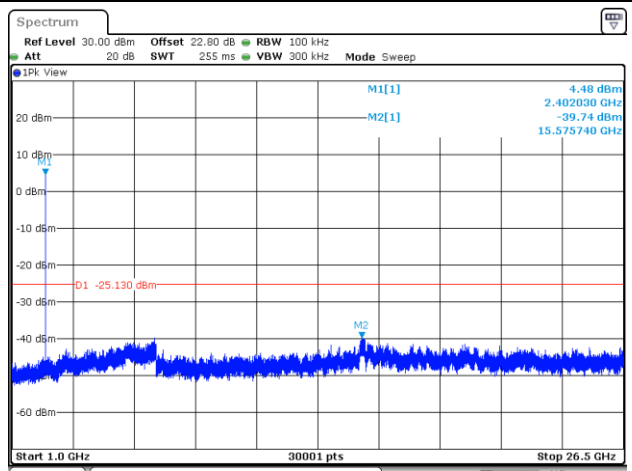


Date: 25 .JAN. 2024 01:43:25




Channel 19

100kHz PSD reference Level Plot

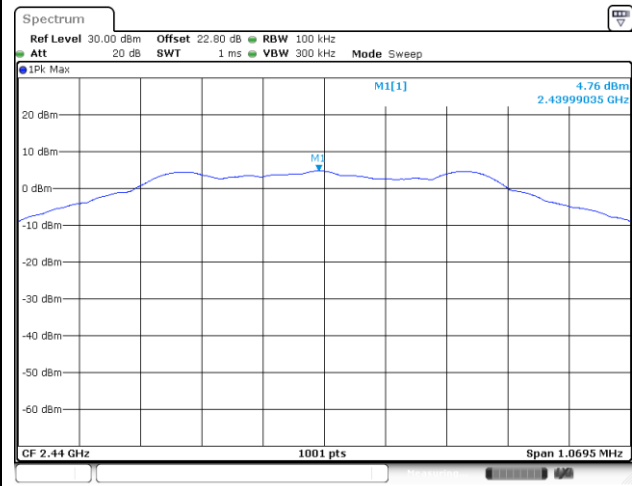


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

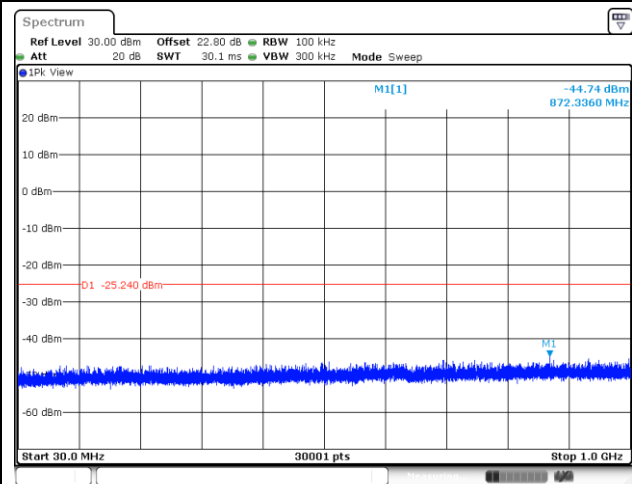


Spurious Emission 1GHz~26.5GHz Plot

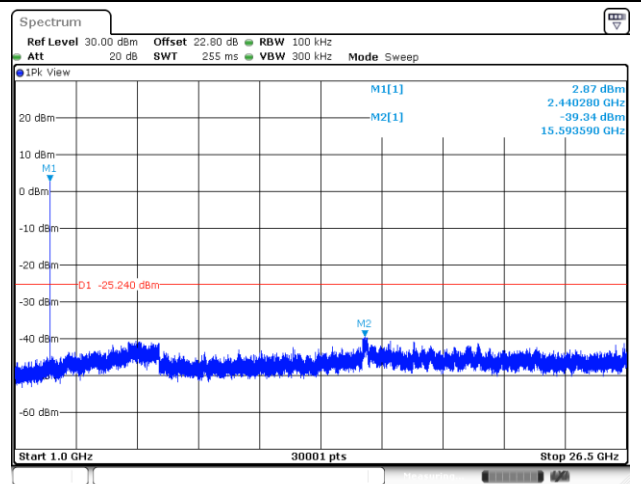




Channel 39


100kHz PSD reference Level Plot

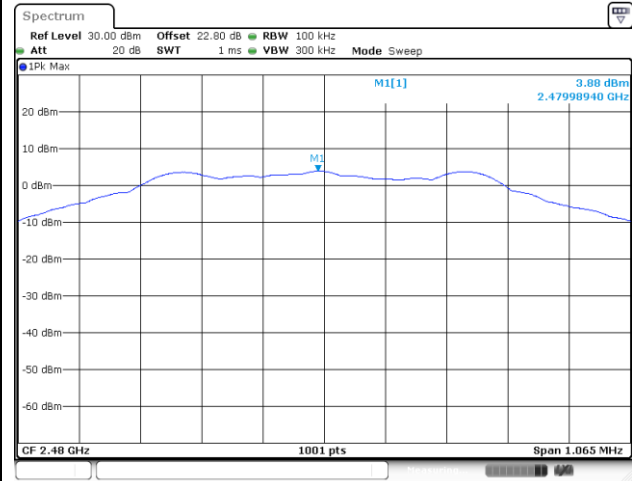


High Channel Plot

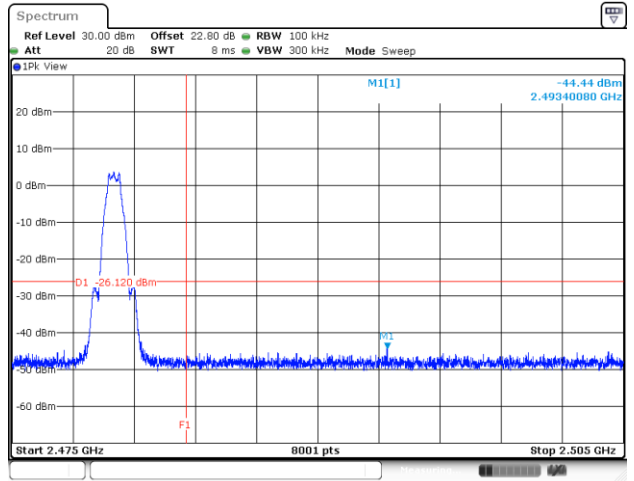

Spurious Emission 30MHz~1GHz Plot

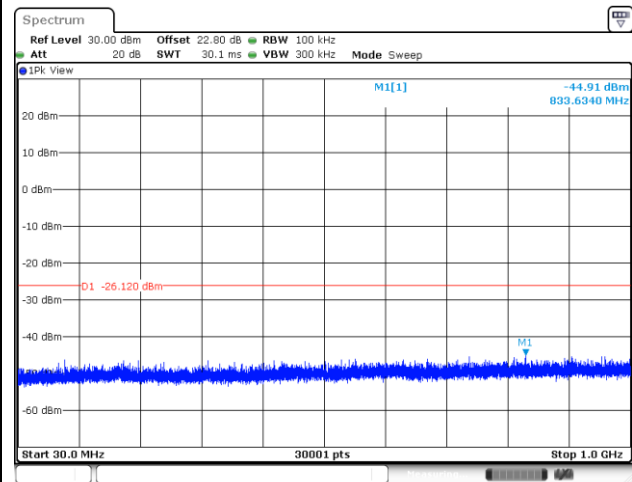

Spurious Emission 1GHz~26.5GHz Plot

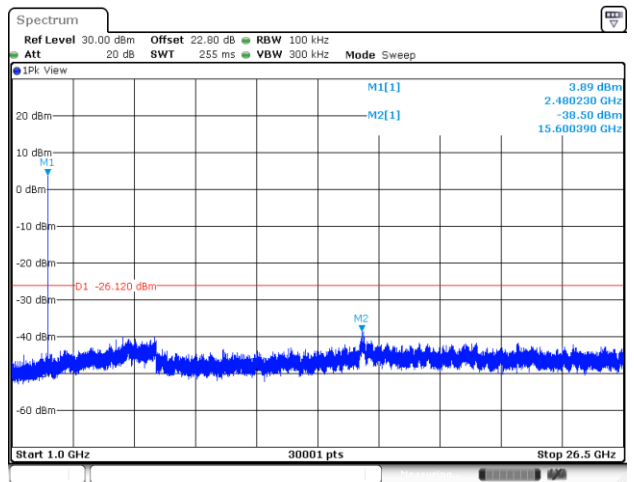



## Appendix B. AC Conducted Emission Test Results


Test Engineer :	Louis Chung	Temperature :	18.8~24.2°C
		Relative Humidity :	50.2~60.4%



## EUT Information

Report NO : 3D2701  
 Test Mode : Mode 2  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

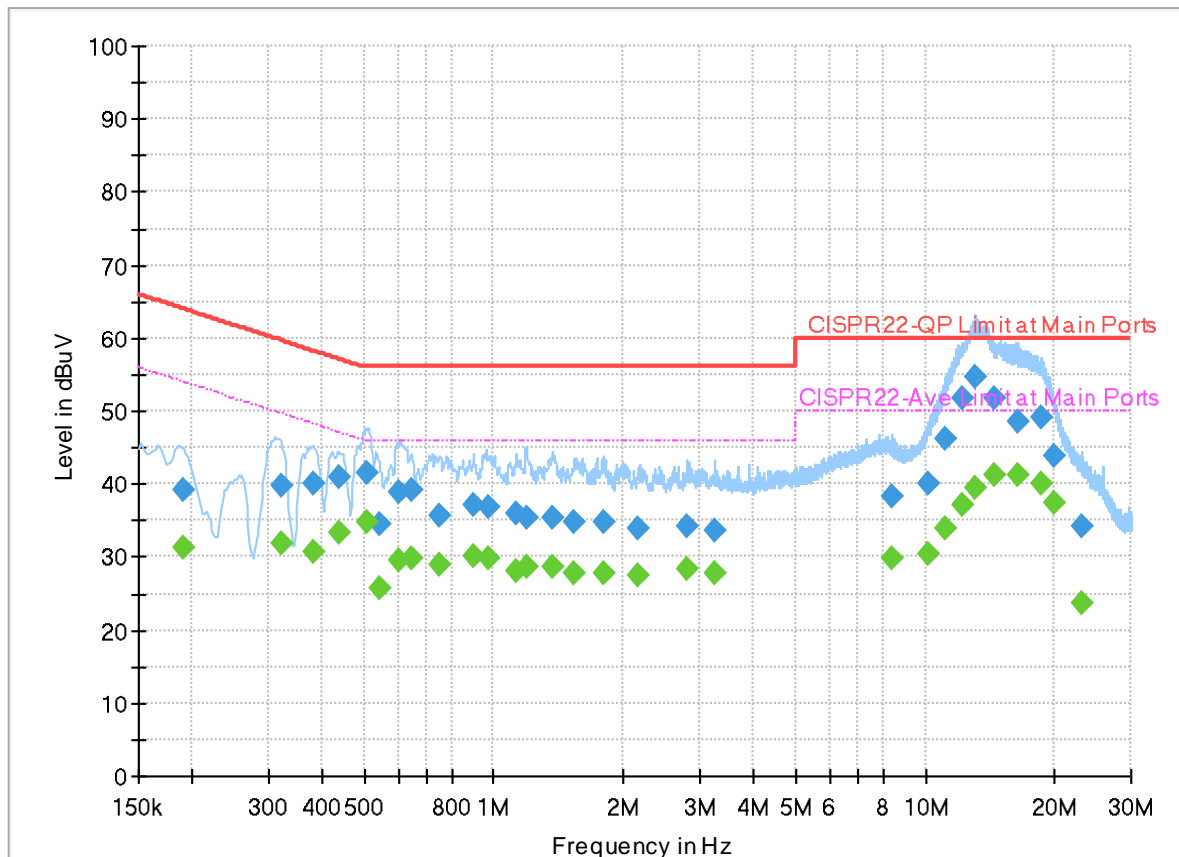

## Final\_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.189960	---	31.28	54.04	22.76	L1	OFF	19.9
0.189960	39.15	---	64.04	24.89	L1	OFF	19.9
0.320010	---	31.78	49.71	17.93	L1	OFF	19.9
0.320010	39.82	---	59.71	19.89	L1	OFF	19.9
0.382290	---	30.61	48.23	17.62	L1	OFF	19.9
0.382290	40.02	---	58.23	18.21	L1	OFF	19.9
0.435660	---	33.36	47.14	13.78	L1	OFF	19.9
0.435660	40.83	---	57.14	16.31	L1	OFF	19.9
0.505500	---	34.90	46.00	11.10	L1	OFF	19.9
0.505500	41.48	---	56.00	14.52	L1	OFF	19.9
0.541500	---	25.76	46.00	20.24	L1	OFF	19.9
0.541500	34.38	---	56.00	21.62	L1	OFF	19.9
0.602430	---	29.51	46.00	16.49	L1	OFF	19.9
0.602430	38.78	---	56.00	17.22	L1	OFF	19.9
0.644370	---	29.86	46.00	16.14	L1	OFF	19.9
0.644370	39.11	---	56.00	16.89	L1	OFF	19.9
0.744090	---	28.84	46.00	17.16	L1	OFF	19.9
0.744090	35.81	---	56.00	20.19	L1	OFF	19.9
0.899250	---	30.11	46.00	15.89	L1	OFF	19.9

0.899250	37.11	---	56.00	18.89	L1	OFF	19.9
0.971250	---	29.69	46.00	16.31	L1	OFF	19.9
0.971250	36.90	---	56.00	19.10	L1	OFF	19.9
1.128750	---	27.99	46.00	18.01	L1	OFF	20.0
1.128750	35.92	---	56.00	20.08	L1	OFF	20.0
1.191570	---	28.64	46.00	17.36	L1	OFF	20.0
1.191570	35.50	---	56.00	20.50	L1	OFF	20.0
1.364370	---	28.58	46.00	17.42	L1	OFF	20.0
1.364370	35.52	---	56.00	20.48	L1	OFF	20.0
1.541760	---	27.85	46.00	18.15	L1	OFF	20.0
1.541760	34.78	---	56.00	21.22	L1	OFF	20.0
1.792590	---	27.88	46.00	18.12	L1	OFF	20.0
1.792590	34.85	---	56.00	21.15	L1	OFF	20.0
2.169690	---	27.40	46.00	18.60	L1	OFF	20.0
2.169690	33.95	---	56.00	22.05	L1	OFF	20.0
2.810850	---	28.47	46.00	17.53	L1	OFF	20.0
2.810850	34.26	---	56.00	21.74	L1	OFF	20.0
3.258780	---	27.80	46.00	18.20	L1	OFF	20.0
3.258780	33.68	---	56.00	22.32	L1	OFF	20.0
8.380500	---	29.88	50.00	20.12	L1	OFF	20.0
8.380500	38.25	---	60.00	21.75	L1	OFF	20.0
10.132170	---	30.44	50.00	19.56	L1	OFF	20.1
10.132170	40.03	---	60.00	19.97	L1	OFF	20.1
11.184000	---	33.78	50.00	16.22	L1	OFF	20.1
11.184000	46.27	---	60.00	13.73	L1	OFF	20.1
12.146190	---	37.14	50.00	12.86	L1	OFF	20.1
12.146190	51.61	---	60.00	8.39	L1	OFF	20.1
13.082550	---	39.34	50.00	10.66	L1	OFF	20.1
13.082550	54.56	---	60.00	5.44	L1	OFF	20.1
14.463060	---	41.30	50.00	8.70	L1	OFF	20.1
14.463060	51.85	---	60.00	8.15	L1	OFF	20.1
16.364040	---	41.20	50.00	8.80	L1	OFF	20.1
16.364040	48.60	---	60.00	11.40	L1	OFF	20.1
18.521250	---	40.09	50.00	9.91	L1	OFF	20.1
18.521250	49.09	---	60.00	10.91	L1	OFF	20.1
19.965750	---	37.48	50.00	12.52	L1	OFF	20.1
19.965750	43.88	---	60.00	16.12	L1	OFF	20.1
23.193060	---	23.76	50.00	26.24	L1	OFF	20.2
23.193060	34.29	---	60.00	25.71	L1	OFF	20.2

## EUT Information

Report NO : 3D2701  
 Test Mode : Mode 2  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

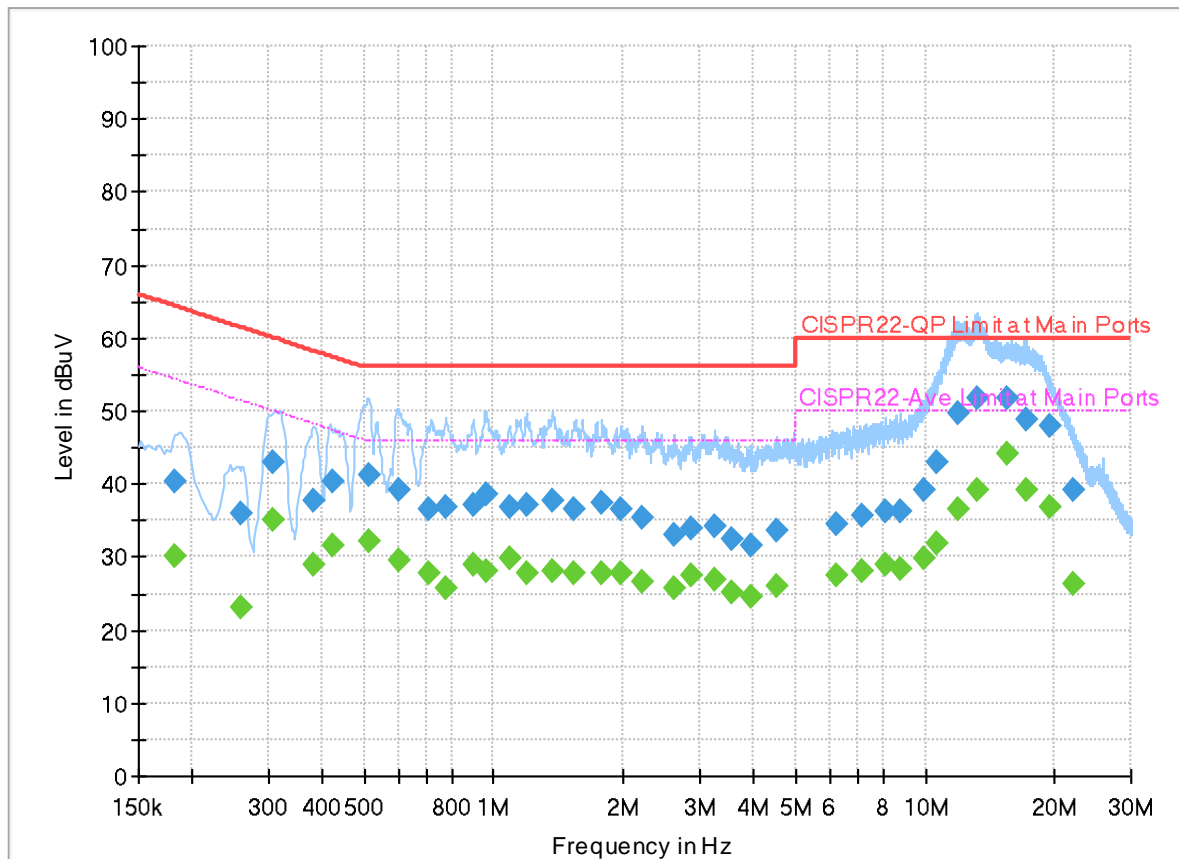

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.182760	40.27	---	64.36	24.09	N	OFF	19.9
0.182760	---	30.10	54.36	24.26	N	OFF	19.9
0.260430	36.07	---	61.42	25.35	N	OFF	19.9
0.260430	---	23.09	51.42	28.33	N	OFF	19.9
0.309210	42.92	---	59.99	17.07	N	OFF	19.9
0.309210	---	35.08	49.99	14.91	N	OFF	19.9
0.381930	37.70	---	58.24	20.54	N	OFF	19.9
0.381930	---	28.93	48.24	19.31	N	OFF	19.9
0.424500	40.47	---	57.36	16.89	N	OFF	19.9
0.424500	---	31.60	47.36	15.76	N	OFF	19.9
0.512700	41.14	---	56.00	14.86	N	OFF	19.9
0.512700	---	32.17	46.00	13.83	N	OFF	19.9
0.604500	39.19	---	56.00	16.81	N	OFF	19.9
0.604500	---	29.49	46.00	16.51	N	OFF	19.9
0.710250	36.63	---	56.00	19.37	N	OFF	19.9
0.710250	---	27.70	46.00	18.30	N	OFF	19.9
0.774420	36.84	---	56.00	19.16	N	OFF	19.9
0.774420	---	25.71	46.00	20.29	N	OFF	19.9
0.899250	37.11	---	56.00	18.89	N	OFF	19.9

0.899250	---	29.04	46.00	16.96	N	OFF	19.9
0.955500	38.50	---	56.00	17.50	N	OFF	19.9
0.955500	---	28.02	46.00	17.98	N	OFF	19.9
1.084470	36.96	---	56.00	19.04	N	OFF	20.0
1.084470	---	29.71	46.00	16.29	N	OFF	20.0
1.191480	37.12	---	56.00	18.88	N	OFF	20.0
1.191480	---	27.67	46.00	18.33	N	OFF	20.0
1.364280	37.69	---	56.00	18.31	N	OFF	20.0
1.364280	---	28.13	46.00	17.87	N	OFF	20.0
1.538250	36.58	---	56.00	19.42	N	OFF	20.0
1.538250	---	27.92	46.00	18.08	N	OFF	20.0
1.782960	37.34	---	56.00	18.66	N	OFF	20.0
1.782960	---	27.89	46.00	18.11	N	OFF	20.0
1.964220	36.63	---	56.00	19.37	N	OFF	20.0
1.964220	---	27.68	46.00	18.32	N	OFF	20.0
2.211000	35.51	---	56.00	20.49	N	OFF	20.0
2.211000	---	26.58	46.00	19.42	N	OFF	20.0
2.628150	33.16	---	56.00	22.84	N	OFF	20.0
2.628150	---	25.86	46.00	20.14	N	OFF	20.0
2.867820	33.96	---	56.00	22.04	N	OFF	20.0
2.867820	---	27.49	46.00	18.51	N	OFF	20.0
3.255990	34.24	---	56.00	21.76	N	OFF	20.0
3.255990	---	26.95	46.00	19.05	N	OFF	20.0
3.576750	32.57	---	56.00	23.43	N	OFF	20.0
3.576750	---	25.27	46.00	20.73	N	OFF	20.0
3.948000	31.45	---	56.00	24.55	N	OFF	20.0
3.948000	---	24.53	46.00	21.47	N	OFF	20.0
4.530750	33.51	---	56.00	22.49	N	OFF	20.0
4.530750	---	26.07	46.00	19.93	N	OFF	20.0
6.216000	34.44	---	60.00	25.56	N	OFF	20.0
6.216000	---	27.36	50.00	22.64	N	OFF	20.0
7.104750	35.80	---	60.00	24.20	N	OFF	20.0
7.104750	---	28.00	50.00	22.00	N	OFF	20.0
8.117160	36.22	---	60.00	23.78	N	OFF	20.0
8.117160	---	28.86	50.00	21.14	N	OFF	20.0
8.751300	36.24	---	60.00	23.76	N	OFF	20.0
8.751300	---	28.47	50.00	21.53	N	OFF	20.0
9.891330	39.20	---	60.00	20.80	N	OFF	20.0
9.891330	---	29.83	50.00	20.17	N	OFF	20.0
10.672080	43.04	---	60.00	16.96	N	OFF	20.1
10.672080	---	31.96	50.00	18.04	N	OFF	20.1
11.915430	49.72	---	60.00	10.28	N	OFF	20.1
11.915430	---	36.56	50.00	13.44	N	OFF	20.1
13.184250	51.82	---	60.00	8.18	N	OFF	20.1
13.184250	---	39.29	50.00	10.71	N	OFF	20.1
15.508950	51.63	---	60.00	8.37	N	OFF	20.1
15.508950	---	44.19	50.00	5.81	N	OFF	20.1
17.164500	48.84	---	60.00	11.16	N	OFF	20.2
17.164500	---	39.13	50.00	10.87	N	OFF	20.2
19.502250	48.05	---	60.00	11.95	N	OFF	20.2
19.502250	---	36.86	50.00	13.14	N	OFF	20.2
22.092630	39.11	---	60.00	20.89	N	OFF	20.2
22.092630	---	26.27	50.00	23.73	N	OFF	20.2



### Appendix C. Radiated Spurious Emission

Test Engineer :	BANK Lin, Ken Kuo and Lucifer Jiang	Temperature :	20~23°C
		Relative Humidity :	42~55%

<Sample 1>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BLE CH 00 2402MHz		2355.36	51.23	-22.77	74	38.26	27	18.3	32.33	169	23	P	H	
		2329.32	40.91	-13.09	54	27.88	27.1	18.25	32.32	169	23	A	H	
	*	2402	102.99	-	-	89.97	27	18.38	32.36	169	23	P	H	
	*	2402	102.45	-	-	89.43	27	18.38	32.36	169	23	A	H	
													H	
													H	
			2331.105	50.48	-23.52	74	37.46	27.09	18.25	32.32	400	204	P	V
			2387.91	40.75	-13.25	54	27.82	26.92	18.36	32.35	400	204	A	V
	*		2402	98.68	-	-	85.66	27	18.38	32.36	400	204	P	V
	*		2402	98.13	-	-	85.11	27	18.38	32.36	400	204	A	V
													V	
													V	
BLE CH 19 2440MHz		2383.28	50.55	-23.45	74	37.58	26.97	18.35	32.35	104	19	P	H	
		2382.96	40.88	-13.12	54	27.91	26.97	18.35	32.35	104	19	A	H	
	*	2440	102.59	-	-	89.72	26.8	18.45	32.38	104	19	P	H	
	*	2440	102.04	-	-	89.17	26.8	18.45	32.38	104	19	A	H	
			2490.8	50.45	-23.55	74	37.41	26.91	18.54	32.41	104	19	P	H
			2497.92	41.08	-12.92	54	27.96	26.98	18.56	32.42	104	19	A	H
			2368.4	50.29	-23.71	74	37.31	27	18.32	32.34	394	202	P	V
			2347.6	40.74	-13.26	54	27.79	27	18.28	32.33	394	202	A	V
	*		2440	99.28	-	-	86.41	26.8	18.45	32.38	394	202	P	V
	*		2440	98.68	-	-	85.81	26.8	18.45	32.38	394	202	A	V
			2497.92	50.59	-23.41	74	37.47	26.98	18.56	32.42	394	202	P	V
			2497.28	40.95	-13.05	54	27.84	26.97	18.56	32.42	394	202	A	V



<b>BLE CH 39 2480MHz</b>	*	2480	102.15	-	-	89.14	26.9	18.52	32.41	131	20	P	H
	*	2480	101.59	-	-	88.58	26.9	18.52	32.41	131	20	A	H
		2499.88	51.04	-22.96	74	37.9	27	18.56	32.42	131	20	P	H
		2485.96	41.25	-12.75	54	28.23	26.9	18.53	32.41	131	20	A	H
													H
													H
	*	2480	99.28	-	-	86.27	26.9	18.52	32.41	331	203	P	V
	*	2480	98.76	-	-	85.75	26.9	18.52	32.41	331	203	A	V
		2492.52	50.22	-23.78	74	37.16	26.93	18.55	32.42	331	203	P	V
		2490.56	41.06	-12.94	54	28.02	26.91	18.54	32.41	331	203	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		4804	45.06	-28.94	74	33.21	32.32	13.03	33.5	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4804	44.84	-29.16	74	32.99	32.32	13.03	33.5	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 19 2440MHz		4880	45.38	-28.62	74	33.24	32.56	13.07	33.49	-	-	P	H	
		7320	49.78	-24.22	74	32.12	37.5	16.01	35.85	-	-	P	H	
		7320	40.68	-13.32	54	23.02	37.5	16.01	35.85	-	-	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4880	44.97	-29.03	74	32.83	32.56	13.07	33.49	-	-	P	V
			7320	51.15	-22.85	74	33.49	37.5	16.01	35.85	-	-	P	V
			7320	42.05	-11.95	54	24.39	37.5	16.01	35.85	-	-	A	V
														V
														V
														V
														V
														V
													V	
													V	
													V	
													V	
													V	
													V	





BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 39 2480MHz		4960	45.3	-28.7	74	32.96	32.7	13.11	33.47	-	-	P	H	
		7440	49.43	-24.57	74	31.89	37.32	16.15	35.93	-	-	P	H	
		7440	40.33	-13.67	54	22.79	37.32	16.15	35.93	-	-	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4960	45.8	-28.2	74	33.46	32.7	13.11	33.47	-	-	P	V
			7440	49.38	-24.62	74	31.84	37.32	16.15	35.93	-	-	P	V
			7440	40.28	-13.72	54	22.74	37.32	16.15	35.93	-	-	A	V
														V
														V
														V
														V
														V
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



Emission above 18GHz

2.4GHz BLE (SHF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BLE SHF		24930	33.23	-40.77	74	33.69	39.44	19.74	59.64	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			24986	33.83	-40.17	74	34.13	39.47	19.76	59.53	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BLE LF		40.26	25.91	-14.09	40	37.72	19.87	1.06	32.74	-	-	P	H	
		87.51	33.53	-6.47	40	49.93	14.65	1.67	32.72	-	-	P	H	
		233.31	31.02	-14.98	46	44.51	16.45	2.73	32.67	-	-	P	H	
		828.5	32.67	-13.33	46	31.46	28.35	5.18	32.32	-	-	P	H	
		923	33.41	-12.59	46	30.04	29.56	5.46	31.65	-	-	P	H	
		963.6	34.93	-19.07	54	29.65	30.94	5.6	31.26	-	-	P	H	
														H
														H
														H
														H
														H
														H
			33.51	34.62	-5.38	40	43.28	23.15	0.94	32.75	100	222	Q	V
			39.99	32.36	-7.64	40	44.01	20.03	1.06	32.74	100	124	Q	V
			87.51	31.81	-8.19	40	48.21	14.65	1.67	32.72	-	-	P	V
			861.4	32.67	-13.33	46	30.23	29.28	5.28	32.12	-	-	P	V
			916	33.83	-12.17	46	30.86	29.24	5.44	31.71	-	-	P	V
			965	35.84	-18.16	54	30.55	30.93	5.61	31.25	-	-	P	V
														V
														V
													V	
													V	
													V	

**Remark**

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



<Sample 2>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 19 2440MHz		2370.16	50.56	-23.44	74	37.58	27	18.32	32.34	185	18	P	H
		2387.92	41.26	-12.74	54	28.33	26.92	18.36	32.35	185	18	A	H
	*	2440	102.95	-	-	90.08	26.8	18.45	32.38	185	18	P	H
	*	2440	102.39	-	-	89.52	26.8	18.45	32.38	185	18	A	H
		2498.4	51.62	-22.38	74	38.5	26.98	18.56	32.42	185	18	P	H
		2497.76	41.47	-12.53	54	28.35	26.98	18.56	32.42	185	18	A	H
		2373.52	50.64	-23.36	74	37.65	27	18.33	32.34	397	207	P	V
		2362.64	41.11	-12.89	54	28.14	27	18.31	32.34	397	207	A	V
	*	2440	100.05	-	-	87.18	26.8	18.45	32.38	397	207	P	V
	*	2440	99.46	-	-	86.59	26.8	18.45	32.38	397	207	A	V
		2497.92	50.75	-23.25	74	37.63	26.98	18.56	32.42	397	207	P	V
		2492.88	41.5	-12.5	54	28.44	26.93	18.55	32.42	397	207	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 19 2440MHz		4880	45.61	-28.39	74	33.47	32.56	13.07	33.49	-	-	P	H	
		7320	50.97	-23.03	74	33.31	37.5	16.01	35.85	-	-	P	H	
		7320	40.64	-13.36	54	22.98	37.5	16.01	35.85	-	-	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4880	45.39	-28.61	74	33.25	32.56	13.07	33.49	-	-	P	V
			7320	49.63	-24.37	74	31.97	37.5	16.01	35.85	-	-	P	V
			7320	40.57	-13.43	54	22.91	37.5	16.01	35.85	-	-	A	V
														V
														V
														V
														V
														V
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



Emission above 18GHz

2.4GHz BLE (SHF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BLE SHF		24832	32.46	-41.54	74	32.94	39.66	19.7	59.84	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			24587	32.47	-41.53	74	33.81	39.4	19.59	60.33	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BLE LF		55.65	28.7	-11.3	40	47.61	12.52	1.3	32.73	-	-	P	H	
		88.59	34.53	-8.97	43.5	50.77	14.8	1.68	32.72	-	-	P	H	
		177.15	28.8	-14.7	43.5	43.87	15.18	2.43	32.68	-	-	P	H	
		228.72	32.3	-13.7	46	46.34	15.93	2.7	32.67	-	-	P	H	
		401.5	31.68	-14.32	46	39.01	21.82	3.56	32.71	-	-	P	H	
		972	35.65	-18.35	54	30.35	30.83	5.64	31.17	-	-	P	H	
														H
														H
														H
														H
														H
														H
			35.4	31.93	-8.07	40	41.39	22.31	0.97	32.74	100	230	Q	V
			40.53	32.29	-7.71	40	44.24	19.72	1.07	32.74	100	22	Q	V
			69.96	31.38	-8.62	40	50.05	12.59	1.47	32.73	-	-	P	V
			88.59	34.67	-8.83	43.5	50.91	14.8	1.68	32.72	100	82	Q	V
			227.64	23.77	-22.23	46	37.93	15.82	2.69	32.67	-	-	P	V
			888.7	36.76	-9.24	46	34.37	28.95	5.37	31.93	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	

**Remark**

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



<Sample 3>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 19 2440MHz		2336.24	50.6	-23.4	74	37.62	27.04	18.26	32.32	186	28	P	H
		2342.8	40.94	-13.06	54	28	27	18.27	32.33	186	28	A	H
	*	2440	103.23	-	-	90.36	26.8	18.45	32.38	186	28	P	H
	*	2440	102.64	-	-	89.77	26.8	18.45	32.38	186	28	A	H
		2492.48	50.94	-23.06	74	37.89	26.92	18.55	32.42	186	28	P	H
		2488.8	41.11	-12.89	54	28.08	26.9	18.54	32.41	186	28	A	H
		2329.2	50.29	-23.71	74	37.26	27.1	18.25	32.32	380	234	P	V
		2374.8	40.79	-13.21	54	27.8	27	18.33	32.34	380	234	A	V
	*	2440	97.56	-	-	84.69	26.8	18.45	32.38	380	234	P	V
	*	2440	96.93	-	-	84.06	26.8	18.45	32.38	380	234	A	V
		2483.76	50.54	-23.46	74	37.52	26.9	18.53	32.41	380	234	P	V
		2494.96	41.01	-12.99	54	27.93	26.95	18.55	32.42	380	234	A	V

<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.
---------------	---





2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 19 2440MHz		4880	45.31	-28.69	74	33.17	32.56	13.07	33.49	-	-	P	H	
		7320	50.73	-23.27	74	33.07	37.5	16.01	35.85	-	-	P	H	
		7320	40.67	-13.33	54	23.01	37.5	16.01	35.85	-	-	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4880	44.75	-29.25	74	32.61	32.56	13.07	33.49	-	-	P	V
			7320	50.61	-23.39	74	32.95	37.5	16.01	35.85	-	-	P	V
			7320	40.5	-13.5	54	22.84	37.5	16.01	35.85	-	-	A	V
														V
														V
														V
														V
														V
														V
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



Emission above 18GHz

2.4GHz BLE (SHF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BLE SHF		24636	32.87	-41.13	74	34.02	39.47	19.61	60.23	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			24937	33.04	-40.96	74	33.5	39.43	19.74	59.63	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BLE LF		34.32	24.18	-15.82	40	33.24	22.73	0.95	32.74	-	-	P	H	
		45.93	23.58	-16.42	40	38.28	16.86	1.16	32.72	-	-	P	H	
		84.81	23.93	-16.07	40	40.77	14.23	1.64	32.71	-	-	P	H	
		215.76	26.86	-16.64	43.5	42.07	14.85	2.61	32.67	-	-	P	H	
		226.83	27.92	-18.08	46	42.15	15.75	2.69	32.67	-	-	P	H	
		971.3	35.32	-18.68	54	30.02	30.85	5.63	31.18	-	-	P	H	
														H
														H
														H
														H
														H
														H
			32.97	32.6	-7.4	40	40.94	23.48	0.93	32.75	100	272	Q	V
			40.53	32.58	-7.42	40	44.53	19.72	1.07	32.74	100	211	Q	V
			46.2	31.4	-8.6	40	46.23	16.72	1.17	32.72	-	-	P	V
			58.89	28.07	-11.93	40	47.36	12.11	1.34	32.74	-	-	P	V
			84.81	28.56	-11.44	40	45.4	14.23	1.64	32.71	-	-	P	V
			955.2	35.69	-10.31	46	30.44	31.03	5.57	31.35	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	

**Remark**

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>Margin</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Margin (dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Margin (dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".



## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	BANK Lin, Ken Kuo and Lucifer Jiang	Temperature :	20~23°C
		Relative Humidity :	42~55%


### Note symbol

-L	Low channel location
-R	High channel location



### <Sample 1>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

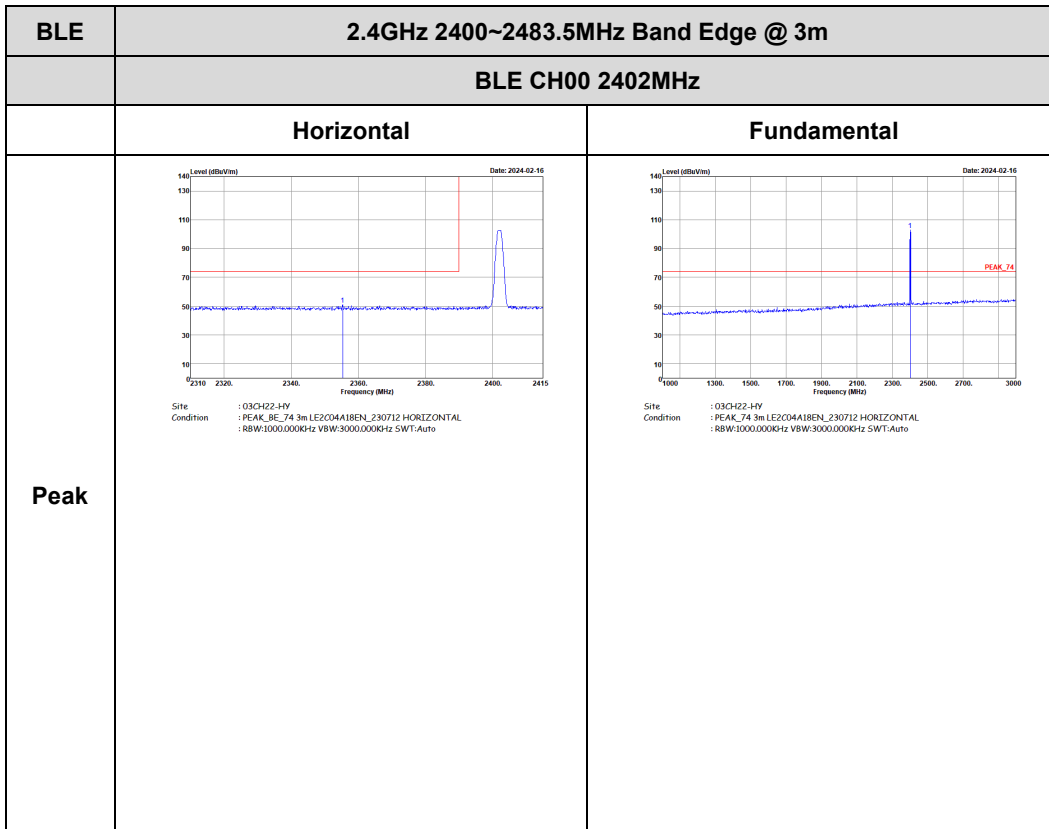

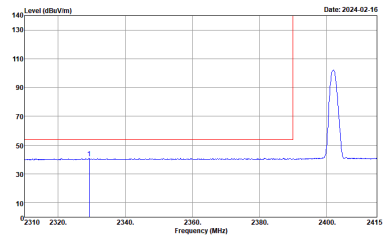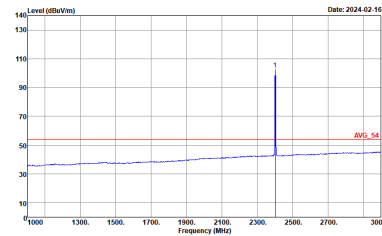





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Avg.	 <p>Site : 03CH22-HY Condition : AVG_54 3m LE2COM418ENL_230712 HORIZONTAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>	 <p>Site : 03CH22-HY Condition : AVG_54 3m LE2COM418ENL_230712 HORIZONTAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>

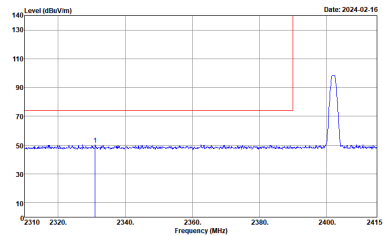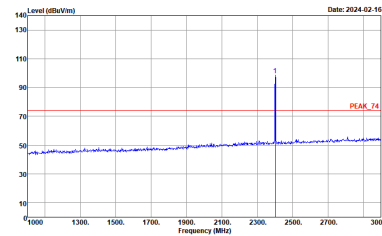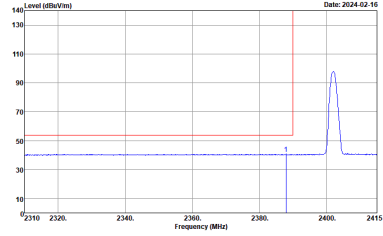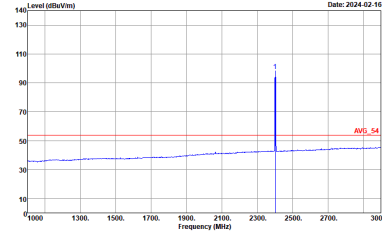



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
Vertical		Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2402 MHz. The y-axis ranges from 10 to 140 dBm/100kHz, and the x-axis ranges from 2310 to 2415 MHz. A red horizontal line is drawn at approximately 75 dBm/100kHz. The peak is labeled with a '1'.</p> <p>Site : 03CH22-HY Condition : PEAK_BE_74 3m LEZ004A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2402 MHz. The y-axis ranges from 10 to 140 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is drawn at approximately 75 dBm/100kHz. The peak is labeled 'PEAK_74'.</p> <p>Site : 03CH22-HY Condition : PEAK_74 3m LEZ004A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2402 MHz. The y-axis ranges from 10 to 140 dBm/100kHz, and the x-axis ranges from 2310 to 2415 MHz. A red horizontal line is drawn at approximately 75 dBm/100kHz. The peak is labeled with a '1'.</p> <p>Site : 03CH22-HY Condition : AV6_BE_54 3m LEZ004A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:2700KHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2402 MHz. The y-axis ranges from 10 to 140 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is drawn at approximately 55 dBm/100kHz. The peak is labeled 'AVG_54'.</p> <p>Site : 03CH22-HY Condition : AV6_54 3m LEZ004A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:2700KHz SWT:Auto</p>



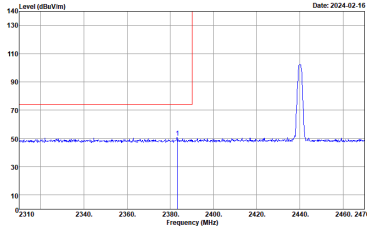
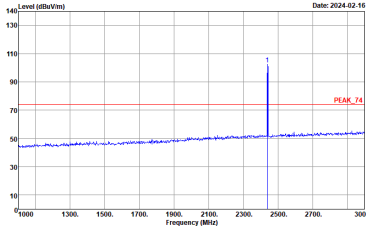
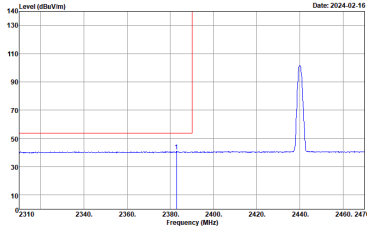
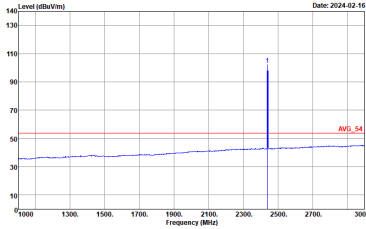


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH22-HY Condition : PEAK_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>	 <p>Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>

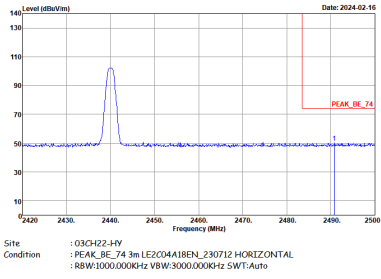
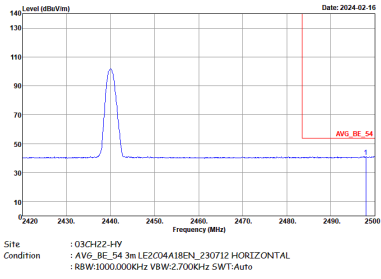


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Horizontal	Fundamental
<b>Peak</b>	 <p>Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
<b>Avg.</b>	 <p>Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 HORIZONTAL RBW:1000.000kHz VBW:2700kHz SWT:Auto</p>	Left blank

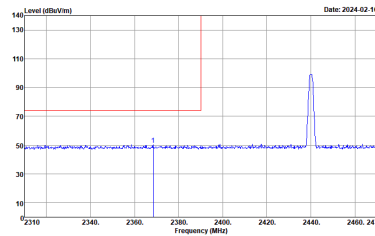
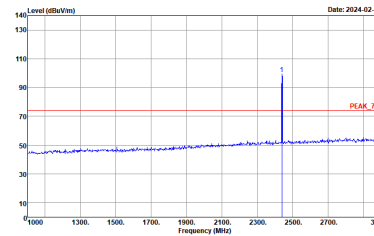
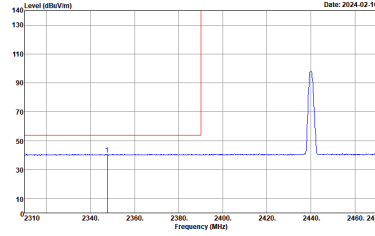
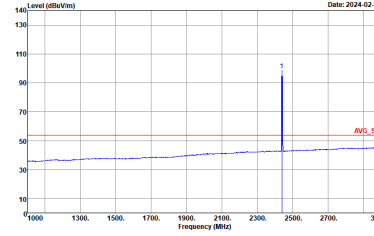


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
Vertical		Fundamental
Peak	 <p>Level (dBm/100Hz) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10 to 140 dBm/100Hz, and the x-axis ranges from 2310 to 2470 MHz. A red line indicates the peak level at approximately 100 dBm/100Hz.</p> <p>Site : 03CH22-HY            Condition : PEAK_BE_74 3m LEZ004A18EN_230712 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBm/100Hz) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10 to 140 dBm/100Hz, and the x-axis ranges from 1000 to 3000 MHz. A red line indicates the peak level at approximately 75 dBm/100Hz, labeled 'PEAK_74'.</p> <p>Site : 03CH22-HY            Condition : PEAK_74 3m LEZ004A18EN_230712 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100Hz) vs Frequency (MHz) plot showing an average level at 2440 MHz. The y-axis ranges from 10 to 140 dBm/100Hz, and the x-axis ranges from 2310 to 2470 MHz. A red line indicates the average level at approximately 50 dBm/100Hz.</p> <p>Site : 03CH22-HY            Condition : AV6_BE_54 3m LEZ004A18EN_230712 VERTICAL            : RBW:1000.000KHz VBW:2700KHz SWT:Auto</p>	 <p>Level (dBm/100Hz) vs Frequency (MHz) plot showing an average level at 2440 MHz. The y-axis ranges from 10 to 140 dBm/100Hz, and the x-axis ranges from 1000 to 3000 MHz. A red line indicates the average level at approximately 55 dBm/100Hz, labeled 'AVG_54'.</p> <p>Site : 03CH22-HY            Condition : AV6_54 3m LEZ004A18EN_230712 VERTICAL            : RBW:1000.000KHz VBW:2700KHz SWT:Auto</p>



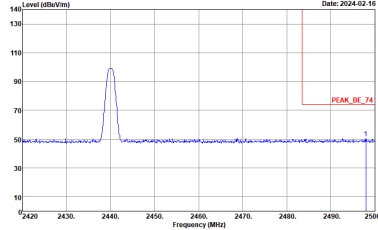
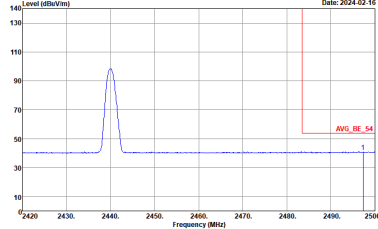


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
Peak	 <p>Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:2700kHz SWT:Auto</p>	Left blank

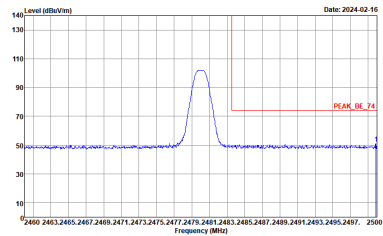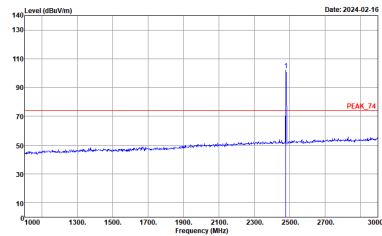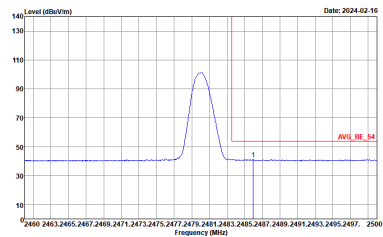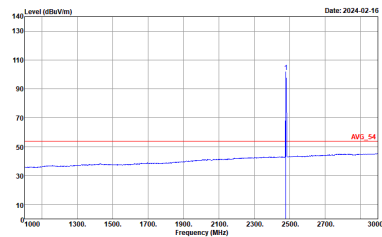

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH22-HY Condition : PEAK_BE_74 3m LEZ004A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH22-HY Condition : PEAK_74 3m LEZ004A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH22-HY Condition : AV6_BE_54 3m LEZ004A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>	 <p>Site : 03CH22-HY Condition : AV6_54 3m LEZ004A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>

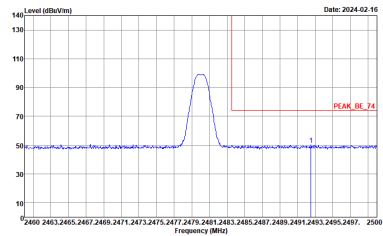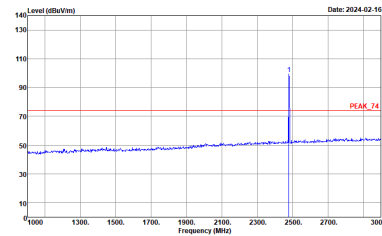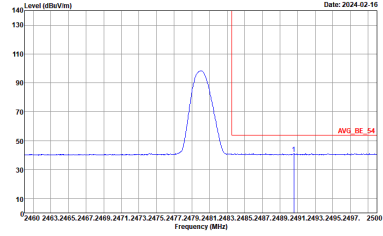
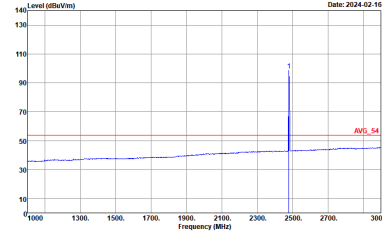


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. The plot includes a red line indicating the peak level and a blue line for the spectrum. The x-axis ranges from 2400 to 2500 MHz, and the y-axis ranges from 10 to 140 dBm/100kHz.</p> <p>Site : 03CH22-HY            Condition : PEAK_BE_74 3m LEZ004A18EN_230712 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. The plot includes a red line indicating the peak level and a blue line for the spectrum. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 10 to 140 dBm/100kHz.</p> <p>Site : 03CH22-HY            Condition : PEAK_74 3m LEZ004A18EN_230712 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average level at 2480 MHz. The average level is approximately 55 dBm/100kHz. The plot includes a red line indicating the average level and a blue line for the spectrum. The x-axis ranges from 2400 to 2500 MHz, and the y-axis ranges from 10 to 140 dBm/100kHz.</p> <p>Site : 03CH22-HY            Condition : AV6_BE_54 3m LEZ004A18EN_230712 VERTICAL            : RBW:1000.000KHz VBW:2700KHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average level at 2480 MHz. The average level is approximately 55 dBm/100kHz. The plot includes a red line indicating the average level and a blue line for the spectrum. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 10 to 140 dBm/100kHz.</p> <p>Site : 03CH22-HY            Condition : AV6_54 3m LEZ004A18EN_230712 VERTICAL            : RBW:1000.000KHz VBW:2700KHz SWT:Auto</p>





2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

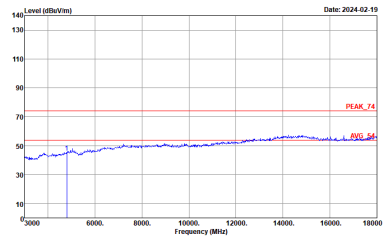
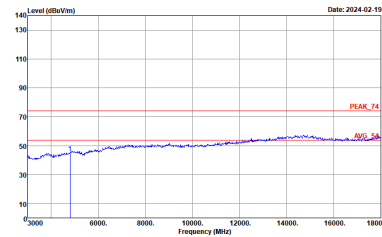
BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH22-1HY Condition : PEAK_74 3m LE2C04A18EN_230712 HORIZONTAL</p>	 <p>Site : 03CH22-1HY Condition : PEAK_74 3m LE2C04A18EN_230712 VERTICAL</p>

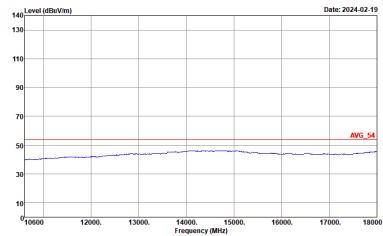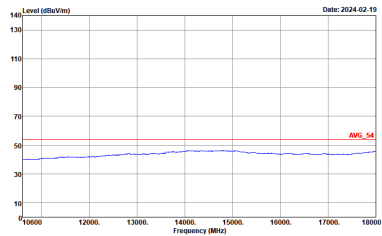



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
10.6G ~18G Avg.	 <p>Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 HORIZONTAL :</p>	 <p>Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 VERTICAL :</p>



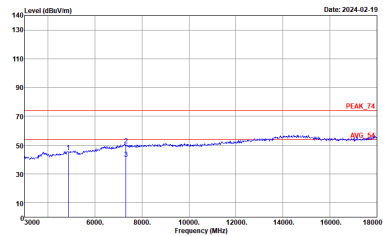
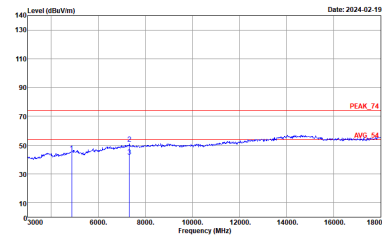


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH22-HY Condition : PEAK_74 3m LE2004A18EN_230712 HORIZONTAL</p>	 <p>Site : 03CH22-HY Condition : PEAK_74 3m LE2004A18EN_230712 VERTICAL</p>

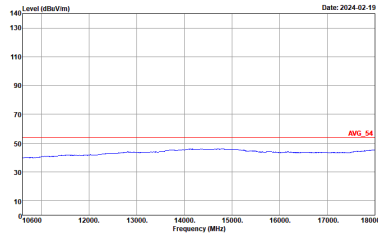
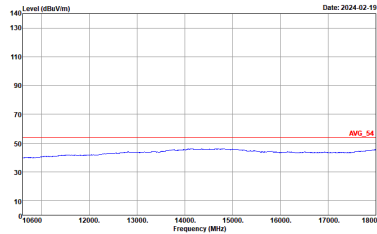


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
	Horizontal	Vertical
<p>10.6G ~18G Avg.</p>	<p data-bbox="432 450 810 470">Date: 2024-02-19</p>  <p data-bbox="432 685 707 719">Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 HORIZONTAL</p>	<p data-bbox="906 450 1284 470">Date: 2024-02-19</p>  <p data-bbox="906 685 1165 719">Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 VERTICAL</p>

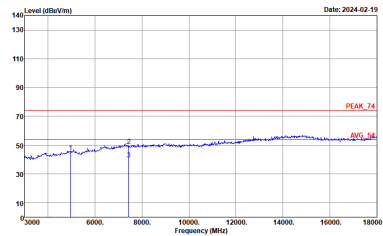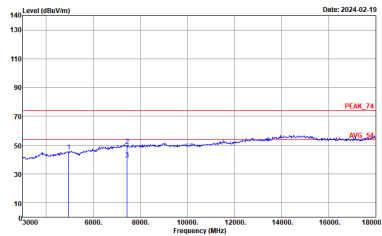

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
<b>Peak</b>	 <p>Site : 03CH22-HY Condition : PEAK_74 3m LE2004A18EN_230712 HORIZONTAL</p>	 <p>Site : 03CH22-HY Condition : PEAK_74 3m LE2004A18EN_230712 VERTICAL</p>

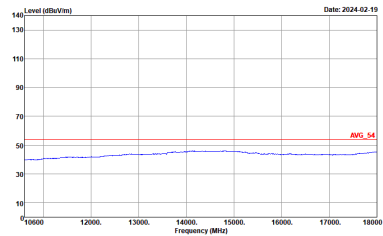
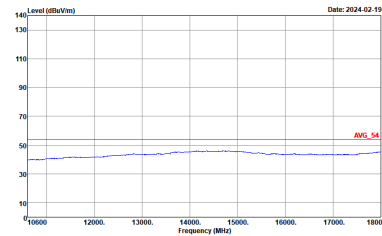


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
	Horizontal	Vertical
<p>10.6G ~18G Avg.</p>	 <p>Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 HORIZONTAL</p>	 <p>Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 VERTICAL</p>



Emission above 18GHz



2.4GHz BLE (SHF @ 1m)
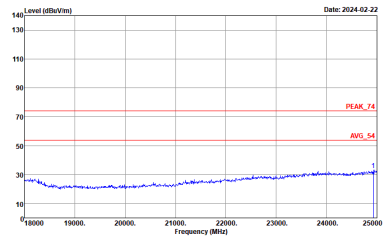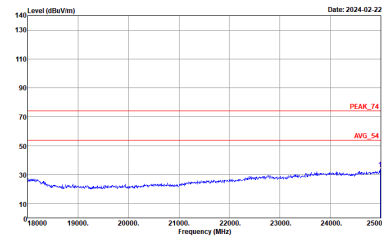
<b>BLE</b>	<b>2.4GHz 2400~2483.5MHz</b>	
	<b>BLE SHF</b>	
	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak Avg.</b>	 <p>Site : 03CH22-1HY Condition : PEAK_74 1m SHF_1223_230710 HORIZONTAL</p>	 <p>Site : 03CH22-1HY Condition : PEAK_74 1m SHF_1223_230710 VERTICAL</p>



Emission below 1GHz

2.4GHz BLE (LF)



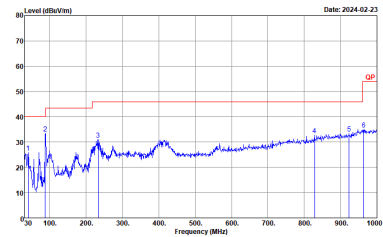
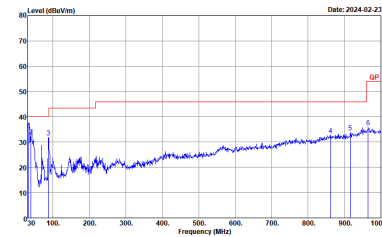
<b>BLE</b>	<b>2.4GHz 2400~2483.5MHz</b>	
	<b>BLE LF</b>	
	<b>Horizontal</b>	<b>Vertical</b>
<b>QP / Peak</b>	 <p>Site : 03CH22-1HY Condition : QP 3m BIL0663304_231015_16 HORIZONTAL</p>	 <p>Site : 03CH22-1HY Condition : QP 3m BIL0663304_231015_16 VERTICAL</p>





<Sample 2>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

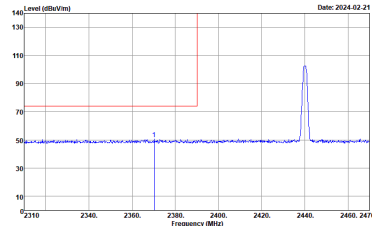
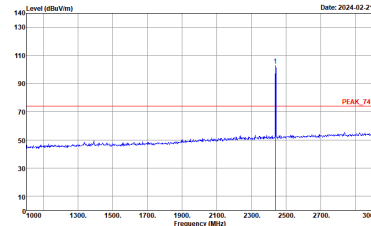
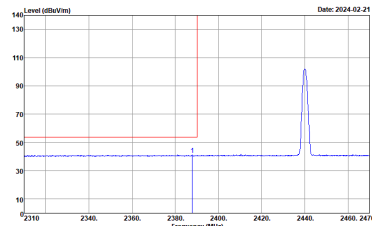
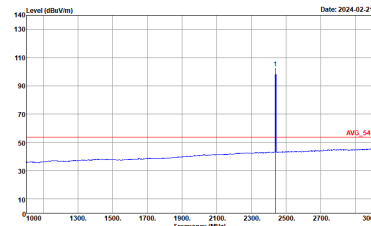
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH22-HY Condition : PEAK_BE_74 3m LEZ04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH22-HY Condition : PEAK_74 3m LEZ04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH22-HY Condition : AVG_BE_54 3m LEZ04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>	 <p>Site : 03CH22-HY Condition : AVG_54 3m LEZ04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>

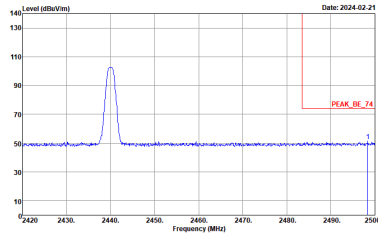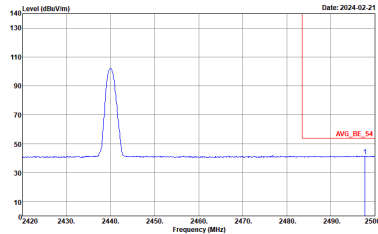



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
Horizontal		Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH22-HY            Condition : PEAK_BE_74 3m LE2C04A18EN_230712 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Site : 03CH22-HY            Condition : AVG_BE_54 3m LE2C04A18EN_230712 HORIZONTAL            : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>	<p>Left blank</p>



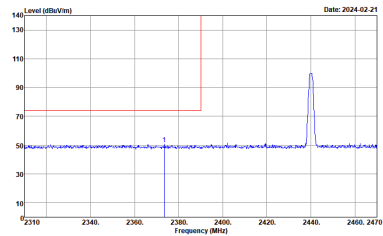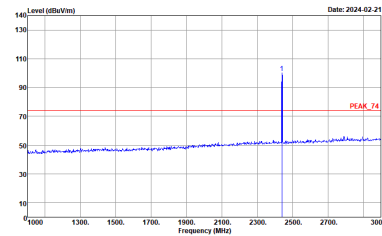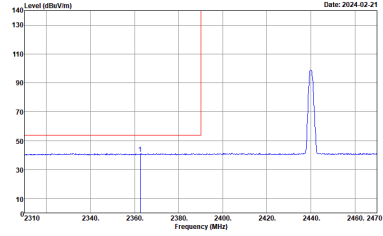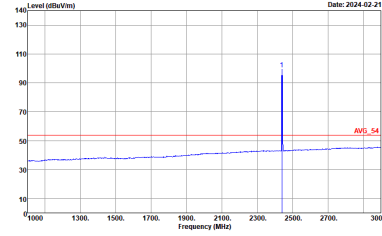

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
Vertical		Fundamental
Peak	 <p>Site : 03CH22-HY Condition : PEAK_BE_74 3m LEZ004A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH22-HY Condition : PEAK_74 3m LEZ004A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH22-HY Condition : AV6_BE_54 3m LEZ004A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:2700KHz SWT:Auto</p>	 <p>Site : 03CH22-HY Condition : AV6_54 3m LEZ004A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:2700KHz SWT:Auto</p>

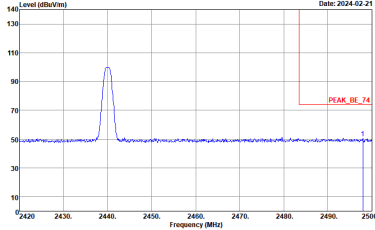
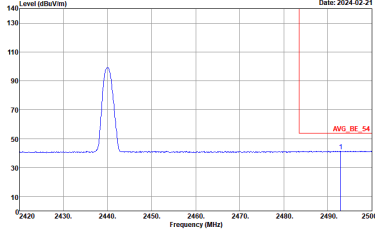


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
Vertical		Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:2700kHz SWT:Auto</p>	<p>Left blank</p>





2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

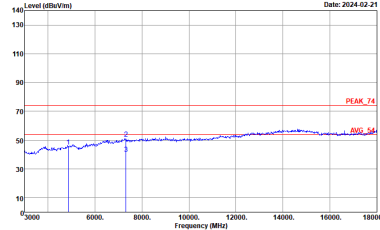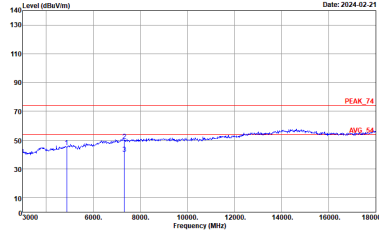BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH22-4Y Condition : PEAK_74 3m LE2C04A18EN_230712 HORIZONTAL</p>	 <p>Site : 03CH22-4Y Condition : PEAK_74 3m LE2C04A18EN_230712 VERTICAL</p>

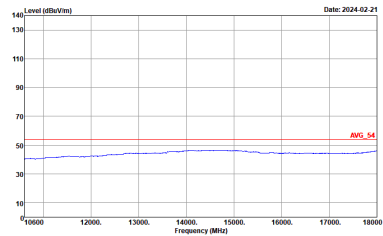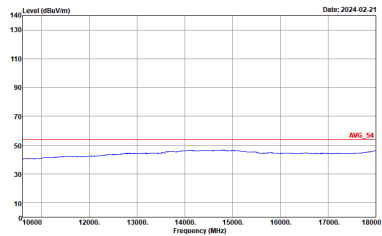

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
	Horizontal	Vertical
<p>10.6G ~18G Avg.</p>	 <p>Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 HORIZONTAL :</p>	 <p>Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 VERTICAL :</p>



Emission above 18GHz



2.4GHz BLE (SHF @ 1m)

BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH22-HY Condition : PEAK_74 1m SHF_1223_230710 HORIZONTAL</p>	<p>Site : 03CH22-HY Condition : PEAK_74 1m SHF_1223_230710 VERTICAL</p>



Emission below 1GHz

2.4GHz BLE (LF)



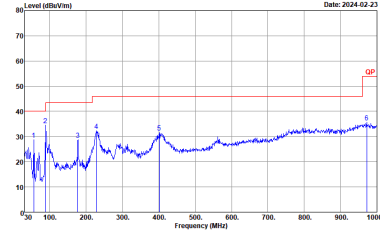
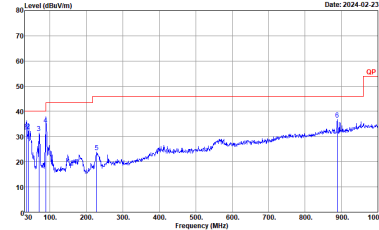
BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH22-HY Condition : QP 3m B1LO663304_Z31015_30 HORIZONTAL</p>	 <p>Site : 03CH22-HY Condition : QP 3m B1LO663304_Z31015_30 VERTICAL</p>





<Sample 3>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

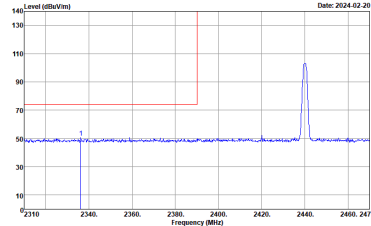
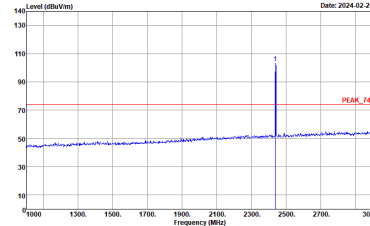
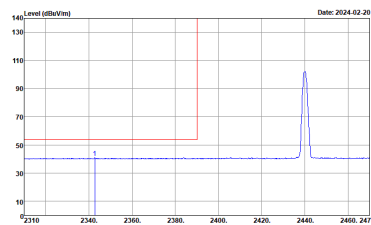
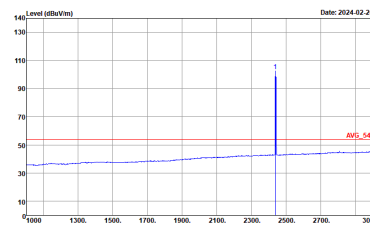
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH22-HY Condition : PEAK_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:2700KHz SWT:Auto</p>	 <p>Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:2700KHz SWT:Auto</p>

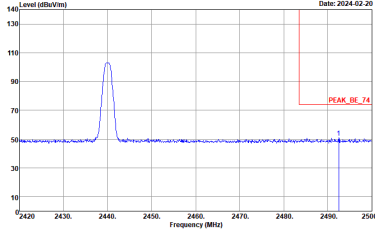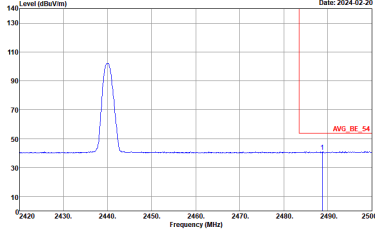

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
Horizontal		Fundamental
Peak	 <p>Site : 03CH22-HY            Condition : PEAK_BE_74 3m LE2C04A18EN_230712 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH22-HY            Condition : AVG_BE_54 3m LE2C04A18EN_230712 HORIZONTAL            : RBW:1000.000kHz VBW:2700kHz SWT:Auto</p>	Left blank



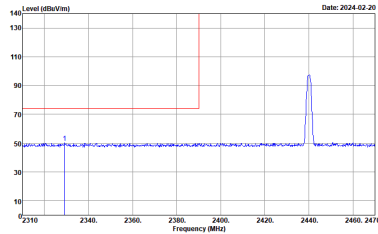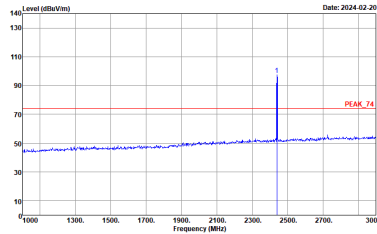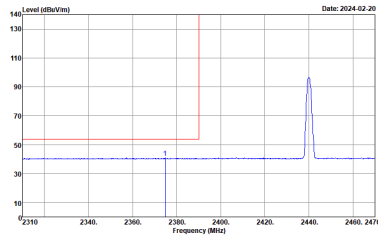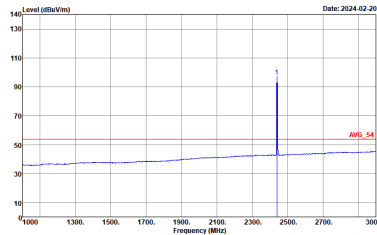

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
Vertical		Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10 to 140 dBm/100kHz, and the x-axis ranges from 2310 to 2470 MHz. A red vertical line marks the peak at 2440 MHz.</p> <p>Site : 03CH22-HY            Condition : PEAK_BE_74 3m LEZ004A18EN_230712 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10 to 140 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line marks the peak at 2440 MHz, labeled 'PEAK_74'.</p> <p>Site : 03CH22-HY            Condition : PEAK_74 3m LEZ004A18EN_230712 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing the average spectrum. The y-axis ranges from 10 to 140 dBm/100kHz, and the x-axis ranges from 2310 to 2470 MHz. A red vertical line marks the peak at 2440 MHz.</p> <p>Site : 03CH22-HY            Condition : AV6_BE_54 3m LEZ004A18EN_230712 VERTICAL            : RBW:1000.000KHz VBW:2700KHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing the average spectrum. The y-axis ranges from 10 to 140 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line marks the peak at 2440 MHz, labeled 'AVG_54'.</p> <p>Site : 03CH22-HY            Condition : AV6_54 3m LEZ004A18EN_230712 VERTICAL            : RBW:1000.000KHz VBW:2700KHz SWT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	<p>Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 VERTICAL RBW:1000.000kHz VBW:2700kHz SWT:Auto</p>	Left blank



2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH22-HY Condition : PEAK_74 3m LE2004A18EN_230712 HORIZONTAL :</p>	<p>Site : 03CH22-HY Condition : PEAK_74 3m LE2004A18EN_230712 VERTICAL :</p>

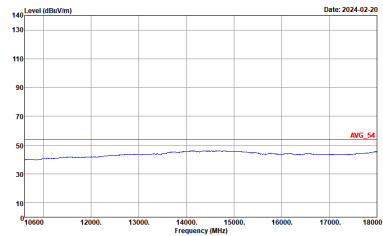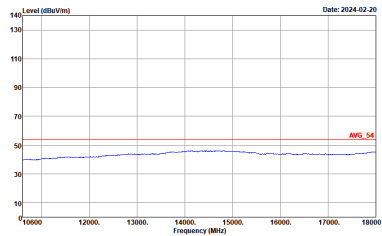

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
Horizontal		Vertical
<b>10.6G</b> <b>~18G</b> <b>Avg.</b>	 <p>Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 HORIZONTAL :</p>	 <p>Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 VERTICAL :</p>



Emission above 18GHz  
2.4GHz BLE (SHF @ 1m)

BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH22-1HY Condition : PEAK_74 1m SHF_1223_230710 HORIZONTAL</p>	<p>Site : 03CH22-1HY Condition : PEAK_74 1m SHF_1223_230710 VERTICAL</p>



Emission below 1GHz

2.4GHz BLE (LF)


BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CH22-1HY Condition : QP 3m BIL0663304_231015_30 HORIZONTAL</p>	<p>Site : 03CH22-1HY Condition : QP 3m BIL0663304_231015_30 VERTICAL</p>



## Appendix E. Duty Cycle Plots


### <Sample 1>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	61.05	382	2.62	2.7kHz

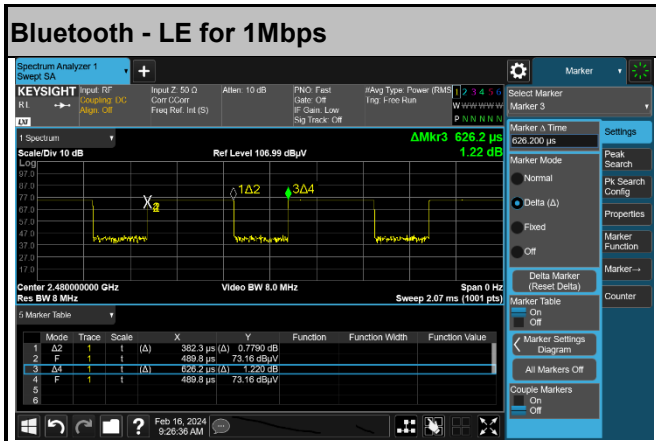

### <Sample 2>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	60.90	380	2.63	2.7kHz

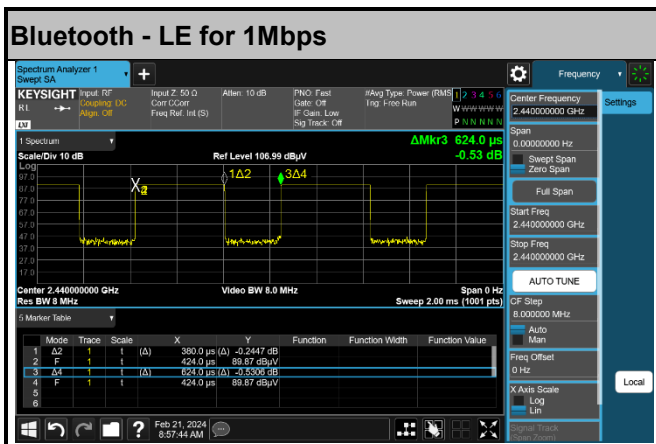



<Sample 3>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	61.02	382	2.62	2.7kHz

