



# FCC RADIO TEST REPORT

**FCC ID** : HLZA24005  
**Equipment** : Tablet PC  
**Brand Name** : acer  
**Model Name** : A24005  
**Marketing Name** : Acer Iconia V11, V11-11  
**Applicant** : Acer Incorporated  
8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C)  
**Manufacturer** : Acer Incorporated  
8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C)  
**Standard** : FCC Part 15 Subpart C §15.247

The product was received on Jul. 17, 2024 and testing was performed from Jul. 29, 2024 to Aug. 19, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	8
1.3 Testing Location .....	8
1.4 Applicable Standards.....	8
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>9</b>
2.1 Carrier Frequency and Channel .....	9
2.2 Test Mode.....	10
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system .....	11
2.5 EUT Operation Test Setup .....	11
2.6 Measurement Results Explanation Example.....	11
<b>3 Test Result .....</b>	<b>12</b>
3.1 6dB and 99% Bandwidth Measurement .....	12
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement .....	14
3.4 Conducted Band Edges and Spurious Emission Measurement .....	16
3.5 Radiated Band Edges and Spurious Emission Measurement .....	17
3.6 AC Conducted Emission Measurement.....	21
3.7 Antenna Requirements .....	23
<b>4 List of Measuring Equipment.....</b>	<b>24</b>
<b>5 Measurement Uncertainty .....</b>	<b>26</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission Test Data</b>	
<b>Appendix D. Duty Cycle Plots</b>	
<b>Appendix E. Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issue Date
FR471715C	01	Initial issue of report	Sep. 09, 2024
FR471715C	02	Revise Appendix C. This report is an updated version, replacing the report issued on Sep. 09, 2024	Sep. 13, 2024



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	2.12 dB under the limit at 4874.00 MHz
3.6	15.207	AC Conducted Emission	Pass	15.28 dB under the limit at 0.50 MHz
3.7	15.203	Antenna Requirement	Pass	-

**Conformity Assessment Condition:**

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Keven Cheng**  
**Report Producer: Ming Chen**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature		
<b>General Specs</b> Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, Wi-Fi 5GHz 802.11a/n/ac and GNSS.		
<b>Antenna Type</b> WLAN: FPC Antenna Bluetooth: FPC Antenna GPS / Glonass / BDS / Galileo: FPC Antenna		

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	0.28

**Remark:** The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.



SKU List		
Model	SKU1 (6+128GB)	SKU2 (6+128GB) Second source
<b>CPU</b>	G80 (MT8786) WiFi only	G80 (MT8786) WiFi only
<b>PCB</b>	Wuzhu	Wuzhu
<b>PCB 2</b>	Kingshine	Kingshine
<b>LCM</b>	K&D KD110N09-51II-A002	K&D KD110N09-51II-A002
<b>LCM 2</b>	STARRY 2082109QFH036011-50G	STARRY 2082109QFH036011-50G
<b>Memory</b>	Longsys MLXC4006G 6GB LPDDR4X	CXMT CXDBCCCDM-MK-M
<b>eMMC</b>	Longsys FEMDNN128G 128GB	UDStore UEMDGS63S0 128GB
<b>Battery</b>	UTL\Battery\Li-polymer\Pack\MG1011\U3189 91PV-2P\8000mAh_30.4Wh\3.8V\177*93*3.2 5mm\Connector 51146-5P\ACER	UTL\Battery\Li-polymer\Pack\MG1011\U3189 91PV-2P\8000mAh_30.4Wh\3.8V\177*93*3.2 5mm\Connector 51146-5P\ACER
<b>Wifi / Bluetooth</b>	MT6631N/A, 802.11 a/b/g/n/ac WIFI (2.4G+5G)	MT6631N/A, 802.11 a/b/g/n/ac WIFI (2.4G+5G)
<b>GPS</b>	MT6631N/A, GPS BEIDOU, GLONASS, Galileo	MT6631N/A, GPS BEIDOU, GLONASS, Galileo
<b>Front Camera</b>	Zhuocheng ZE2140-MG1011_F-V1.0	Zhuocheng ZE2140-MG1011_F-V1.0
<b>Rear Camera</b>	Zhuocheng ZE2142-MG1011_B-V1.0 (8856)	Zhuocheng ZE2142-MG1011_B-V1.0 (8856)
<b>Speaker-R</b>	Ming Tai Dian Sheng S-1712C-8A-MG1011-R-BOX	Ming Tai Dian Sheng S-1712C-8A-MG1011-R-BOX
<b>Speaker-L</b>	Ming Tai Dian Sheng S-1712C-8A-MG1011-L-BOX	Ming Tai Dian Sheng S-1712C-8A-MG1011-L-BOX
<b>Wifi Antenna</b>	Sward ST1821A-1B2-A	Sward ST1821A-1B2-A
<b>GPS Antenna</b>	Sward ST1821A-1B2-A	Sward ST1821A-1B2-A
<b>Adapter 1</b>	Aoda A829-120167C-AR1 A829-120167C-US1 A829-120167C-EU1 A829-120167C-TL1 A829-120167C-UK1	Aoda A829-120167C-AR1 A829-120167C-US1 A829-120167C-EU1 A829-120167C-TL1 A829-120167C-UK1
<b>Adapter 2</b>	TEKA TEKA-SCC20EU TEKA-SCC20BS TEKA-SCC20US TEKA-SCC20AR	TEKA TEKA-SCC20EU TEKA-SCC20BS TEKA-SCC20US TEKA-SCC20AR



SKU List		
Model	SKU3 (6+256GB)	SKU4 (6+256GB) Second source
<b>CPU</b>	G80 (MT8786) WiFi only	G80 (MT8786) WiFi only
<b>PCB</b>	Wuzhu	Wuzhu
<b>PCB 2</b>	Kingshine	Kingshine
<b>LCM</b>	K&D KD110N09-51II-A002	K&D KD110N09-51II-A002
<b>LCM 2</b>	STARRY 2082109QFH036011-50G	STARRY 2082109QFH036011-50G
<b>Memory</b>	Longsys MLXC4006G 6GB LPDDR4X	CXMT CXDBCCCDM-MK-M
<b>eMMC</b>	Longsys FEMDNN256G 256GB	Shichuangyi (SCY) E256CSAG4ABE00 256GB
<b>Battery</b>	UTL\Battery\Li-polymer\Pack\MG1011\U318991PV-2P\8000mAh_30.4Wh\3.8V\177*93*3.25mm\Connector 51146-5P\ACER	UTL\Battery\Li-polymer\Pack\MG1011\U318991PV-2P\8000mAh_30.4Wh\3.8V\177*93*3.25mm\Connector 51146-5P\ACER
<b>Wifi / Bluetooth</b>	MT6631N/A, 802.11 a/b/g/n/ac WIFI (2.4G+5G)	MT6631N/A, 802.11 a/b/g/n/ac WIFI (2.4G+5G)
<b>GPS</b>	MT6631N/A, GPS BEIDOU, GLONASS, Galileo	MT6631N/A, GPS BEIDOU, GLONASS, Galileo
<b>Front Camera</b>	Zhuocheng ZE2140-MG1011_F-V1.0	Zhuocheng ZE2140-MG1011_F-V1.0
<b>Rear Camera</b>	Zhuocheng ZE2142-MG1011_B-V1.0 (8856)	Zhuocheng ZE2142-MG1011_B-V1.0 (8856)
<b>Speaker-R</b>	Ming Tai Dian Sheng S-1712C-8A-MG1011-R-BOX	Ming Tai Dian Sheng S-1712C-8A-MG1011-R-BOX
<b>Speaker-L</b>	Ming Tai Dian Sheng S-1712C-8A-MG1011-L-BOX	Ming Tai Dian Sheng S-1712C-8A-MG1011-L-BOX
<b>Wifi Antenna</b>	Sward ST1821A-1B2-A	Sward ST1821A-1B2-A
<b>GPS Antenna</b>	Sward ST1821A-1B2-A	Sward ST1821A-1B2-A
<b>Adapter 1</b>	Aoda A829-120167C-AR1 A829-120167C-US1 A829-120167C-EU1 A829-120167C-TL1 A829-120167C-UK1	Aoda A829-120167C-AR1 A829-120167C-US1 A829-120167C-EU1 A829-120167C-TL1 A829-120167C-UK1
<b>Adapter 2</b>	TEKA TEKA-SCC20EU TEKA-SCC20BS TEKA-SCC20US TEKA-SCC20AR	TEKA TEKA-SCC20EU TEKA-SCC20BS TEKA-SCC20US TEKA-SCC20AR



### 1.2 Modification of EUT

No modifications made to the EUT during the testing.

### 1.3 Testing Location

<b>Test Site</b>	Sporton International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010 TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b> TH05-HY, CO07-HY, 03CH11-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

### 1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.





## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
  
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

## 2.2 Test Mode


The power for 802.11ac VHT20 and VHT40 mode is smaller than 802.11n mode, so all other conducted and radiated test is covered by 802.11n mode.

The final test modes include the worst data rates for each modulation shown in the table below.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0

Test Cases	
<b>AC Conducted Emission</b>	Mode 1 :Bluetooth Link + WLAN (2.4GHz) Link + Battery + USB Cable (Charging form AC Adapter 2) for SKU3 (6+256GB)
<b>Remark:</b> For Radiated Test Cases, the tests were performed with Adapter 2 and SKU3 (6+256GB).	

## 2.3 Connection Diagram of Test System

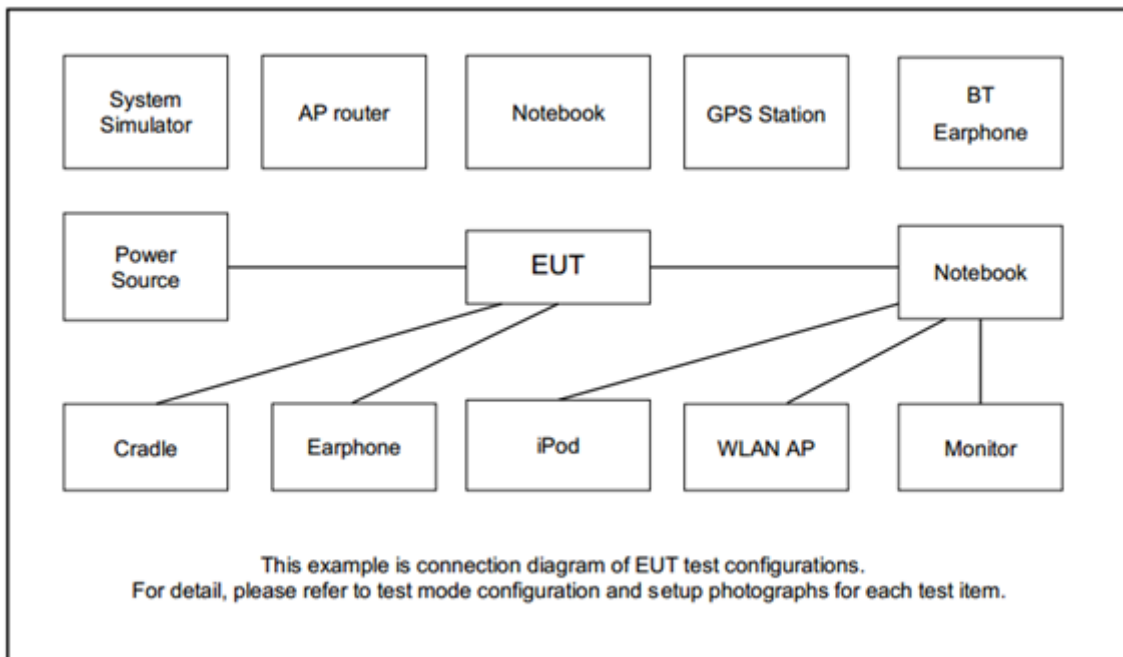



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Earphone + Mic	Samsung	Ecouteur	N/A	Unshielded 1.8m	N/A
5.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

## 2.5 EUT Operation Test Setup

The RF test items, make the EUT (FW: 2023-12-15-160559) get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup



##### 3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

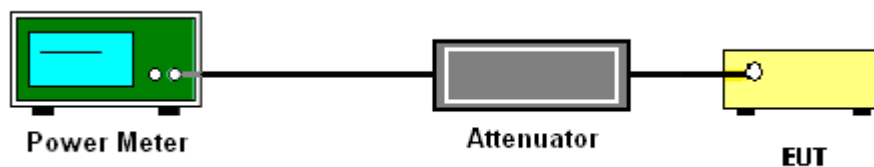

### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.



### **3.3 Power Spectral Density Measurement**

#### **3.3.1 Limit of Power Spectral Density**

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


#### **3.3.2 Measuring Instruments**

Please refer to the measuring equipment list in this test report.

#### **3.3.3 Test Procedures**

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

### 3.3.4 Test Setup

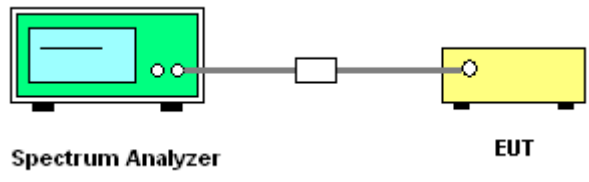

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

### 3.4 Conducted Band Edges and Spurious Emission Measurement

#### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


#### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### 3.4.4 Test Setup

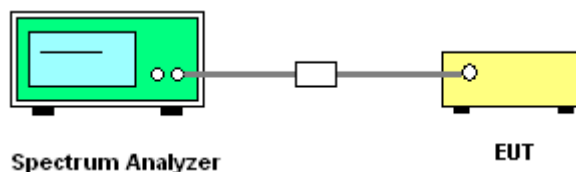

#### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.





### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


#### 3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.


7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW = 3 MHz for  $f \geq 1$  GHz for peak measurement.For average measurement:
  - VBW = 10 Hz, when duty cycle is no less than 98 percent.
  - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

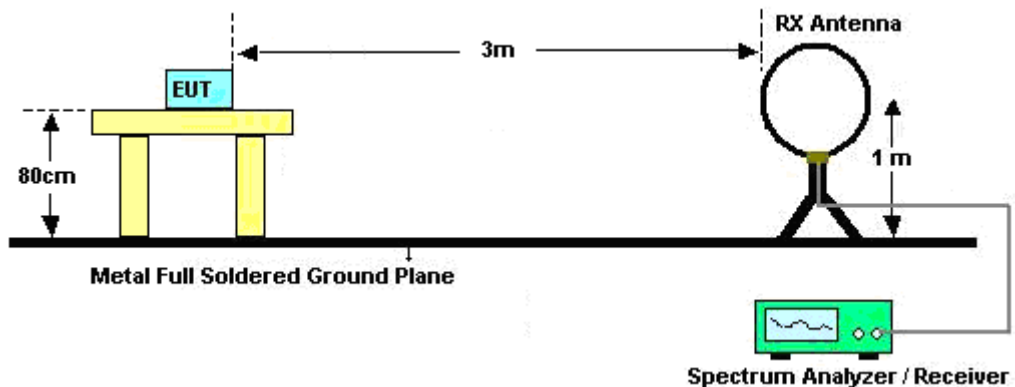


For radiated emissions from 30MHz to 1GHz

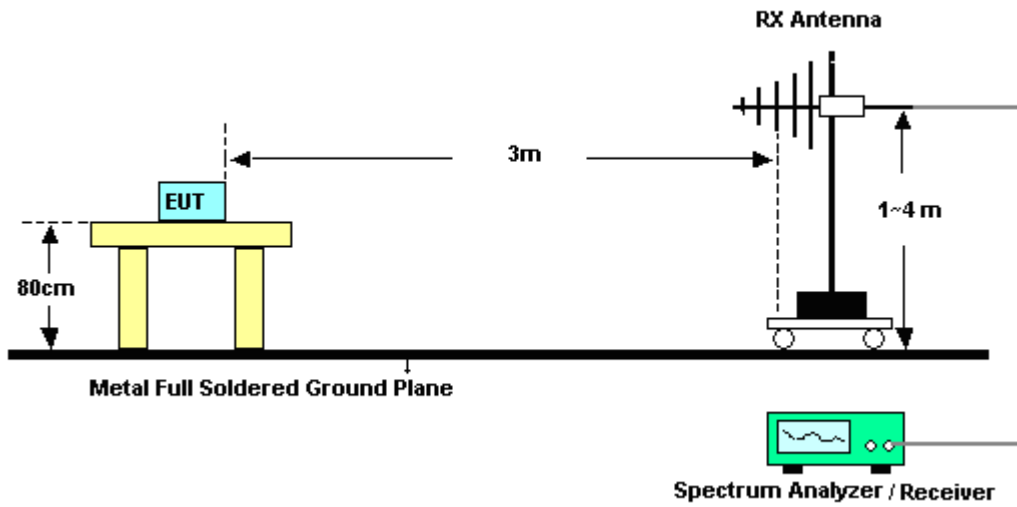

For radiated test from 1GHz to 18GHz

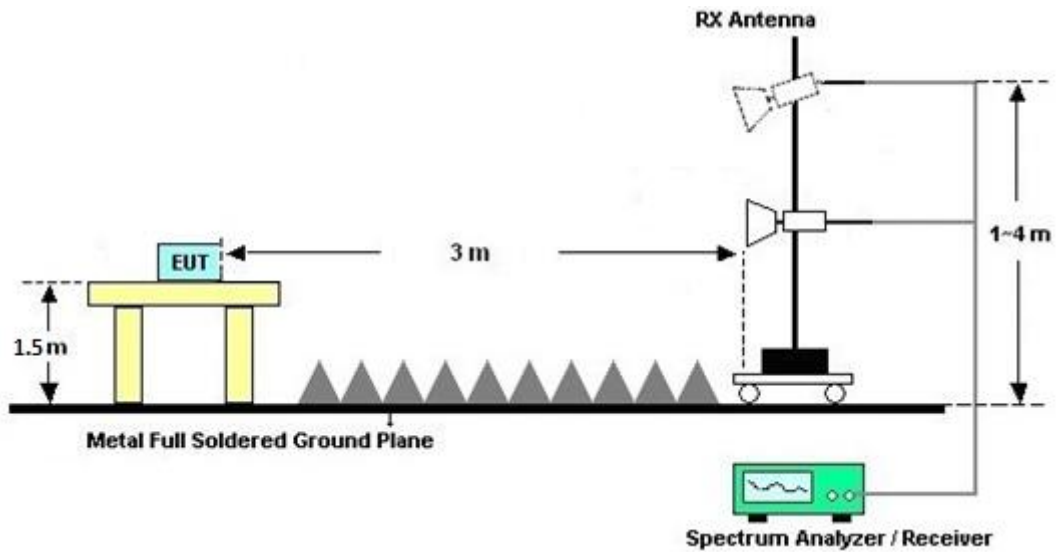

For radiated test above 18GHz

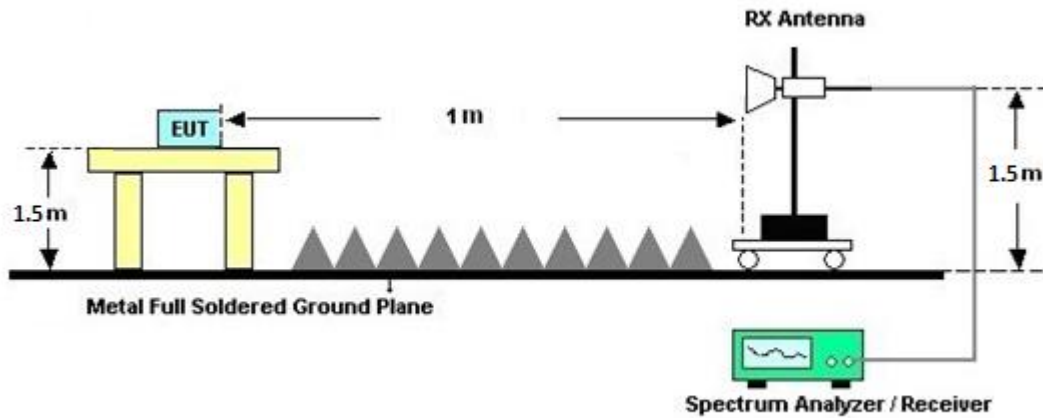

### 3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

### 3.5.7 Duty Cycle

Please refer to Appendix D.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix C.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.6.4 Test Setup



### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### **3.7.2 Antenna Anti-Replacement Construction**

Antenna permanently attached.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 07, 2023	Aug. 06, 2024~ Aug. 15, 2024	Oct. 06, 2024	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 12, 2023	Aug. 06, 2024~ Aug. 15, 2024	Sep. 11, 2024	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-01620	1GHz~18GHz	Aug. 17, 2023	Aug. 06, 2024~ Aug. 15, 2024	Aug. 16, 2024	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	00993	18GHz~40GHz	Nov. 24, 2023	Aug. 06, 2024~ Aug. 15, 2024	Nov. 23, 2024	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 08, 2023	Aug. 06, 2024~ Aug. 15, 2024	Dec. 07, 2024	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 25, 2024	Aug. 06, 2024~ Aug. 15, 2024	Mar. 24, 2025	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-303	1710001800055007	1GHz~18GHz	Jun. 13, 2024	Aug. 06, 2024~ Aug. 15, 2024	Jun. 12, 2025	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 07, 2023	Aug. 06, 2024~ Aug. 15, 2024	Dec. 06, 2024	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 05, 2023	Aug. 06, 2024~ Aug. 15, 2024	Oct. 04, 2024	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	20MHz~8.4GHz	Oct. 06, 2023	Aug. 06, 2024~ Aug. 15, 2024	Oct. 05, 2024	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Aug. 06, 2024~ Aug. 15, 2024	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Aug. 06, 2024~ Aug. 15, 2024	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Aug. 06, 2024~ Aug. 15, 2024	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Aug. 06, 2024~ Aug. 15, 2024	N/A	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP140325	N/A	Dec. 08, 2023	Aug. 06, 2024~ Aug. 15, 2024	Dec. 07, 2024	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804013/2	30M~40G	May 23, 2024	Aug. 06, 2024~ Aug. 15, 2024	May 22, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 06, 2024	Aug. 06, 2024~ Aug. 15, 2024	Mar. 05, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 06, 2024	Aug. 06, 2024~ Aug. 15, 2024	Mar. 05, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 06, 2024	Aug. 06, 2024~ Aug. 15, 2024	Mar. 05, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN3	3GHz High Pass Filter	Sep. 11, 2023	Aug. 06, 2024~ Aug. 15, 2024	Sep. 10, 2024	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1.53GHz Low Pass Filter	Sep. 11, 2023	Aug. 06, 2024~ Aug. 15, 2024	Sep. 10, 2024	Radiation (03CH11-HY)
Attenuator	HONOVA	5910 SMA-50-005	0028	N/A	Jul. 09, 2024	Aug. 06, 2024~ Aug. 15, 2024	Jul. 08, 2025	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Jul. 29, 2024~ Aug. 19, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	15I00041SNO10 (NO:248)	10MHz~6GHz	Jan. 10, 2024	Jul. 29, 2024~ Aug. 19, 2024	Jan. 09, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2023	Jul. 29, 2024~ Aug. 19, 2024	Aug. 22, 2024	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Jul. 29, 2024~ Aug. 19, 2024	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Jul. 29, 2024~ Aug. 19, 2024	N/A	Conducted (TH05-HY)





Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Aug. 02, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Aug. 02, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2023	Aug. 02, 2024	Oct. 19, 2024	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Aug. 02, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Aug. 02, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Aug. 02, 2024	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 20, 2023	Aug. 02, 2024	Sep. 19, 2024	Conduction (CO07-HY)



## 5 Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.44 dB
---	---------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.10 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.30 dB
---	---------

### Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.30 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.30 dB
---	---------

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Hank Hsu	Temperature:	21~25	°C
Test Date:	2024/7/29~8/19	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant2	Ant1	Ant2		
11b	1Mbps	1	1	2412	12.85	-	8.06	-	0.50	Pass
11b	1Mbps	1	6	2437	12.96	-	8.04	-	0.50	Pass
11b	1Mbps	1	11	2462	12.90	-	8.51	-	0.50	Pass
11g	6Mbps	1	1	2412	16.73	-	15.66	-	0.50	Pass
11g	6Mbps	1	6	2437	16.80	-	15.67	-	0.50	Pass
11g	6Mbps	1	11	2462	16.74	-	15.46	-	0.50	Pass
HT20	MCS0	1	1	2412	17.75	-	16.29	-	0.50	Pass
HT20	MCS0	1	6	2437	17.78	-	16.32	-	0.50	Pass
HT20	MCS0	1	11	2462	17.78	-	16.31	-	0.50	Pass
HT40	MCS0	1	3	2422	35.71	-	27.53	-	0.50	Pass
HT40	MCS0	1	6	2437	36.59	-	35.25	-	0.50	Pass
HT40	MCS0	1	9	2452	36.98	-	35.47	-	0.50	Pass

**TEST RESULTS DATA**  
**Average Output Power**

2.4GHz Band Single Antenna																
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	11.60	-		30.00	-	0.28	-	11.88	-	36.00	-	Pass
11b	1Mbps	1	6	2437	11.40	-		30.00	-	0.28	-	11.68	-	36.00	-	Pass
11b	1Mbps	1	11	2462	11.30	-		30.00	-	0.28	-	11.58	-	36.00	-	Pass
11g	6Mbps	1	1	2412	11.20	-		30.00	-	0.28	-	11.48	-	36.00	-	Pass
11g	6Mbps	1	6	2437	11.40	-		30.00	-	0.28	-	11.68	-	36.00	-	Pass
11g	6Mbps	1	11	2462	11.30	-		30.00	-	0.28	-	11.58	-	36.00	-	Pass
HT20	MCS0	1	1	2412	11.10	-		30.00	-	0.28	-	11.38	-	36.00	-	Pass
HT20	MCS0	1	6	2437	11.20	-		30.00	-	0.28	-	11.48	-	36.00	-	Pass
HT20	MCS0	1	11	2462	11.20	-		30.00	-	0.28	-	11.48	-	36.00	-	Pass
HT40	MCS0	1	3	2422	11.50	-		30.00	-	0.28	-	11.78	-	36.00	-	Pass
HT40	MCS0	1	6	2437	11.50	-		30.00	-	0.28	-	11.78	-	36.00	-	Pass
HT40	MCS0	1	9	2452	11.40	-		30.00	-	0.28	-	11.68	-	36.00	-	Pass
VHT20	MCS0	1	1	2412	11.00	-		30.00	-	0.28	-	11.28	-	36.00	-	Pass
VHT20	MCS0	1	6	2437	11.10	-		30.00	-	0.28	-	11.38	-	36.00	-	Pass
VHT20	MCS0	1	11	2462	11.10	-		30.00	-	0.28	-	11.38	-	36.00	-	Pass
VHT40	MCS0	1	3	2422	11.40	-		30.00	-	0.28	-	11.68	-	36.00	-	Pass
VHT40	MCS0	1	6	2437	11.40	-		30.00	-	0.28	-	11.68	-	36.00	-	Pass
VHT40	MCS0	1	9	2452	11.30	-		30.00	-	0.28	-	11.58	-	36.00	-	Pass

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Peak Power Spectral Density**


2.4GHz Band Single Antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	-10.70	-		0.28	-	8.00	-	Pass
11b	1Mbps	1	6	2437	-11.08	-		0.28	-	8.00	-	Pass
11b	1Mbps	1	11	2462	-10.51	-		0.28	-	8.00	-	Pass
11g	6Mbps	1	1	2412	-13.15	-		0.28	-	8.00	-	Pass
11g	6Mbps	1	6	2437	-13.24	-		0.28	-	8.00	-	Pass
11g	6Mbps	1	11	2462	-13.26	-		0.28	-	8.00	-	Pass
HT20	MCS0	1	1	2412	-13.26	-		0.28	-	8.00	-	Pass
HT20	MCS0	1	6	2437	-13.69	-		0.28	-	8.00	-	Pass
HT20	MCS0	1	11	2462	-13.64	-		0.28	-	8.00	-	Pass
HT40	MCS0	1	3	2422	-14.78	-		0.28	-	8.00	-	Pass
HT40	MCS0	1	6	2437	-16.38	-		0.28	-	8.00	-	Pass
HT40	MCS0	1	9	2452	-16.71	-		0.28	-	8.00	-	Pass

Measured power density (dBm) has offset with cable loss.




6dB and 99% Occupied Bandwidth

<802.11b>

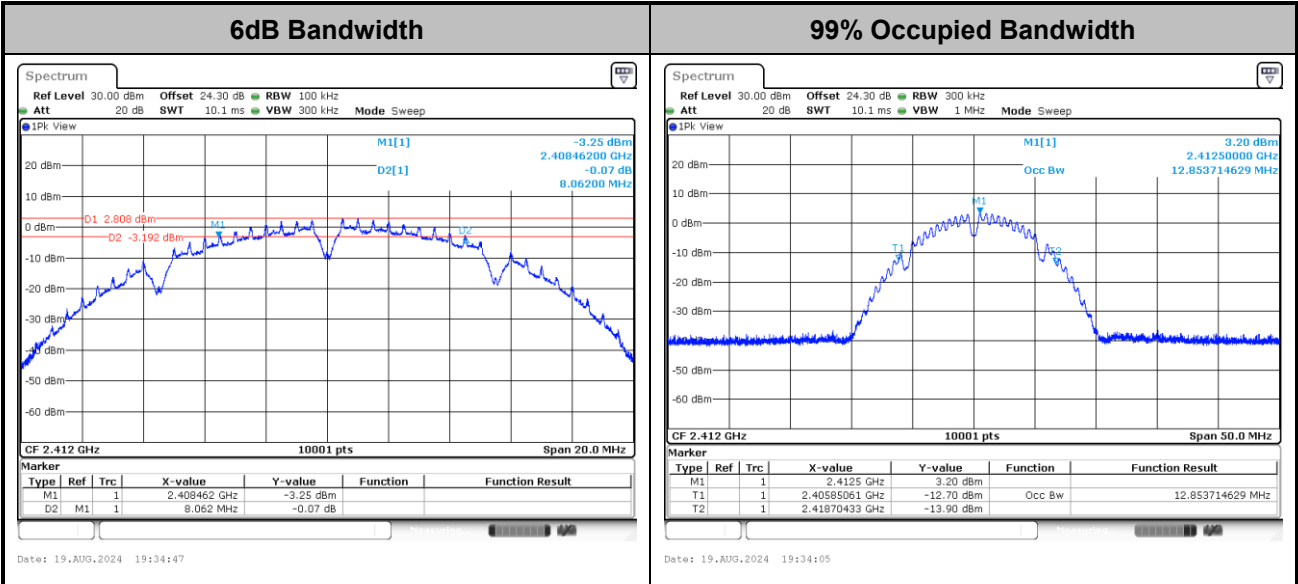

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11g>

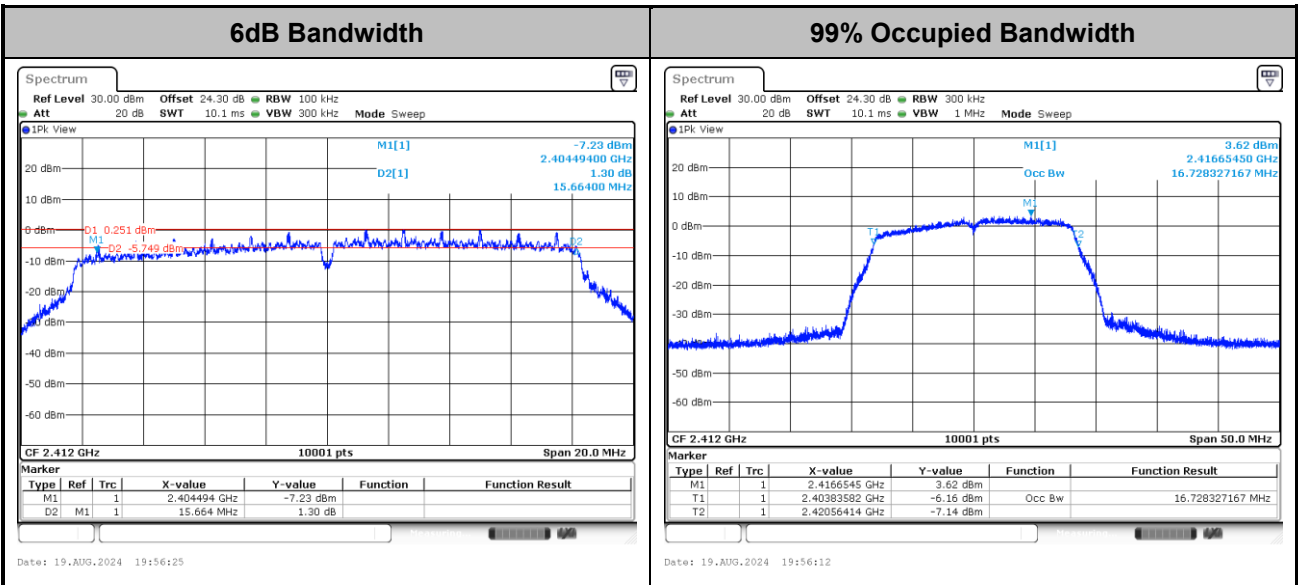

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11n HT20>

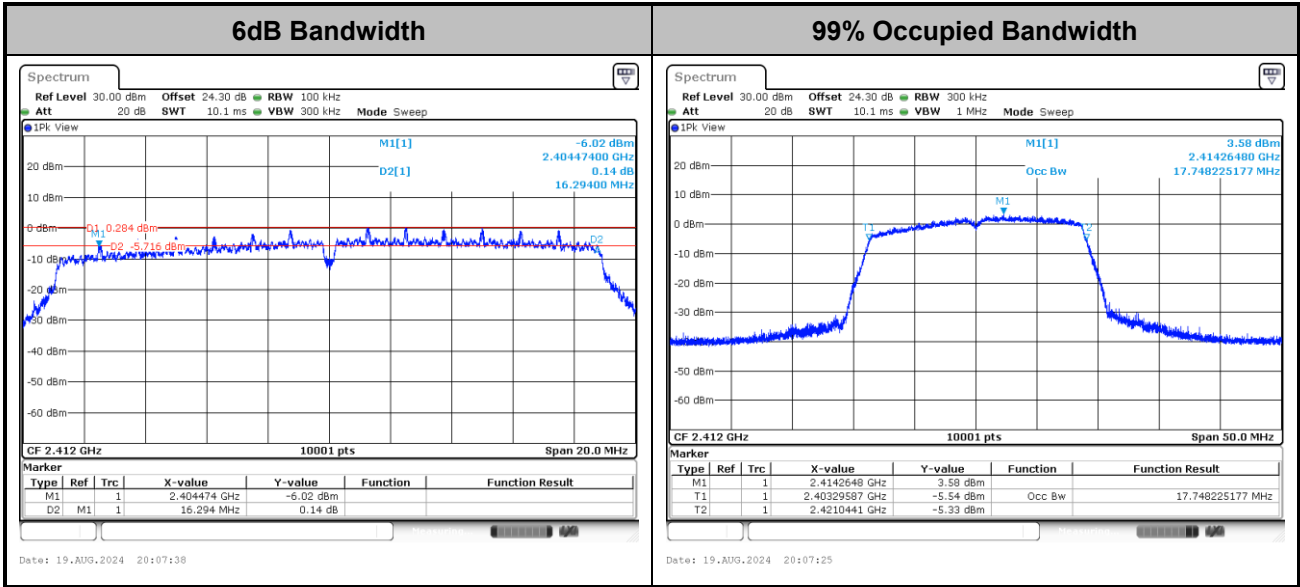

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<802.11n HT40>

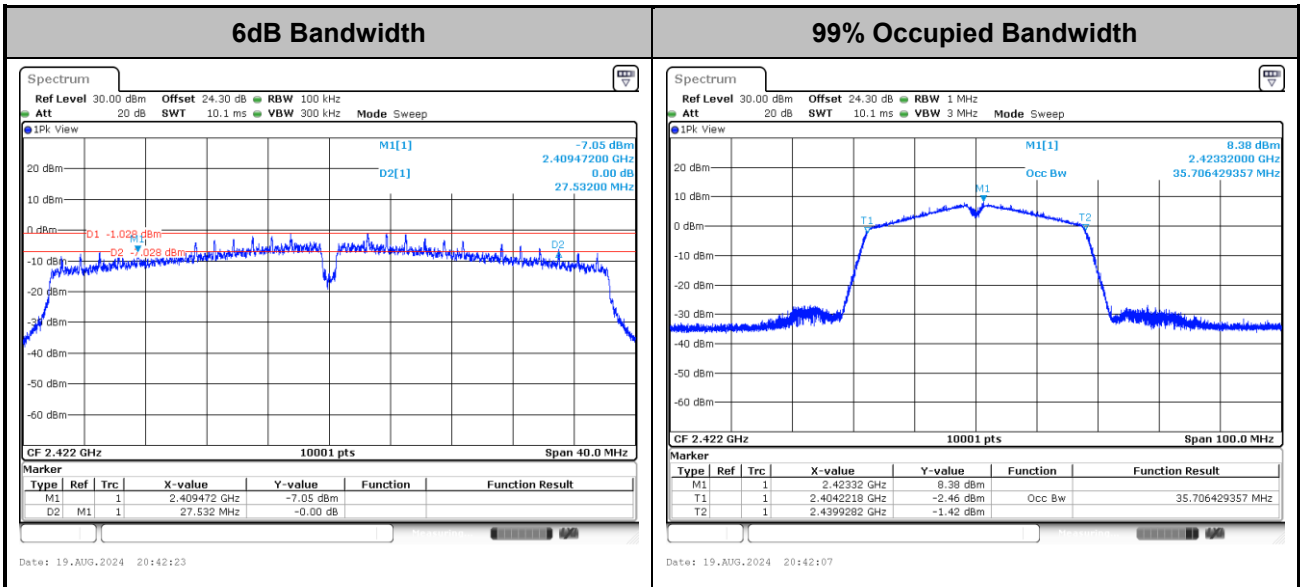


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.






**Power Spectral Density(dBm/3kHz)**

<802.11b>

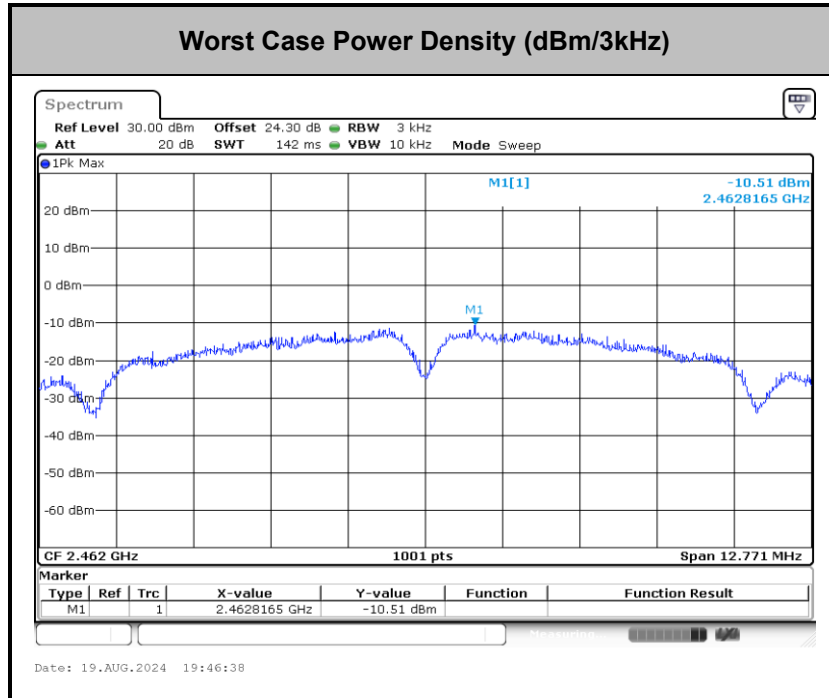




<802.11g>

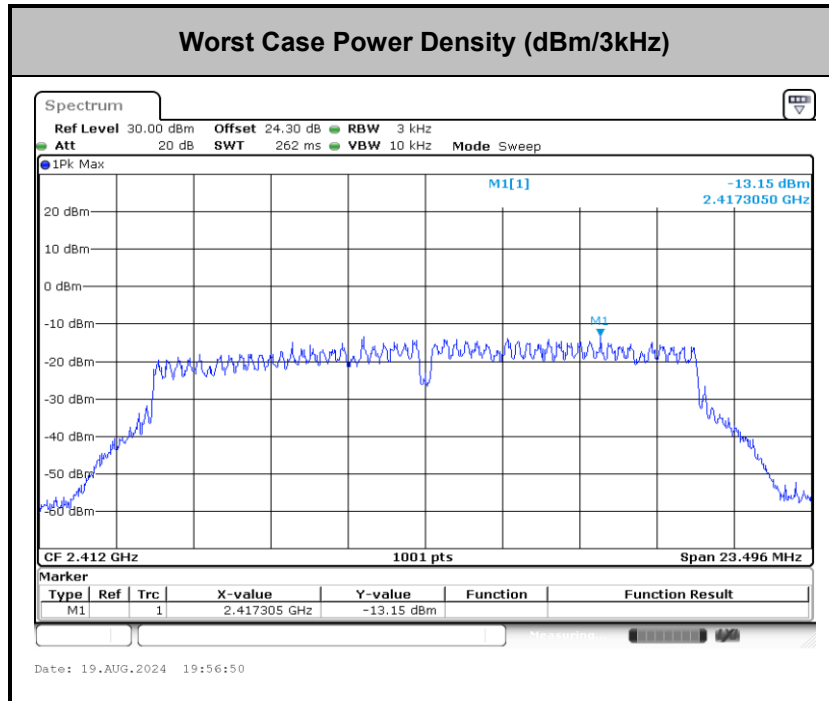




<802.11n HT20>

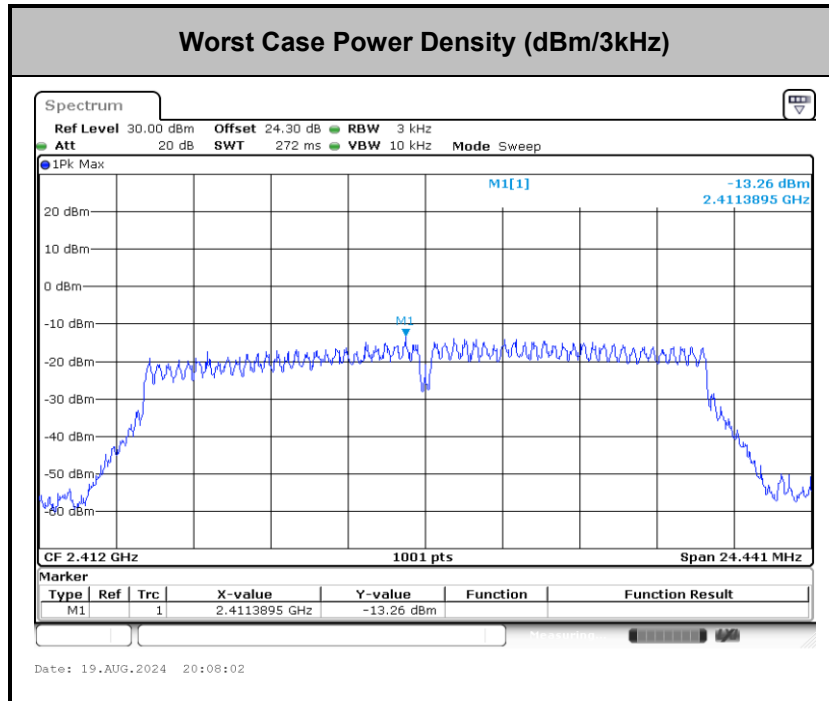



<802.11n HT40>


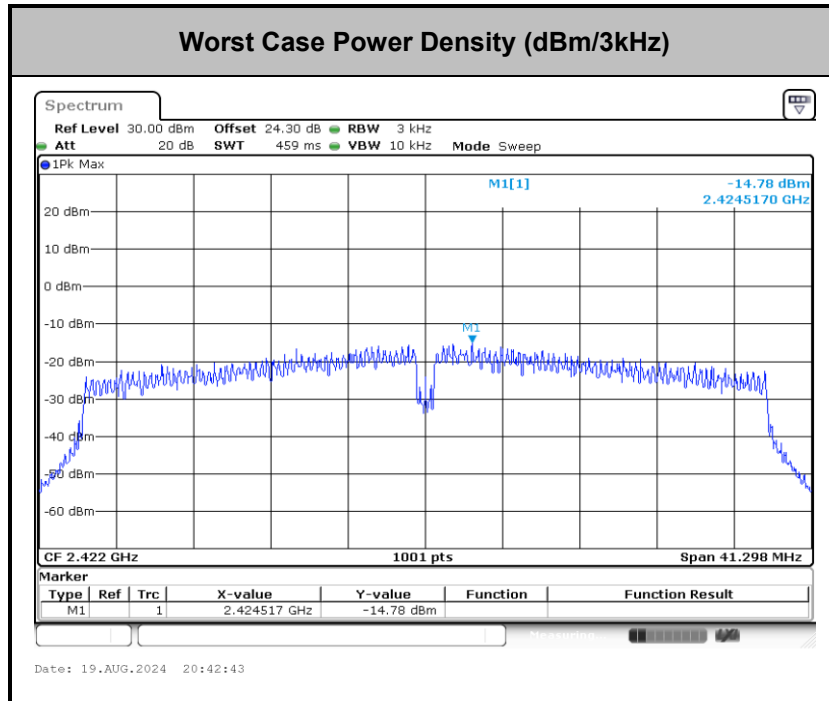




Band Edges and Spurious Emission


Number of TX = 1, Ant. 1 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

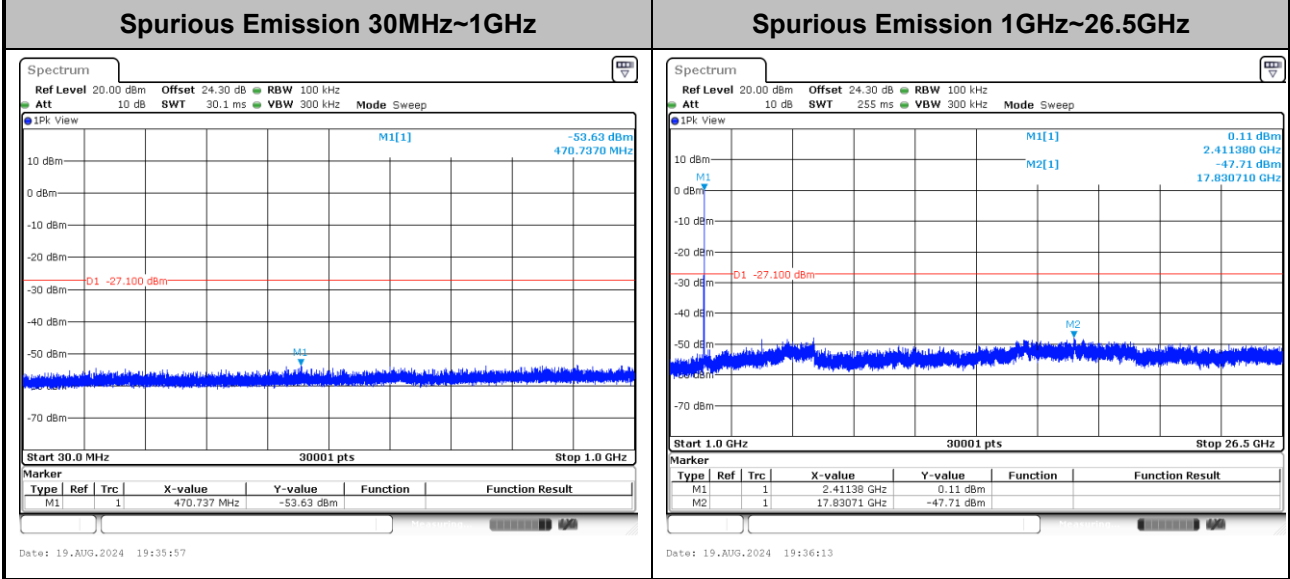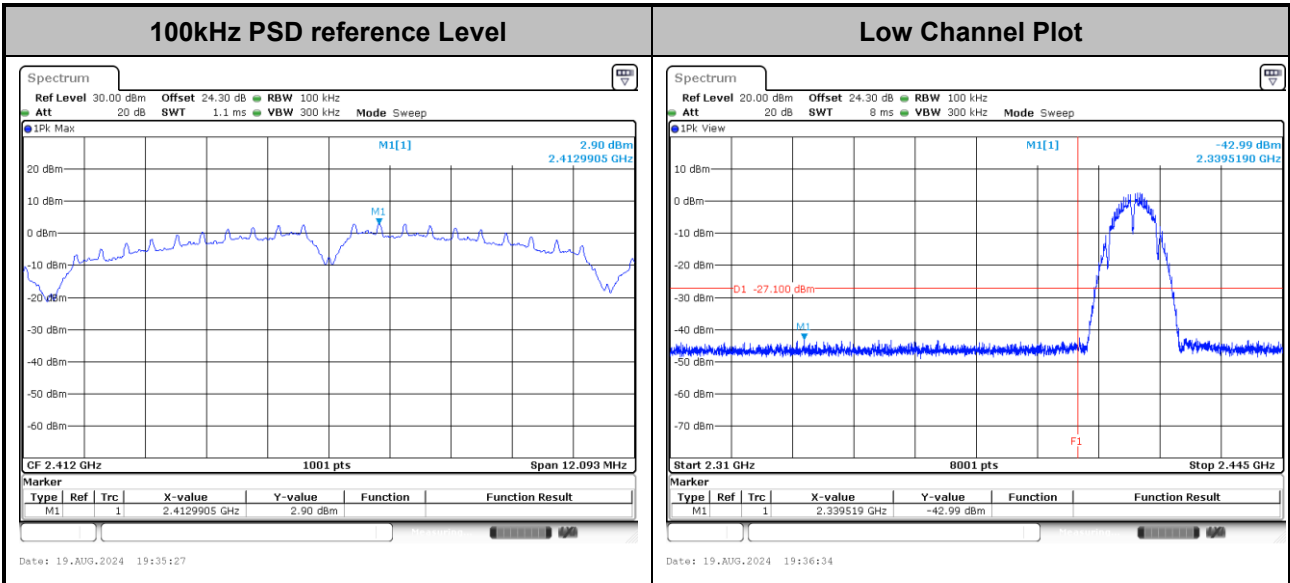




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

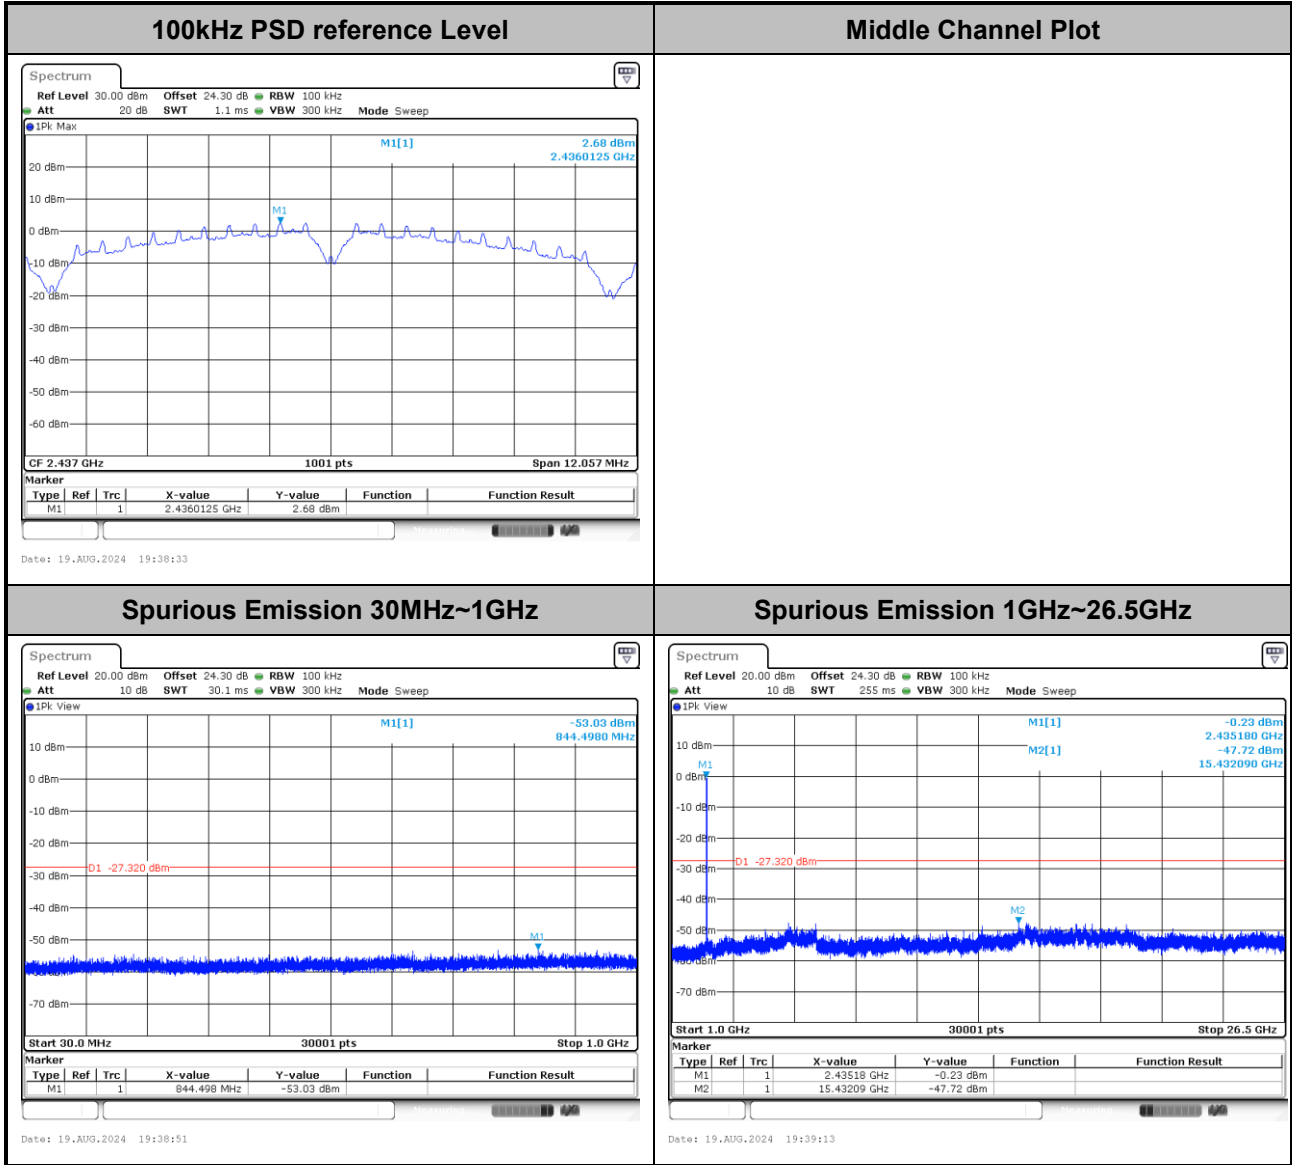




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

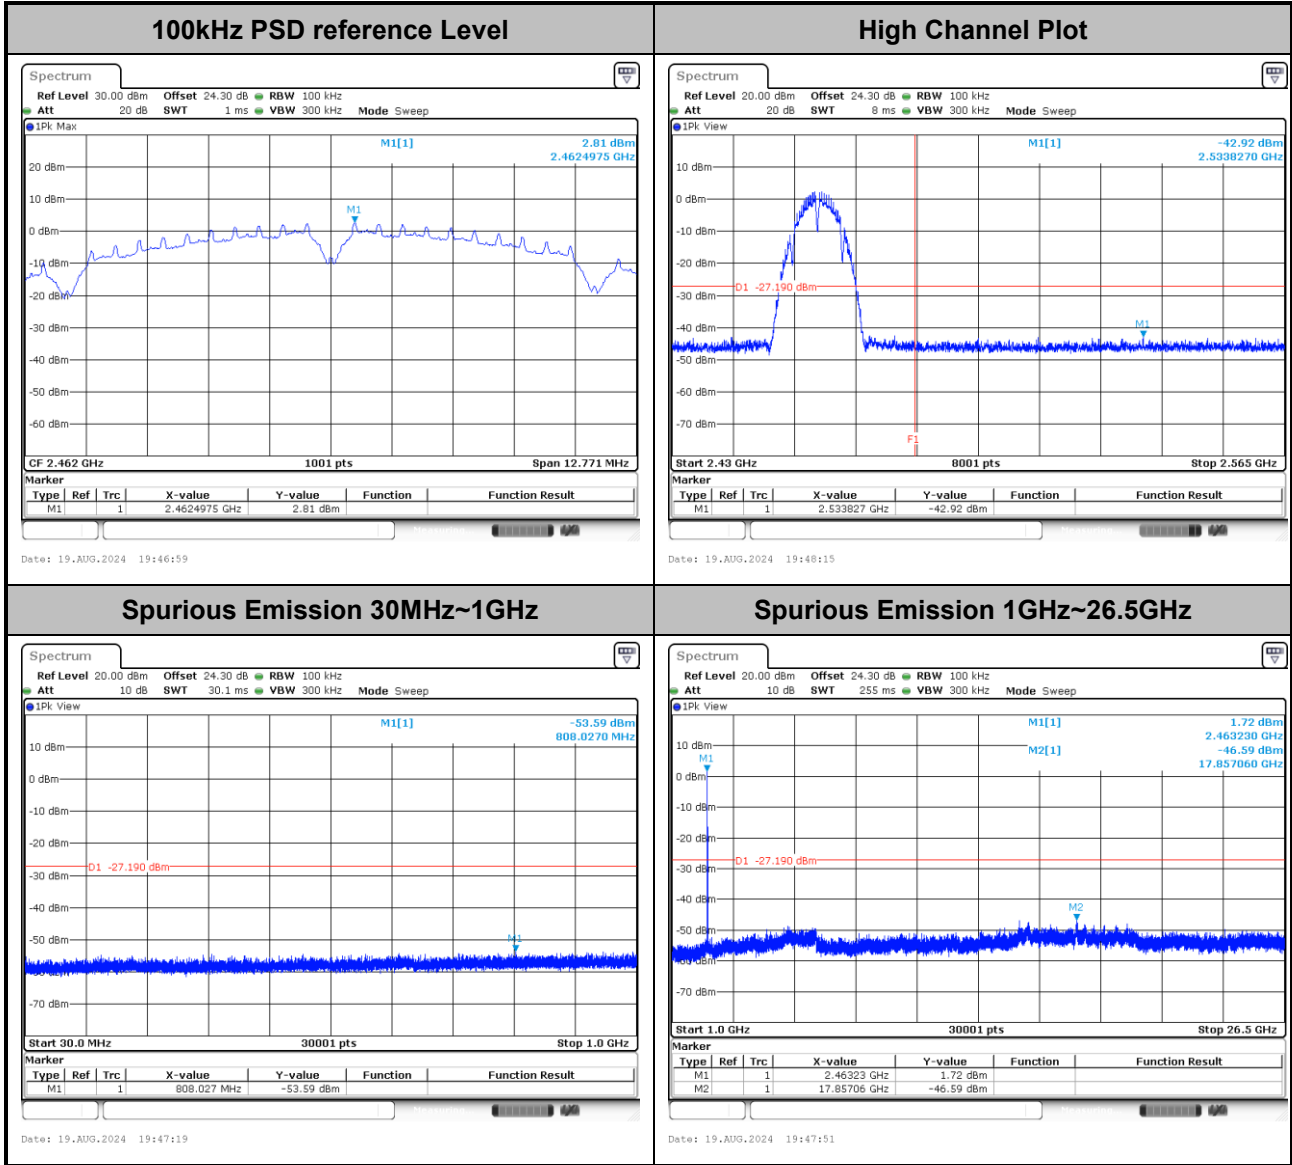




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

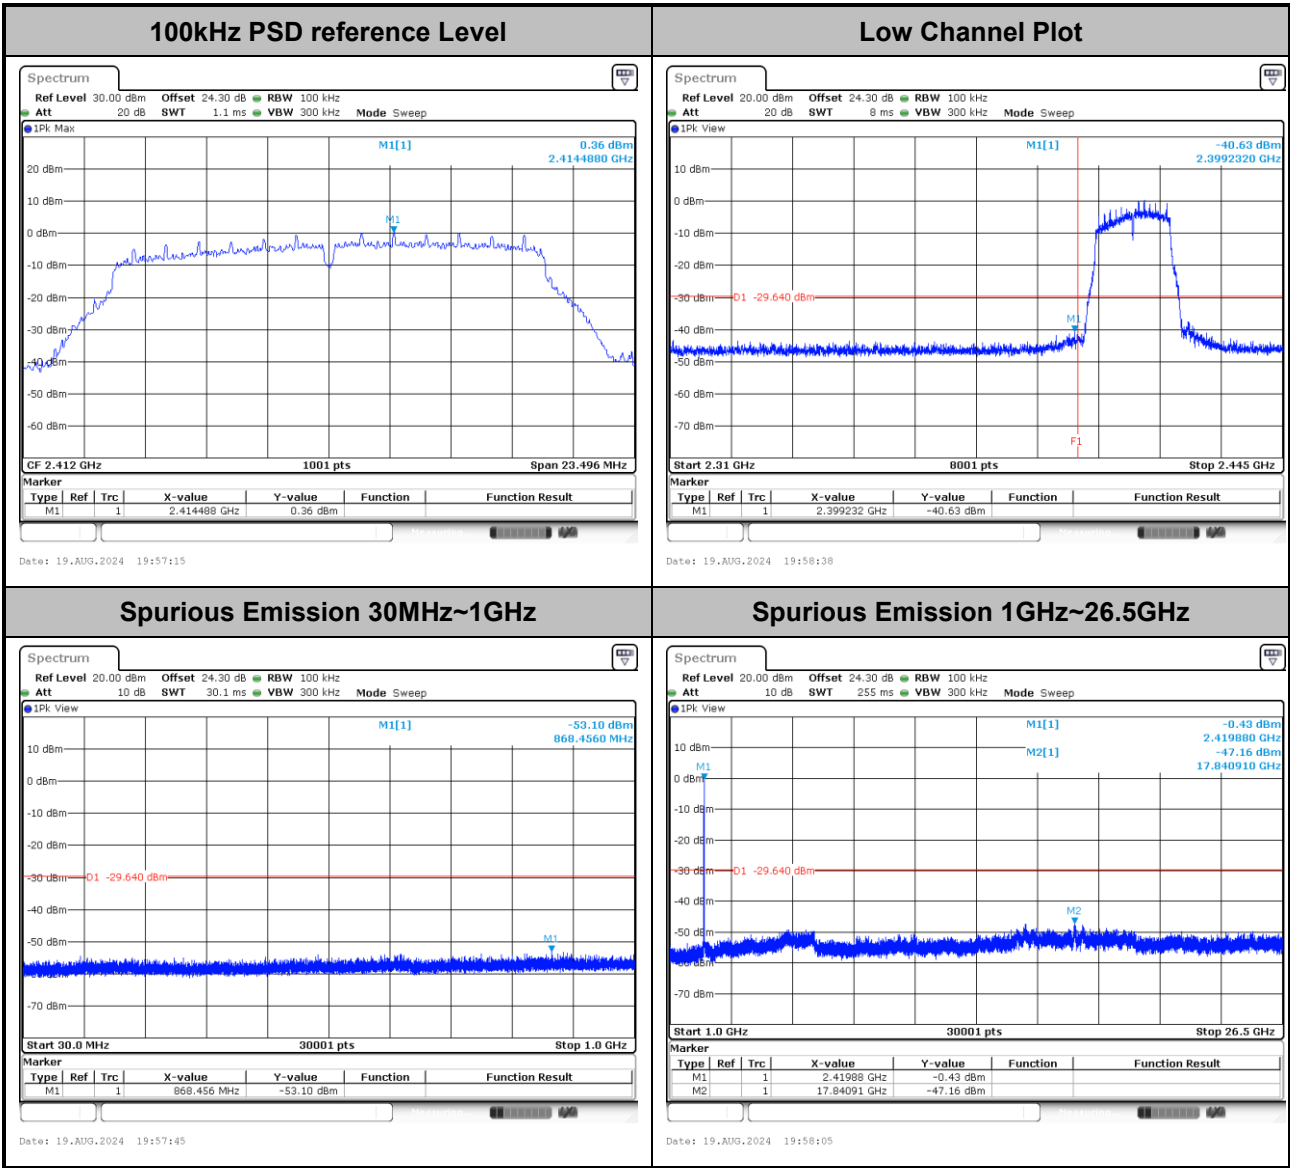






Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

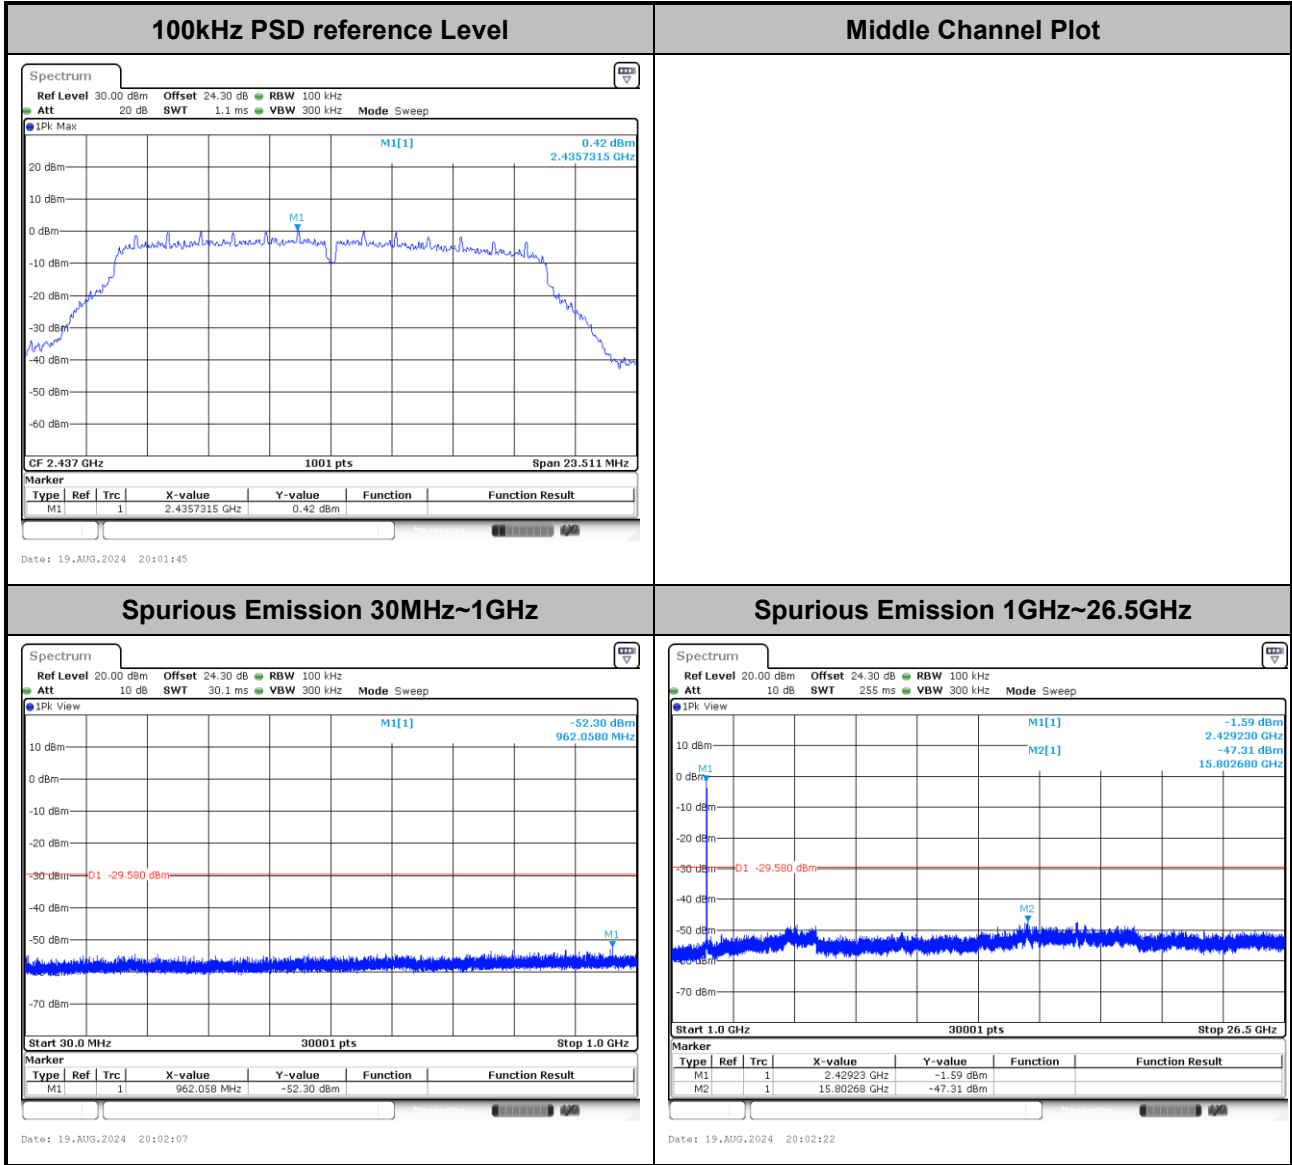




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

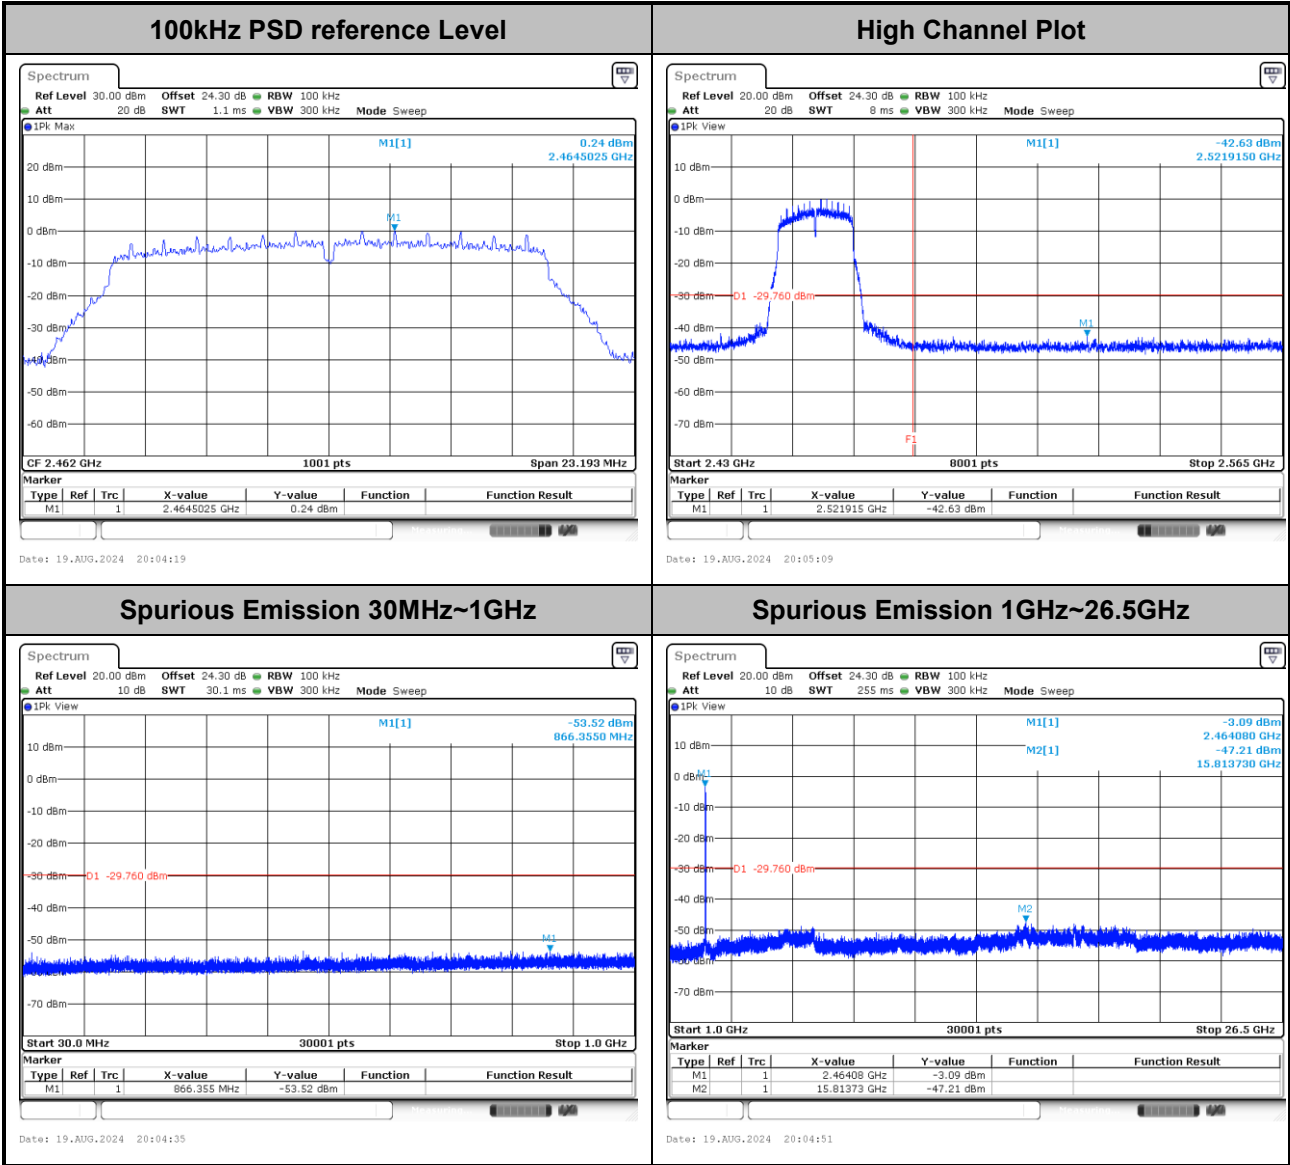




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

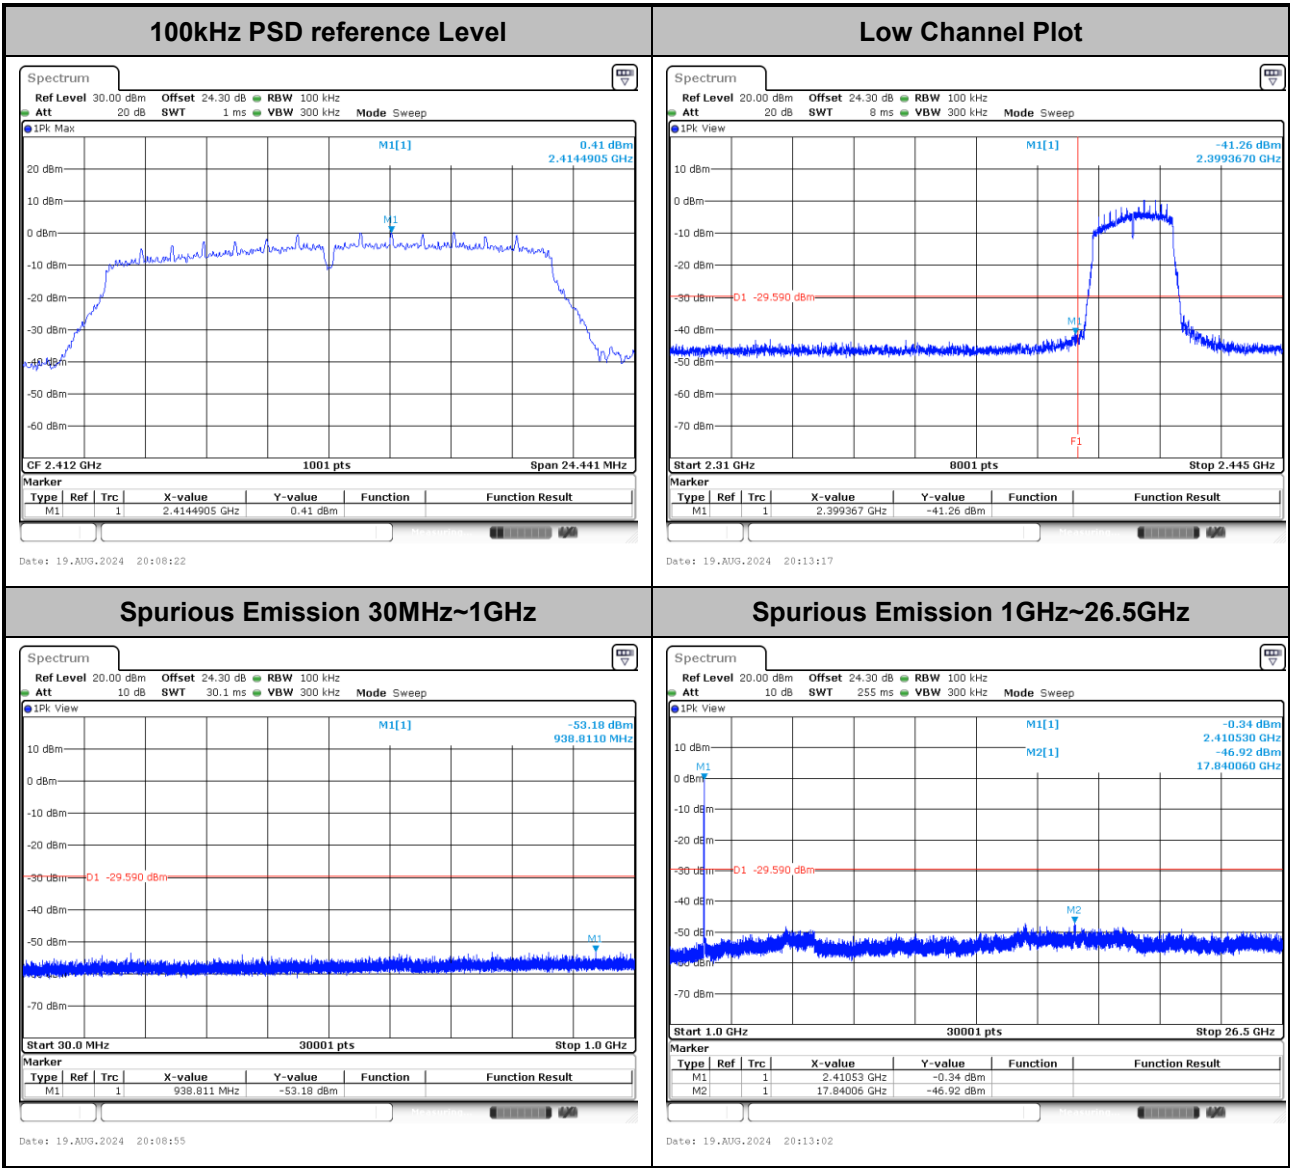




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

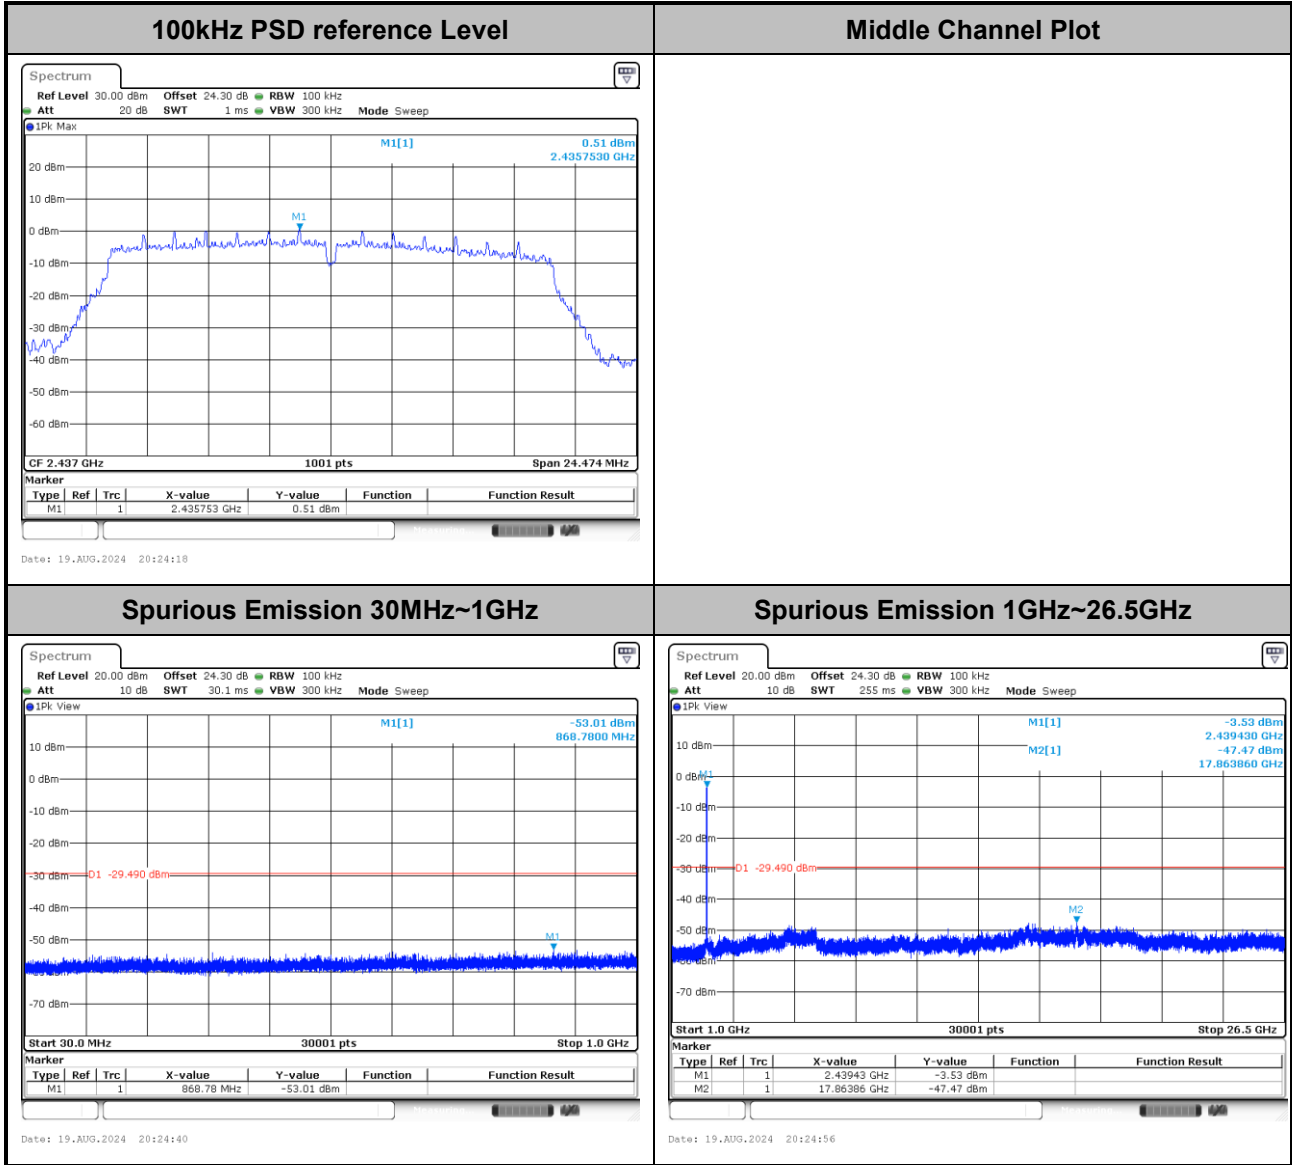




Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

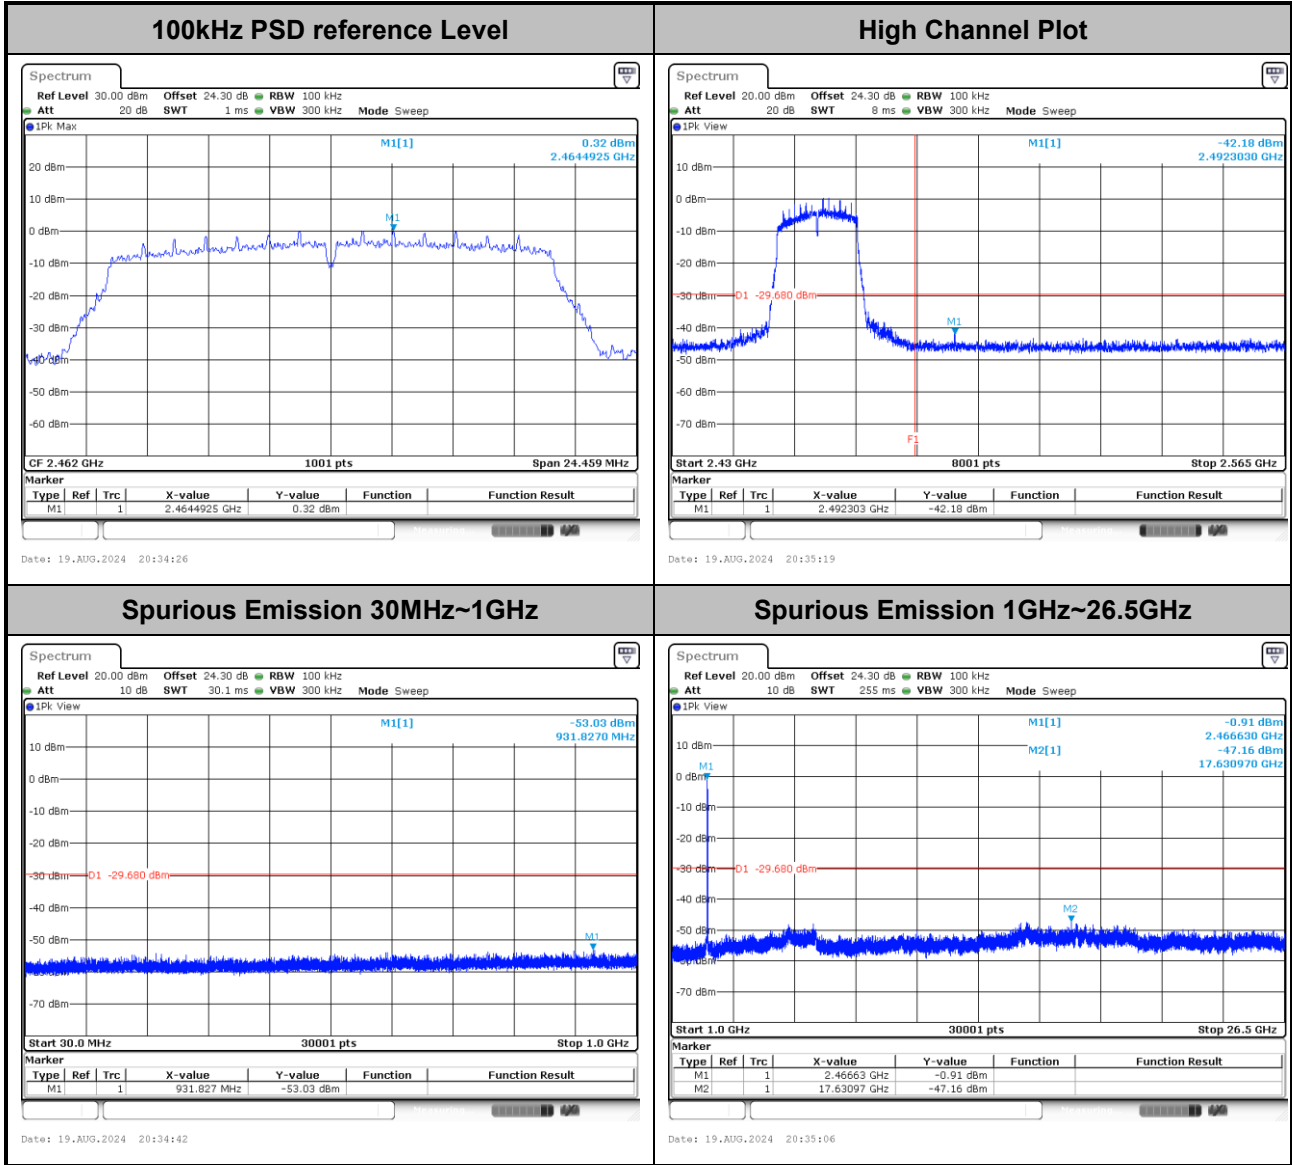




Test Mode :	802.11n HT40	Test Channel :	03
-------------	--------------	----------------	----

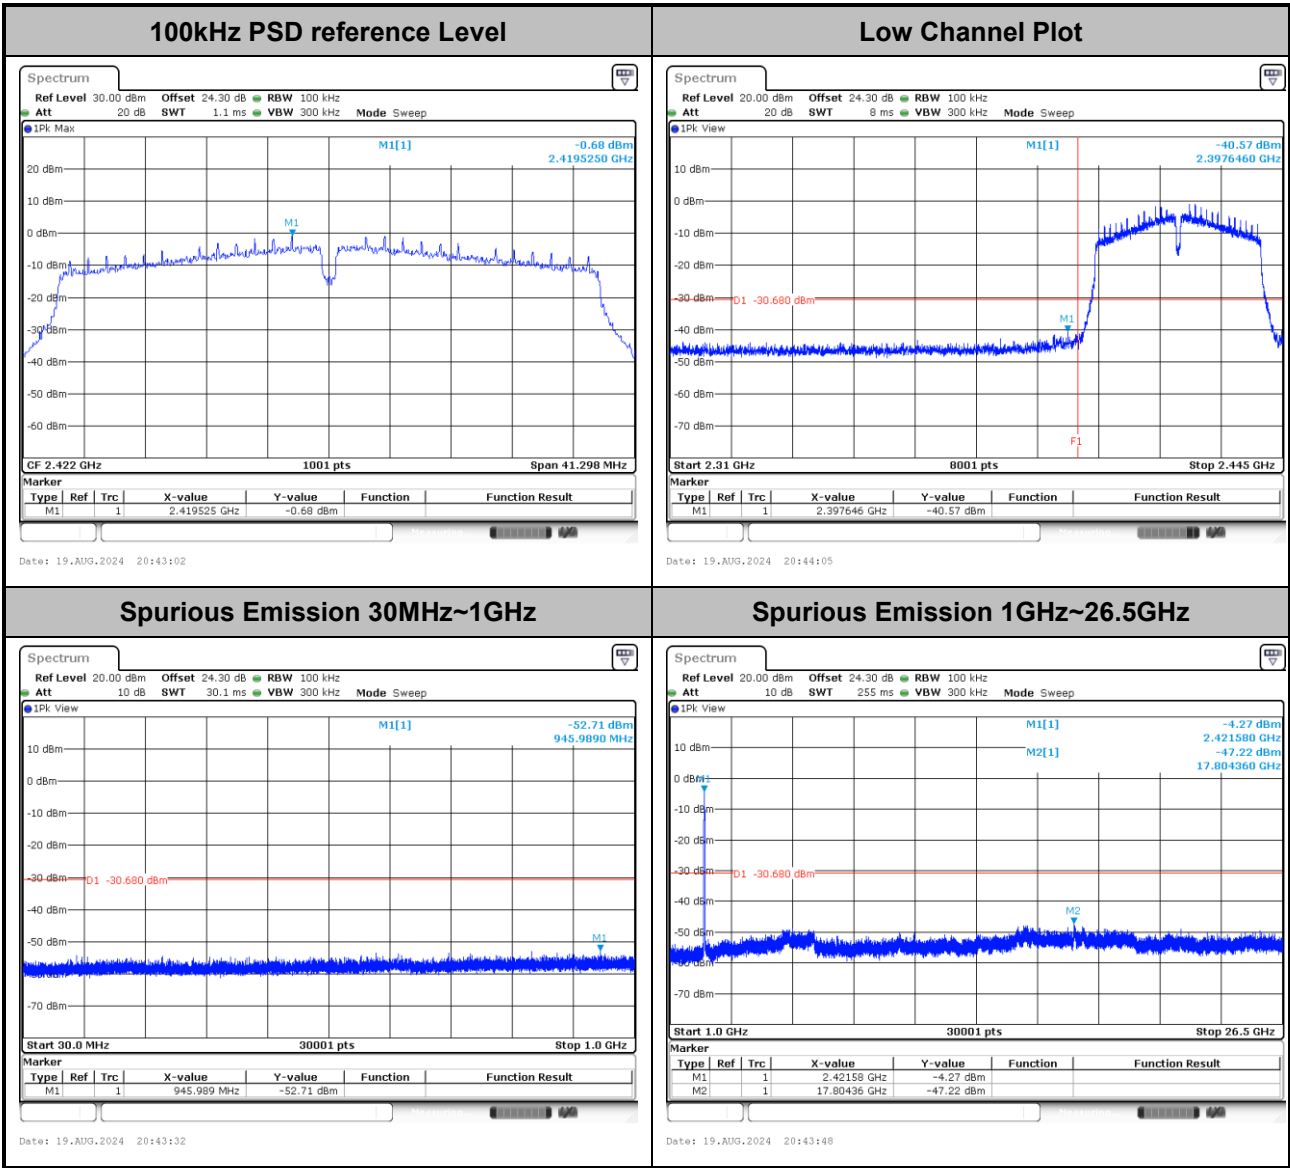




Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

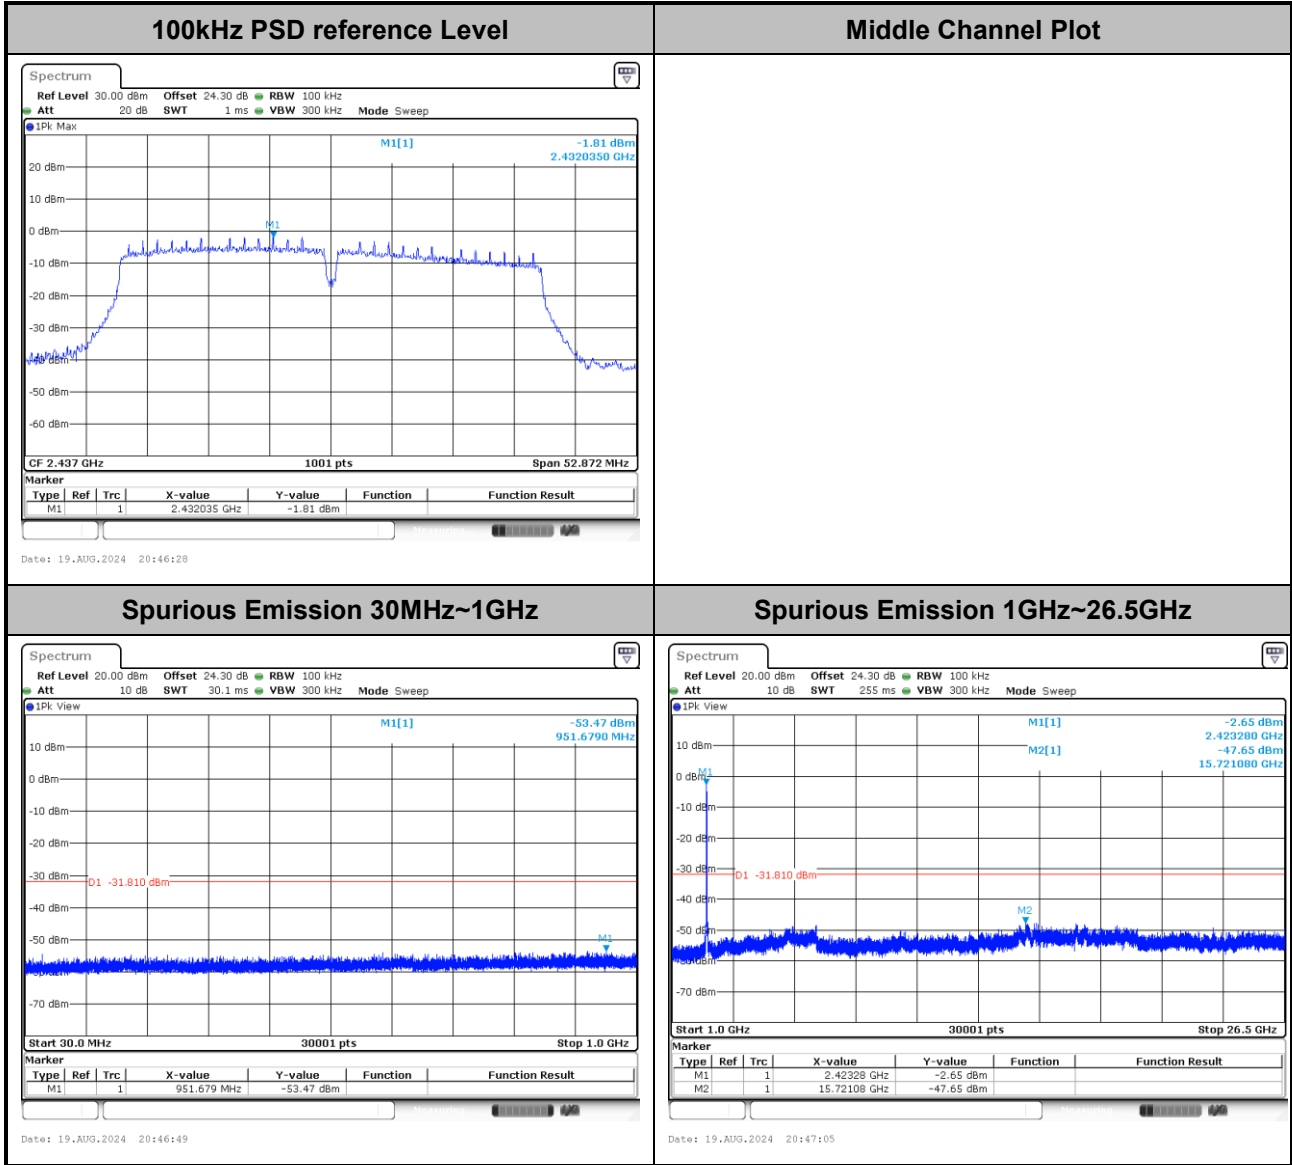



Test Mode :	802.11n HT40	Test Channel :	09
-------------	--------------	----------------	----

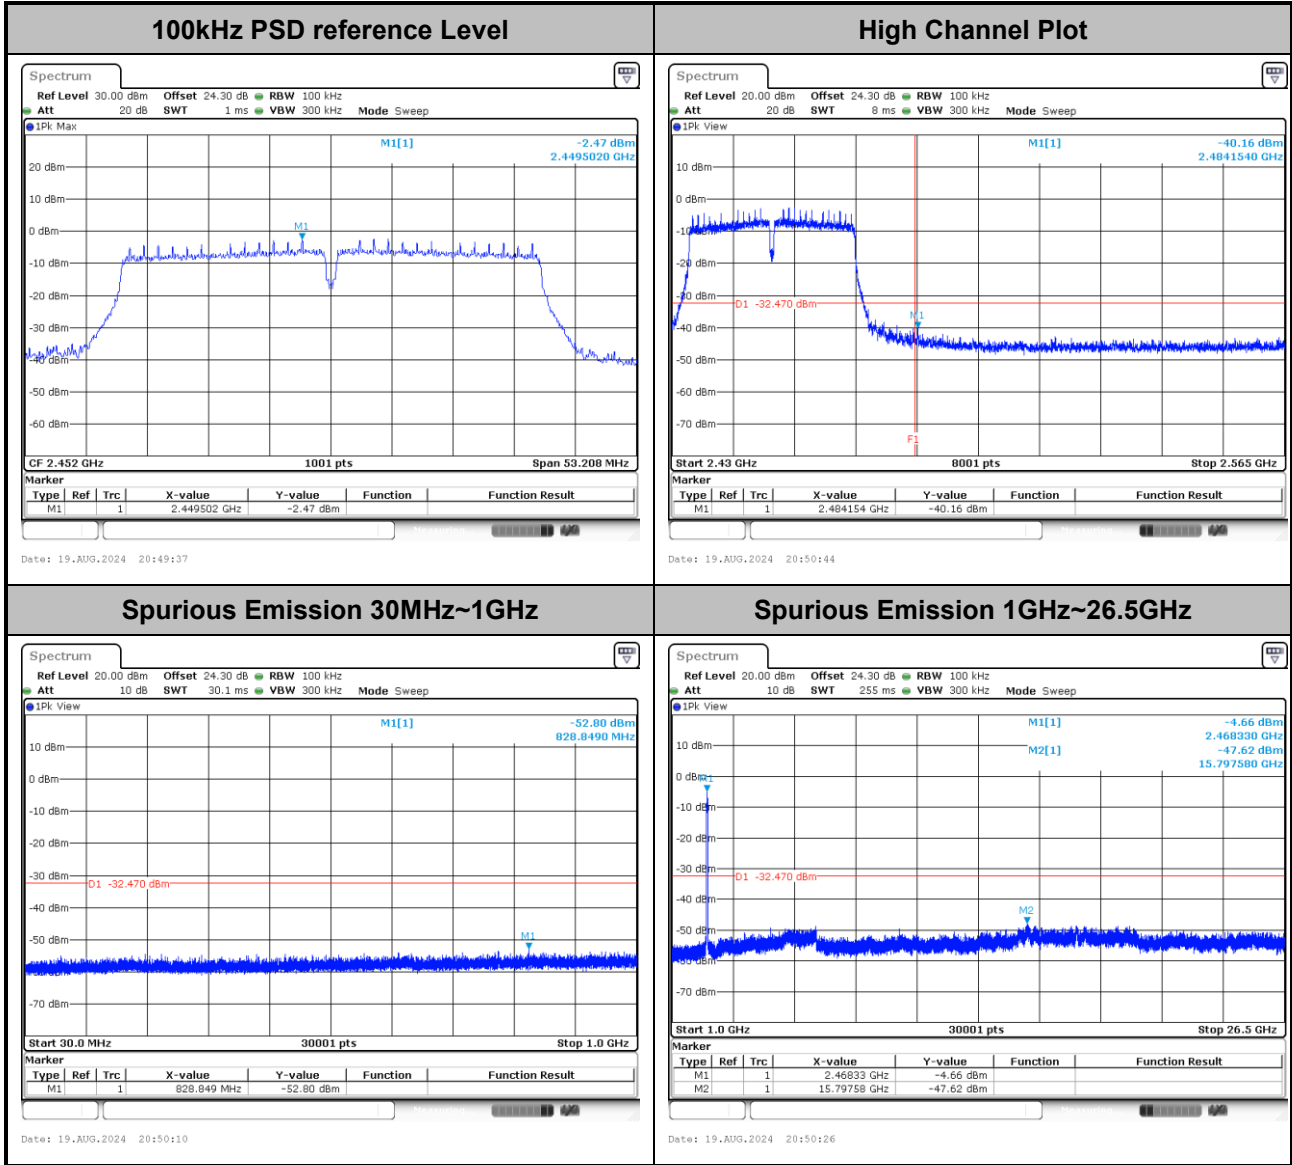






## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	22.8~26.1°C
		Relative Humidity :	45.2~52.3%

### EUT Information

Report NO : 471715  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

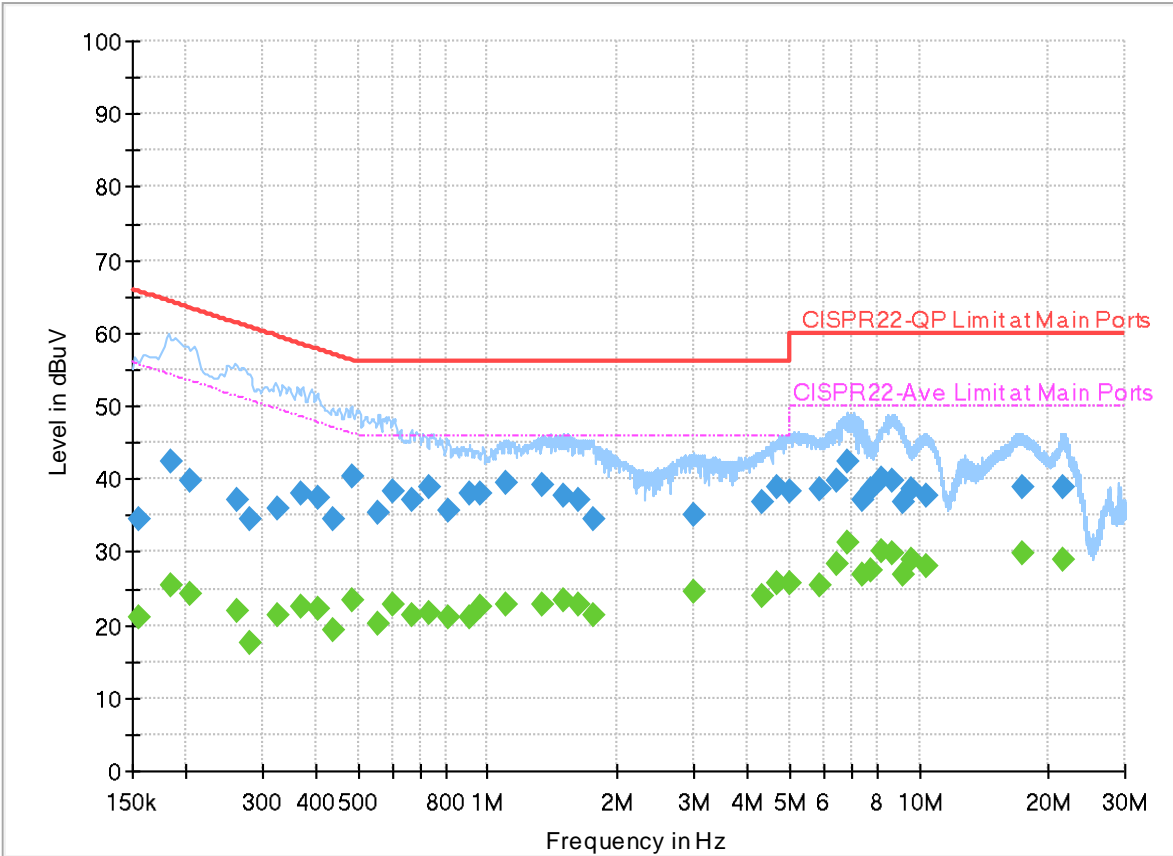

### Final\_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	21.16	55.75	34.59	L1	OFF	19.9
0.154500	34.37	---	65.75	31.38	L1	OFF	19.9
0.184110	---	25.31	54.30	28.99	L1	OFF	19.9
0.184110	42.34	---	64.30	21.96	L1	OFF	19.9
0.204000	---	24.23	53.45	29.22	L1	OFF	19.9
0.204000	39.74	---	63.45	23.71	L1	OFF	19.9
0.262410	---	22.02	51.36	29.34	L1	OFF	19.9
0.262410	37.06	---	61.36	24.30	L1	OFF	19.9
0.280320	---	17.67	50.81	33.14	L1	OFF	19.9
0.280320	34.38	---	60.81	26.43	L1	OFF	19.9
0.324600	---	21.37	49.59	28.22	L1	OFF	19.9
0.324600	36.01	---	59.59	23.58	L1	OFF	19.9
0.370590	---	22.40	48.49	26.09	L1	OFF	19.9
0.370590	38.04	---	58.49	20.45	L1	OFF	19.9
0.403710	---	22.22	47.78	25.56	L1	OFF	19.9
0.403710	37.57	---	57.78	20.21	L1	OFF	19.9
0.436200	---	19.41	47.13	27.72	L1	OFF	19.9
0.436200	34.60	---	57.13	22.53	L1	OFF	19.9
0.486690	---	23.41	46.22	22.81	L1	OFF	19.9

0.486690	40.40	---	56.22	15.82	L1	OFF	19.9
0.556800	---	20.23	46.00	25.77	L1	OFF	19.9
0.556800	35.47	---	56.00	20.53	L1	OFF	19.9
0.604950	---	22.85	46.00	23.15	L1	OFF	19.9
0.604950	38.16	---	56.00	17.84	L1	OFF	19.9
0.668040	---	21.44	46.00	24.56	L1	OFF	19.9
0.668040	37.13	---	56.00	18.87	L1	OFF	19.9
0.735090	---	21.73	46.00	24.27	L1	OFF	19.9
0.735090	38.83	---	56.00	17.17	L1	OFF	19.9
0.806010	---	20.98	46.00	25.02	L1	OFF	19.9
0.806010	35.77	---	56.00	20.23	L1	OFF	19.9
0.905640	---	21.09	46.00	24.91	L1	OFF	19.9
0.905640	38.05	---	56.00	17.95	L1	OFF	19.9
0.964500	---	22.55	46.00	23.45	L1	OFF	19.9
0.964500	38.02	---	56.00	17.98	L1	OFF	19.9
1.099500	---	22.83	46.00	23.17	L1	OFF	19.9
1.099500	39.37	---	56.00	16.63	L1	OFF	19.9
1.340250	---	22.73	46.00	23.27	L1	OFF	19.9
1.340250	39.13	---	56.00	16.87	L1	OFF	19.9
1.494510	---	23.31	46.00	22.69	L1	OFF	19.9
1.494510	37.62	---	56.00	18.38	L1	OFF	19.9
1.624020	---	22.88	46.00	23.12	L1	OFF	19.9
1.624020	37.21	---	56.00	18.79	L1	OFF	19.9
1.766310	---	21.28	46.00	24.72	L1	OFF	19.9
1.766310	34.63	---	56.00	21.37	L1	OFF	19.9
2.992200	---	24.57	46.00	21.43	L1	OFF	20.0
2.992200	35.21	---	56.00	20.79	L1	OFF	20.0
4.323750	---	24.11	46.00	21.89	L1	OFF	20.0
4.323750	36.97	---	56.00	19.03	L1	OFF	20.0
4.706250	---	25.82	46.00	20.18	L1	OFF	20.0
4.706250	38.81	---	56.00	17.19	L1	OFF	20.0
5.001000	---	25.74	50.00	24.26	L1	OFF	20.0
5.001000	38.21	---	60.00	21.79	L1	OFF	20.0
5.896410	---	25.51	50.00	24.49	L1	OFF	20.0
5.896410	38.51	---	60.00	21.49	L1	OFF	20.0
6.423270	---	28.49	50.00	21.51	L1	OFF	20.0
6.423270	39.91	---	60.00	20.09	L1	OFF	20.0
6.852750	---	31.15	50.00	18.85	L1	OFF	20.0
6.852750	42.38	---	60.00	17.62	L1	OFF	20.0
7.352250	---	26.80	50.00	23.20	L1	OFF	20.0
7.352250	37.09	---	60.00	22.91	L1	OFF	20.0
7.725750	---	27.36	50.00	22.64	L1	OFF	20.0
7.725750	38.70	---	60.00	21.30	L1	OFF	20.0
8.195820	---	29.99	50.00	20.01	L1	OFF	20.1
8.195820	40.08	---	60.00	19.92	L1	OFF	20.1
8.630250	---	29.82	50.00	20.18	L1	OFF	20.1
8.630250	39.82	---	60.00	20.18	L1	OFF	20.1
9.168000	---	26.97	50.00	23.03	L1	OFF	20.1
9.168000	36.75	---	60.00	23.25	L1	OFF	20.1
9.579570	---	28.92	50.00	21.08	L1	OFF	20.1
9.579570	38.64	---	60.00	21.36	L1	OFF	20.1
10.431510	---	28.20	50.00	21.80	L1	OFF	20.1
10.431510	37.69	---	60.00	22.31	L1	OFF	20.1
17.300220	---	29.73	50.00	20.27	L1	OFF	20.1
17.300220	38.95	---	60.00	21.05	L1	OFF	20.1
21.454800	---	28.91	50.00	21.09	L1	OFF	20.1
21.454800	38.82	---	60.00	21.18	L1	OFF	20.1

### EUT Information

Report NO : 471715  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

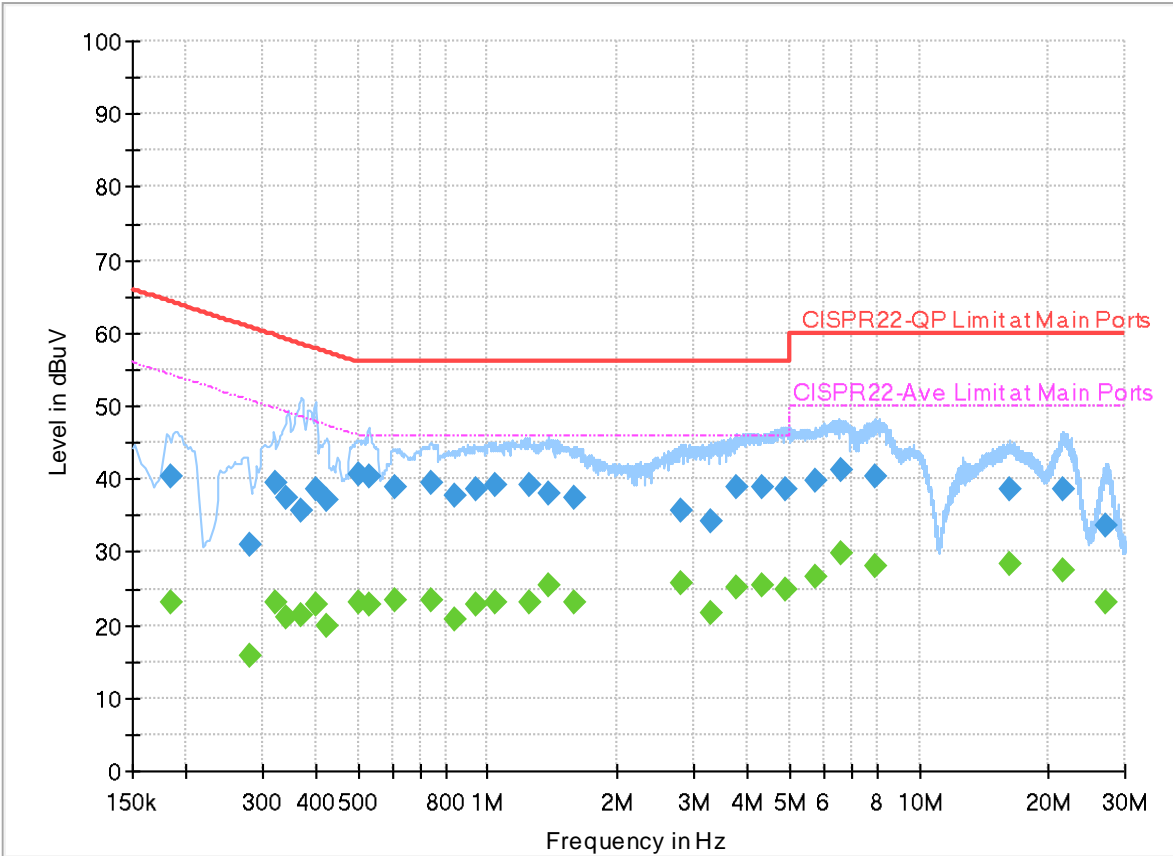

### Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.184110	---	23.24	54.30	31.06	N	OFF	19.9
0.184110	40.29	---	64.30	24.01	N	OFF	19.9
0.280500	---	15.85	50.80	34.95	N	OFF	19.9
0.280500	30.92	---	60.80	29.88	N	OFF	19.9
0.322620	---	23.08	49.64	26.56	N	OFF	19.9
0.322620	39.35	---	59.64	20.29	N	OFF	19.9
0.341250	---	21.19	49.17	27.98	N	OFF	19.9
0.341250	37.57	---	59.17	21.60	N	OFF	19.9
0.368790	---	21.48	48.53	27.05	N	OFF	19.9
0.368790	35.81	---	58.53	22.72	N	OFF	19.9
0.400470	---	22.73	47.84	25.11	N	OFF	19.9
0.400470	38.49	---	57.84	19.35	N	OFF	19.9
0.422250	---	19.91	47.40	27.49	N	OFF	19.9
0.422250	37.09	---	57.40	20.31	N	OFF	19.9
0.503160	---	23.12	46.00	22.88	N	OFF	19.9
0.503160	40.72	---	56.00	15.28	N	OFF	19.9
0.530790	---	22.78	46.00	23.22	N	OFF	19.9
0.530790	40.44	---	56.00	15.56	N	OFF	19.9
0.611250	---	23.49	46.00	22.51	N	OFF	19.9

0.611250	38.77	---	56.00	17.23	N	OFF	19.9
0.739950	---	23.38	46.00	22.62	N	OFF	19.9
0.739950	39.57	---	56.00	16.43	N	OFF	19.9
0.836250	---	20.62	46.00	25.38	N	OFF	19.9
0.836250	37.66	---	56.00	18.34	N	OFF	19.9
0.935250	---	22.68	46.00	23.32	N	OFF	19.9
0.935250	38.70	---	56.00	17.30	N	OFF	19.9
1.036230	---	23.04	46.00	22.96	N	OFF	19.9
1.036230	39.13	---	56.00	16.87	N	OFF	19.9
1.244850	---	23.21	46.00	22.79	N	OFF	19.9
1.244850	39.04	---	56.00	16.96	N	OFF	19.9
1.386240	---	25.47	46.00	20.53	N	OFF	19.9
1.386240	38.06	---	56.00	17.94	N	OFF	19.9
1.593420	---	23.07	46.00	22.93	N	OFF	19.9
1.593420	37.31	---	56.00	18.69	N	OFF	19.9
2.795460	---	25.85	46.00	20.15	N	OFF	20.0
2.795460	35.74	---	56.00	20.26	N	OFF	20.0
3.300000	---	21.61	46.00	24.39	N	OFF	20.0
3.300000	34.22	---	56.00	21.78	N	OFF	20.0
3.776280	---	25.27	46.00	20.73	N	OFF	20.0
3.776280	38.78	---	56.00	17.22	N	OFF	20.0
4.321230	---	25.39	46.00	20.61	N	OFF	20.0
4.321230	38.81	---	56.00	17.19	N	OFF	20.0
4.881030	---	24.95	46.00	21.05	N	OFF	20.0
4.881030	38.59	---	56.00	17.41	N	OFF	20.0
5.723250	---	26.61	50.00	23.39	N	OFF	20.0
5.723250	39.89	---	60.00	20.11	N	OFF	20.0
6.576090	---	29.76	50.00	20.24	N	OFF	20.0
6.576090	41.36	---	60.00	18.64	N	OFF	20.0
7.908000	---	28.10	50.00	21.90	N	OFF	20.1
7.908000	40.26	---	60.00	19.74	N	OFF	20.1
16.179000	---	28.45	50.00	21.55	N	OFF	20.2
16.179000	38.56	---	60.00	21.44	N	OFF	20.2
21.563250	---	27.60	50.00	22.40	N	OFF	20.2
21.563250	38.69	---	60.00	21.31	N	OFF	20.2
27.206880	---	23.01	50.00	26.99	N	OFF	20.2
27.206880	33.56	---	60.00	26.44	N	OFF	20.2



### Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Daniel Lee, Fu Chen and Troye Hsieh	Relative Humidity :	20.1~21.8℃
		Temperature :	52.9~69.9%

#### C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	2400-2483.5	1	802.11b	01	2412	1Mbps	-	-
Mode 13	2400-2483.5	1	802.11b	06	2437	1Mbps	-	-
Mode 14	2400-2483.5	1	802.11b	11	2462	1Mbps	-	-
Mode 15	2400-2483.5	1	802.11g	01	2412	6Mbps	-	-
Mode 16	2400-2483.5	1	802.11g	06	2437	6Mbps	-	-
Mode 17	2400-2483.5	1	802.11g	11	2462	6Mbps	-	-
Mode 18	2400-2483.5	1	802.11n HT20	01	2412	MCS0	-	-
Mode 19	2400-2483.5	1	802.11n HT20	06	2437	MCS0	-	-
Mode 20	2400-2483.5	1	802.11n HT20	11	2462	MCS0	-	-
Mode 21	2400-2483.5	1	802.11n HT40	03	2422	MCS0	-	-
Mode 22	2400-2483.5	1	802.11n HT40	06	2437	MCS0	-	-
Mode 23	2400-2483.5	1	802.11n HT40	09	2452	MCS0	-	-
Mode 24	2400-2483.5	1	802.11b	06	2437	1Mbps	-	LF
Mode 29	2400-2483.5	1	802.11b	06	2437	1Mbps	-	SHF

**C2. Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
12	802.11b	01	2389.04	45.80	54.00	-8.20	H	Avg.	Pass	-	Band Edge
	802.11b	01	4824.00	43.17	54.00	-10.83	H	Avg.	Pass	-	Harmonic
13	802.11b	06	2484.94	46.52	54.00	-7.48	H	Avg.	Pass	-	Band Edge
	802.11b	06	4874.00	51.88	54.00	-2.12	H	Avg.	Pass	-	Harmonic
14	802.11b	11	2487.61	51.55	54.00	-2.45	H	Avg.	Pass	-	Band Edge
	802.11b	11	4924.00	51.29	54.00	-2.71	H	Avg.	Pass	-	Harmonic
15	802.11g	01	2389.56	50.50	54.00	-3.50	H	Avg.	Pass	-	Band Edge
	802.11g	01	4824.00	41.84	74.00	-32.16	H	Peak	Pass	-	Harmonic
16	802.11g	06	2484.63	48.10	54.00	-5.90	H	Avg.	Pass	-	Band Edge
	802.11g	06	4874.00	40.23	54.00	-13.77	H	Avg.	Pass	-	Harmonic
17	802.11g	11	2483.51	50.61	54.00	-3.39	H	Avg.	Pass	-	Band Edge







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
17	802.11g	11	4924.00	35.65	54.00	-18.35	H	Avg.	Pass	-	Harmonic
18	802.11n HT20	01	2389.82	50.87	54.00	-3.13	H	Avg.	Pass	-	Band Edge
	802.11n HT20	01	4824.00	34.13	54.00	-19.87	H	Avg.	Pass	-	Harmonic
19	802.11n HT20	06	2483.62	47.26	54.00	-6.74	H	Avg.	Pass	-	Band Edge
	802.11n HT20	06	4874.00	39.22	54.00	-14.78	H	Avg.	Pass	-	Harmonic
20	802.11n HT20	11	2483.62	50.85	54.00	-3.15	H	Avg.	Pass	-	Band Edge
	802.11n HT20	11	4924.00	37.58	74.00	-36.42	H	Peak	Pass	-	Harmonic
21	802.11n HT40	03	2389.63	51.75	54.00	-2.25	H	Avg.	Pass	-	Band Edge
	802.11n HT40	03	4844.00	32.35	54.00	-21.65	H	Avg.	Pass	-	Harmonic
22	802.11n HT40	06	2483.75	51.20	54.00	-2.80	H	Avg.	Pass	-	Band Edge
	802.11n HT40	06	7311.00	38.73	74.00	-35.27	H	Peak	Pass	-	Harmonic









Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
23	802.11n HT40	09	2484.35	51.72	54.00	-2.28	H	Avg.	Pass	-	Band Edge
	802.11n HT40	09	7356.00	38.51	74.00	-35.49	V	Peak	Pass	-	Harmonic
24	LF	06	40.67	32.12	40.00	-7.88	V	QP	Pass	-	LF
29	SHF	06	24834.85	41.36	74.00	-32.64	V	Peak	Pass	-	SHF

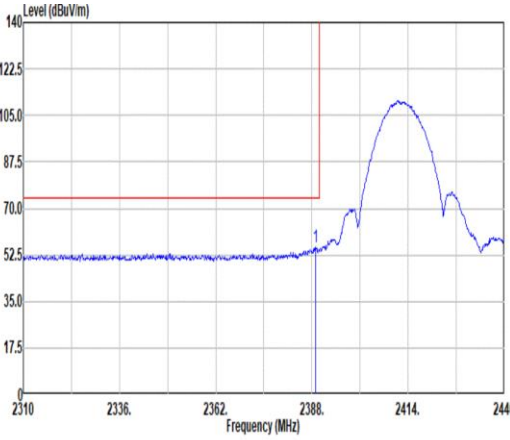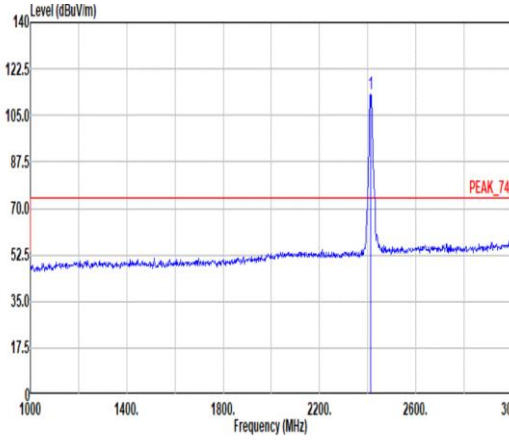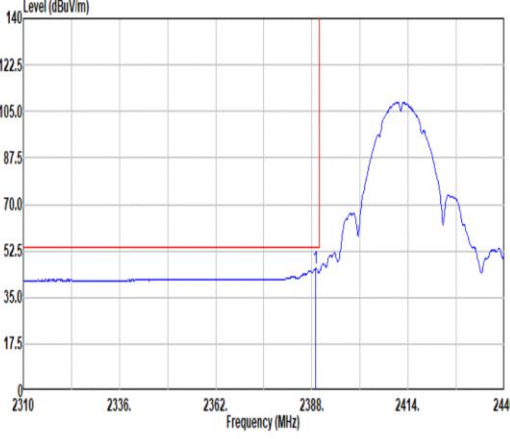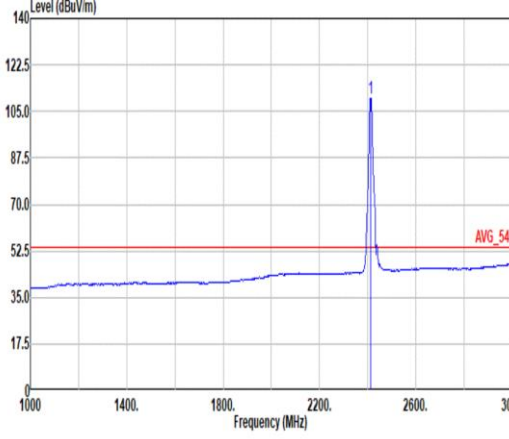

Mode	12																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11b_CH01_2412MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.91</td> <td>55.72</td> <td>74.00</td> <td>-18.28</td> <td>44.79</td> <td>27.49</td> <td>6.78</td> <td>33.34</td> <td>10.00</td> <td>144</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2388.91	55.72	74.00	-18.28	44.79	27.49	6.78	33.34	10.00	144	360	PEAK	 <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>113.02</td> <td>-----</td> <td>-----</td> <td>102.03</td> <td>27.50</td> <td>6.81</td> <td>33.32</td> <td>10.00</td> <td>144</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2412.00	113.02	-----	-----	102.03	27.50	6.81	33.32	10.00	144	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	2388.91	55.72	74.00	-18.28	44.79	27.49	6.78	33.34	10.00	144	360	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	2412.00	113.02	-----	-----	102.03	27.50	6.81	33.32	10.00	144	360	PEAK																																																																						
Avg	 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.04</td> <td>45.80</td> <td>54.00</td> <td>-8.20</td> <td>34.87</td> <td>27.49</td> <td>6.78</td> <td>33.34</td> <td>10.00</td> <td>144</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2389.04	45.80	54.00	-8.20	34.87	27.49	6.78	33.34	10.00	144	360	AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>109.94</td> <td>-----</td> <td>-----</td> <td>98.95</td> <td>27.50</td> <td>6.81</td> <td>33.32</td> <td>10.00</td> <td>144</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2412.00	109.94	-----	-----	98.95	27.50	6.81	33.32	10.00	144	360	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	2389.04	45.80	54.00	-8.20	34.87	27.49	6.78	33.34	10.00	144	360	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	2412.00	109.94	-----	-----	98.95	27.50	6.81	33.32	10.00	144	360	AVERAGE																																																																						

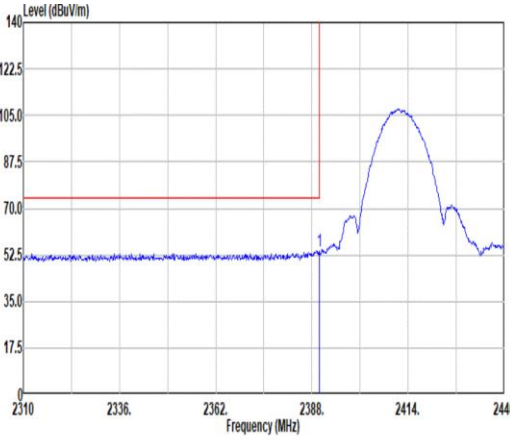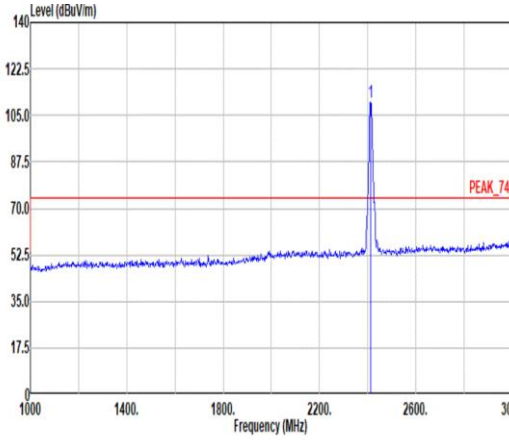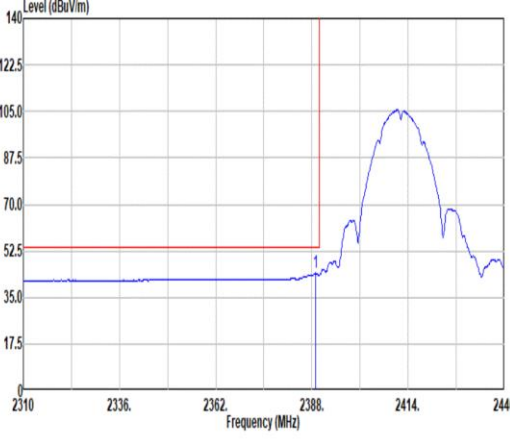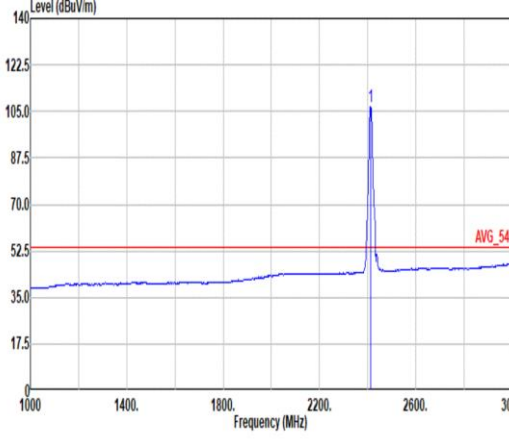

Mode	12																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical	Fundamental																																																																																																		
Peak	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th>deg</th> <th colspan="8"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>53.73</td> <td>74.00</td> <td>-20.27</td> <td>42.79</td> <td>27.50</td> <td>6.78</td> <td>33.34</td> <td>10.00</td> <td>400</td> <td>248</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg									1	2389.95	53.73	74.00	-20.27	42.79	27.50	6.78	33.34	10.00	400	248	PEAK	 <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th>deg</th> <th colspan="8"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>110.04</td> <td>-----</td> <td>-----</td> <td>99.05</td> <td>27.50</td> <td>6.81</td> <td>33.32</td> <td>10.00</td> <td>400</td> <td>248</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg									1	2412.00	110.04	-----	-----	99.05	27.50	6.81	33.32	10.00	400	248	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																												
deg																																																																																																				
1	2389.95	53.73	74.00	-20.27	42.79	27.50	6.78	33.34	10.00	400	248	PEAK																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																												
deg																																																																																																				
1	2412.00	110.04	-----	-----	99.05	27.50	6.81	33.32	10.00	400	248	PEAK																																																																																								
Avg	 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th>deg</th> <th colspan="8"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.91</td> <td>44.15</td> <td>54.00</td> <td>-9.85</td> <td>33.22</td> <td>27.49</td> <td>6.78</td> <td>33.34</td> <td>10.00</td> <td>400</td> <td>248</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg									1	2388.91	44.15	54.00	-9.85	33.22	27.49	6.78	33.34	10.00	400	248	AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th>deg</th> <th colspan="8"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>106.90</td> <td>-----</td> <td>-----</td> <td>96.01</td> <td>27.50</td> <td>6.80</td> <td>33.33</td> <td>10.00</td> <td>400</td> <td>248</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg									1	2412.00	106.90	-----	-----	96.01	27.50	6.80	33.33	10.00	400	248	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																												
deg																																																																																																				
1	2388.91	44.15	54.00	-9.85	33.22	27.49	6.78	33.34	10.00	400	248	AVERAGE																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																												
deg																																																																																																				
1	2412.00	106.90	-----	-----	96.01	27.50	6.80	33.33	10.00	400	248	AVERAGE																																																																																								



Mode	12																																																																																																													
	Harmonic																																																																																																													
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_230817 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>46.37</td> <td>74.00</td> <td>-27.63</td> <td>61.01</td> <td>32.54</td> <td>11.36</td> <td>58.54</td> <td>0.00</td> <td>113</td> <td>55</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4824.00</td> <td>43.17</td> <td>54.00</td> <td>-10.83</td> <td>57.81</td> <td>32.54</td> <td>11.36</td> <td>58.54</td> <td>0.00</td> <td>113</td> <td>55</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	46.37	74.00	-27.63	61.01	32.54	11.36	58.54	0.00	113	55	Peak	2	4824.00	43.17	54.00	-10.83	57.81	32.54	11.36	58.54	0.00	113	55	Average	<p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_230817 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>44.50</td> <td>74.00</td> <td>-29.50</td> <td>59.14</td> <td>32.54</td> <td>11.36</td> <td>58.54</td> <td>0.00</td> <td>366</td> <td>71</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4824.00</td> <td>40.04</td> <td>74.00</td> <td>-33.96</td> <td>54.68</td> <td>32.54</td> <td>11.36</td> <td>58.54</td> <td>0.00</td> <td>366</td> <td>71</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	44.50	74.00	-29.50	59.14	32.54	11.36	58.54	0.00	366	71	Peak	2	4824.00	40.04	74.00	-33.96	54.68	32.54	11.36	58.54	0.00	366	71	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4824.00	46.37	74.00	-27.63	61.01	32.54	11.36	58.54	0.00	113	55	Peak																																																																																																		
2	4824.00	43.17	54.00	-10.83	57.81	32.54	11.36	58.54	0.00	113	55	Average																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4824.00	44.50	74.00	-29.50	59.14	32.54	11.36	58.54	0.00	366	71	Peak																																																																																																		
2	4824.00	40.04	74.00	-33.96	54.68	32.54	11.36	58.54	0.00	366	71	Peak																																																																																																		



Mode	12	
	Harmonic	
	2400-2483.5_802.11b_CH01_2412MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 VERTICAL</p>
	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 VERTICAL</p>



Mode	13																																																																													
	Band Edge - L																																																																													
	2400-2483.5_802.11b_CH06_2437MHz																																																																													
ANT	1																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2388.61</td> <td>54.76</td> <td>74.00</td> <td>-19.24</td> <td>43.83</td> <td>27.49</td> <td>6.78</td> <td>33.34</td> <td>10.00</td> <td>39 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2388.61	54.76	74.00	-19.24	43.83	27.49	6.78	33.34	10.00	39 PEAK	<p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2437.00</td> <td>112.99</td> <td>-----</td> <td>-----</td> <td>101.86</td> <td>27.60</td> <td>6.84</td> <td>33.31</td> <td>10.00</td> <td>39 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2437.00	112.99	-----	-----	101.86	27.60	6.84	33.31	10.00	39 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2388.61	54.76	74.00	-19.24	43.83	27.49	6.78	33.34	10.00	39 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2437.00	112.99	-----	-----	101.86	27.60	6.84	33.31	10.00	39 PEAK																																																																					
Avg	<p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2388.49</td> <td>44.77</td> <td>54.00</td> <td>-9.23</td> <td>33.85</td> <td>27.48</td> <td>6.78</td> <td>33.34</td> <td>10.00</td> <td>39 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2388.49	44.77	54.00	-9.23	33.85	27.48	6.78	33.34	10.00	39 AVERAGE	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2437.00</td> <td>109.86</td> <td>-----</td> <td>-----</td> <td>98.73</td> <td>27.60</td> <td>6.84</td> <td>33.31</td> <td>10.00</td> <td>39 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2437.00	109.86	-----	-----	98.73	27.60	6.84	33.31	10.00	39 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2388.49	44.77	54.00	-9.23	33.85	27.48	6.78	33.34	10.00	39 AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2437.00	109.86	-----	-----	98.73	27.60	6.84	33.31	10.00	39 AVERAGE																																																																					



Mode	13																																														
	Band Edge - R																																														
	2400-2483.5_802.11b_CH06_2437MHz																																														
ANT	1																																														
Pol.	Horizontal	Fundamental																																													
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_230017 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2485.01</td> <td>56.39</td> <td>74.00</td> <td>-17.61</td> <td>45.06</td> <td>27.70</td> <td>6.91</td> <td>33.28</td> <td>10.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 39 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2485.01	56.39	74.00	-17.61	45.06	27.70	6.91	33.28	10.00									100 39 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2485.01	56.39	74.00	-17.61	45.06	27.70	6.91	33.28	10.00																																							
								100 39 PEAK																																							
Avg	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_230017 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2484.94</td> <td>46.52</td> <td>54.00</td> <td>-7.48</td> <td>35.19</td> <td>27.70</td> <td>6.91</td> <td>33.28</td> <td>10.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 39 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.94	46.52	54.00	-7.48	35.19	27.70	6.91	33.28	10.00									100 39 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2484.94	46.52	54.00	-7.48	35.19	27.70	6.91	33.28	10.00																																							
								100 39 AVERAGE																																							



Mode	13																																																																													
	Band Edge - L																																																																													
	2400-2483.5_802.11b_CH06_2437MHz																																																																													
ANT	1																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	<p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2389.25</td> <td>54.11</td> <td>74.00</td> <td>-19.89</td> <td>43.18</td> <td>27.49</td> <td>6.78</td> <td>33.34</td> <td>10.00</td> <td>386 248 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.25	54.11	74.00	-19.89	43.18	27.49	6.78	33.34	10.00	386 248 PEAK	<p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2437.00</td> <td>108.90</td> <td>-----</td> <td>-----</td> <td>97.77</td> <td>27.60</td> <td>6.04</td> <td>33.31</td> <td>10.00</td> <td>386 248 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2437.00	108.90	-----	-----	97.77	27.60	6.04	33.31	10.00	386 248 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2389.25	54.11	74.00	-19.89	43.18	27.49	6.78	33.34	10.00	386 248 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2437.00	108.90	-----	-----	97.77	27.60	6.04	33.31	10.00	386 248 PEAK																																																																					
Avg	<p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2388.49</td> <td>43.40</td> <td>54.00</td> <td>-10.60</td> <td>32.48</td> <td>27.48</td> <td>6.78</td> <td>33.34</td> <td>10.00</td> <td>386 248 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2388.49	43.40	54.00	-10.60	32.48	27.48	6.78	33.34	10.00	386 248 AVERAGE	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2437.00</td> <td>105.81</td> <td>-----</td> <td>-----</td> <td>94.68</td> <td>27.60</td> <td>6.04</td> <td>33.31</td> <td>10.00</td> <td>386 248 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2437.00	105.81	-----	-----	94.68	27.60	6.04	33.31	10.00	386 248 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2388.49	43.40	54.00	-10.60	32.48	27.48	6.78	33.34	10.00	386 248 AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2437.00	105.81	-----	-----	94.68	27.60	6.04	33.31	10.00	386 248 AVERAGE																																																																					





Mode	13																																														
	Band Edge - R																																														
	2400-2483.5_802.11b_CH06_2437MHz																																														
ANT	1																																														
Pol.	Vertical	Fundamental																																													
Peak	<p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2485.13</td> <td>54.52</td> <td>74.00</td> <td>-19.48</td> <td>43.19</td> <td>27.70</td> <td>6.91</td> <td>33.28</td> <td>10.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>386 248 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2485.13	54.52	74.00	-19.48	43.19	27.70	6.91	33.28	10.00									386 248 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2485.13	54.52	74.00	-19.48	43.19	27.70	6.91	33.28	10.00																																							
								386 248 PEAK																																							
Avg	<p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2484.82</td> <td>43.93</td> <td>54.00</td> <td>-10.07</td> <td>32.60</td> <td>27.70</td> <td>6.91</td> <td>33.28</td> <td>10.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>386 248 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.82	43.93	54.00	-10.07	32.60	27.70	6.91	33.28	10.00									386 248 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2484.82	43.93	54.00	-10.07	32.60	27.70	6.91	33.28	10.00																																							
								386 248 AVERAGE																																							







Mode	13																																																																																																																																													
	Harmonic																																																																																																																																													
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																													
ANT	1																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak																																																																																																																																														
Avg																																																																																																																																														
	<p>Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_230817 HORIZONTAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>53.00</td> <td>74.00</td> <td>-20.20</td> <td>68.23</td> <td>32.70</td> <td>11.45</td> <td>58.58</td> <td>0.00</td> <td>100</td> <td>287</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>51.88</td> <td>54.00</td> <td>-2.12</td> <td>66.31</td> <td>32.70</td> <td>11.45</td> <td>58.58</td> <td>0.00</td> <td>100</td> <td>287</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>44.01</td> <td>74.00</td> <td>-29.99</td> <td>50.61</td> <td>36.86</td> <td>14.58</td> <td>58.99</td> <td>0.95</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	53.00	74.00	-20.20	68.23	32.70	11.45	58.58	0.00	100	287	Peak	2	4874.00	51.88	54.00	-2.12	66.31	32.70	11.45	58.58	0.00	100	287	Average	3	7311.00	44.01	74.00	-29.99	50.61	36.86	14.58	58.99	0.95	--	--	Peak	<p>Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_230817 VERTICAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>50.49</td> <td>74.00</td> <td>-23.51</td> <td>64.92</td> <td>32.70</td> <td>11.45</td> <td>58.58</td> <td>0.00</td> <td>387</td> <td>69</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>48.24</td> <td>54.00</td> <td>-5.76</td> <td>62.67</td> <td>32.70</td> <td>11.45</td> <td>58.58</td> <td>0.00</td> <td>387</td> <td>69</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>44.37</td> <td>74.00</td> <td>-29.63</td> <td>50.97</td> <td>36.86</td> <td>14.58</td> <td>58.99</td> <td>0.95</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	50.49	74.00	-23.51	64.92	32.70	11.45	58.58	0.00	387	69	Peak	2	4874.00	48.24	54.00	-5.76	62.67	32.70	11.45	58.58	0.00	387	69	Average	3	7311.00	44.37	74.00	-29.63	50.97	36.86	14.58	58.99	0.95	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	4874.00	53.00	74.00	-20.20	68.23	32.70	11.45	58.58	0.00	100	287	Peak																																																																																																																																		
2	4874.00	51.88	54.00	-2.12	66.31	32.70	11.45	58.58	0.00	100	287	Average																																																																																																																																		
3	7311.00	44.01	74.00	-29.99	50.61	36.86	14.58	58.99	0.95	--	--	Peak																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	4874.00	50.49	74.00	-23.51	64.92	32.70	11.45	58.58	0.00	387	69	Peak																																																																																																																																		
2	4874.00	48.24	54.00	-5.76	62.67	32.70	11.45	58.58	0.00	387	69	Average																																																																																																																																		
3	7311.00	44.37	74.00	-29.63	50.97	36.86	14.58	58.99	0.95	--	--	Peak																																																																																																																																		







Mode	13	
	Harmonic	
	2400-2483.5_802.11b_CH06_2437MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 VERTICAL</p>
	17.7G ~18G Avg	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 HORIZONTAL</p>

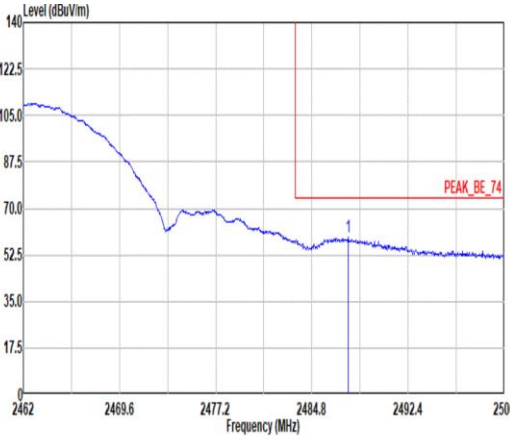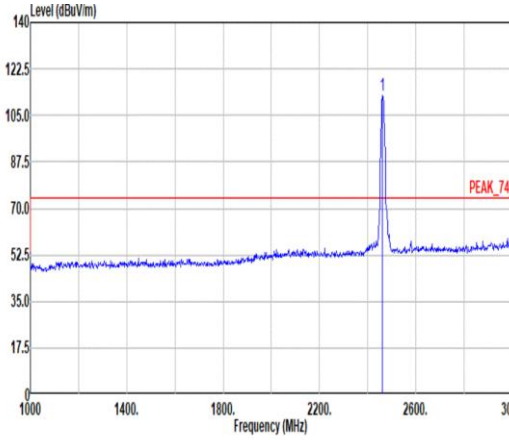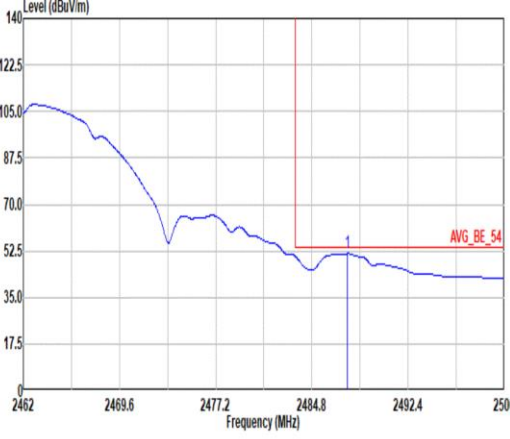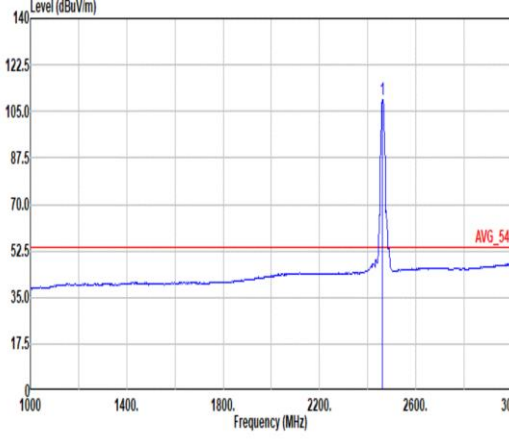

Mode	14																																																																															
	Band Edge																																																																															
	2400-2483.5_802.11b_CH11_2462MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2487.69</td> <td>59.26</td> <td>74.00</td> <td>-14.74</td> <td>47.92</td> <td>27.70</td> <td>6.92</td> <td>33.28</td> <td>10.00</td> <td>130</td> <td>35 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2487.69	59.26	74.00	-14.74	47.92	27.70	6.92	33.28	10.00	130	35 PEAK	 <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2462.00</td> <td>112.42</td> <td>-----</td> <td>-----</td> <td>101.31</td> <td>27.52</td> <td>6.88</td> <td>33.29</td> <td>10.00</td> <td>130</td> <td>35 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	112.42	-----	-----	101.31	27.52	6.88	33.29	10.00	130	35 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2487.69	59.26	74.00	-14.74	47.92	27.70	6.92	33.28	10.00	130	35 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2462.00	112.42	-----	-----	101.31	27.52	6.88	33.29	10.00	130	35 PEAK																																																																						
Avg	 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2487.61</td> <td>51.55</td> <td>54.00</td> <td>-2.45</td> <td>40.21</td> <td>27.70</td> <td>6.92</td> <td>33.28</td> <td>10.00</td> <td>130</td> <td>35 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2487.61	51.55	54.00	-2.45	40.21	27.70	6.92	33.28	10.00	130	35 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2462.00</td> <td>109.31</td> <td>-----</td> <td>-----</td> <td>98.20</td> <td>27.52</td> <td>6.88</td> <td>33.29</td> <td>10.00</td> <td>130</td> <td>35 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	109.31	-----	-----	98.20	27.52	6.88	33.29	10.00	130	35 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2487.61	51.55	54.00	-2.45	40.21	27.70	6.92	33.28	10.00	130	35 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2462.00	109.31	-----	-----	98.20	27.52	6.88	33.29	10.00	130	35 AVERAGE																																																																						

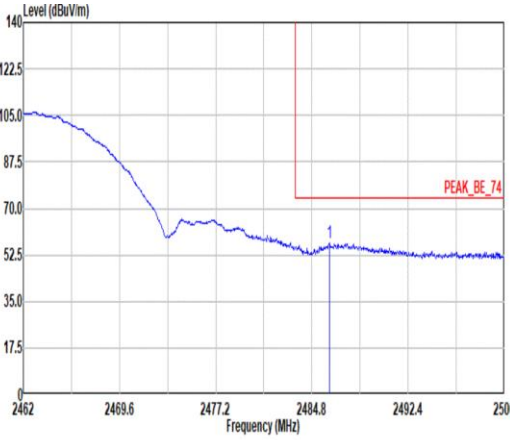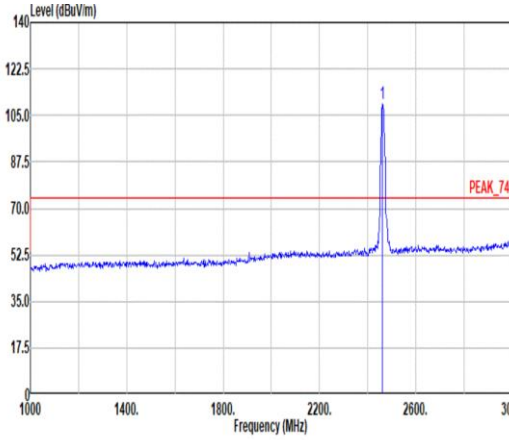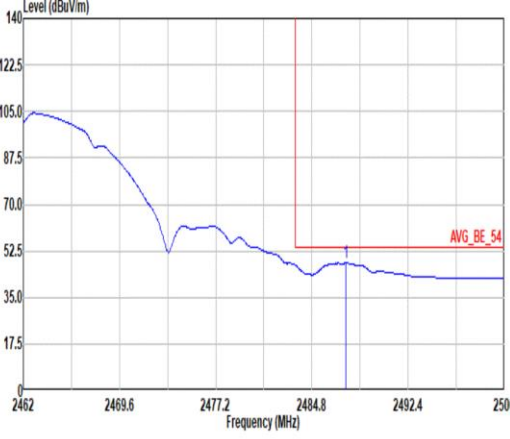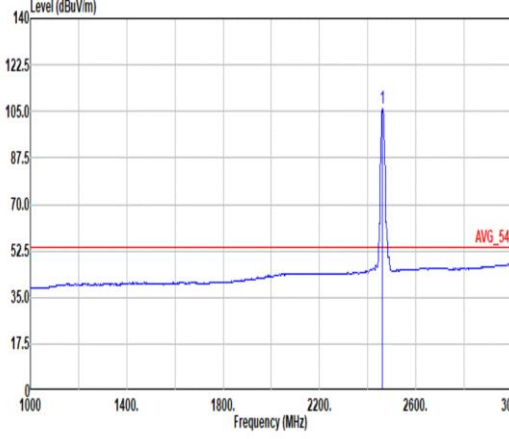

Mode	14																																																																																					
	Band Edge																																																																																					
	2400-2483.5_802.11b_CH11_2462MHz																																																																																					
ANT	1																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) showing a peak at 2486.21 MHz. A red line indicates the limit at 74.00 dBuV/m. The peak is labeled PEAK_BE_74.</p> <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.21</td> <td>56.93</td> <td>74.00</td> <td>-17.07</td> <td>45.60</td> <td>27.70</td> <td>6.91</td> <td>33.28</td> <td>10.00</td> <td>380</td> <td>192</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2486.21	56.93	74.00	-17.07	45.60	27.70	6.91	33.28	10.00	380	192	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) showing a peak at 2462.00 MHz. A red line indicates the limit at 109.17 dBuV/m. The peak is labeled PEAK_74.</p> <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>109.17</td> <td>-----</td> <td>-----</td> <td>98.06</td> <td>27.52</td> <td>6.88</td> <td>33.29</td> <td>10.00</td> <td>380</td> <td>192</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	109.17	-----	-----	98.06	27.52	6.88	33.29	10.00	380	192	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2486.21	56.93	74.00	-17.07	45.60	27.70	6.91	33.28	10.00	380	192	PEAK																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2462.00	109.17	-----	-----	98.06	27.52	6.88	33.29	10.00	380	192	PEAK																																																																										
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) showing an average level at 2486.50 MHz. A red line indicates the limit at 54.00 dBuV/m. The average is labeled AVG_BE_54.</p> <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.50</td> <td>47.90</td> <td>54.00</td> <td>-6.10</td> <td>36.56</td> <td>27.70</td> <td>6.92</td> <td>33.28</td> <td>10.00</td> <td>380</td> <td>192</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2486.50	47.90	54.00	-6.10	36.56	27.70	6.92	33.28	10.00	380	192	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) showing an average level at 2462.00 MHz. A red line indicates the limit at 106.06 dBuV/m. The average is labeled AVG_54.</p> <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>106.06</td> <td>-----</td> <td>-----</td> <td>94.95</td> <td>27.52</td> <td>6.88</td> <td>33.29</td> <td>10.00</td> <td>380</td> <td>192</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	106.06	-----	-----	94.95	27.52	6.88	33.29	10.00	380	192	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2486.50	47.90	54.00	-6.10	36.56	27.70	6.92	33.28	10.00	380	192	AVERAGE																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2462.00	106.06	-----	-----	94.95	27.52	6.88	33.29	10.00	380	192	AVERAGE																																																																										



Mode	14																																																																																																																																					
	Harmonic																																																																																																																																					
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																					
ANT	1																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_230817 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>53.04</td> <td>74.00</td> <td>-20.96</td> <td>67.29</td> <td>32.84</td> <td>11.53</td> <td>58.62</td> <td>0.00</td> <td>122</td> <td>54</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4924.00</td> <td>51.29</td> <td>54.00</td> <td>-2.71</td> <td>65.54</td> <td>32.84</td> <td>11.53</td> <td>58.62</td> <td>0.00</td> <td>122</td> <td>54</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7386.00</td> <td>44.31</td> <td>74.00</td> <td>-29.69</td> <td>51.22</td> <td>36.48</td> <td>14.61</td> <td>58.94</td> <td>0.94</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4924.00	53.04	74.00	-20.96	67.29	32.84	11.53	58.62	0.00	122	54	Peak	2	4924.00	51.29	54.00	-2.71	65.54	32.84	11.53	58.62	0.00	122	54	Average	3	7386.00	44.31	74.00	-29.69	51.22	36.48	14.61	58.94	0.94	--	--	Peak	<p>Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_230817 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>49.00</td> <td>74.00</td> <td>-24.20</td> <td>64.05</td> <td>32.84</td> <td>11.53</td> <td>58.62</td> <td>0.00</td> <td>375</td> <td>79</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4924.00</td> <td>47.83</td> <td>54.00</td> <td>-6.17</td> <td>62.08</td> <td>32.84</td> <td>11.53</td> <td>58.62</td> <td>0.00</td> <td>375</td> <td>79</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7386.00</td> <td>43.22</td> <td>74.00</td> <td>-30.78</td> <td>50.13</td> <td>36.48</td> <td>14.61</td> <td>58.94</td> <td>0.94</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4924.00	49.00	74.00	-24.20	64.05	32.84	11.53	58.62	0.00	375	79	Peak	2	4924.00	47.83	54.00	-6.17	62.08	32.84	11.53	58.62	0.00	375	79	Average	3	7386.00	43.22	74.00	-30.78	50.13	36.48	14.61	58.94	0.94	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	4924.00	53.04	74.00	-20.96	67.29	32.84	11.53	58.62	0.00	122	54	Peak																																																																																																																										
2	4924.00	51.29	54.00	-2.71	65.54	32.84	11.53	58.62	0.00	122	54	Average																																																																																																																										
3	7386.00	44.31	74.00	-29.69	51.22	36.48	14.61	58.94	0.94	--	--	Peak																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	4924.00	49.00	74.00	-24.20	64.05	32.84	11.53	58.62	0.00	375	79	Peak																																																																																																																										
2	4924.00	47.83	54.00	-6.17	62.08	32.84	11.53	58.62	0.00	375	79	Average																																																																																																																										
3	7386.00	43.22	74.00	-30.78	50.13	36.48	14.61	58.94	0.94	--	--	Peak																																																																																																																										