



## FCC 47 CFR PART 15 SUBPART E

for

**Tablet Computer**

**Model: A8002**

**Marketing name: B3-A50FHD**

**Brand: acer**

**Test Report Number:**

**C180326Z01-RP1-4**

**Issued Date: April 26, 2018**

Issued for

**Acer Incorporated**

**8F, 88, Sec 1, Xintai 5th Rd. Xizhi, New Taipei City 221 Taiwan, R.O.C**

Issued by:

**Compliance Certification Services (Shenzhen) Inc.**

No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd.,

Guan Lan Town, Baoan District, Shenzhen, China

TEL: 86-755-28055000

FAX: 86-755-28055221

E-Mail: service@ccssz.com



中国认可  
国际互认  
检测  
TESTING  
CNAS L4818



Certificate Number: 2861.01

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The TEST RESULTS in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	April 26, 2018	Initial Issue	ALL	Sinphy Xie



**TABLE OF CONTENTS**

**1. TEST CERTIFICATION ..... 4**

**2. EUT DESCRIPTION ..... 5**

**3. TEST METHODOLOGY..... 9**

    3.1 EUT CONFIGURATION ..... 9

    3.2 EUT EXERCISE ..... 9

    3.3 GENERAL TEST PROCEDURES ..... 9

    3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS ..... 10

    3.5 DESCRIPTION OF TEST MODES ..... 11

**4. SETUP OF EQUIPMENT UNDER TEST ..... 15**

    4.1 DESCRIPTION OF SUPPORT UNITS..... 15

    4.2 CONFIGURATION OF SYSTEM UNDER TEST ..... 15

**5. FACILITIES AND ACCREDITATIONS ..... 16**

    5.1 FACILITIES ..... 16

    5.2 EQUIPMENT ..... 16

    5.3 ACCREDITATIONS ..... 16

    5.4 MEASUREMENT UNCERTAINTY ..... 17

**6. FCC PART 15 REQUIREMENTS ..... 18**

    6.1 26dB EMISSION BANDWIDTH ..... 18

    6.2 6dB BANDWIDTH MEASUREMENT ..... 39

    6.3 ANTENNA GAIN ..... 47

    6.4 PEAK POWER ..... 49

    6.5 BAND EDGES MEASUREMENT ..... 58

    6.6 PEAK POWER SPECTAL DENSITY ..... 76

    6.7 RADIATED UNDESIRABLE EMISSION ..... 102

    6.8 CONDUCTED UNDESIRABLE EMISSION ..... 150

    6.9 POWERLINE CONDUCTED EMISSIONS ..... 166

    6.10 FREQUENCY STABILITY ..... 172



## 1. TEST CERTIFICATION

<b>Product</b>	Tablet Computer
<b>Model</b>	A8002
<b>Marketing name</b>	B3-A50FHD
<b>Brand</b>	acer
<b>Tested</b>	March 26~April 26, 2018
<b>Applicant</b>	<b>Acer Incorporated</b> 8F, 88, Sec 1, Xintai 5th Rd. Xizhi, New Taipei City 221 Taiwan, R.O.C
<b>Manufacturer</b>	<b>Acer Incorporated</b> 8F, 88, Sec 1, Xintai 5th Rd. Xizhi, New Taipei City 221 Taiwan, R.O.C

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart E	No non-compliance noted

### We hereby certify that:

Compliance Certification Services (Shenzhen) Inc. tested the above equipment. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.10: 2013** and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407、FCC 14-30.

The TEST RESULTS of this report relate only to the tested sample identified in this report.

**Approved by:**

Saber Huang  
Supervisor of EMC Dept.  
Compliance Certification Services (Shenzhen)  
Inc.

**Reviewed by:**

Nancy Fu  
Supervisor of Report Dept.  
Compliance Certification Services (Shenzhen)  
Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	Tablet Computer	
<b>Model Number</b>	A8002	
<b>Marketing name</b>	B3-A50FHD	
<b>Brand</b>	acer	
<b>Model Discrepancy</b>	N/A	
<b>Serial Number</b>	C180326Z01-RP1-4	
<b>Received Date</b>	March 26, 2018	
<b>Power Supply</b>	DC5.35V or DC5.2V supplied by the Adapter or DC3.7V supplied by the battery	
<b>Adapter Specification</b>	<p><b>Adapter 1:</b> DELTA ELECTRONICS, INC. MODEL: ADP-10HW A INPUT: 100-240Vac 0.4A 50/60Hz OUTPUT: 5.35Vdc 2A</p> <p><b>Adapter 2:</b> LITE-ON TECHNOLOGY (CHANGZHOU)CO., LTD. MODEL: PA-1100-25 INPUT: 100-240Vac 0.3A 50/60Hz OUTPUT: 5.2Vdc 2.0A</p>	
<b>Rechargeable Polymer Battery Specification</b>	<b>Li-ion Pack</b>	<p><b>Battery 1:</b> TCL Hyperpower Batteries Inc. Model: PR-279594N(1ICP3/95/94-2) Rating: 3.7V Charge Limited Voltage: 4.2V Rated Capacity: 6000mAh Rated Power: 22.2Wh</p> <p><b>Battery 2:</b> Huizhou Highpower Technology Co.,LTD Model: HPP279594AB(1ICP3/95/94-2) Rating: 3.7V Charge Limited Voltage: 4.2V Rated Capacity/ Rated Power: Nominal 6100mAh/22.57Wh Minimum 6000mAh/22.20Wh</p>
<b>USB-Micro USB cable</b>	<p><b>Cable 1:</b> Baisitai Unshielded, 0.80m</p> <p><b>Cable 2:</b> Haoxin Unshielded, 0.80m</p>	
<b>Frequency Range</b>	<p>UNII Band I: IEEE 802.11a, 802.11n HT20 : 5180MHz ~ 5240MHz; IEEE 802.11n HT40: 5190MHz ~ 5230MHz IEEE 802.11ac 80: 5210MHz</p> <p>UNII Band II IEEE 802.11a, 802.11n HT20 : 5260MHz ~ 5320MHz IEEE 802.11n HT40: 5270MHz ~ 5310MHz IEEE 802.11ac 80: 5290MHz</p> <p>UNII Band III IEEE 802.11a, 802.11n HT20 : 5500MHz ~ 5700MHz IEEE 802.11n HT40: 5510MHz ~ 5670MHz IEEE 802.11ac 80: 5530MHz</p>	



	UNII Band IV IEEE 802.11a, 802.11n HT20 : 5745MHz ~ 5825MHz IEEE 802.11n HT40: 5755MHz ~ 5795MHz IEEE 802.11ac 80: 5775MHz
<b>Transmit Power</b>	UNII Band I: IEEE 802.11a: 15.25 dBm IEEE 802.11n HT 20: 15.07 dBm IEEE 802.11n HT 40: 15.64 dBm IEEE 802.11ac 80: 15.53 dBm UNII Band II IEEE 802.11a: 15.15 dBm IEEE 802.11n HT 20: 14.87 dBm IEEE 802.11n HT 40: 15.29 dBm IEEE 802.11ac 80: 15.18 dBm UNII Band III IEEE 802.11a: 13.43 dBm IEEE 802.11n HT 20: 13.29 dBm IEEE 802.11n HT 40: 13.45 dBm IEEE 802.11ac 80: 13.67 dBm UNII Band IV IEEE 802.11a: 12.32 dBm IEEE 802.11n HT 20: 12.04 dBm IEEE 802.11n HT 40: 12.25 dBm IEEE 802.11ac 80: 12.22 dBm
<b>Modulation Technique</b>	OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
<b>Transmit Data Rate</b>	IEEE 802.11a mode: 48, 36, 24, 18, 12, 9, 6Mbps IEEE802.11n HT20MHz mode: 6.5,13,19.5,26,39,52,58.5,65Mbps IEEE802.11n HT40MHz mode: 13.5,27,40.5,54,81,108,121.5,135Mbps IEEE802.11ac 80 mode: 29.3,58.5,84.8,117,175.5,234,263.3, 292.5,351,390Mbps
<b>Number of Channels</b>	UNII Band I: IEEE 802.11a, 802.11n HT20 : 4 Channels IEEE 802.11n HT40 : 2 Channels IEEE 802.11ac 80: 1 Channel UNII Band II IEEE 802.11a, 802.11n HT20 : 4 Channels IEEE 802.11n HT40: 2 Channels IEEE 802.11ac 80: 1 Channel UNII Band III IEEE 802.11a, 802.11n HT20 : 8 Channels IEEE 802.11n HT 40: 3 Channels IEEE 802.11ac 80: 1 Channels UNII Band IV IEEE 802.11a, 802.11n HT20 : 5 Channels IEEE 802.11n HT 40: 2 Channels IEEE 802.11ac 80: 1 Channel
<b>Antenna Specification</b>	FPC Antenna with 1.98dBi gain (Max)
<b>Channels Spacing</b>	IEEE 802.11a, 802.11n HT20 : 20MHz IEEE 802.11n HT40: 40MHz IEEE 802.11ac 80: 80MHz



<b>Temperature Range</b>	0°C ~ +35°C
<b>Hardware Version</b>	A10H3_MB_V1.2
<b>Software Version</b>	Acer_AV000_B3-A50FHD_RV00RB00_WW_GEN1

**Note:** 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.



**Operation Frequency:**

UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII)	
CHANNEL	MHz
36	5180
38	5190
40	5200
42	5210
44	5220
46	5230
48	5240
52	5260
54	5270
56	5280
58	5290
60	5300
62	5310
64	5320
100	5500
102	5510
104	5520
106	5530
108	5540
110	5550
112	5560
116	5580
132	5660
134	5670
136	5680
140	5700
149	5745
151	5755
153	5765
155	5775
157	5785
159	5795
161	5805
165	5825

*Remark:*

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for **FCC ID: HLZA8002** filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules and FCC 14-30.





### 3. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC CFR 47 Part 15.207, 15.209, 15.407 and FCC 14-30.

Radio testing was performed according to KDB DA 02-2138、KDB 789033 D02、KDB 905462 D06;

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

#### 3.2 EUT EXERCISE

The EUT is operated in the engineering mode to fix the TX frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

#### 3.3 GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is positioned at 0.8 m above the ground plane. According to the requirements in Section 6.2 of ANSI C63.10, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

##### Radiated Emissions

The EUT is placed on the turntable, which is 0.8 m (below 1GHz) /1.5m (Above 1GHz) above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.4 to Section 6.6 of ANSI C63.10.



### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



### 3.5 DESCRIPTION OF TEST MODES

The EUT is a 1x1 configuration spatial (1TX & 1RX) without beam forming function. Use “EngineerMode” to control the EUT for staying in continuous transmitting mode was programmed.

Test Item	Test mode	Worse mode
<b>All test modes are tested in the following test environments [WiFi worst(2.4G/5G) Link +BT Link +GPS/Glonass Link]</b>		
Conducted Emission	Mode 1: Charge(Adapter 1+Cable 1+Battery 1)+Play Video (USB2.0)(AC120V/60Hz)	<input type="checkbox"/>
	Mode 2: Charge(Adapter 1+Cable 2+Battery 1)+Play Video (USB2.0) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 3: Charge(Adapter 2+Cable 1+Battery 1)+Play Video(USB2.0)(AC120V/60Hz)	<input type="checkbox"/>
	Mode 4: Charge(Adapter 2+Cable 2+Battery 1)+Play Video(USB2.0)(AC120V/60Hz)	<input checked="" type="checkbox"/>
	Mode 5: Charge(Adapter 1+Cable 1+Battery 1)+ Record Video(TF Card) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 6: Charge(Adapter 1+Cable 2+Battery 1)+ Record Video(TF Card) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 7: Charge(Adapter 2+Cable 1+Battery 1)+Record Video (TF Card) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 8: Charge(Adapter 2+Cable 2+Battery 1)+Record Video (TF Card) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 9: Charge(Adapter 1+Cable 1+Battery 2)+Play Video(USB2.0) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 10: Charge(Adapter 1+Cable 2+Battery 2)+Play Video(USB2.0) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 11: Charge(Adapter 2+Cable 1+Battery 2)+Play Video(USB2.0)(AC120V/60Hz)	<input type="checkbox"/>
	Mode 12: Charge(Adapter 2+Cable 2+Battery 2)+Play Video(USB2.0)(AC120V/60Hz)	<input type="checkbox"/>
	Mode 13: Charge(Adapter 1+Cable 1+Battery 2)+Record Video(TF Card) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 14: Charge(Adapter 1+Cable 2+Battery 2)+Record Video(TF Card) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 15: Charge(Adapter 2+Cable 1+ Battery 2)+ Record Video (TF Card) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 16: Charge(Adapter 2+Cable 2+ Battery 2)+ Record Video (TF Card) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 17: Charge(Adapter 1+Cable 1+Battery 1)+Play Video (USB2.0)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 18: Charge(Adapter 1+Cable 2+Battery 1)+Play Video (USB2.0) (AC240V/50Hz)	<input type="checkbox"/>
	Mode 19: Charge(Adapter 2+Cable 1+Battery 1)+Play Video(USB2.0)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 20: Charge(Adapter 2+Cable 2+Battery 1)+Play Video(USB2.0)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 21: Charge(Adapter 1+Cable 1+Battery 1)+ Record Video(TF Card)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 22: Charge(Adapter 1+Cable 2+Battery 1)+ Record Video(TF Card)(AC240V/50Hz)	<input checked="" type="checkbox"/>
	Mode 23: Charge(Adapter 2+Cable 1+Battery 1)+Record Video (TF Card)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 24: Charge(Adapter 2+Cable 2+Battery 1)+Record Video (TF Card)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 25: Charge(Adapter 1+Cable 1+Battery 2)+Play Video(USB2.0) (AC240V/50Hz)	<input type="checkbox"/>



Conducted Emission	Mode 26: Charge(Adapter 1+Cable 2+Battery 2)+Play Video(USB2.0)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 27: Charge(Adapter 2+Cable 1+Battery 2)+Play Video(USB2.0)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 28: Charge(Adapter 2+Cable 2+Battery 2)+Play Video(USB2.0)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 29: Charge(Adapter 1+Cable 1+Battery 2)+Record Video(TF Card)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 30: Charge(Adapter 1+Cable 2+Battery 2)+Record Video(TF Card)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 31: Charge(Adapter 2+Cable 1+ Battery 2)+ Record Video (TF Card)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 32: Charge(Adapter 2+Cable 2+ Battery 2)+ Record Video (TF Card)(AC240V/50Hz)	<input type="checkbox"/>
Radiated Emission	Mode 1: Continuously Transmitting	<input checked="" type="checkbox"/>

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.



**UNII Band I:**

**IEEE 802.11a for 5180 ~ 5240MHz:**

Channel Low (5180MHz), Channel Mid (5200MHz) and Channel High (5240MHz) with 6Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 20 MHz for 5180 ~ 5240MHz:**

Channel Low (5180MHz), Channel Mid (5200MHz) and Channel High (5240MHz) with 6.5Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 40 MHz Channel for 5190 ~ 5230MHz:**

Channel Low (5190MHz) and Channel High (5230MHz) with 13.5Mbps data rate were chosen for full testing.

**IEEE 802.11ac 80 Channel for 5210MHz:**

Channel Low (5210MHz) with 13.5Mbps data rate were chosen for full testing.

**UNII Band II:**

**IEEE 802.11a for 5260 ~ 5320MHz:**

Channel Low (5260MHz), Channel Mid (5300MHz) and Channel High (5320MHz) with 6Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 20 MHz for 5260 ~ 5320MHz:**

Channel Low (5260MHz), Channel Mid (5300MHz) and Channel High (5320MHz) with 6.5Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 40 MHz Channel for 5270~ 5310MHz:**

Channel Low (5270MHz) and Channel High (5310MHz) with 13.5Mbps data rate were chosen for full testing.

**IEEE 802.11ac 80 Channel for 5290MHz:**

Channel Low (5290MHz) with 13.5Mbps data rate were chosen for full testing.



**UNII Band III:**

**IEEE 802.11a for 5500 ~ 5700MHz:**

Channel Low (5500MHz), Channel Mid (5580MHz) and Channel High (5700MHz) with 6Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 20 MHz for 5500 ~ 5700MHz:**

Channel Low (5500MHz), Channel Mid (5580MHz) and Channel High (5700MHz) with 6.5Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 40 MHz Channel for 5510 ~ 5670MHz:**

Channel Low (5510MHz) and Channel High (5670MHz) with 13.5Mbps data rate were chosen for full testing.

**IEEE 802.11ac 80 Channel for 5530MHz:**

Channel Low (5530MHz) with 13.5Mbps data rate were chosen for full testing.

**UNII Band IV:**

**IEEE 802.11a for 5745 ~ 5825MHz:**

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 6Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 20 MHz for 5745 ~ 5825MHz:**

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 6.5Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 40 MHz Channel for 5755~ 5795MHz:**

Channel Low (5755MHz) and Channel High (5795MHz) with 13.5Mbps data rate were chosen for full testing.

**IEEE 802.11ac 80 Channel for 5775MHz:**

Channel Low (5775MHz) with 13.5Mbps data rate were chosen for full testing.



## 4. SETUP OF EQUIPMENT UNDER TEST

### 4.1 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	TF Card	MB-MP 16DA	N/A	N/A	SAMSUNG	N/A	N/A
2	Earphone	G-3	N/A	DoC	GSG	Unshielded 1.00m	N/A
3	Notebook	Thinkpad S2	SL10K92342	DoC	LENOVO	N/A	Unshielded 1.00m (AC cable) Shielded 1.80m (DC cable)

**Note:**

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 4.2 CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at **No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.10, ANSI C63.7 and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5.3 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

<b>USA</b>	<b>A2LA</b>
<b>China</b>	<b>CNAS</b>

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

<b>USA</b>	<b>FCC</b>
<b>Japan</b>	<b>VCCI(C-3478, R-3135, T-652, G-10624)</b>
<b>Canada</b>	<b>INDUSTRY CANADA</b>

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccssz.com>





#### 5.4 MEASUREMENT UNCERTAINTY

Parameter	Uncertainty
RF frequency	+/-1 * 10 <sup>-5</sup>
RF power conducted	+/- 1,5 dB
RF power radiated	+/- 6 dB
Spurious emissions, conducted	+/- 3 dB
Spurious emissions, radiated	+/- 6 dB
Humidity	+/- 5 %
Temperature	+/- 1°C
Time	+/-10 %

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## 6. FCC PART 15 REQUIREMENTS

### 6.1 26dB EMISSION BANDWIDTH

#### 6.1.1 LIMIT


According to §15.403(c), for purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Compliance with the emissions limits is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

#### 6.1.2 MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019

*Remark: Each piece of equipment is scheduled for calibration once a year.*

#### 6.1.3 TEST CONFIGURATION



#### 6.1.4 TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW > 1%EBW, VBW > RBW, Span >26dB bandwidth, Detector = Peak, and Sweep = auto.
4. Mark the peak frequency and -26dB (upper and lower) frequency.
5. Repeat until all the rest channels were investigated.



### 6.1.5 TEST RESULTS

*No non-compliance noted*

#### **Test Data**

**Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)
Low	5180	18.44
Mid	5200	18.90
High	5240	18.91

**Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)
Low	5260	18.94
Mid	5300	19.16
High	5320	18.63

**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)
Low	5500	18.93
Mid	5580	19.14
High	5700	18.83



**Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)
Low	5180	19.42
Mid	5200	19.60
High	5240	19.76

**Test mode: IEEE 802.11n HT 20 MHz mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)
Low	5260	19.61
Mid	5300	19.61
High	5320	19.46

**Test mode: IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz**

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)
Low	5500	19.52
Mid	5580	19.71
High	5700	19.73



**Test mode: IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz**

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)
Low	5190	38.65
High	5230	38.95

**Test mode: IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz**

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)
Low	5270	38.78
High	5310	38.96

**Test mode: IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz**

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)
Low	5510	38.77
Mid	5550	38.64
High	5670	38.47



**Test mode: IEEE 802.11ac 80 mode / 5210MHz**

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)
	5210	79.47

**Test mode: IEEE 802.11ac 80 mode / 5290MHz**



Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)
	5290	79.49


**Test mode: IEEE 802.11ac 80 mode / 5530MHz**

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)
	5530	79.78




Test Plot

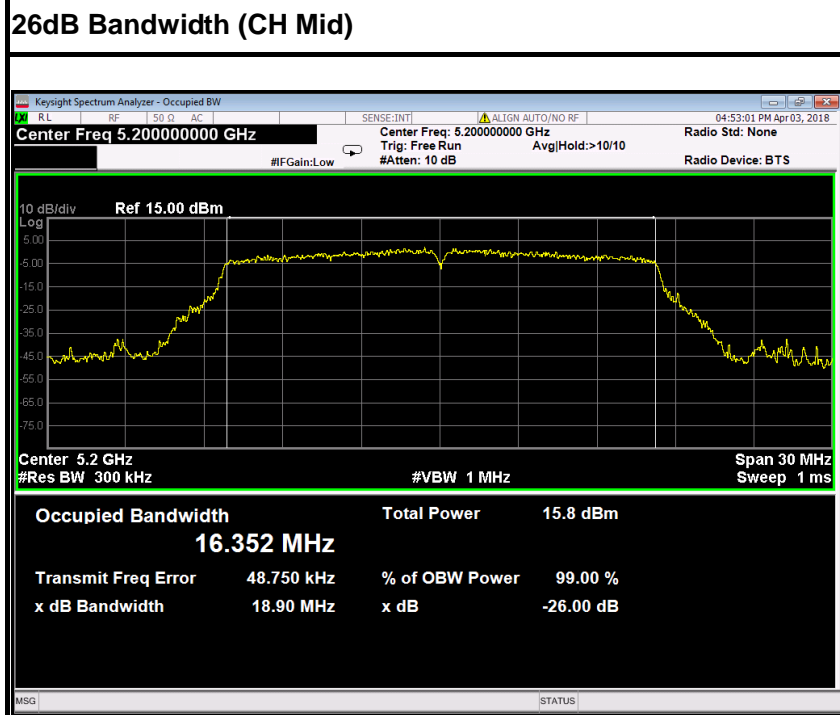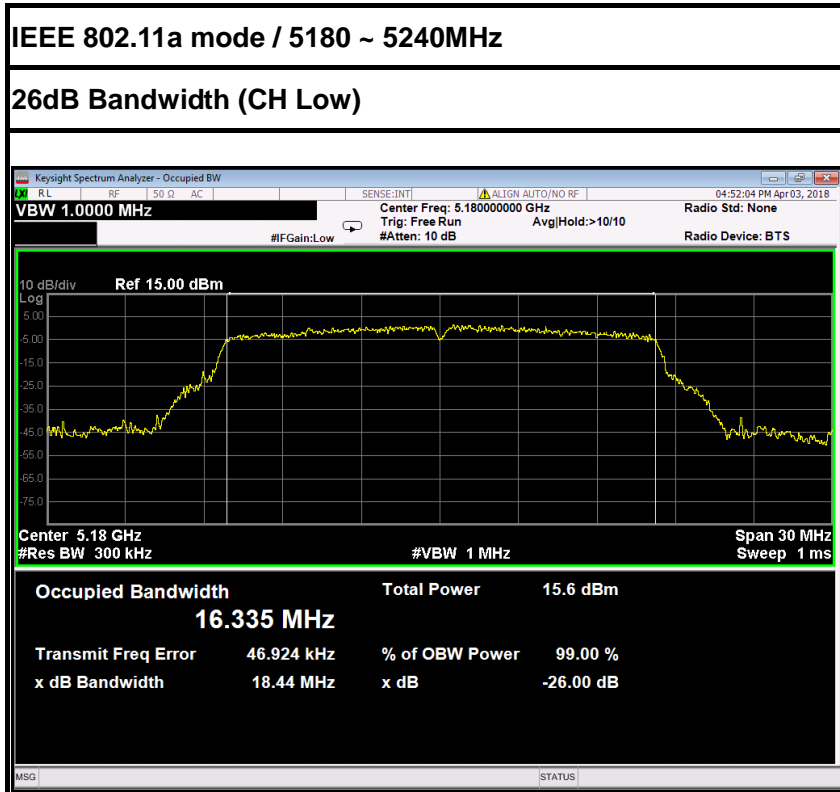

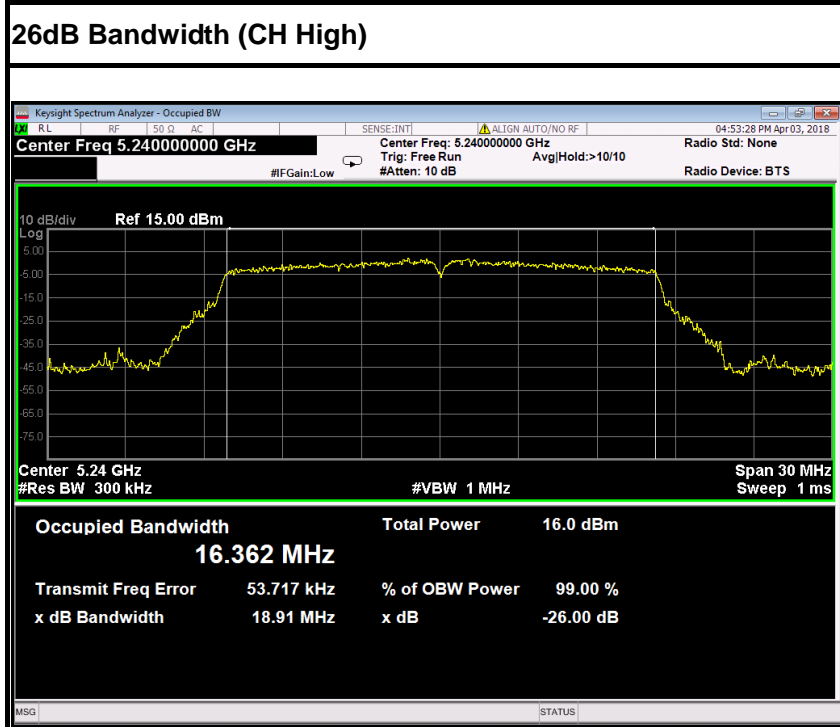


### IEEE 802.11a mode / 5260~ 5320MHz

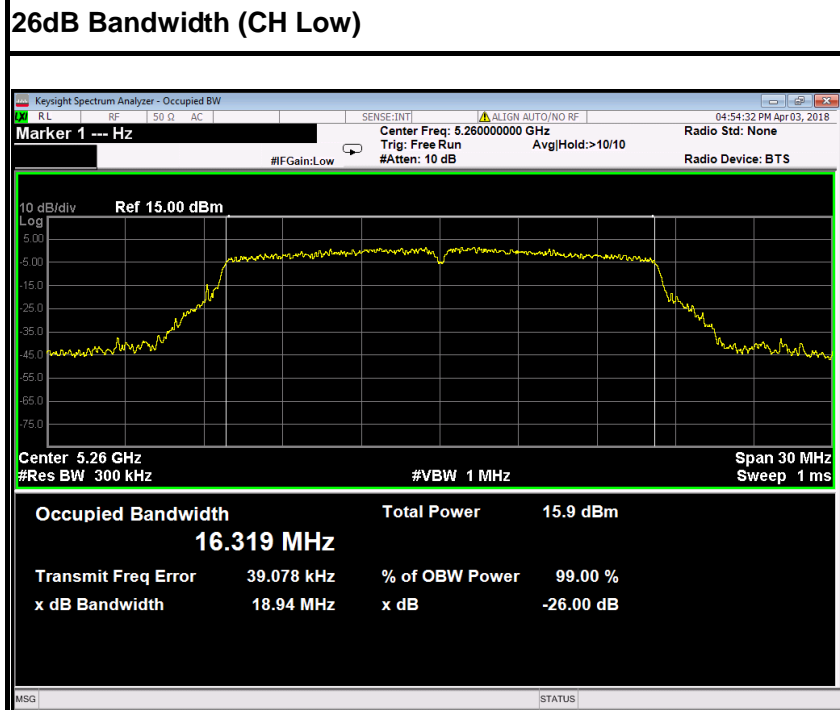






### 26dB Bandwidth (CH Mid)

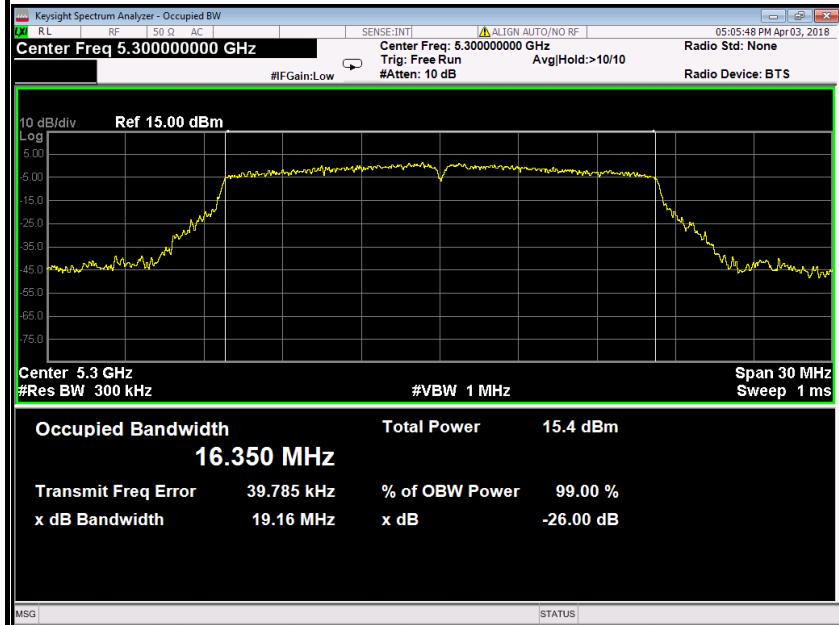


### 26dB Bandwidth (CH High)

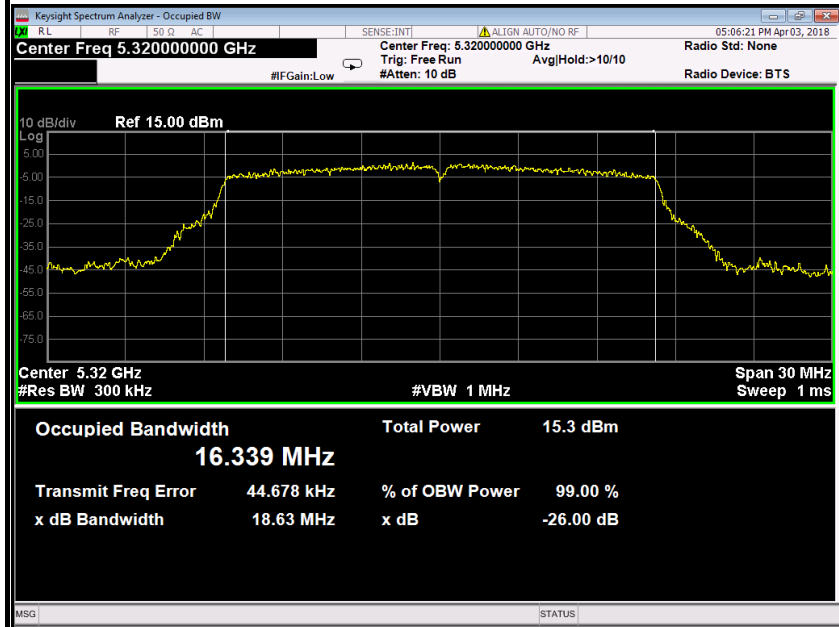





IEEE 802.11a mode / 5500 ~ 5700MHz

26dB Bandwidth (CH Low)

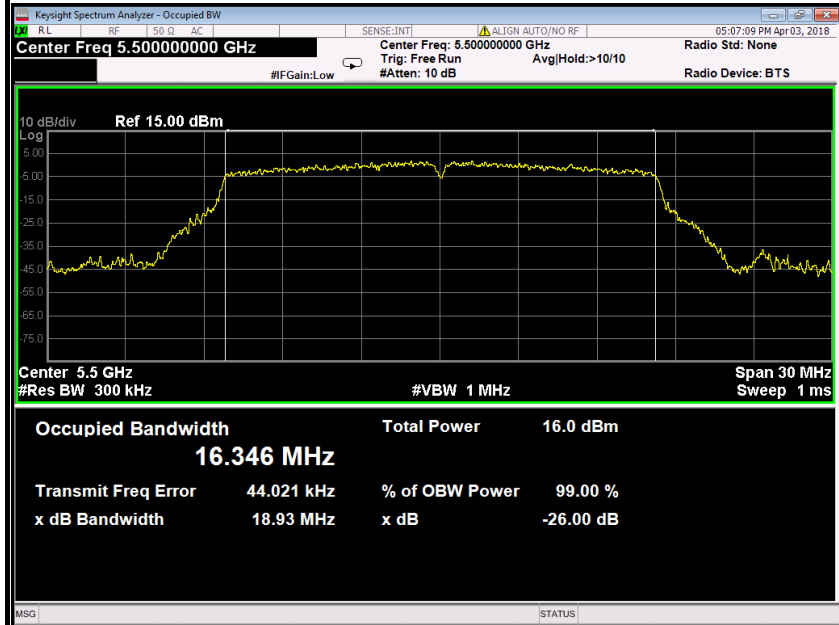

26dB Bandwidth (CH Mid)

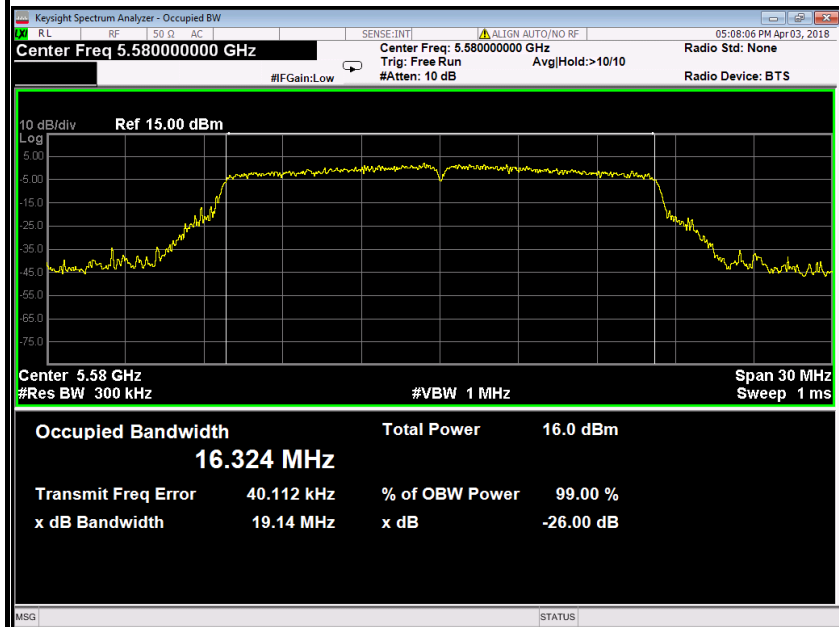


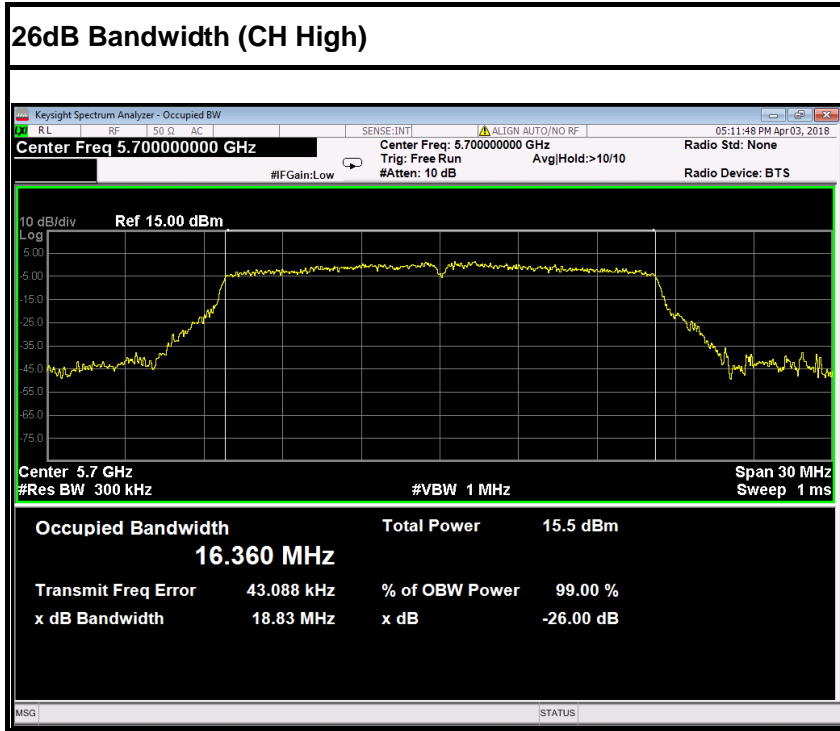





IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz

26dB Bandwidth (CH Low)

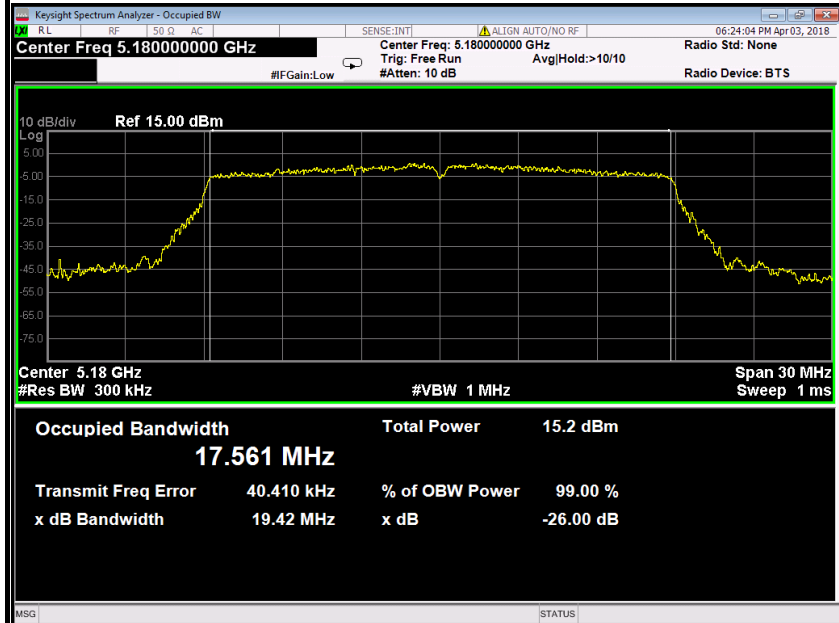


26dB Bandwidth (CH Mid)

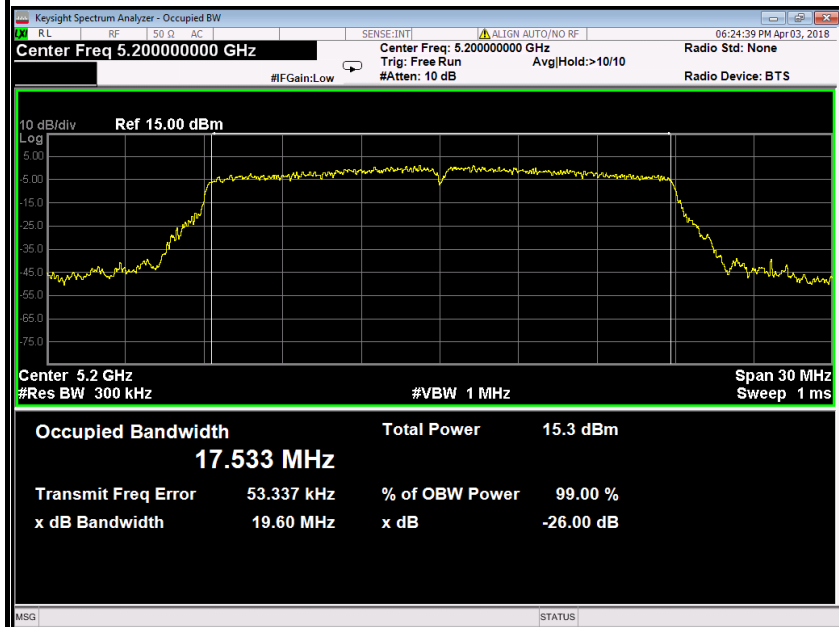

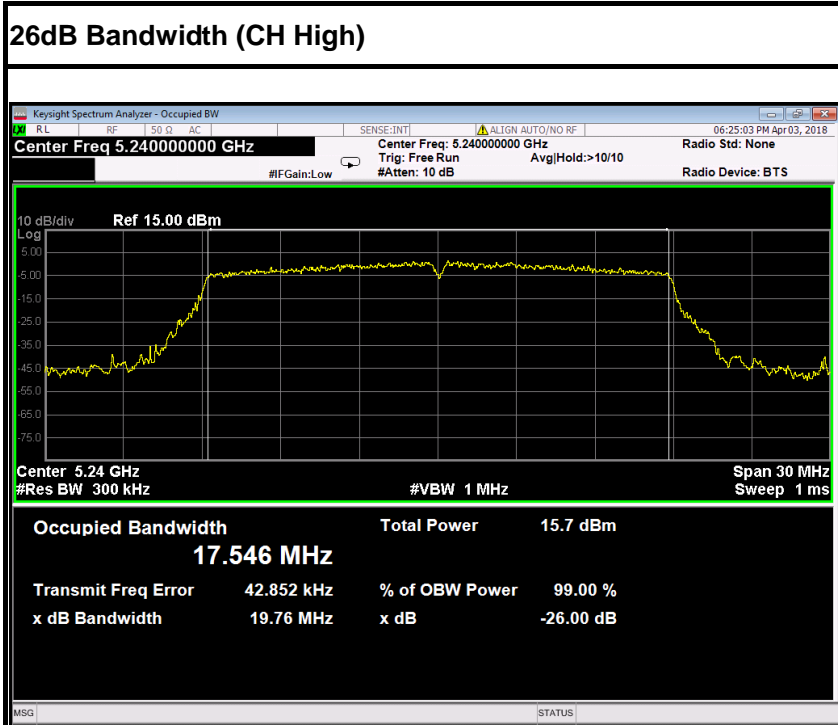


### IEEE 802.11n HT 20 MHz mode / 5260~ 5320MHz

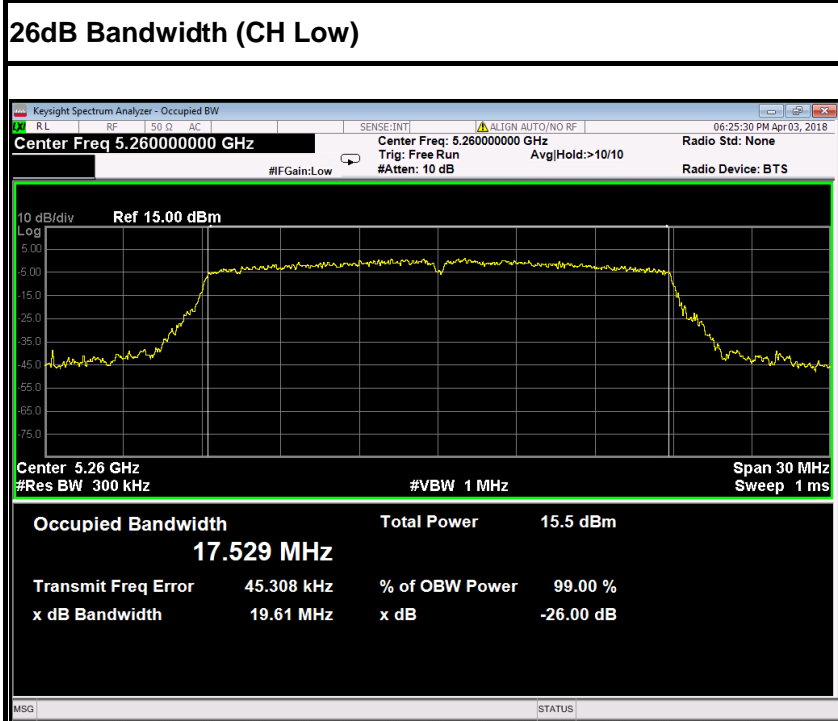




### 26dB Bandwidth (CH Mid)

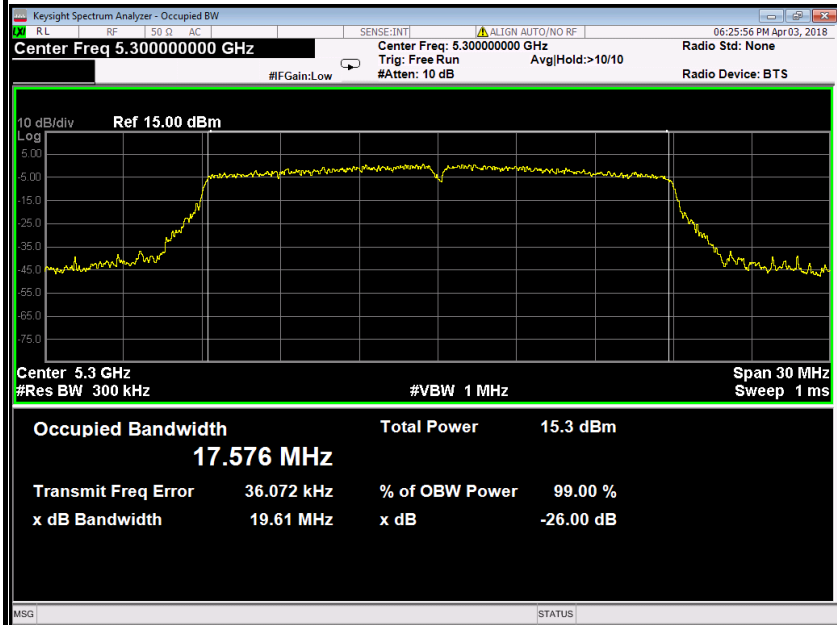


### 26dB Bandwidth (CH High)

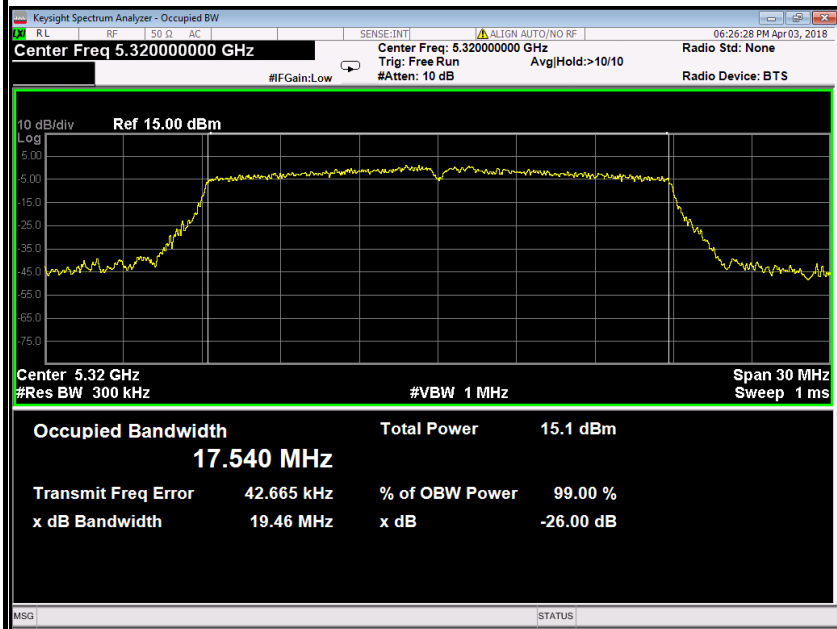





IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz

26dB Bandwidth (CH Low)

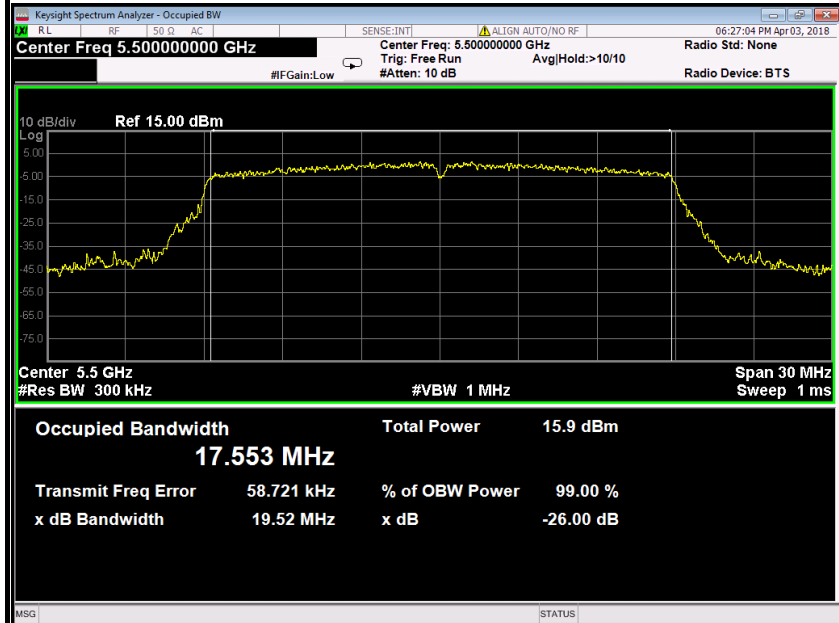

26dB Bandwidth (CH Mid)

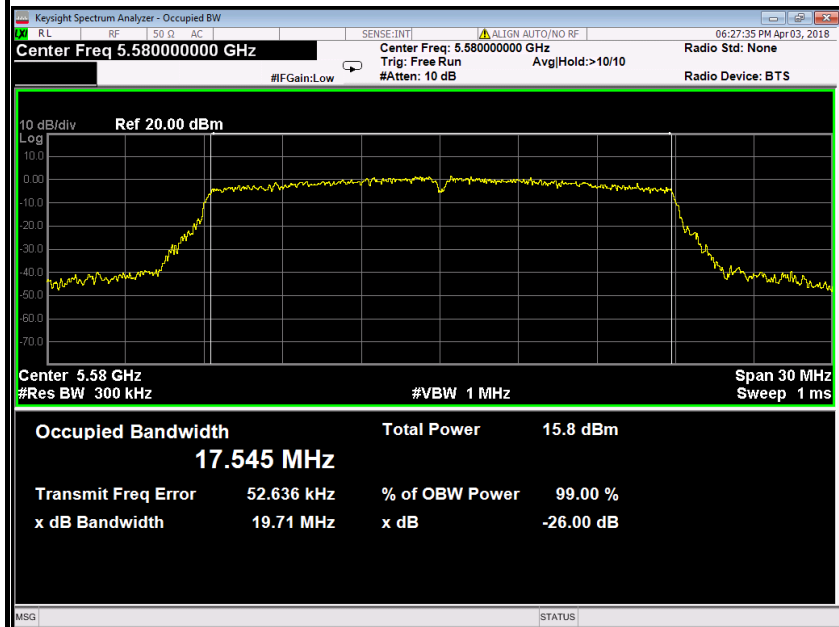

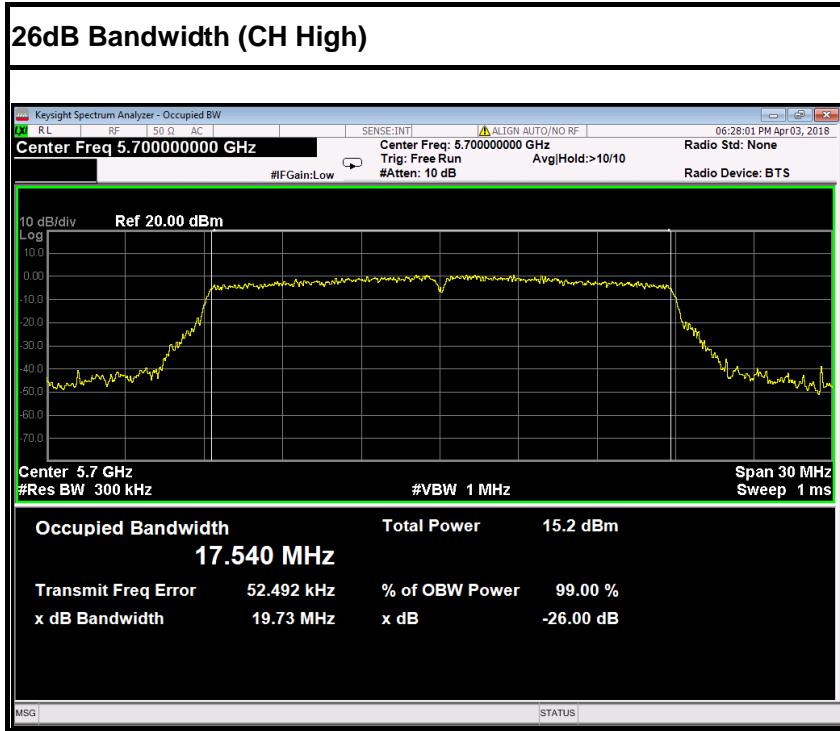









IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz



26dB Bandwidth (CH Low)

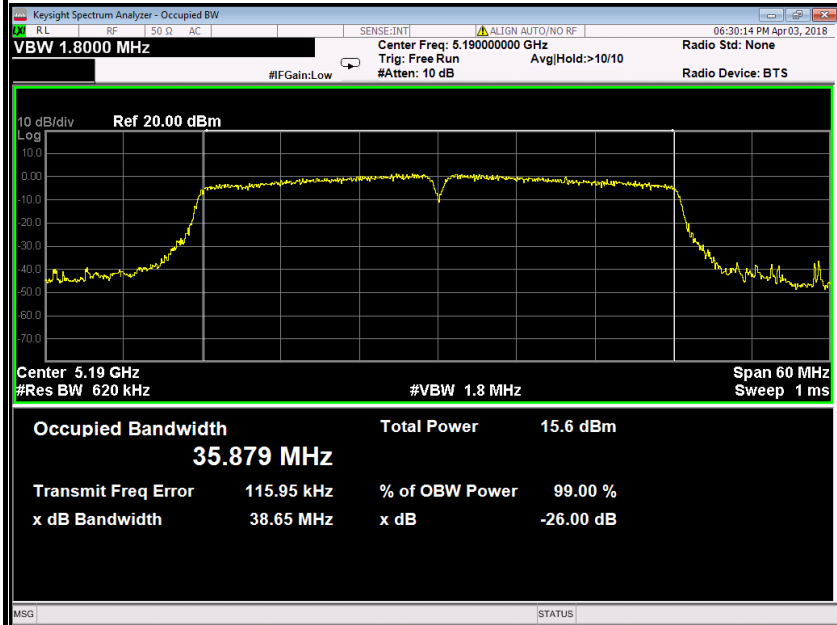


26dB Bandwidth (CH High)

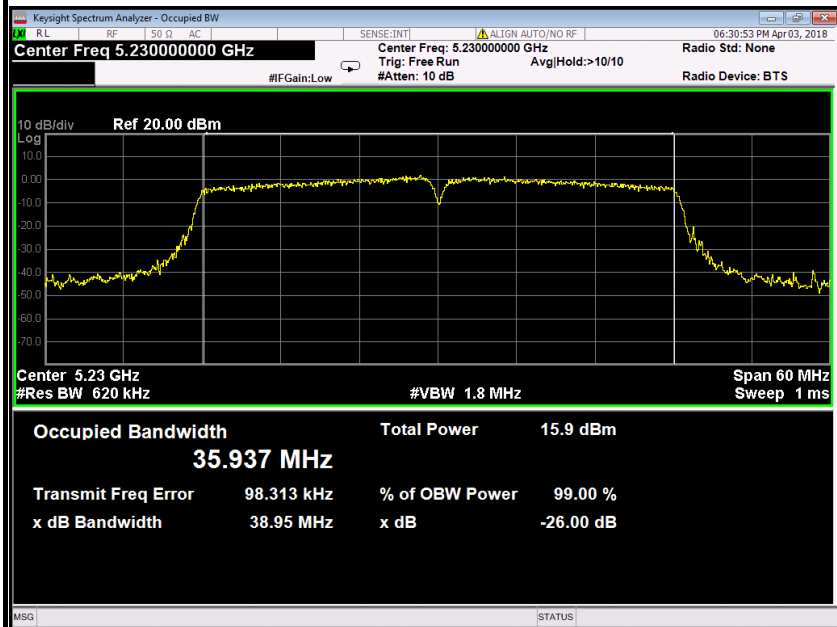

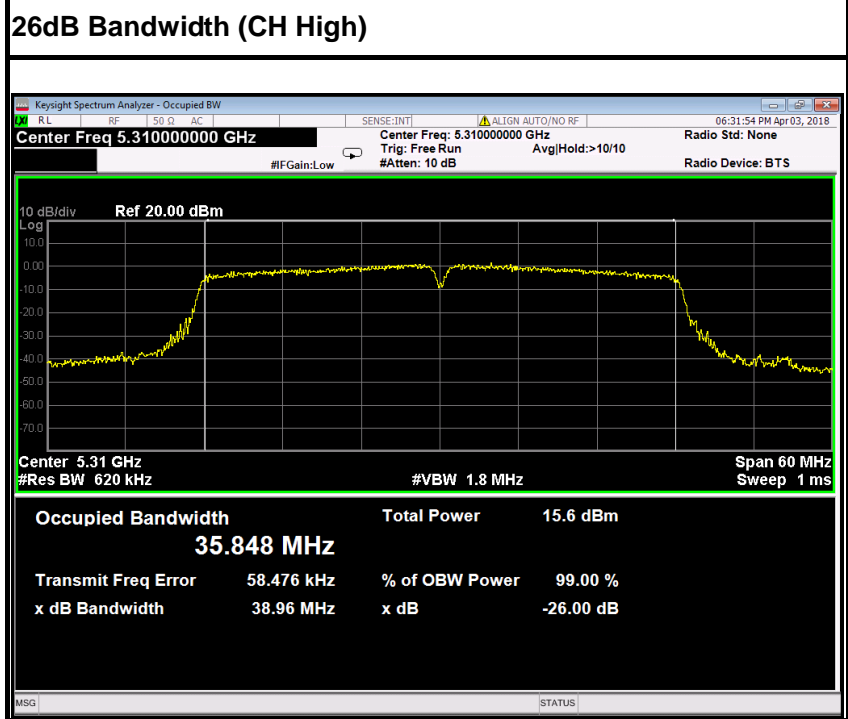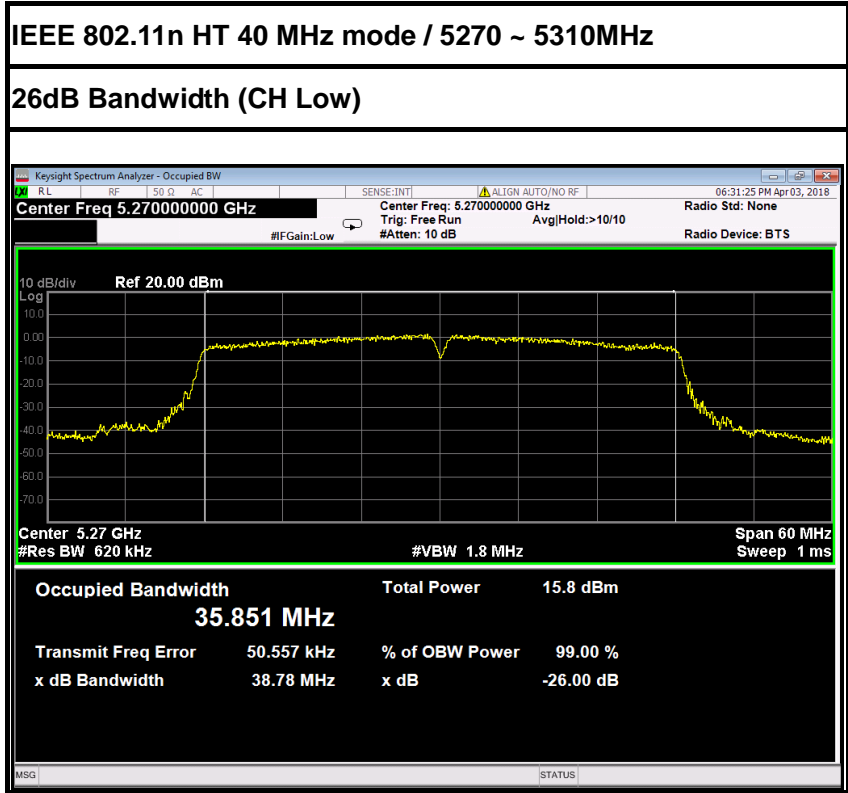

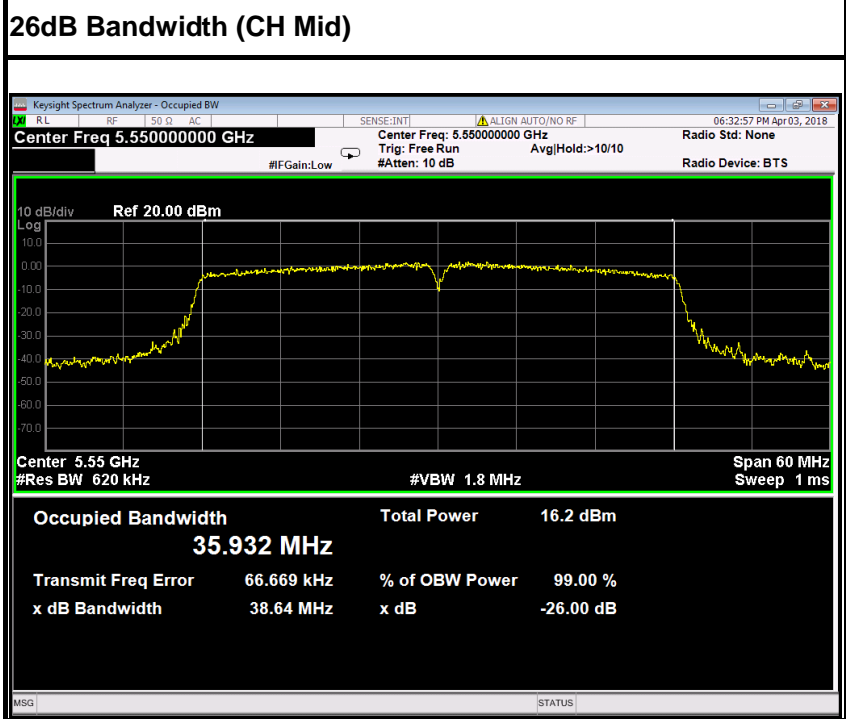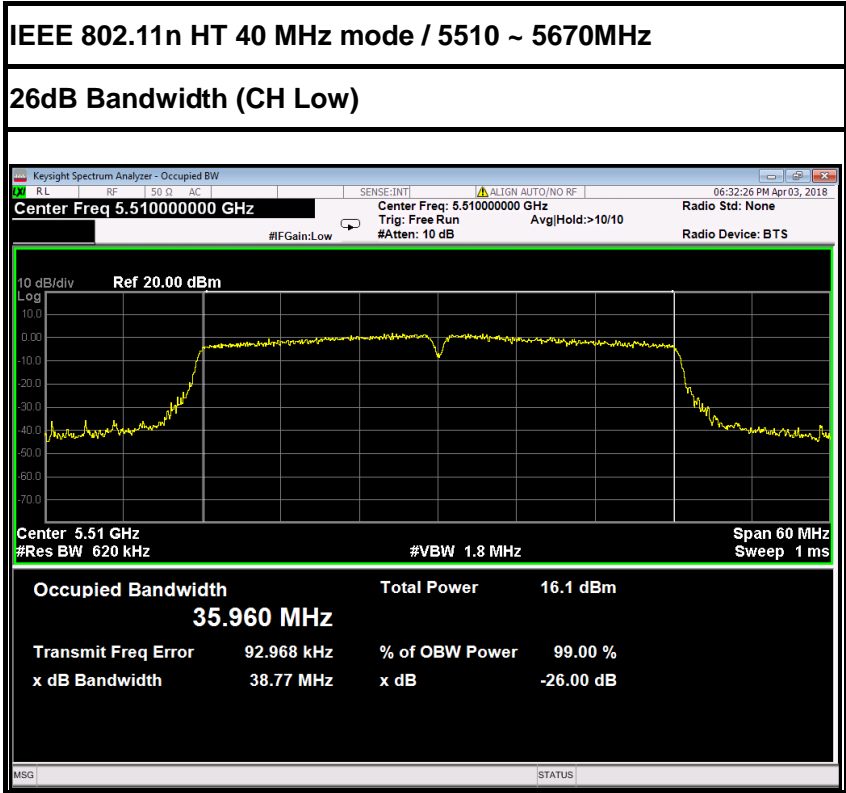


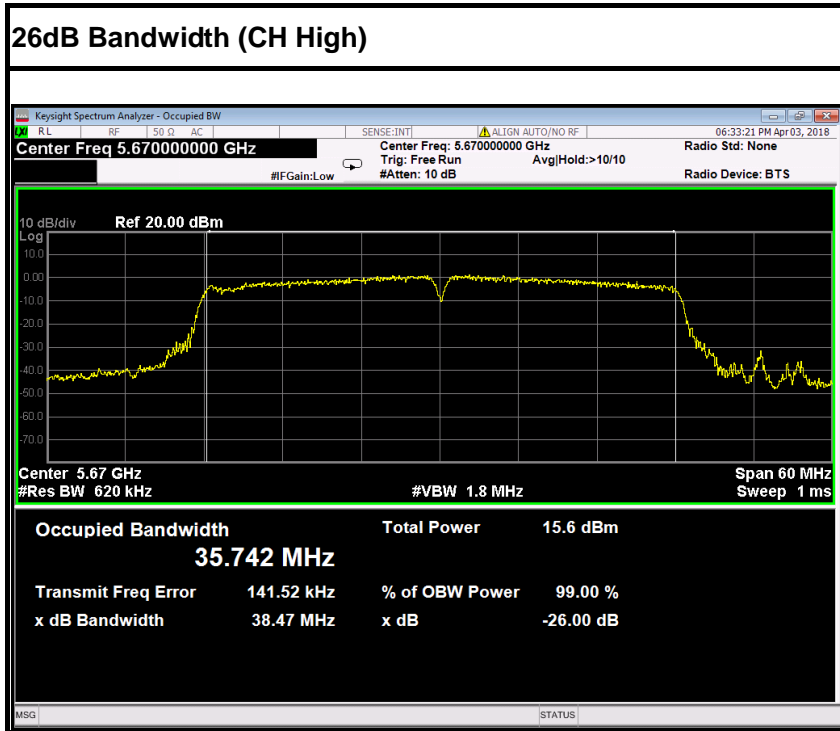




IEEE 802.11ac 80 mode / 5210MHz


26dB Bandwidth

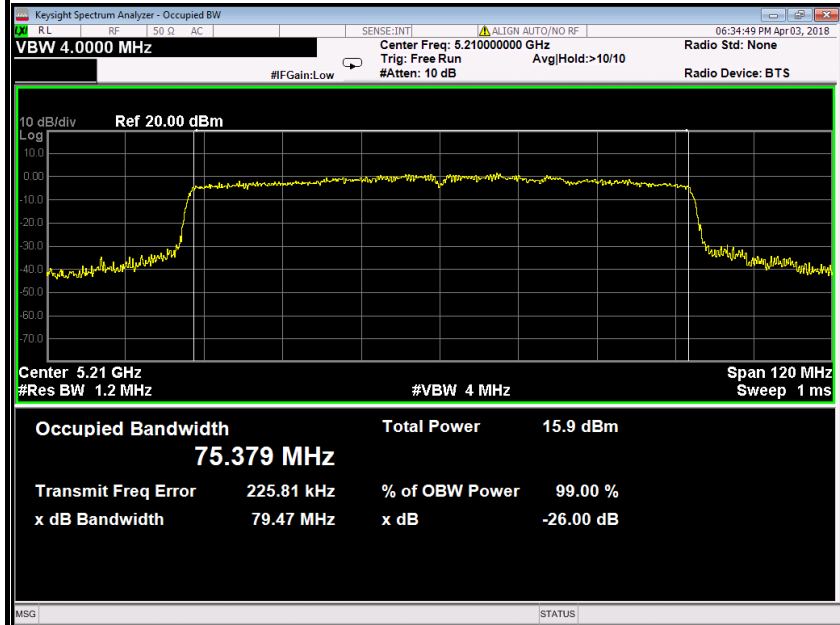

IEEE 802.11ac 80 mode / 5290MHz

26dB Bandwidth

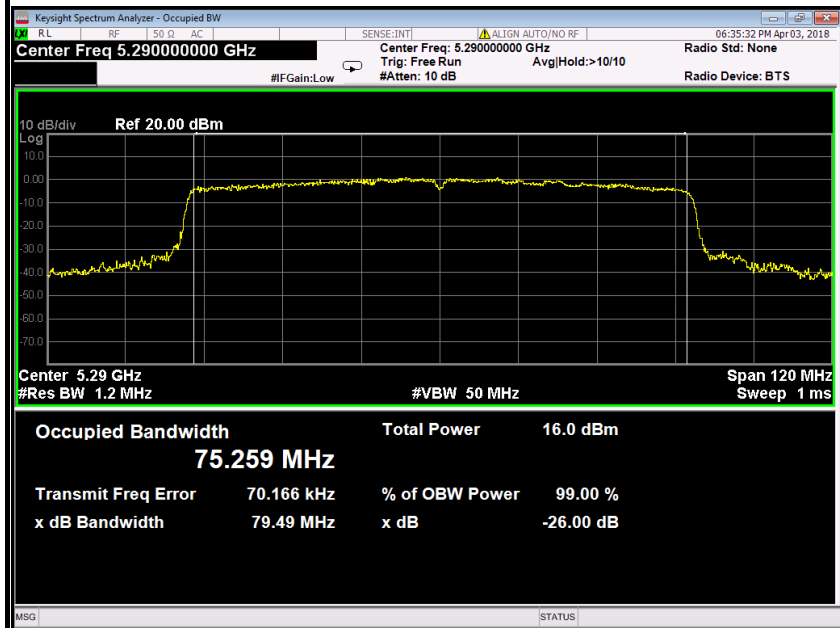

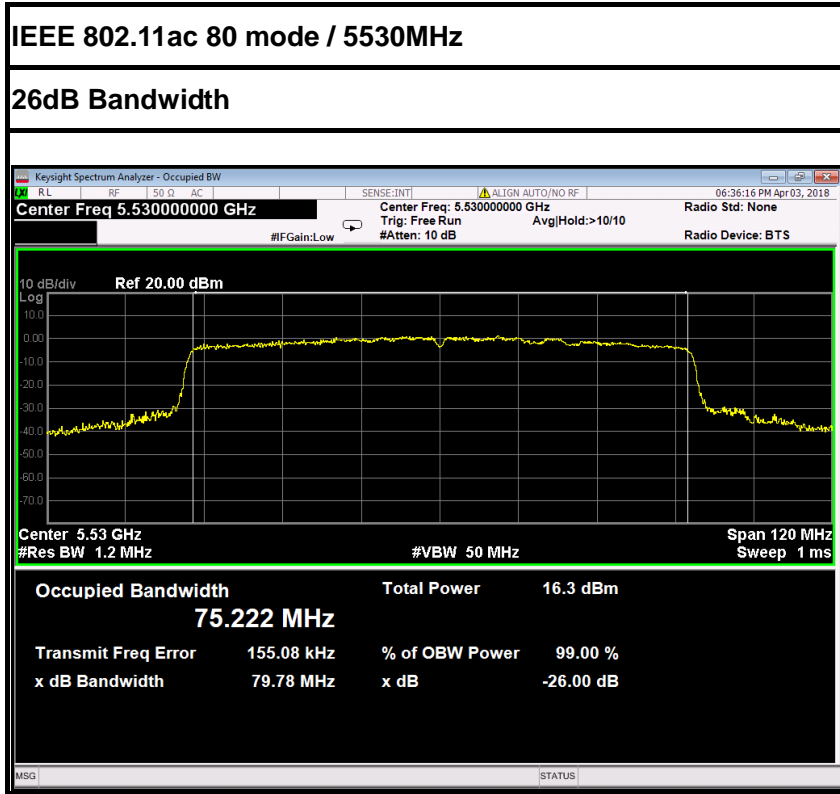



## 6.2 6dB BANDWIDTH MEASUREMENT

### 6.2.1 LIMITS

According to §15.407(e), Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### 6.2.2 TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018

### 6.2.3 TEST PROCEDURES (please refer to measurement standard)

#### 8.1 Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW  $\geq$  3 RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$  6 dB.

### 6.2.4 TEST SETUP





### 6.2.5 TEST RESULTS

*No non-compliance noted*

#### **Test Data**

**Test mode: IEEE 802.11a mode / 5745 ~ 5825MHz**

Channel	Frequency (MHz)	6dB Bandwidth(B) (MHz)	Limit (kHz)	Test Result
Low	5745	15.11	>500	PASS
Mid	5785	15.06		PASS
High	5825	14.36		PASS

**Test mode: IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz**

Channel	Frequency (MHz)	6dB Bandwidth(B) (MHz)	Limit (kHz)	Test Result
Low	5745	15.01	>500	PASS
Mid	5785	15.10		PASS
High	5825	15.06		PASS

**Test mode: IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz**

Channel	Frequency (MHz)	6dB Bandwidth(B) (MHz)	Limit (kHz)	Test Result
Low	5755	35.10	>500	PASS
High	5795	35.08		PASS



**Test mode: IEEE 802.11ac 80 mode / 5775MHz**


Channel	Frequency (MHz)	6dB Bandwidth(B) (MHz)	Limit (kHz)	Test Result
	5775	74.99	>500	PASS





Test Plot

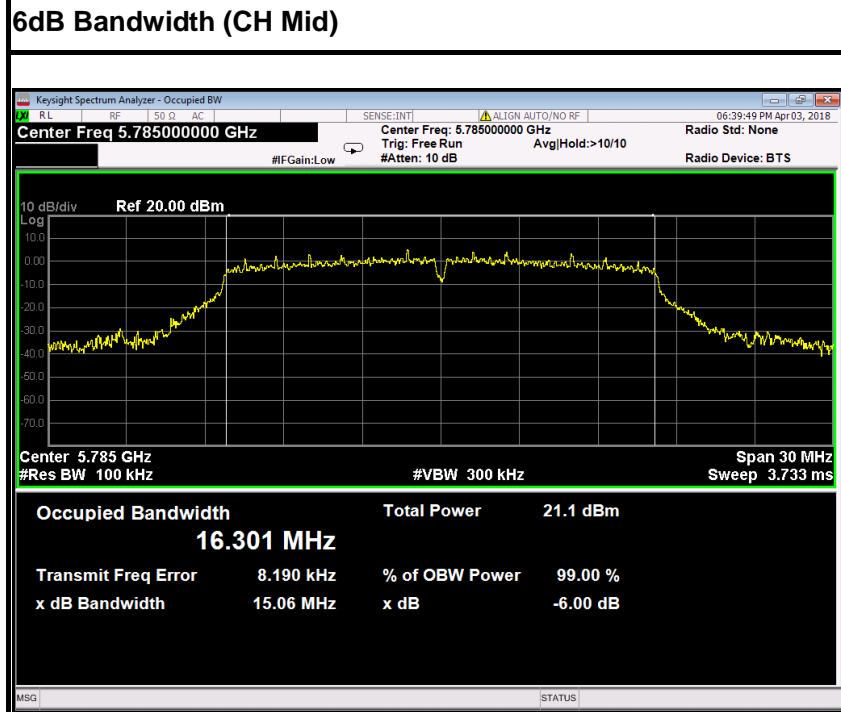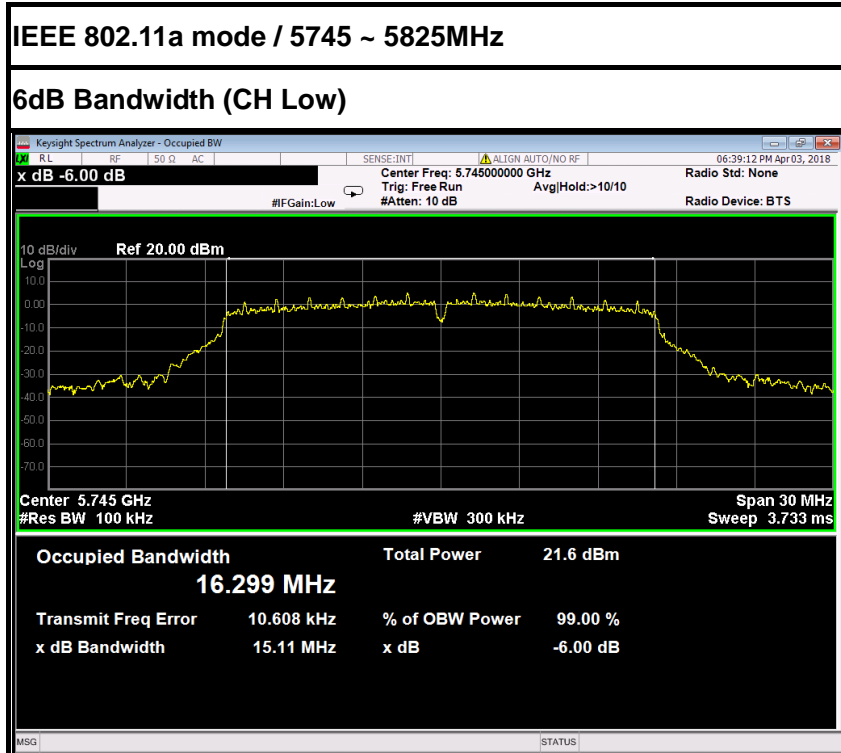


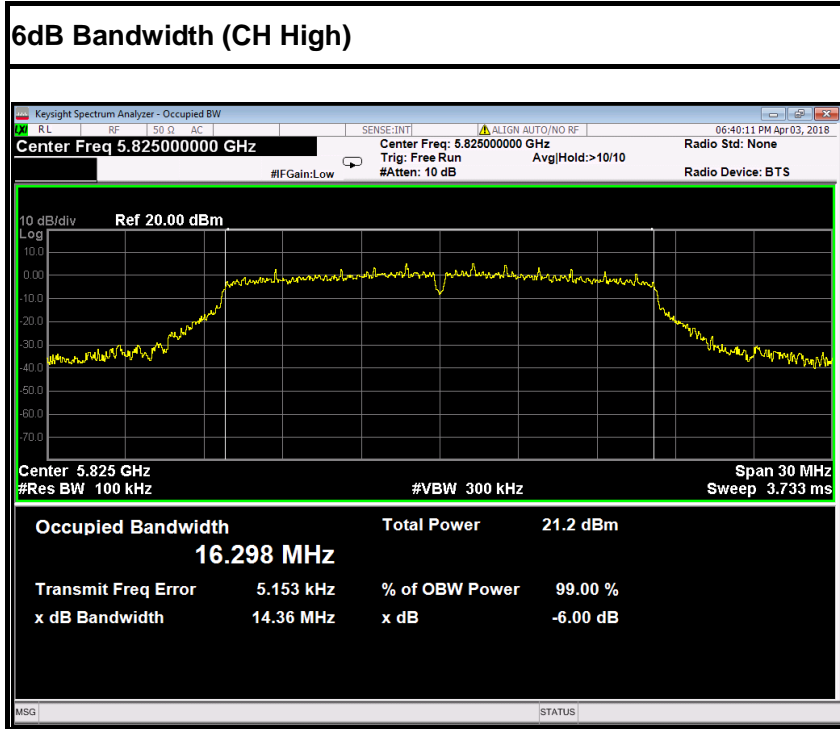





IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz


6dB Bandwidth (CH Low)

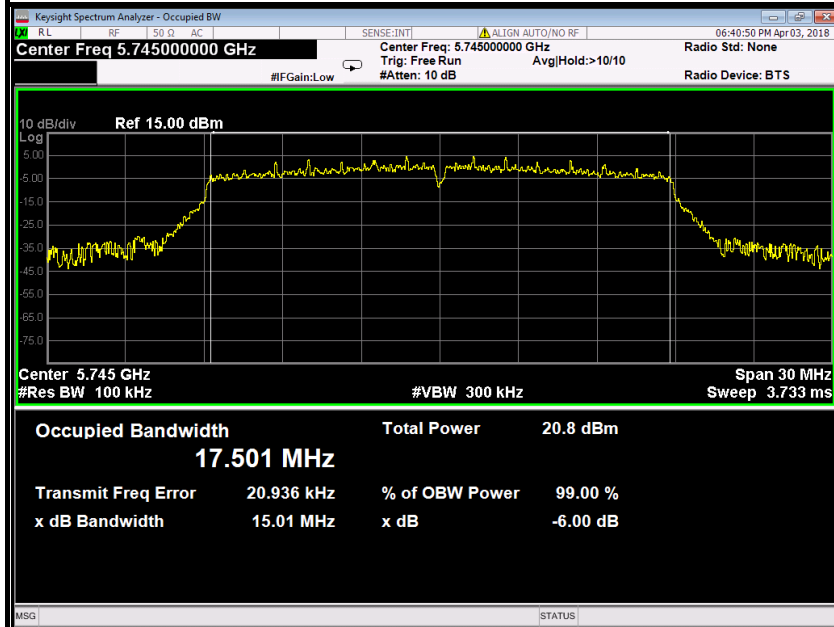


6dB Bandwidth (CH Mid)

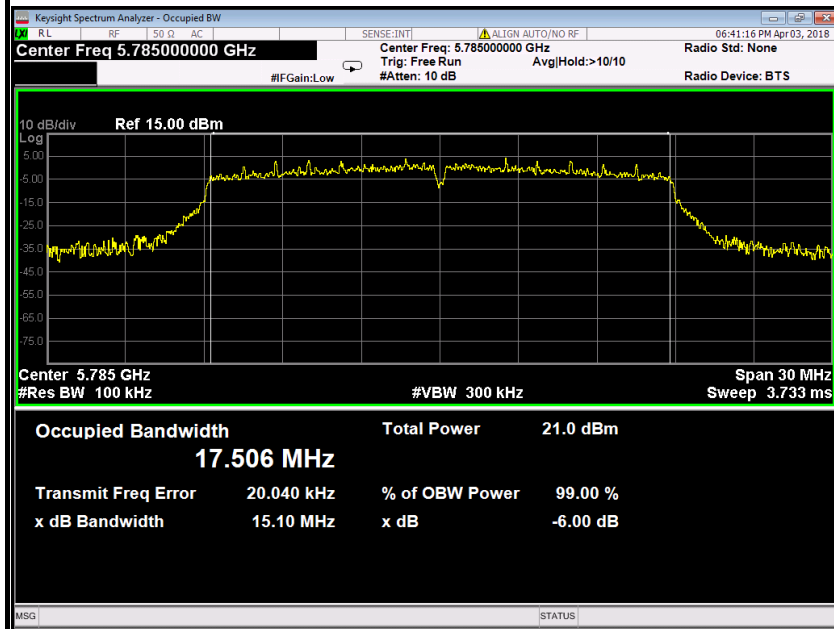

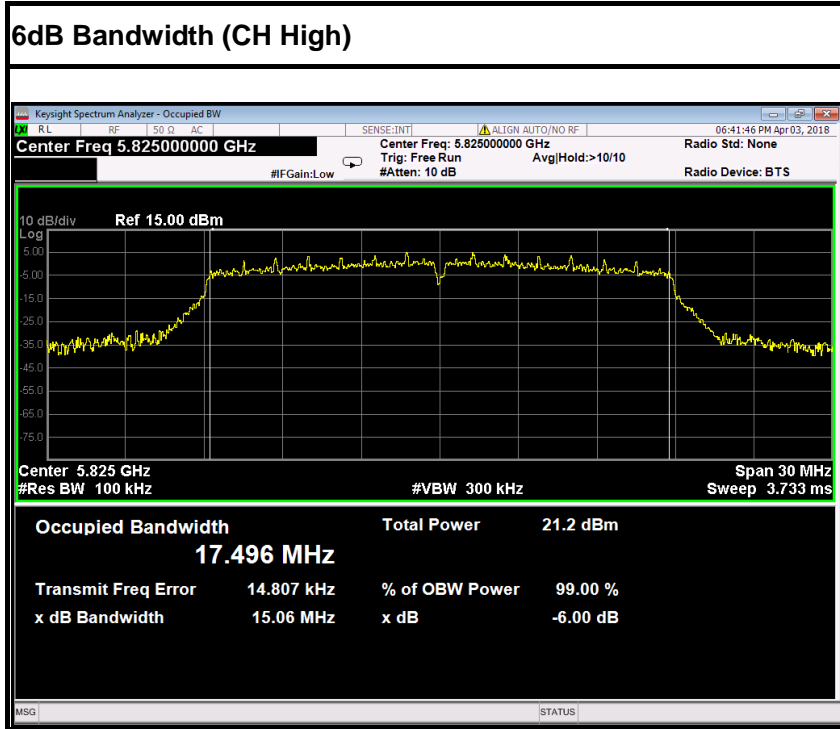

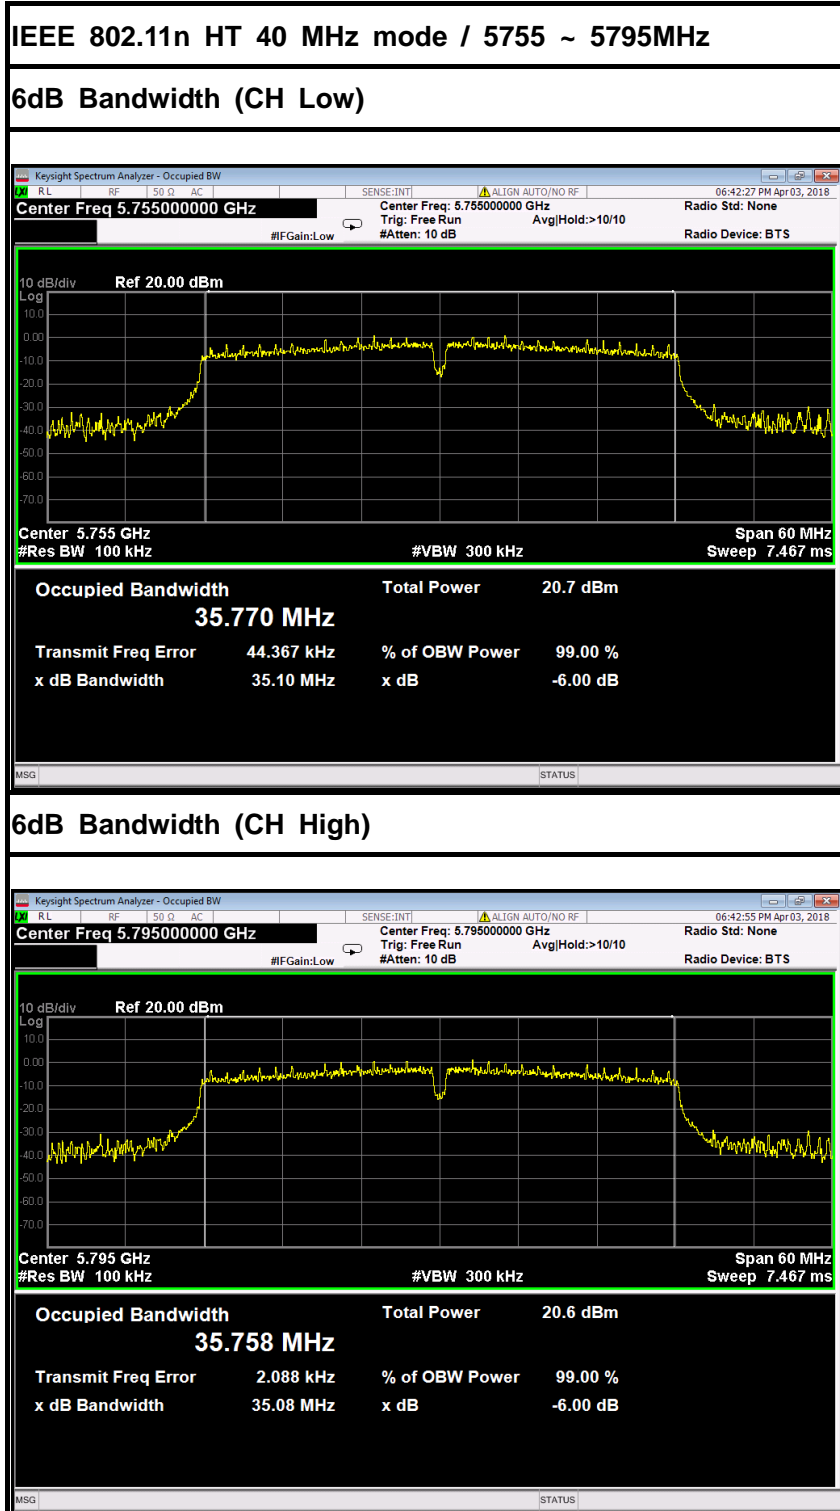

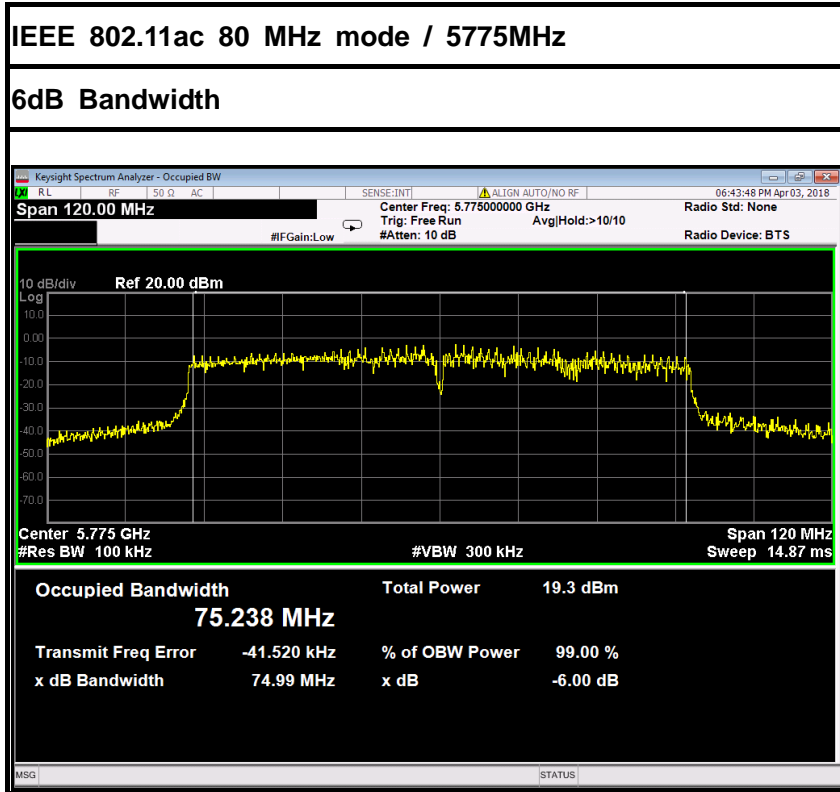



## 6.3 ANTENNA GAIN

### MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For UNII devices, the IEEE 802.11a mode is used.

### MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

### LIMITS

FCC	IC
Antenna Gain	
6 dBi	



## TEST RESULTS

### IEEE 802.11a mode / 5180 ~ 5240MHz

T <sub>nom</sub>	V <sub>nom</sub>	Lowest channel 5180MHz	Highest channel 5240MHz
Conducted power [dBm] Measured with OFDM modulation		3.12	2.89
Radiated power [dBm] Measured with OFDM modulation		4.26	4.81
Gain [dBi] Calculated		1.14	1.92
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)	

### IEEE 802.11a mode / 5260 ~ 5320MHz

T <sub>nom</sub>	V <sub>nom</sub>	Lowest channel 5260MHz	Highest channel 5320MHz
Conducted power [dBm] Measured with OFDM modulation		2.79	3.02
Radiated power [dBm] Measured with OFDM modulation		3.21	4.51
Gain [dBi] Calculated		0.42	1.49
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)	

### IEEE 802.11a mode / 5500 ~ 5700MHz

T <sub>nom</sub>	V <sub>nom</sub>	Lowest channel 5500MHz	Highest channel 5700MHz
Conducted power [dBm] Measured with OFDM modulation		1.30	1.18
Radiated power [dBm] Measured with OFDM modulation		2.23	2.15
Gain [dBi] Calculated		0.93	0.97
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)	

### IEEE 802.11a mode / 5745 ~ 5825MHz

T <sub>nom</sub>	V <sub>nom</sub>	Lowest channel 5745MHz	Highest channel 5825MHz
Conducted power [dBm] Measured with OFDM modulation		-0.20	0.12
Radiated power [dBm] Measured with OFDM modulation		1.23	1.31
Gain [dBi] Calculated		1.43	1.19
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)	





## 6.4 OUTPUT POWER

### 6.4.1 LIMIT

#### According to §15.407(a)& FCC R&O FCC 14 - 30,

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

*Note to paragraph (a)(3): The Commission strongly recommends that parties employing U-NII devices to provide critical communications services should determine if there are any nearby Government radar systems that could affect their operation.*



**Specified Limit of the Output Power**

**Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)	10*Log(B) (dB)	11 + 10*Log(B) (dBm)	Maximum Conducted Output Power Limit (dBm)
Low	5260	18.94	12.77	23.77	23.77
Mid	5300	19.16	12.82	23.82	23.82
High	5320	18.63	12.70	23.70	23.70

**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)	10*Log(B) (dB)	11 + 10*Log(B) (dBm)	Maximum Conducted Output Power Limit (dBm)
Low	5500	18.93	12.77	23.77	23.77
Mid	5580	19.14	12.82	23.82	23.82
High	5700	18.83	12.75	23.75	23.75

**Test mode: IEEE 802.11n HT 20 MHz mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)	10*Log(B) (dB)	11 + 10*Log(B) (dBm)	Maximum Conducted Output Power Limit (dBm)
Low	5260	19.61	12.92	23.92	23.92
Mid	5300	19.61	12.92	23.92	23.92
High	5320	19.46	12.89	23.89	23.89

**Test mode: IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz**

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)	10*Log(B) (dB)	11 + 10*Log(B) (dBm)	Maximum Conducted Output Power Limit (dBm)
Low	5500	19.52	12.90	23.90	23.90
Mid	5580	19.71	12.95	23.95	23.95
High	5700	19.73	12.95	23.95	23.95



**IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz**

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)	10*Log(B) (dB)	11 + 10*Log(B) (dBm)	Maximum Conducted Output Power Limit (dBm)
Low	5270	38.78	15.89	26.89	24.00
High	5310	38.96	15.91	26.91	24.00

**IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz**

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)	10*Log(B) (dB)	11 + 10*Log(B) (dBm)	Maximum Conducted Output Power Limit (dBm)
Low	5510	38.77	15.88	26.88	24.00
Mid	5550	38.64	15.87	26.87	24.00
High	5670	38.47	15.85	26.85	24.00

**IEEE 802.11ac 80 mode / 5290MHz**

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)	10*Log(B) (dB)	11 + 10*Log(B) (dBm)	Maximum Conducted Output Power Limit (dBm)
	5290	79.49	19.00	30.00	24.00

**IEEE 802.11ac 80 mode / 5530MHz**

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)	10*Log(B) (dB)	11 + 10*Log(B) (dBm)	Maximum Conducted Output Power Limit (dBm)
	5530	79.78	19.02	30.02	24.00




#### 6.4.2 MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Power Meter	Anritsu	ML2495A	1204003	02/21/2018	02/20/2019
Power Sensor	Anritsu	MA2411B	1126150	02/21/2018	02/20/2019

**Remark:** Each piece of equipment is scheduled for calibration once a year.

#### 6.4.3 TEST CONFIGURATIONS



#### 6.4.4 TEST PROCEDURE

The EUT was connected to a Power Meter through a 50Ω RF cable.

#### 6.4.5 TEST RESULTS

*No non-compliance noted*



6.4.6 TEST DATA

IEEE 802.11a mode / 5180 ~ 5240MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)	AVG Output Power (W)	Limit (dBm)	Result
Low	5180	15.25	0.03350	24.00	PASS
Mid	5200	15.18	0.03296		PASS
High	5240	15.03	0.03184		PASS

IEEE 802.11a mode / 5260~ 5320MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)	AVG Output Power (W)	Limit (dBm)	Result
Low	5260	14.92	0.03105	23.70	PASS
Mid	5300	15.04	0.03192		PASS
High	5320	15.15	0.03273		PASS

IEEE 802.11a mode / 5500 ~ 5700MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)	AVG Output Power (W)	Limit (dBm)	Result
Low	5500	13.43	0.02203	23.75	PASS
Mid	5580	13.29	0.02133		PASS
High	5700	13.32	0.02148		PASS

IEEE 802.11a mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)	AVG Output Power (W)	Limit (dBm)	Result
Low	5745	12.05	0.01603	30.00	PASS
Mid	5785	12.23	0.01671		PASS
High	5825	12.32	0.01706		PASS



**IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	AVG Output Power (dBm)	AVG Output Power (W)	Limit (dBm)	Result
Low	5180	15.02	0.03177	24.00	PASS
Mid	5200	15.07	0.03214		PASS
High	5240	15.03	0.03184		PASS

**IEEE 802.11n HT 20 MHz mode / 5260~ 5320MHz**

Channel	Frequency (MHz)	AVG Output Power (dBm)	AVG Output Power (W)	Limit (dBm)	Result
Low	5260	14.70	0.02951	23.89	PASS
Mid	5300	14.79	0.03013		PASS
High	5320	14.87	0.03069		PASS

**IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz**

Channel	Frequency (MHz)	AVG Output Power (dBm)	AVG Output Power (W)	Limit (dBm)	Result
Low	5500	13.23	0.02104	23.90	PASS
Mid	5580	12.92	0.01959		PASS
High	5700	13.29	0.02133		PASS

**IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz**

Channel	Frequency (MHz)	AVG Output Power (dBm)	AVG Output Power (W)	Limit (dBm)	Result
Low	5745	11.92	0.01556	30.00	PASS
Mid	5785	12.04	0.01600		PASS
High	5825	11.92	0.01556		PASS



**IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz**

Channel	Frequency (MHz)	AVG Output Power (dBm)	AVG Output Power (W)	Limit (dBm)	Result
Low	5190	15.59	0.03622	24.00	PASS
High	5230	15.64	0.03664		PASS

**IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz**

Channel	Frequency (MHz)	AVG Output Power (dBm)	AVG Output Power (W)	Limit (dBm)	Result
Low	5270	15.04	0.03192	24.00	PASS
High	5310	15.29	0.03381		PASS

**IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz**

Channel	Frequency (MHz)	AVG Output Power (dBm)	AVG Output Power (W)	Limit (dBm)	Result
Low	5510	13.45	0.02213	24.00	PASS
Mid	5550	13.41	0.02193		PASS
High	5670	13.44	0.02208		PASS

**IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz**

Channel	Frequency (MHz)	AVG Output Power (dBm)	AVG Output Power (W)	Limit (dBm)	Result
Low	5755	12.25	0.01679	30.00	PASS
High	5795	12.12	0.01629		PASS





**IEEE 802.11ac 80 mode / 5210MHz**

Channel	Frequency (MHz)	AVG Output Power (dBm)	AVG Output Power (W)	Limit (dBm)	Result
	5210	15.53	0.03573	24.00	PASS

**IEEE 802.11ac 80 mode / 5290MHz**

Channel	Frequency (MHz)	AVG Output Power (dBm)	AVG Output Power (W)	Limit (dBm)	Result
	5290	15.18	0.03296	24.00	PASS

**IEEE 802.11ac 80 mode / 5530MHz**

Channel	Frequency (MHz)	AVG Output Power (dBm)	AVG Output Power (W)	Limit (dBm)	Result
	5530	13.67	0.02328	24.00	PASS

**IEEE 802.11ac 80 mode / 5775MHz**

Channel	Frequency (MHz)	AVG Output Power (dBm)	AVG Output Power (W)	Limit (dBm)	Result
	5775	12.22	0.01667	30.00	PASS



## 6.5 BAND EDGES MEASUREMENT

### 6.5.1 LIMIT

According to §15.407(b)

- (1) The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.
- (2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

### 6.5.2 MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2018	02/20/2019
Amplifier	EMEC	EM330	060661	03/18/2018	03/17/2019
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2018	02/20/2019
Loop Antenna	COM-POWER	AL-130	121044	09/25/2017	09/24/2018
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2018	02/20/2019
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/27/2018	02/27/2019
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/27/2018	02/27/2019
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	01/29/2018	01/28/2019
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			


**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The FCC Site Registration number is 101879.

3. N.C.R = No Calibration Required.



### 6.5.3 TEST CONFIGURATION

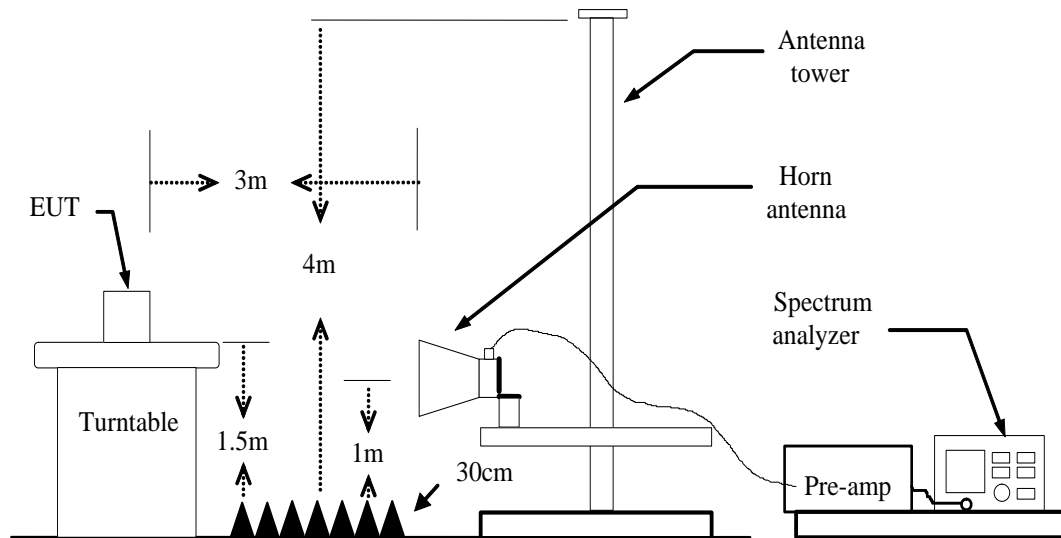

### 6.5.4 TEST PROCEDURE



1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=1 / VBW=3MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO / Detector=Peak
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.





### 6.5.5 TEST RESULT

#### Test Plot

IEEE 802.11a mode / 5180MHz

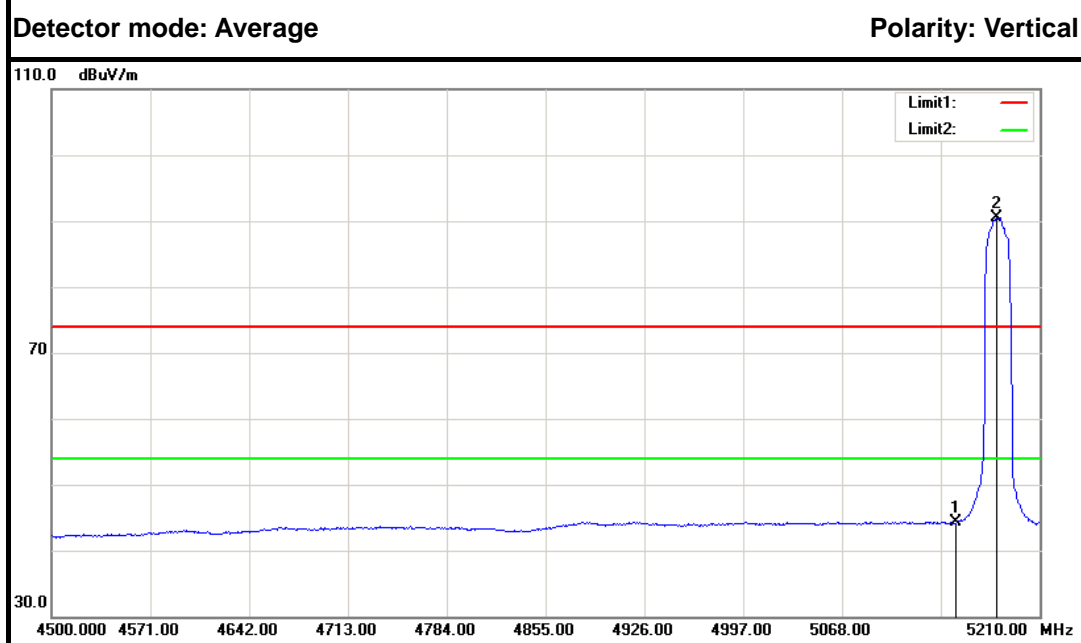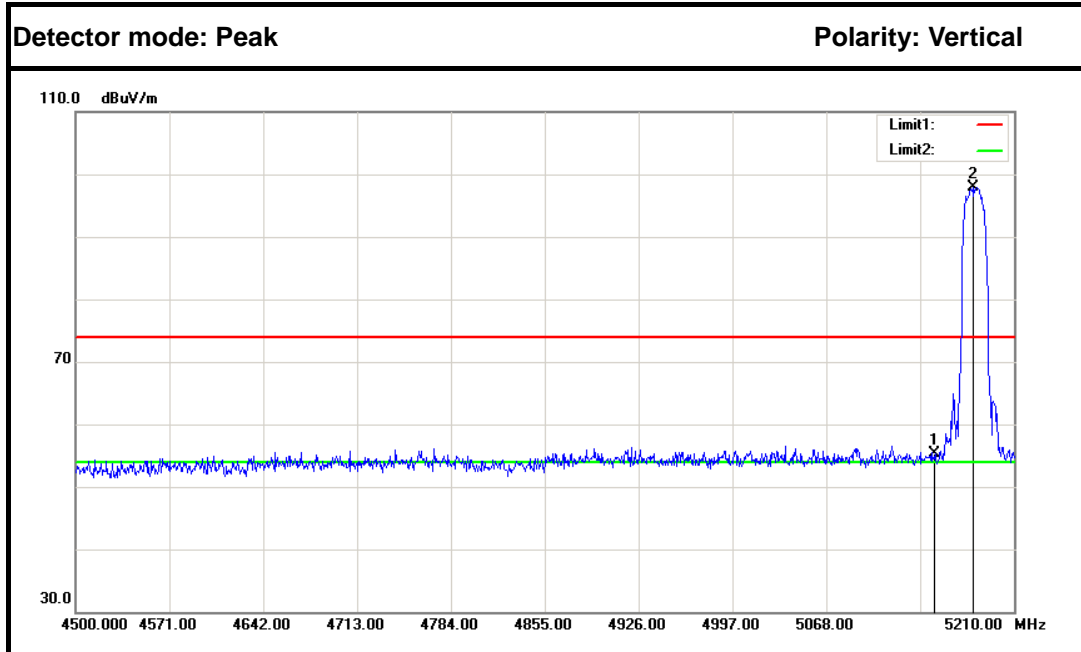



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	49.96	5.25	55.21	74.00	-18.79	Peak	Vertical
2	5178.760	92.60	5.30	97.90	---	---	Peak	Vertical
1	5150.000	38.97	5.25	44.22	54.00	-9.78	Average	Vertical
2	5178.760	85.19	5.30	90.49	---	---	Average	Vertical

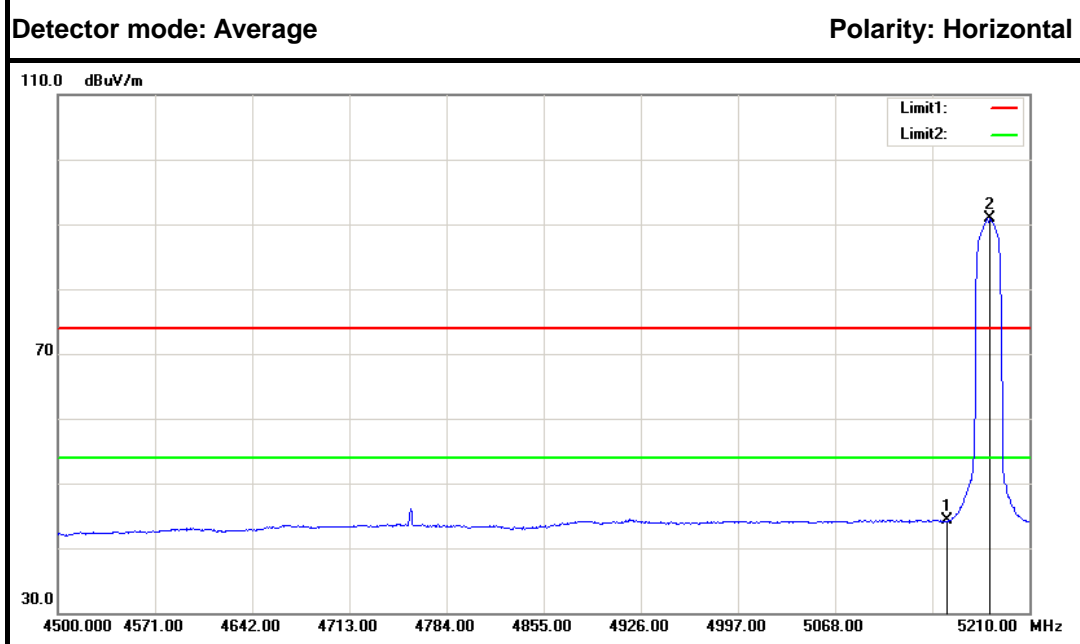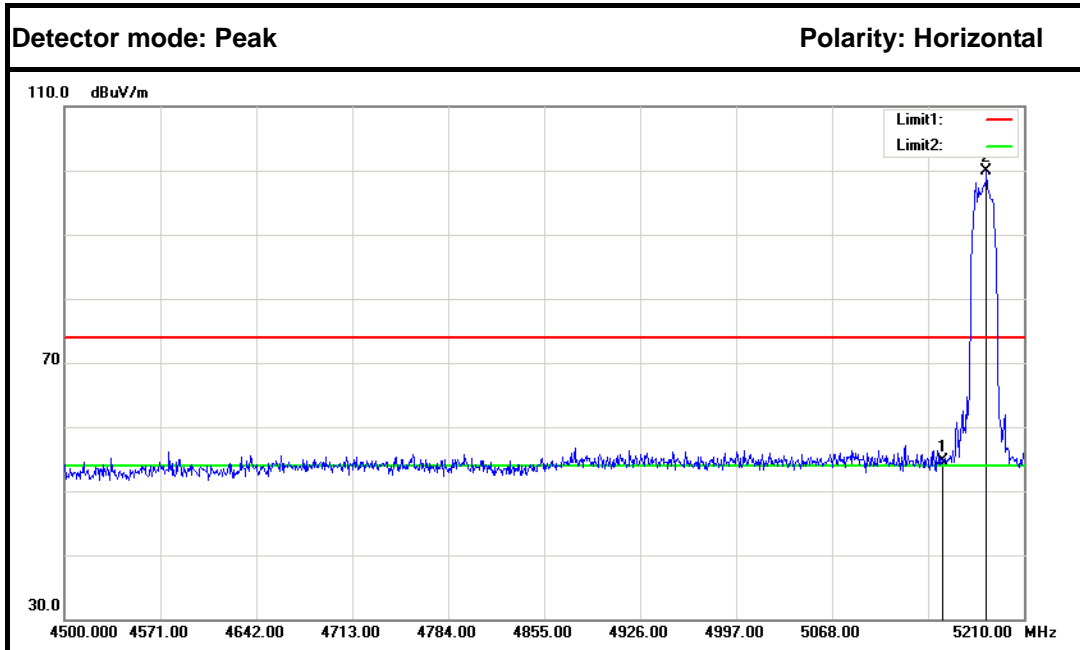



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	49.53	5.25	54.78	74.00	-19.22	Peak	Horizontal
2	5182.310	94.52	5.30	99.82	---	---	Peak	Horizontal
1	5150.000	38.99	5.25	44.24	54.00	-9.76	Average	Horizontal
2	5180.890	85.62	5.30	90.92	---	---	Average	Horizontal



IEEE 802.11a mode / 5320MHz

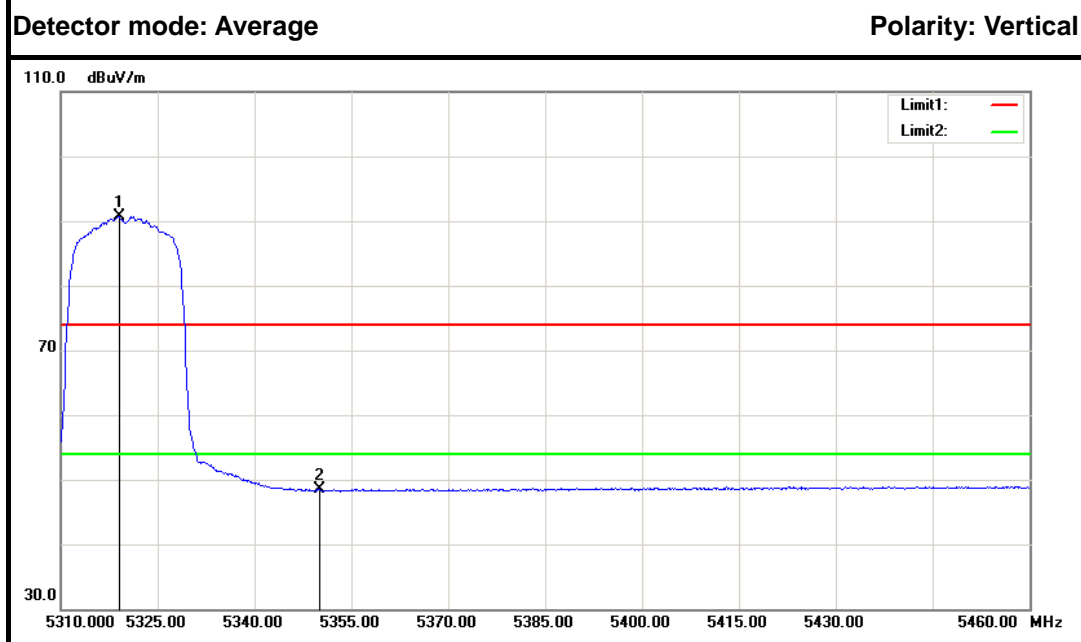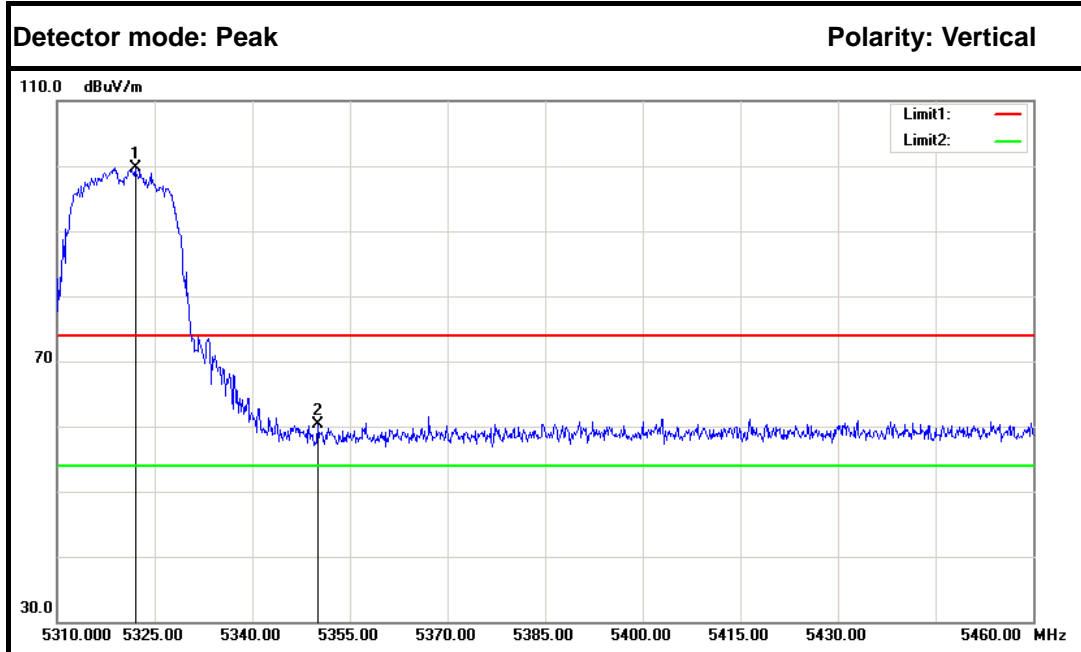



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5322.000	94.12	5.55	99.67	---	---	Peak	Vertical
2	5350.000	54.75	5.60	60.35	74.00	-13.65	Peak	Vertical
1	5319.000	85.18	5.55	90.73	---	---	Average	Vertical
2	5350.000	42.84	5.60	48.44	54.00	-5.56	Average	Vertical

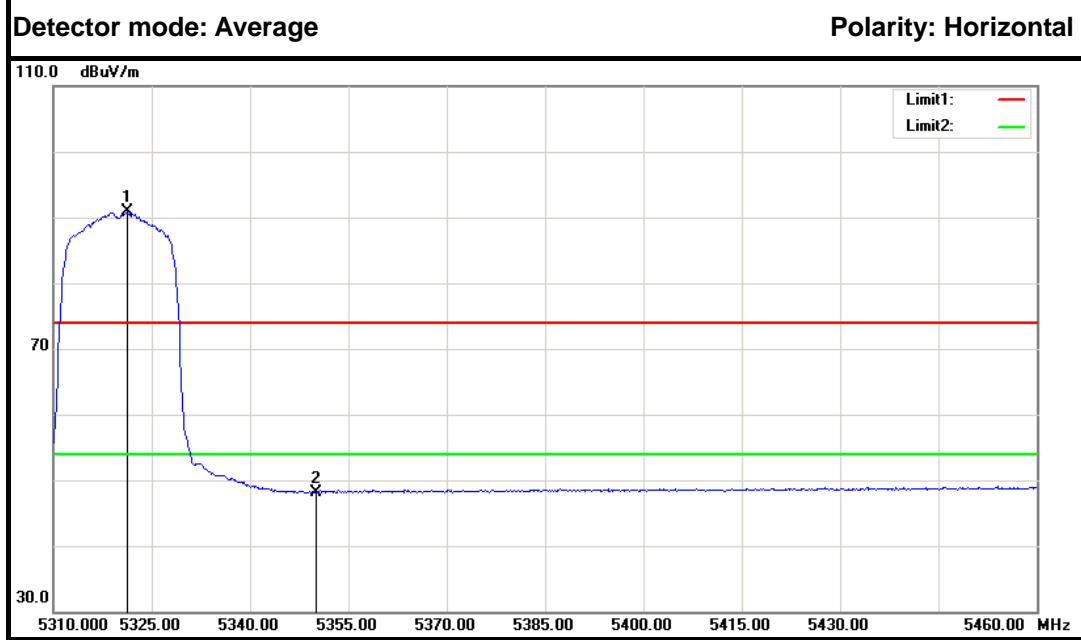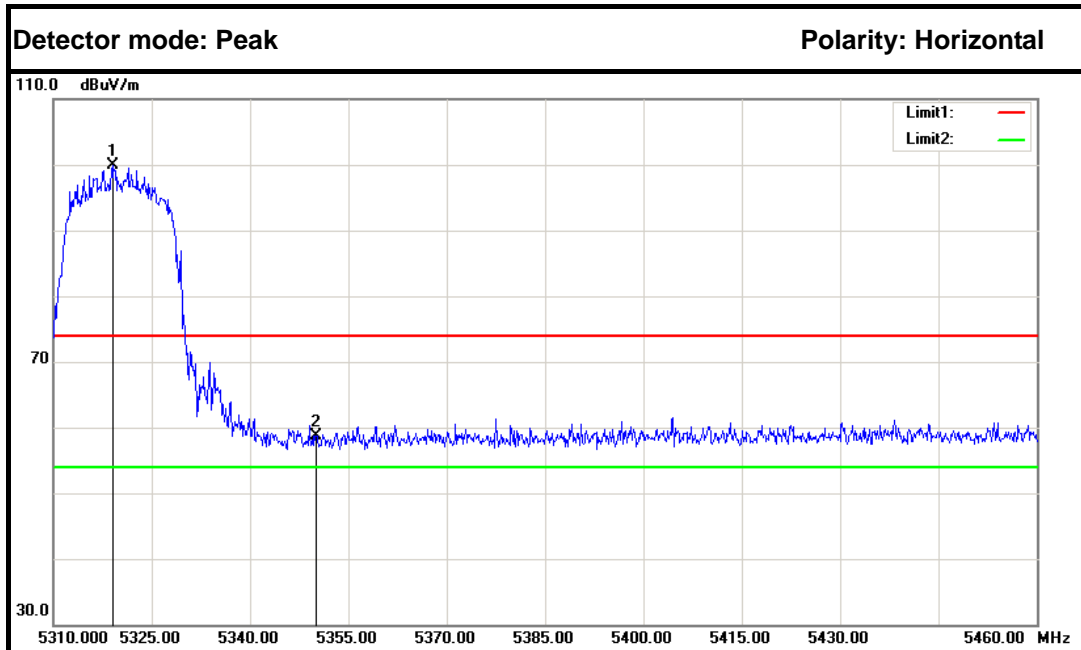

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5319.150	94.39	5.55	99.94	---	---	Peak	Horizontal
2	5350.000	53.11	5.60	58.71	74.00	-15.29	Peak	Horizontal
1	5321.250	85.33	5.55	90.88	---	---	Average	Horizontal
2	5350.000	42.56	5.60	48.16	54.00	-5.84	Average	Horizontal




IEEE 802.11n HT 20 MHz mode / 5180 MHz

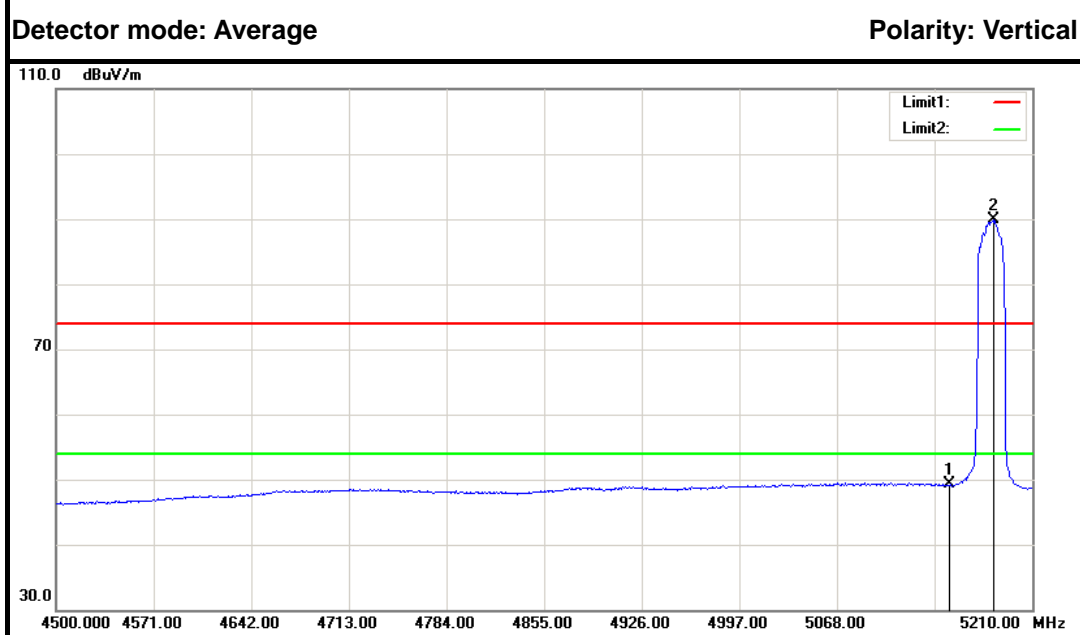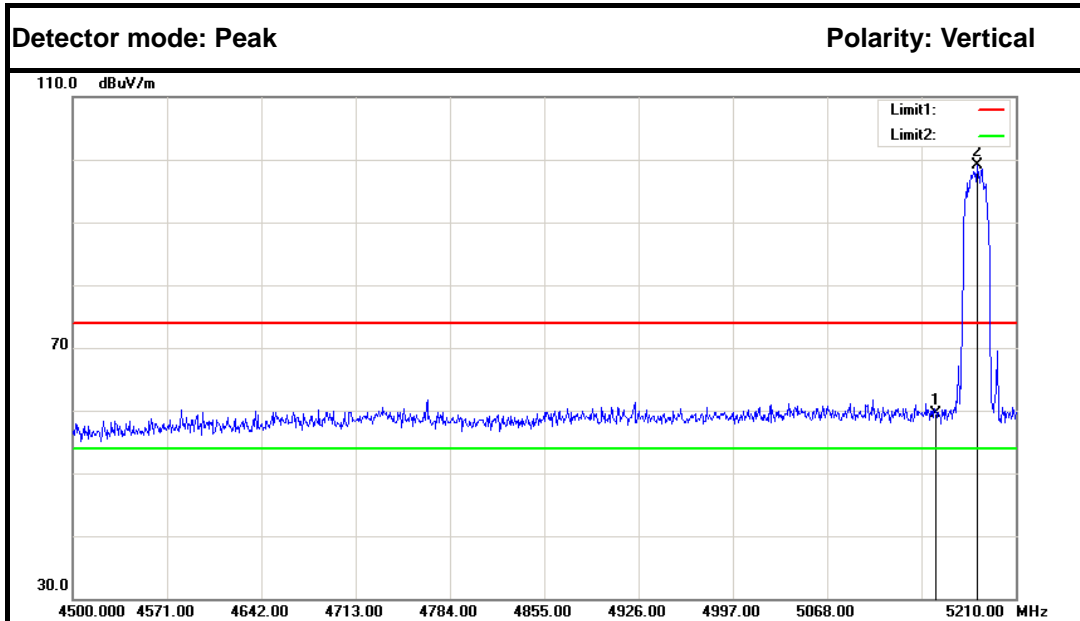

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	54.18	5.25	59.43	74.00	-14.57	Peak	Vertical
2	5180.890	93.71	5.30	99.01	---	---	Peak	Vertical
1	5150.000	43.96	5.25	49.21	54.00	-4.79	Average	Vertical
2	5181.600	84.58	5.30	89.88	---	---	Average	Vertical





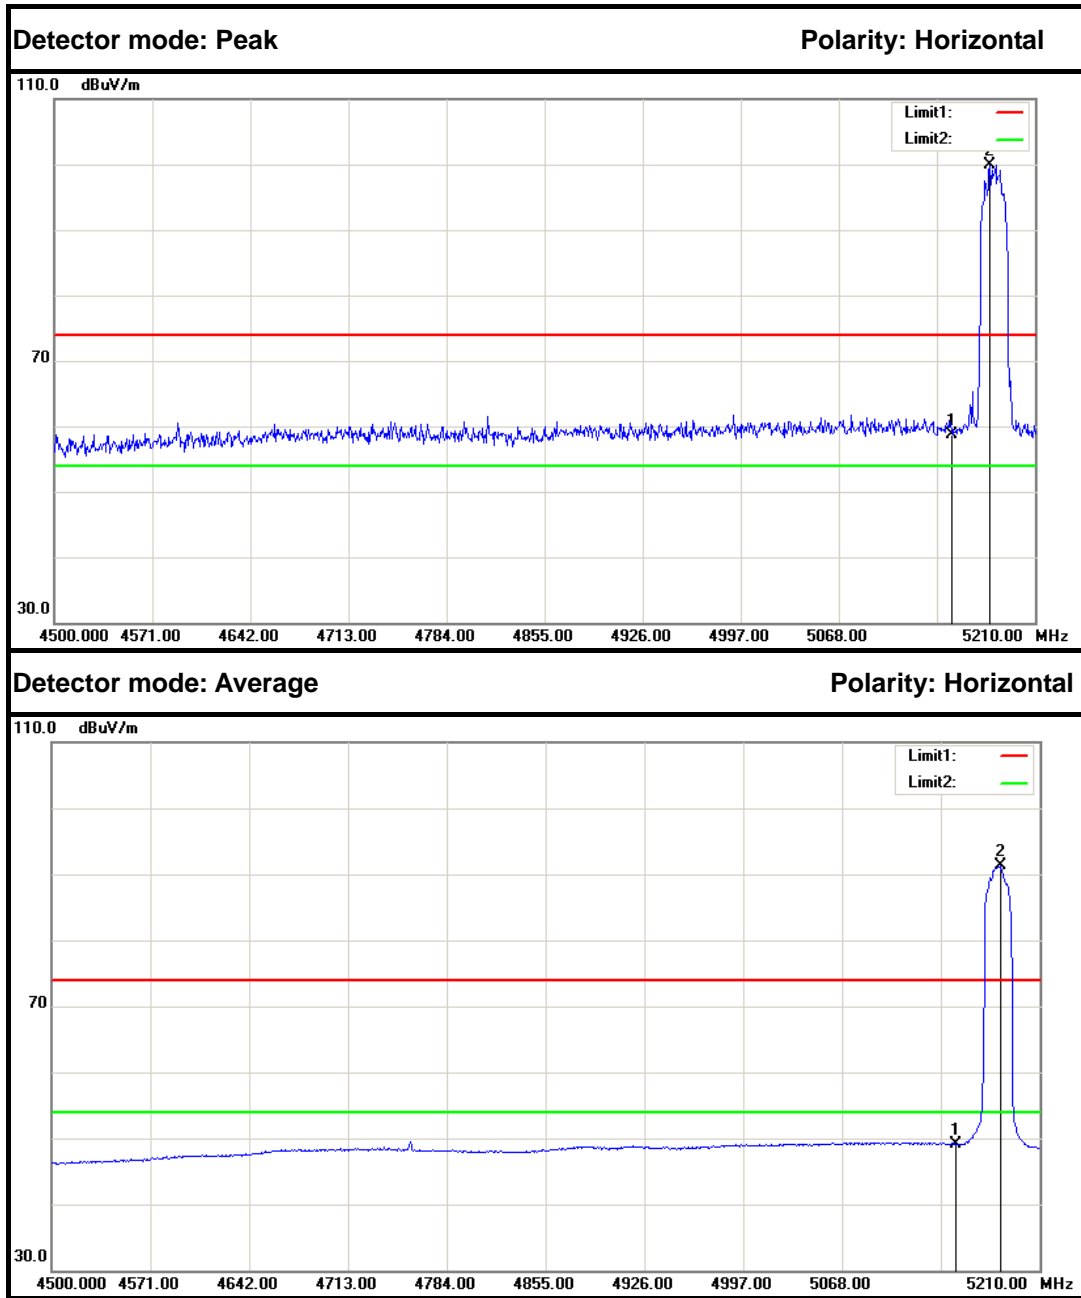



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	53.44	5.25	58.69	74.00	-15.31	Peak	Horizontal
2	5177.340	94.67	5.30	99.97	---	---	Peak	Horizontal
1	5150.000	43.92	5.25	49.17	54.00	-4.83	Average	Horizontal
2	5181.600	85.99	5.30	91.29	---	---	Average	Horizontal



IEEE 802.11n HT 20 MHz mode / 5320 MHz

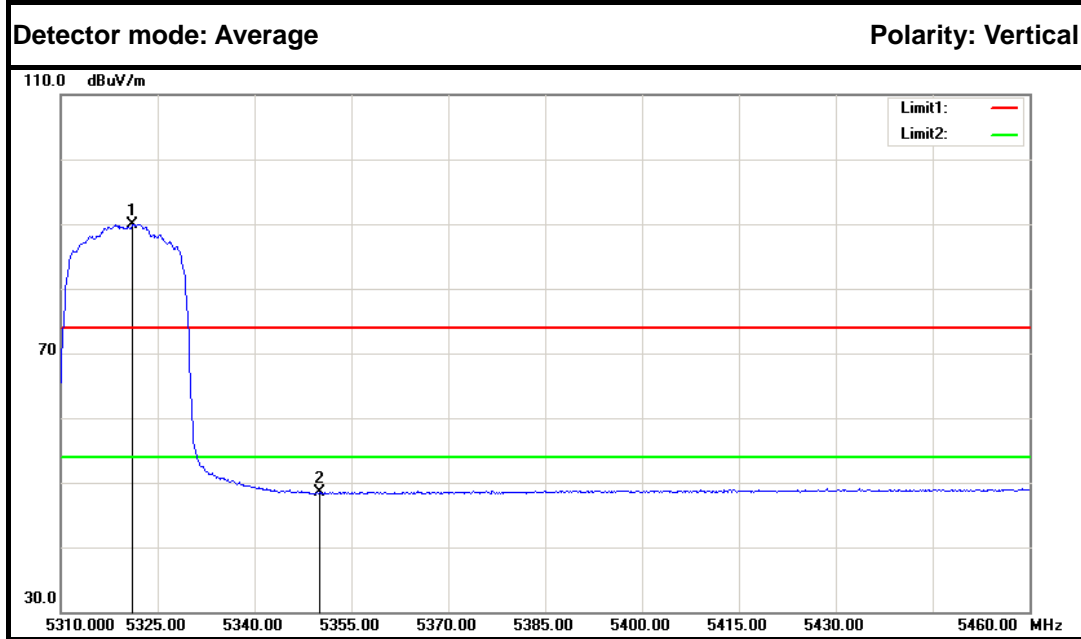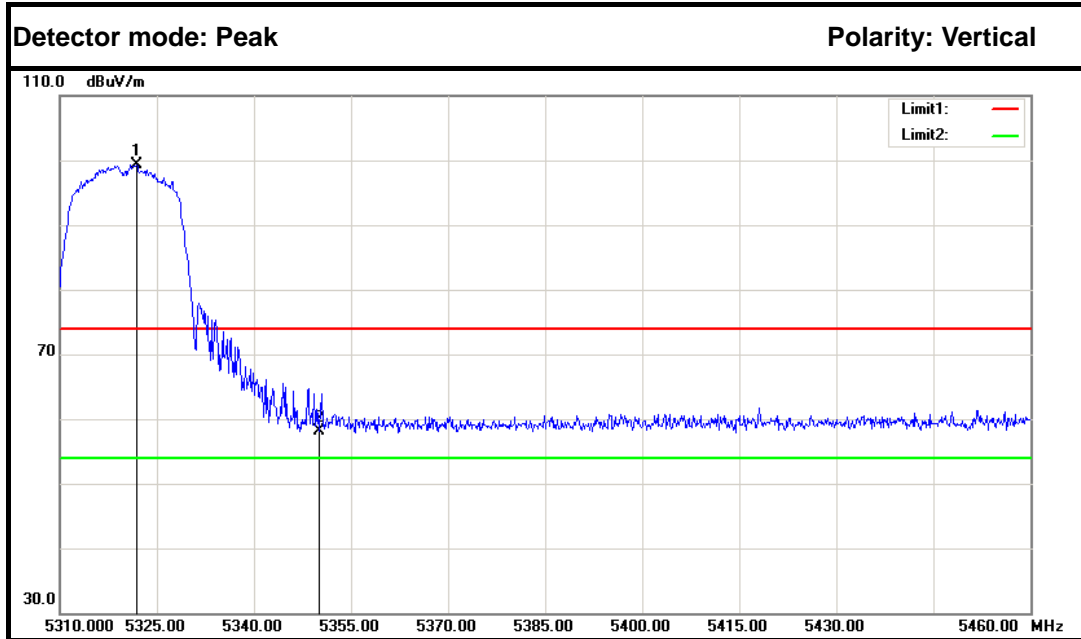



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5321.850	93.76	5.55	99.31	---	---	Peak	Vertical
2	5350.000	52.56	5.60	58.16	74.00	-15.84	Peak	Vertical
1	5321.100	84.39	5.55	89.94	---	---	Average	Vertical
2	5350.000	42.85	5.60	48.45	54.00	-5.55	Average	Vertical

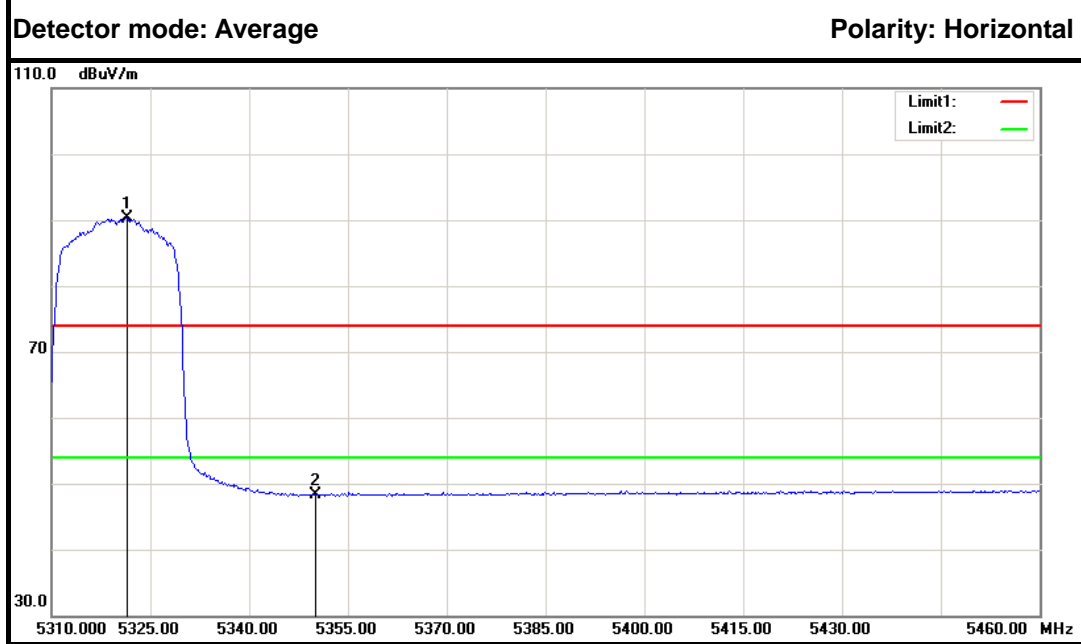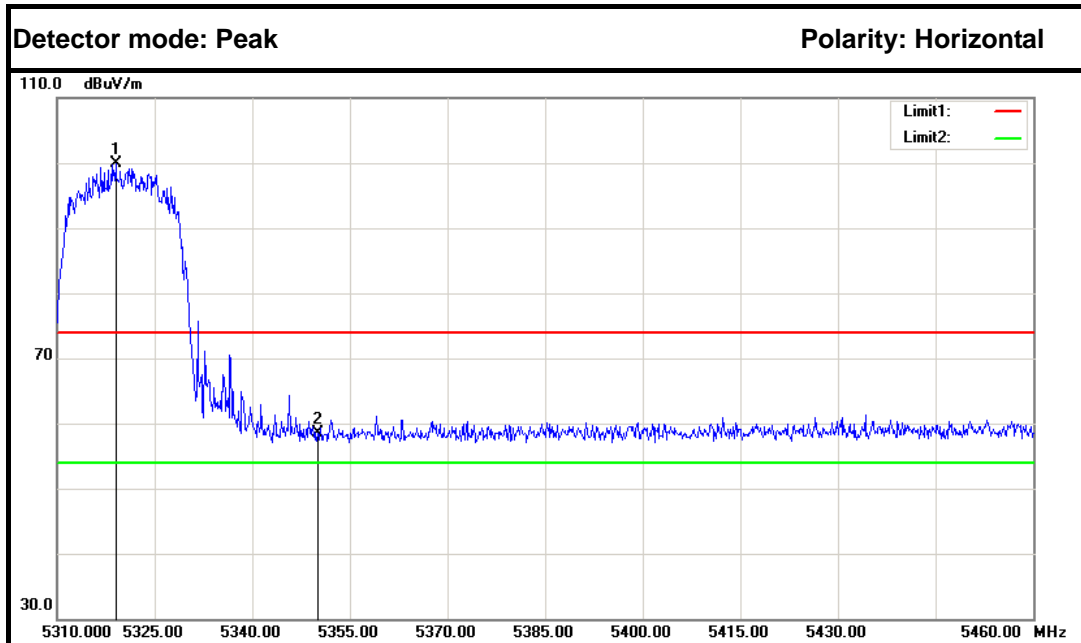



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5319.000	94.30	5.55	99.85	---	---	Peak	Horizontal
2	5350.000	52.84	5.60	58.44	74.00	-15.56	Peak	Horizontal
1	5321.400	84.84	5.55	90.39	---	---	Average	Horizontal
2	5350.000	42.75	5.60	48.35	54.00	-5.65	Average	Horizontal



IEEE 802.11n HT 40 MHz mode / 5190 MHz

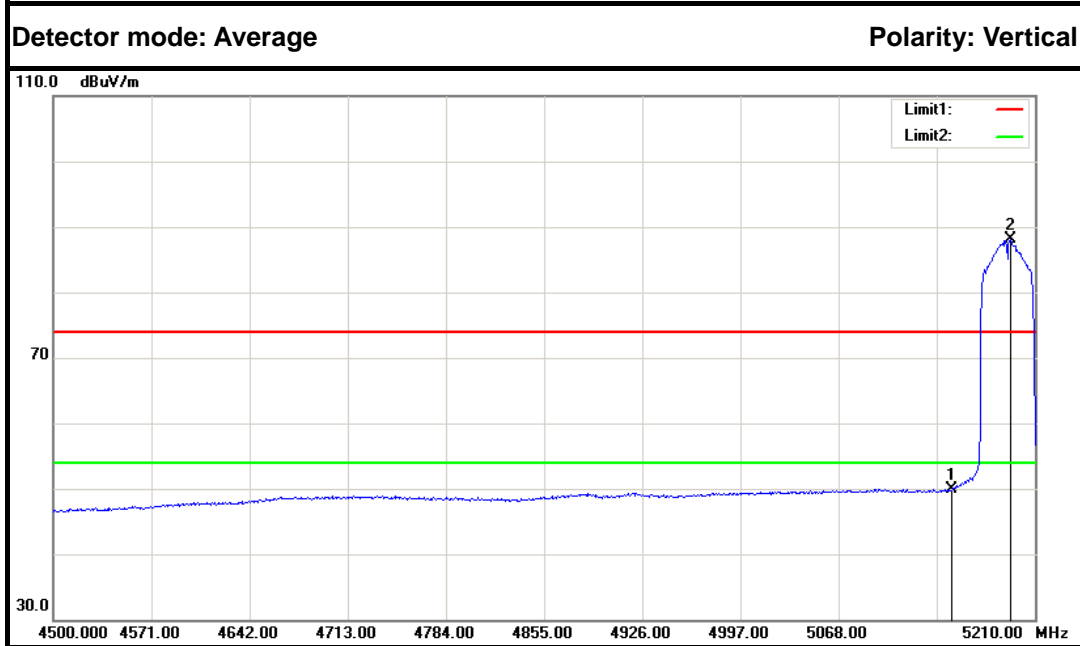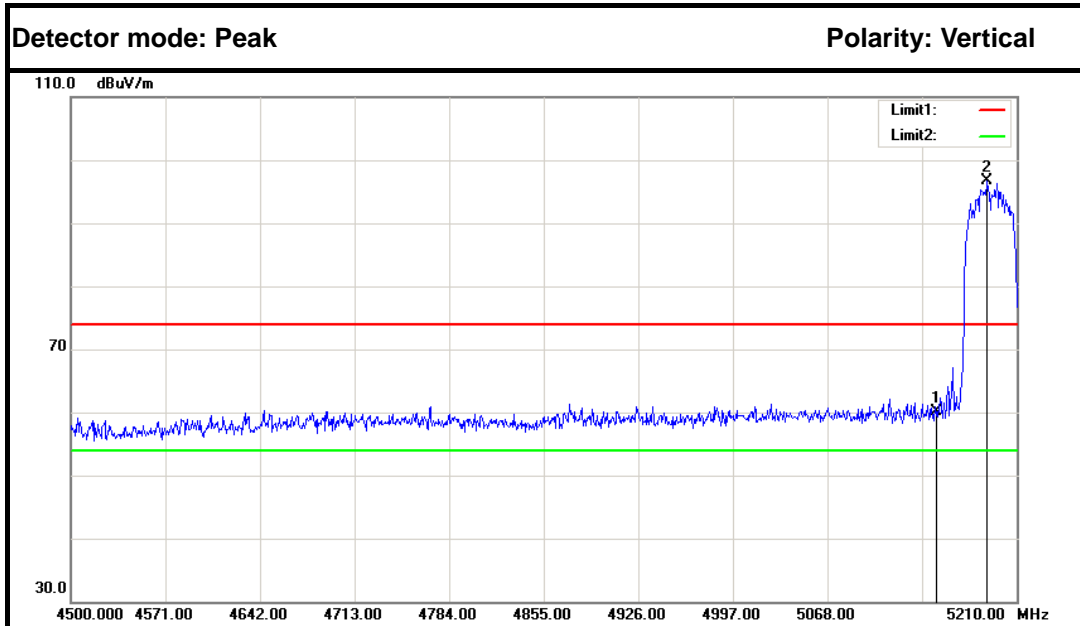



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	54.80	5.25	60.05	74.00	-13.95	Peak	Vertical
2	5187.990	91.31	5.31	96.62	---	---	Peak	Vertical
1	5150.000	44.67	5.25	49.92	54.00	-4.08	Average	Vertical
2	5192.250	82.71	5.32	88.03	---	---	Average	Vertical

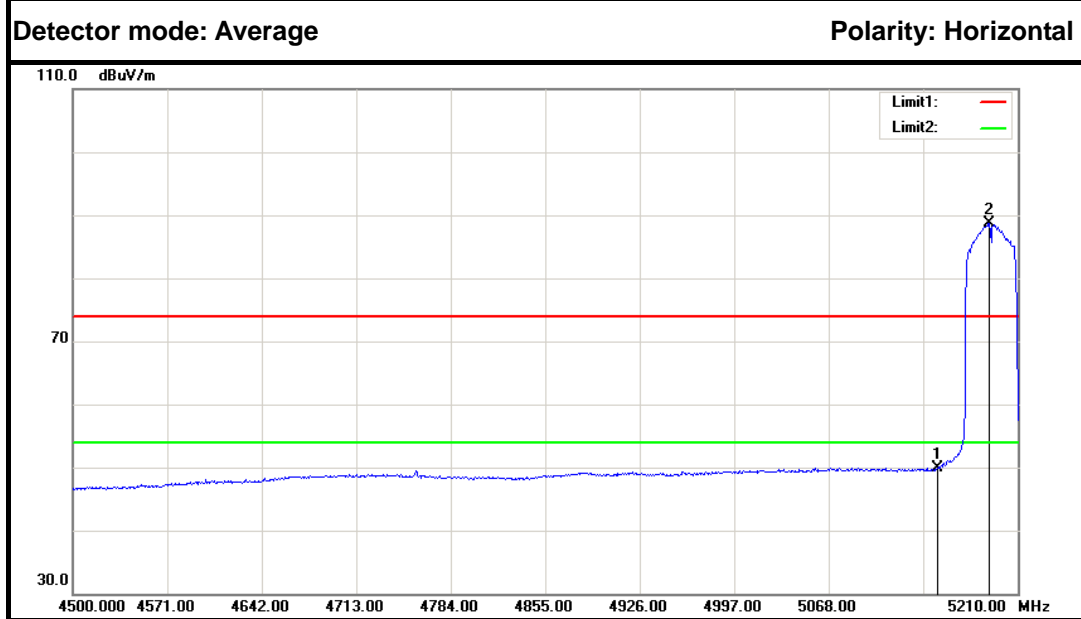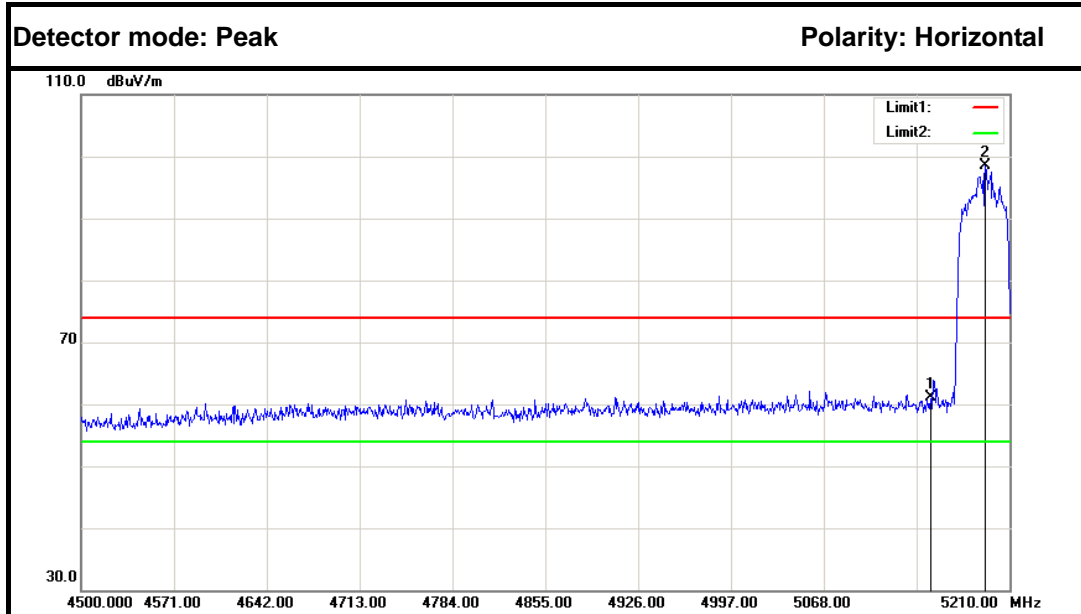



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	55.79	5.25	61.04	74.00	-12.96	Peak	Horizontal
2	5191.540	93.22	5.32	98.54	---	---	Peak	Horizontal
1	5150.000	44.74	5.25	49.99	54.00	-4.01	Average	Horizontal
2	5188.700	83.44	5.32	88.76	---	---	Average	Horizontal



IEEE 802.11n HT 40 MHz mode / 5310 MHz

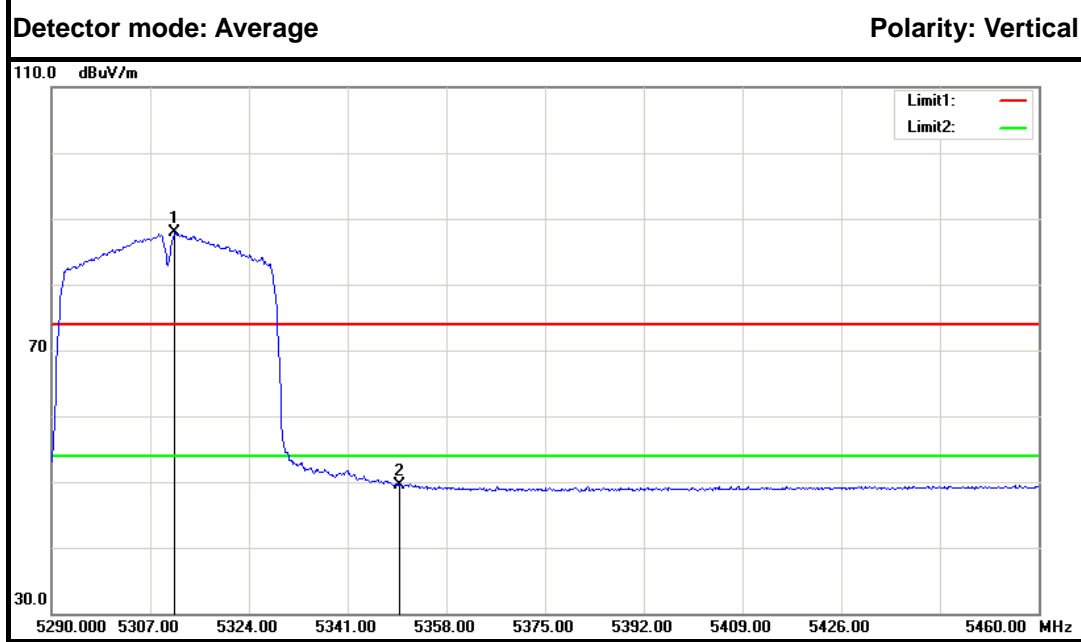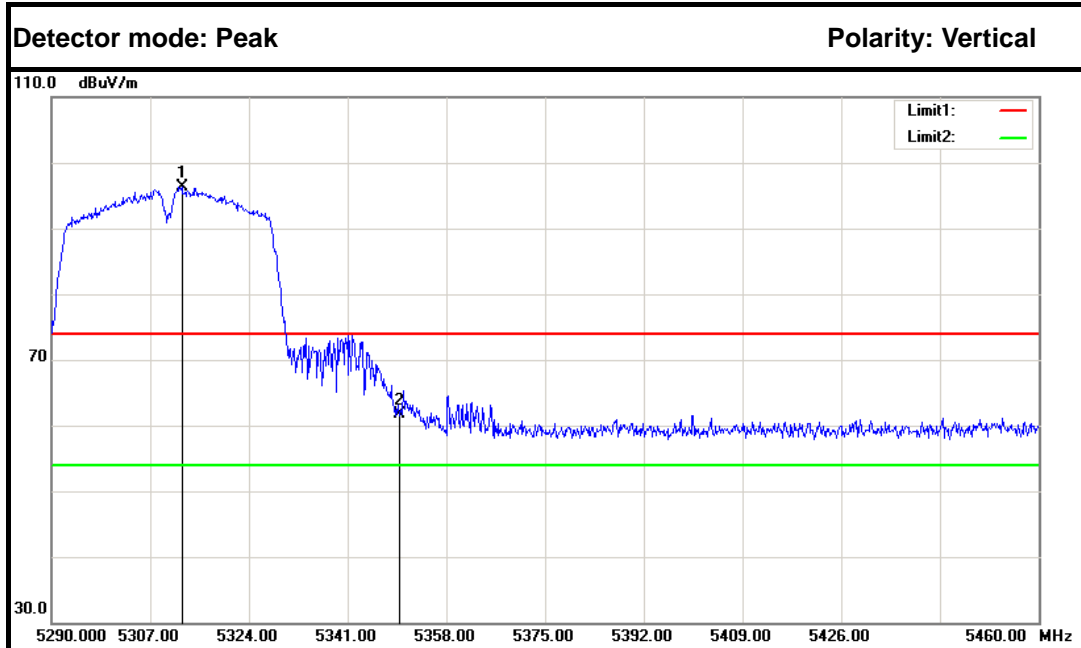



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5312.440	90.73	5.54	96.27	---	---	Peak	Vertical
2	5350.000	56.11	5.60	61.71	74.00	-12.29	Peak	Vertical
1	5311.250	82.42	5.53	87.95	---	---	Average	Vertical
2	5350.000	43.94	5.60	49.54	54.00	-4.46	Average	Vertical

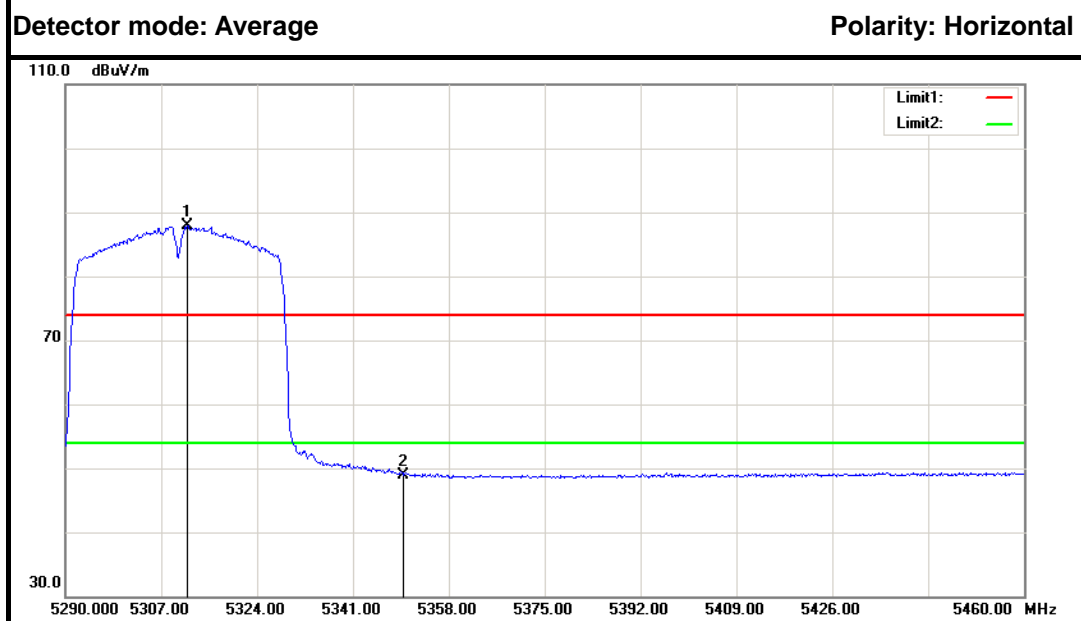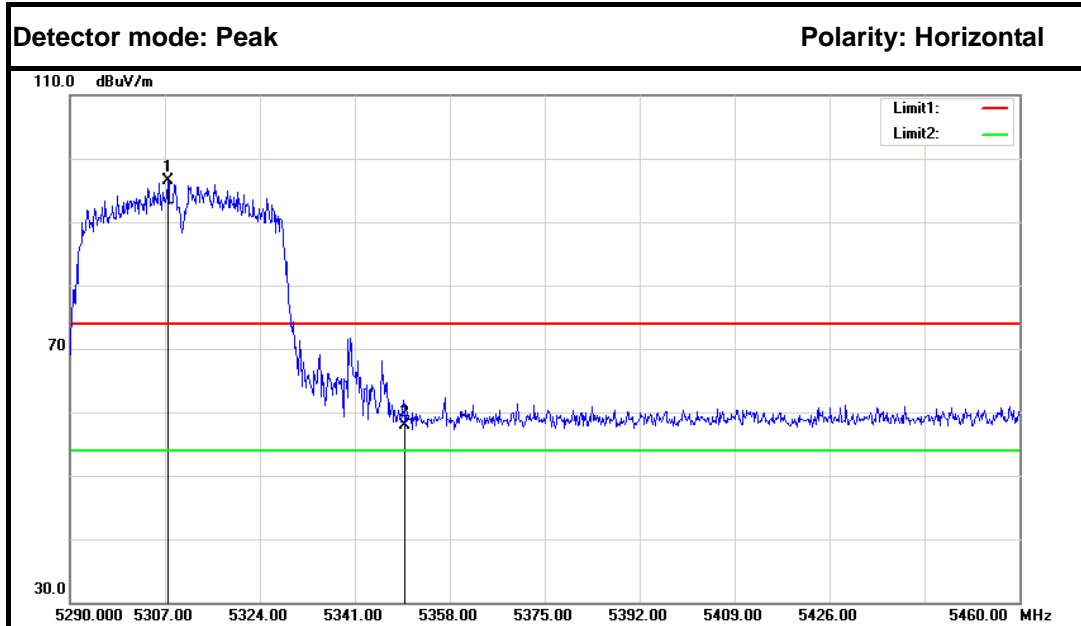

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5307.510	91.05	5.53	96.58	---	---	Peak	Horizontal
2	5350.000	52.35	5.60	57.95	74.00	-16.05	Peak	Horizontal
1	5311.590	82.36	5.53	87.89	---	---	Average	Horizontal
2	5350.000	43.31	5.60	48.91	54.00	-5.09	Average	Horizontal




IEEE 802.11ac 80 mode / 5210 MHz

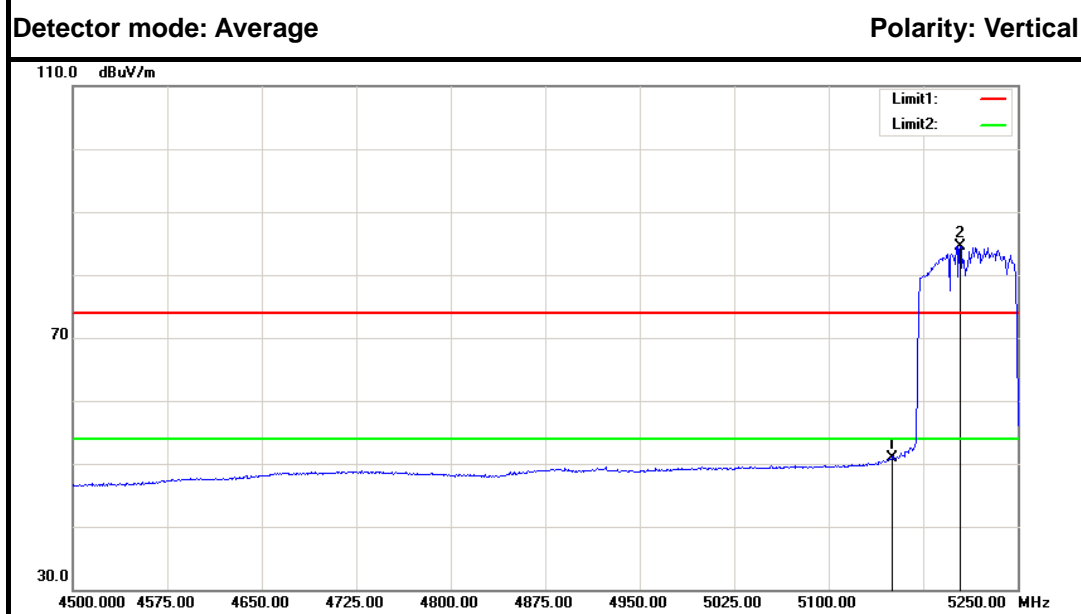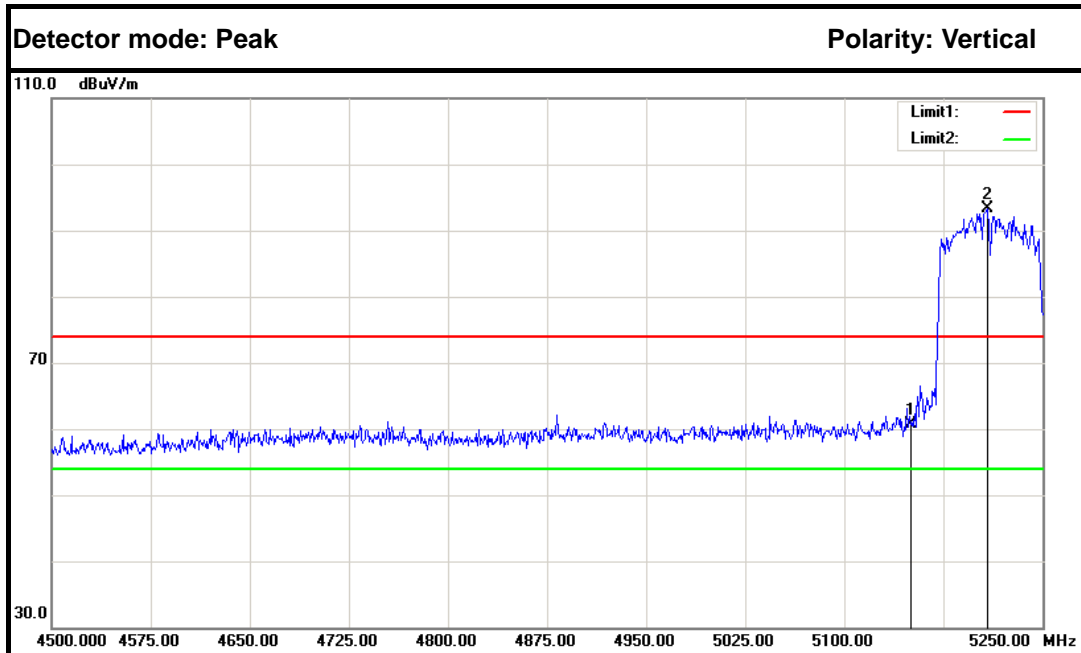

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	55.48	5.25	60.73	74.00	-13.27	Peak	Vertical
2	5208.000	87.91	5.35	93.26	---	---	Peak	Vertical
1	5150.000	45.66	5.25	50.91	54.00	-3.09	Average	Vertical
2	5204.250	79.25	5.34	84.59	---	---	Average	Vertical





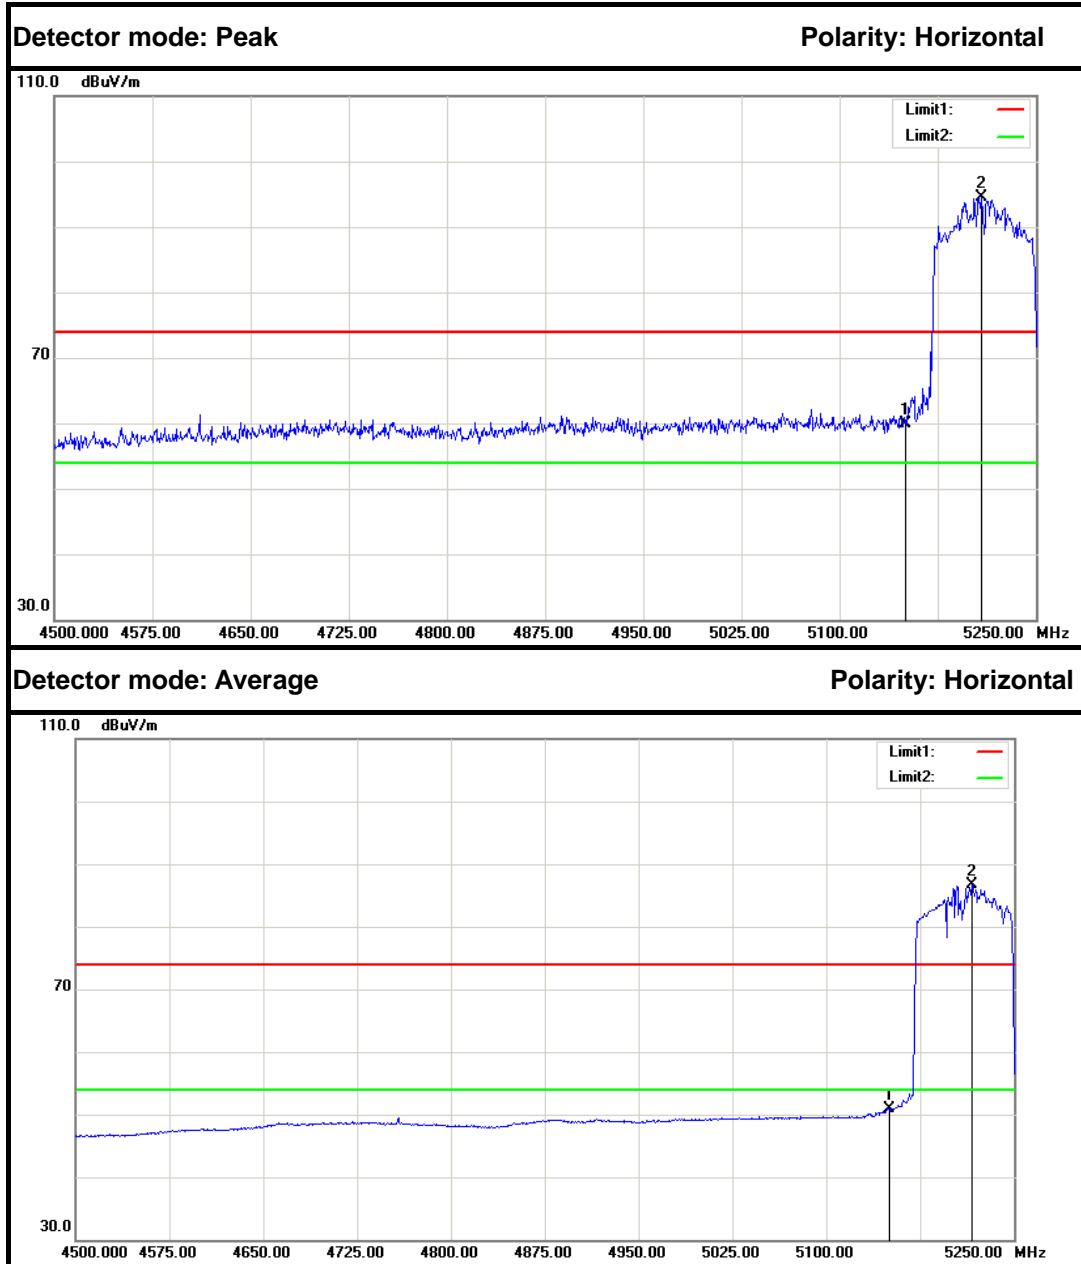



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	54.62	5.25	59.87	74.00	-14.13	Peak	Horizontal
2	5208.000	89.25	5.35	94.60	---	---	Peak	Horizontal
1	5150.000	45.74	5.25	50.99	54.00	-3.01	Average	Horizontal
2	5216.250	81.38	5.36	86.74	---	---	Average	Horizontal



IEEE 802.11ac 80 mode / 5290 MHz

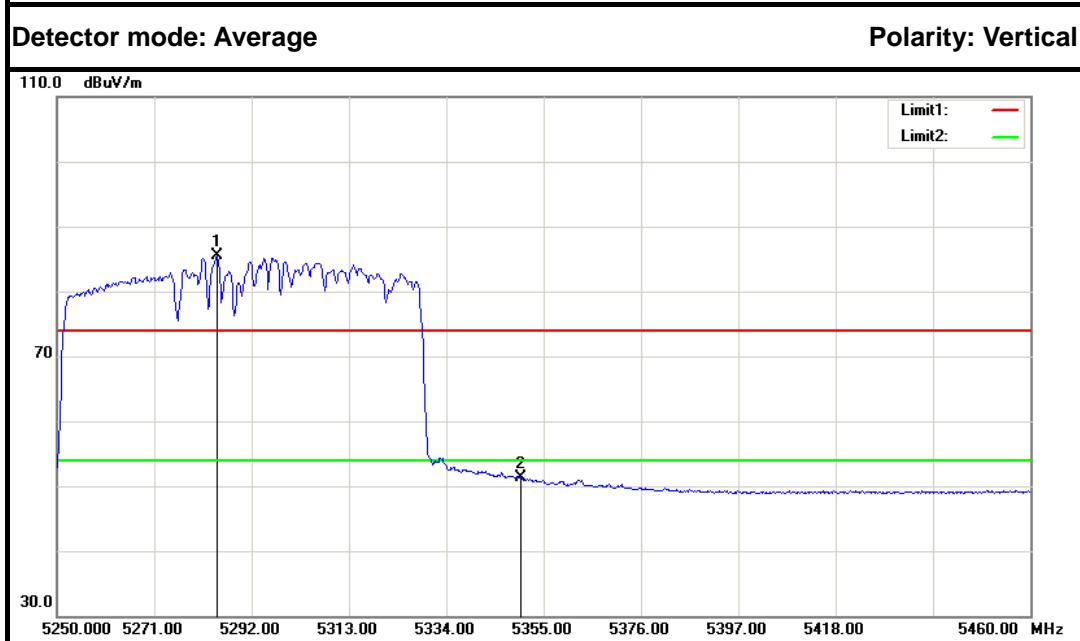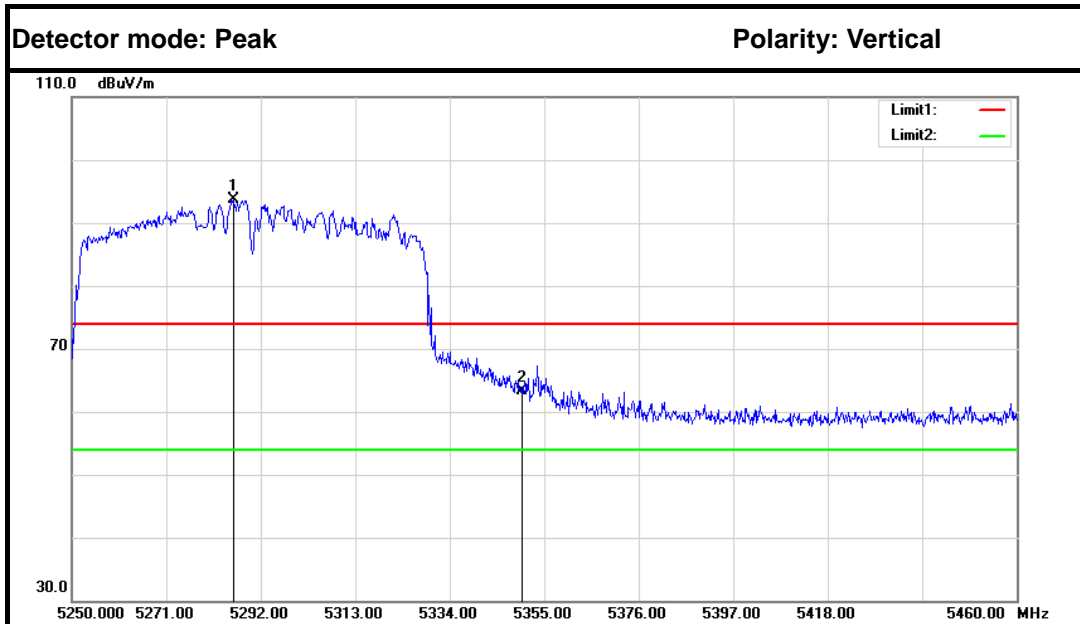

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5285.910	88.23	5.49	93.72	---	---	Peak	Vertical
2	5350.000	57.79	5.60	63.39	74.00	-10.61	Peak	Vertical
1	5284.440	79.96	5.49	85.45	---	---	Average	Vertical
2	5350.000	45.61	5.60	51.21	54.00	-2.79	Average	Vertical

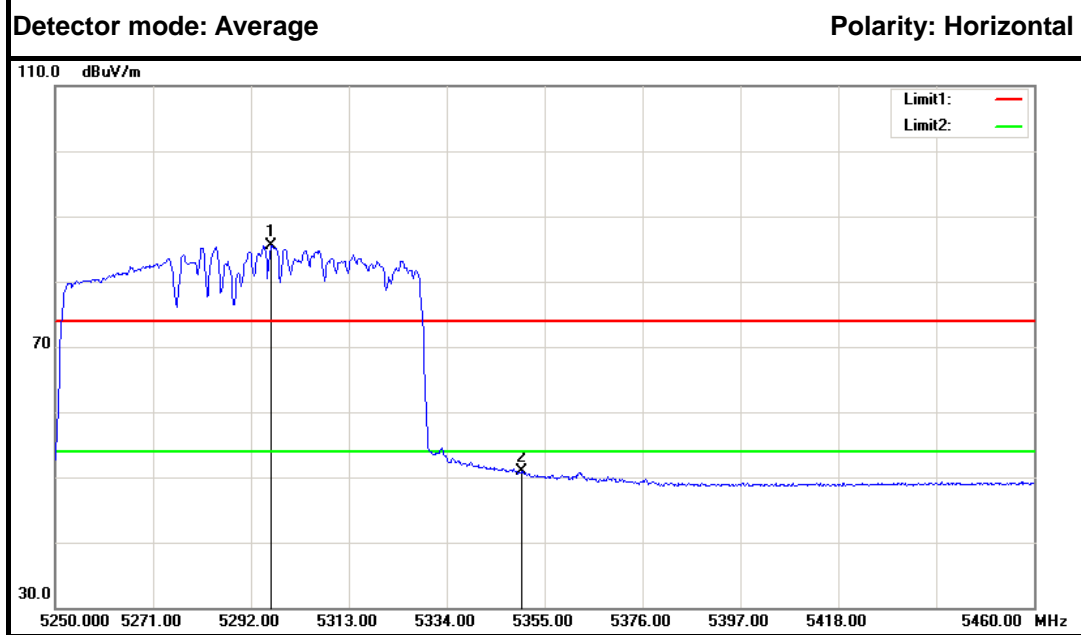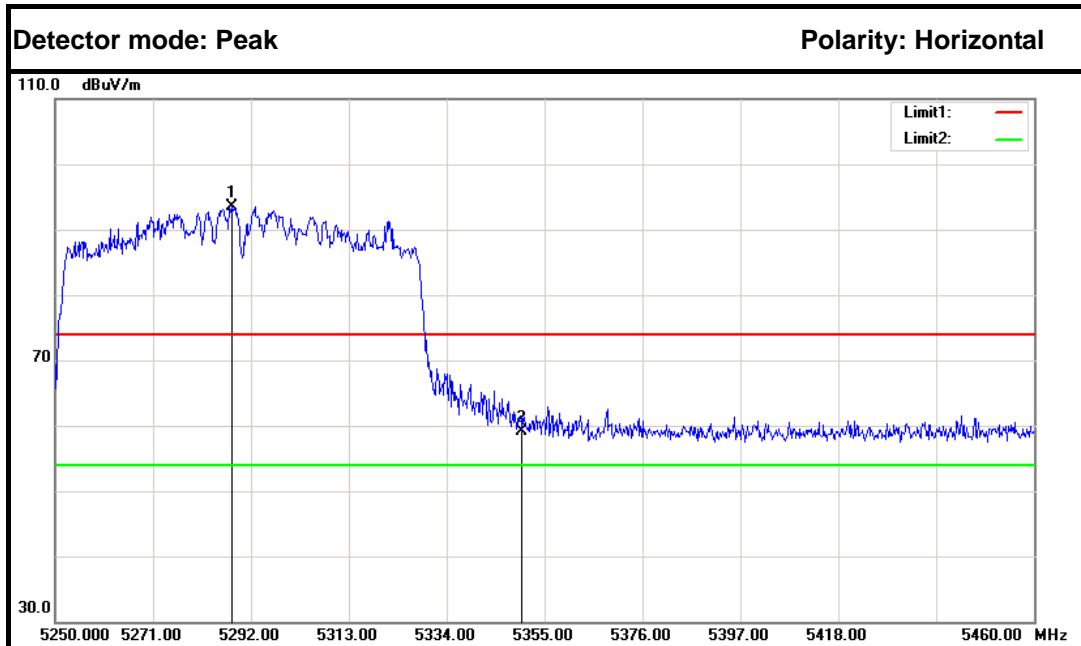

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5287.800	88.07	5.49	93.56	---	---	Peak	Horizontal
2	5350.000	53.41	5.60	59.01	74.00	-14.99	Peak	Horizontal
1	5296.410	80.03	5.51	85.54	---	---	Average	Horizontal
2	5350.000	45.27	5.60	50.87	54.00	-3.13	Average	Horizontal



## 6.6 PEAK POWER SPECTAL DENSITY

### 6.6.1 LIMIT

#### According to §15.407(a) & FCC R&O FCC 14-30

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

*Note to paragraph (a)(3): The Commission strongly recommends that parties employing U-NII devices to provide critical communications services should determine if there are any nearby Government radar systems that could affect their operation.*


#### 6.6.2 MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019

**Remark:** Each piece of equipment is scheduled for calibration once a year.



### 6.6.3 TEST CONFIGURATION



### 6.6.4 TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. For devices operating in the bands 5.15-5.25 GHz, Set the spectrum analyzer as RBW = 1MHz, VBW = 3MHz, Span > 26dB bandwidth, Sweep=1ms
3. For devices operating in the bands 5.725-5.85 GHz, Set the spectrum analyzer as RBW = 1MHz, VBW = 3MHz, Span > 26dB bandwidth, Sweep=1ms
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed



## 6.6.5 TEST RESULTS

### Test Data

#### Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5180	4.792	11	-6.208	PASS
Mid	5200	5.079		-5.921	PASS
High	5240	5.263		-5.737	PASS

#### Test mode: IEEE 802.11a mode / 5260~ 5320MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5260	5.436	11	-5.564	PASS
Mid	5300	5.064		-5.936	PASS
High	5320	4.593		-6.407	PASS

#### Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5500	5.464	11	-5.536	PASS
Mid	5580	5.011		-5.989	PASS
High	5700	4.913		-6.087	PASS

#### Test mode: IEEE 802.11a mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5745	1.979	30	-28.021	PASS
Mid	5785	2.197		-27.803	PASS
High	5825	2.174		-27.826	PASS

Remark:

Directional Gain=  $G_{ant} + 10\log(N_{ant})$  dBi

$G_{ant}$ : Gain of Individual Antennas (Same for Each Antenna)

The RBW factor =  $10\log_{10}(500/470)=0.269$  dB into test plots.



**Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5180	4.648	11	-6.352	PASS
Mid	5200	4.928		-6.072	PASS
High	5240	4.904		-6.096	PASS

**Test mode: IEEE 802.11n HT 20 MHz mode / 5260~ 5320MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5260	5.015	11	-5.985	PASS
Mid	5300	4.465		-6.535	PASS
High	5320	4.572		-6.428	PASS

**Test mode: IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5500	5.007	11	-5.993	PASS
Mid	5580	4.406		-6.594	PASS
High	5700	4.667		-6.333	PASS

**Test mode: IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5745	1.332	30	-28.668	PASS
Mid	5785	1.805		-28.195	PASS
High	5825	1.743		-28.257	PASS

Remark:

The RBW factor =  $10\log_{10}(500/470)=0.269$  dB into test plots.





**Test mode: IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5190	1.782	11	-9.218	PASS
High	5230	2.365		-8.635	PASS

**Test mode: IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5270	2.161	11	-8.839	PASS
High	5310	2.277		-8.723	PASS

**Test mode: IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5510	2.742	11	-8.258	PASS
Mid	5550	2.782		-8.218	PASS
High	5670	2.135		-8.865	PASS

**Test mode: IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5755	-1.194	30	-31.194	PASS
High	5795	-0.875		-30.875	PASS

Remark:

The RBW factor =  $10\log_{10}(500/470)=0.269$  dB into test plots.



**Test mode: IEEE 802.11ac 80 mode / 5210MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin	Result
	5210	0.179	11	-10.821	PASS

**Test mode: IEEE 802.11ac 80 mode / 5290MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin	Result
	5290	1.206	11	-9.794	PASS

**Test mode: IEEE 802.11ac 80 mode / 5530MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin	Result
	5530	1.279	11	-9.721	PASS

**Test mode: IEEE 802.11ac 80 mode / 5775MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin	Result
	5775	-2.283	30	-32.283	PASS

Remark:


The RBW factor =  $10\log_{10}(500/470)=0.269$  dB into test plots.




### Test Plot


IEEE 802.11a mode / 5180 ~ 5240MHz

PPSD (CH Low)

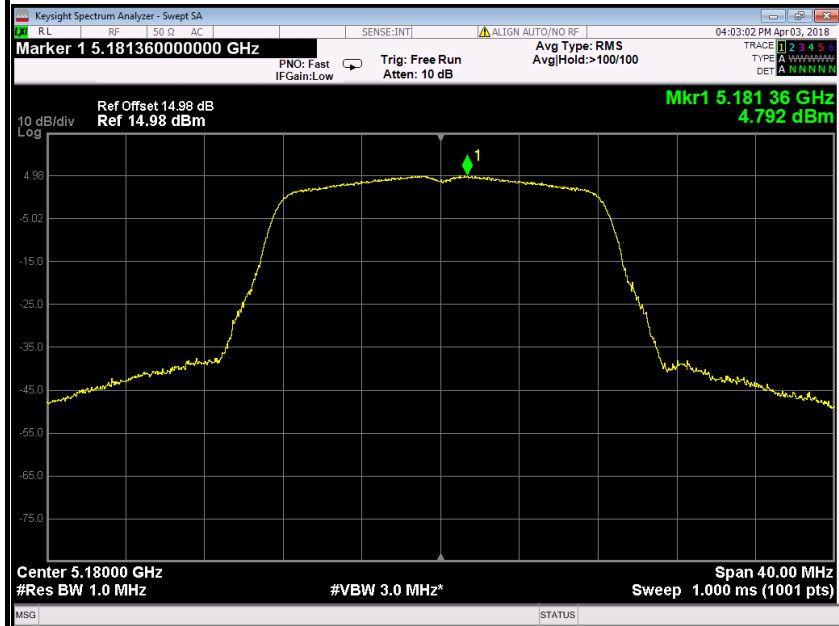


PPSD (CH Mid)

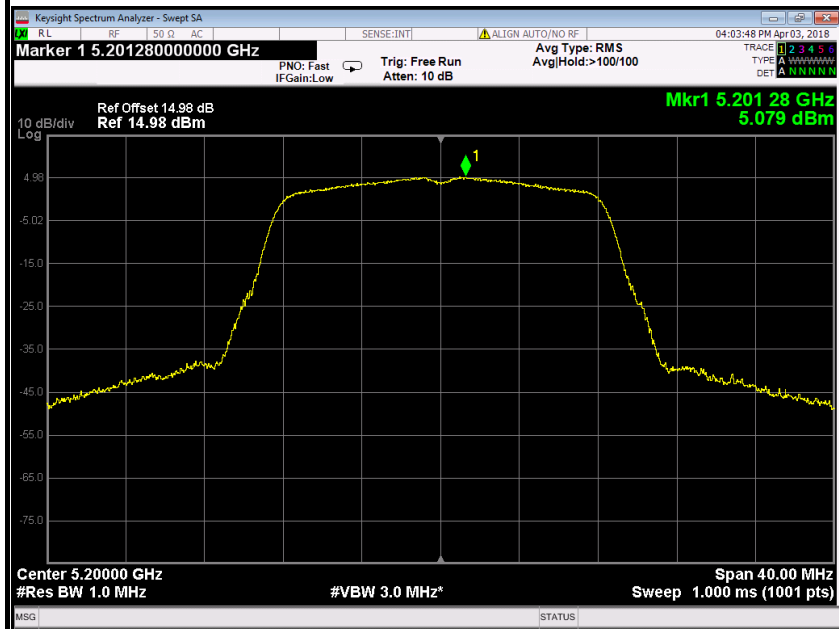

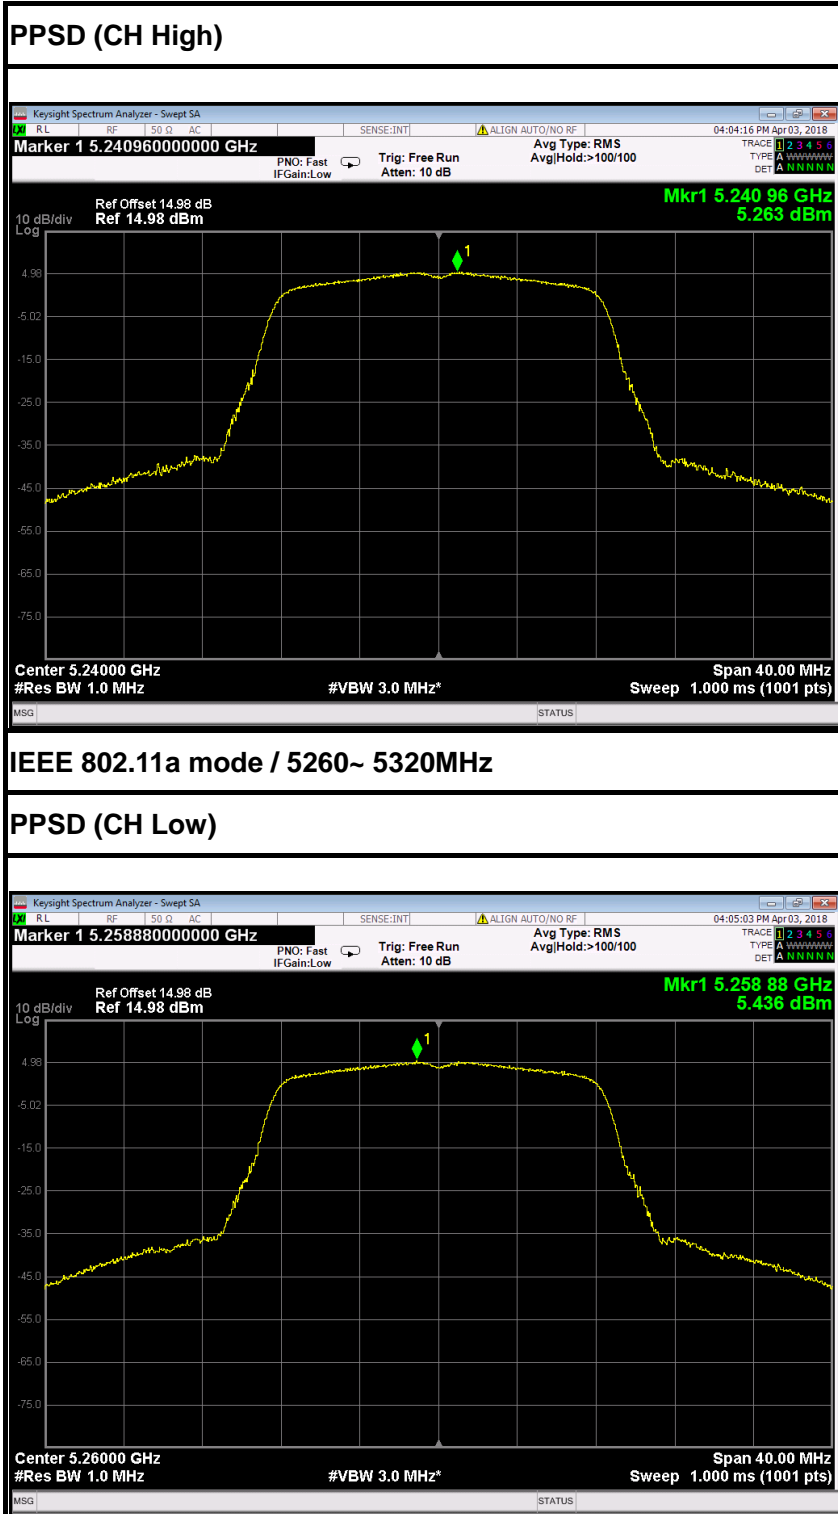




### PPSD (CH Mid)

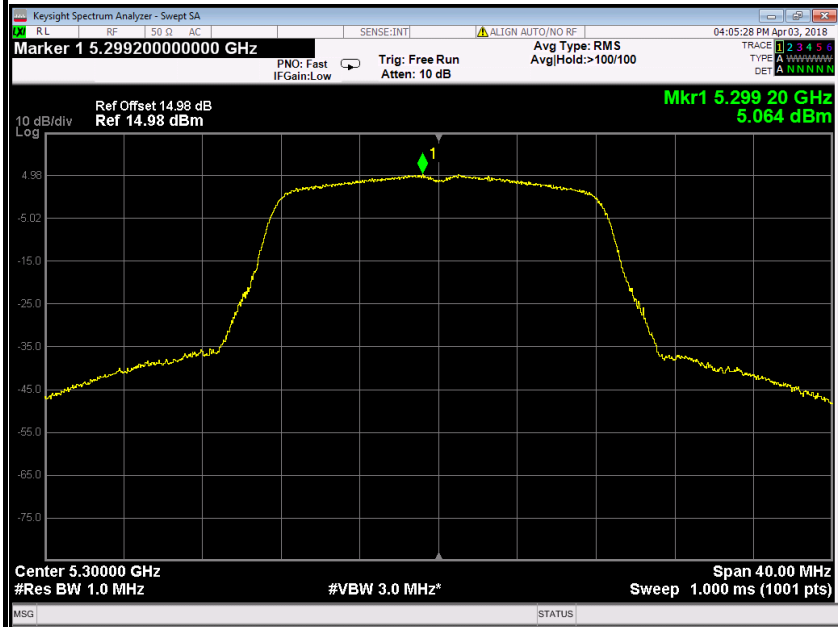


### PPSD (CH High)

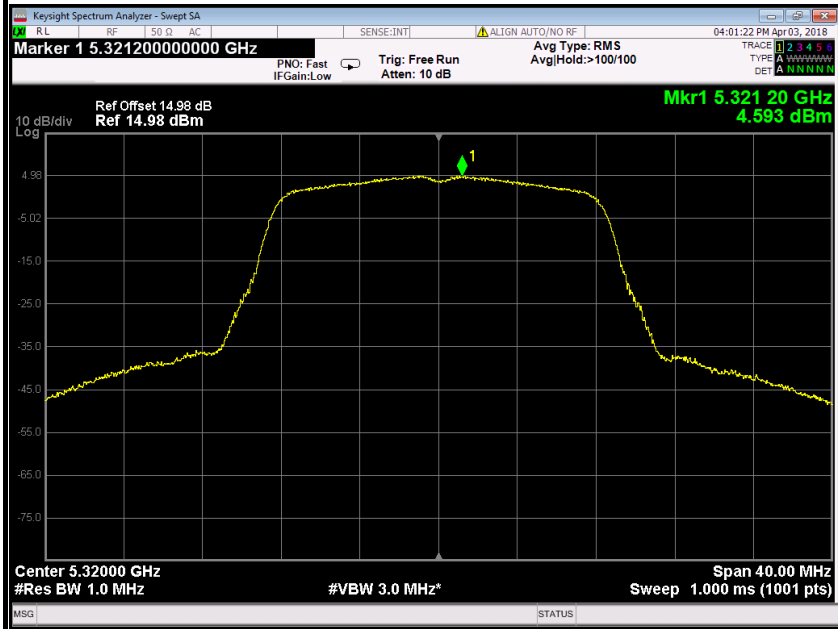




IEEE 802.11a mode / 5500 ~ 5700MHz

PPSD (CH Low)

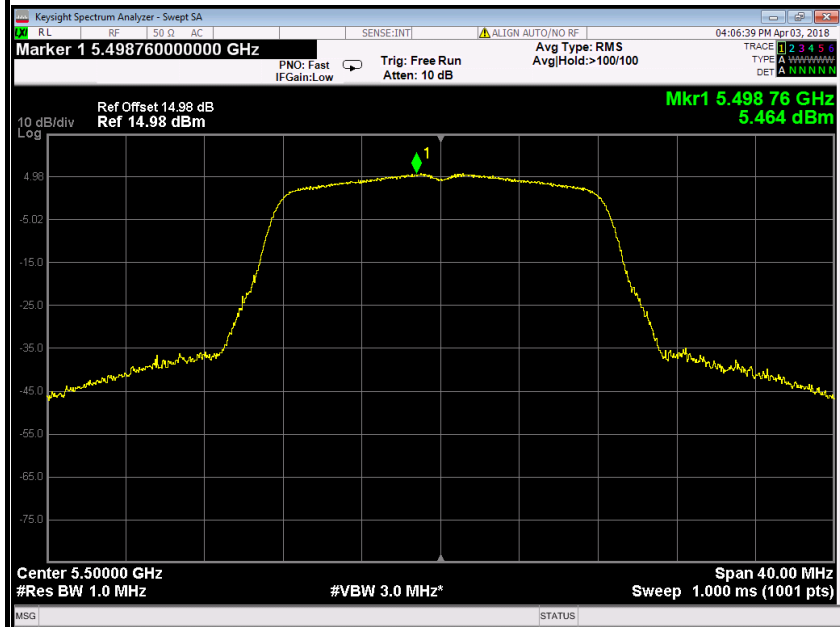


PPSD (CH Mid)

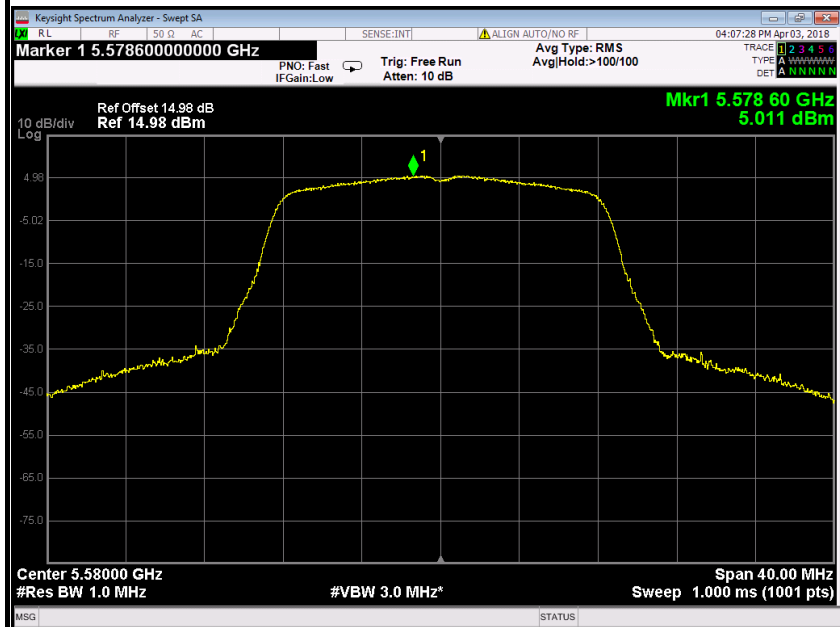





### PPSD (CH High)

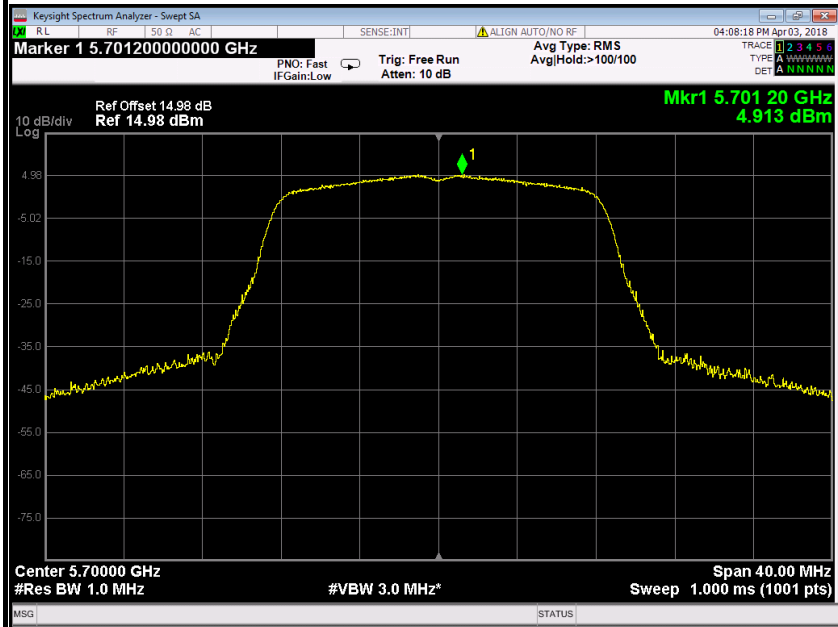

### IEEE 802.11a mode / 5745 ~ 5825MHz

### PPSD (CH Low)

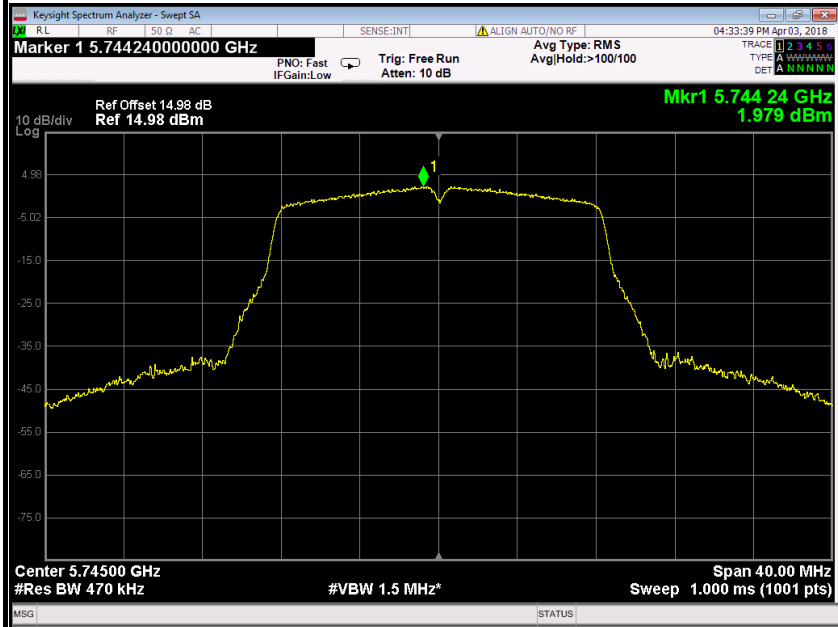

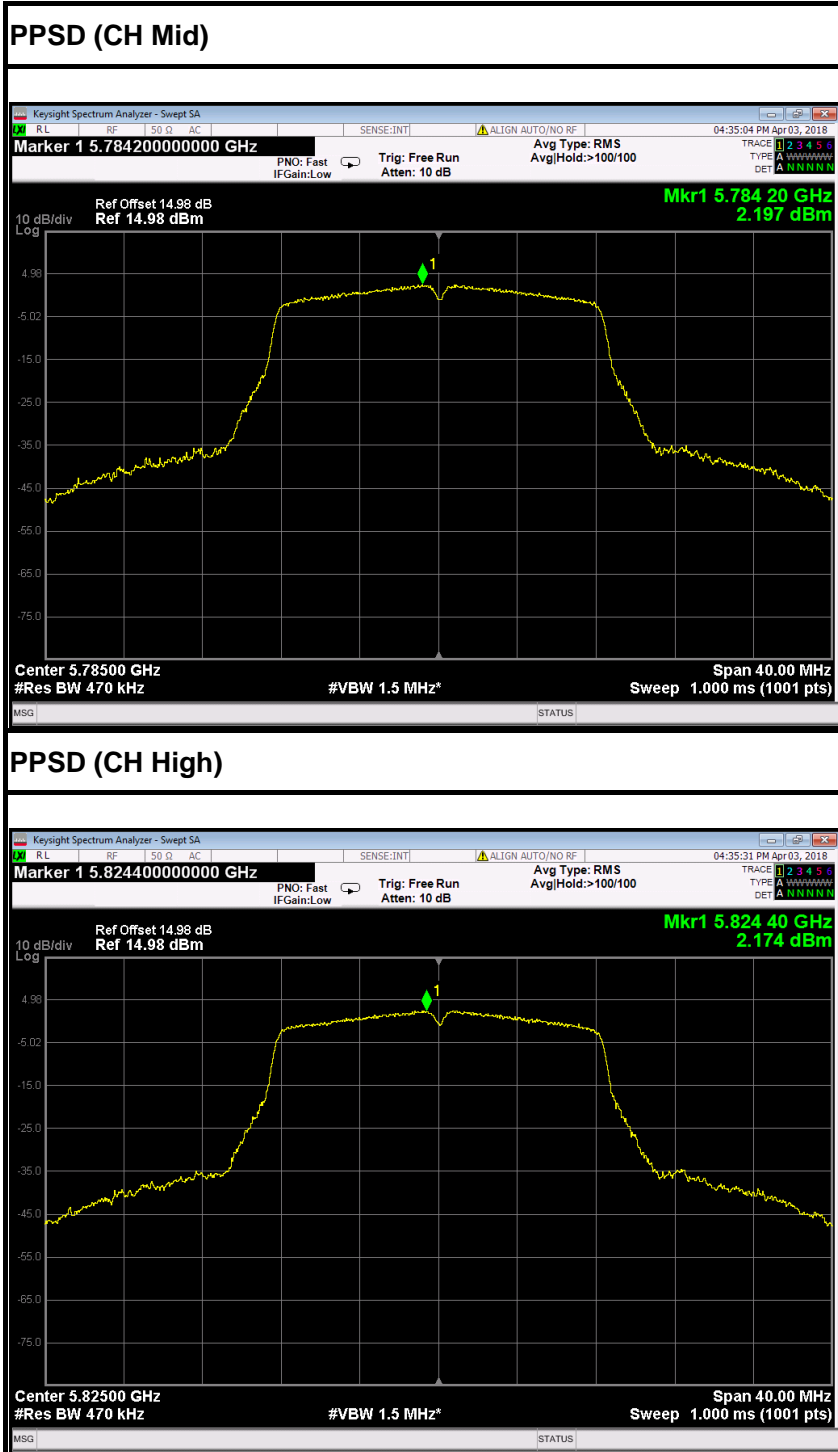







IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz

PPSD (CH Low)

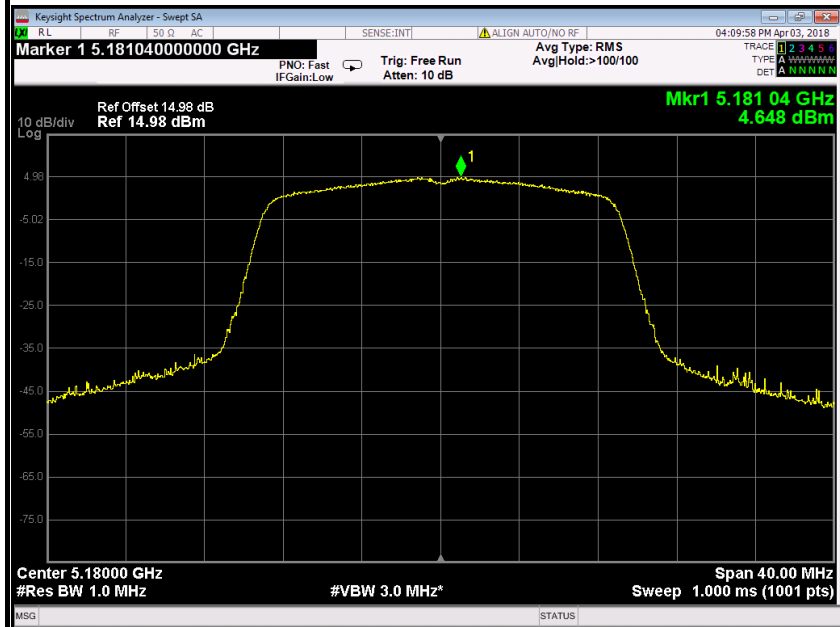


PPSD (CH Mid)

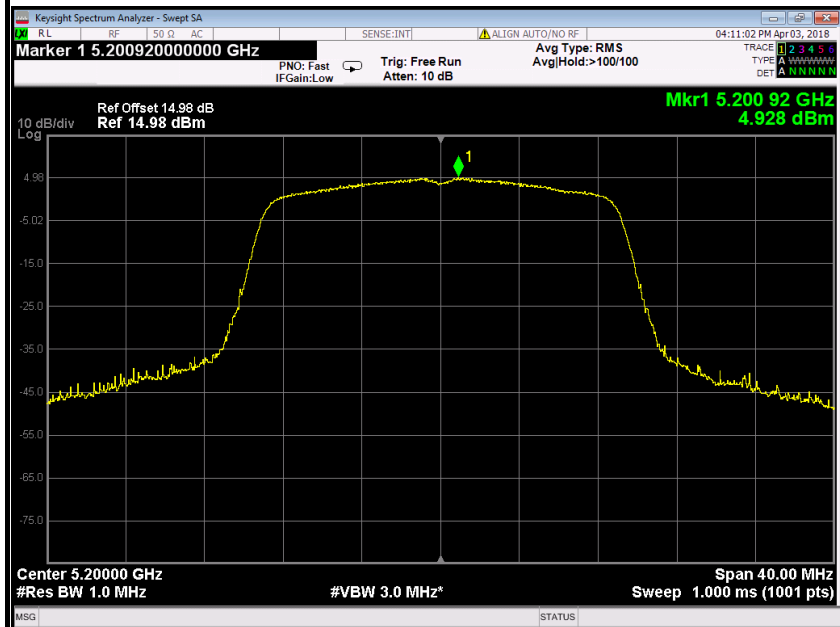



### PPSD (CH High)

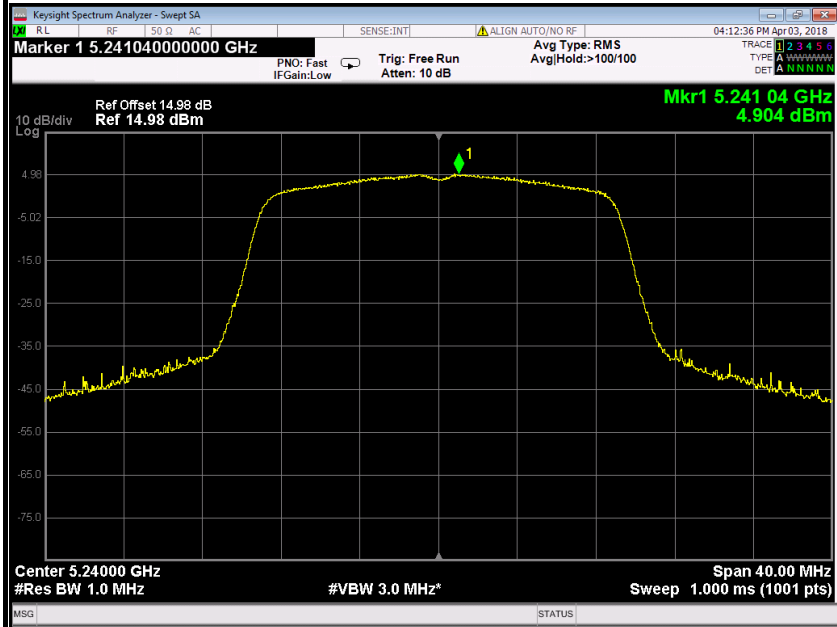

### IEEE 802.11n HT 20 MHz mode / 5260~ 5320MHz

### PPSD (CH Low)

