



# FCC RF Test Report

**APPLICANT** : Acer Incorporated  
**EQUIPMENT** : Smart HandHeld  
**BRAND NAME** : Acer  
**MODEL NAME** : S56  
**MARKETING NAME** : Liquid Jade S  
**FCC ID** : HLZDMS56  
**STANDARD** : FCC 47 CFR Part 2, 22(H), 24(E)  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Sep. 24, 2014 and testing was completed on Nov. 27, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test ..... 5

    1.4 Product Specification subjective to this standard..... 6

    1.5 Modification of EUT ..... 6

    1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator ..... 7

    1.7 Testing Location ..... 7

    1.8 Applicable Standards ..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Test Mode..... 9

    2.2 Connection Diagram of Test System ..... 12

    2.3 Support Unit used in test configuration ..... 12

    2.4 Measurement Results Explanation Example ..... 12

**3 TEST RESULT..... 13**

    3.1 Conducted Output Power Measurement..... 13

    3.2 Peak-to-Average Ratio ..... 15

    3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement ..... 30

    3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement..... 37

    3.5 Band Edge Measurement..... 57

    3.6 Conducted Spurious Emission Measurement..... 71

    3.7 Field Strength of Spurious Radiation Measurement ..... 118

    3.8 Frequency Stability Measurement..... 138

**4 LIST OF MEASURING EQUIPMENT ..... 143**

**5 UNCERTAINTY OF EVALUATION ..... 144**

**APPENDIX A. SETUP PHOTOGRAPHS**





## SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	RSS-132 (5.4) RSS-133 (6.4)	Conducted Output Power	N/A	PASS	-
3.2	§24.232(d)	RSS-132 (5.4) RSS-133(6.4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.3	§22.913(a)(2)	RSS-132(5.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.4	§2.1049 §22.917(b) §24.238(b)	RSS-GEN(4.6.1) RSS-132 (3.1) RSS-133 (3.1)	99% Occupied Bandwidth and 26dB Bandwidth	N/A	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Band Edge Measurement	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Conducted Spurious Emission	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Field Strength of Spurious Radiation	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 17.23 dB at 3819.600 MHz
3.8	§2.1055 §22.355	RSS-132(5.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-
	§2.1055 §24.235	RSS-133(6.3)		Within Authorized Band		



# 1 General Description

## 1.1 Applicant

**Acer Incorporated**

8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C)

## 1.2 Manufacturer

**Shanghai Sunrise Simcom Limited**

No. 888, Shengli Rd., Qingpu, Shanghai, P.R.China 201700

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart HandHeld
Brand Name	Acer
Model Name	S56
Marketing Name	Liquid Jade S
FCC ID	HLZDMS56
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(Downlink Only)/ LTE/WLAN 2.4GHz 802.11b/g/n (HT20/HT40)/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
<b>Tx Frequency</b>	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
<b>Rx Frequency</b>	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz
<b>Maximum Output Power to Antenna</b>	GSM850 : 32.66 dBm GSM1900 : 30.02 dBm WCDMA Band V : 22.31 dBm WCDMA Band II : 22.37 dBm
<b>Antenna Type</b>	PIFA Antenna
<b>Type of Modulation</b>	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) HSPA+: 16QAM (Downlink Only)

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GSM	GMSK	0.6310	0.0717 ppm	248KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.1517	0.0574 ppm	250KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.0572	0.0634 ppm	4M24F9W
Part 24	GSM1900 GSM	GMSK	1.3359	0.0399 ppm	248KGXW
Part 24	GSM1900 EDGE class 8	8PSK	0.6173	0.0447 ppm	248KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.3395	0.0282 ppm	4M24F9W

### 1.7 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.	
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Registration No.</b>
	TH01-KS	149928

<b>Test Site</b>	SPORTON INTERNATIONAL (SHENZHEN) INC.	
<b>Test Site Location</b>	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-3320-2398	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Registration No.</b>
	03CH01-SZ	831040



## **1.8 Applicable Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

### **Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10 times of fundamental signal for GSM850 and WCDMA Band V.
2. 30 MHz to 10 times of fundamental signal for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE class 8 Link</li> </ul>	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE class 8 Link</li> </ul>
GSM 1900	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE class 8 Link</li> </ul>	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE class 8 Link</li> </ul>
WCDMA Band V	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>
WCDMA Band II	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>

**Note:** The maximum power levels are chosen to test as the worst case configuration as follows:

GSM mode for GMSK modulation,

EDGE multi-slot class 8 mode for 8PSK modulation,

RMC 12.2Kbps mode for WCDMA band V,

RMC 12.2Kbps mode for WCDMA band II, only these modes were used for all tests.



Conducted Power Measurement Results:

SIM 1:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	32.66	32.62	32.64	30.02	29.73	29.40
GPRS class 8	32.65	32.62	32.61	30.01	29.73	29.39
GPRS class 10	32.10	32.08	32.02	27.69	27.39	27.06
GPRS class 11	30.60	30.56	30.51	25.69	25.41	25.13
GPRS class 12	29.64	29.54	29.52	24.71	24.42	24.10
EGPRS class 8	26.00	26.39	26.68	25.93	25.50	24.99
EGPRS class 10	25.20	25.52	25.84	25.10	24.61	24.10
EGPRS class 11	23.35	23.76	24.06	23.12	22.64	22.08
EGPRS class 12	22.15	22.56	22.81	22.21	21.72	21.18

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
AMR 12.2K	22.12	22.29	22.28	22.35	22.16	22.23
RMC 12.2K	22.14	22.30	22.31	22.37	22.21	22.26
HSDPA Subtest-1	21.16	21.29	21.20	21.28	21.23	21.27
HSDPA Subtest-2	21.19	21.32	21.24	21.30	21.21	21.26
HSDPA Subtest-3	20.70	20.87	20.73	20.84	20.75	20.81
HSDPA Subtest-4	20.67	20.83	20.74	20.81	20.73	20.80
HSUPA Subtest-1	18.63	18.82	18.86	19.05	19.22	19.06
HSUPA Subtest-2	18.65	18.87	18.84	19.07	19.20	19.05
HSUPA Subtest-3	19.71	19.80	19.73	20.00	20.10	19.95
HSUPA Subtest-4	18.10	18.29	18.46	18.57	18.72	18.59
HSUPA Subtest-5	20.04	20.24	20.16	20.46	20.53	20.34




SIM 2:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	32.46	32.41	32.44	29.80	29.49	29.18
GPRS class 8	32.44	32.37	32.37	29.74	29.51	29.15
GPRS class 10	31.85	31.80	31.80	27.40	27.20	26.84
GPRS class 11	30.43	30.34	30.29	25.46	25.19	24.96
GPRS class 12	29.44	29.32	29.35	24.43	24.21	23.89
EGPRS class 8	25.76	26.15	26.41	25.66	25.34	24.72
EGPRS class 10	24.97	25.28	25.62	24.88	24.39	23.89
EGPRS class 11	23.17	23.55	23.86	22.85	22.49	21.80
EGPRS class 12	21.97	22.30	22.67	21.99	21.59	20.96

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
AMR 12.2K	22.07	22.17	22.25	22.25	22.04	22.11
RMC 12.2K	22.03	22.14	22.27	22.29	22.07	22.16
HSDPA Subtest-1	21.07	21.25	21.10	21.10	21.10	21.14
HSDPA Subtest-2	21.08	21.29	21.13	21.13	21.08	21.01
HSDPA Subtest-3	20.56	20.77	20.66	20.64	20.69	20.66
HSDPA Subtest-4	20.54	20.72	20.63	20.67	20.55	20.59
HSUPA Subtest-1	18.52	18.78	18.75	18.98	19.11	18.95
HSUPA Subtest-2	18.54	18.75	18.72	18.95	19.12	18.92
HSUPA Subtest-3	19.65	19.72	19.65	19.89	19.98	19.88
HSUPA Subtest-4	18.05	18.22	18.35	18.45	18.65	18.46
HSUPA Subtest-5	20.01	20.18	20.02	20.32	20.43	20.25

## 2.2 Connection Diagram of Test System

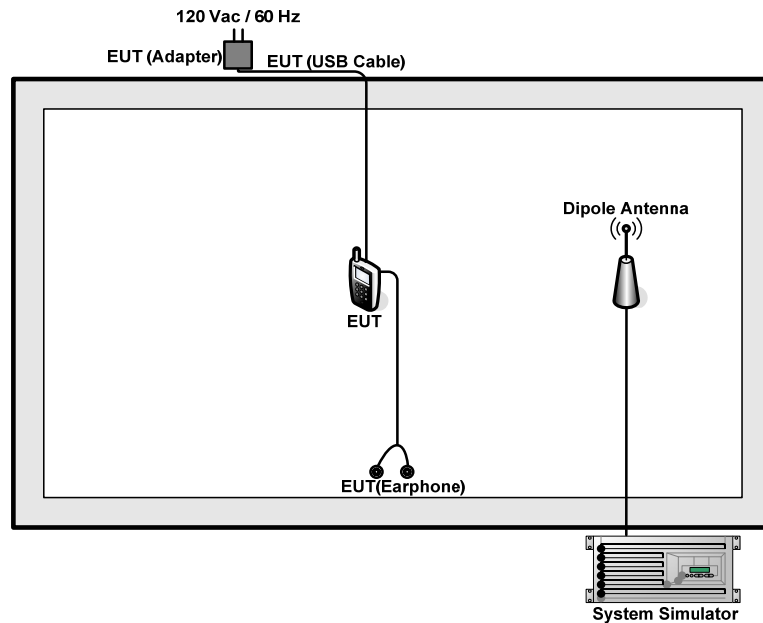

## 2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW	3303D	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 6.0 dB and a 10dB attenuator.

Example :

*Offset(dB) = RF cable loss(dB) + attenuator factor(dB).*

$$= 6.0 + 10 = 16.0 \text{ (dB)}$$

### **3 Test Result**

#### **3.1 Conducted Output Power Measurement**

##### **3.1.1 Description of the Conducted Output Power Measurement**

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### **3.1.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

##### **3.1.3 Test Procedures**

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

##### **3.1.4 Test Setup**

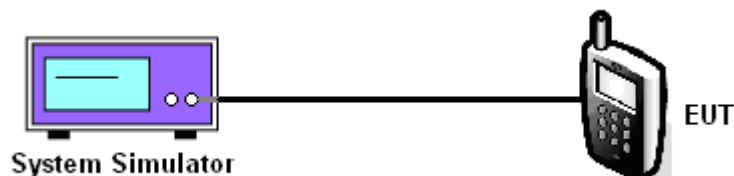

### 3.1.5 Test Result of Conducted Output Power

Cellular Band									
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	32.66	32.62	32.64	26.00	26.39	26.68	22.14	22.30	22.31
Conducted Power (Watts)	1.85	1.83	1.84	0.40	0.44	0.47	0.16	0.17	0.17

PCS Band									
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	30.02	29.73	29.40	25.93	25.50	24.99	22.37	22.21	22.26
Conducted Power (Watts)	1.01	0.94	0.87	0.39	0.35	0.32	0.17	0.17	0.17

**Note:** maximum burst average power for GSM, and maximum average power for WCDMA.



## 3.2 Peak-to-Average Ratio

### 3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. For GSM/EGPRS operating modes:
  - a. Set EUT in maximum power output.
  - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector on spectrum analyzer for first trace.
  - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector on spectrum analyzer for second trace.
  - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator has synchronized with the spectrum analyzer.
4. For UMTS operating modes:
  - a. Set the CCDF (Complementary Cumulative Distribution Function) option on the spectrum analyzer.
  - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

### 3.2.4 Test Setup

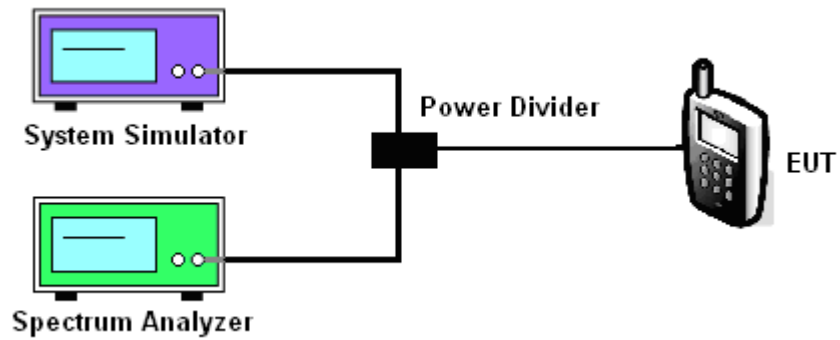



### 3.2.5 Test Result of Peak-to-Average Ratio

Cellular Band									
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Peak-to-Average Ratio (dB)	0.87	0.96	1.37	3.80	2.98	2.91	2.18	2.56	2.66


PCS Band									
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.58	0.23	0.22	3.51	3.17	3.01	2.72	2.80	2.76



### 3.2.6 Test Result (Plots) of Peak-to-Average Ratio


<b>Band :</b>	GSM 850	<b>Test Mode :</b>	GSM Link (GMSK)
---------------	---------	--------------------	-----------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

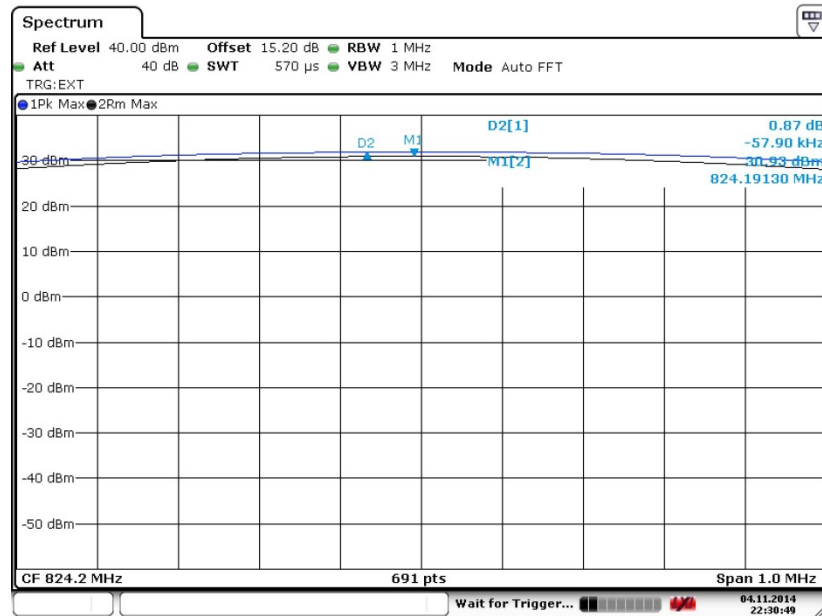

Date: 4.NOV.2014 22:30:50


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

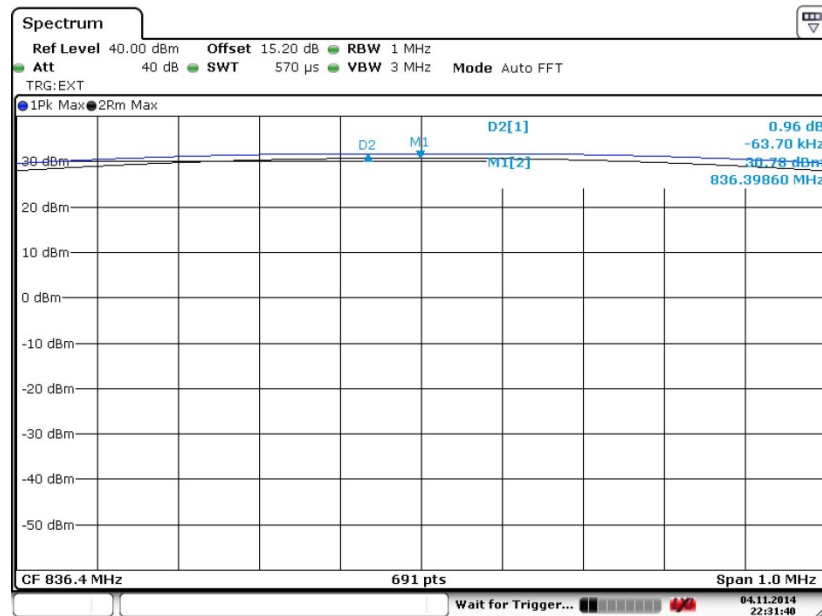

Date: 4.NOV.2014 22:31:40



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

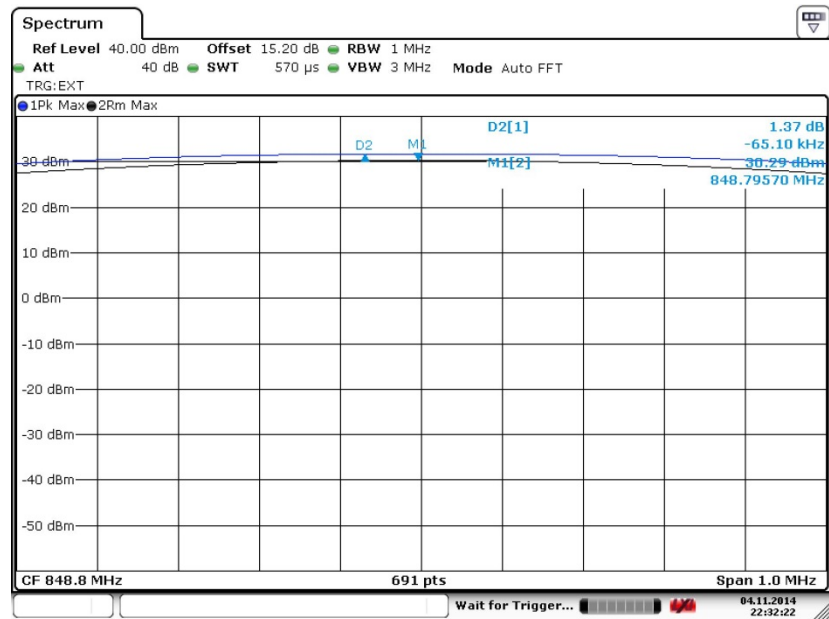


Date: 4.NOV.2014 22:32:22




<b>Band :</b>	GSM 850	<b>Test Mode :</b>	EDGE class 8 Link (8PSK)
---------------	---------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

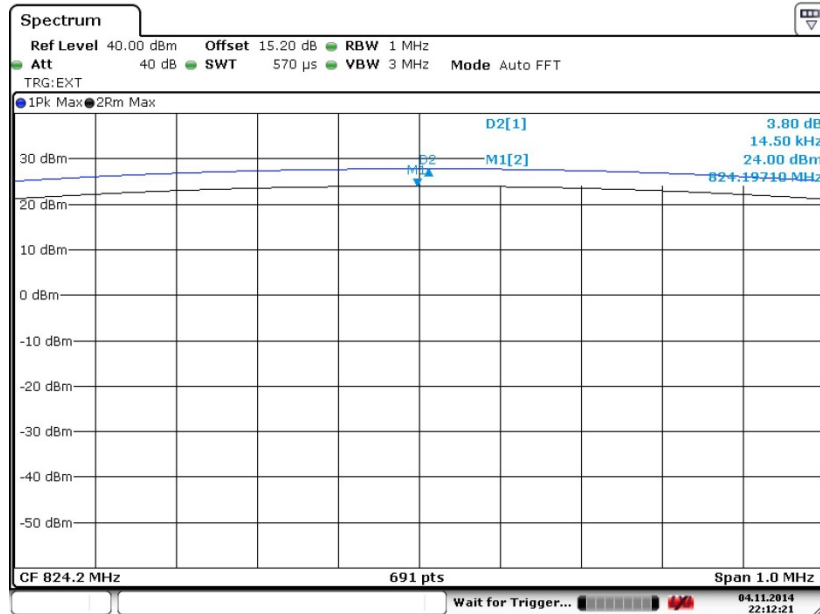

Date: 4.NOV.2014 22:12:21


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

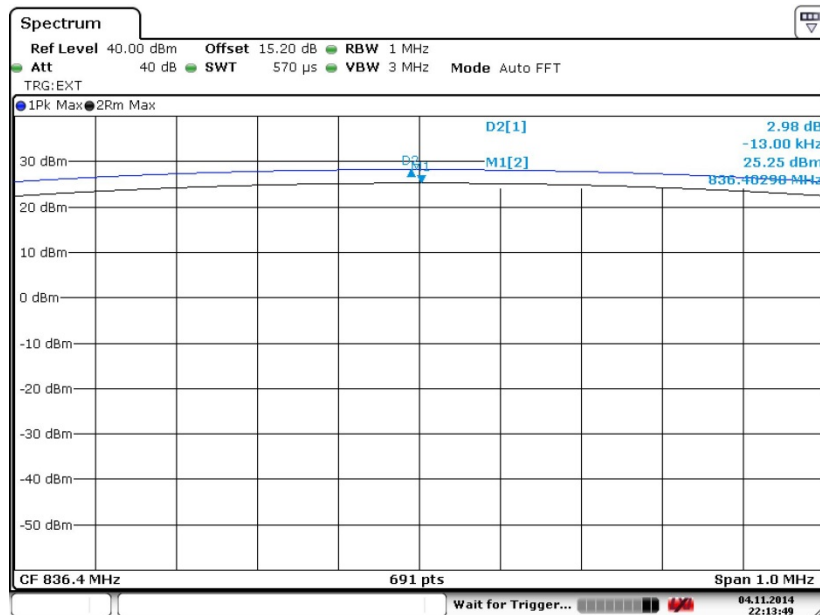

Date: 4.NOV.2014 22:13:50



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

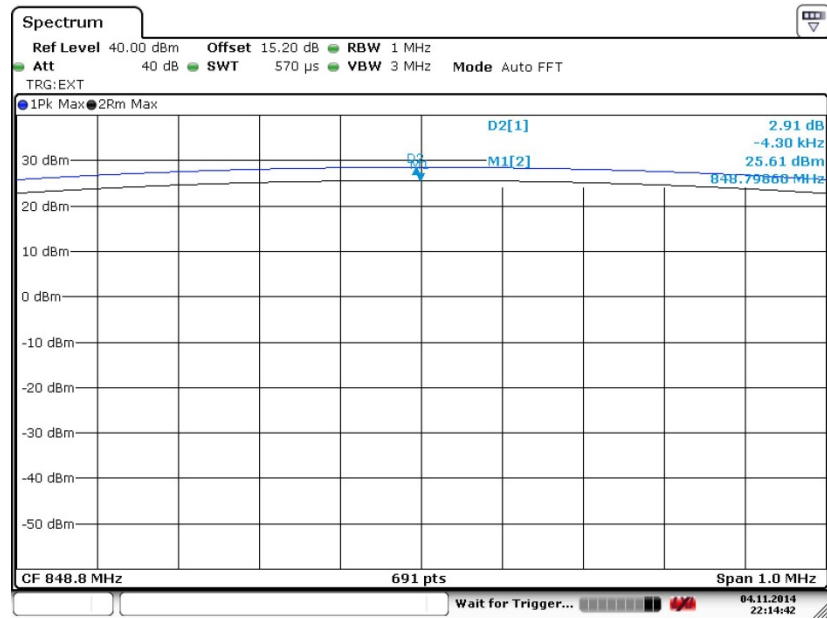


Date: 4.NOV.2014 22:14:42




<b>Band :</b>	GSM 1900	<b>Test Mode :</b>	GSM Link (GMSK)
---------------	----------	--------------------	-----------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

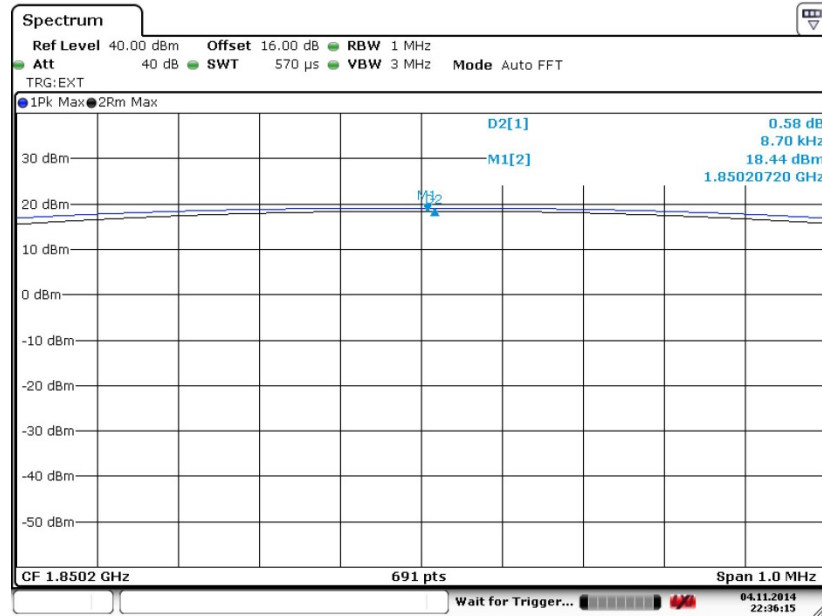

Date: 4.NOV.2014 22:36:15


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

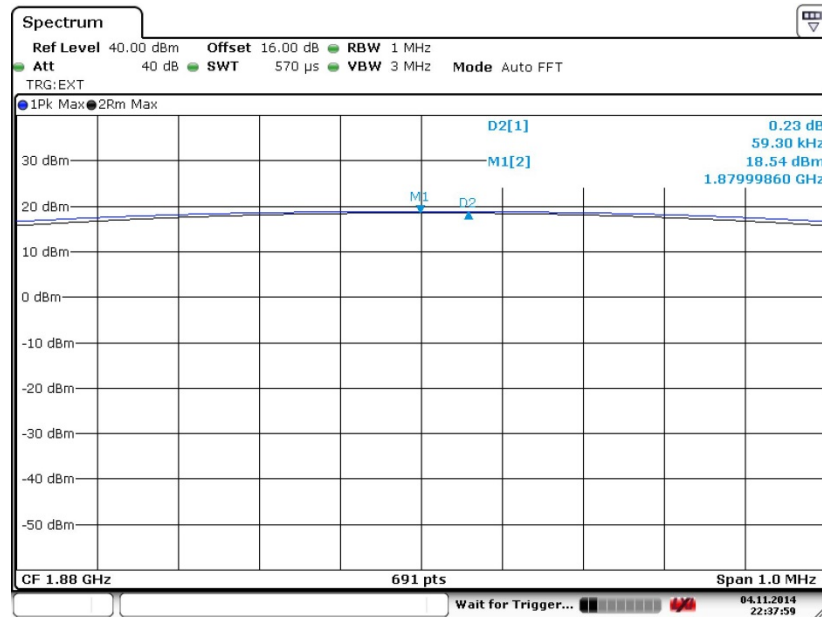

Date: 4.NOV.2014 22:37:59



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

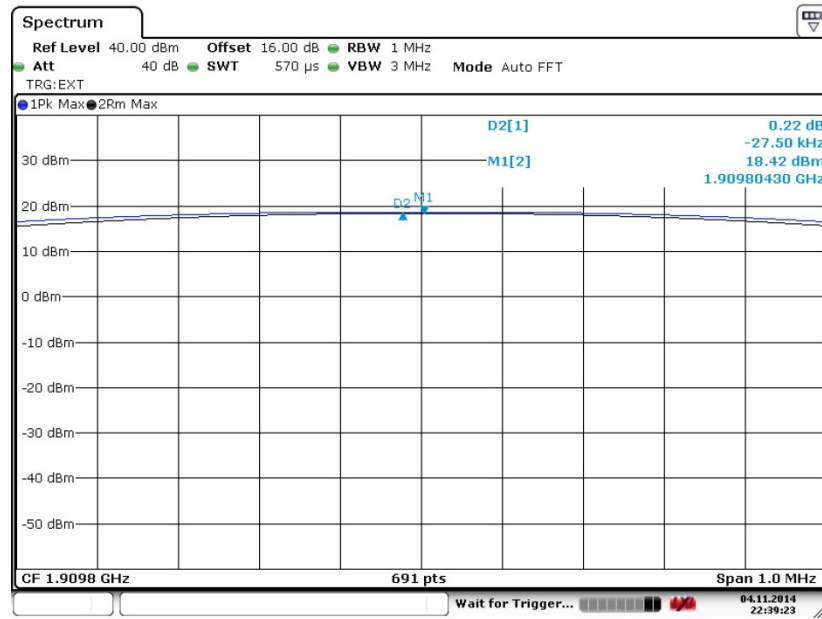


Date: 4.NOV.2014 22:39:23




<b>Band :</b>	GSM 1900	<b>Test Mode :</b>	EDGE class 8 Link (8PSK)
---------------	----------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

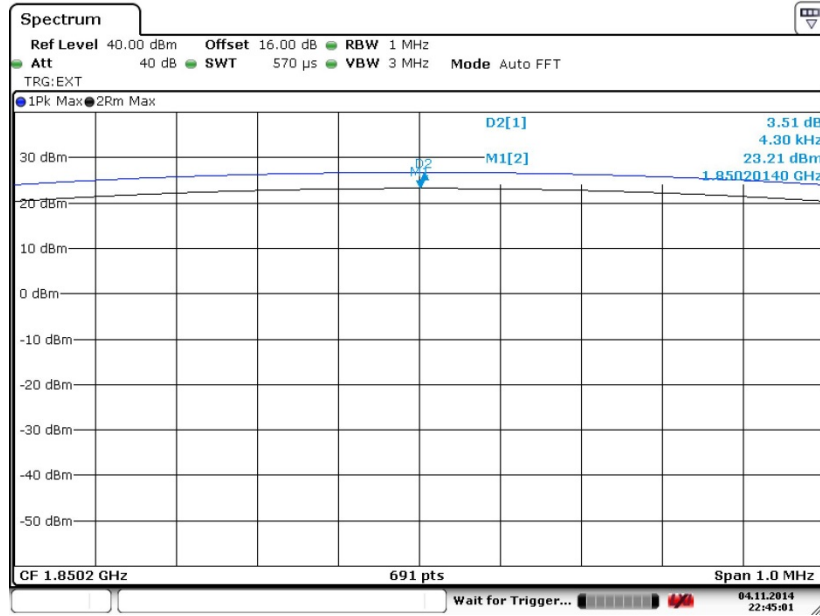

Date: 4.NOV.2014 22:45:01

Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

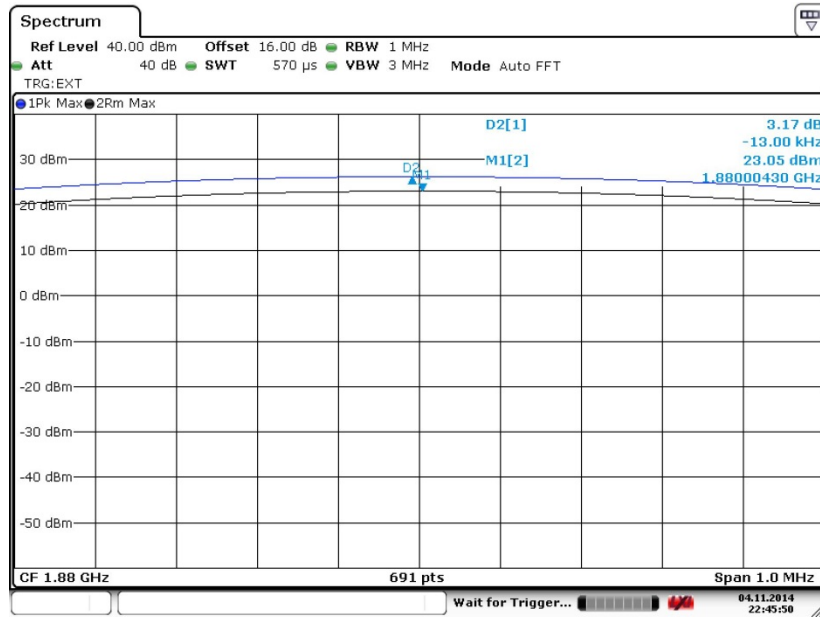


Date: 4.NOV.2014 22:45:50





Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

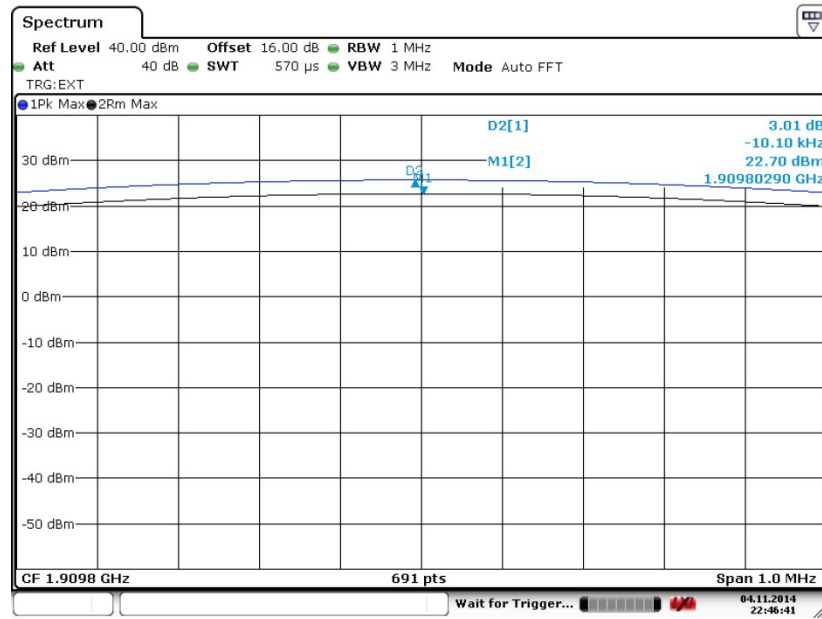


Date: 4.NOV.2014 22:46:42



<b>Band :</b>	WCDMA Band V	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	--------------	--------------------	--------------------------

**Peak-to-Average Ratio on Channel 4132 (826.4 MHz)**

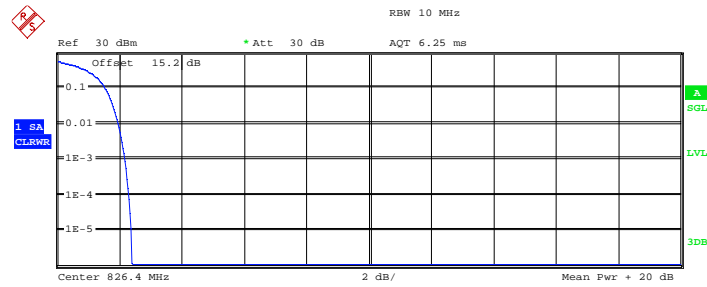


Complementary Cumulative Distribution Function  
 NOF samples: 100000, Usable BW: 11.2MHz

Trace 1  
 Mean 22.12 dBm  
 Peak 24.51 dBm  
 Crest 2.39 dB

10 % 1.54 dB  
 1 % 1.96 dB  
 .1 % 2.18 dB  
 .01 % 2.31 dB

Date: 5.NOV.2014 01:17:39

**Peak-to-Average Ratio on Channel 4182 (836.4 MHz)**

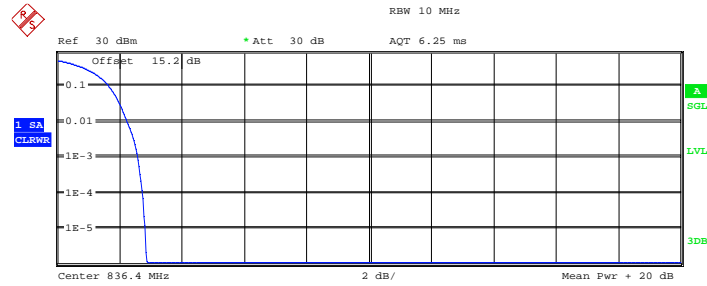

Complementary Cumulative Distribution Function  
 NOF samples: 100000, Usable BW: 11.2MHz


Trace 1  
 Mean 22.43 dBm  
 Peak 25.28 dBm  
 Crest 2.86 dB

10 % 1.67 dB  
 1 % 2.24 dB  
 .1 % 2.56 dB  
 .01 % 2.72 dB

Date: 5.NOV.2014 01:18:51



Peak-to-Average Ratio on Channel 4233 (846.6 MHz)

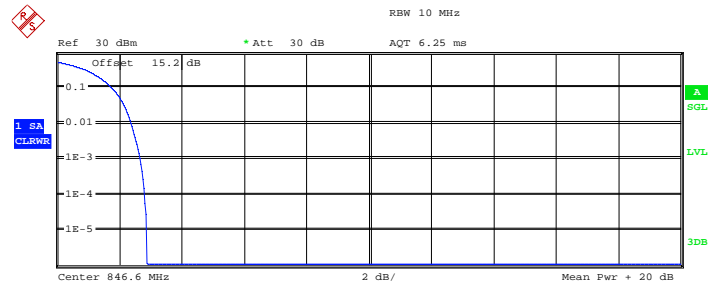

Complementary Cumulative Distribution Function  
NOF samples: 100000, Usable BW: 11.2MHz

Trace 1  
 Mean 22.34 dBm  
 Peak 25.22 dBm  
 Crest 2.88 dB


10 % 1.73 dB  
 1 % 2.37 dB  
 .1 % 2.66 dB  
 .01 % 2.79 dB

Date: 5.NOV.2014 01:19:33



<b>Band :</b>	WCDMA Band II	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

**Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)**

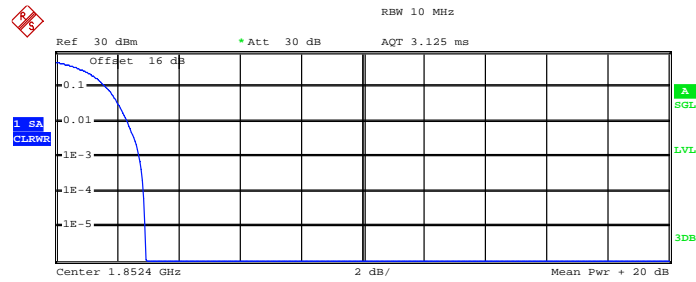


Complementary Cumulative Distribution Function (100000 samples)

Trace 1  
 Mean 22.60 dBm  
 Peak 25.56 dBm  
 Crest 2.96 dB

10 % 1.64 dB  
 1 % 2.36 dB  
 .1 % 2.72 dB  
 .01 % 2.88 dB

Date: 5.NOV.2014 21:16:12

**Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)**

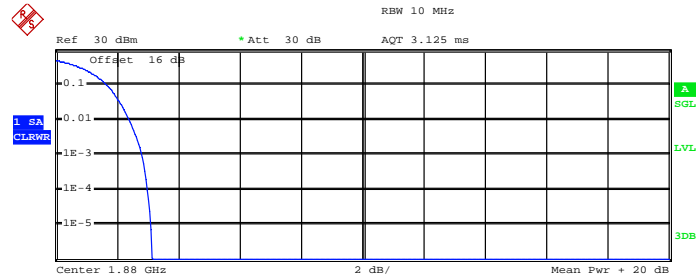

Complementary Cumulative Distribution Function (100000 samples)


Trace 1  
 Mean 22.64 dBm  
 Peak 25.77 dBm  
 Crest 3.13 dB

10 % 1.68 dB  
 1 % 2.40 dB  
 .1 % 2.80 dB  
 .01 % 3.00 dB

Date: 5.NOV.2014 21:17:07



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

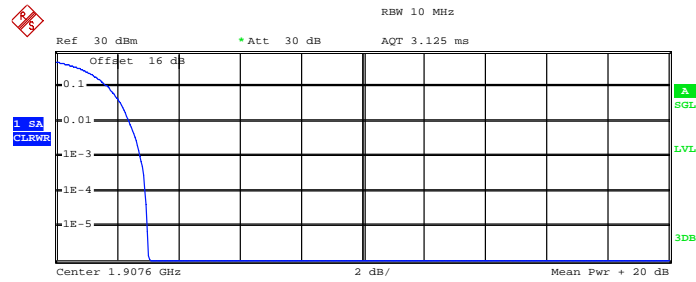

Complementary Cumulative Distribution Function (100000 samples)

Trace 1	
Mean	22.37 dBm
Peak	25.42 dBm
Crest	3.04 dB
10 %	1.72 dB
1 %	2.40 dB
.1 %	2.76 dB
.01 %	2.92 dB

Date: 5.NOV.2014 21:17:53



### **3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement**

#### **3.3.1 Description of the ERP/EIRP Measurement**

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band).

#### **3.3.2 Measuring Instruments**


The measuring equipment is listed in the section 4 of this test report.

**3.3.3 Test Procedures**

1. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
2. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at the same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor,  $EIRP = LVL + \text{Correction factor}$  and  $ERP = EIRP - 2.15$ .

	GSM/GPRS/EDGE	WCDMA/HSPA
SPAN	500kHz	10MHz
RBW	10kHz	100kHz
VBW	30kHz	300kHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100

### 3.3.4 Test Setup

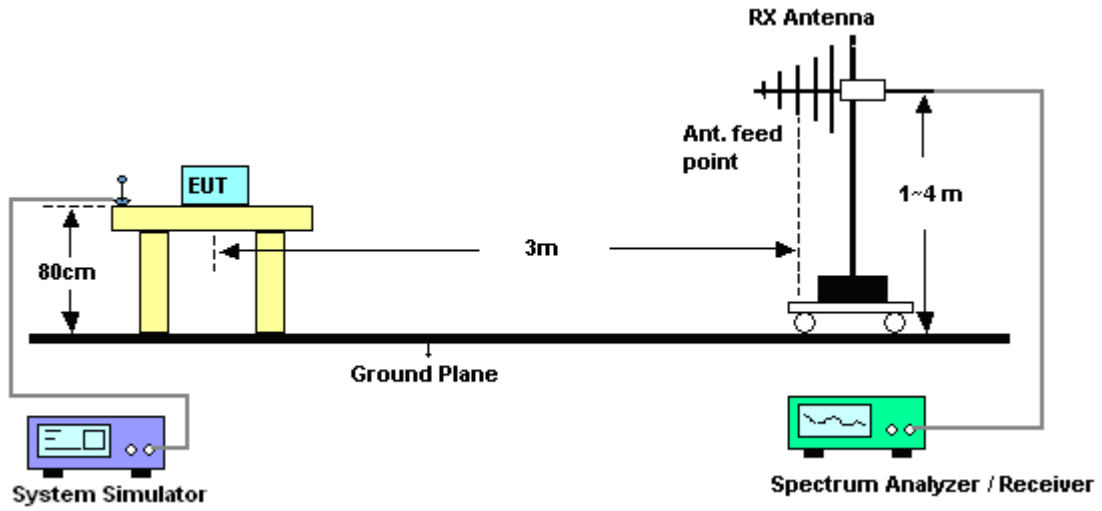



**3.3.5 Test Result of ERP**

<b>GSM850 (GSM) Radiated Power ERP</b>				
Horizontal Polarization				
<b>Frequency (MHz)</b>	<b>LVL (dBm)</b>	<b>Correction Factor (dB)</b>	<b>ERP (dBm)</b>	<b>ERP (W)</b>
824.2	-0.04	29.11	26.92	0.4920
836.4	0.95	29.2	28	0.6310
848.8	0.56	29.4	27.81	0.6039
Vertical Polarization				
<b>Frequency (MHz)</b>	<b>LVL (dBm)</b>	<b>Correction Factor (dB)</b>	<b>ERP (dBm)</b>	<b>ERP (W)</b>
824.2	-3.61	33.23	27.47	0.5585
836.4	-2.90	33	27.95	0.6237
848.8	-2.85	32.95	27.95	0.6237

\* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

<b>GSM850 (EDGE class 8) Radiated Power ERP</b>				
Horizontal Polarization				
<b>Frequency (MHz)</b>	<b>LVL (dBm)</b>	<b>Correction Factor (dB)</b>	<b>ERP (dBm)</b>	<b>ERP (W)</b>
824.2	-6.68	29.11	20.28	0.1068
836.4	-5.87	29.2	21.18	0.1312
848.8	-5.44	29.4	21.81	0.1517
Vertical Polarization				
<b>Frequency (MHz)</b>	<b>LVL (dBm)</b>	<b>Correction Factor (dB)</b>	<b>ERP (dBm)</b>	<b>ERP (W)</b>
824.2	-21.2	33.23	9.90	0.0098
836.4	-19.8	33	11.02	0.0127
848.8	-18.8	32.95	11.97	0.0158

\* ERP = LVL (dBm) + Correction Factor (dB) – 2.15



WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.40	-9.83	29.11	17.13	0.0516
836.40	-9.59	29.2	17.46	0.0557
846.60	-9.68	29.4	17.57	0.0572
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.40	-24.3	33.23	6.81	0.0048
836.40	-23.6	33	7.29	0.0054
846.60	-23.2	32.95	7.61	0.0058

\* ERP = LVL (dBm) + Correction Factor (dB) – 2.15



3.3.6 Test Result of EIRP

GSM1900 (GSM) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-11.50	42.76	31.26	1.3359
1880.0	-11.47	42.32	30.85	1.2162
1909.8	-11.88	41.95	30.07	1.0171
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-11.4	42.13	30.75	1.1880
1880.0	-12.1	42.79	30.73	1.1826
1909.8	-12.2	42.83	30.62	1.1538

\* EIRP = LVL (dBm) + Correction Factor (dB)

GSM1900 (EDGE class 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-14.86	42.76	27.90	0.6173
1880.0	-14.49	42.32	27.83	0.6065
1909.8	-15.81	41.95	26.14	0.4115
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-14.8	42.13	27.34	0.5414
1880.0	-15.1	42.79	27.71	0.5902
1909.8	-16.3	42.83	26.57	0.4539

\* EIRP = LVL (dBm) + Correction Factor (dB)



WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.40	-17.45	42.76	25.31	0.3395
1880.00	-17.68	42.32	24.64	0.2909
1907.60	-18.37	41.95	23.58	0.2280
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.40	-17.5	42.13	24.66	0.2921
1880.00	-18.5	42.79	24.32	0.2701
1907.60	-18.9	42.83	23.91	0.2461

\* EIRP = LVL (dBm) + Correction Factor (dB)

### 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3\*RBW, sample detector, trace maximum hold.
5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3\*RBW, peak detector, trace maximum hold.

#### 3.4.4 Test Setup

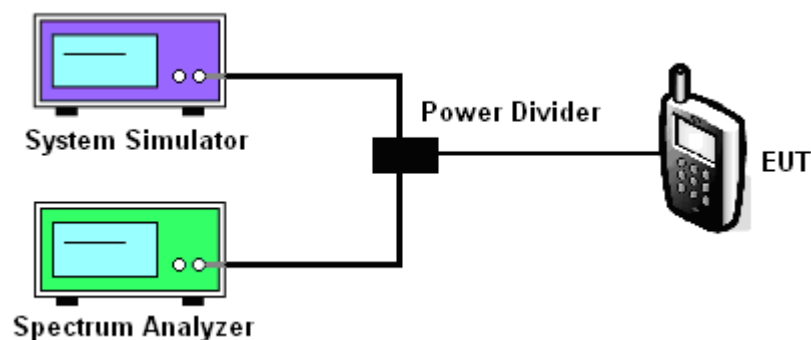



3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band						
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
99% OBW (kHz)	246.00	248.00	242.00	250.00	250.00	248.00
26dB BW (kHz)	314.00	316.00	310.00	318.00	314.00	310.00

PCS Band						
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
99% OBW (kHz)	246.79	248.40	248.40	248.40	248.40	248.40
26dB BW (kHz)	314.10	309.29	310.90	314.10	318.00	318.00

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
99% OBW (MHz)	4.24	4.22	4.22
26dB BW (MHz)	4.92	4.88	4.88


PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1852.4	1880	1907.6
99% OBW (MHz)	4.24	4.20	4.20
26dB BW (MHz)	4.90	4.90	4.88



### 3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


Band :	GSM 850	Test Mode :	GSM Link (GMSK)
--------	---------	-------------	-----------------

#### 99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

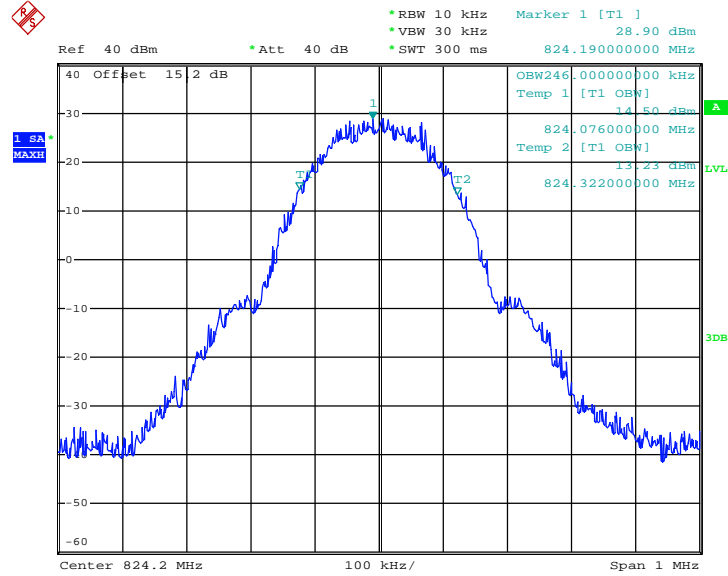

Date: 4.NOV.2014 18:59:51


#### 26dB Bandwidth Plot on Channel 128 (824.2 MHz)

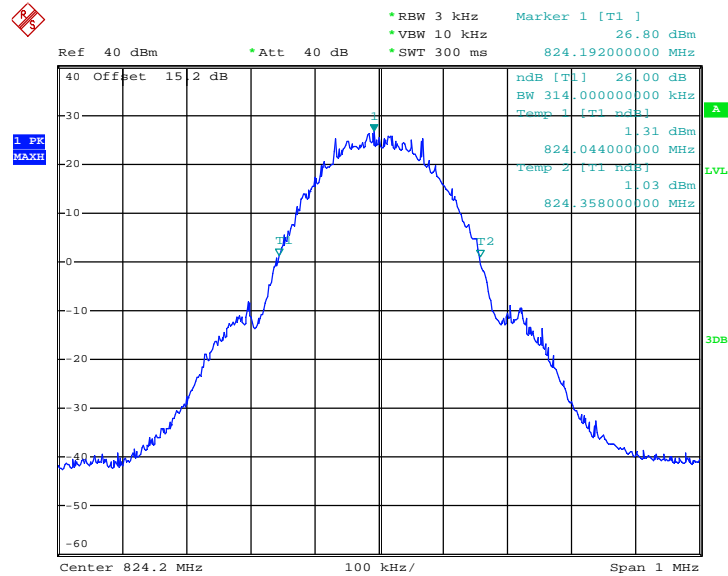

Date: 4.NOV.2014 18:53:01




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

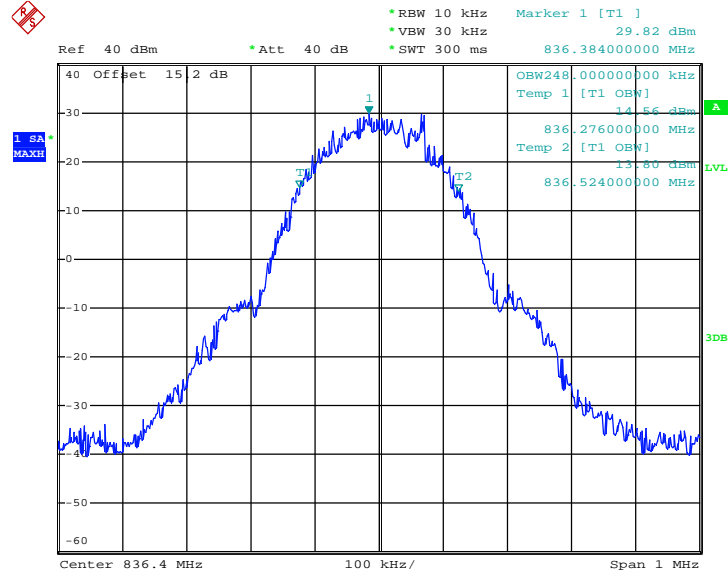

Date: 4.NOV.2014 19:02:19

26dB Bandwidth Plot on Channel 189 (836.4 MHz)

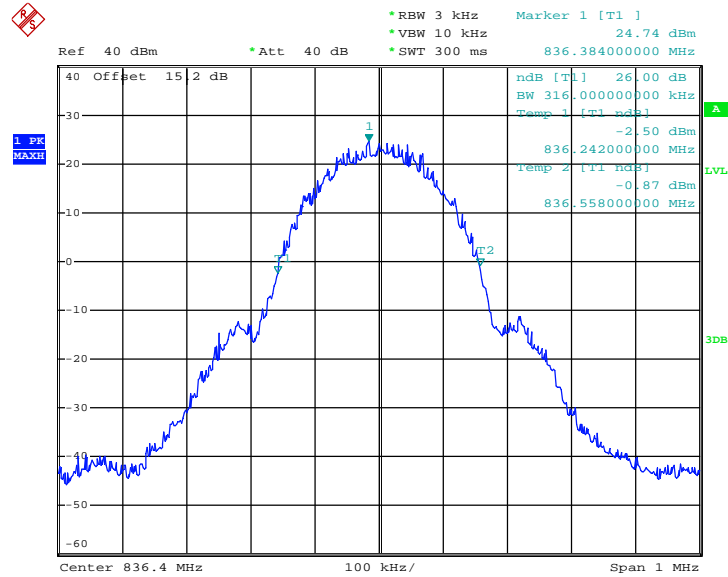


Date: 7.NOV.2014 00:25:35






### 99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

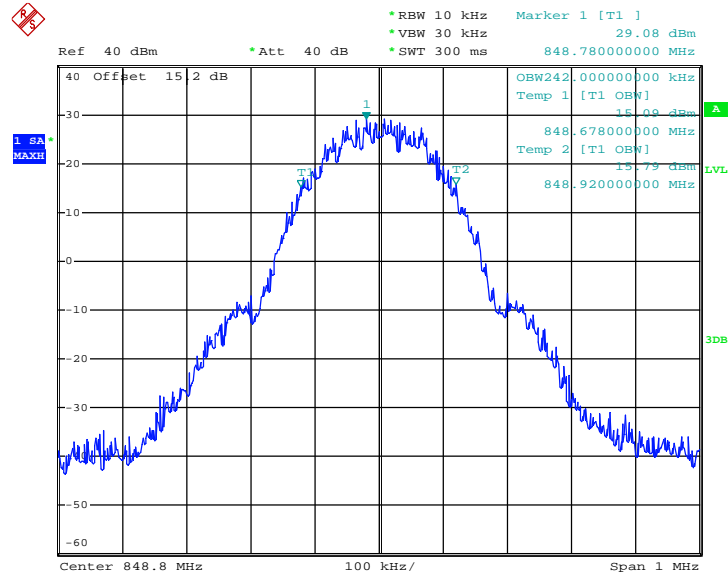

Date: 4.NOV.2014 19:05:32

### 26dB Bandwidth Plot on Channel 251 (848.8 MHz)

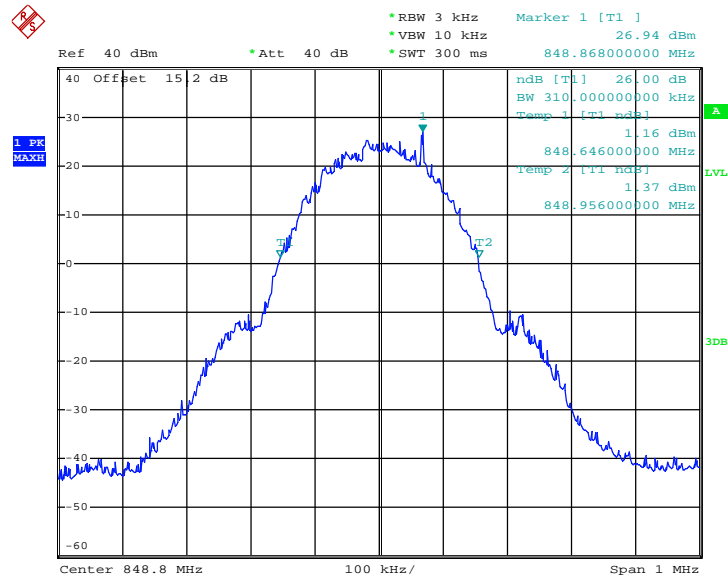


Date: 4.NOV.2014 18:56:55




Band :	GSM 850	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

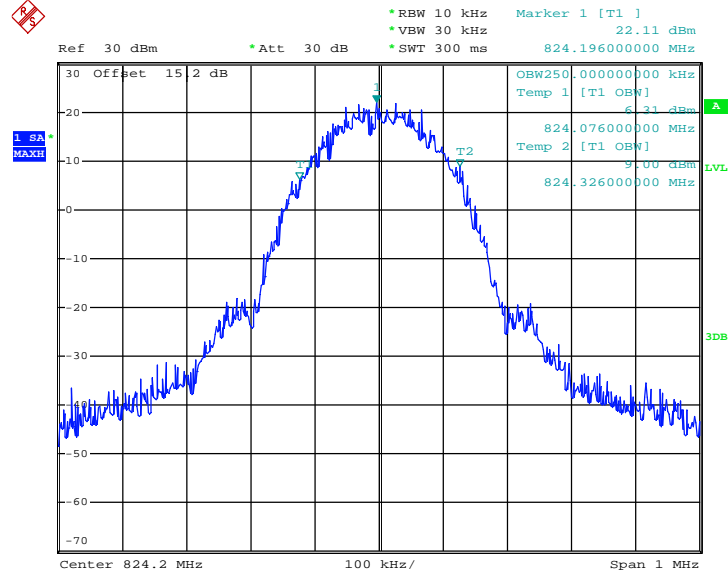

Date: 4.NOV.2014 20:20:50


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

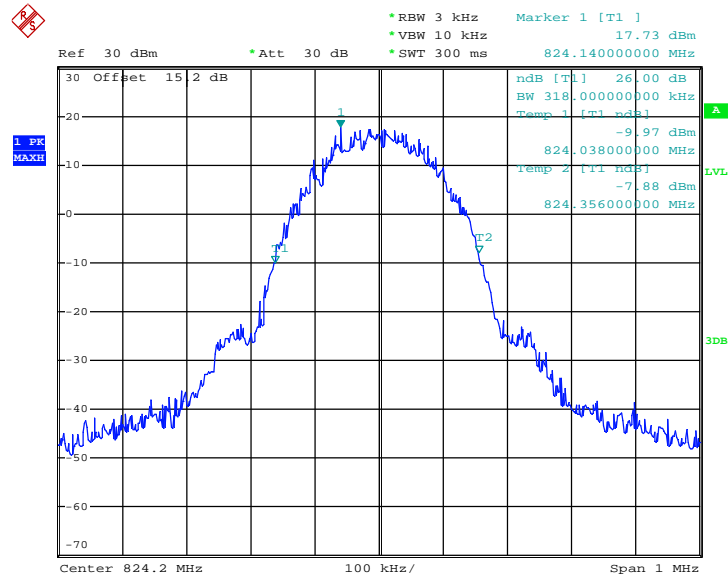

Date: 4.NOV.2014 20:14:41




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

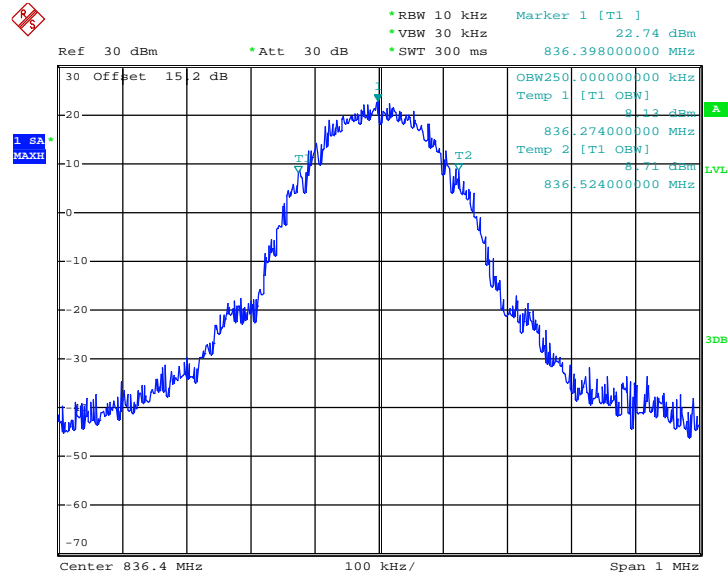

Date: 4.NOV.2014 20:50:12


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

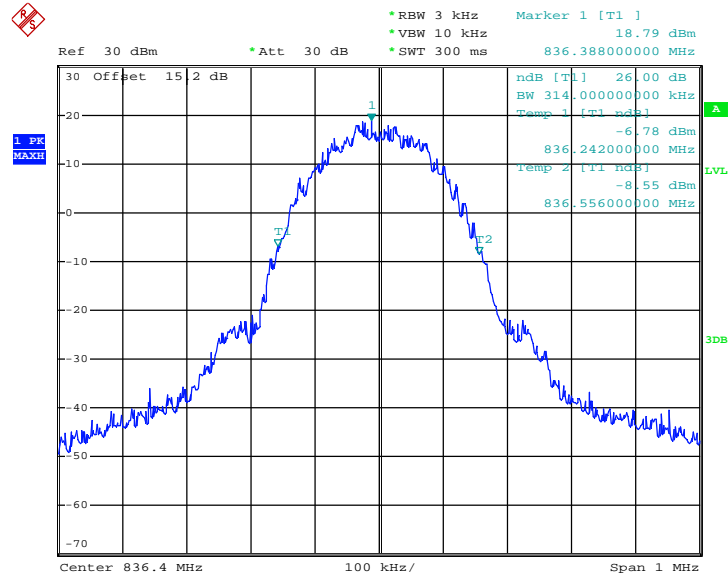

Date: 4.NOV.2014 20:15:37




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

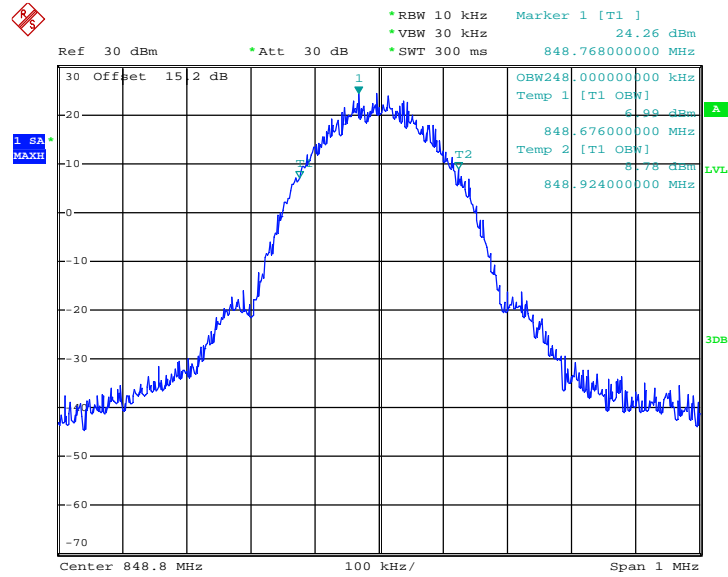

Date: 4.NOV.2014 20:18:22

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

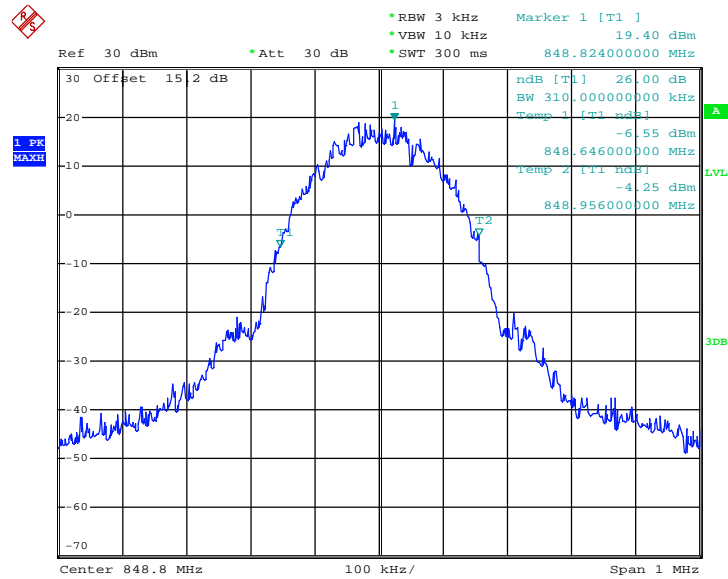


Date: 4.NOV.2014 20:16:18




Band :	GSM 1900	Test Mode :	GSM Link (GMSK)
--------	----------	-------------	-----------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

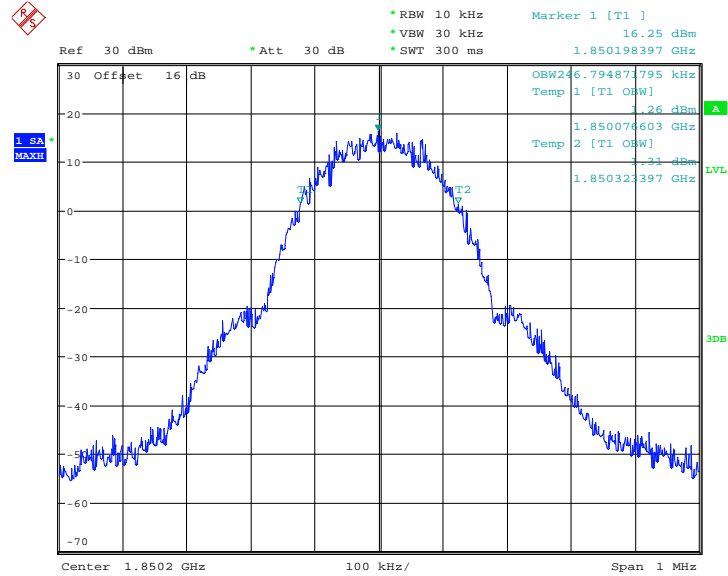

Date: 5.NOV.2014 00:32:57


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

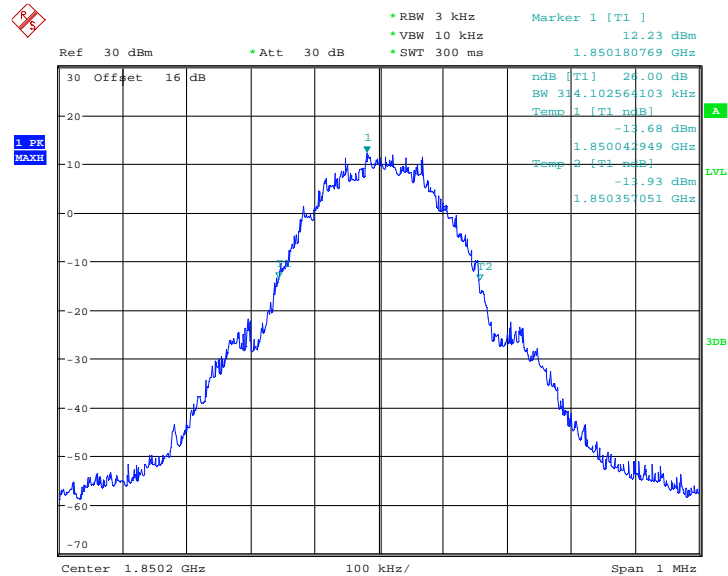

Date: 5.NOV.2014 00:29:08




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

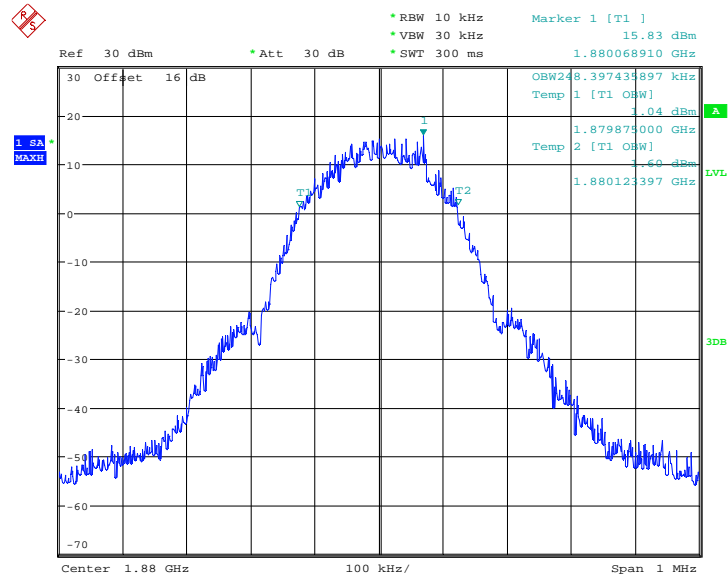

Date: 5.NOV.2014 00:33:55


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

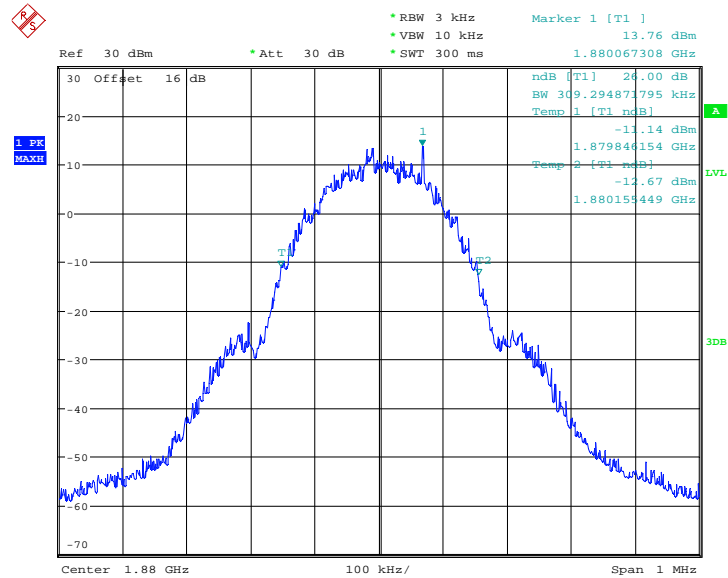

Date: 5.NOV.2014 00:29:54




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

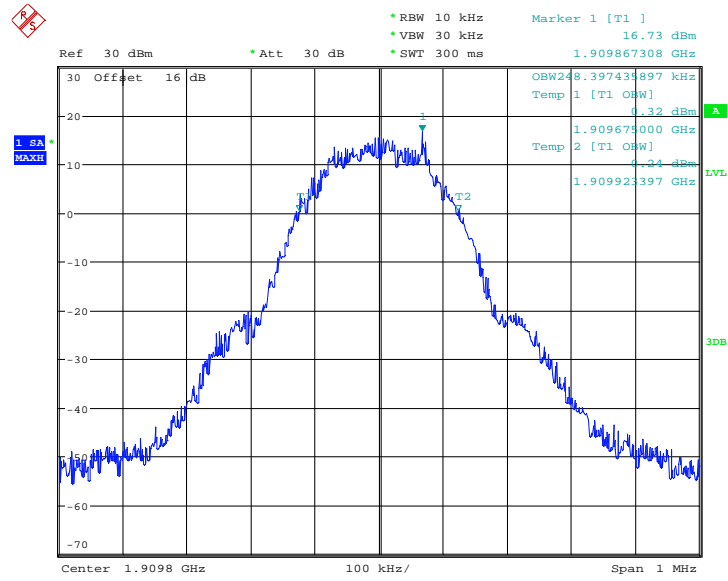

Date: 5.NOV.2014 00:36:15

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

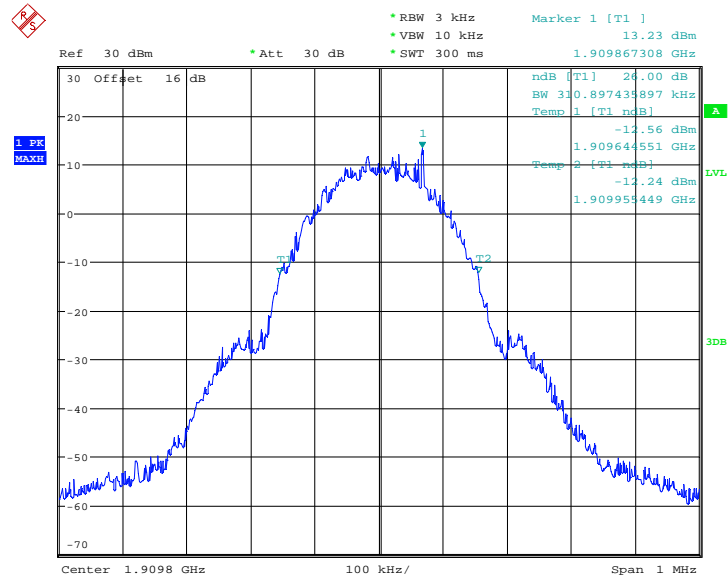


Date: 5.NOV.2014 00:30:46




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	----------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

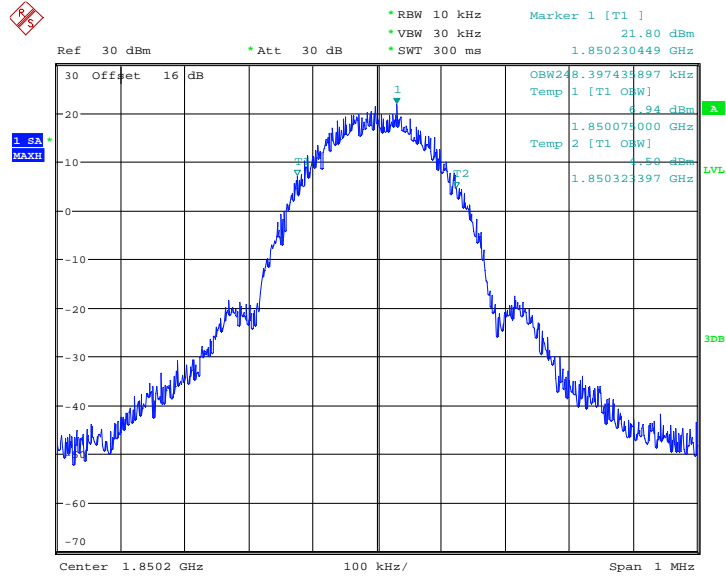

Date: 4.NOV.2014 23:11:05

26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

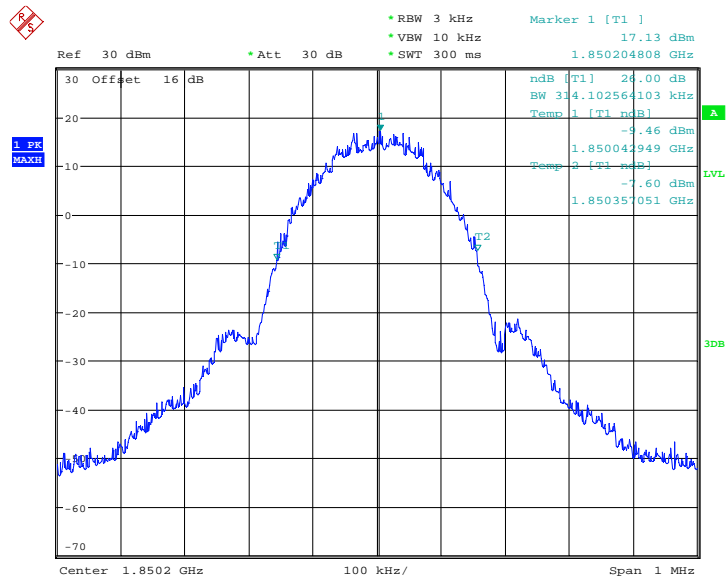


Date: 4.NOV.2014 23:01:04






99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

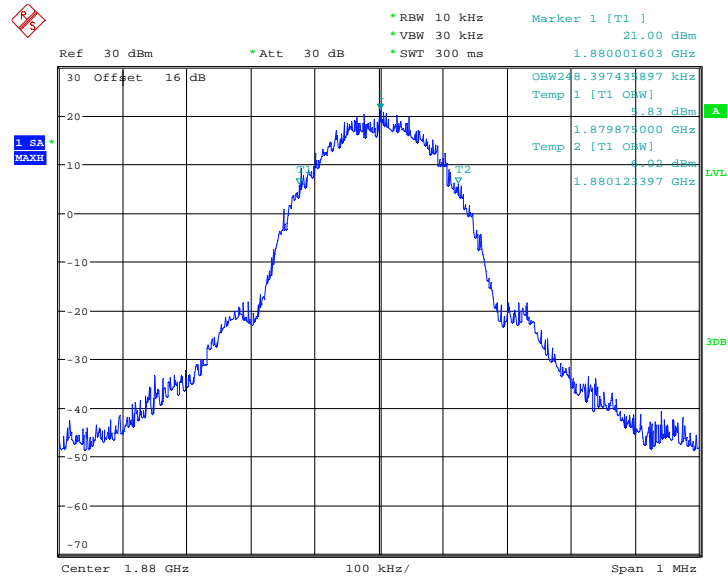

Date: 4.NOV.2014 23:13:02


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

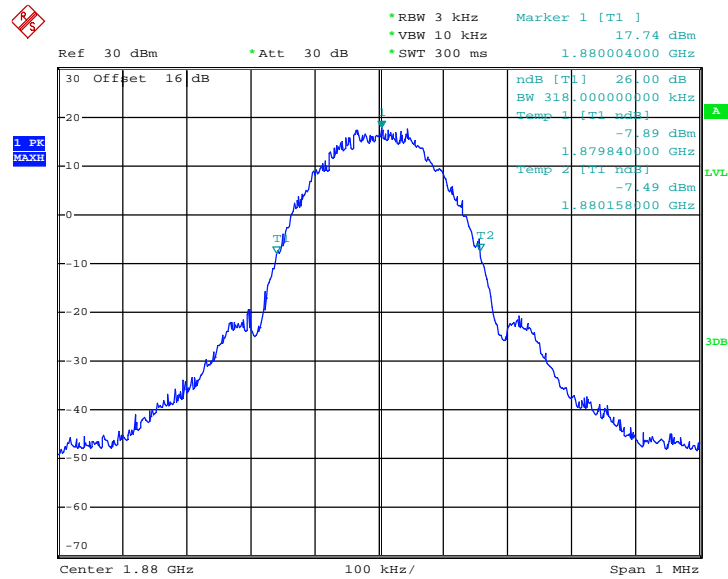

Date: 7.NOV.2014 00:42:57




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

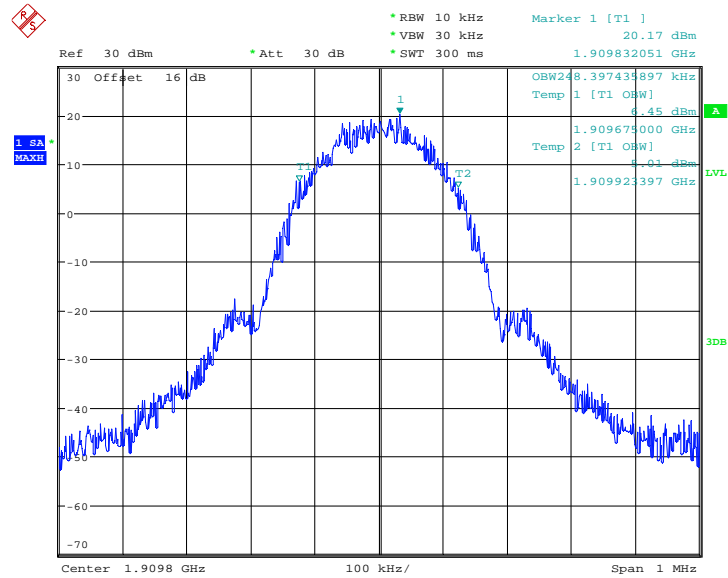

Date: 4.NOV.2014 23:15:19

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

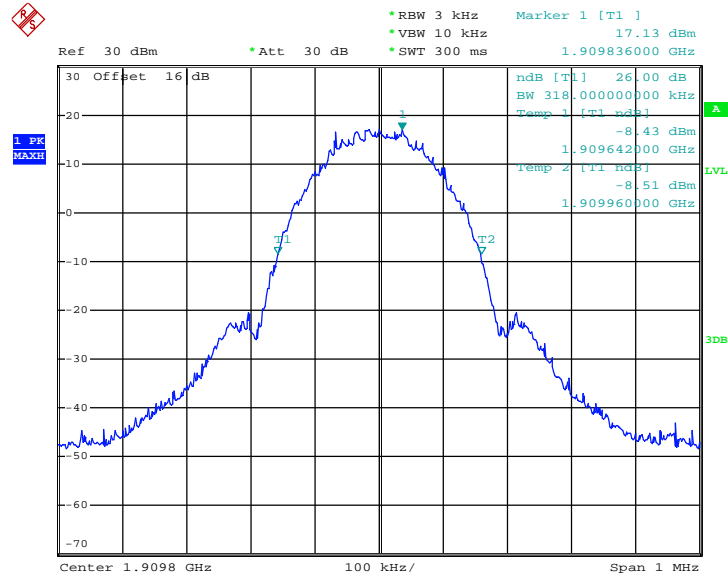


Date: 7.NOV.2014 00:55:58




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

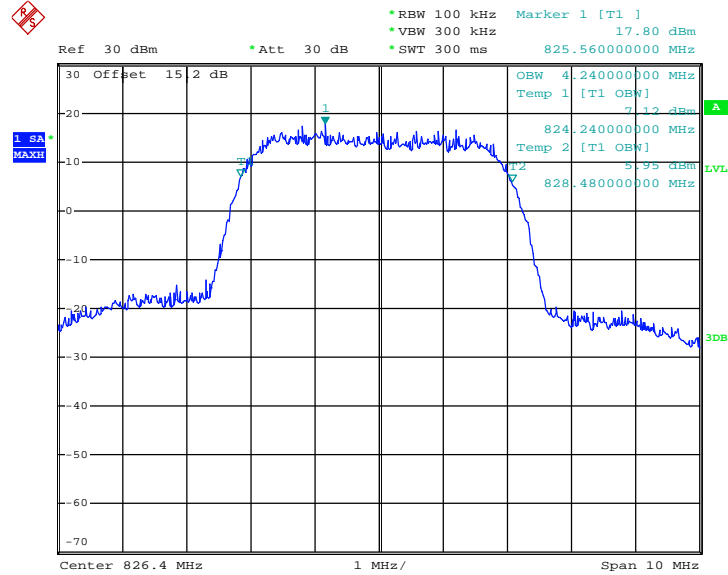

Date: 4.NOV.2014 20:59:44


26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

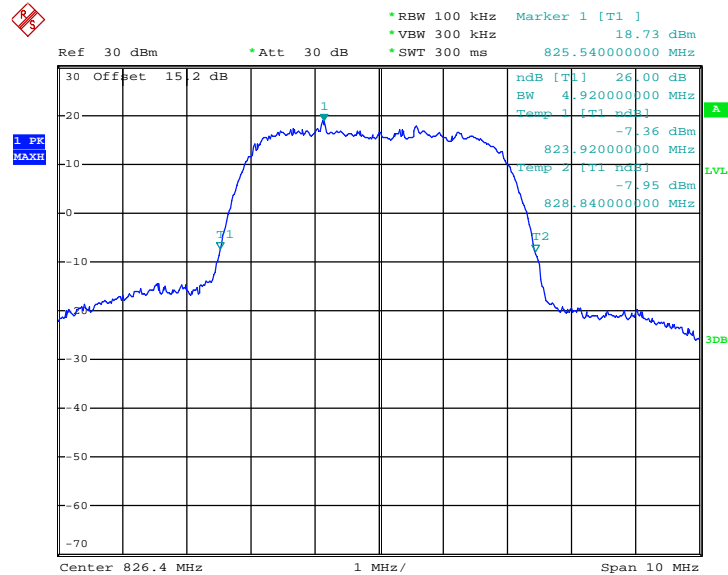

Date: 4.NOV.2014 20:54:37




99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

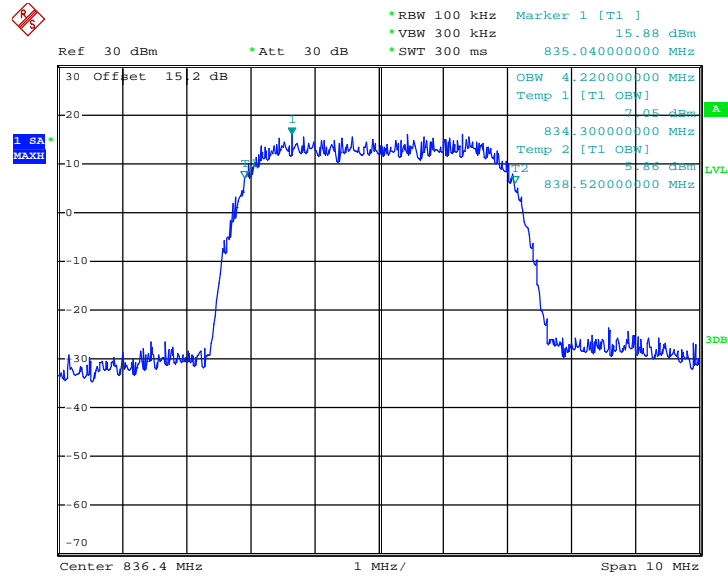

Date: 4.NOV.2014 20:58:01


26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

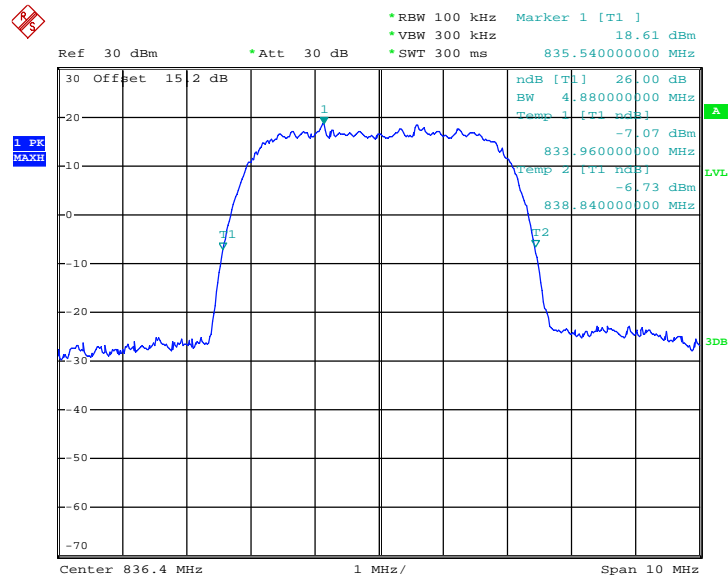

Date: 4.NOV.2014 20:55:39




99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

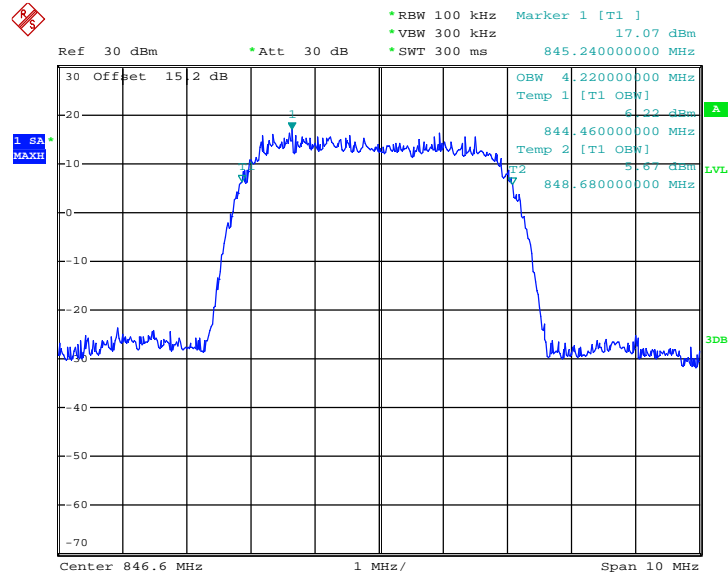

Date: 4.NOV.2014 20:57:17

26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

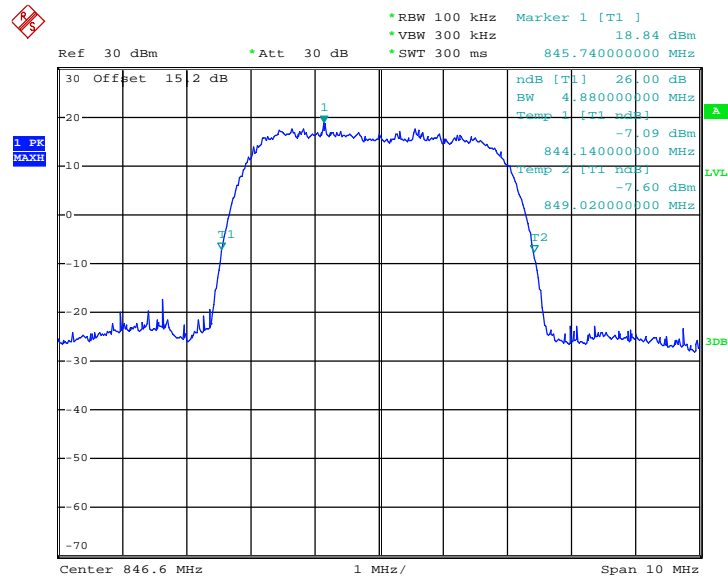


Date: 4.NOV.2014 20:56:07




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

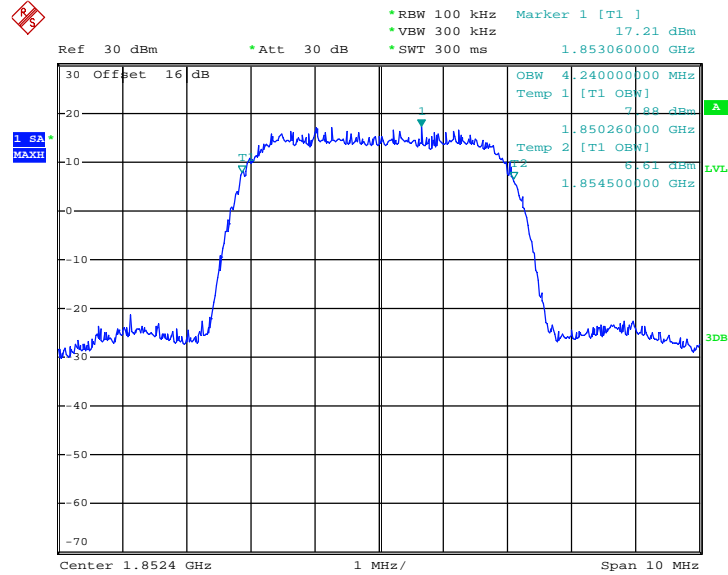

Date: 5.NOV.2014 20:54:30


26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

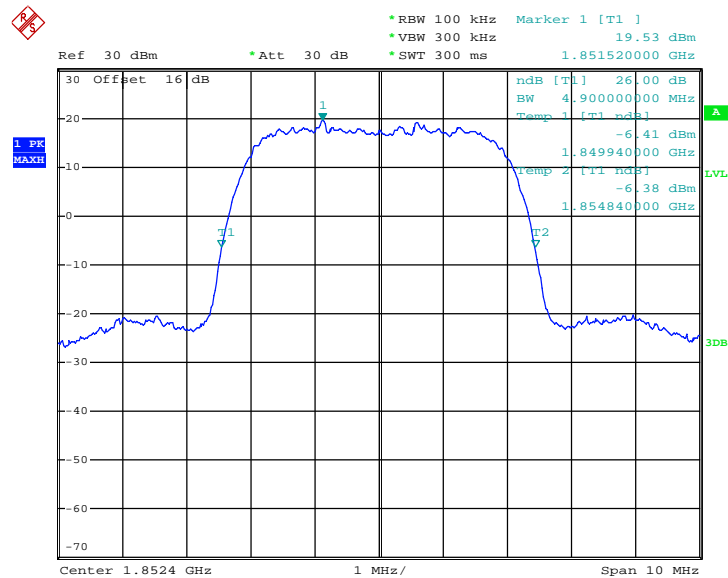

Date: 5.NOV.2014 20:47:26




99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

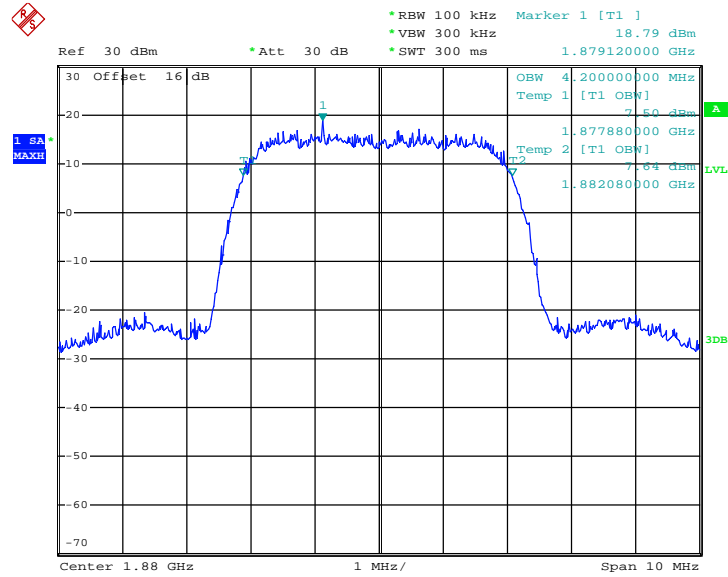

Date: 5.NOV.2014 20:56:33


26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

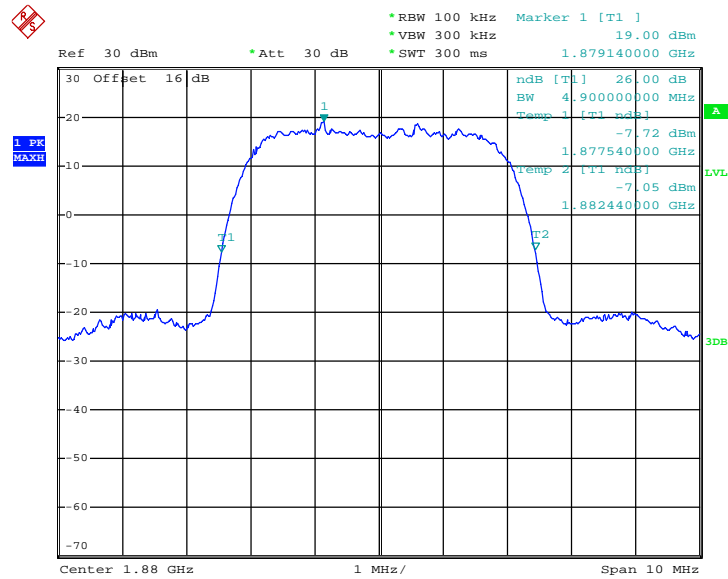

Date: 5.NOV.2014 20:48:23




99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

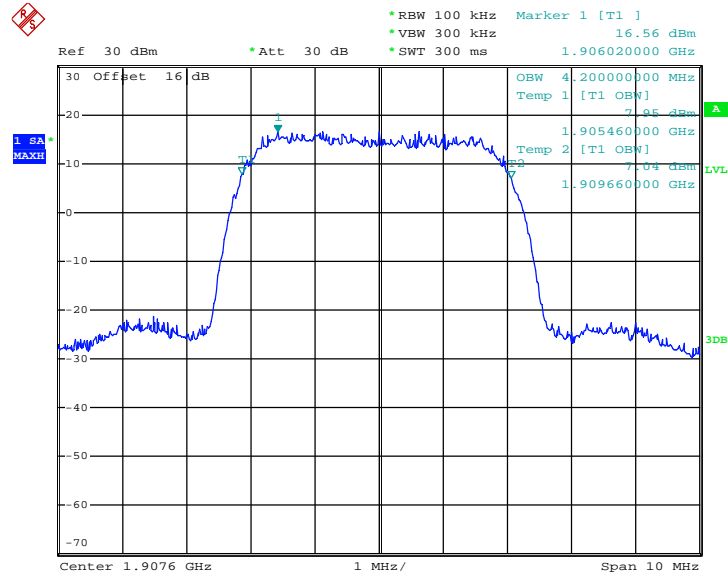

Date: 5.NOV.2014 20:59:37

26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

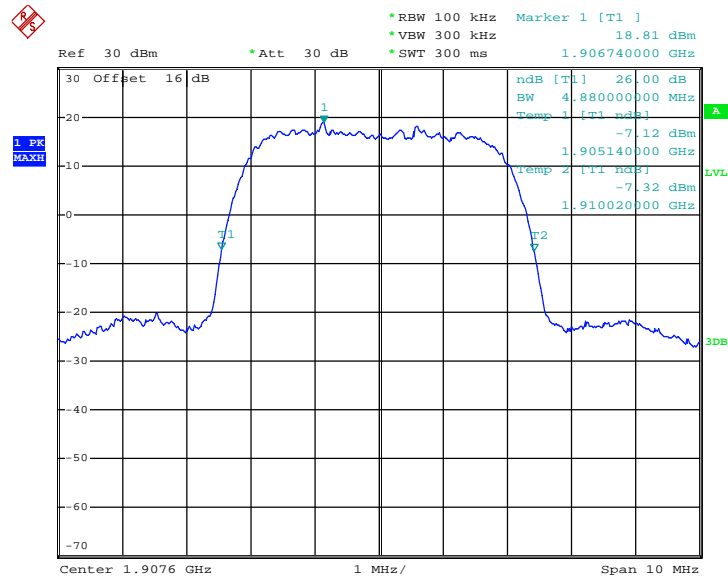

Date: 5.NOV.2014 20:50:10





### 3.5 Band Edge Measurement

#### 3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

#### 3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)]$  (dB)  
=  $[30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
= -13dBm.

### 3.5.4 Test Setup

<Conducted Band Edge >

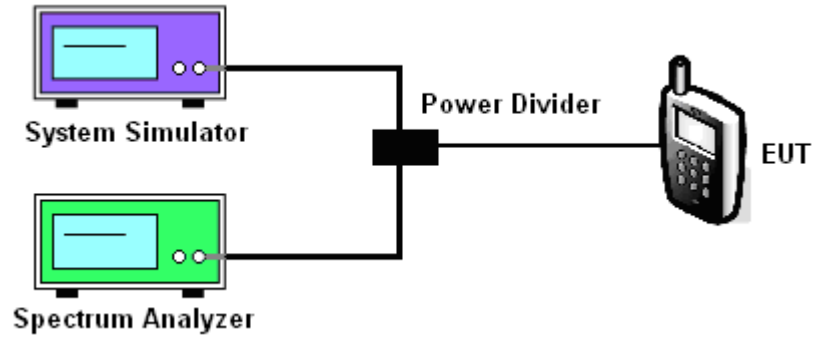




### 3.5.5 Test Result (Plots) of Conducted Band Edge

Band :	GSM850	Test Mode :	GSM Link (GMSK)
--------	--------	-------------	-----------------

Lower Band Edge Plot on Channel 128 (824.2 MHz)

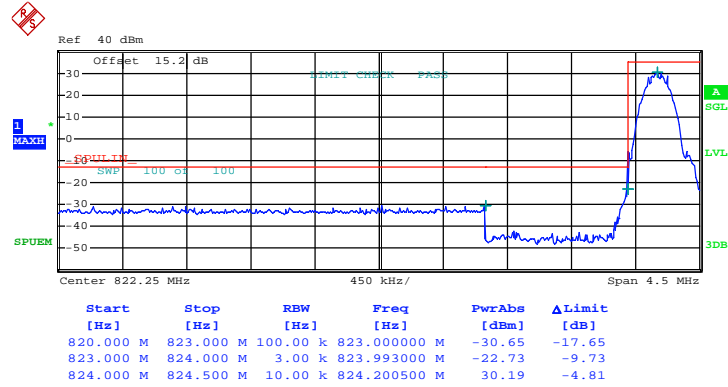


Date: 4.NOV.2014 19:19:51



Band :	GSM850	Test Mode :	GSM Link (GMSK)
--------	--------	-------------	-----------------

Higher Band Edge Plot on Channel 251 (848.8 MHz)

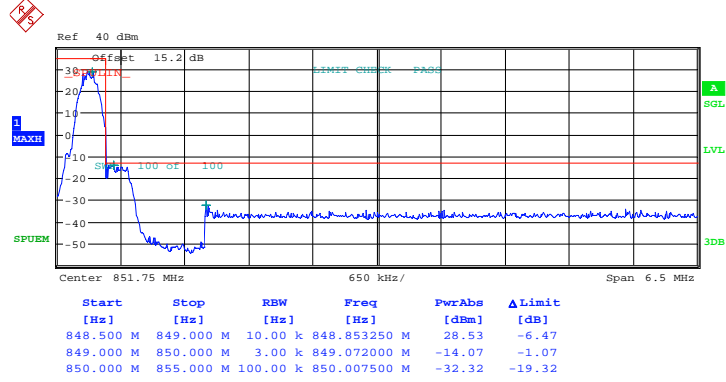


Date: 5.NOV.2014 01:29:42



Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
--------	--------	-------------	--------------------------

Lower Band Edge Plot on Channel 128 (824.2 MHz)

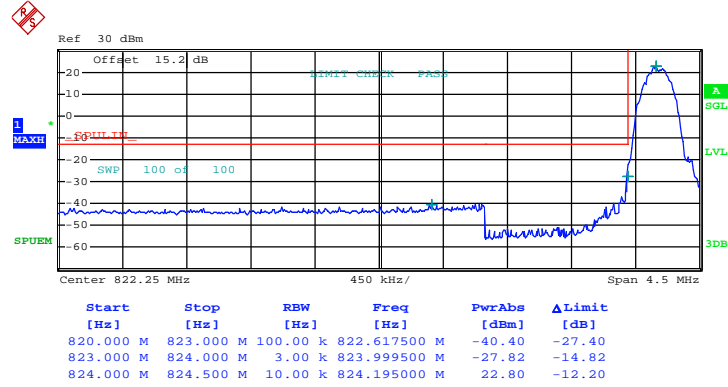


Date: 4.NOV.2014 20:31:13



Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
--------	--------	-------------	--------------------------

Higher Band Edge Plot on Channel 251 (848.8 MHz)

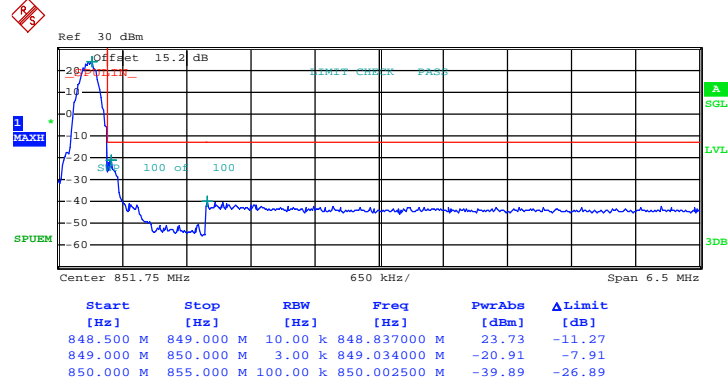


Date: 4.NOV.2014 20:33:56



Band :	GSM1900	Test Mode :	GSM Link (GMSK)
--------	---------	-------------	-----------------

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

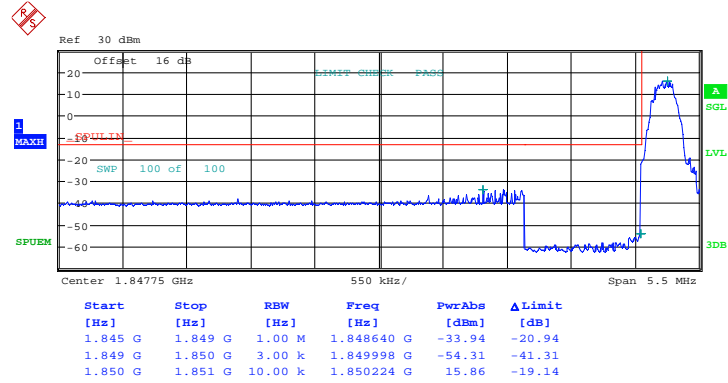


Date: 5.NOV.2014 00:47:15



Band :	GSM1900	Test Mode :	GSM Link (GMSK)
--------	---------	-------------	-----------------

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

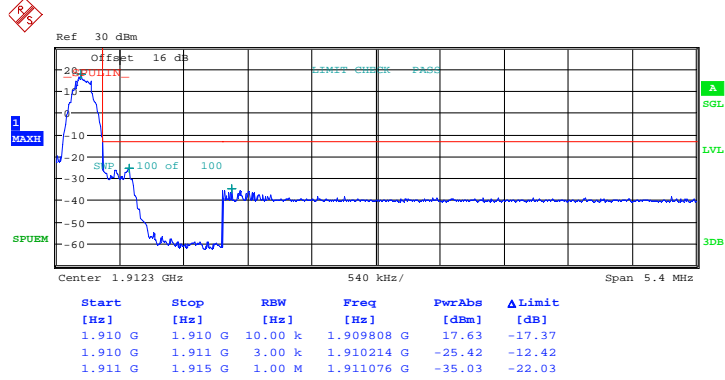


Date: 5.NOV.2014 00:49:05





Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

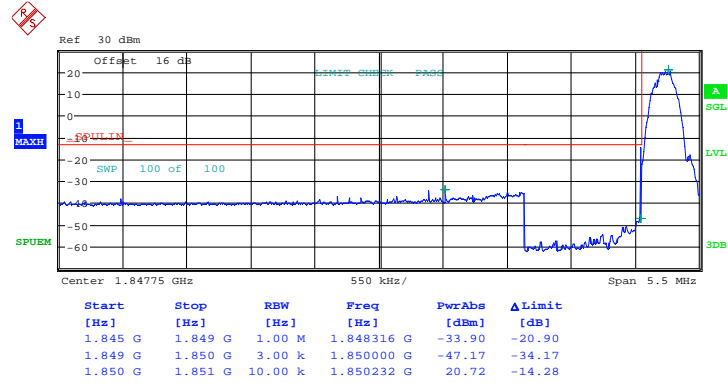


Date: 4.NOV.2014 23:31:55



Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

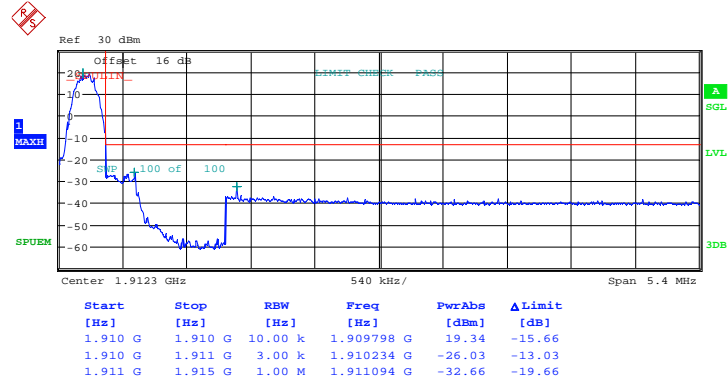


Date: 5.NOV.2014 00:07:09



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

Lower Band Edge Plot on Channel 4132 (826.4 MHz)

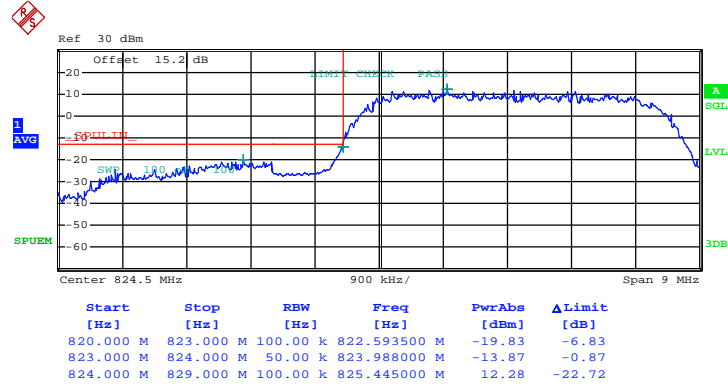


Date: 5.NOV.2014 20:40:47



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

Higher Band Edge Plot on Channel 4233 (846.6 MHz)

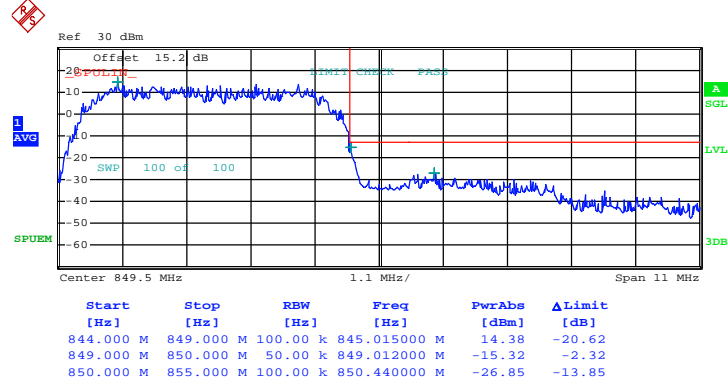


Date: 4.NOV.2014 21:40:02



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

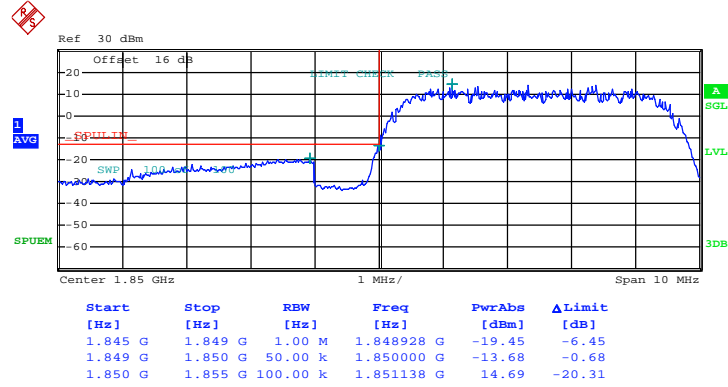


Date: 5.NOV.2014 21:11:40



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

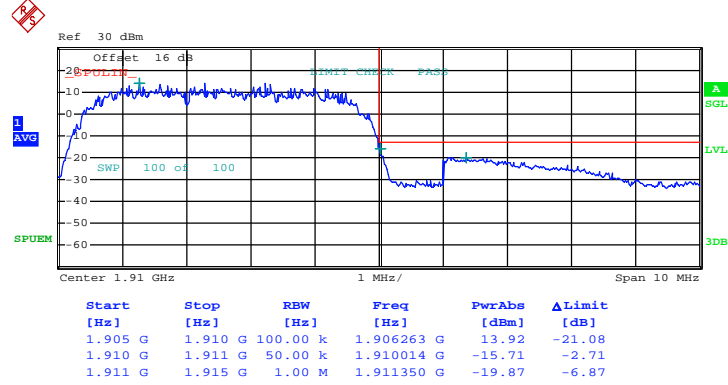

Date: 5.NOV.2014 21:14:06



### 3.6 Conducted Spurious Emission Measurement

#### 3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)]$  (dB)  
=  $[30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
= -13dBm.

### 3.6.4 Test Setup

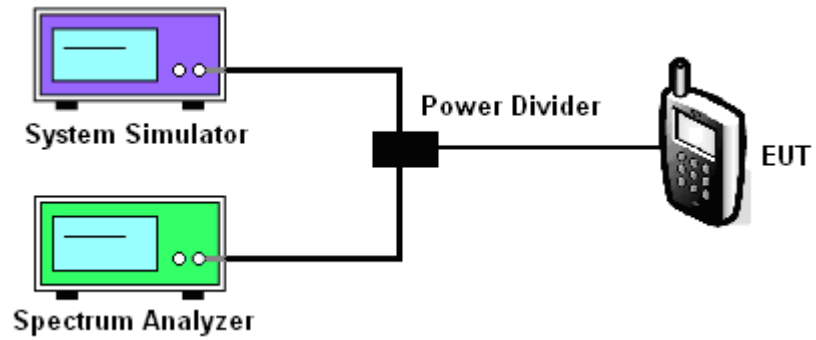






### 3.6.5 Test Result (Plots) of Conducted Spurious Emission


Band :	GSM850	Channel :	CH128
Test Mode :	GSM Link (GMSK)	Frequency :	824.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

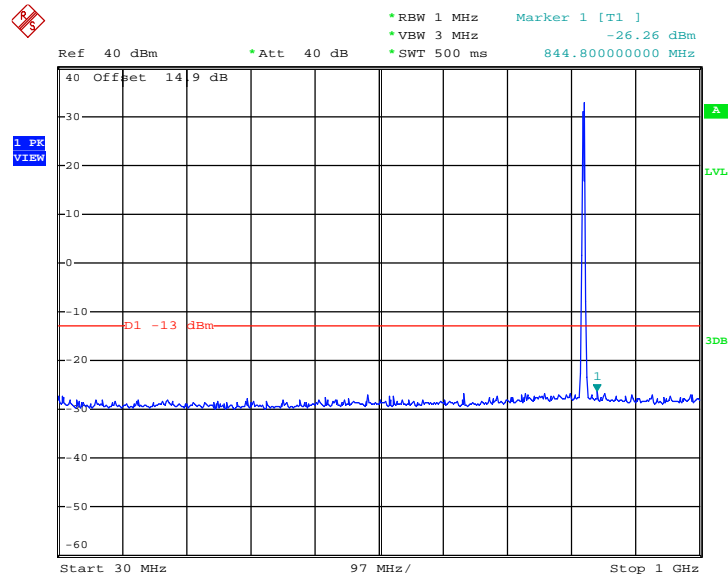

Date: 4.NOV.2014 19:36:23


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

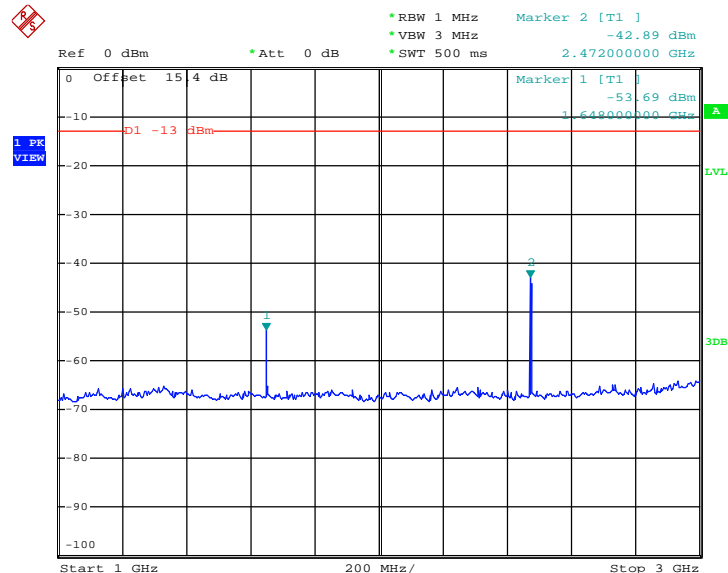

Date: 4.NOV.2014 19:42:33




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

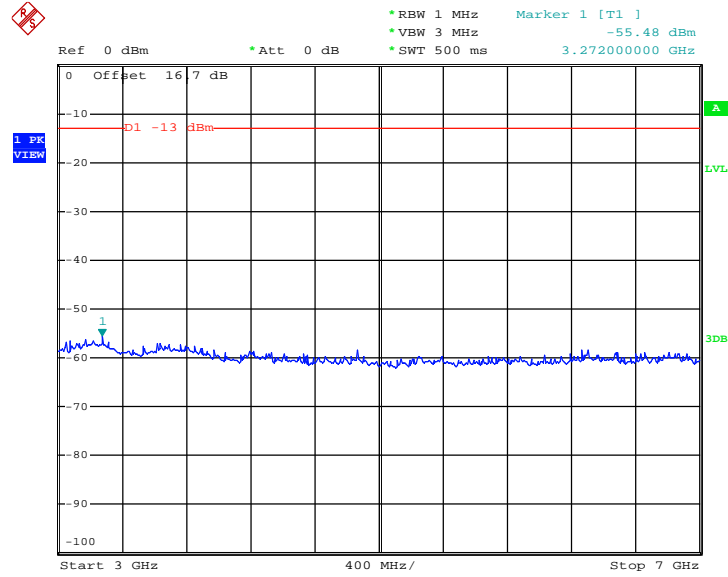

Date: 4.NOV.2014 19:45:08

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

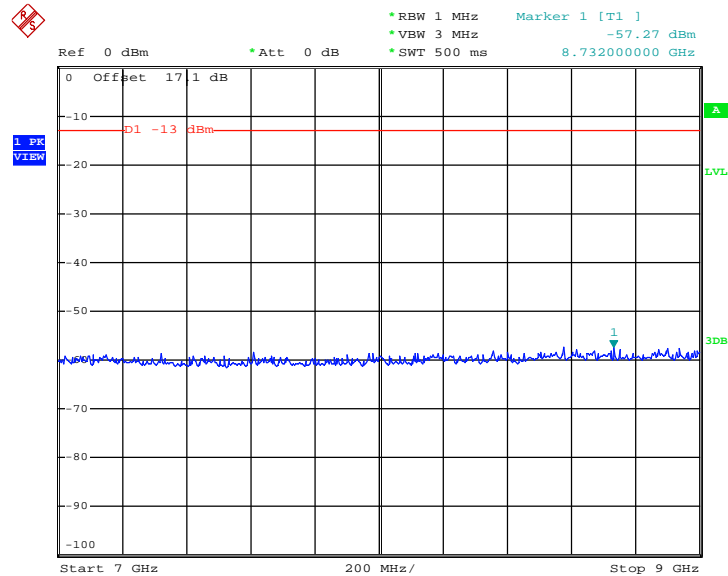


Date: 4.NOV.2014 19:48:00




Band :	GSM850	Channel :	CH189
Test Mode :	GSM Link (GMSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

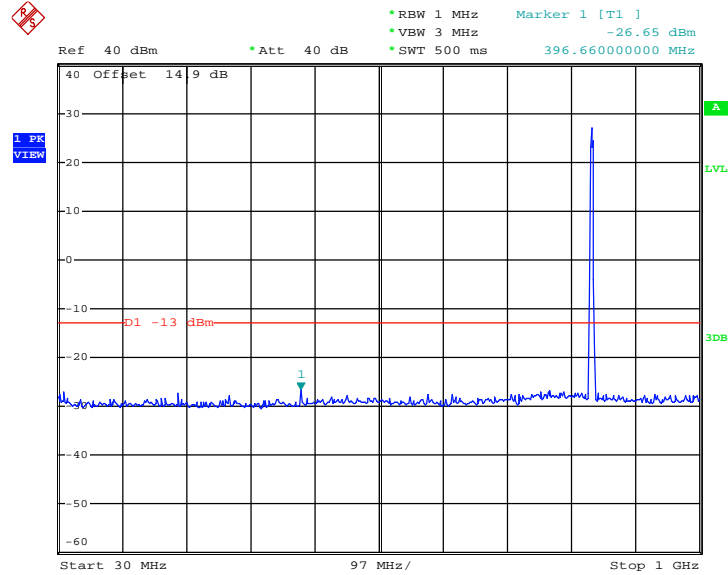

Date: 4.NOV.2014 19:37:26


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

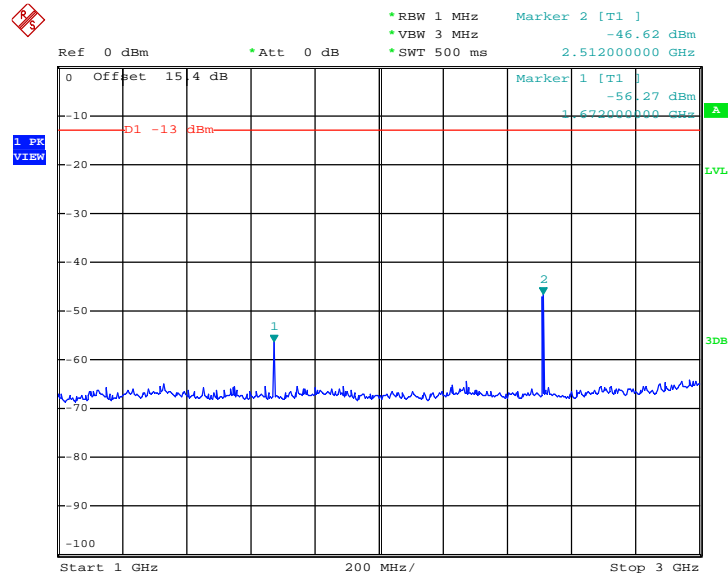

Date: 4.NOV.2014 19:41:30




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

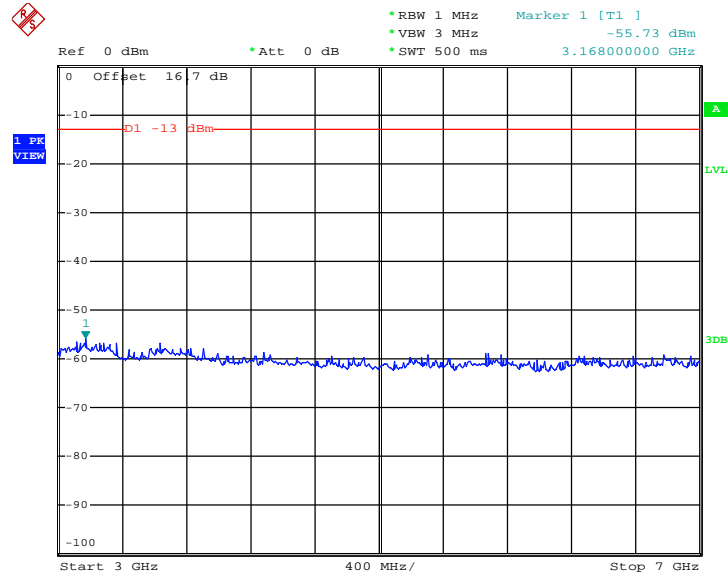

Date: 4.NOV.2014 19:45:35

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

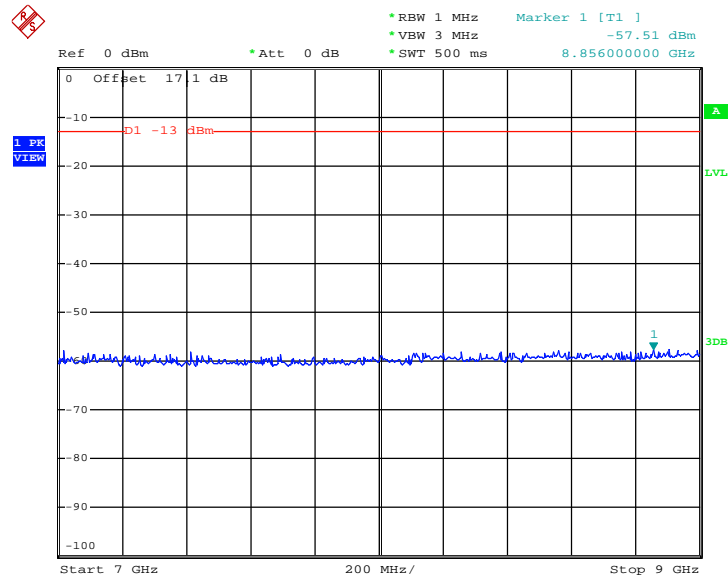


Date: 4.NOV.2014 19:47:33




Band :	GSM850	Channel :	CH251
Test Mode :	GSM Link (GMSK)	Frequency :	848.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

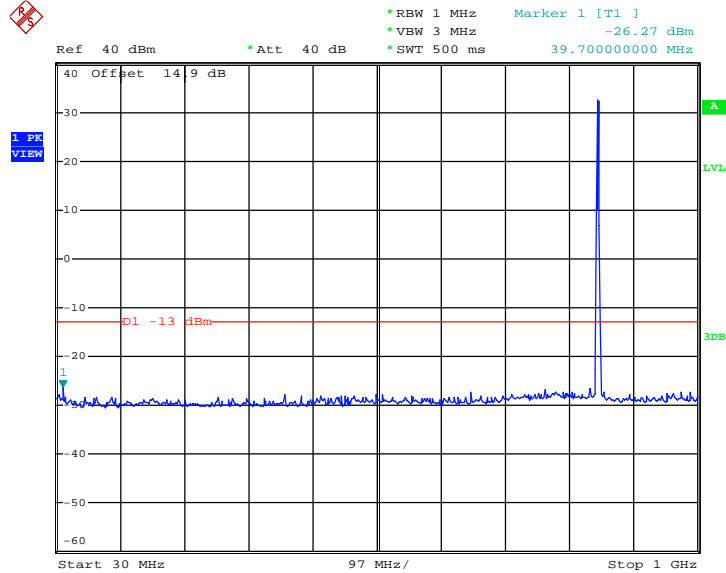

Date: 4.NOV.2014 19:38:21


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

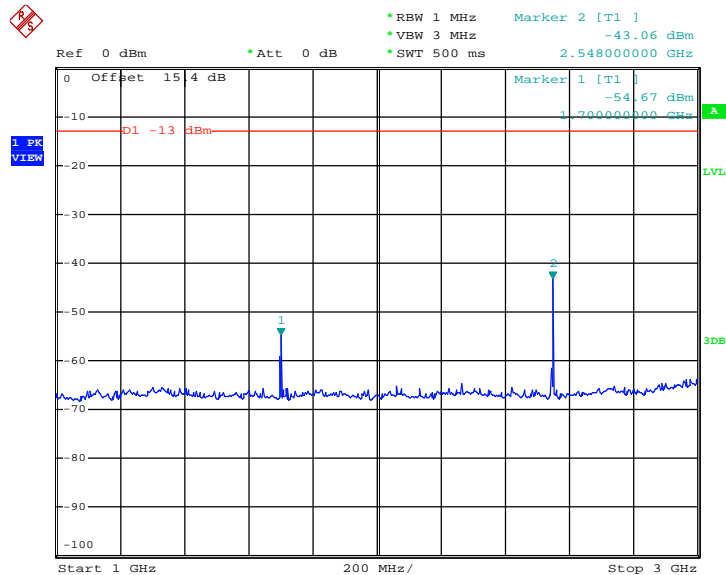

Date: 4.NOV.2014 19:40:38




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

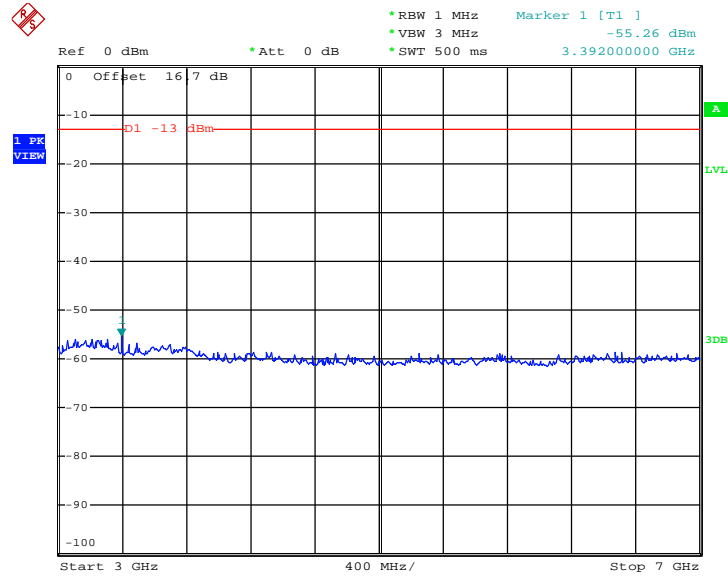

Date: 4.NOV.2014 19:46:07

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

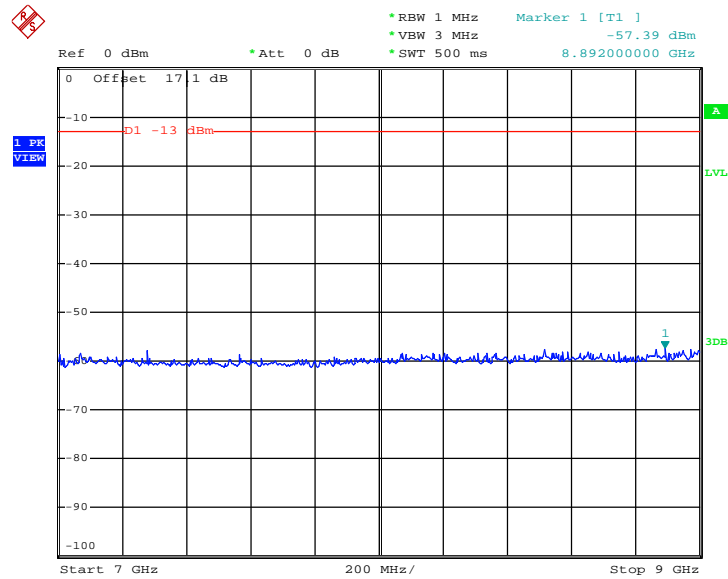


Date: 4.NOV.2014 19:47:05




Band :	GSM850	Channel :	CH128
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	824.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

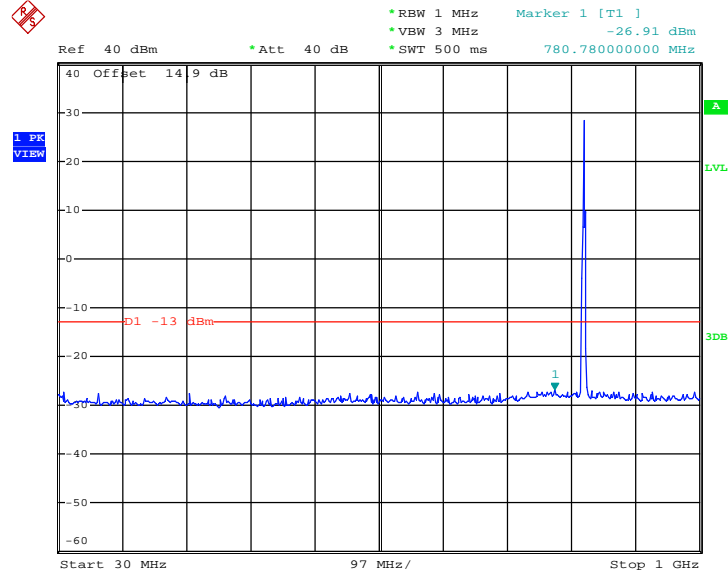

Date: 4.NOV.2014 20:36:19


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

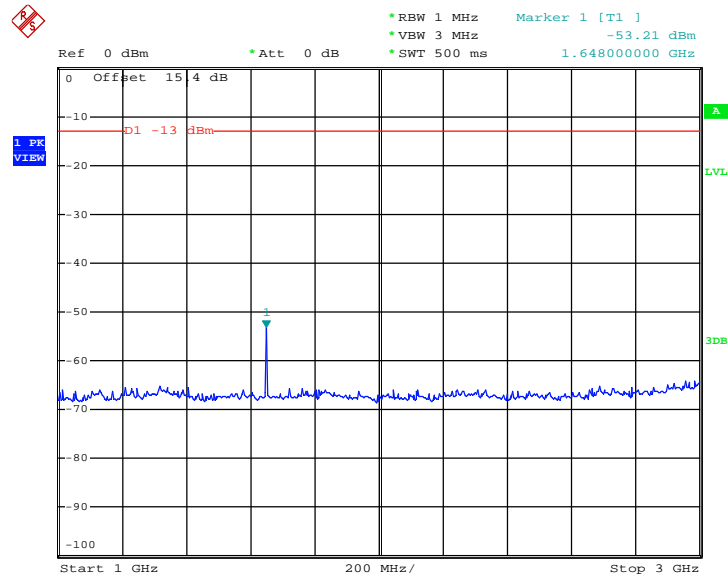

Date: 4.NOV.2014 20:40:20




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

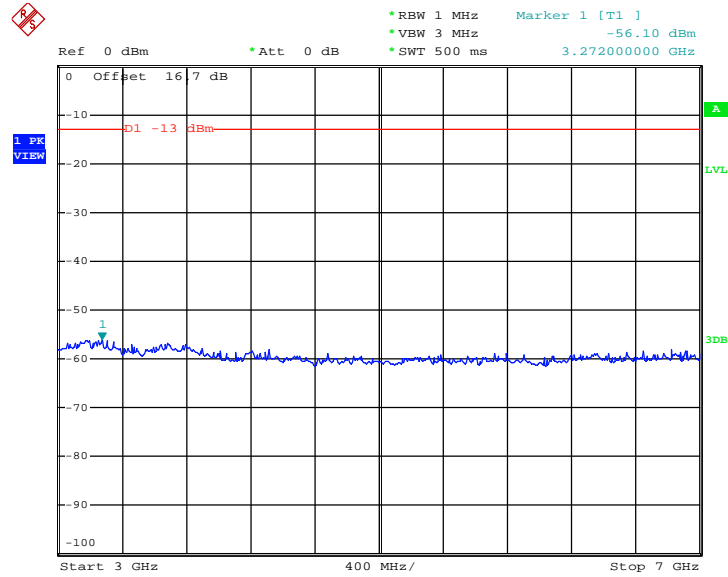

Date: 4.NOV.2014 20:41:15

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

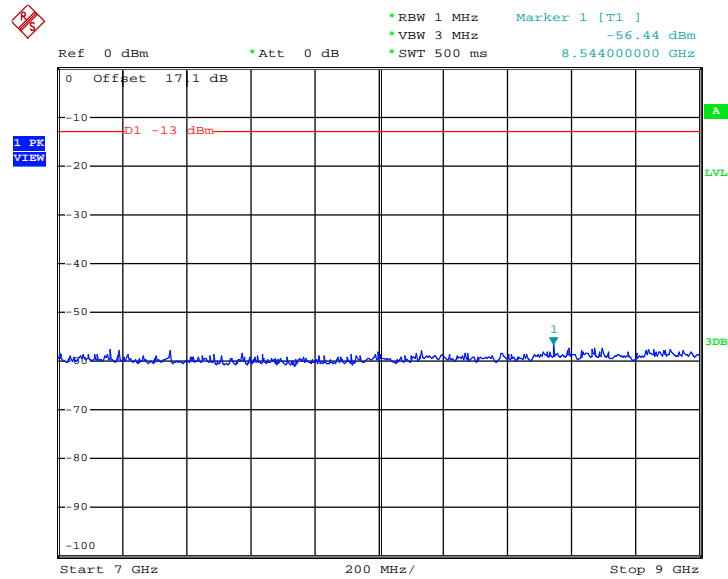


Date: 4.NOV.2014 20:43:53






Band :	GSM850	Channel :	CH189
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

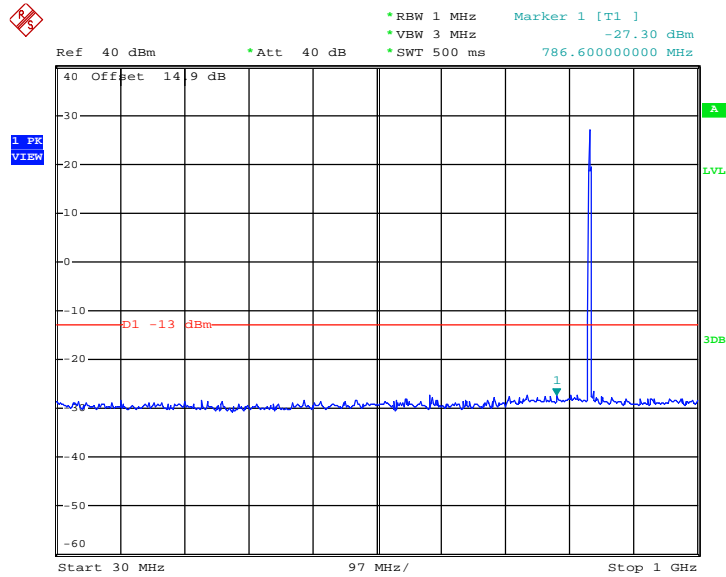

Date: 4.NOV.2014 20:36:52


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

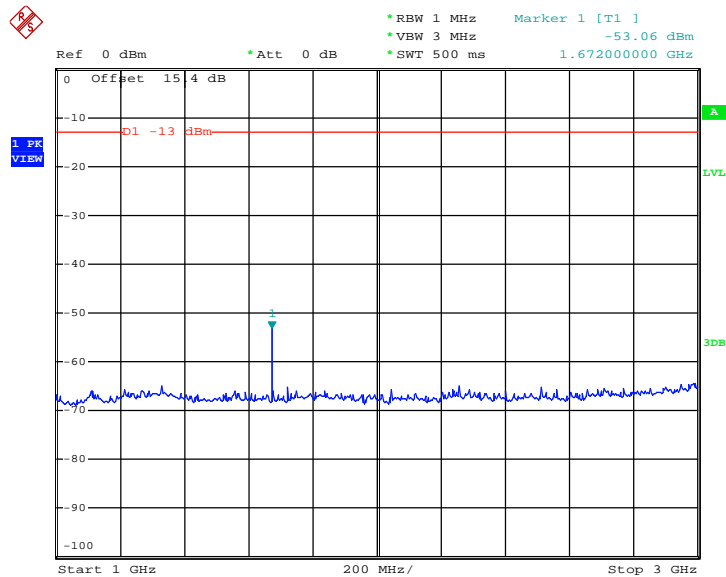

Date: 4.NOV.2014 20:39:54




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

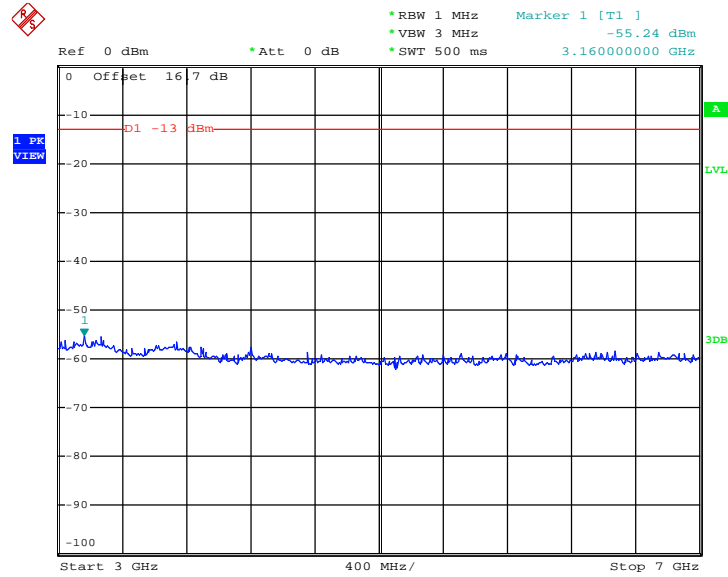

Date: 4.NOV.2014 20:41:46

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

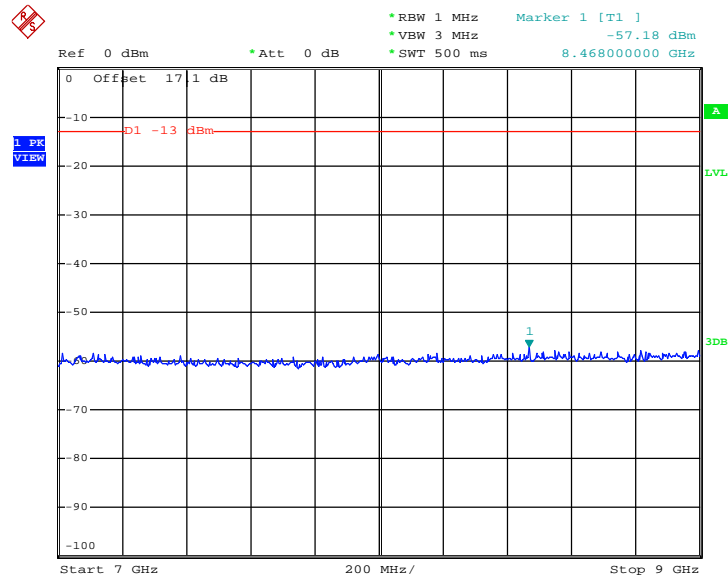


Date: 4.NOV.2014 20:43:26




Band :	GSM850	Channel :	CH251
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	848.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

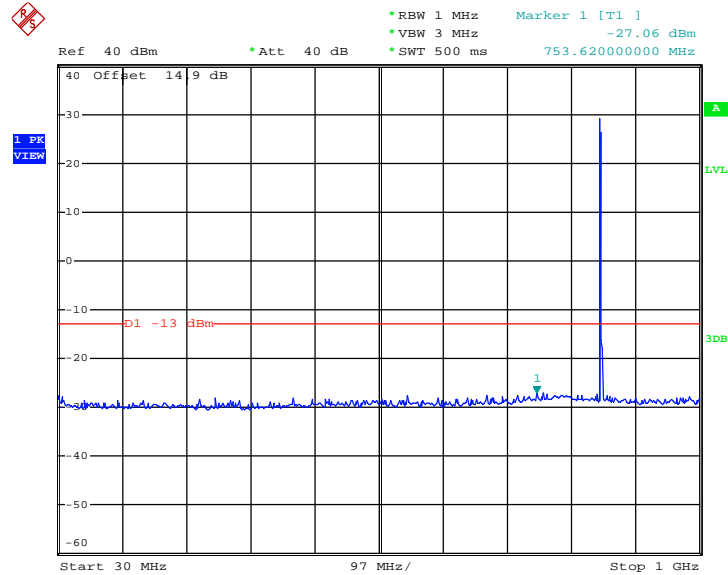

Date: 4.NOV.2014 20:37:29


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

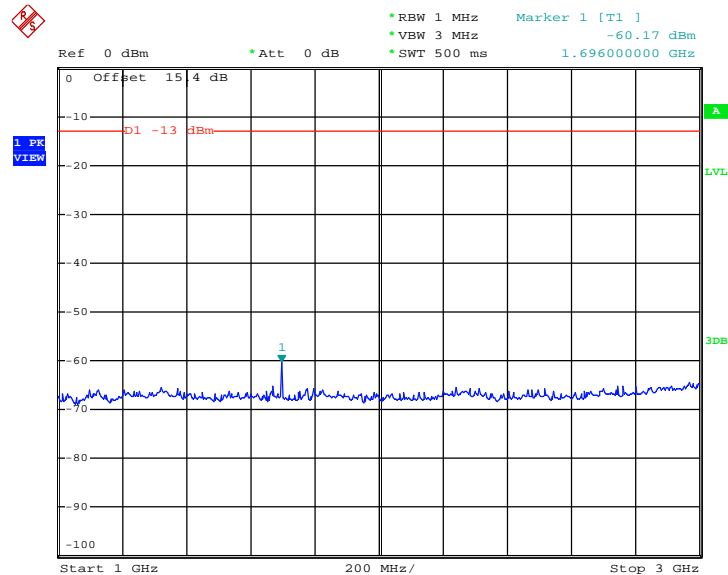

Date: 4.NOV.2014 20:39:33




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

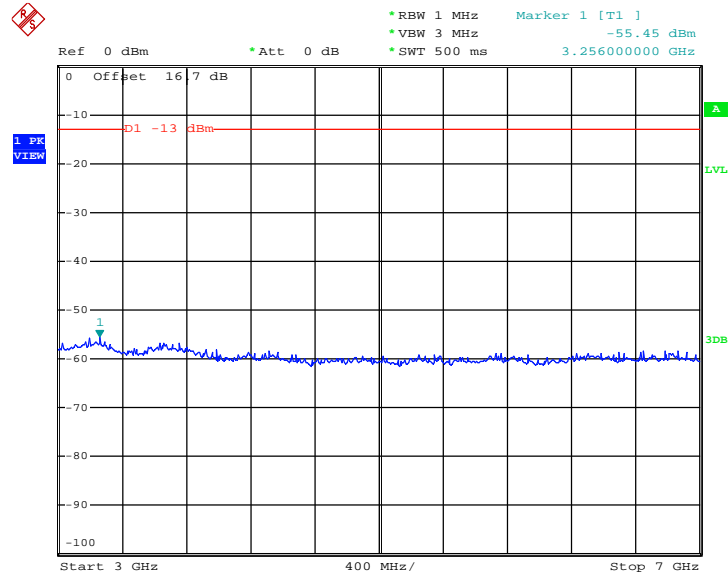

Date: 4.NOV.2014 20:42:14

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

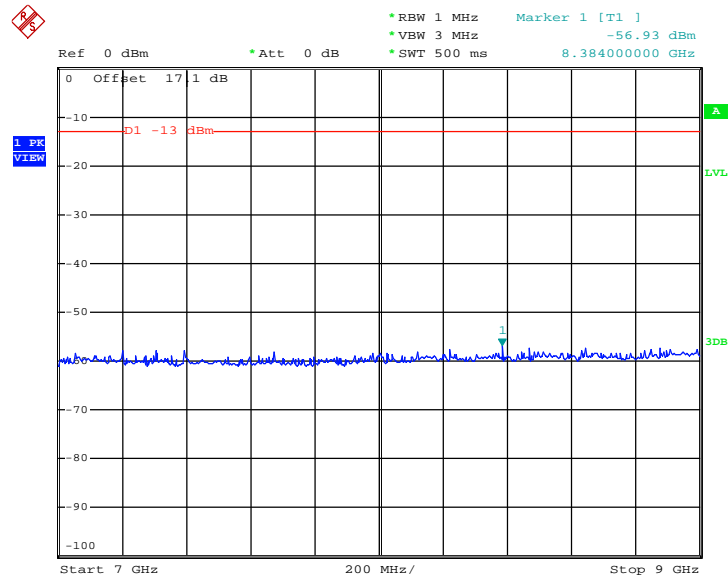


Date: 4.NOV.2014 20:43:02




Band :	GSM1900	Channel :	CH512
Test Mode :	GSM Link (GMSK)	Frequency :	1850.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

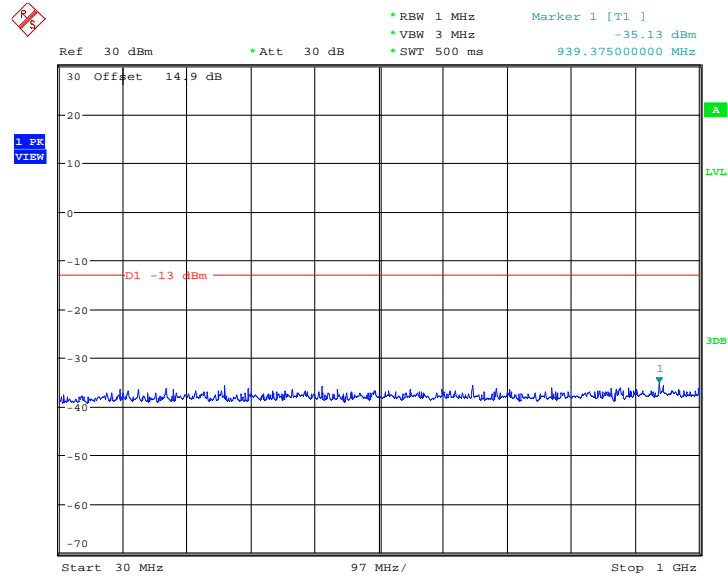

Date: 5.NOV.2014 00:52:47


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

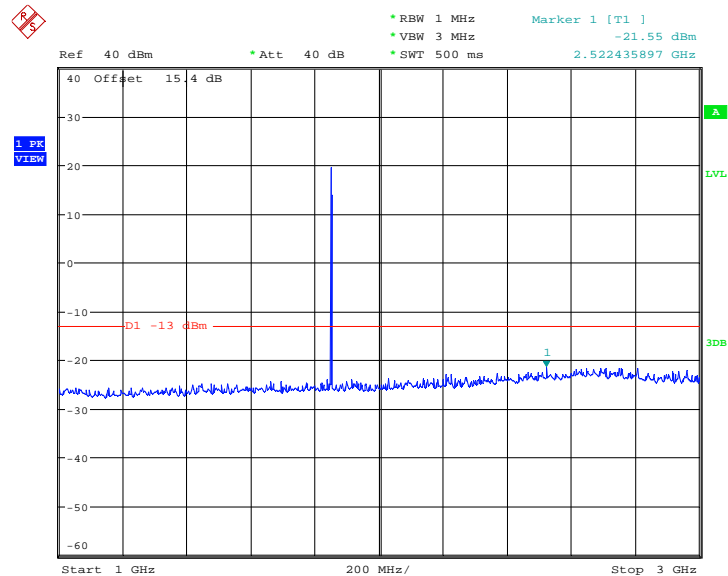

Date: 5.NOV.2014 00:54:30




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

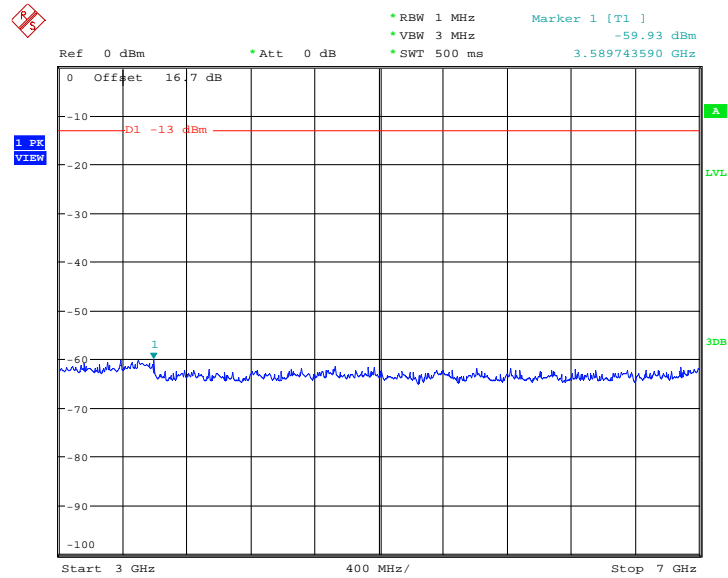

Date: 5.NOV.2014 00:56:18


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

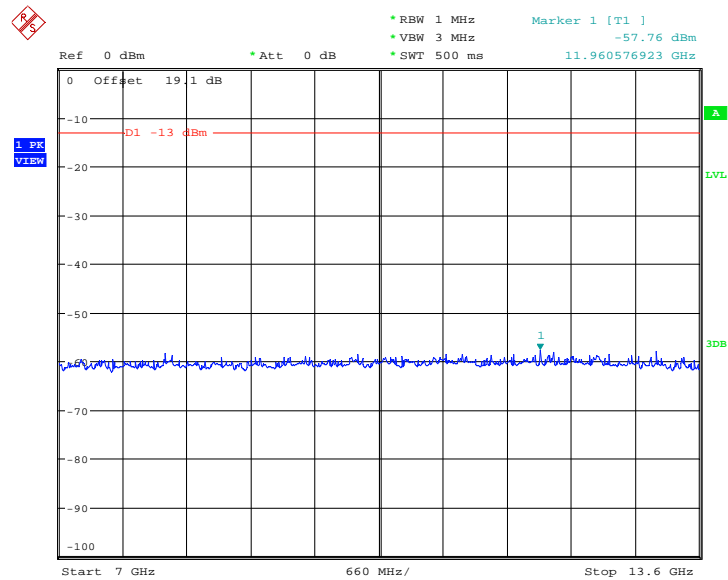

Date: 5.NOV.2014 00:57:55



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

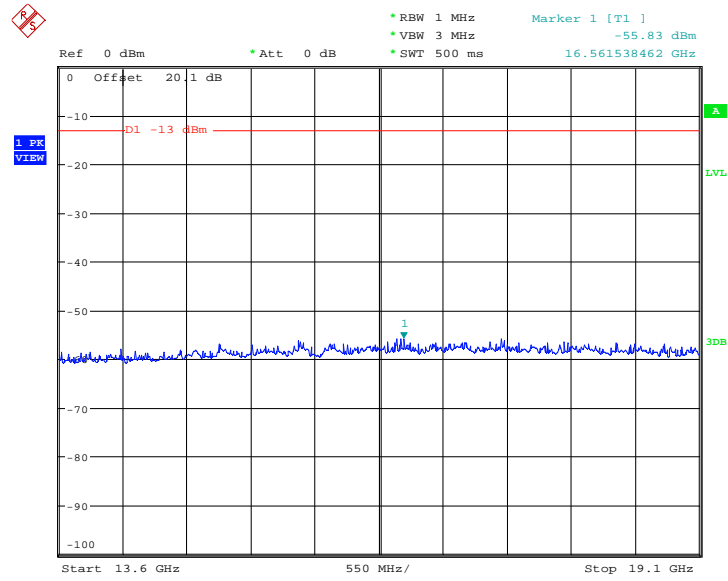


Date: 5.NOV.2014 00:59:54




Band :	GSM1900	Channel :	CH661
Test Mode :	GSM Link (GMSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

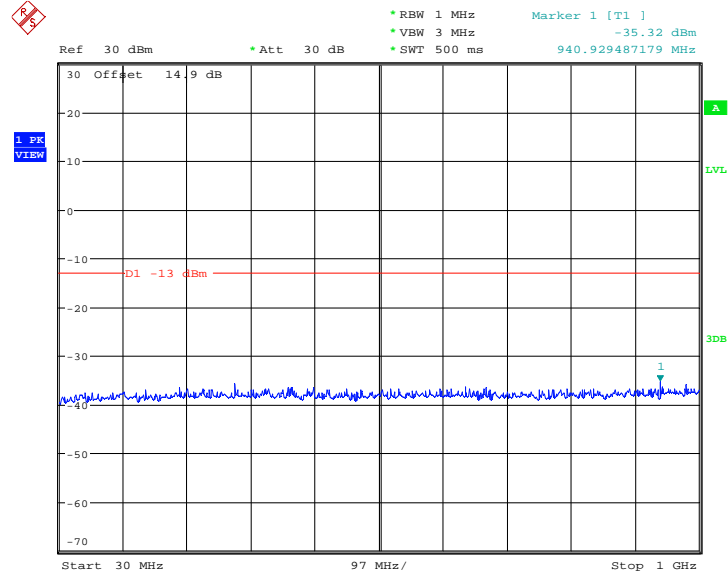

Date: 5.NOV.2014 00:53:10

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

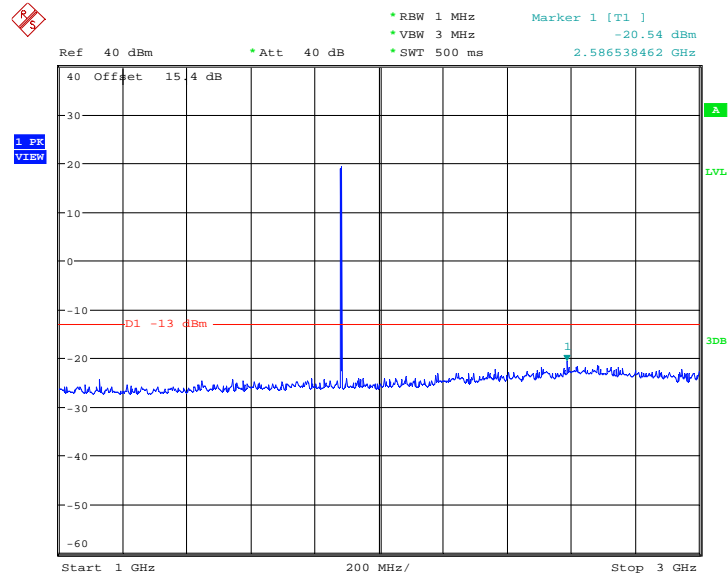


Date: 5.NOV.2014 00:54:54






### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

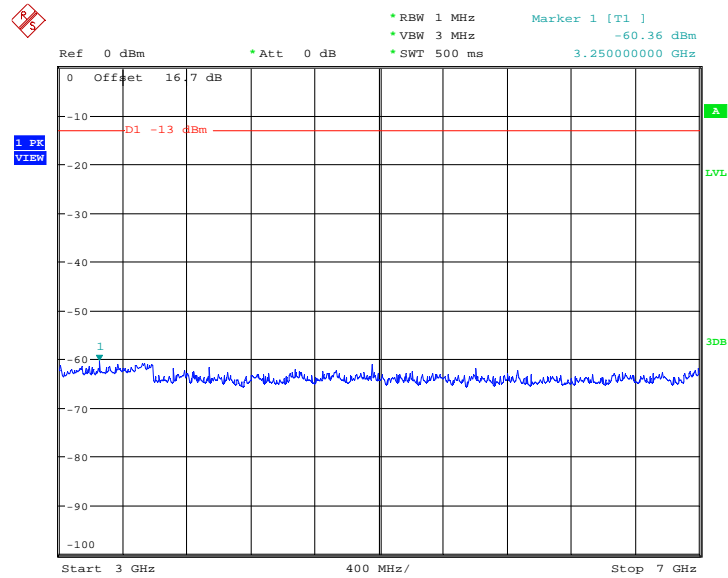

Date: 5.NOV.2014 00:56:35


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

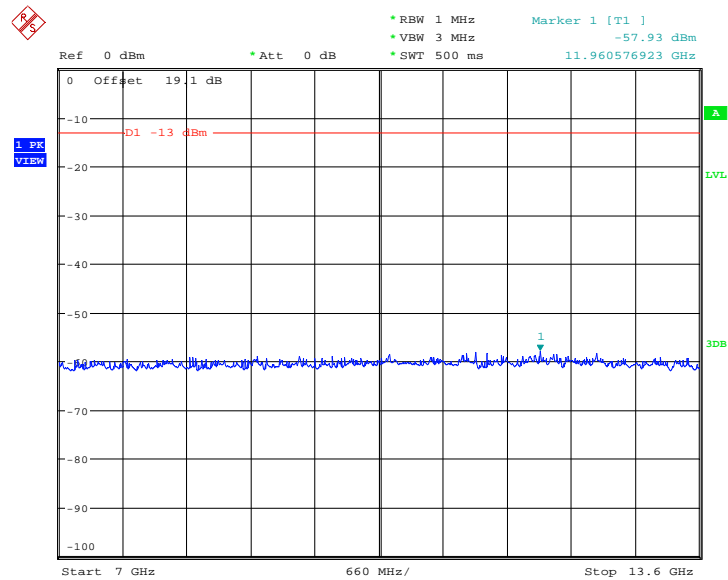

Date: 5.NOV.2014 00:58:17



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

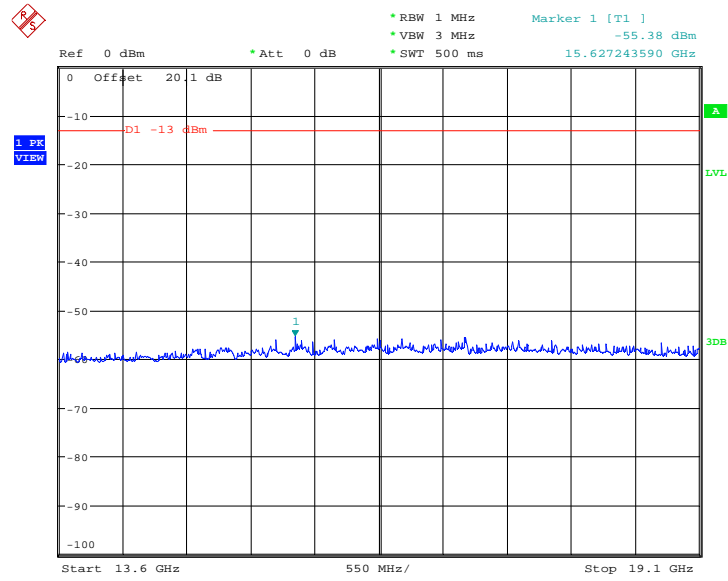


Date: 5.NOV.2014 01:00:10




Band :	GSM1900	Channel :	CH810
Test Mode :	GSM Link (GMSK)	Frequency :	1909.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

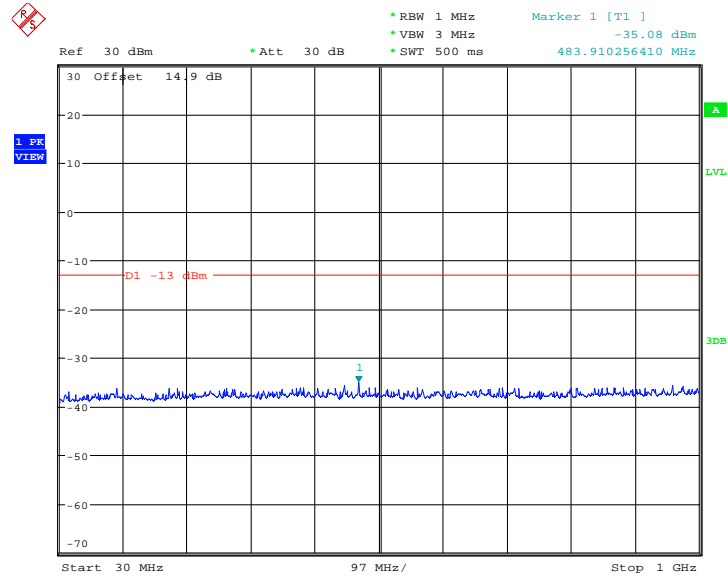

Date: 5.NOV.2014 00:53:28


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

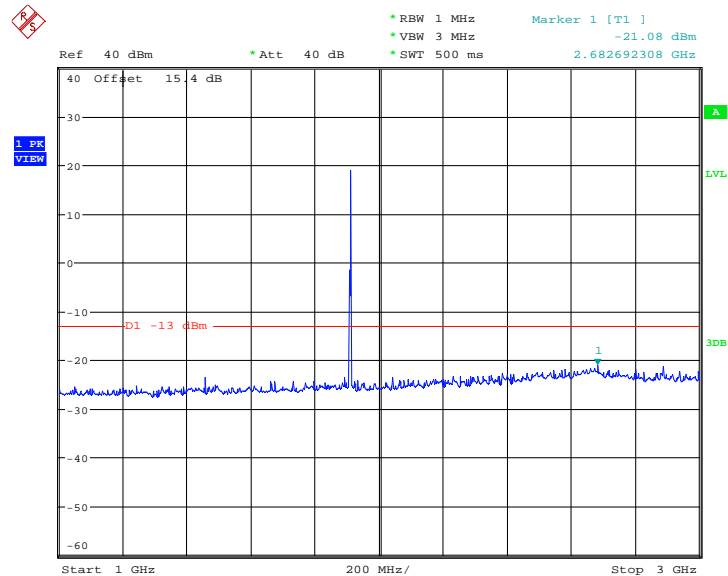

Date: 5.NOV.2014 00:55:28




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

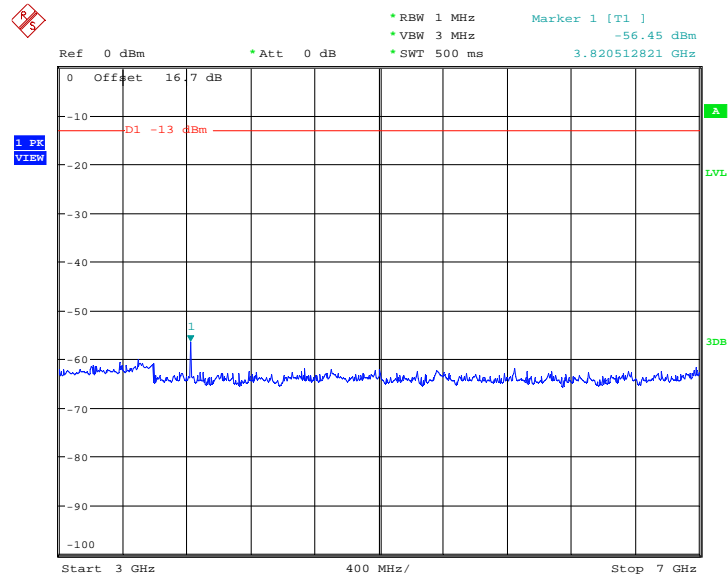

Date: 5.NOV.2014 00:56:51


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

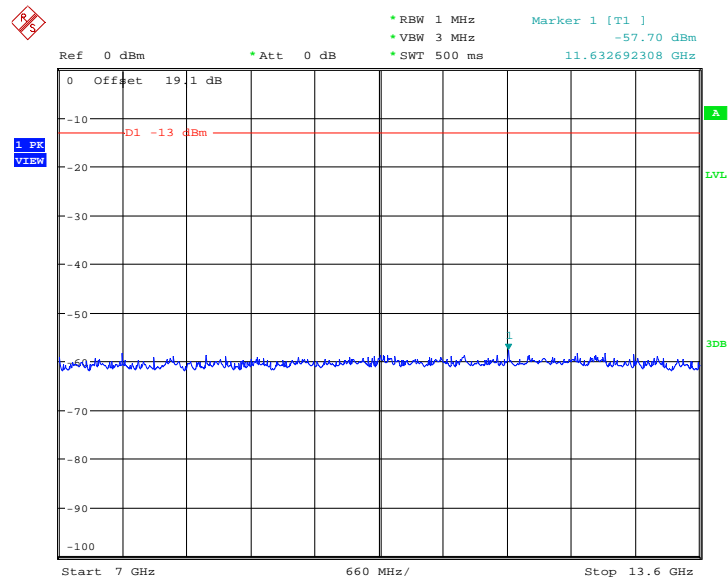

Date: 5.NOV.2014 00:58:32



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

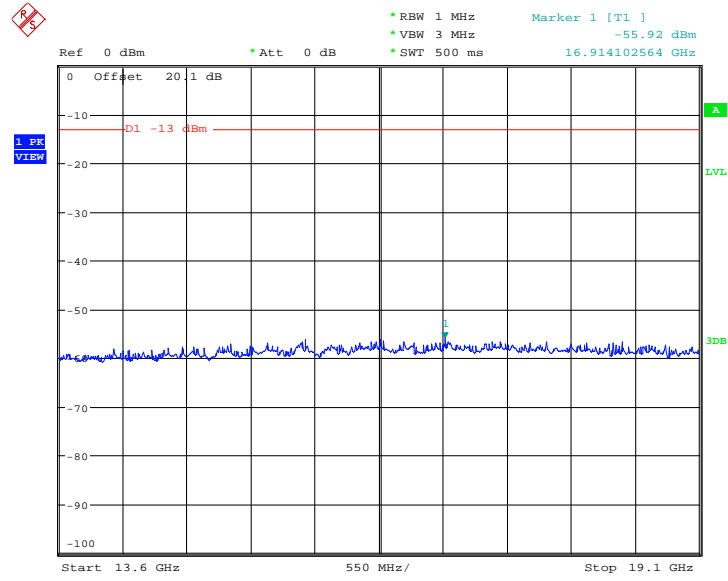


Date: 5.NOV.2014 01:00:32




Band :	GSM1900	Channel :	CH512
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1850.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

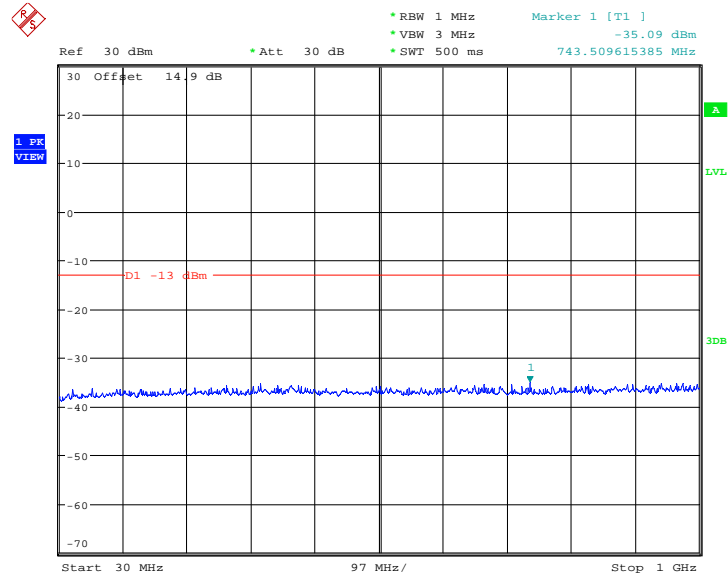

Date: 5.NOV.2014 00:12:19


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

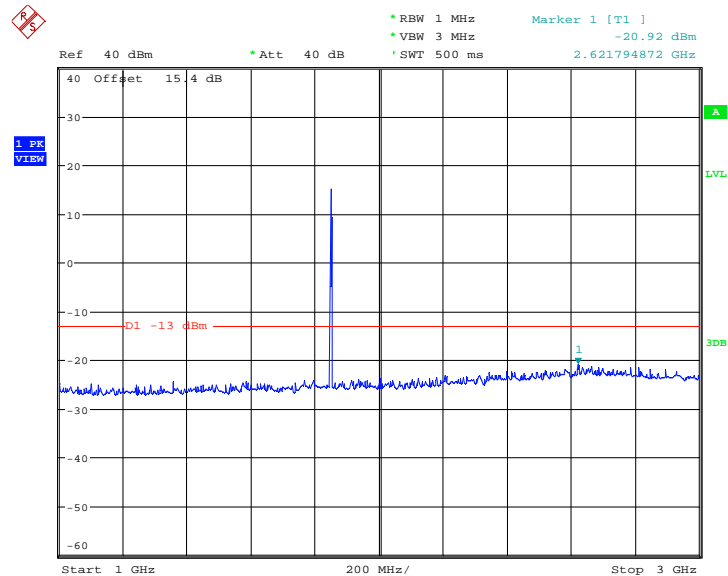

Date: 5.NOV.2014 00:14:47




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

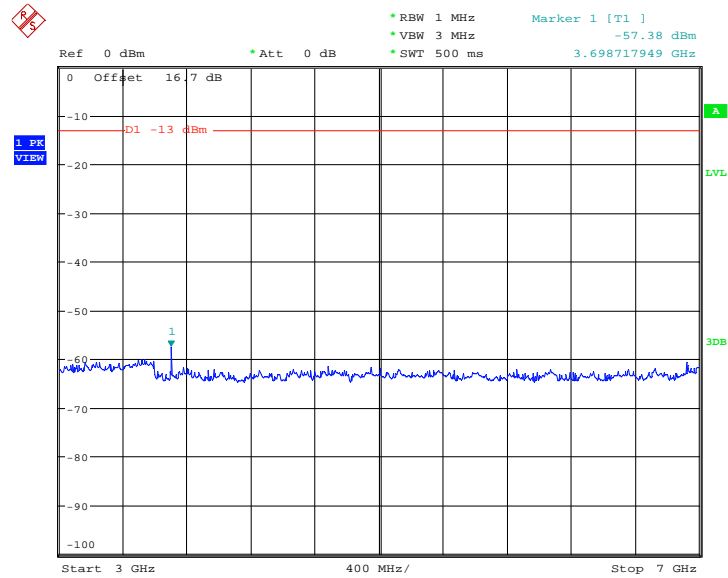

Date: 5.NOV.2014 00:16:44


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

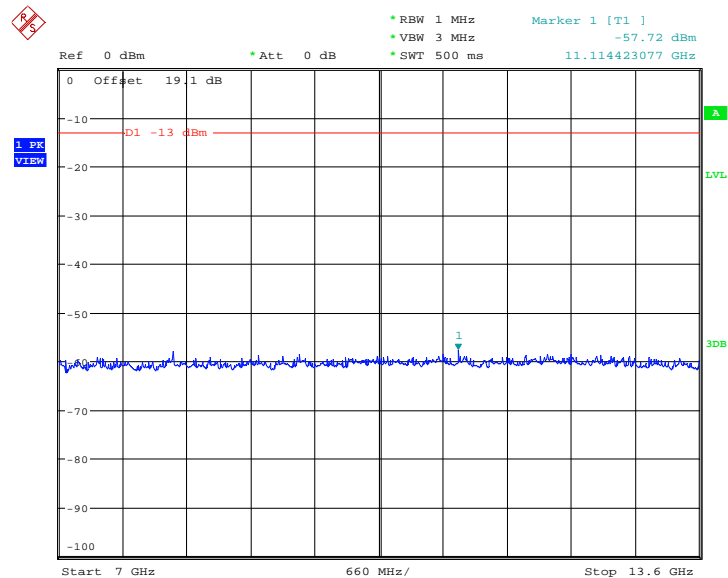

Date: 5.NOV.2014 00:18:11



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

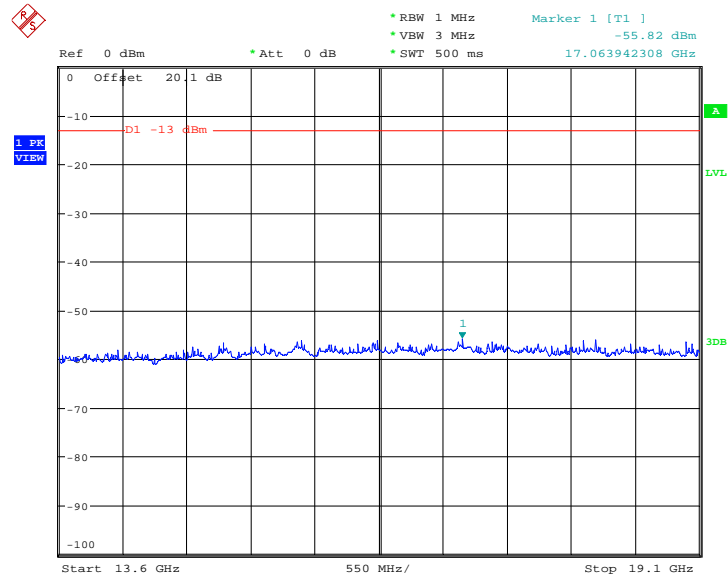


Date: 5.NOV.2014 00:22:07






<b>Band :</b>	GSM1900	<b>Channel :</b>	CH661
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)	<b>Frequency :</b>	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

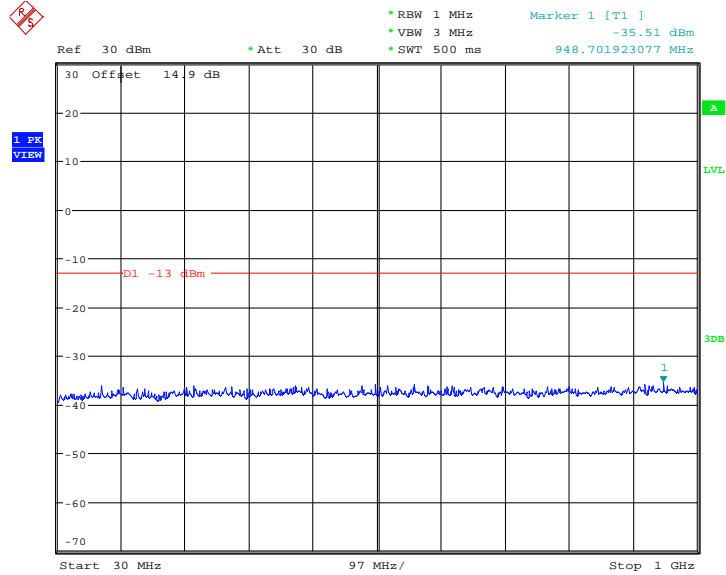

Date: 5.NOV.2014 00:12:38


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

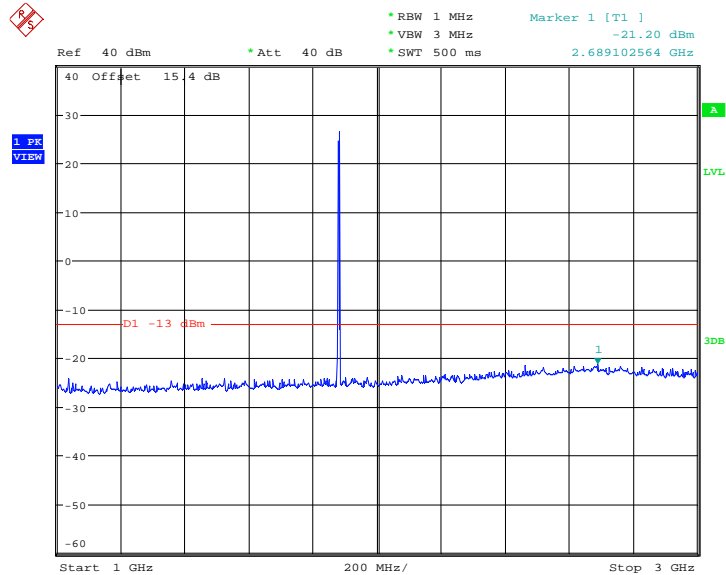

Date: 5.NOV.2014 00:15:16




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

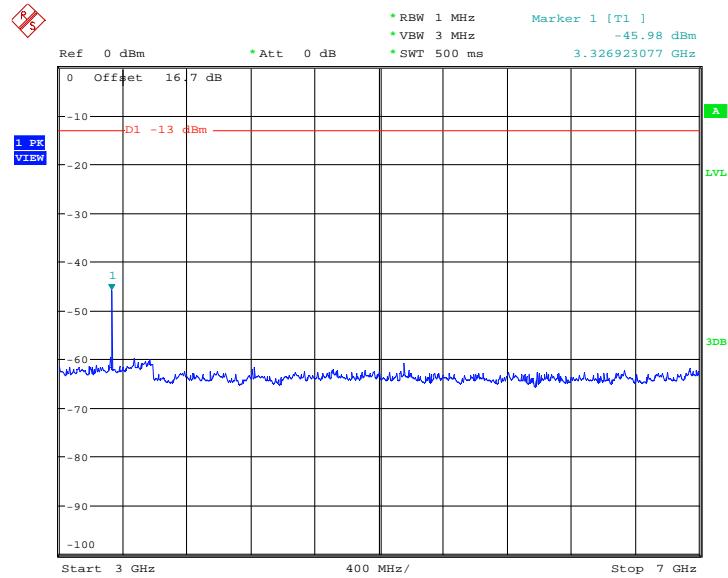

Date: 5.NOV.2014 00:16:59


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

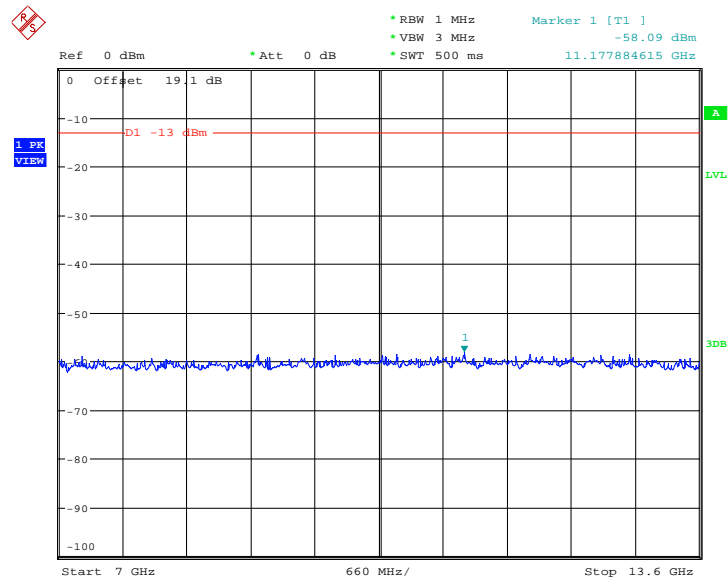

Date: 5.NOV.2014 00:18:33



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

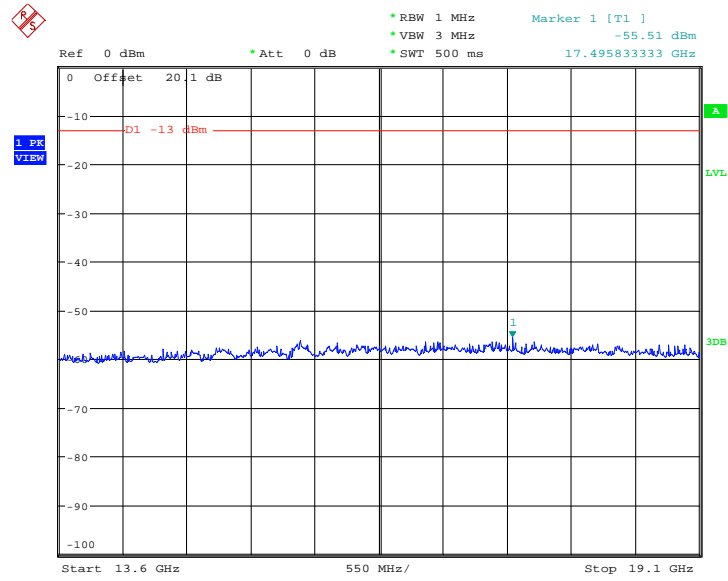


Date: 5.NOV.2014 00:22:45




Band :	GSM1900	Channel :	CH810
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1909.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

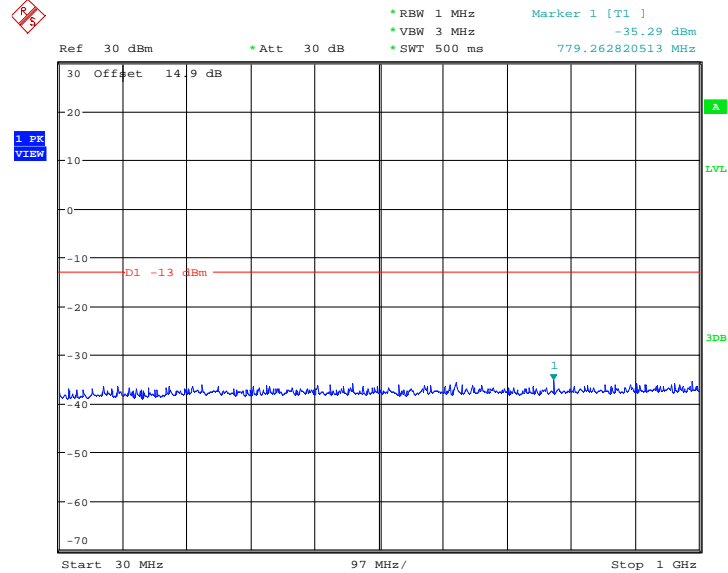

Date: 5.NOV.2014 00:12:55


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

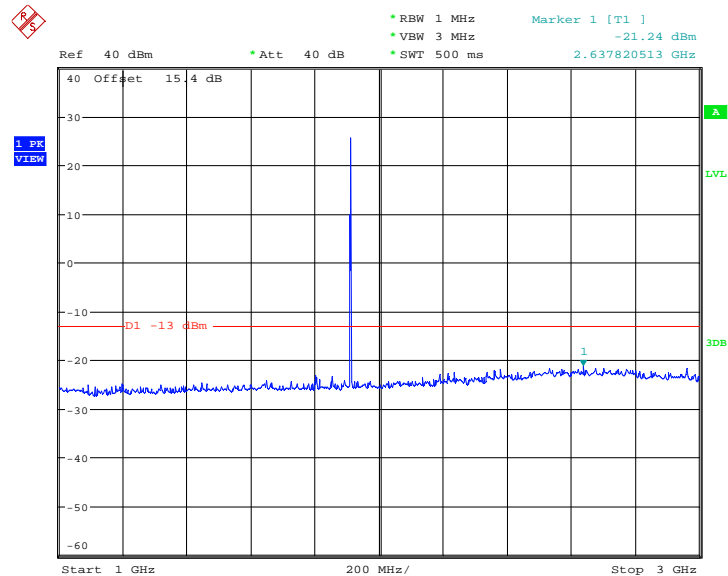

Date: 5.NOV.2014 00:15:45




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

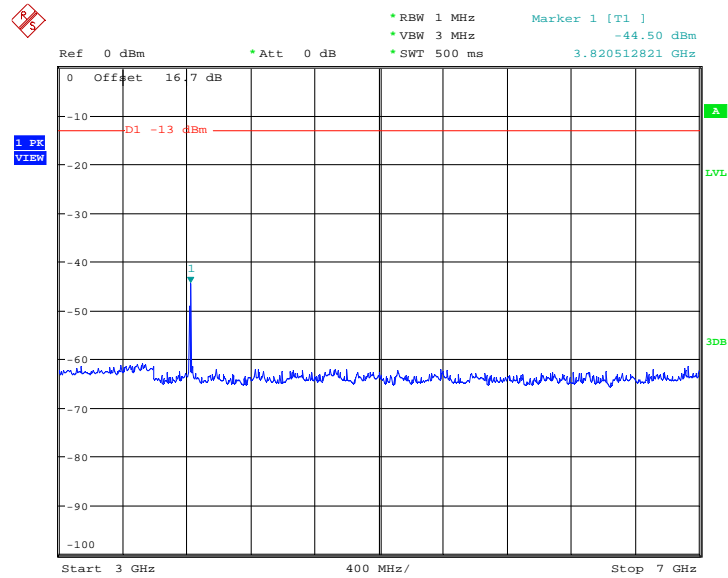

Date: 5.NOV.2014 00:17:20


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

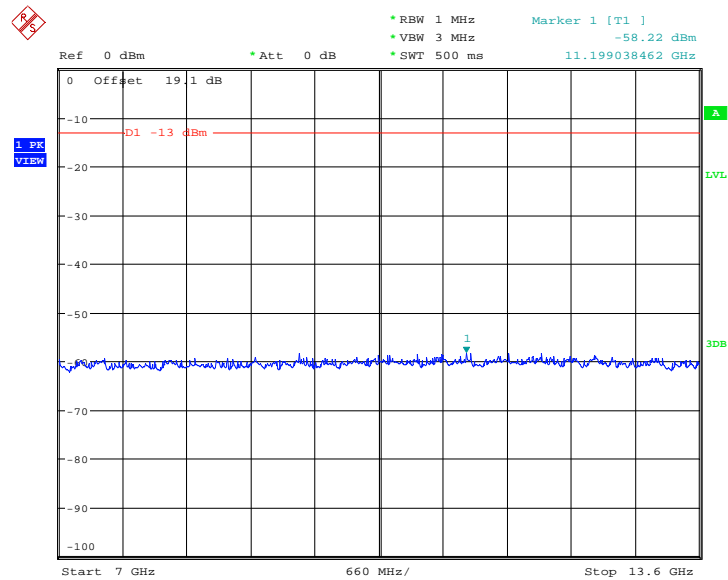

Date: 5.NOV.2014 00:18:50



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

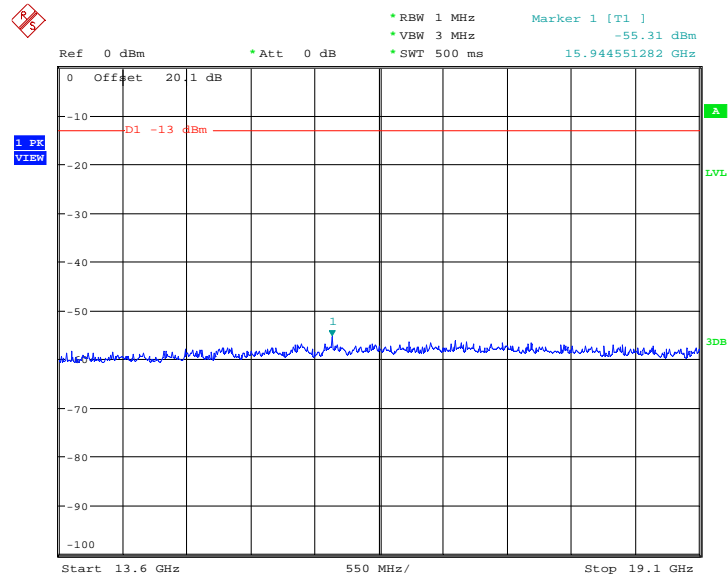


Date: 5.NOV.2014 00:23:01




Band :	WCDMA Band V	Channel :	CH4132
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	826.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

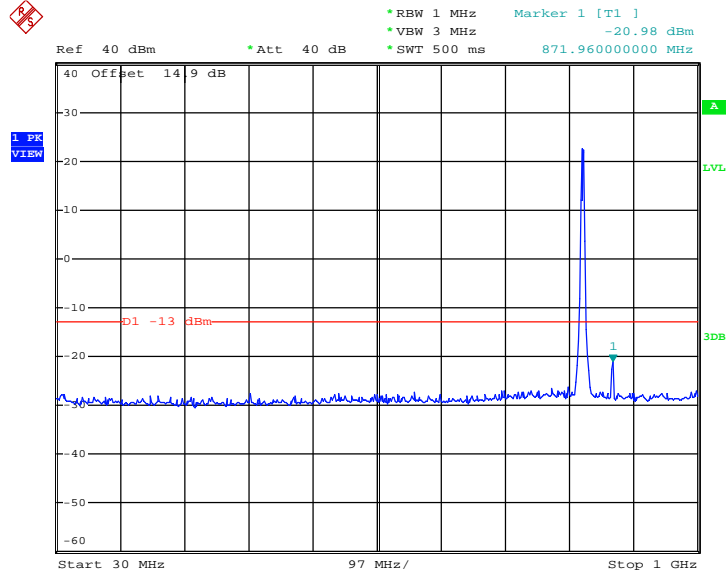

Date: 4.NOV.2014 21:42:09


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

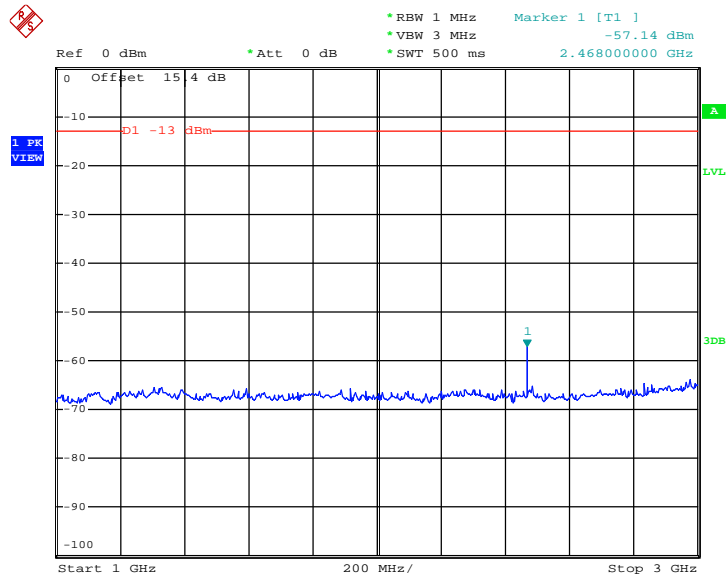

Date: 4.NOV.2014 21:48:36




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

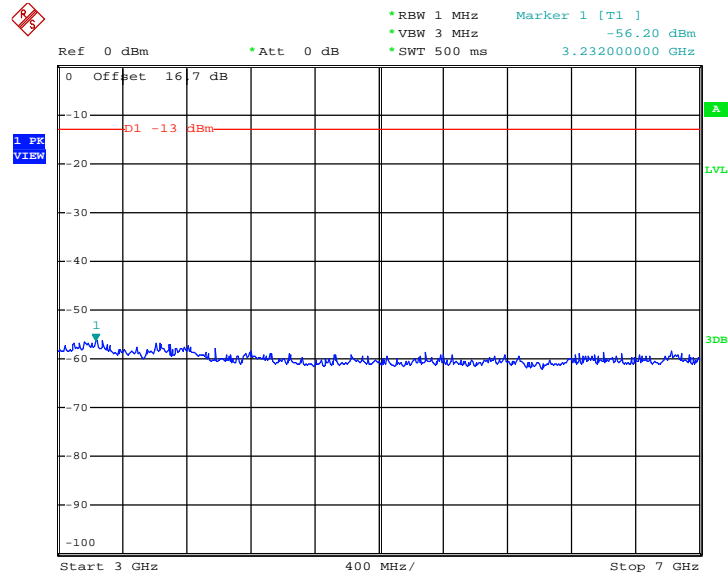

Date: 4.NOV.2014 21:51:34

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

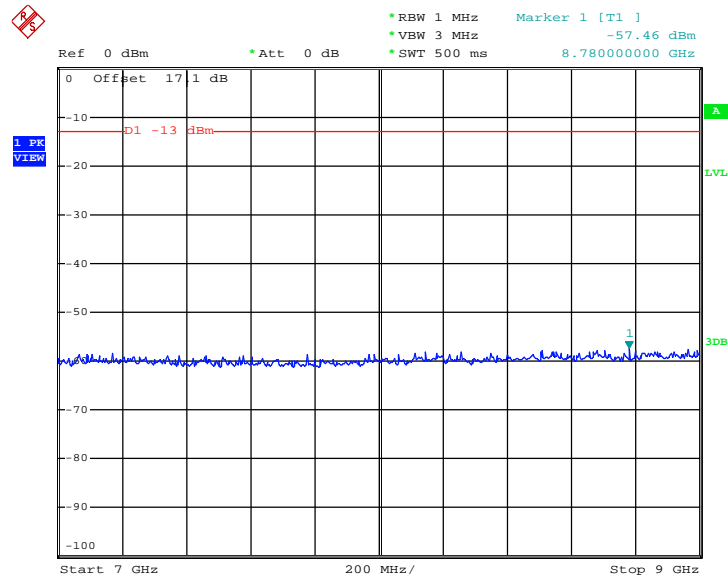


Date: 7.NOV.2014 00:30:16






Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

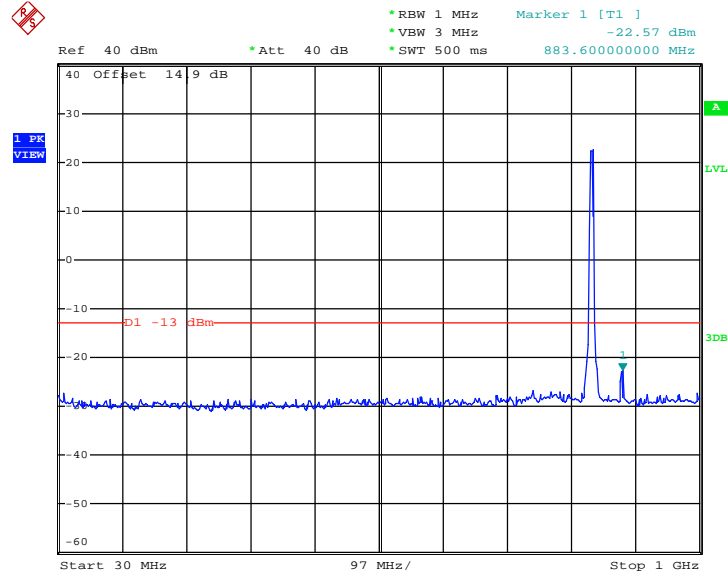

Date: 4.NOV.2014 21:42:47


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

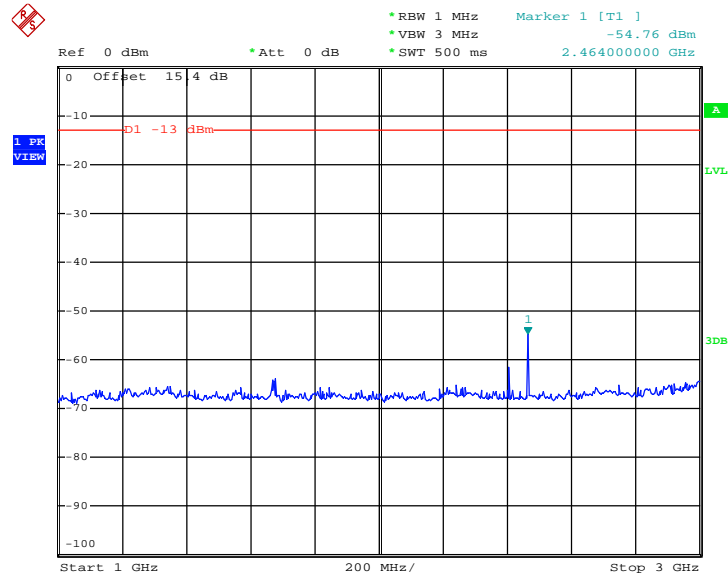

Date: 4.NOV.2014 21:49:05




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

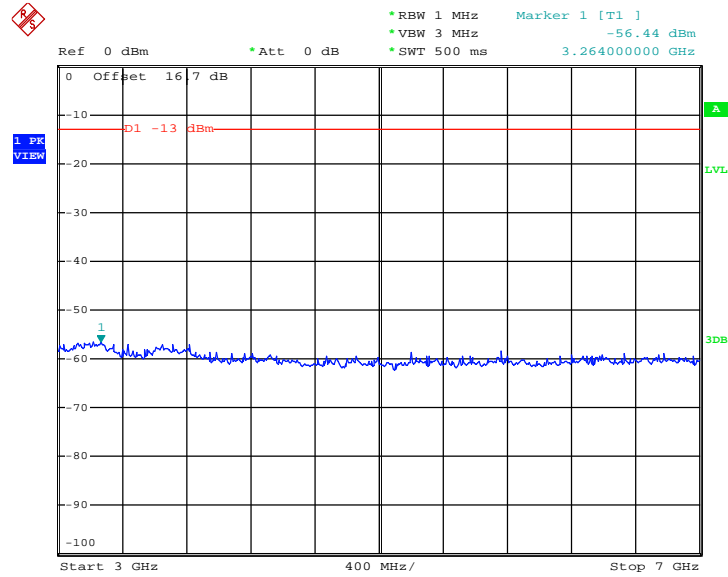

Date: 4.NOV.2014 21:53:28

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

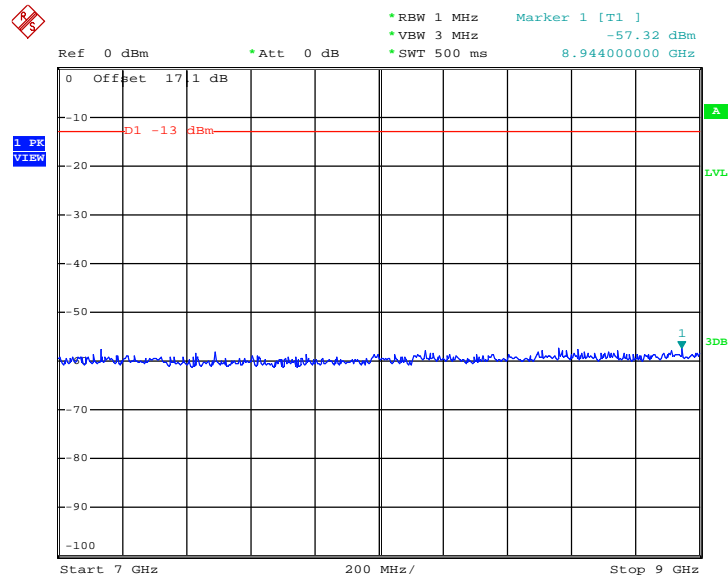


Date: 7.NOV.2014 00:30:51




Band :	WCDMA Band V	Channel :	CH4233
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	846.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

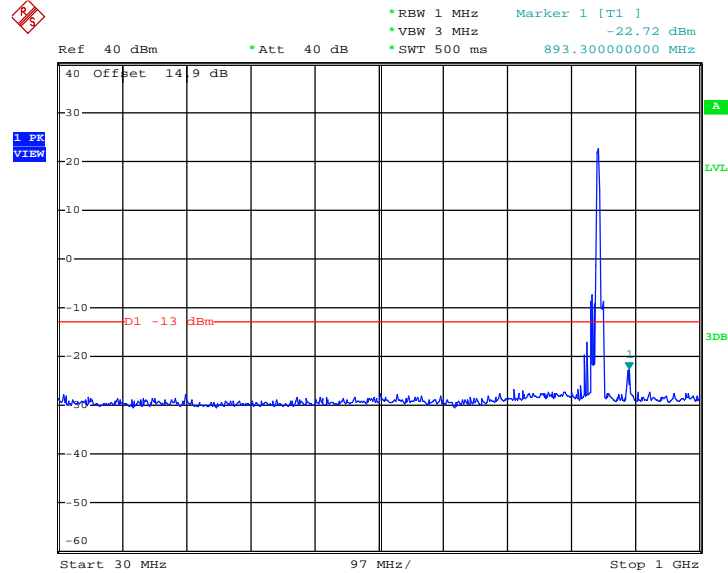

Date: 4.NOV.2014 21:44:14


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

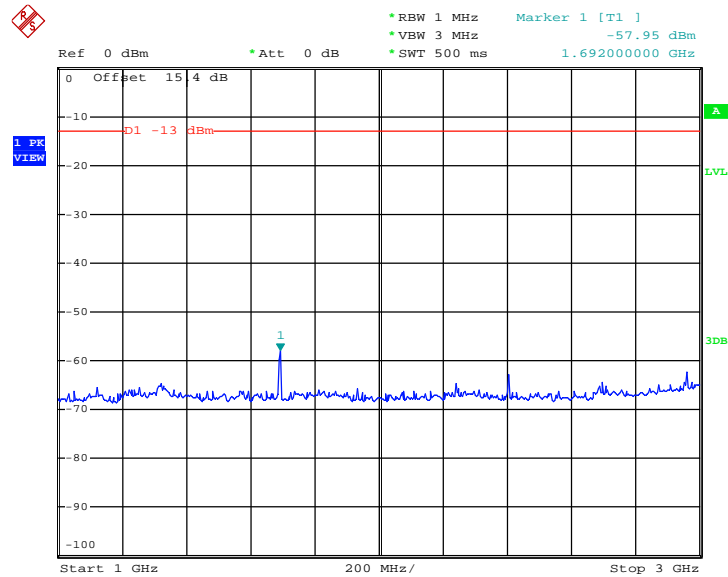

Date: 4.NOV.2014 21:50:16




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

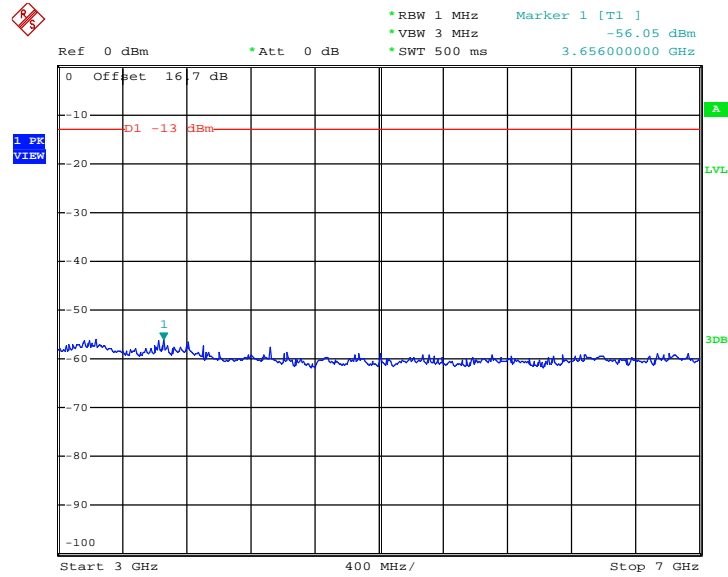

Date: 4.NOV.2014 21:53:48

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

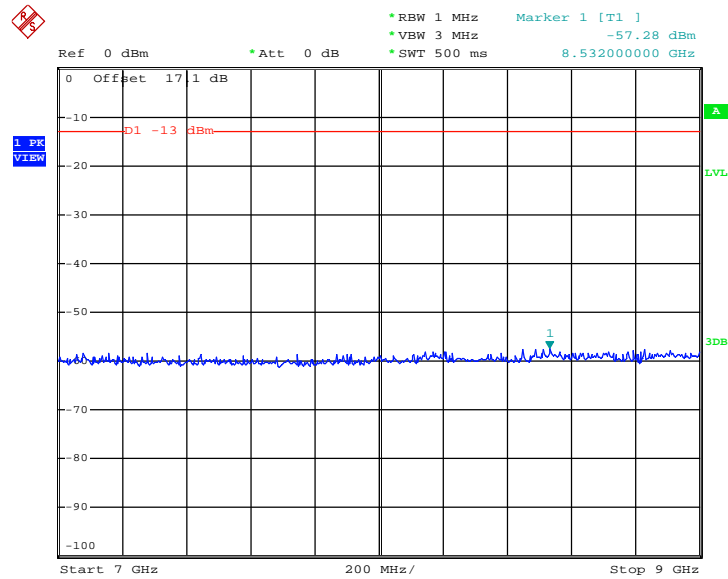


Date: 7.NOV.2014 00:31:27




Band :	WCDMA Band II	Channel :	CH9262
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1852.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

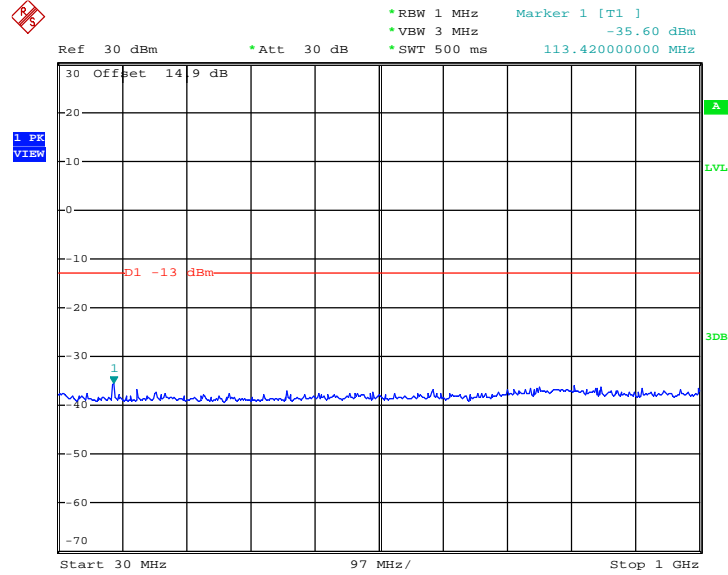

Date: 5.NOV.2014 21:21:27


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

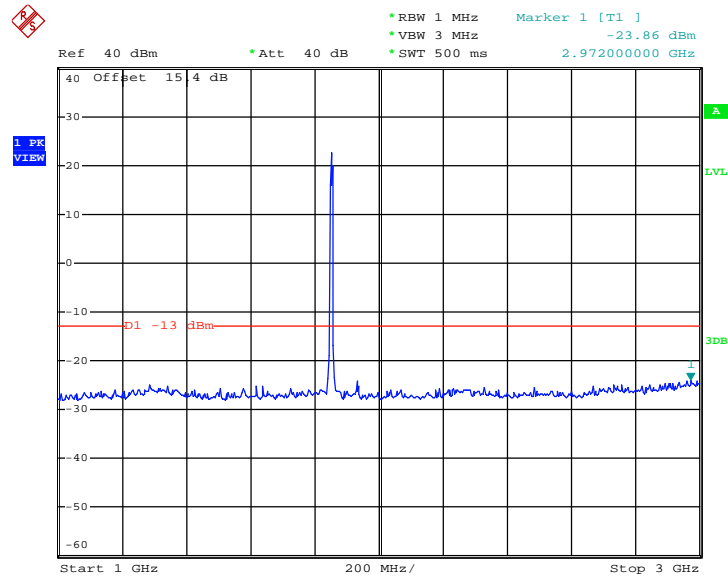

Date: 5.NOV.2014 21:24:43




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

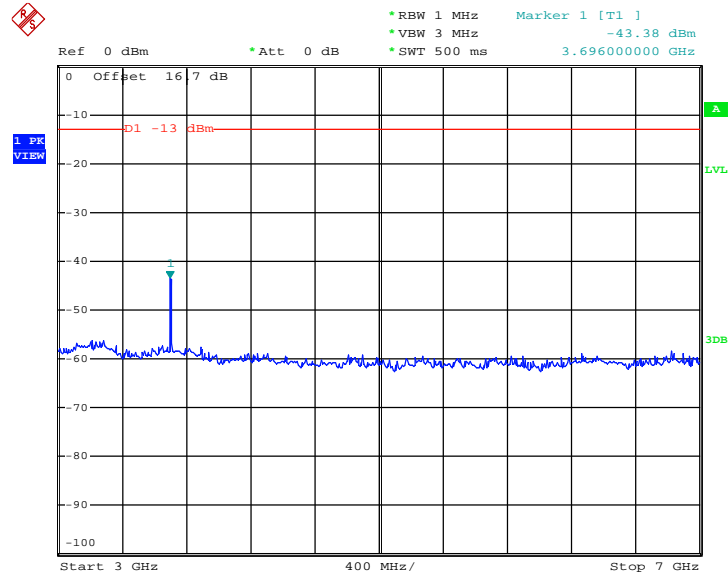

Date: 5.NOV.2014 21:31:21


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

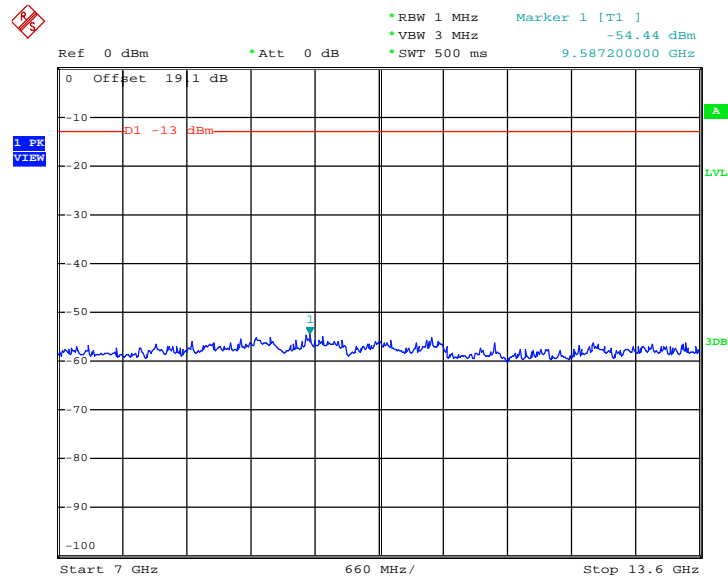

Date: 5.NOV.2014 21:35:41



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

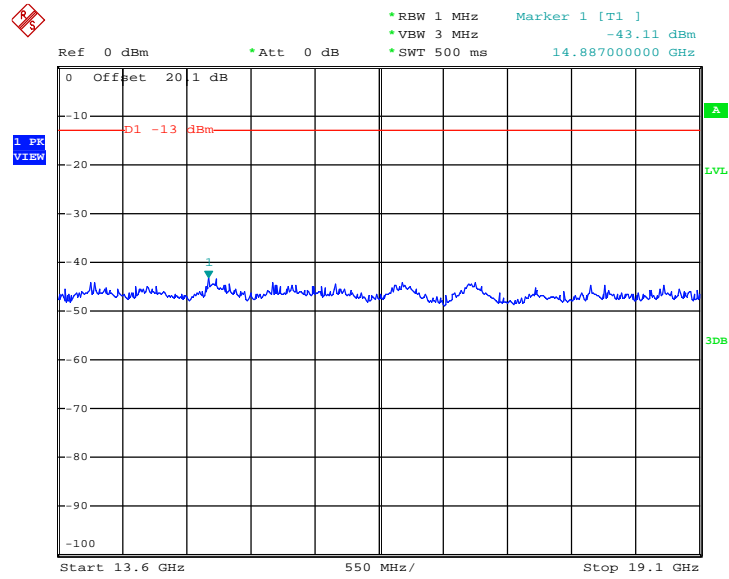


Date: 5.NOV.2014 21:41:02




Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

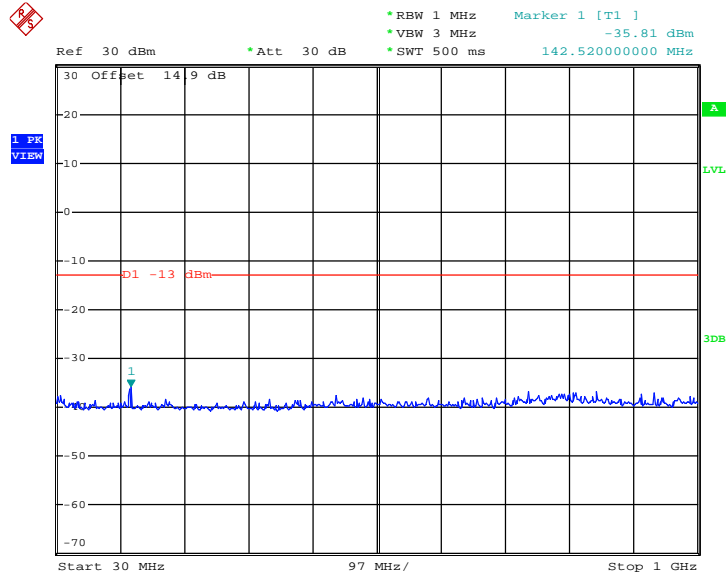

Date: 5.NOV.2014 21:21:54

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

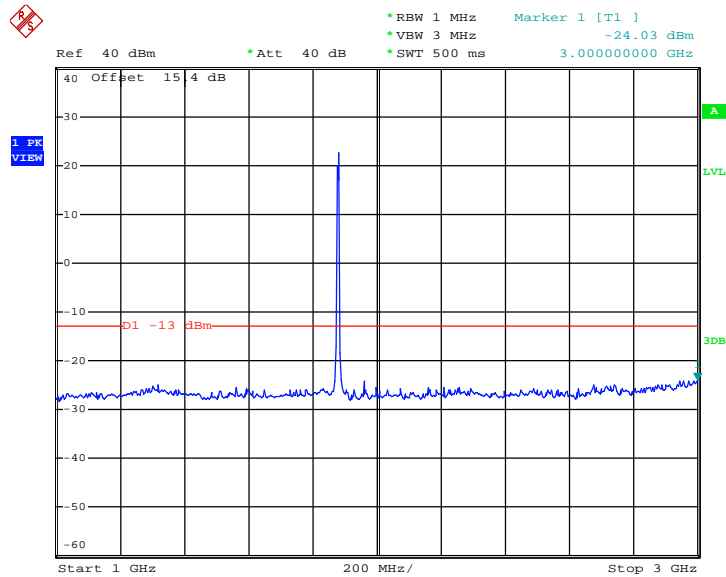


Date: 5.NOV.2014 21:25:23






### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

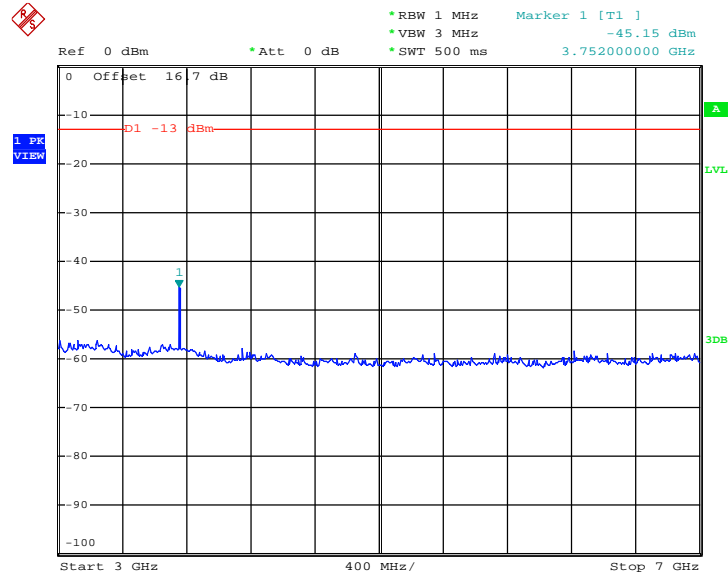

Date: 5.NOV.2014 21:30:51


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

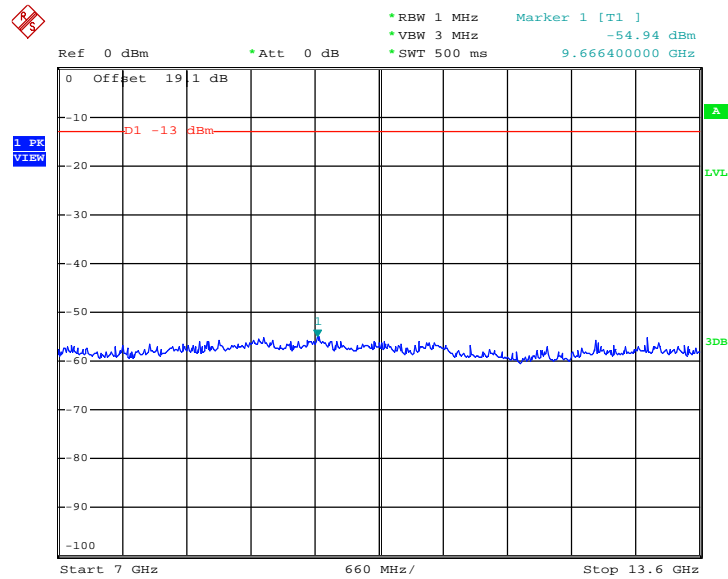

Date: 5.NOV.2014 21:38:48



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

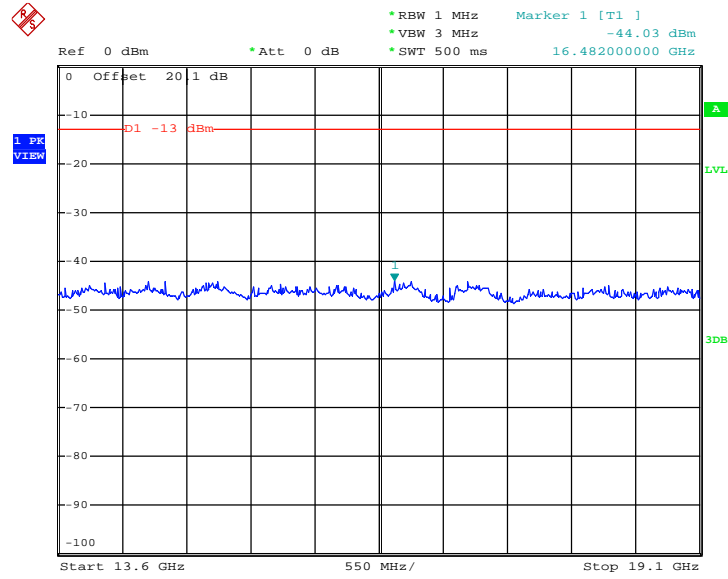


Date: 5.NOV.2014 21:40:41




<b>Band :</b>	WCDMA Band II	<b>Channel :</b>	CH9538
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Frequency :</b>	1907.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

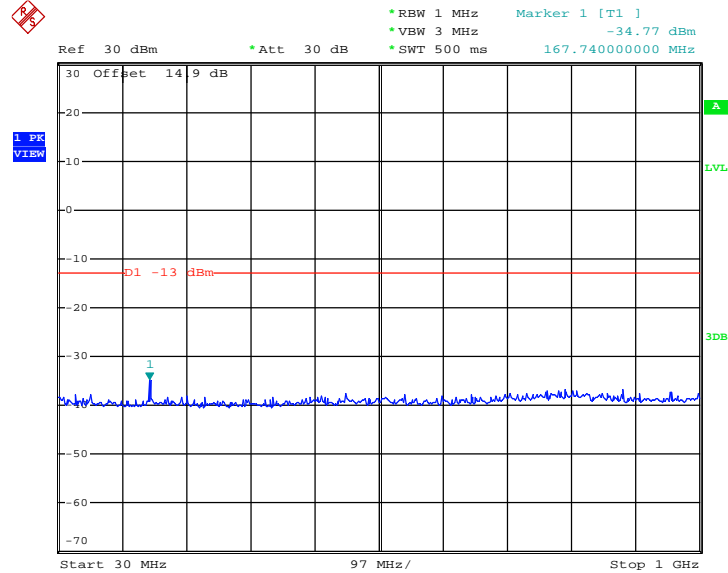

Date: 5.NOV.2014 21:22:26


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

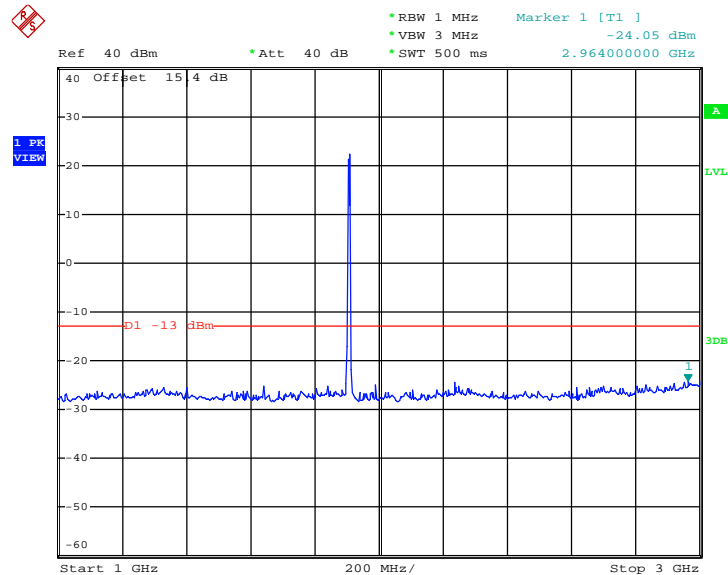

Date: 5.NOV.2014 21:26:16




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

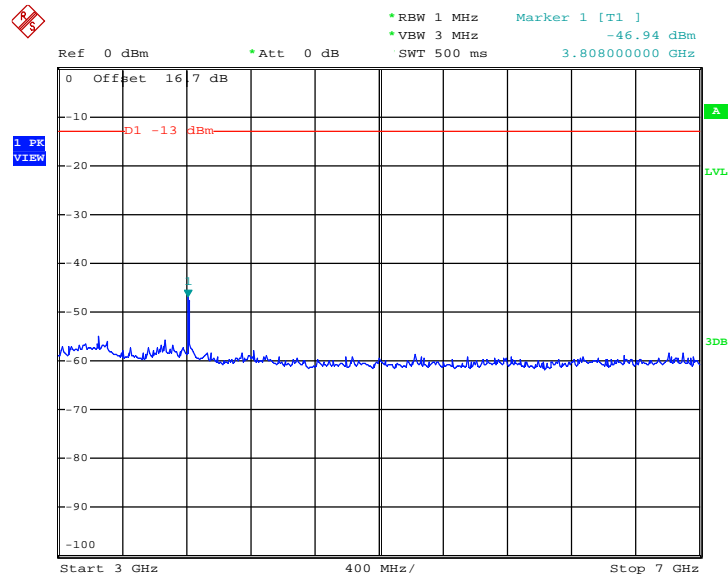

Date: 5.NOV.2014 21:30:18


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

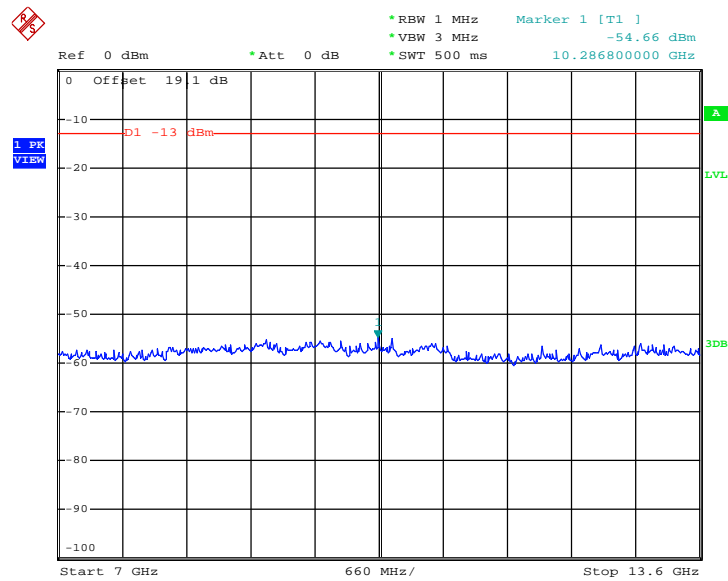

Date: 5.NOV.2014 21:39:13



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

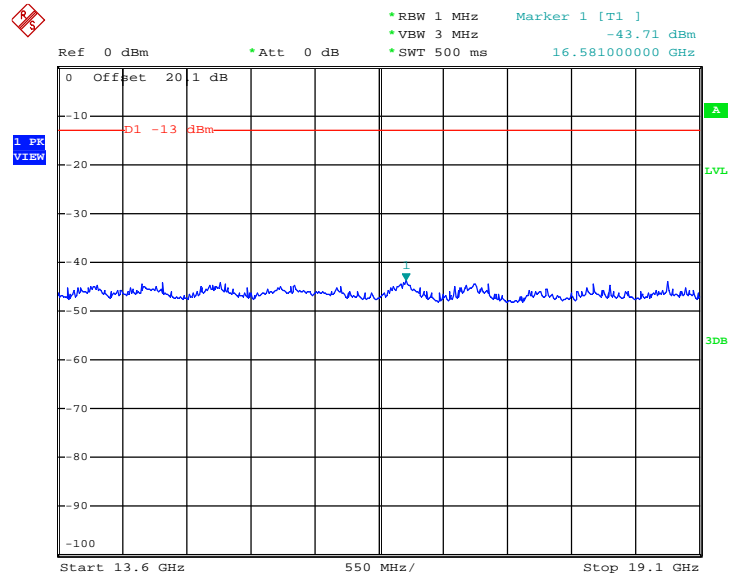

Date: 5.NOV.2014 21:40:22



### 3.7 Field Strength of Spurious Radiation Measurement

#### 3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

#### 3.7.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.7.3 Test Procedures


1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12.  $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)] \text{ (dB)}$   
=  $[30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
= -13dBm.

### 3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

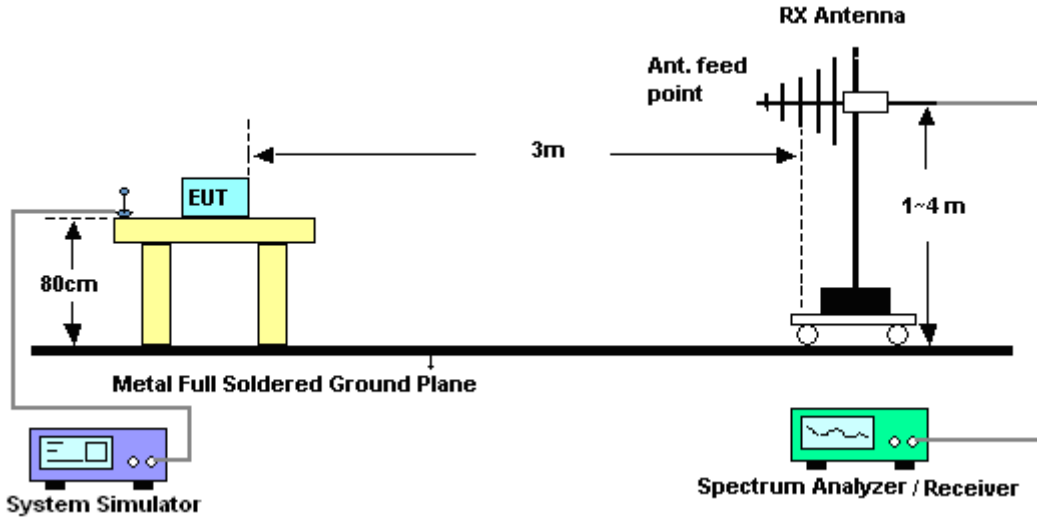

For radiated emissions above 1GHz

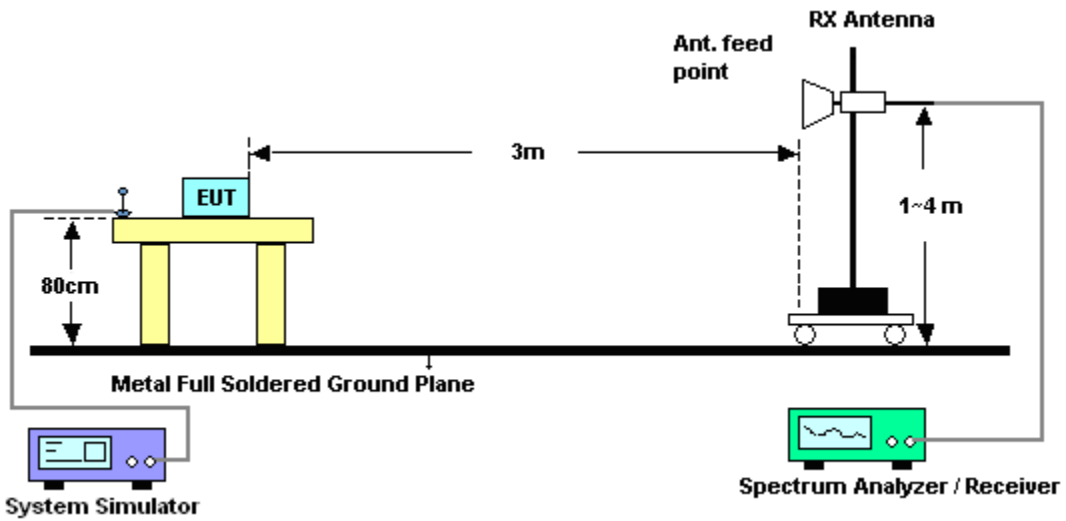



3.7.5 Test Result of Field Strength of Spurious Radiated

<b>Band :</b>	GSM850 for CH128		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	GSM Link (GMSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Horizontal					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1648.4	-54.08	-13	-41.08	-59.04	-57.54	0.89	6.50	H	Pass
2472.6	-34.04	-13	-21.04	-53.55	-36.50	1.09	5.70	H	Pass
3296.8	-43.54	-13	-30.54	-60.76	-48.22	1.17	8.00	H	Pass

<b>Band :</b>	GSM850 for CH128		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	GSM Link (GMSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Vertical					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1648.4	-51.15	-13	-38.15	-60.33	-54.61	0.89	6.50	V	Pass
2472.6	-54.63	-13	-41.63	-62.13	-57.09	1.09	5.70	V	Pass
3296.8	-53.33	-13	-40.33	-65.53	-58.01	1.17	8.00	V	Pass





<b>Band :</b>	GSM850 for CH189		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	GSM Link (GMSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Horizontal					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1672	-48.20	-13	-35.20	-54.59	-51.66	0.89	6.50	H	Pass
2510	-30.48	-13	-17.48	-50.09	-32.94	1.09	5.70	H	Pass
3346	-42.08	-13	-29.08	-59.43	-46.76	1.17	8.00	H	Pass

<b>Band :</b>	GSM850 for CH189		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	GSM Link (GMSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Vertical					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1672	-45.88	-13	-32.88	-57.09	-49.34	0.89	6.50	V	Pass
2510	-44.89	-13	-31.89	-54.96	-47.35	1.09	5.70	V	Pass
3346	-50.30	-13	-37.30	-62.57	-54.98	1.17	8.00	V	Pass



<b>Band :</b>	GSM850 for CH251					<b>Temperature :</b>	23~25°C		
<b>Test Mode :</b>	GSM Link (GMSK)					<b>Relative Humidity :</b>	48~52%		
<b>Test Engineer :</b>	Leo Liao					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1697.6	-53.53	-13	-40.53	-58.54	-56.99	0.89	6.50	H	Pass
2546.4	-32.25	-13	-19.25	-51.60	-34.71	1.09	5.70	H	Pass
3395.2	-42.41	-13	-29.41	-59.74	-47.09	1.17	8.00	H	Pass

<b>Band :</b>	GSM850 for CH251					<b>Temperature :</b>	23~25°C		
<b>Test Mode :</b>	GSM Link (GMSK)					<b>Relative Humidity :</b>	48~52%		
<b>Test Engineer :</b>	Leo Liao					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1697.6	-46.50	-13	-33.50	-57.51	-49.96	0.89	6.50	V	Pass
2546.4	-45.44	-13	-32.44	-55.36	-47.90	1.09	5.70	V	Pass
3395.2	-48.06	-13	-35.06	-61.23	-52.74	1.17	8.00	V	Pass



<b>Band :</b>	GSM850 for CH128		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Horizontal					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1648.4	-54.69	-13	-41.69	-59.65	-58.15	0.89	6.50	H	Pass
2472.6	-47.44	-13	-34.44	-64.22	-49.90	1.09	5.70	H	Pass
3296.8	-42.77	-13	-29.77	-59.98	-47.45	1.17	8.00	H	Pass

<b>Band :</b>	GSM850 for CH128		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Vertical					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1648.4	-53.16	-13	-40.16	-64.31	-56.62	0.89	6.50	V	Pass
2472.6	-59.62	-13	-46.62	-67.12	-62.08	1.09	5.70	V	Pass
3296.8	-52.78	-13	-39.78	-64.98	-57.46	1.17	8.00	V	Pass



<b>Band :</b>	GSM850 for CH189		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Horizontal					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1672	-56.70	-13	-43.70	-61.71	-60.16	0.89	6.50	H	Pass
2510	-45.46	-13	-32.46	-62.73	-47.92	1.09	5.70	H	Pass
3346	-42.44	-13	-29.44	-59.74	-47.12	1.17	8.00	H	Pass

<b>Band :</b>	GSM850 for CH189		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Vertical					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1672	-51.88	-13	-38.88	-63.09	-55.34	0.89	6.50	V	Pass
2510	-58.68	-13	-45.68	-66.22	-61.14	1.09	5.70	V	Pass
3346	-51.88	-13	-38.88	-64.15	-56.56	1.17	8.00	V	Pass



<b>Band :</b>	GSM850 for CH251		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Horizontal					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1697.6	-58.32	-13	-45.32	-63.30	-61.78	0.89	6.50	H	Pass
2546.4	-46.02	-13	-33.02	-63.18	-48.48	1.09	5.70	H	Pass
3395.2	-42.69	-13	-29.69	-59.98	-47.37	1.17	8.00	H	Pass

<b>Band :</b>	GSM850 for CH251		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Vertical					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1697.6	-56.78	-13	-43.78	-64.60	-60.24	0.89	6.50	V	Pass
2546.4	-58.65	-13	-45.65	-66.10	-61.11	1.09	5.70	V	Pass
3395.2	-47.82	-13	-34.82	-61.04	-52.50	1.17	8.00	V	Pass



<b>Band :</b>	GSM1900 for CH512	<b>Temperature :</b>	23~25°C						
<b>Test Mode :</b>	GSM Link (GMSK)	<b>Relative Humidity :</b>	48~52%						
<b>Test Engineer :</b>	Leo Liao	<b>Polarization :</b>	Horizontal						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3700.4	-39.34	-13	-26.34	-53.29	-50.69	1.25	12.60	H	Pass
5550.6	-39.62	-13	-26.62	-57.16	-51.29	1.43	13.10	H	Pass
7400.8	-46.31	-13	-33.31	-65.27	-55.35	2.26	11.30	H	Pass

<b>Band :</b>	GSM1900 for CH512	<b>Temperature :</b>	23~25°C						
<b>Test Mode :</b>	GSM Link (GMSK)	<b>Relative Humidity :</b>	48~52%						
<b>Test Engineer :</b>	Leo Liao	<b>Polarization :</b>	Vertical						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3700.4	-34.10	-13	-21.10	-49.62	-45.45	1.25	12.6	V	Pass
5550.6	-38.27	-13	-25.27	-55.74	-49.94	1.43	13.1	V	Pass
7400.8	-42.66	-13	-29.66	-63.79	-51.70	2.26	11.3	V	Pass



<b>Band :</b>	GSM1900 for CH661		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	GSM Link (GMSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Horizontal					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3760	-41.14	-13	-28.14	-55.22	-52.49	1.25	12.60	H	Pass
5640	-44.85	-13	-31.85	-60.71	-56.52	1.43	13.10	H	Pass
7520	-46.53	-13	-33.53	-65.45	-55.57	2.26	11.30	H	Pass

<b>Band :</b>	GSM1900 for CH661		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	GSM Link (GMSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Vertical					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3760	-31.43	-13	-18.43	-47.31	-42.78	1.25	12.6	V	Pass
5640	-47.31	-13	-34.31	-61.72	-58.98	1.43	13.1	V	Pass
7520	-44.40	-13	-31.40	-65.45	-53.44	2.26	11.3	V	Pass



<b>Band :</b>	GSM1900 for CH810		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	GSM Link (GMSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Horizontal					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3819.6	-42.10	-13	-29.10	-56.23	-53.45	1.25	12.60	H	Pass
5729.4	-45.97	-13	-32.97	-61.48	-57.64	1.43	13.10	H	Pass
7639.2	-48.32	-13	-35.32	-67.35	-57.36	2.26	11.30	H	Pass

<b>Band :</b>	GSM1900 for CH810		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	GSM Link (GMSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Vertical					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3819.6	-30.23	-13	-17.23	-46.18	-41.58	1.25	12.6	V	Pass
5729.4	-43.41	-13	-30.41	-58.9	-55.08	1.43	13.1	V	Pass
7639.2	-45.28	-13	-32.28	-66.4	-54.32	2.26	11.3	V	Pass





<b>Band :</b>	GSM1900 for CH512		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Horizontal					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3700.4	-44.62	-13	-31.62	-58.36	-55.97	1.25	12.60	H	Pass
5550.6	-45.40	-13	-32.40	-61.17	-57.07	1.43	13.10	H	Pass
7400.8	-48.65	-13	-35.65	-67.61	-57.69	2.26	11.30	H	Pass

<b>Band :</b>	GSM1900 for CH512		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Vertical					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3700.4	-34.55	-13	-21.55	-49.98	-45.90	1.25	12.6	V	Pass
5550.6	-43.74	-13	-30.74	-59.23	-55.41	1.43	13.1	V	Pass
7400.8	-45.93	-13	-32.93	-67.06	-54.97	2.26	11.3	V	Pass



<b>Band :</b>	GSM1900 for CH661		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Horizontal					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3760	-44.39	-13	-31.39	-58.12	-55.74	1.25	12.60	H	Pass
5640	-48.63	-13	-35.63	-64.17	-60.30	1.43	13.10	H	Pass
7520	-46.68	-13	-33.68	-65.60	-55.72	2.26	11.30	H	Pass

<b>Band :</b>	GSM1900 for CH661		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Vertical					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3760	-40.35	-13	-27.35	-54.08	-51.70	1.25	12.6	V	Pass
5640	-43.47	-13	-30.47	-58.99	-55.14	1.43	13.1	V	Pass
7520	-46.98	-13	-33.98	-68.03	-56.02	2.26	11.3	V	Pass



<b>Band :</b>	GSM1900 for CH810		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Horizontal					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3819.6	-44.35	-13	-31.35	-58.09	-55.70	1.25	12.60	H	Pass
5729.4	-45.43	-13	-32.43	-61.10	-57.10	1.43	13.10	H	Pass
7639.2	-48.20	-13	-35.20	-67.23	-57.24	2.26	11.30	H	Pass

<b>Band :</b>	GSM1900 for CH810		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Leo Liao		<b>Polarization :</b>	Vertical					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3819.6	-39.48	-13	-26.48	-53.56	-50.83	1.25	12.6	V	Pass
5729.4	-49.37	-13	-36.37	-63.74	-61.04	1.43	13.1	V	Pass
7639.2	-46.74	-13	-33.74	-67.86	-55.78	2.26	11.3	V	Pass



<b>Band :</b>	WCDMA Band V for CH4132	<b>Temperature :</b>	23~25°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~52%						
<b>Test Engineer :</b>	Leo Liao	<b>Polarization :</b>	Horizontal						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1652.8	-59.64	-13	-46.64	-64.60	-63.10	0.89	6.50	H	Pass
2479.2	-45.75	-13	-32.75	-62.91	-48.21	1.09	5.70	H	Pass
3305.6	-48.54	-13	-35.54	-64.66	-53.22	1.17	8.00	H	Pass

<b>Band :</b>	WCDMA Band V for CH4132	<b>Temperature :</b>	23~25°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~52%						
<b>Test Engineer :</b>	Leo Liao	<b>Polarization :</b>	Vertical						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1652.8	-52.77	-13	-39.77	-63.92	-56.23	0.89	6.50	V	Pass
2479.2	-58.55	-13	-45.55	-66.05	-61.01	1.09	5.70	V	Pass
3305.6	-53.92	-13	-40.92	-66.12	-58.60	1.17	8.00	V	Pass



<b>Band :</b>	WCDMA Band V for CH4182	<b>Temperature :</b>	23~25°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~52%						
<b>Test Engineer :</b>	Leo Liao	<b>Polarization :</b>	Horizontal						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-59.87	-13	-46.87	-64.88	-63.33	0.89	6.50	H	Pass
2510	-45.59	-13	-32.59	-62.83	-48.05	1.09	5.70	H	Pass
3346	-49.90	-13	-36.90	-66.07	-54.58	1.17	8.00	H	Pass

<b>Band :</b>	WCDMA Band V for CH4182	<b>Temperature :</b>	23~25°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~52%						
<b>Test Engineer :</b>	Leo Liao	<b>Polarization :</b>	Vertical						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-51.03	-13	-38.03	-62.24	-54.49	0.89	6.50	V	Pass
2510	-56.40	-13	-43.40	-63.94	-58.86	1.09	5.70	V	Pass
3346	-52.86	-13	-39.86	-65.13	-57.54	1.17	8.00	V	Pass



<b>Band :</b>	WCDMA Band V for CH4233	<b>Temperature :</b>	23~25°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~52%						
<b>Test Engineer :</b>	Leo Liao	<b>Polarization :</b>	Horizontal						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1693.2	-59.21	-13	-46.21	-64.19	-62.67	0.89	6.50	H	Pass
2539.8	-44.07	-13	-31.07	-61.29	-46.53	1.09	5.70	H	Pass
3386.4	-49.42	-13	-36.42	-65.61	-54.10	1.17	8.00	H	Pass

<b>Band :</b>	WCDMA Band V for CH4233	<b>Temperature :</b>	23~25°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~52%						
<b>Test Engineer :</b>	Leo Liao	<b>Polarization :</b>	Vertical						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1693.2	-54.14	-13	-41.14	-61.96	-57.60	0.89	6.50	V	Pass
2539.8	-54.07	-13	-41.07	-61.52	-56.53	1.09	5.70	V	Pass
3386.4	-53.05	-13	-40.05	-65.30	-57.73	1.17	8.00	V	Pass



<b>Band :</b>	WCDMA Band II for CH9262	<b>Temperature :</b>	23~25°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~52%						
<b>Test Engineer :</b>	Leo Liao	<b>Polarization :</b>	Horizontal						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3704.8	-50.93	-13	-37.93	-64.21	-62.28	1.25	12.60	H	Pass
5557.2	-44.66	-13	-31.66	-60.56	-56.33	1.43	13.10	H	Pass
7409.6	-45.47	-13	-32.47	-64.55	-54.51	2.26	11.30	H	Pass

<b>Band :</b>	WCDMA Band II for CH9262	<b>Temperature :</b>	23~25°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~52%						
<b>Test Engineer :</b>	Leo Liao	<b>Polarization :</b>	Vertical						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3704.8	-50.64	-13	-37.64	-62.87	-61.99	1.25	12.6	V	Pass
5557.2	-41.14	-13	-28.14	-57.53	-52.81	1.43	13.1	V	Pass
7409.6	-43.02	-13	-30.02	-64.2	-52.06	2.26	11.3	V	Pass



<b>Band :</b>	WCDMA Band II for CH9400	<b>Temperature :</b>	23~25°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~52%						
<b>Test Engineer :</b>	Leo Liao	<b>Polarization :</b>	Horizontal						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-51.00	-13	-38.00	-64.18	-62.35	1.25	12.60	H	Pass
5640	-44.13	-13	-31.13	-60.10	-55.80	1.43	13.10	H	Pass
7520	-44.25	-13	-31.25	-63.21	-53.29	2.26	11.30	H	Pass

<b>Band :</b>	WCDMA Band II for CH9400	<b>Temperature :</b>	23~25°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~52%						
<b>Test Engineer :</b>	Leo Liao	<b>Polarization :</b>	Vertical						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-50.70	-13	-37.70	-62.92	-62.05	1.25	12.6	V	Pass
5640	-43.92	-13	-30.92	-59.35	-55.59	1.43	13.1	V	Pass
7520	-42.43	-13	-29.43	-63.55	-51.47	2.26	11.3	V	Pass





<b>Band :</b>	WCDMA Band II for CH9538	<b>Temperature :</b>	23~25°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~52%						
<b>Test Engineer :</b>	Leo Liao	<b>Polarization :</b>	Horizontal						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3815.2	-50.54	-13	-37.54	-63.59	-61.89	1.25	12.60	H	Pass
5722.8	-45.94	-13	-32.94	-61.46	-57.61	1.43	13.10	H	Pass
7630.4	-45.35	-13	-32.35	-64.38	-54.39	2.26	11.30	H	Pass

<b>Band :</b>	WCDMA Band II for CH9538	<b>Temperature :</b>	23~25°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~52%						
<b>Test Engineer :</b>	Leo Liao	<b>Polarization :</b>	Vertical						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3815.2	-50.72	-13	-37.72	-62.96	-62.07	1.25	12.6	V	Pass
5722.8	-45.39	-13	-32.39	-60.21	-57.06	1.43	13.1	V	Pass
7630.4	-42.58	-13	-29.58	-63.7	-51.62	2.26	11.3	V	Pass

## 3.8 Frequency Stability Measurement

### 3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.8.3 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.8.4 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

### 3.8.5 Test Setup

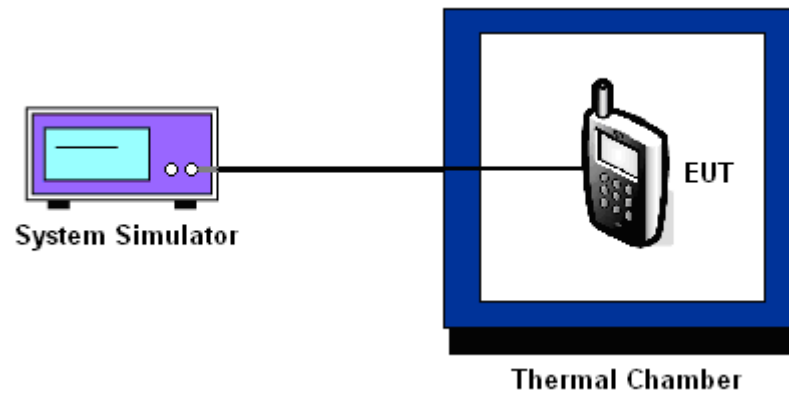



3.8.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	GSM		EDGE class 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
50	-13	0.0407	-16	0.0371	PASS
40	12	0.0108	34	0.0227	
30	35	0.0167	27	0.0143	
20(Ref.)	21	0.0000	15	0.0000	
10	-16	0.0442	48	0.0395	
0	-9	0.0359	36	0.0251	
-10	34	0.0155	17	0.0024	
-20	28	0.0084	-33	0.0574	
-30	-17	0.0454	-18	0.0395	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	within authorized band	Frequency :	1880.0 MHz

Temperature (°C)	GSM		EDGE class 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
50	-18	0.0048	-28	0.0340	PASS
40	29	0.0298	-19	0.0293	
30	34	0.0324	-33	0.0367	
20(Ref.)	-27	0.0000	36	0.0000	
10	-7	0.0106	45	0.0048	
0	16	0.0229	-48	0.0447	
-10	22	0.0261	41	0.0027	
-20	27	0.0287	37	0.0005	
-30	-45	0.0096	-26	0.0330	

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



<b>Band :</b>	WCDMA Band V	<b>Channel :</b>	4182
<b>Limit (ppm) :</b>	2.5	<b>Frequency :</b>	836.4 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
50	36	0.0634	PASS
40	25	0.0502	
30	19	0.0430	
20(Ref.)	-17	0.0000	
10	-19	0.0024	
0	33	0.0598	
-10	-8	0.0108	
-20	24	0.0490	
-30	-37	0.0239	

<b>Band :</b>	WCDMA Band II	<b>Channel :</b>	9400
<b>Limit (ppm) :</b>	within authorized band	<b>Frequency :</b>	1880.0 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
50	33	0.0048	PASS
40	26	0.0011	
30	-12	0.0191	
20(Ref.)	24	0.0000	
10	17	0.0037	
0	-6	0.0160	
-10	41	0.0090	
-20	35	0.0059	
-30	-22	0.0245	

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

**3.8.7 Test Result of Voltage Variation**

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GSM	4.4	31	0.0120	2.5	
		3.85	-39	0.0717		
		BEP	9	0.0143		
	EDGE class 8	4.4	-16	0.0371		
		3.85	21	0.0072		
		BEP	16	0.0012		
GSM 1900 CH661	GSM	4.4	-32	0.0027	(Note 3.)	PASS
		3.85	48	0.0399		
		BEP	-32	0.0027		
	EDGE class 8	4.4	-1	0.0197		
		3.85	16	0.0106		
		BEP	22	0.0074		
WCDMA Band V CH4182	RMC 12.2Kbps	4.4	8	0.0299	2.5	
		3.85	16	0.0395		
		BEP	34	0.0610		
WCDMA Band II CH9400	RMC 12.2Kbps	4.4	-29	0.0282	(Note 3.)	
		3.85	18	0.0032		
		BEP	39	0.0080		

**Note:**

1. Normal Voltage = 3.85V.
2. Battery End Point (BEP) = 3.6 V.
3. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 28, 2014	Nov. 04, 2014~ Nov. 07, 2014	Oct. 27, 2015	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV30	101338	9kHz~30GHz	May 04, 2014	Nov. 04, 2014~ Nov. 07, 2014	May 03, 2015	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 25, 2014	Nov. 04, 2014~ Nov. 07, 2014	Oct. 24, 2015	Conducted (TH01-KS)
ESCIO TEST Receiver	R&S	ESCI	100724	9kHz~3GHz	Feb. 21, 2014	Nov. 27, 2014	Feb. 20, 2015	Radiation (03CH01-SZ)
Spectrum Analyzer	Agilent Technologies	N9038A	MY52260185	20Hz~26.5GHz	May 26, 2014	Nov. 27, 2014	May 25, 2015	Radiation (03CH01-SZ)
Bilog Antenna	TESEQ	CBL 6112D	37877	30MHz~2GHz	Oct. 15, 2014	Nov. 27, 2014	Oct. 14, 2015	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 15, 2014	Nov. 27, 2014	Oct. 14, 2015	Radiation (03CH01-SZ)
Double Ridged Horn Antenna	COM-POWER	AH-840	101073	18GHz~40GHz	Jun. 09, 2014	Nov. 27, 2014	Jun. 08, 2015	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3000MHz	Feb. 21, 2014	Nov. 27, 2014	Feb. 20, 2015	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	May 08, 2014	Nov. 27, 2014	May 07, 2015	Radiation (03CH01-SZ)
AC Source(AVR)	Chroma	61601	616010001985	100Vac~250Vac	Mar. 25, 2014	Nov. 27, 2014	Mar. 24, 2015	Radiation (03CH01-SZ)
Turn Table	EM Electronics	EM 1000	N/A	0~360 degree	NCR	Nov. 27, 2014	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM Electronics	EM 1000	N/A	1 m~4 m	NCR	Nov. 27, 2014	NCR	Radiation (03CH01-SZ)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.9dB
---	-------