



FCC RF Test Report

APPLICANT : Acer Incorporated
EQUIPMENT : Smart HandHeld
BRAND NAME : Acer
MODEL NAME : Z200, Z205
MARKETING NAME : Liquid Z200, Liquid Z205
FCC ID : HLZDMZ200
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jun. 11, 2014 and testing was completed on Jul. 02, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant..... 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test 6

 1.5 Modification of EUT 7

 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator 7

 1.7 Testing Site 8

 1.8 Applied Standards 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1 Test Mode..... 9

 2.2 Connection Diagram of Test System 12

 2.3 Support Unit used in test configuration and system..... 12

 2.4 Measurement Results Explanation Example 12

3 TEST RESULT 13

 3.1 Conducted Output Power Measurement..... 13

 3.2 Peak-to-Average Ratio 15

 3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement 23

 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement..... 29

 3.5 Band Edge Measurement..... 49

 3.6 Conducted Spurious Emission Measurement 62

 3.7 Field Strength of Spurious Radiation Measurement 108

 3.8 Frequency Stability Measurement..... 128

4 LIST OF MEASURING EQUIPMENT 133

5 UNCERTAINTY OF EVALUATION 134

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG461192	Rev. 01	Initial issue of report	Jul. 21, 2014



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	RSS-132 (5.4) RSS-133 (6.4)	Conducted Output Power	N/A	PASS	-
3.2	§24.232(d)	RSS-132 (5.4) RSS-133(6.4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.3	§22.913(a)(2)	RSS-132(5.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
3.3	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.4	§2.1049 §22.917(b) §24.238(b)	RSS-GEN(4.6.1) RSS-133(2.3)	Occupied Bandwidth	N/A	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Band Edge Measurement	< 43+10log ₁₀ (P[Watts])	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Conducted Spurious Emission	< 43+10log ₁₀ (P[Watts])	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 25.57 dB at 5643.000 MHz
3.8	§2.1055 §22.355 §24.235	RSS-132(5.3) RSS-133(6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

1 General Description

1.1 Applicant

Acer Incorporated

8F, No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist, New Taipei City 22181, Taiwan (R.O.C)

1.2 Manufacturer

Shanghai Wingtech Electronic Technology Co, Ltd.

6th Floor, G Block, No. 668, East Beijing Road, HuangPu District, Shanghai, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart HandHeld
Brand Name	Acer
Model Name	Z200, Z205
Marketing Name	Liquid Z200, Liquid Z205
FCC ID	HLZDMZ200
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(Downlink Only) WLAN 2.4GHz 802.11b/g/n HT20/HT40 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The difference between model name Z200 and Z205 is only for the designation of appearance which does not affect any test items, so we only choose the sample 1 Z200 for all tests.



1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz
Maximum Output Power to Antenna	GSM850 : 32.85 dBm GSM1900 : 29.82 dBm WCDMA Band V : 23.48 dBm WCDMA Band II : 22.41 dBm
99% Occupied Bandwidth	GSM850: 0.25MHz GSM1900: 0.25MHz WCDMA Band V: 4.18MHz WCDMA Band II: 4.20MHz
Antenna Type	PIFA Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) HSPA+: 16QAM (Downlink Only)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GSM	GMSK	1.3062	0.05 ppm	248KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.2999	0.04 ppm	254KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.1384	0.04 ppm	4M18F9W
Part 24	GSM1900 GSM	GMSK	1.6368	0.02 ppm	246KGXW
Part 24	GSM1900 EDGE class 8	8PSK	0.7482	0.02 ppm	248KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.3741	0.02 ppm	4M20F9W



1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH01-KS	03CH01-KS	149928/4086E-1

Note: The test site complies with ANSI C63.4 2003 requirement

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-C-2004
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01
- IC RSS-132 Issue 3
- IC RSS-133 Issue 6
- IC RSS-Gen Issue 3
- NOTICE 2012-DRS0126

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, " Receivers Excluded from Industry Canada Requirements", only radio communication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Frequency range investigated for radiated emission: 30MHz to 10th harmonic.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	<ul style="list-style-type: none"> ■ GSM Link ■ EDGE class 8 Link 	<ul style="list-style-type: none"> ■ GSM Link ■ EDGE class 8 Link
GSM 1900	<ul style="list-style-type: none"> ■ GSM Link ■ EDGE class 8 Link 	<ul style="list-style-type: none"> ■ GSM Link ■ EDGE class 8 Link
WCDMA Band V	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link
WCDMA Band II	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link

Note: The maximum power levels are chosen to test as the worst case configuration as follows:

GSM mode for GMSK modulation,

EDGE multi-slot class 8 mode for 8PSK modulation,

RMC 12.2Kbps mode for WCDMA band V,

RMC 12.2Kbps mode for WCDMA band II, only these modes were used for all tests.



Conducted Power Measurement Results:

SIM 1 Card:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	32.85	32.78	32.82	29.66	29.70	29.82
GPRS class 8	32.80	32.78	32.74	29.65	29.67	29.80
GPRS class 10	31.59	31.58	31.56	28.84	28.83	28.94
GPRS class 11	29.71	29.71	29.68	26.72	26.74	26.85
GPRS class 12	28.85	28.83	28.78	25.74	25.76	25.96
EGPRS class 8	28.01	27.95	28.12	27.42	26.92	26.83
EGPRS class 10	27.91	27.85	28.03	27.34	26.82	26.72
EGPRS class 11	26.88	26.78	27.02	26.41	25.79	25.64
EGPRS class 12	25.74	25.68	26.00	25.26	24.50	24.53

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880.0	1907.6
AMR 12.2K	23.46	22.90	23.12	22.38	21.96	21.78
RMC 12.2K	23.48	22.92	23.14	22.41	21.98	21.82
HSDPA Subtest-1	22.35	21.95	22.08	21.42	21.00	20.81
HSDPA Subtest-2	22.37	21.94	22.06	21.41	20.98	20.80
HSDPA Subtest-3	21.90	21.50	21.62	20.97	20.52	20.36
HSDPA Subtest-4	21.88	21.56	21.58	20.94	20.49	20.33
HSUPA Subtest-1	20.39	19.98	20.08	19.50	19.12	18.90
HSUPA Subtest-2	20.37	19.96	20.05	19.49	19.01	18.88
HSUPA Subtest-3	21.39	20.96	21.05	20.48	20.07	19.87
HSUPA Subtest-4	19.83	19.48	19.58	18.98	18.61	18.41
HSUPA Subtest-5	22.35	21.94	22.03	21.45	21.04	20.83




SIM 2 Card:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	32.82	32.74	32.78	29.62	29.69	29.81
GPRS class 8	32.75	32.75	32.70	29.65	29.68	29.78
GPRS class 10	31.56	31.56	31.54	28.79	28.79	28.91
GPRS class 11	29.65	29.69	29.67	26.70	26.74	26.81
GPRS class 12	28.83	28.81	28.77	25.73	25.70	25.92
EGPRS class 8	27.94	27.90	28.06	27.38	26.91	26.85
EGPRS class 10	27.88	27.79	28.03	27.32	26.83	26.65
EGPRS class 11	26.86	26.71	26.98	26.43	25.77	25.63
EGPRS class 12	25.72	25.63	25.98	25.25	24.52	24.47

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880.0	1907.6
AMR 12.2K	23.42	22.89	23.14	22.37	21.99	21.73
RMC 12.2K	23.45	22.91	23.16	22.40	22.01	21.79
HSDPA Subtest-1	22.35	21.97	22.02	21.38	20.98	20.78
HSDPA Subtest-2	22.33	21.94	22.04	21.36	20.96	20.78
HSDPA Subtest-3	21.85	21.50	21.68	20.96	20.49	20.38
HSDPA Subtest-4	21.95	21.56	21.57	20.94	20.46	20.26
HSUPA Subtest-1	20.27	19.96	20.07	19.52	19.05	18.95
HSUPA Subtest-2	20.46	20.01	20.00	19.46	19.01	18.89
HSUPA Subtest-3	21.50	20.96	21.03	20.42	20.00	19.81
HSUPA Subtest-4	19.77	19.38	19.55	19.05	18.67	18.37
HSUPA Subtest-5	22.29	21.92	21.97	21.51	21.07	20.85

2.2 Connection Diagram of Test System

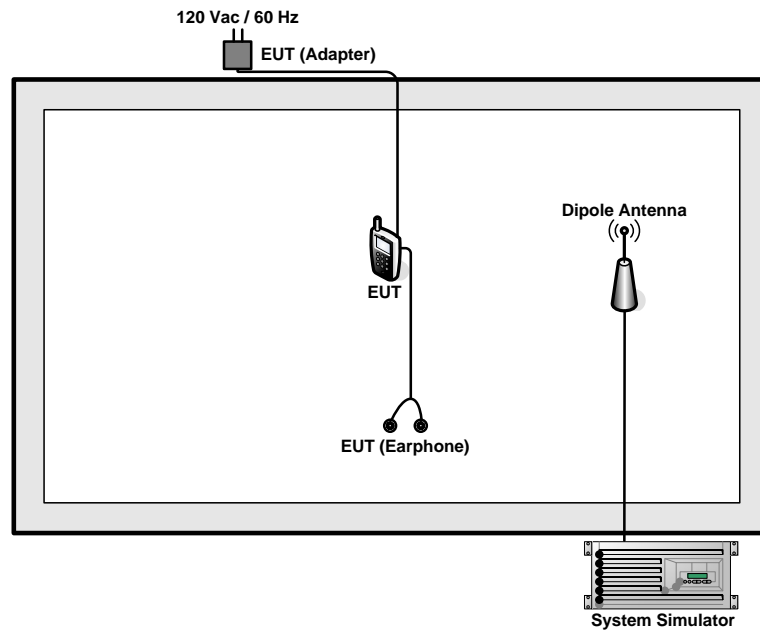

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 5.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.2 + 10 = 15.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

3.1.4 Test Setup

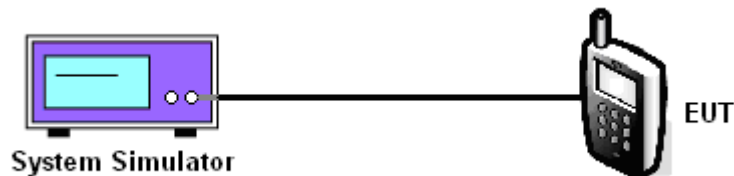

3.1.5 Test Result of Conducted Output Power

Cellular Band									
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	32.85	32.78	32.82	28.01	27.95	28.12	23.48	22.92	23.14
Conducted Power (Watts)	1.93	1.90	1.91	0.63	0.62	0.65	0.22	0.20	0.21

PCS Band									
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	29.66	29.70	29.82	27.42	26.92	26.83	22.41	21.98	21.82
Conducted Power (Watts)	0.92	0.93	0.96	0.55	0.49	0.48	0.17	0.16	0.15

Note: maximum burst average power for GSM, and maximum average power for WCDMA.

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. For GSM/EGPRS operating modes:
 - a. Set EUT in maximum power output.
 - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector on spectrum analyzer for first trace.
 - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector on spectrum analyzer for second trace.
 - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator has synchronized with the spectrum analyzer.
3. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option on the spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

3.2.4 Test Setup

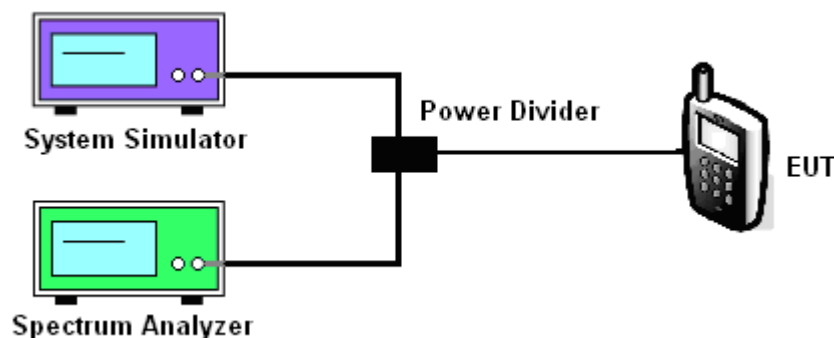



3.2.5 Test Result of Peak-to-Average Ratio


PCS Band									
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.29	0.29	0.29	2.91	2.88	3.01	2.88	2.68	3.08




3.2.6 Test Result (Plots) of Peak-to-Average Ratio

Band :	GSM 1900	Test Mode :	GSM Link (GMSK)
---------------	----------	--------------------	-----------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

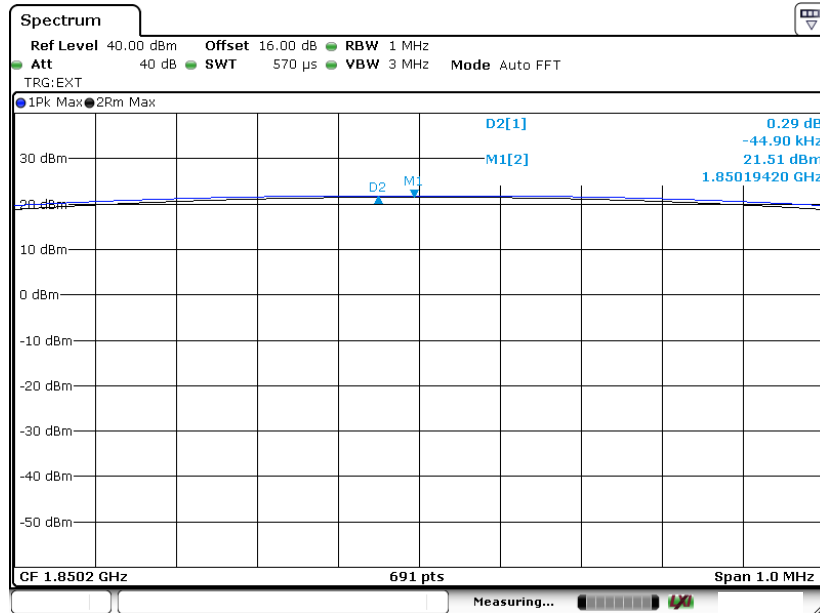


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

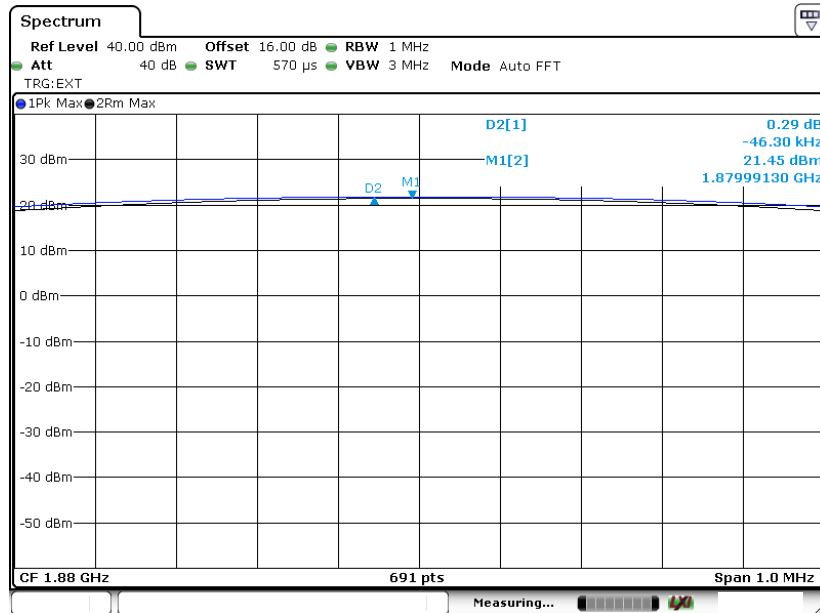




Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

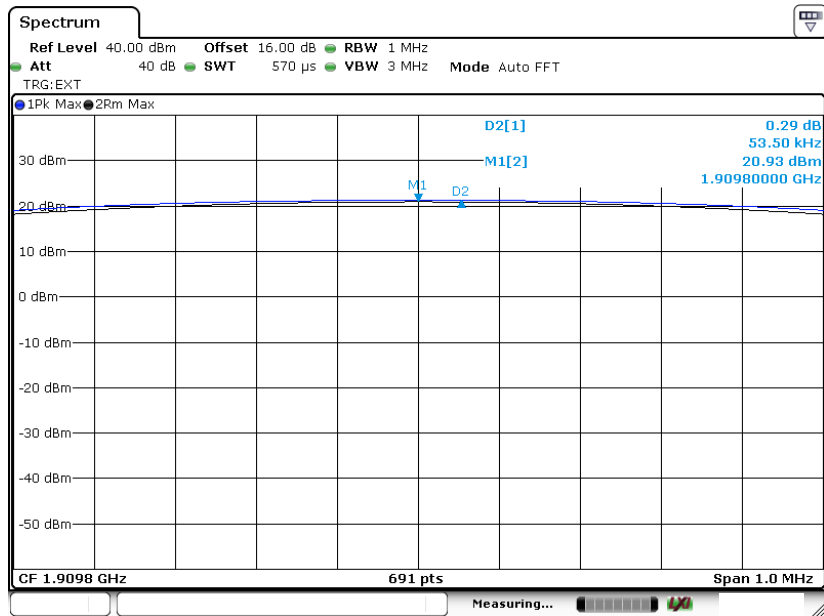




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
---------------	----------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

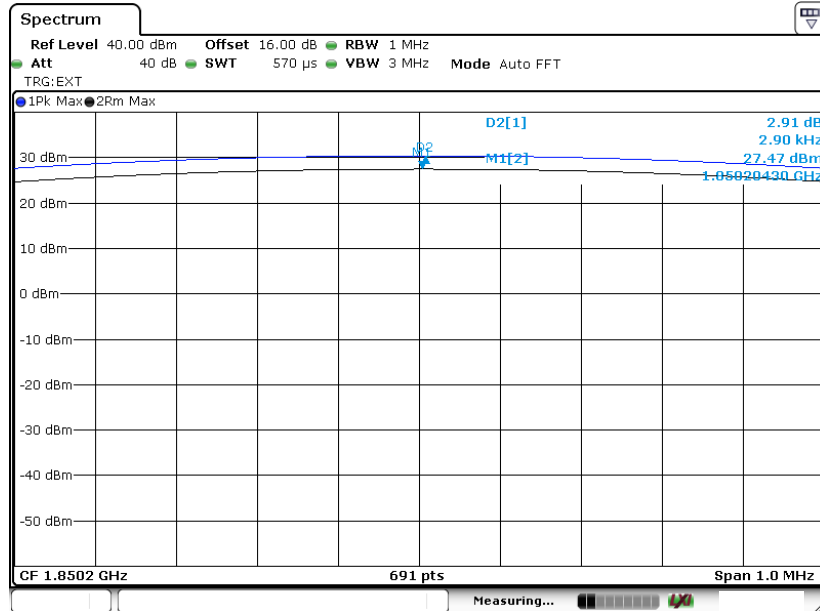


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

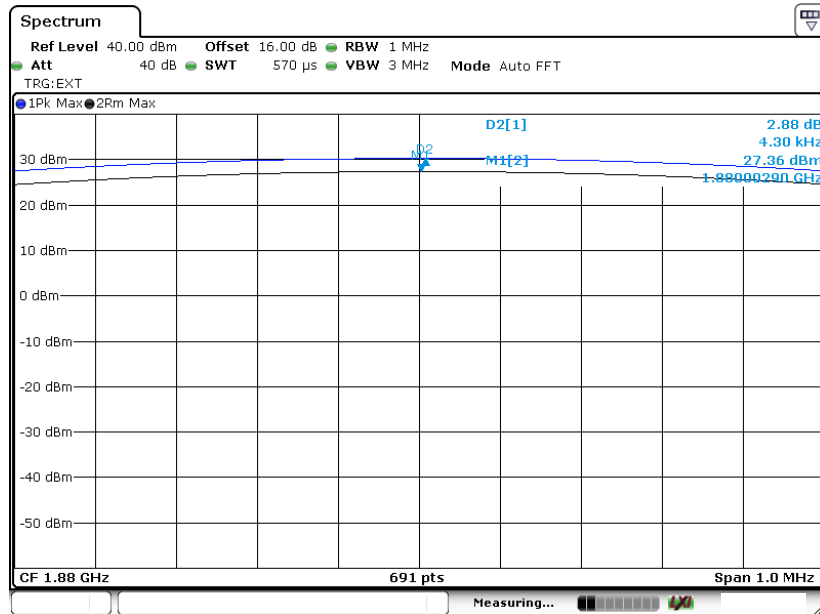




Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

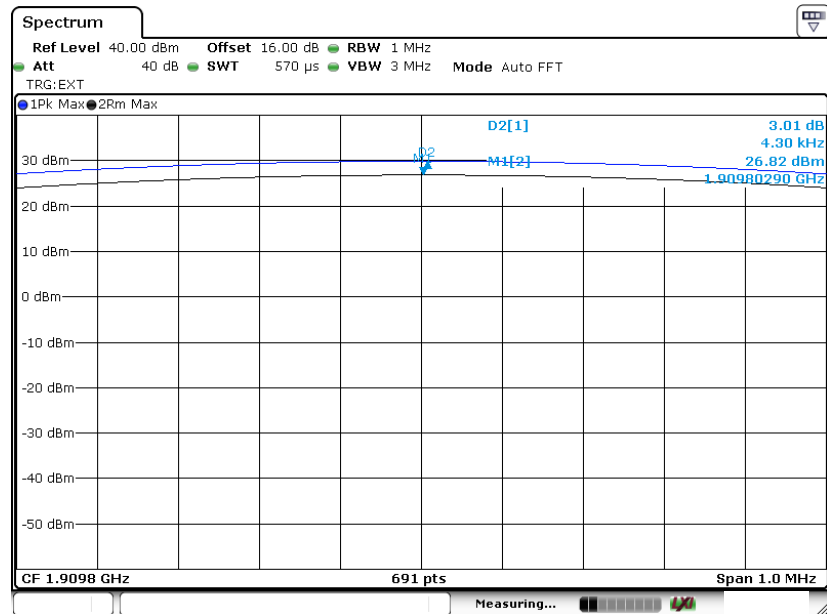



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)

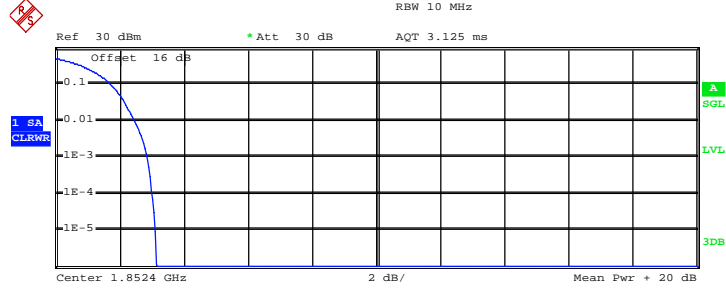

Complementary Cumulative Distribution Function (100000 samples)


Trace 1

Mean 23.84 dBm
 Peak 26.97 dBm
 Crest 3.13 dB

10 % 1.72 dB
 1 % 2.48 dB
 .1 % 2.88 dB
 .01 % 3.00 dB

Date: 18.JUN.2014 04:14:43

Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)

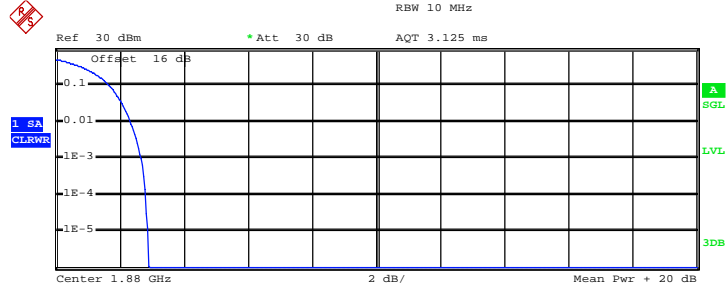

Complementary Cumulative Distribution Function (100000 samples)

Trace 1


Mean 22.79 dBm
 Peak 25.70 dBm
 Crest 2.90 dB

10 % 1.68 dB
 1 % 2.36 dB
 .1 % 2.68 dB
 .01 % 2.80 dB

Date: 18.JUN.2014 04:15:13



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

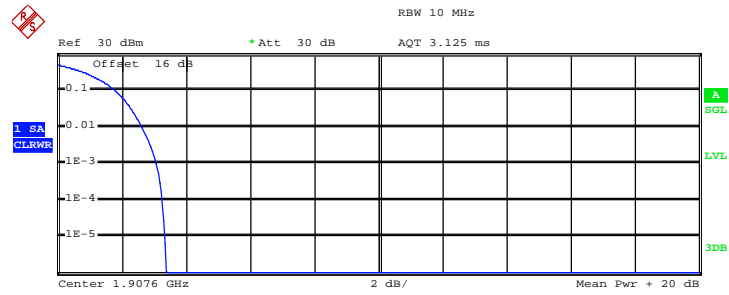

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean 22.93 dBm
 Peak 26.33 dBm
 Crest 3.40 dB

10 % 1.80 dB
 1 % 2.64 dB
 .1 % 3.08 dB
 .01 % 3.28 dB

Date: 18.JUN.2014 04:15:45



3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r01. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
2. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at the same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.

3.3.4 Test Setup

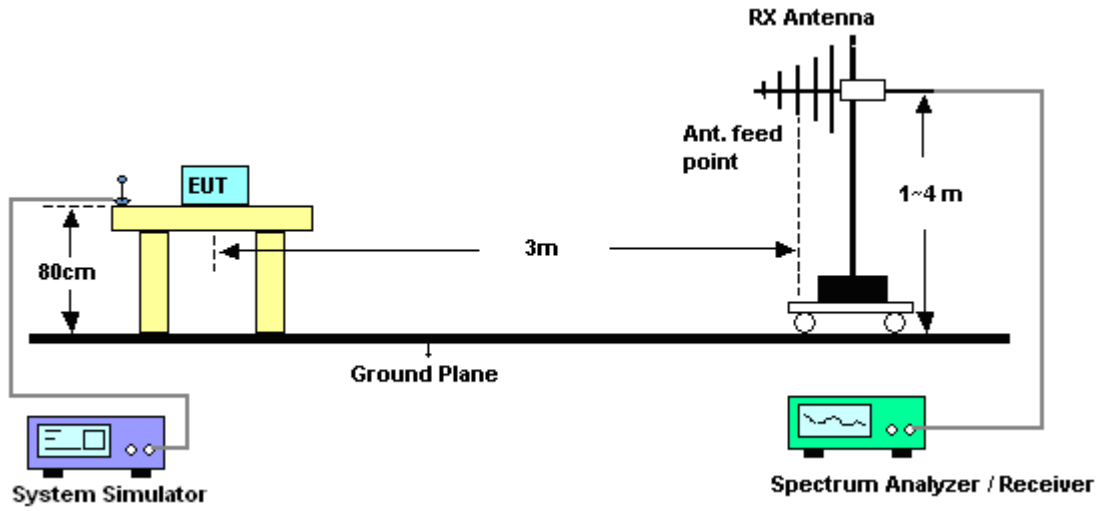

3.3.5 Test Result of ERP

GSM850 (GSM) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-10.22	29.11	16.74	0.0472
836.4	-9.69	29.2	17.36	0.0545
848.8	-10.72	29.4	16.53	0.0450
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-1.64	33.23	29.44	0.8790
836.4	-0.48	33	30.37	1.0889
848.8	0.36	32.95	31.16	1.3062

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

GSM850 (EDGE class 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-14.63	29.11	12.33	0.0171
836.4	-15.99	29.2	11.06	0.0128
848.8	-15.05	29.4	12.2	0.0166
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-8.06	33.23	23.02	0.2004
836.4	-7.00	33	23.85	0.2427
848.8	-6.03	32.95	24.77	0.2999

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15



WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.40	-21.79	29.11	5.17	0.0033
836.40	-22.38	29.2	4.67	0.0029
846.60	-21.49	29.4	5.76	0.0038
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.40	-12.05	33.23	19.03	0.0800
836.40	-11.80	33	19.05	0.0804
846.60	-9.39	32.95	21.41	0.1384

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

3.3.6 Test Result of EIRP

GSM1900 (GSM) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-10.62	42.76	32.14	1.6368
1880.0	-10.27	42.32	32.05	1.6032
1909.8	-12.72	41.95	29.23	0.8375
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-21.21	42.13	20.92	0.1236
1880.0	-19.85	42.79	22.94	0.1968
1909.8	-20.20	42.83	22.63	0.1832

* EIRP = LVL (dBm) + Correction Factor (dB)

GSM1900 (EDGE class 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-14.02	42.76	28.74	0.7482
1880.0	-13.87	42.32	28.45	0.6998
1909.8	-15.80	41.95	26.15	0.4121
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-22.44	42.13	19.69	0.0931
1880.0	-22.10	42.79	20.69	0.1172
1909.8	-23.62	42.83	19.21	0.0834

* EIRP = LVL (dBm) + Correction Factor (dB)



WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.40	-17.03	42.76	25.73	0.3741
1880.00	-17.11	42.32	25.21	0.3319
1907.60	-18.34	41.95	23.61	0.2296
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.40	-24.33	42.13	17.80	0.0603
1880.00	-24.63	42.79	18.16	0.0655
1907.60	-24.58	42.83	18.25	0.0668

* EIRP = LVL (dBm) + Correction Factor (dB)

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, sample detector, trace maximum hold.
4. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

3.4.4 Test Setup

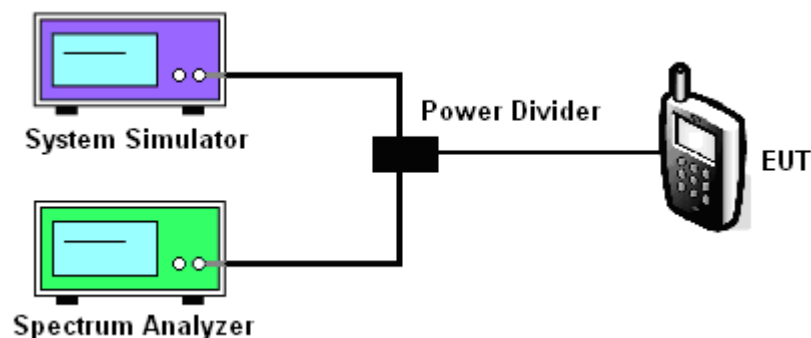

3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band						
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
99% OBW (kHz)	248.00	240.00	248.00	254.00	248.00	250.00
26dB BW (kHz)	316.00	318.00	312.00	322.00	316.00	316.00

PCS Band						
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
99% OBW (kHz)	246.00	246.00	240.00	248.00	242.00	244.00
26dB BW (kHz)	316.00	312.00	312.00	306.00	312.00	308.00

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
99% OBW (MHz)	4.18	4.18	4.18
26dB BW (MHz)	4.70	4.72	4.68


PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1852.4	1880	1907.6
99% OBW (MHz)	4.18	4.20	4.18
26dB BW (MHz)	4.70	4.72	4.70



3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


Band :	GSM 850	Test Mode :	GSM Link (GMSK)
--------	---------	-------------	-----------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

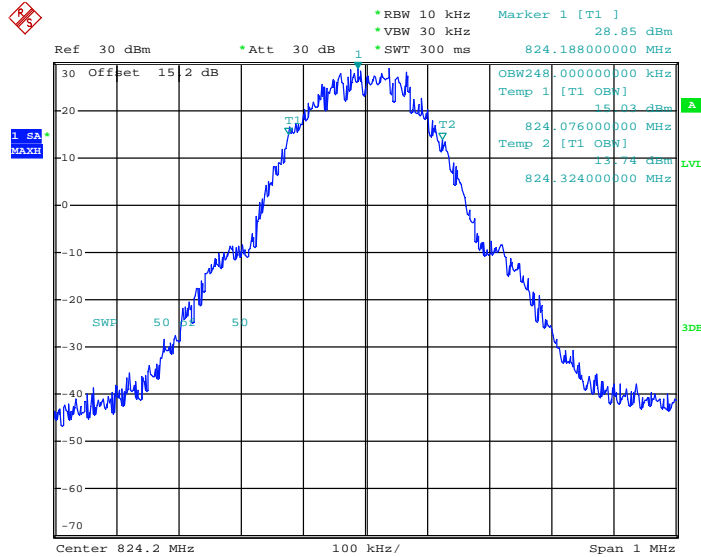

Date: 18.JUN.2014 02:33:07


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

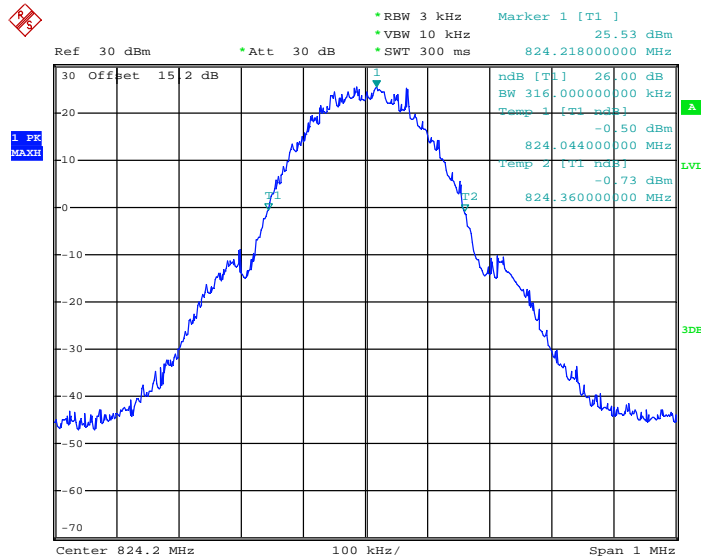

Date: 18.JUN.2014 02:30:55




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

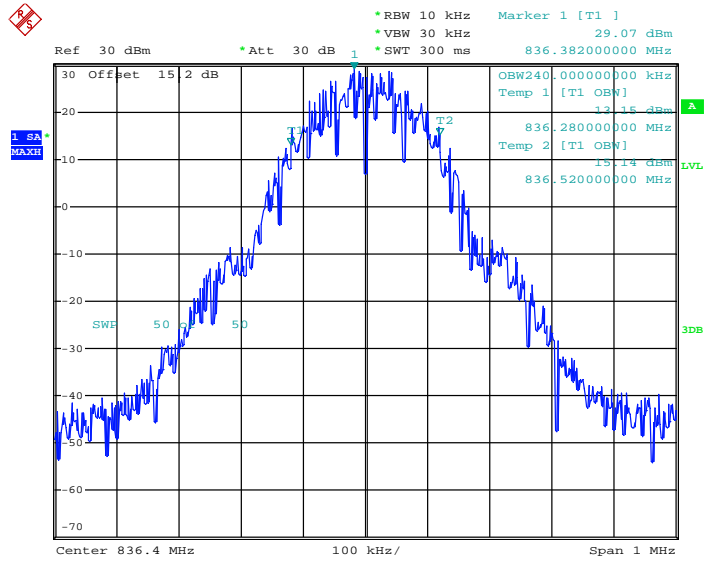

Date: 18.JUN.2014 01:10:05


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

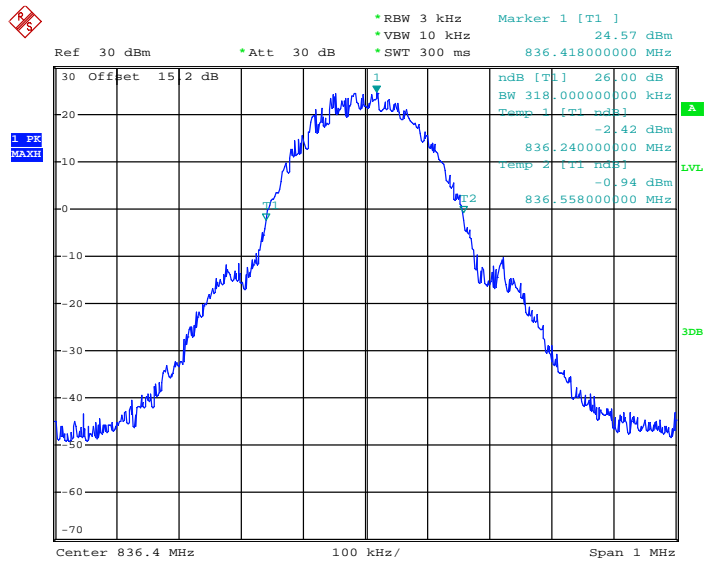

Date: 18.JUN.2014 02:31:37




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

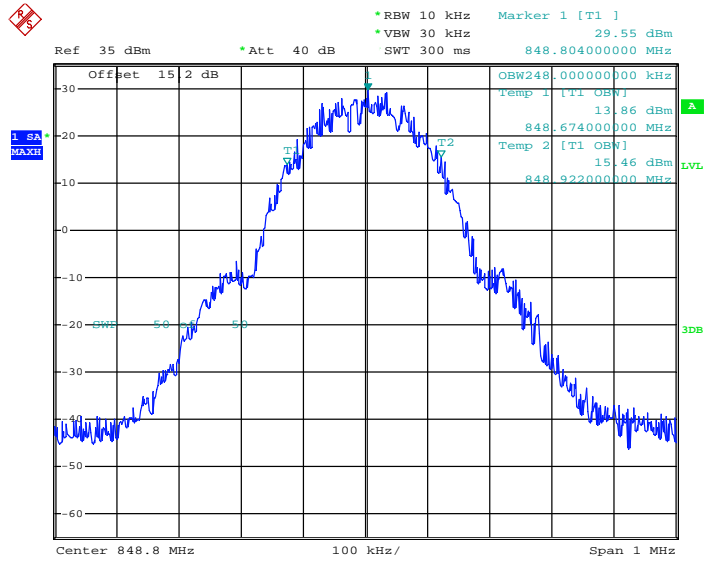

Date: 18.JUN.2014 02:34:32

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

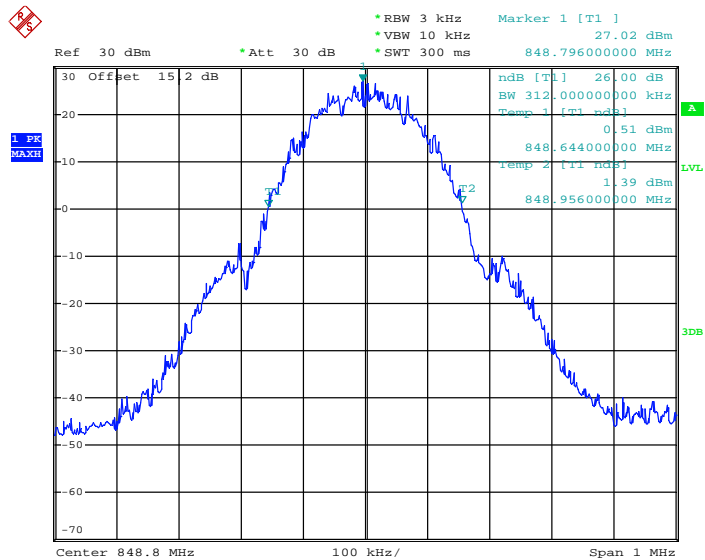


Date: 18.JUN.2014 01:08:08




Band :	GSM 850	Test Mode :	EDGE class 8 Link (8PSK)
---------------	---------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

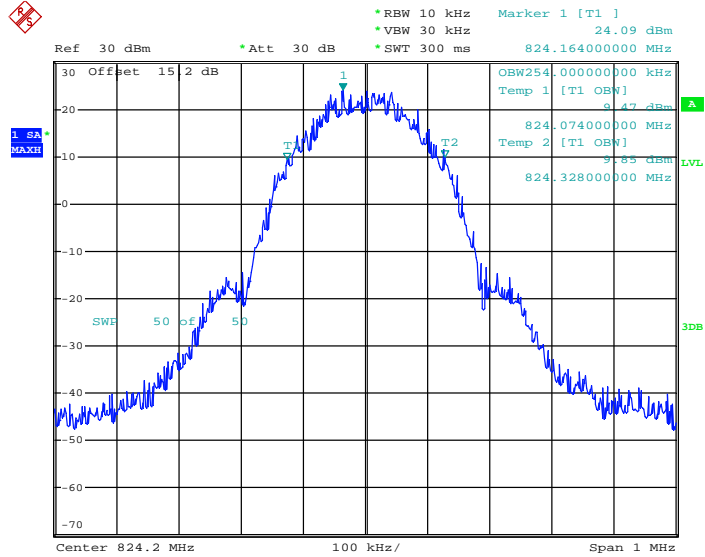

Date: 18.JUN.2014 03:20:30


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

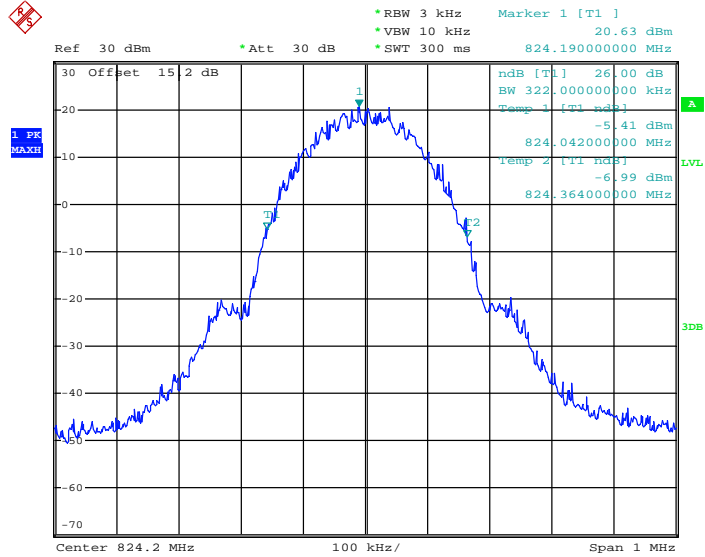

Date: 18.JUN.2014 03:17:25




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

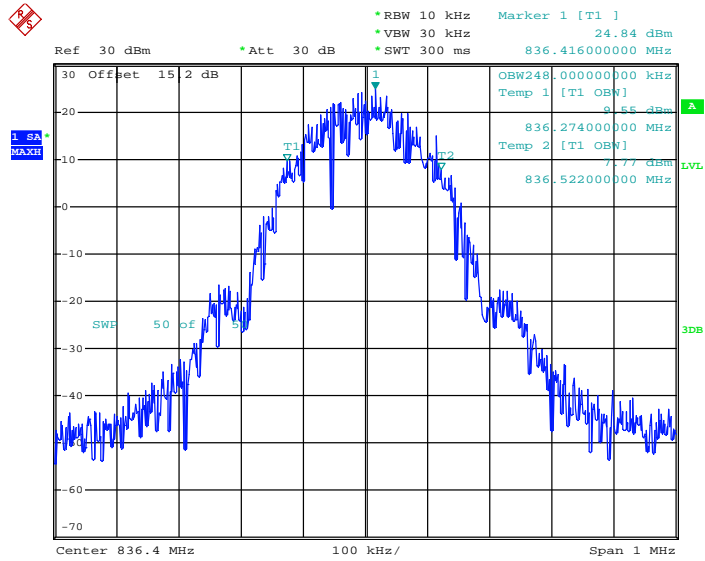

Date: 18.JUN.2014 03:08:22


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

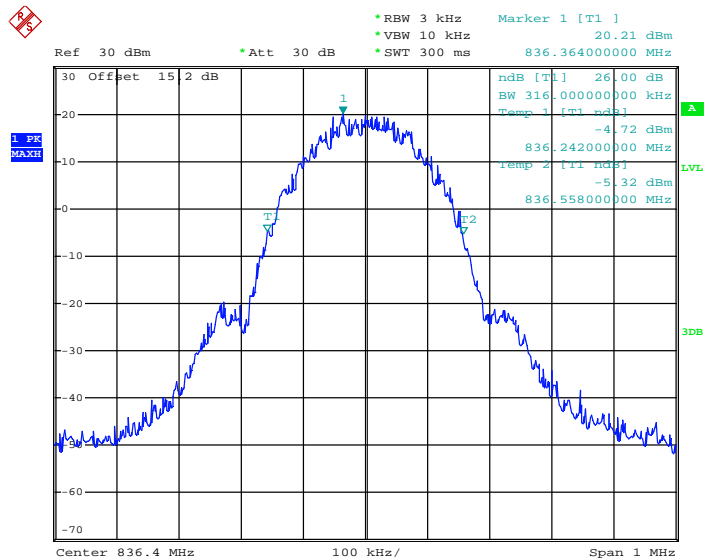

Date: 18.JUN.2014 03:05:58




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

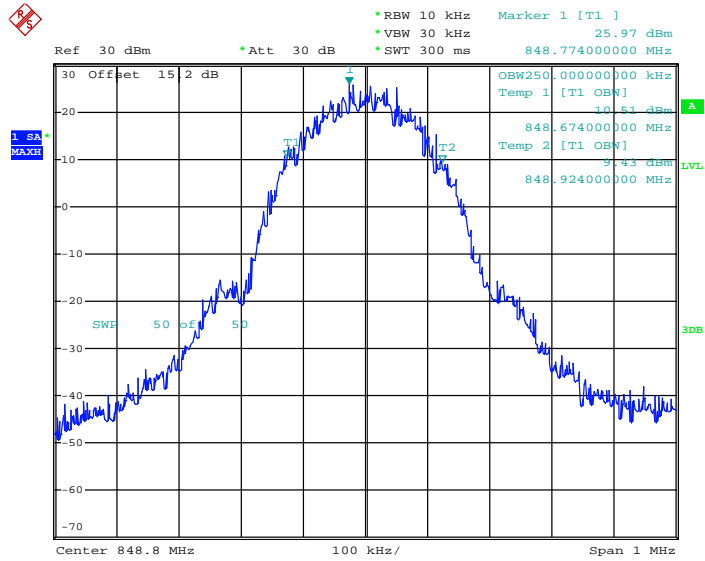

Date: 18.JUN.2014 03:21:30

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

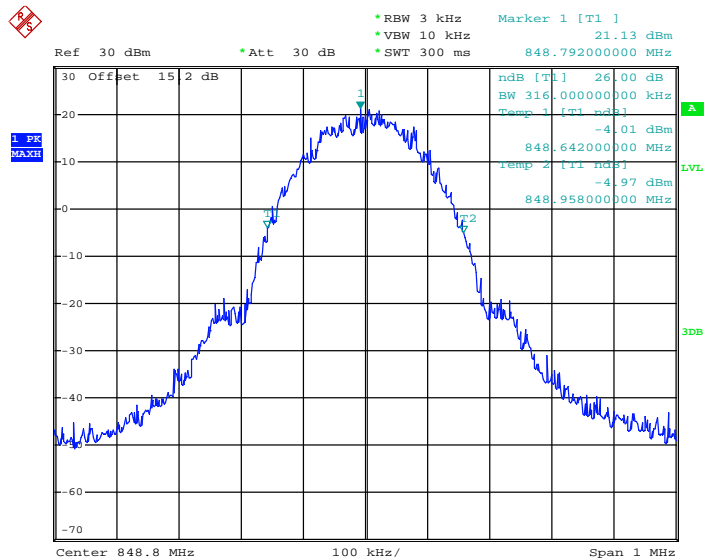


Date: 18.JUN.2014 03:18:46




Band :	GSM 1900	Test Mode :	GSM Link (GMSK)
---------------	----------	--------------------	-----------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

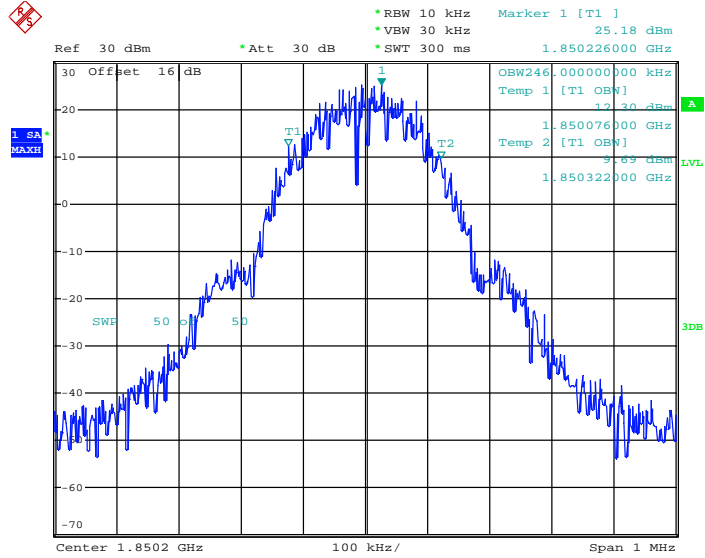

Date: 18.JUN.2014 03:46:40


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

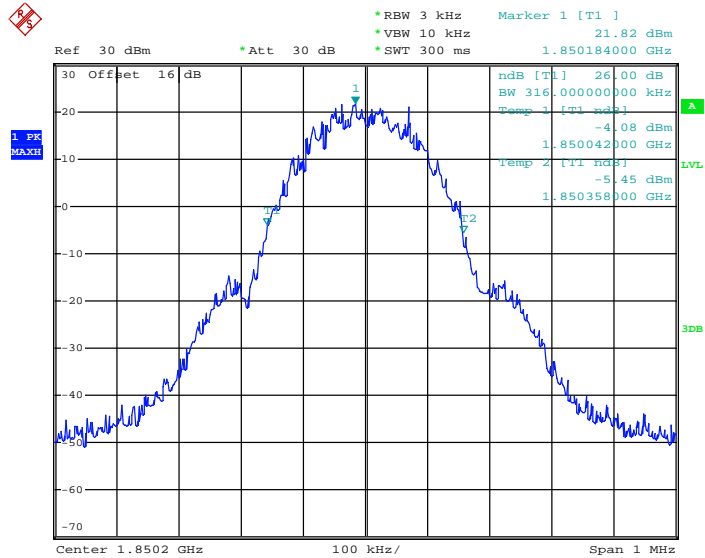

Date: 18.JUN.2014 03:44:08




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

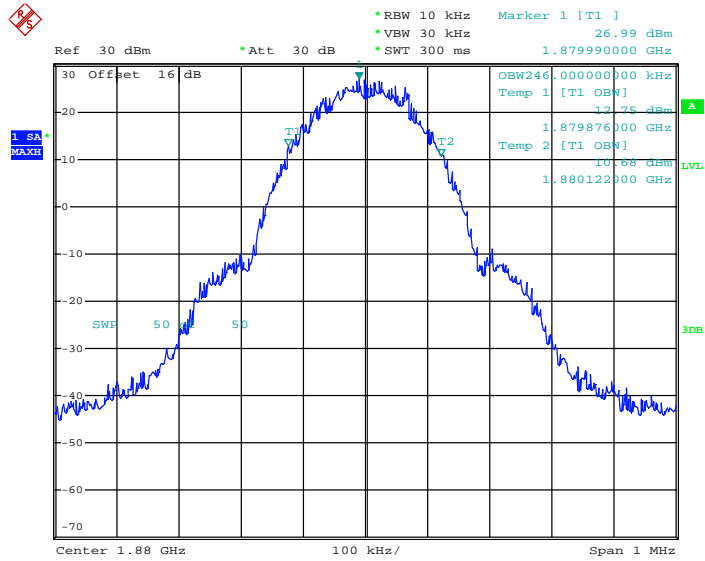

Date: 18.JUN.2014 03:56:01


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

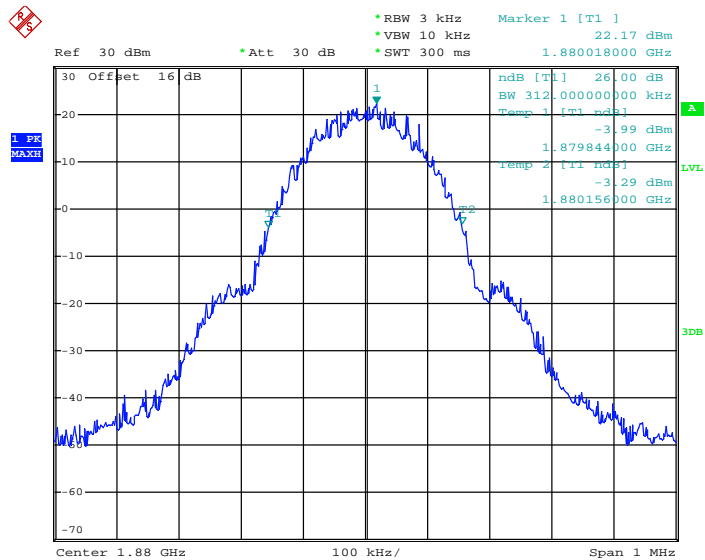

Date: 18.JUN.2014 03:44:35




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

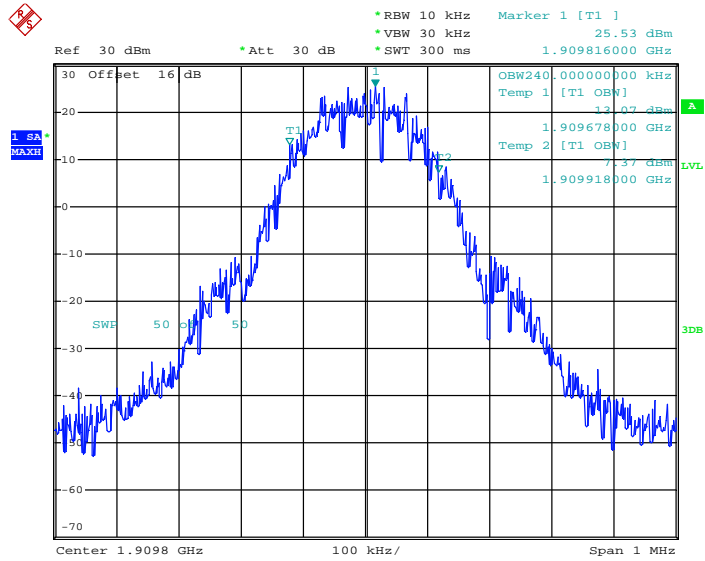

Date: 18.JUN.2014 03:47:19

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

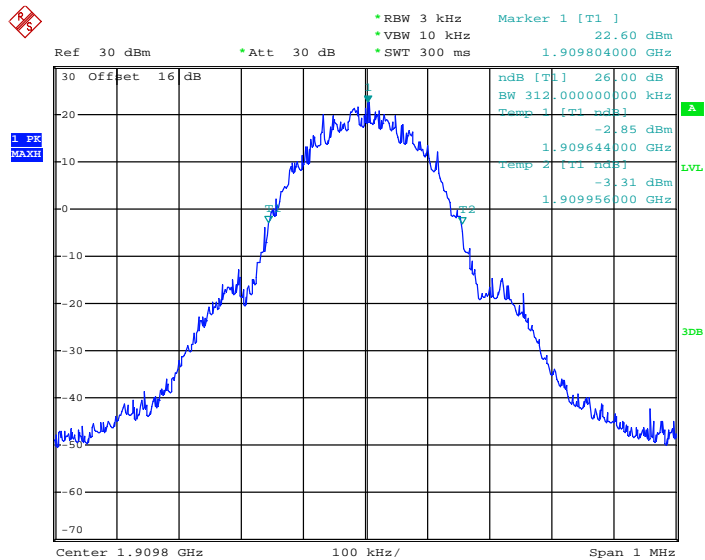


Date: 18.JUN.2014 03:45:01




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
---------------	----------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

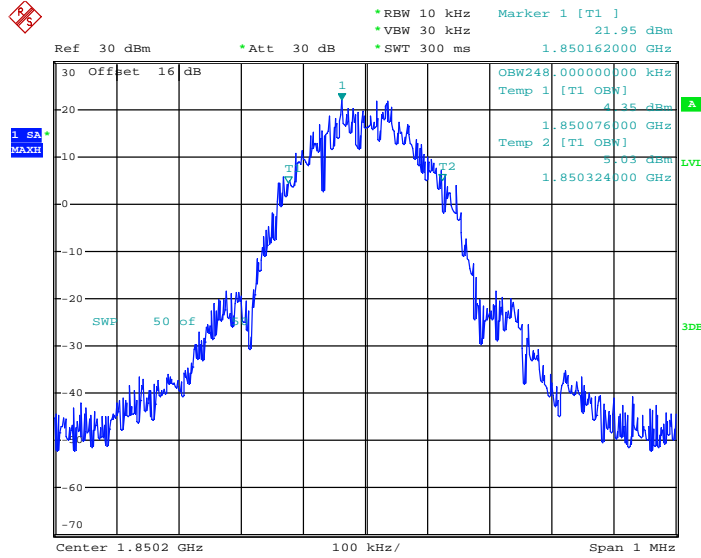

Date: 18.JUN.2014 04:04:05


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

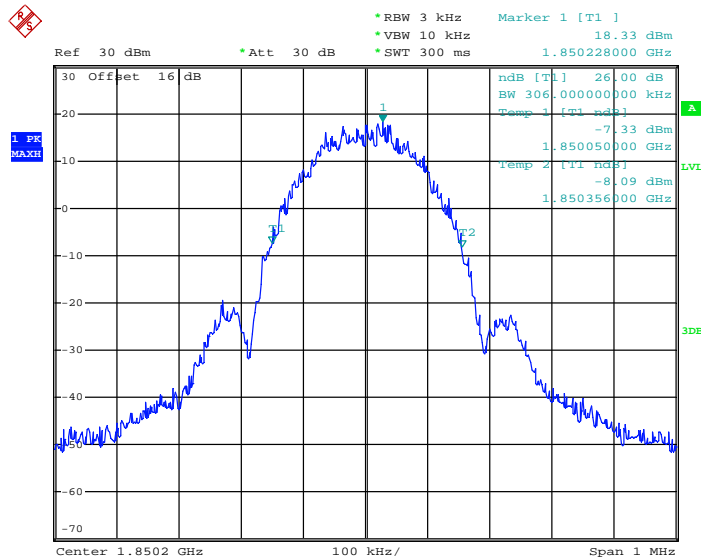

Date: 18.JUN.2014 04:09:00




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

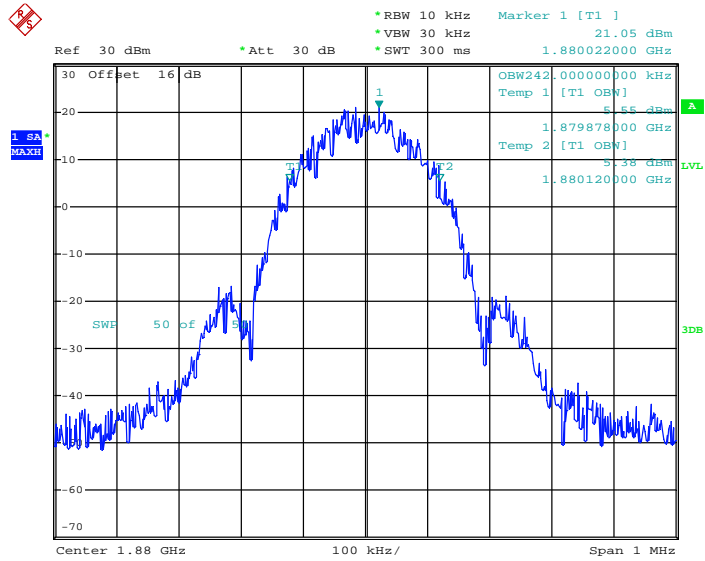

Date: 18.JUN.2014 04:04:24


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

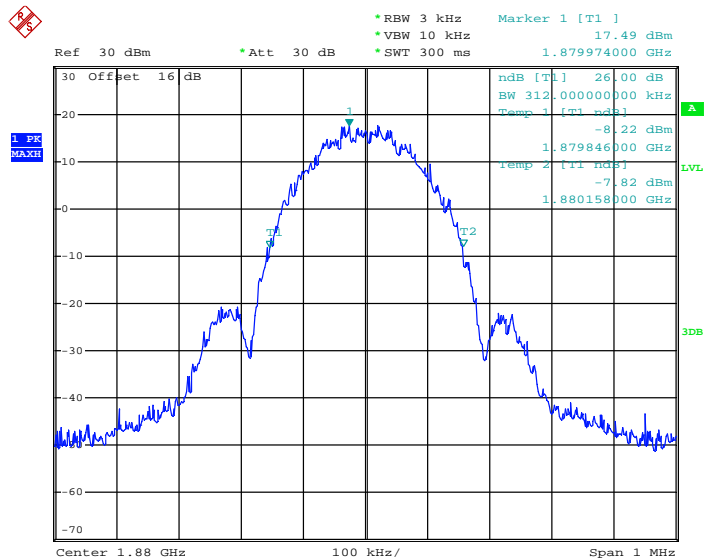

Date: 18.JUN.2014 04:10:08




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

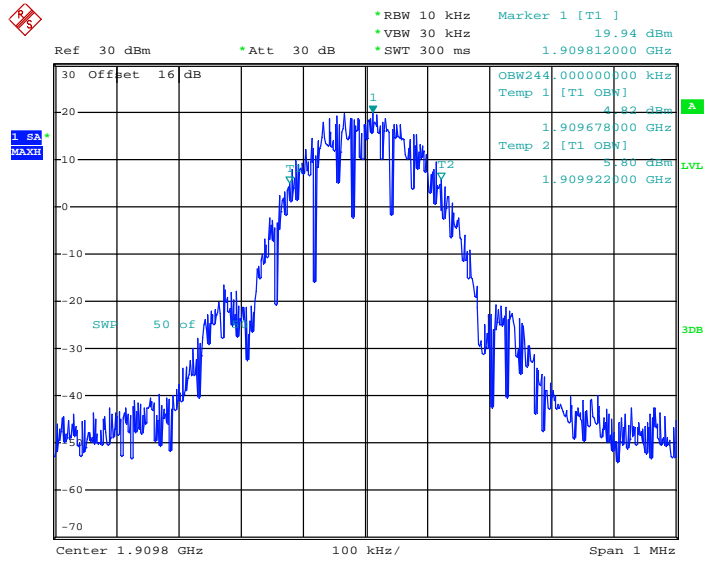

Date: 18.JUN.2014 04:04:43

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

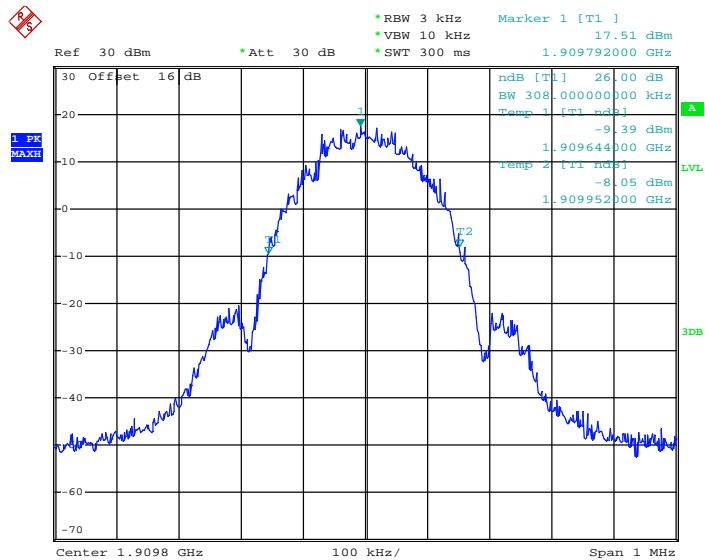


Date: 18.JUN.2014 04:02:27




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	--------------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

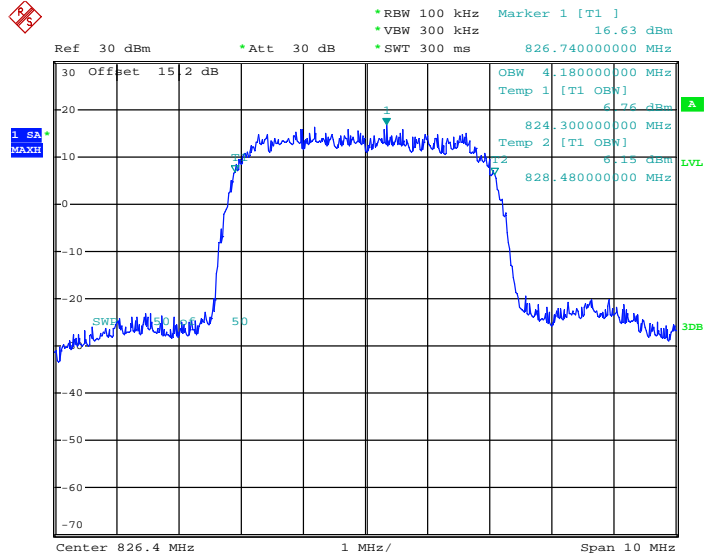

Date: 18.JUN.2014 03:31:14


26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

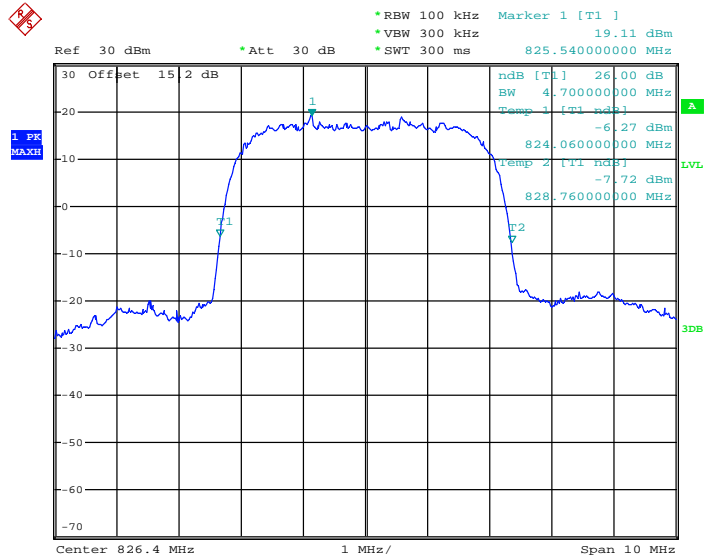

Date: 18.JUN.2014 03:28:44




99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

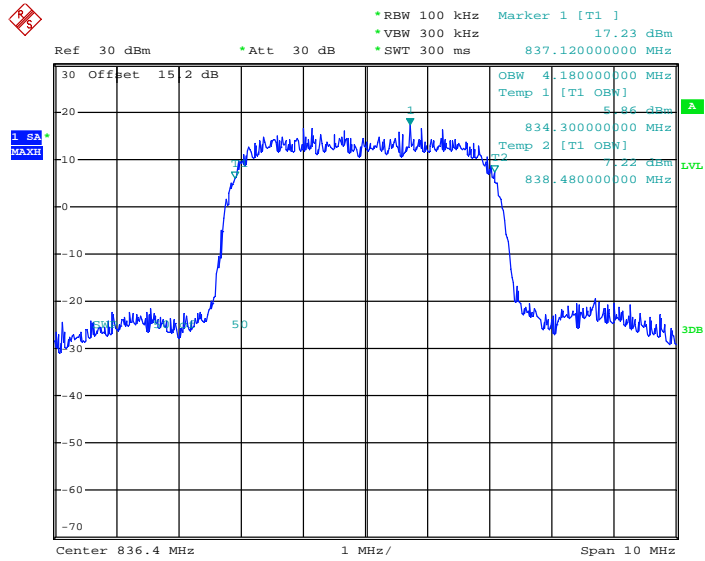

Date: 18.JUN.2014 03:31:34


26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

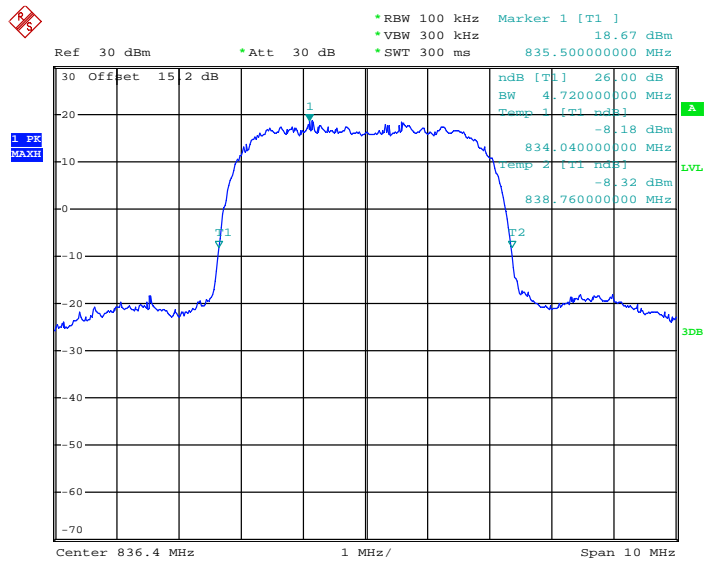

Date: 18.JUN.2014 03:29:10




99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

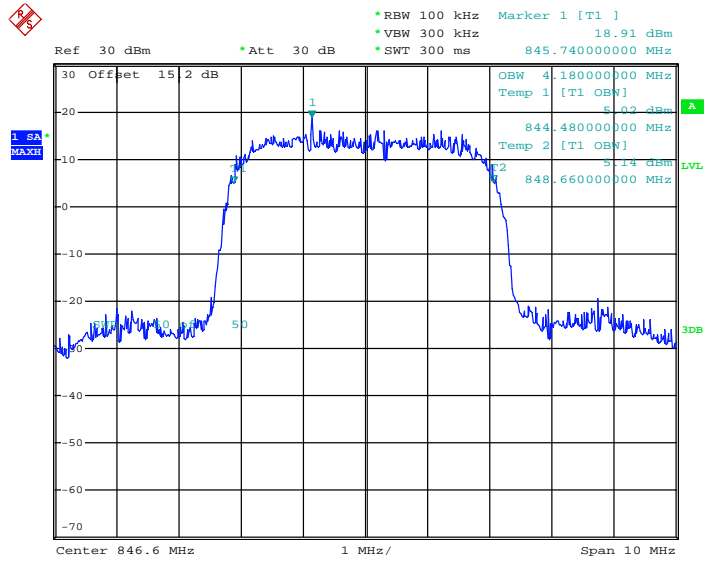

Date: 18.JUN.2014 03:31:54

26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

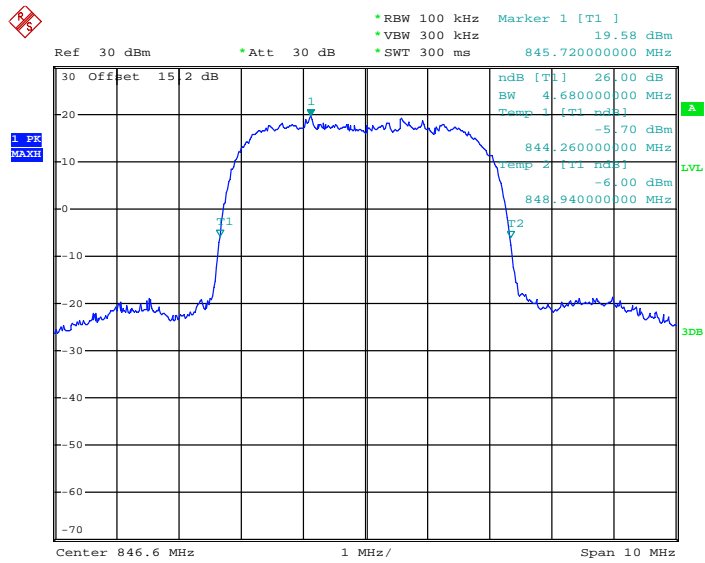


Date: 18.JUN.2014 03:29:36




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	-----------------------------

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

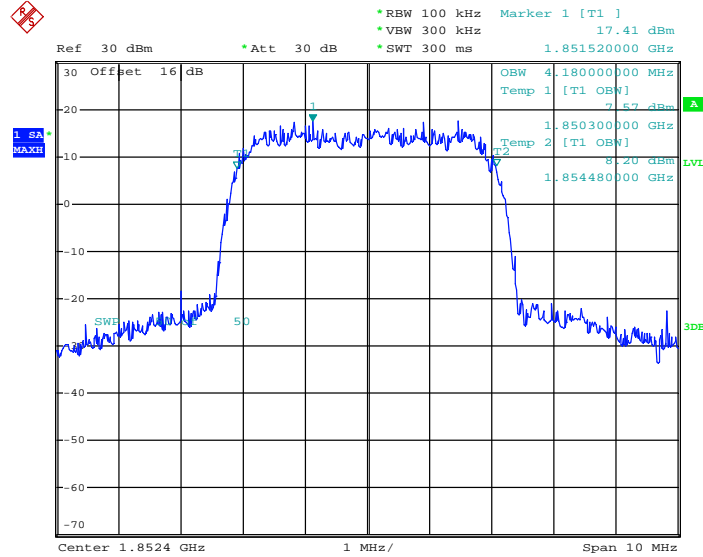

Date: 18.JUN.2014 03:37:42


26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

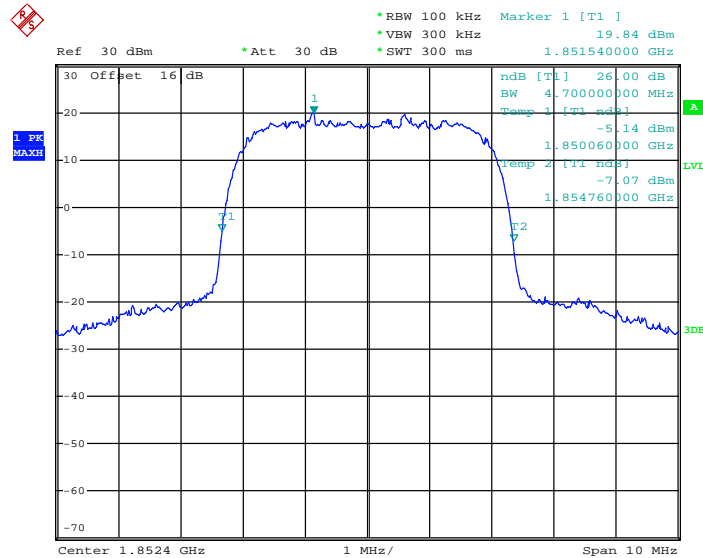

Date: 18.JUN.2014 03:35:12




99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

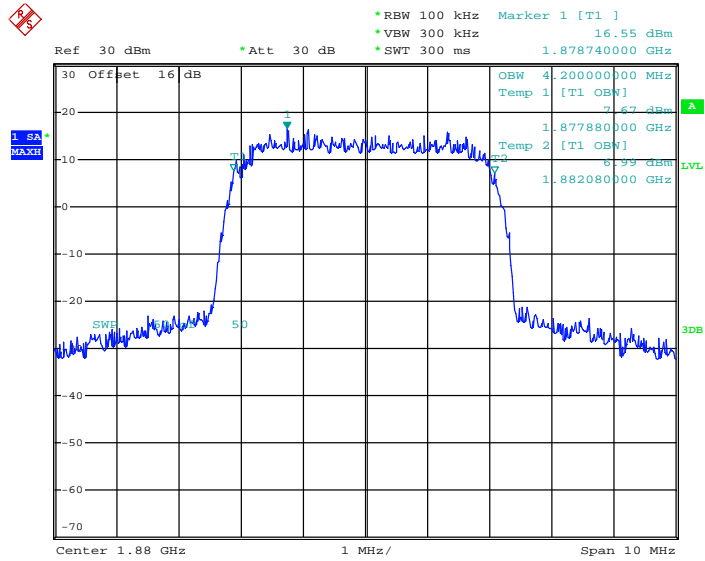

Date: 18.JUN.2014 03:38:02


26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

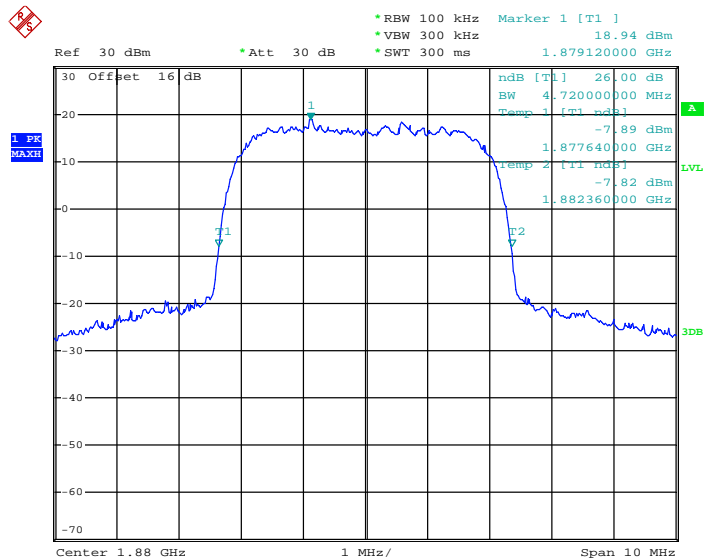

Date: 18.JUN.2014 03:35:38




99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

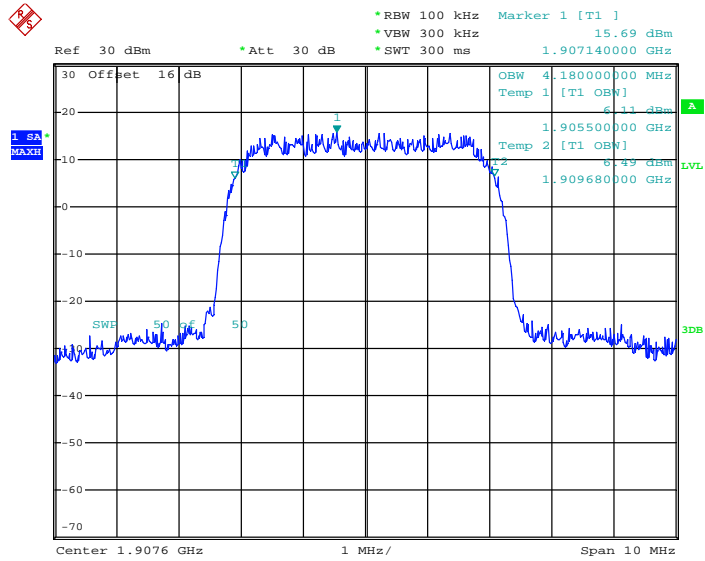

Date: 18.JUN.2014 03:38:23

26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

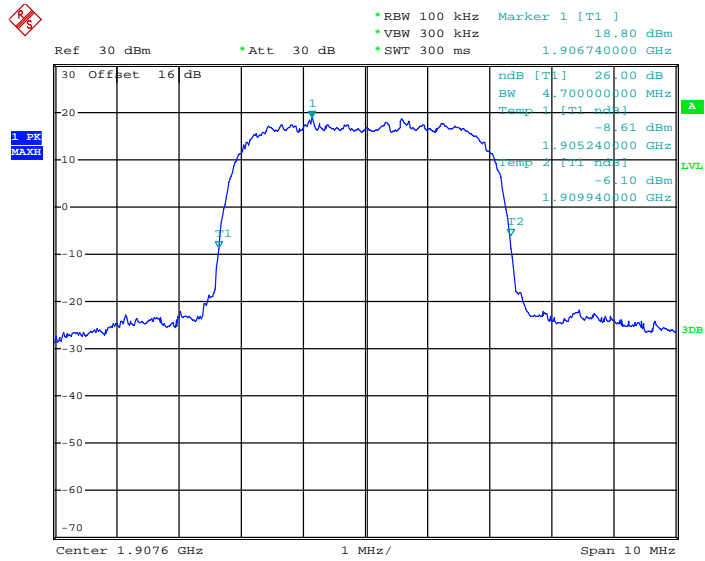

Date: 18.JUN.2014 03:36:04

3.5 Band Edge Measurement

3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

3.5.4 Test Setup

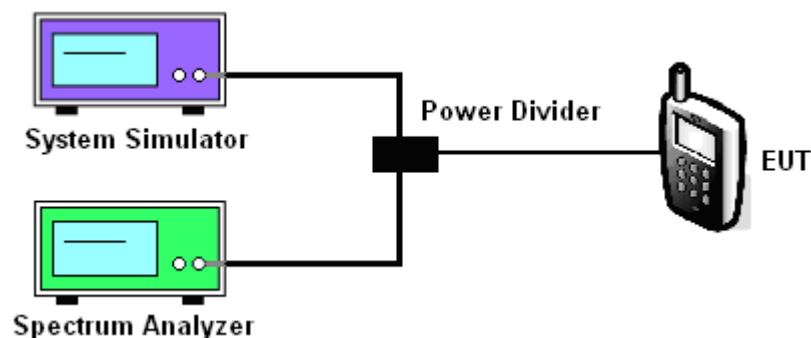




3.5.5 Test Result (Plots) of Conducted Band Edge

Band :	GSM850	Test Mode :	GSM Link (GMSK)
Correction Factor :	0.25dB	Maximum 26dB Bandwidth :	0.318MHz
Band Edge :	-14.21dBm	Measurement Value :	-14.46dBm

Lower Band Edge Plot on Channel 128 (824.2 MHz)

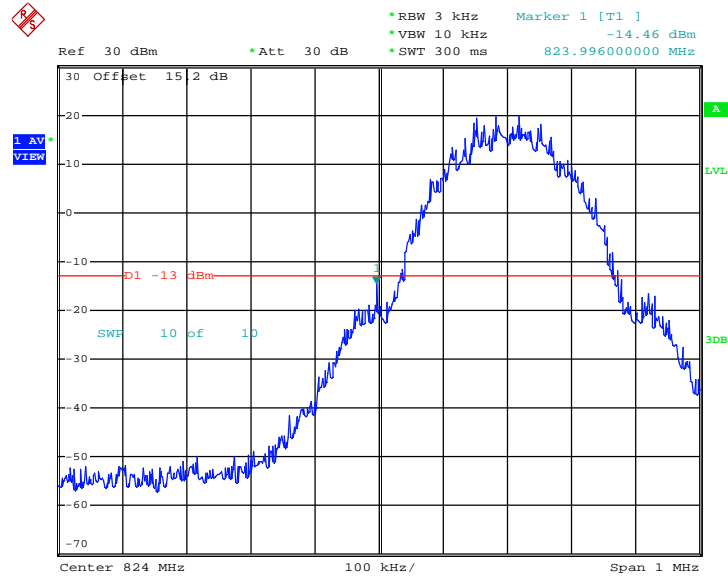


Date: 18.JUN.2014 01:11:47

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM850	Test Mode :	GSM Link (GMSK)
Correction Factor :	0.25dB	Maximum 26dB Bandwidth :	0.318MHz
Band Edge :	-15.18dBm	Measurement Value :	-15.43dBm

Higher Band Edge Plot on Channel 251 (848.8 MHz)

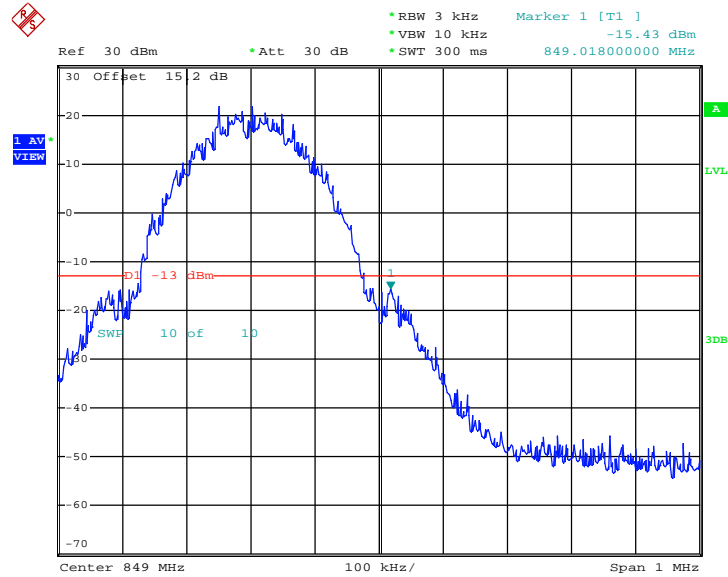


Date: 18.JUN.2014 01:12:16

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.31dB	Maximum 26dB Bandwidth :	0.322MHz
Band Edge :	-24.57dBm	Measurement Value :	-24.88dBm

Lower Band Edge Plot on Channel 128 (824.2 MHz)

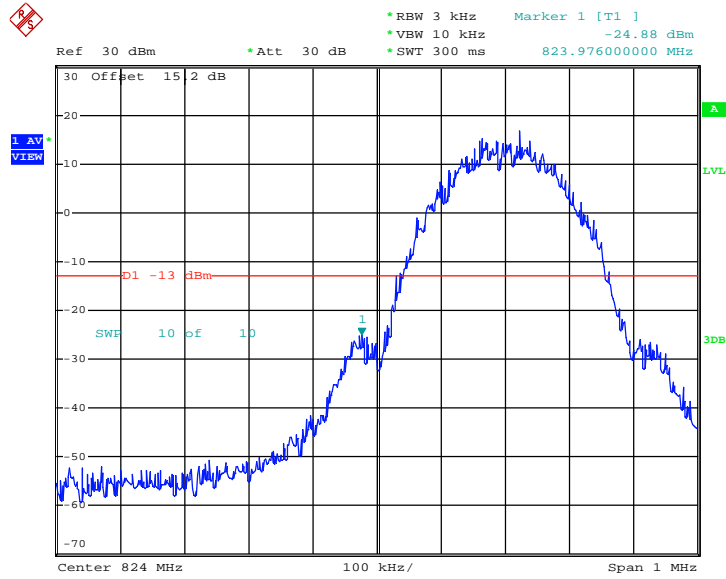


Date: 18.JUN.2014 03:10:03

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.31dB	Maximum 26dB Bandwidth :	0.322MHz
Band Edge :	-24.71dBm	Measurement Value :	-25.02dBm

Higher Band Edge Plot on Channel 251 (848.8 MHz)

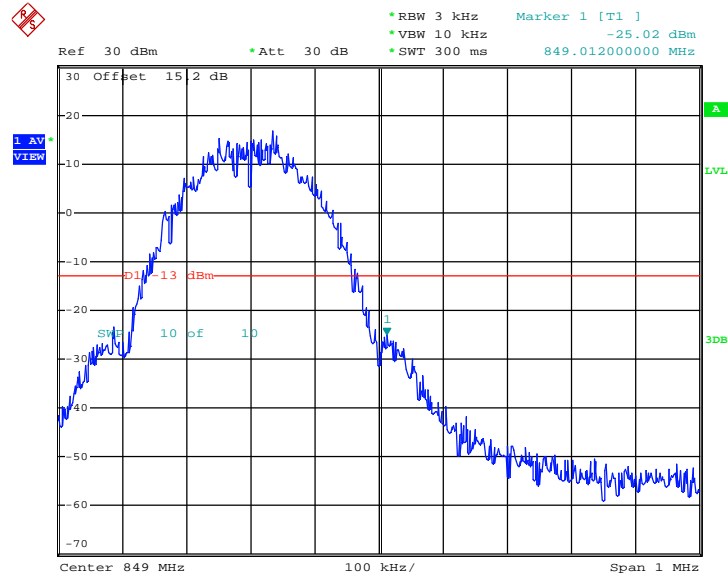


Date: 18.JUN.2014 03:10:32

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM1900	Test Mode :	GSM Link (GMSK)
Correction Factor :	0.23dB	Maximum 26dB Bandwidth :	0.316MHz
Band Edge :	-19.68dBm	Measurement Value :	-19.91dBm

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

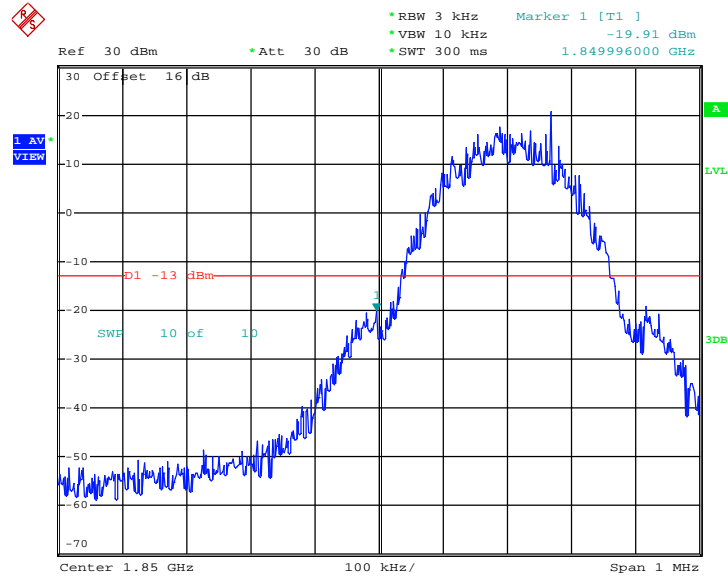


Date: 18.JUN.2014 03:48:42

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM1900	Test Mode :	GSM Link (GMSK)
Correction Factor :	0.23dB	Maximum 26dB Bandwidth :	0.316MHz
Band Edge :	-19.02dBm	Measurement Value :	-19.25dBm

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

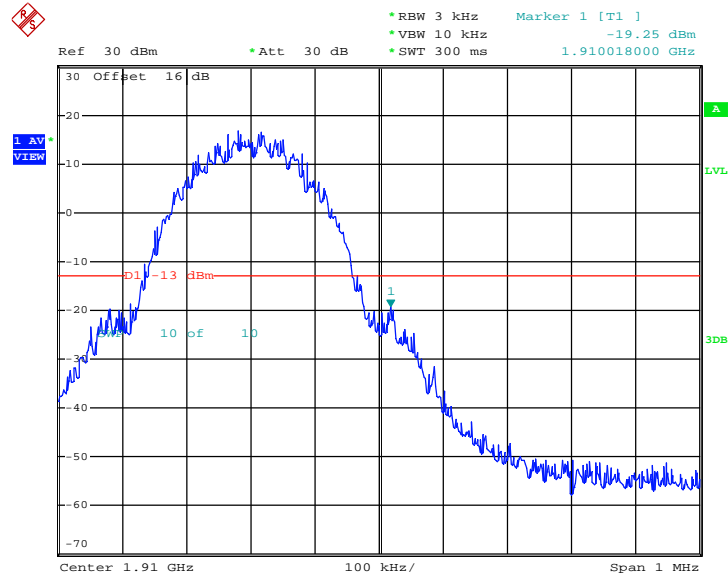


Date: 18.JUN.2014 03:49:11

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.17dB	Maximum 26dB Bandwidth :	0.312MHz
Band Edge :	-24.75dBm	Measurement Value :	-24.92dBm

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

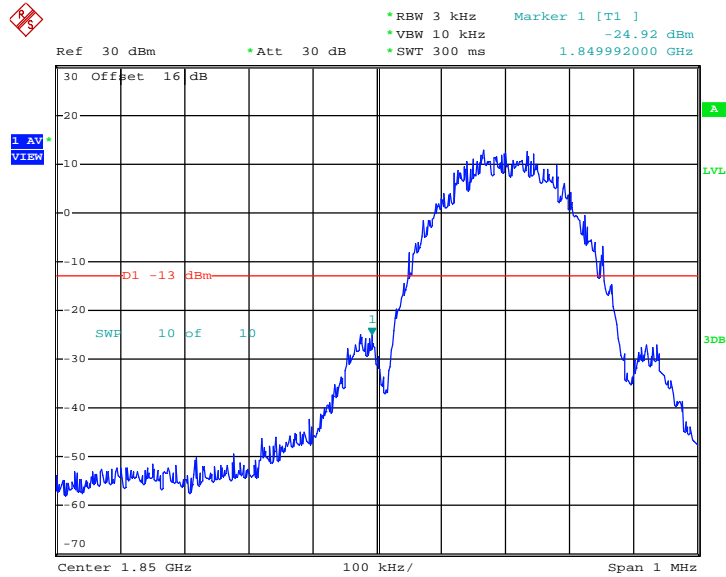


Date: 18.JUN.2014 04:06:05

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.17dB	Maximum 26dB Bandwidth :	0.312MHz
Band Edge :	-27.83dBm	Measurement Value :	-28.00dBm

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

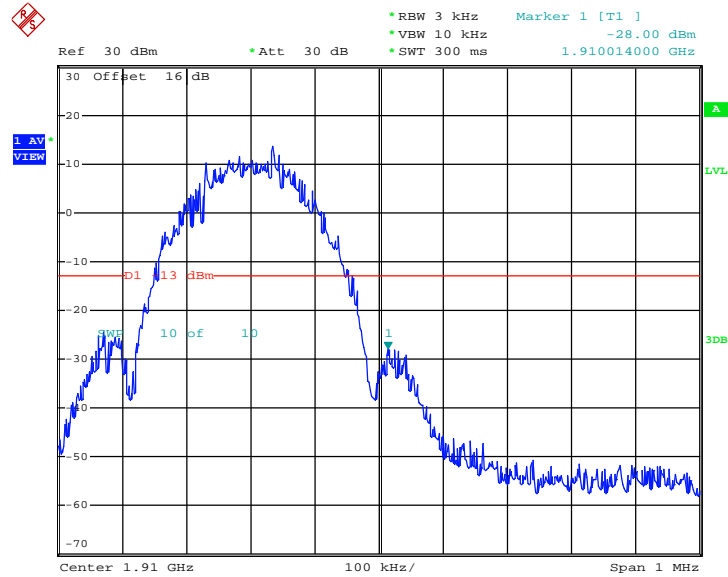


Date: 18.JUN.2014 04:06:34

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.26dB	Maximum 26dB Bandwidth :	4.720MHz
Band Edge :	-26.73dBm	Measurement Value :	-23.47dBm

Lower Band Edge Plot on Channel 4132 (826.4 MHz)

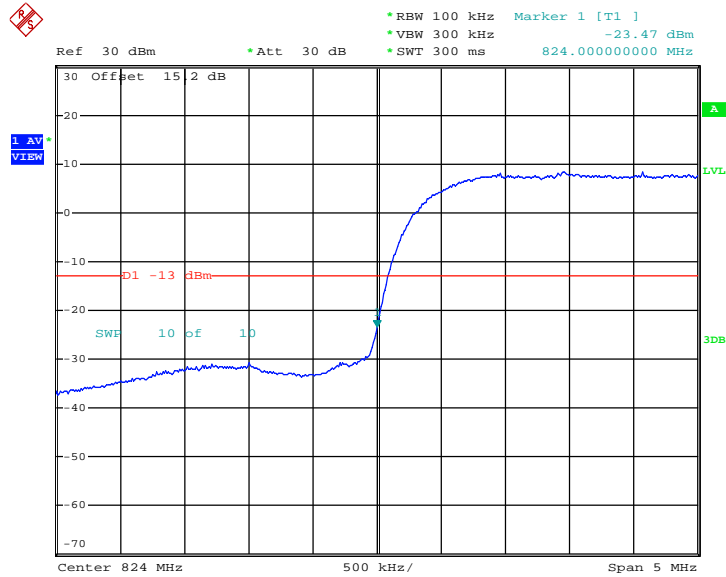


Date: 18.JUN.2014 03:33:16

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.26dB	Maximum 26dB Bandwidth :	4.720MHz
Band Edge :	-26.07dBm	Measurement Value :	-22.81dBm

Higher Band Edge Plot on Channel 4233 (846.6 MHz)

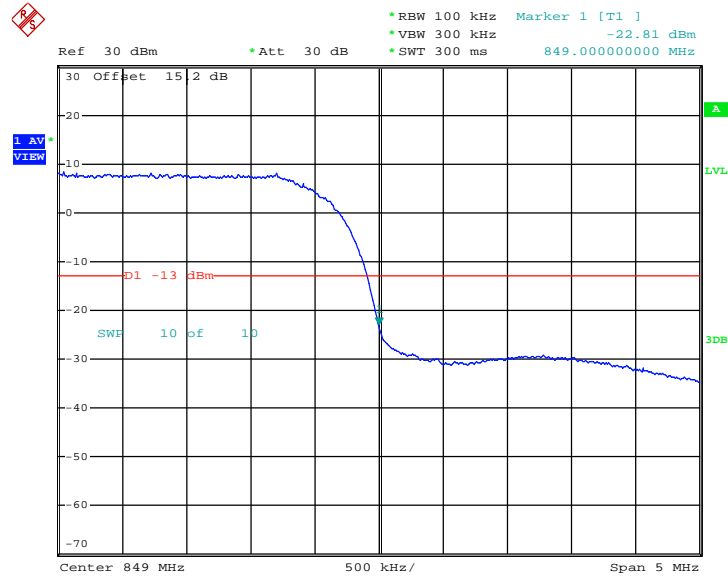


Date: 18.JUN.2014 03:33:45

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.26dB	Maximum 26dB Bandwidth :	4.720MHz
Band Edge :	-26.07dBm	Measurement Value :	-22.81dBm

Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

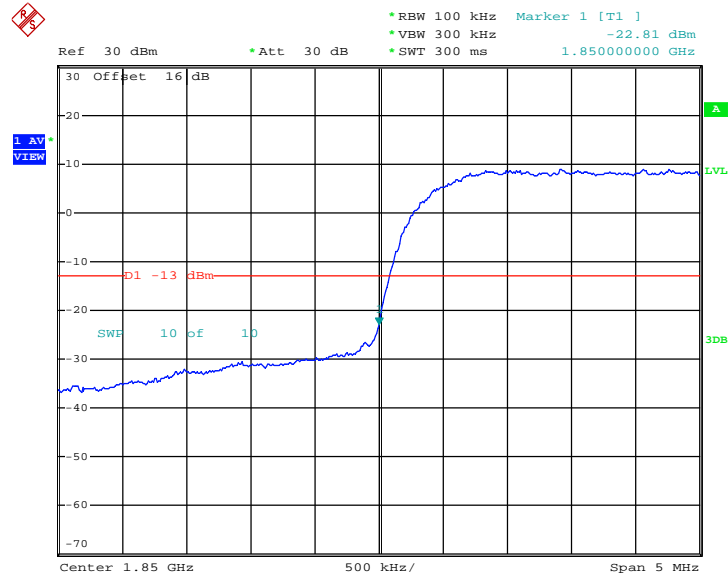


Date: 18.JUN.2014 03:39:45

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.26dB	Maximum 26dB Bandwidth :	4.720MHz
Band Edge :	-27.94dBm	Measurement Value :	-24.68dBm

Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

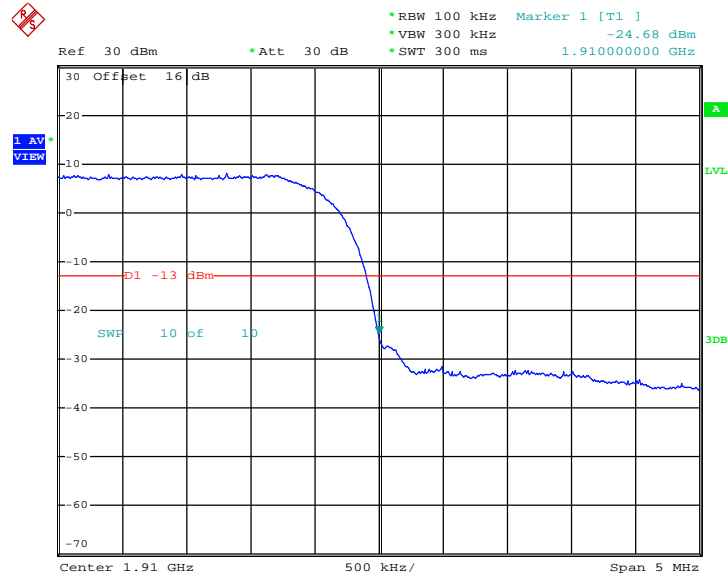

Date: 18.JUN.2014 03:40:14

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)

3.6 Conducted Spurious Emission Measurement

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures


1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$


3.6.4 Test Setup

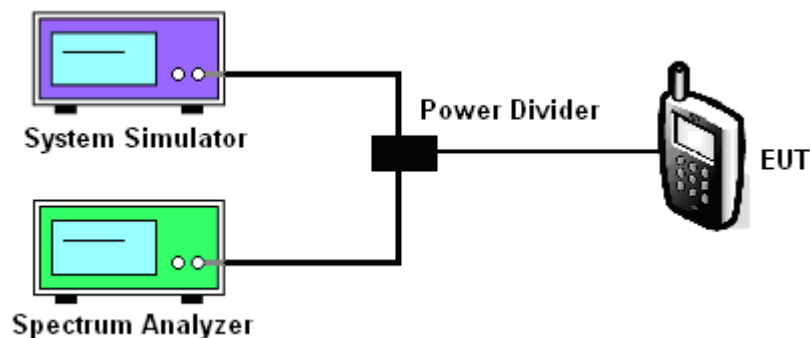

3.6.5 Test Result (Plots) of Conducted Spurious Emission


Band :	GSM850	Channel :	CH128
Test Mode :	GSM Link (GMSK)	Frequency :	824.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

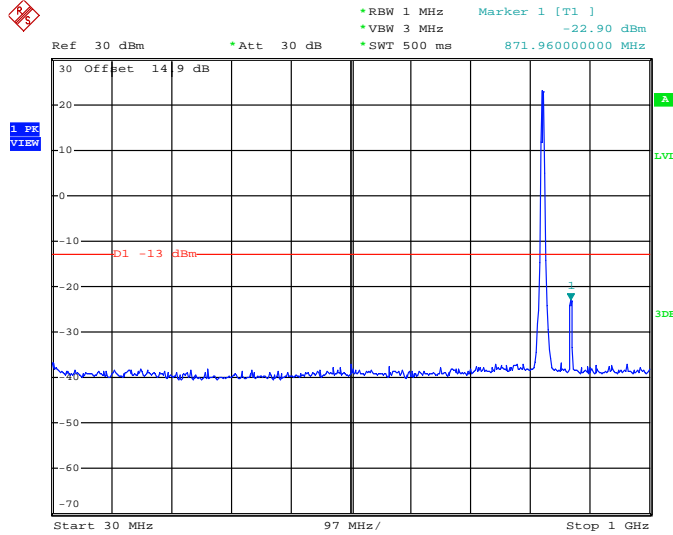

Date: 18.JUN.2014 04:27:15


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

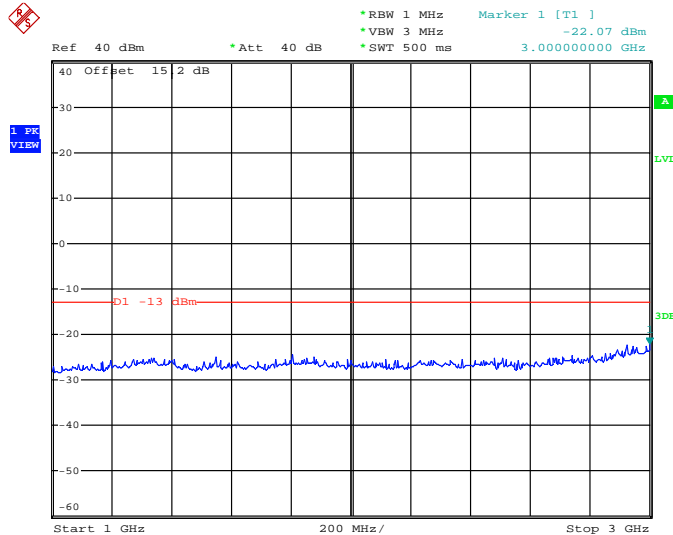

Date: 18.JUN.2014 04:28:28




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

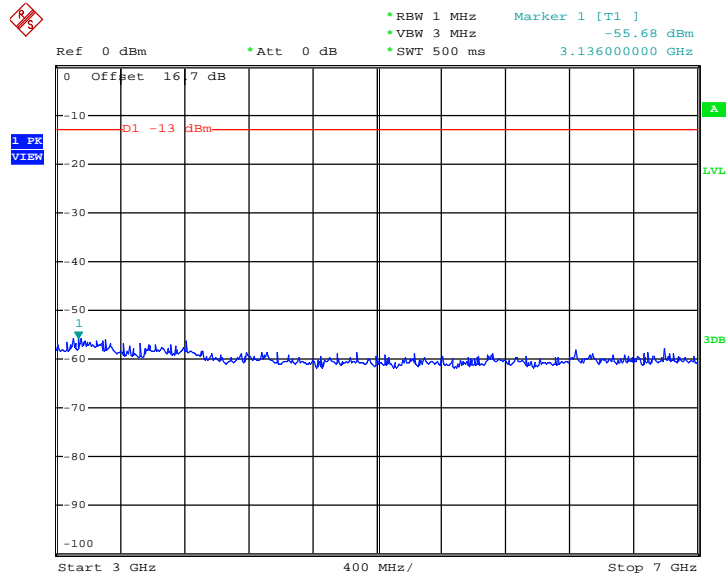

Date: 18.JUN.2014 04:33:06

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

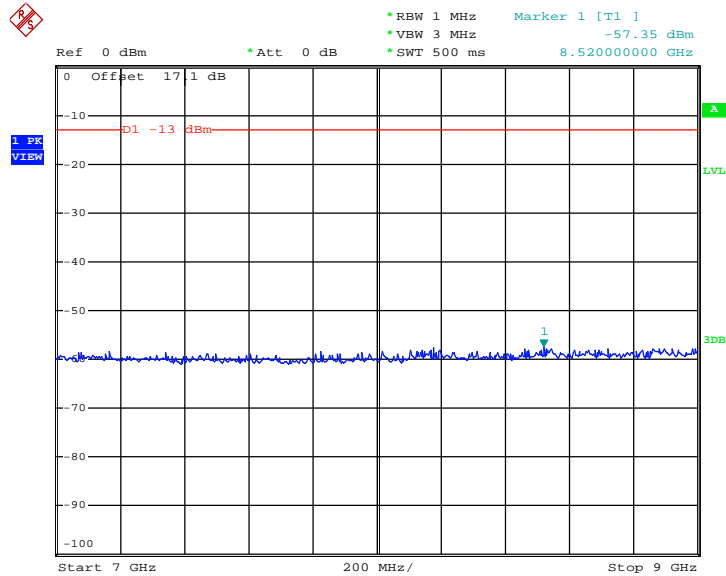


Date: 18.JUN.2014 04:35:47




Band :	GSM850	Channel :	CH189
Test Mode :	GSM Link (GMSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

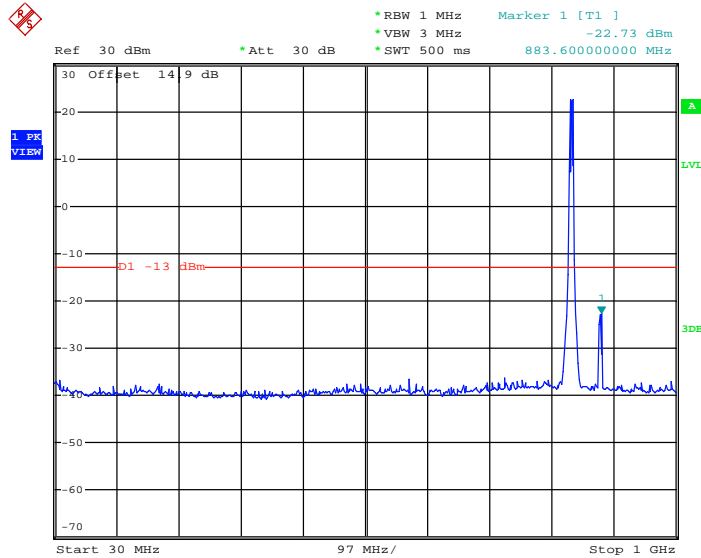

Date: 18.JUN.2014 04:26:37


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

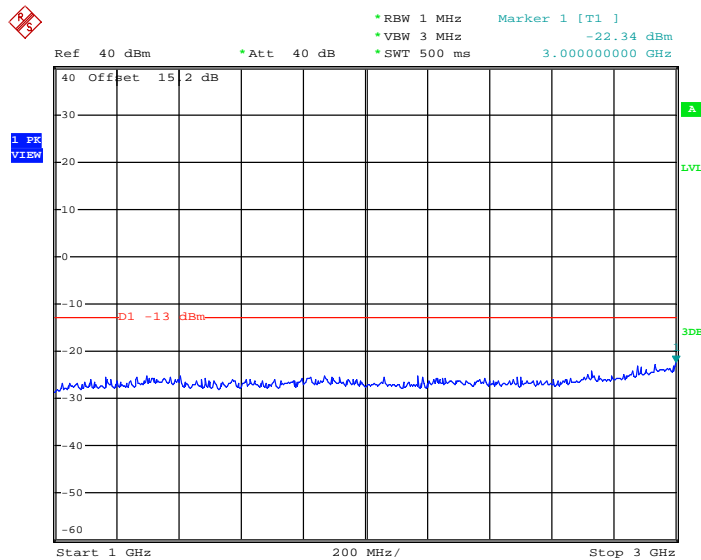

Date: 18.JUN.2014 04:29:21




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

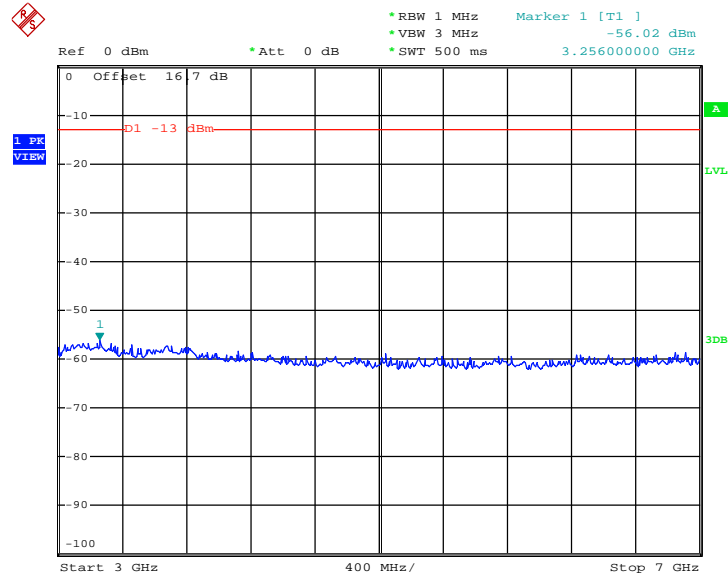

Date: 18.JUN.2014 04:33:56

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

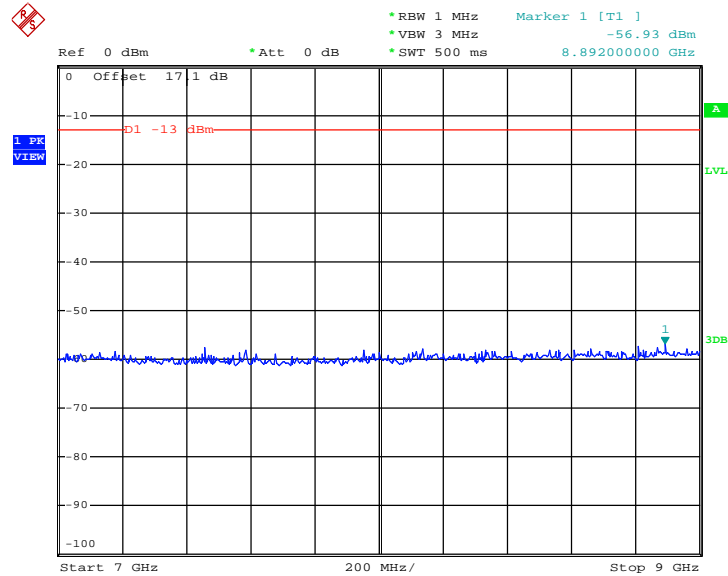


Date: 18.JUN.2014 04:36:31




Band :	GSM850	Channel :	CH251
Test Mode :	GSM Link (GMSK)	Frequency :	848.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

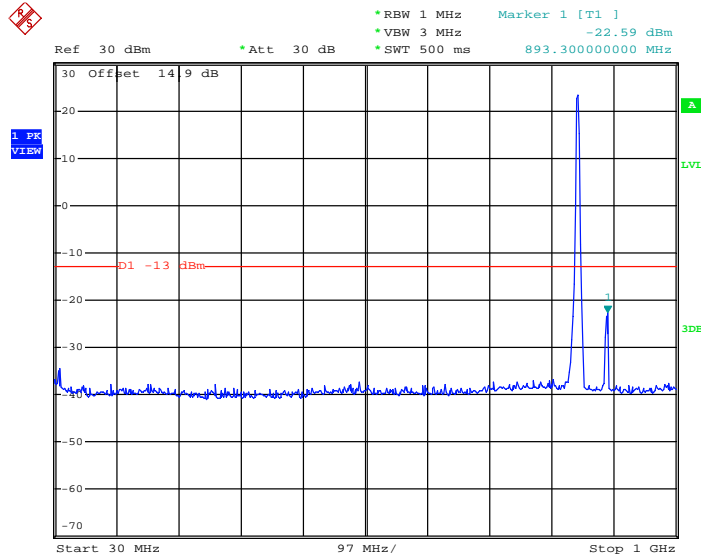

Date: 18.JUN.2014 04:25:59


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

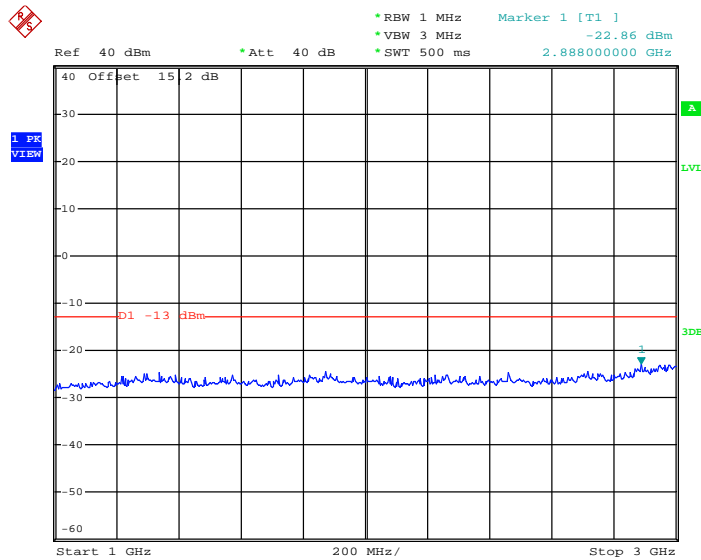

Date: 18.JUN.2014 04:30:09




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

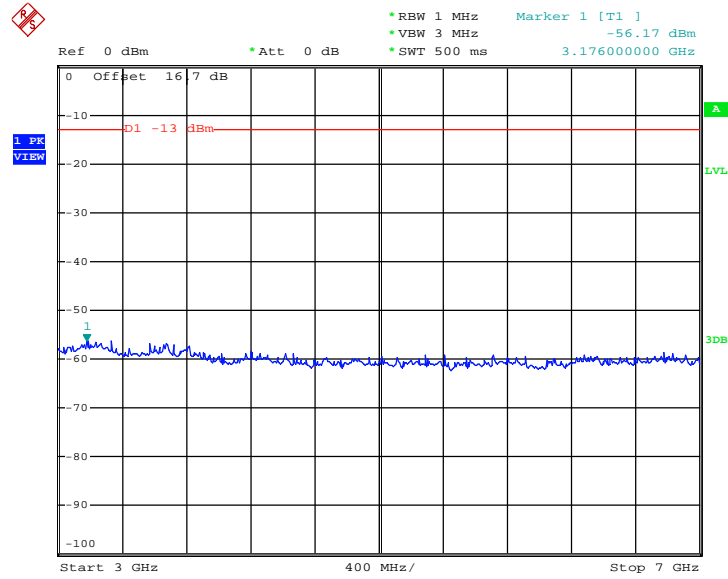

Date: 18.JUN.2014 04:34:38

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

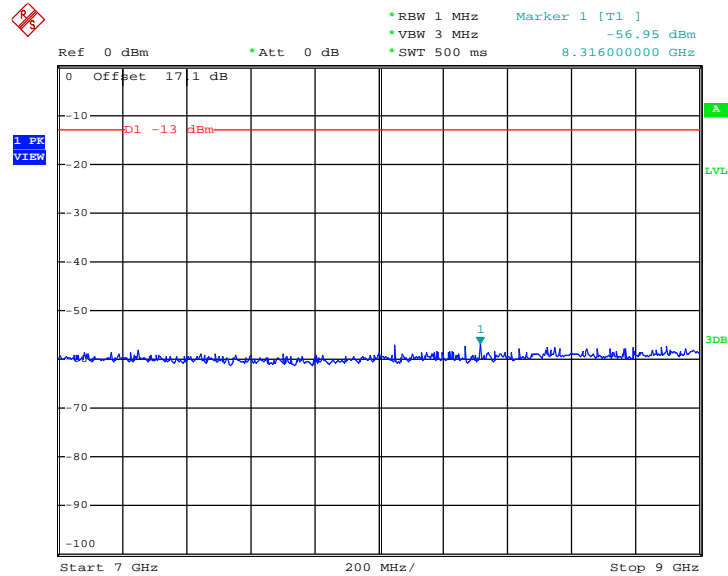


Date: 18.JUN.2014 04:39:31




Band :	GSM850	Channel :	CH128
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	824.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

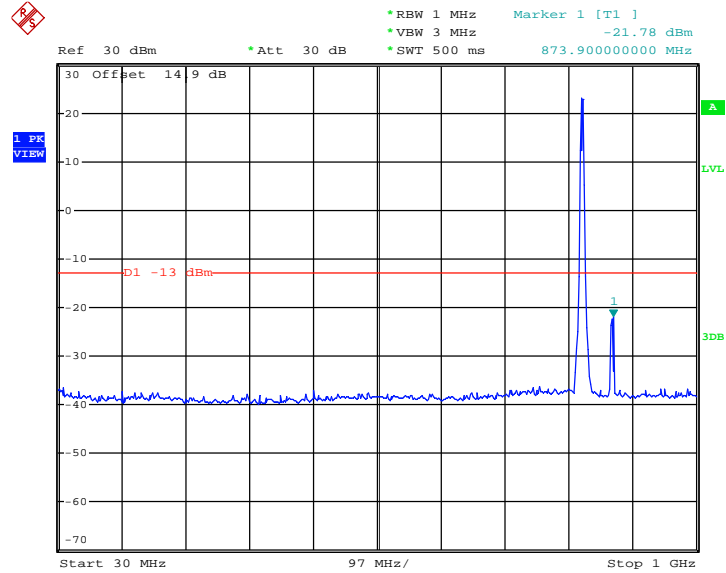

Date: 18.JUN.2014 04:24:40


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

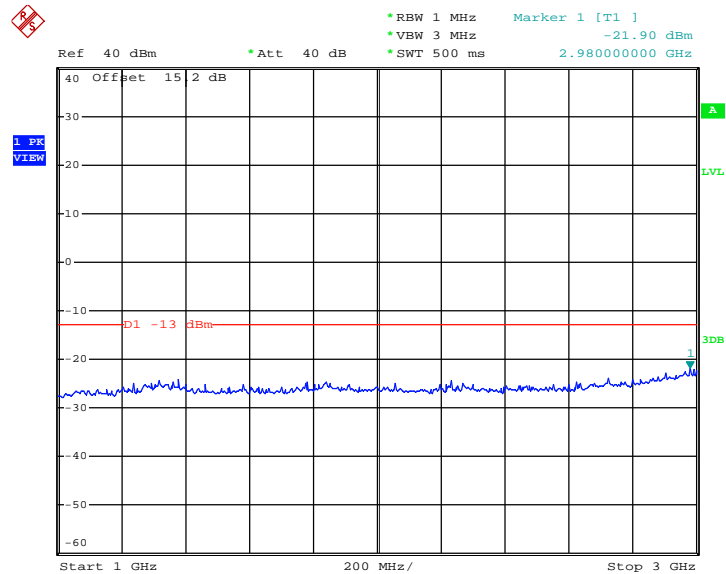

Date: 18.JUN.2014 04:28:17




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

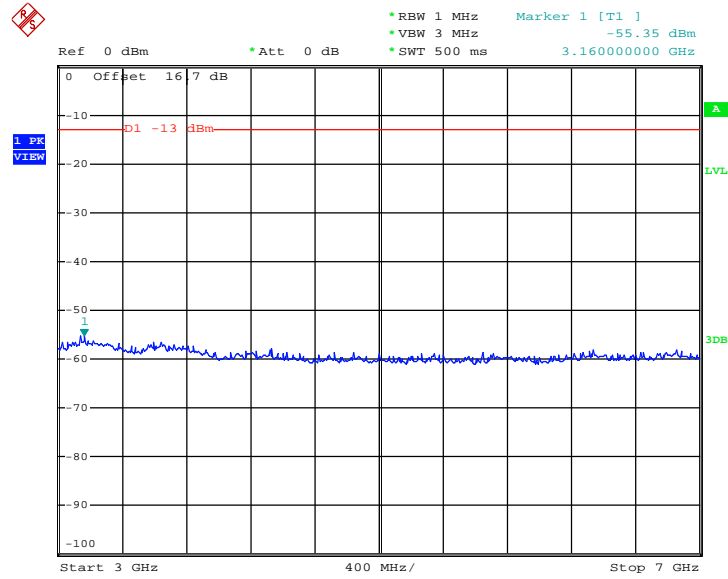

Date: 18.JUN.2014 04:32:55

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

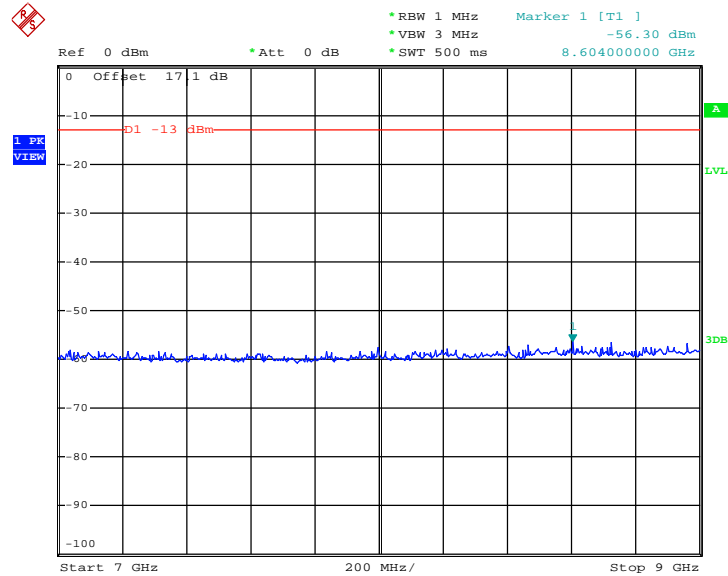


Date: 18.JUN.2014 04:35:38




Band :	GSM850	Channel :	CH189
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

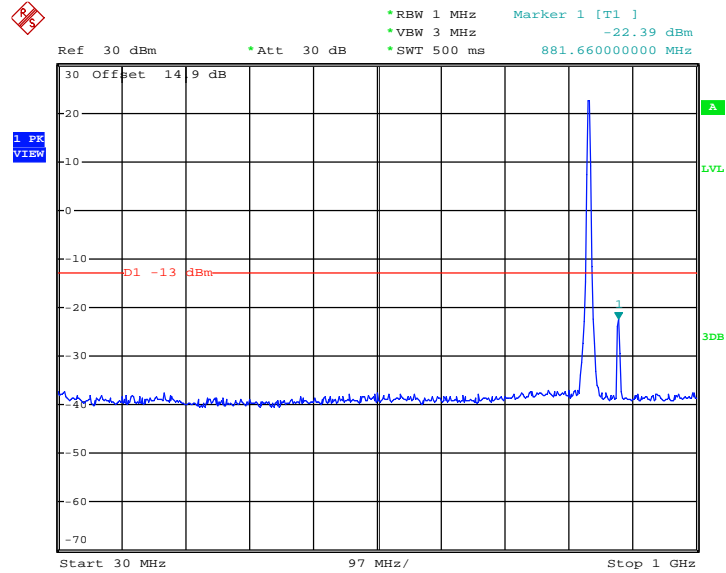

Date: 18.JUN.2014 04:25:08


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

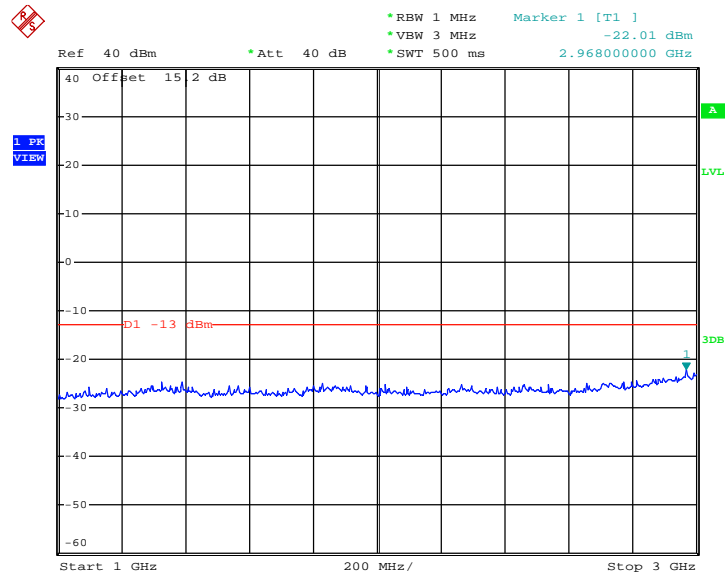

Date: 18.JUN.2014 04:29:09




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

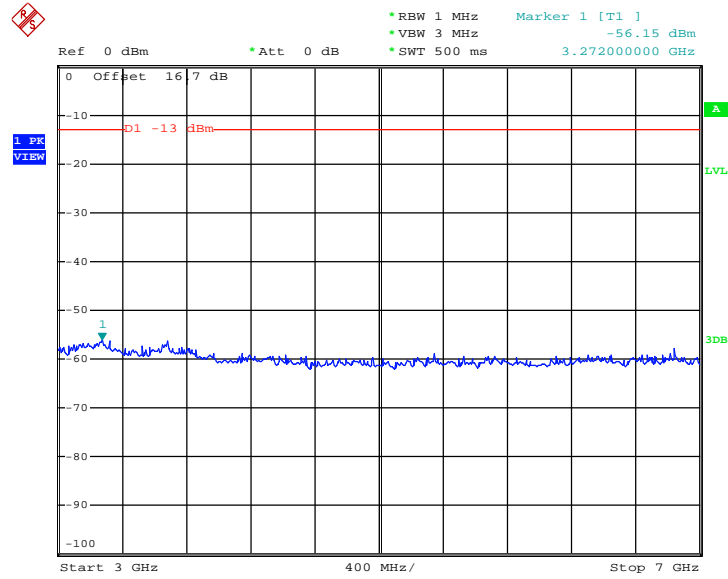

Date: 18.JUN.2014 04:33:48

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

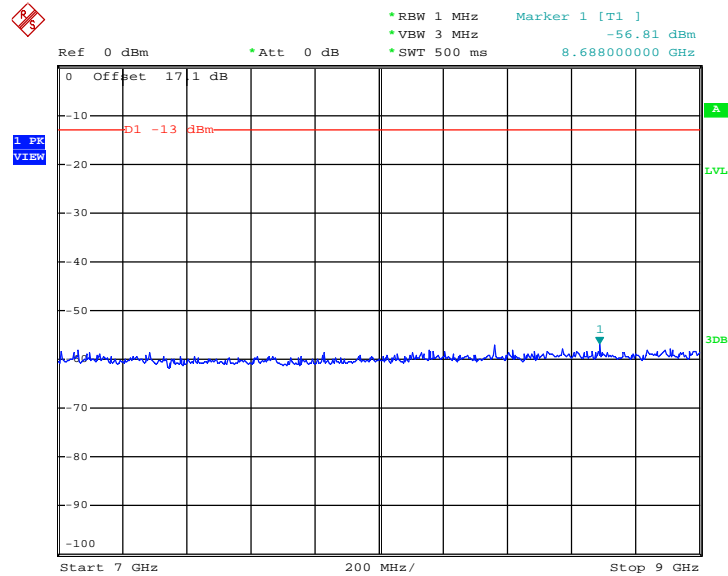


Date: 18.JUN.2014 04:36:19




Band :	GSM850	Channel :	CH251
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	848.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

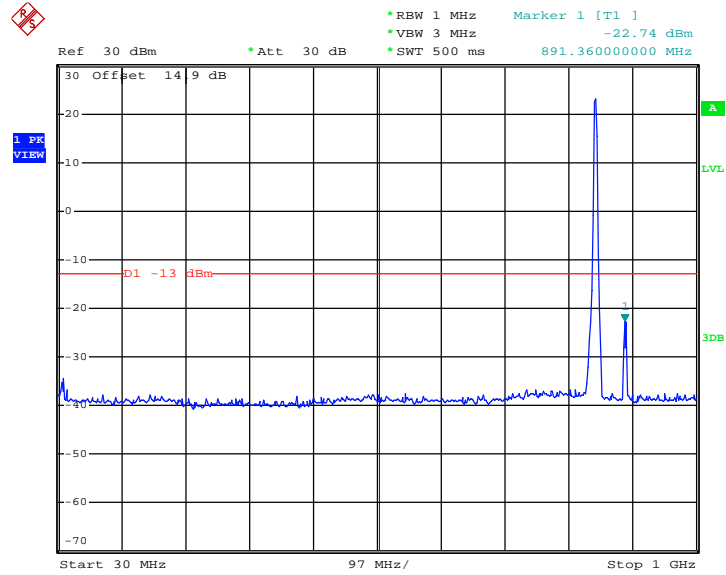

Date: 18.JUN.2014 04:25:36


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

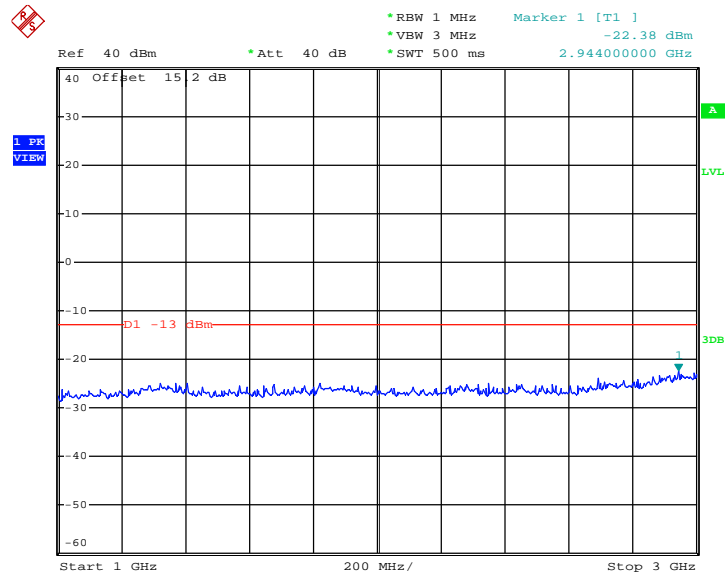

Date: 18.JUN.2014 04:29:59




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

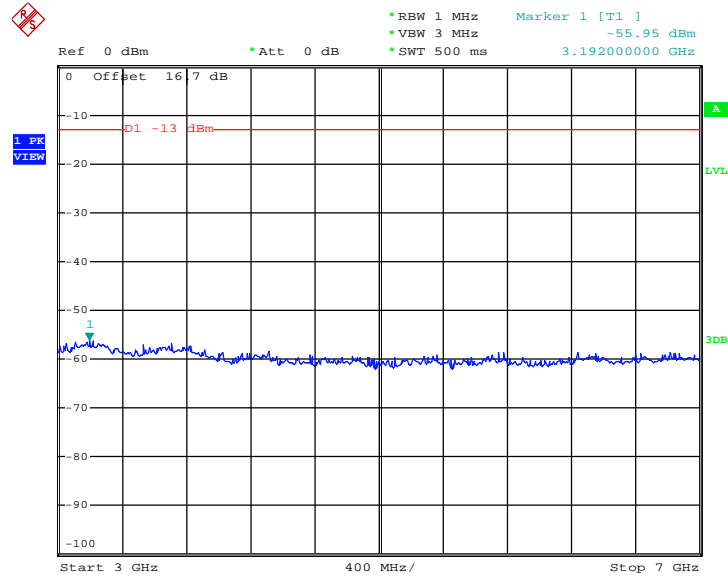

Date: 18.JUN.2014 04:34:30

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

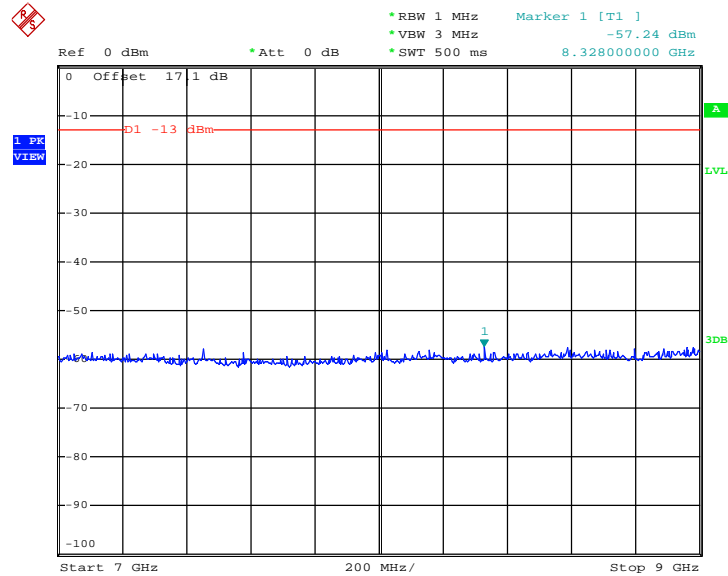


Date: 18.JUN.2014 04:39:16




Band :	GSM1900	Channel :	CH512
Test Mode :	GSM Link (GMSK)	Frequency :	1850.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

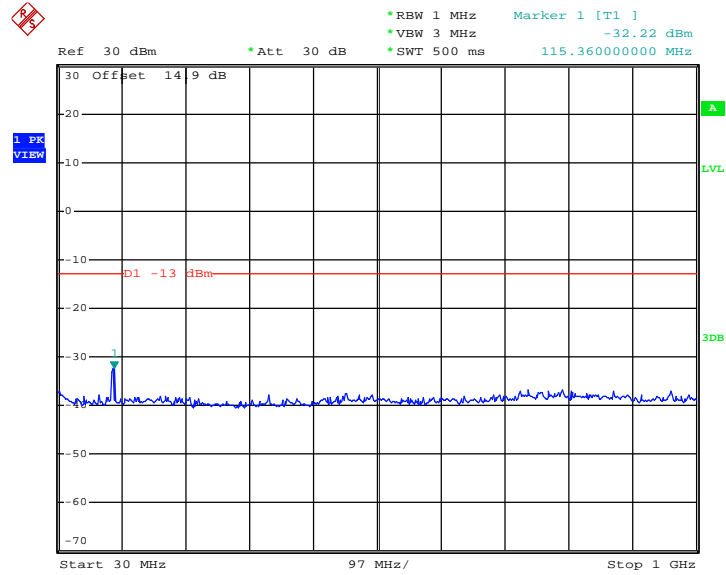

Date: 18.JUN.2014 04:56:13


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

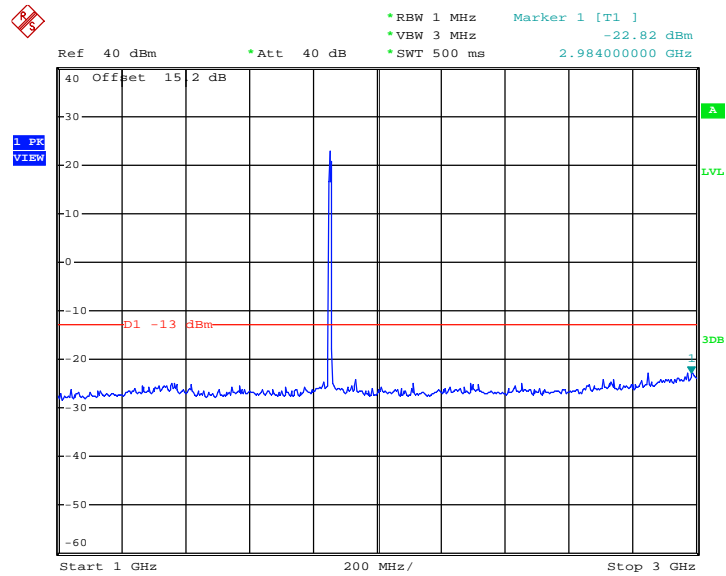

Date: 18.JUN.2014 04:59:10




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

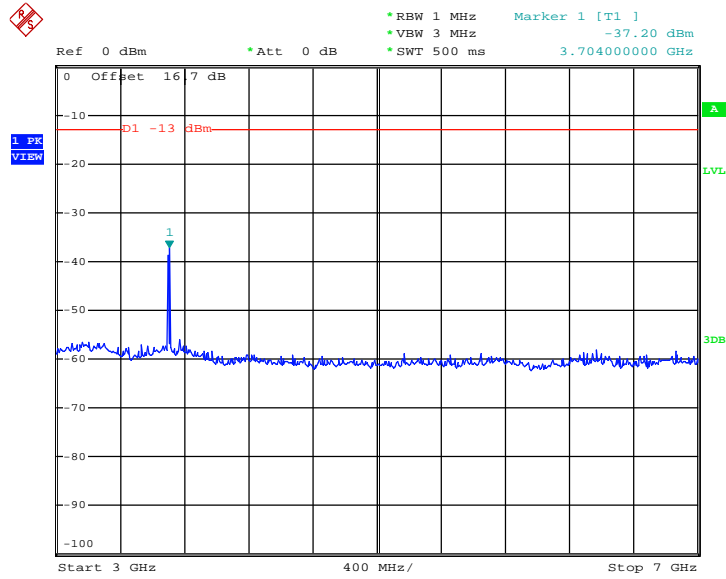

Date: 18.JUN.2014 05:09:59


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

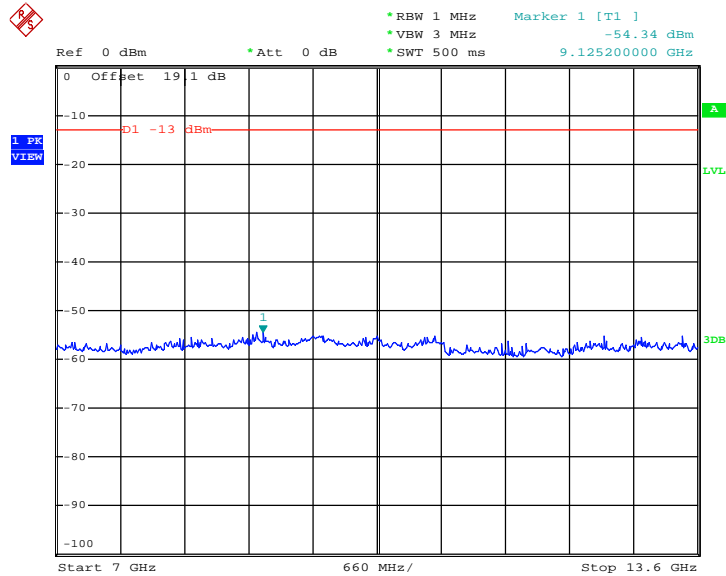

Date: 18.JUN.2014 05:13:23



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

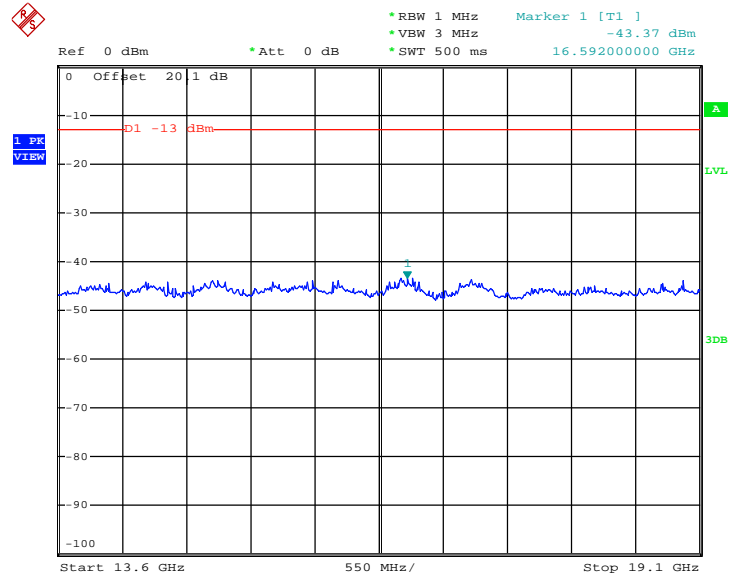


Date: 18.JUN.2014 05:16:05




Band :	GSM1900	Channel :	CH661
Test Mode :	GSM Link (GMSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

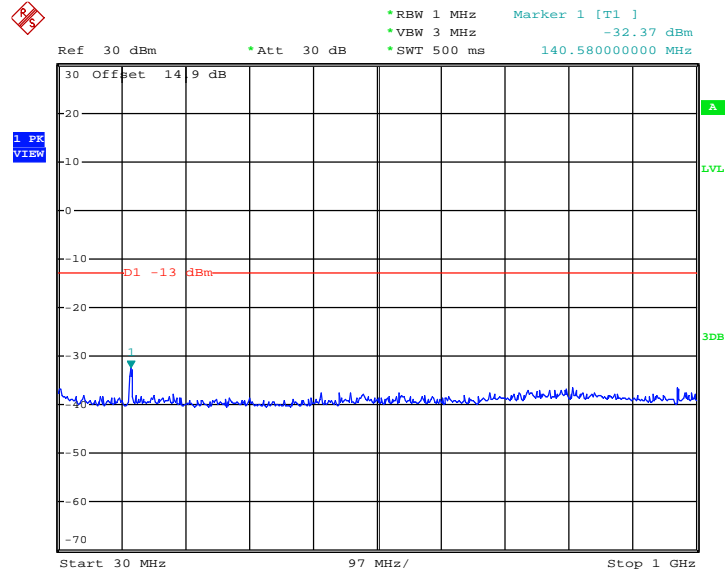

Date: 18.JUN.2014 04:56:55


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

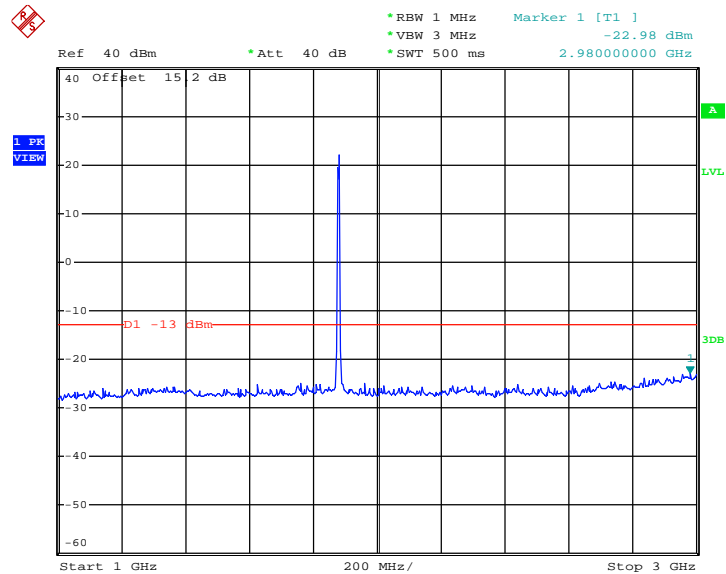

Date: 18.JUN.2014 05:00:28




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

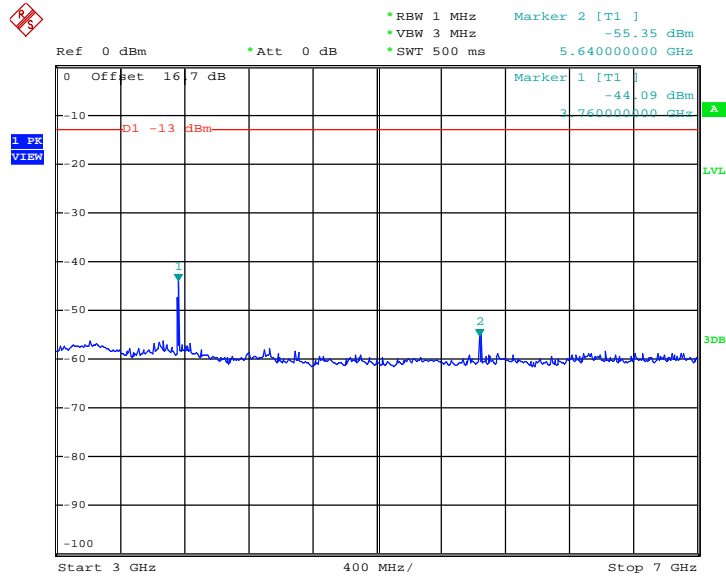

Date: 18.JUN.2014 05:11:03


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

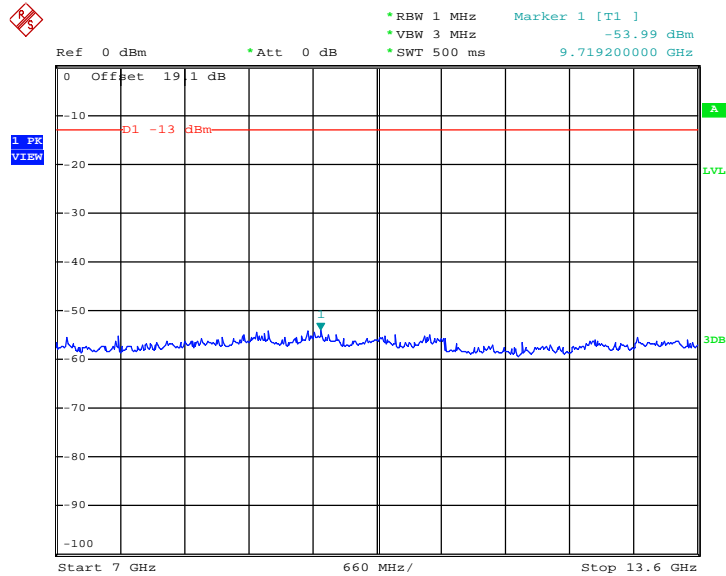

Date: 18.JUN.2014 07:33:40



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

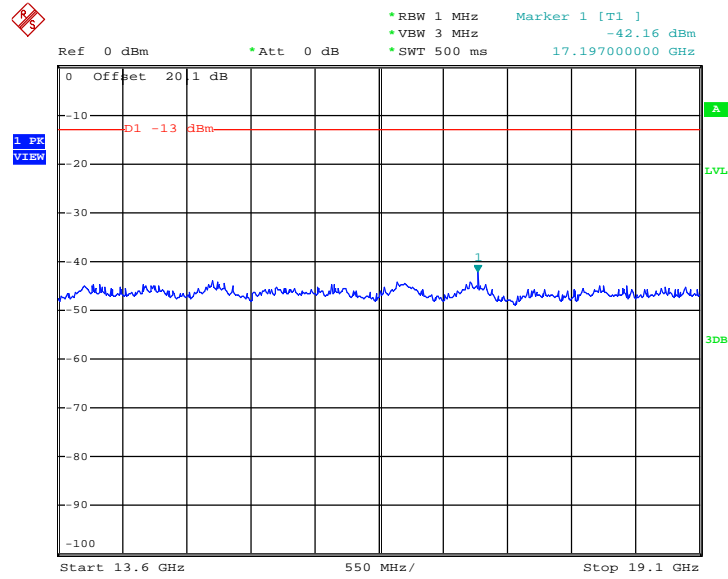


Date: 18.JUN.2014 05:16:45




Band :	GSM1900	Channel :	CH810
Test Mode :	GSM Link (GMSK)	Frequency :	1909.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

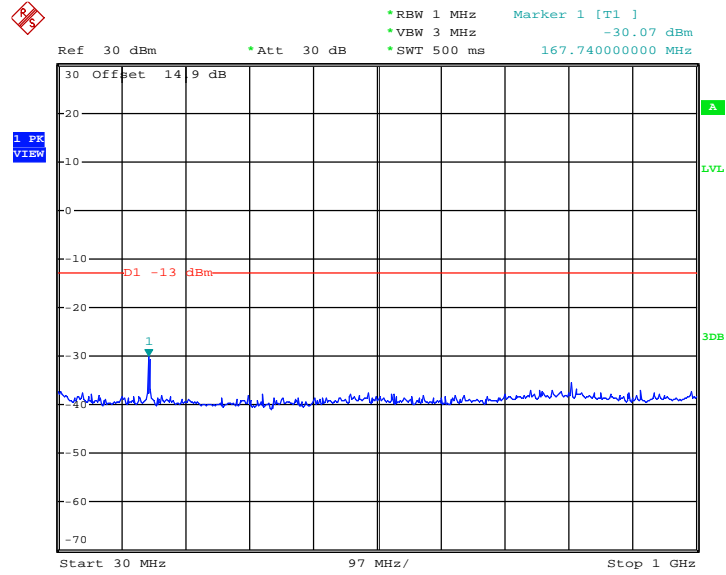

Date: 18.JUN.2014 04:57:36


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

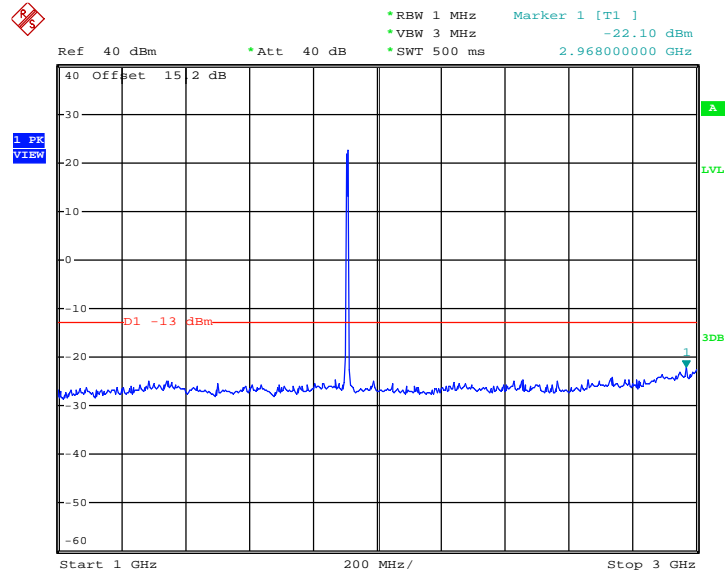

Date: 18.JUN.2014 05:01:44




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

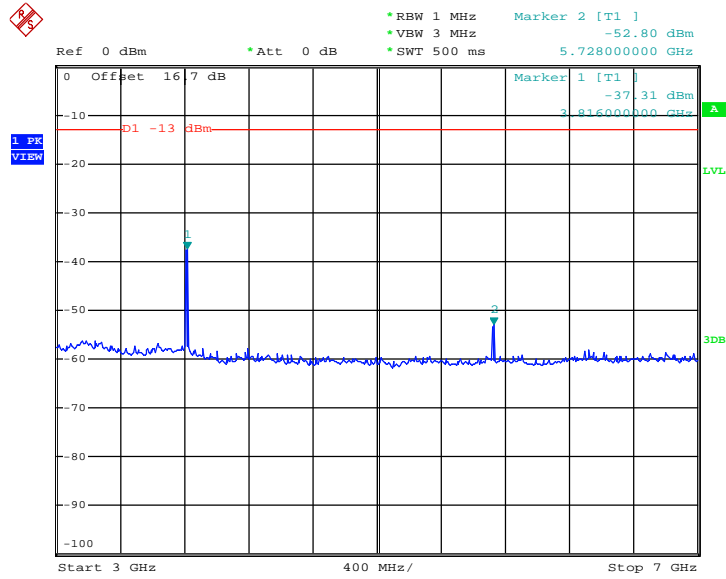

Date: 18.JUN.2014 05:12:04


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

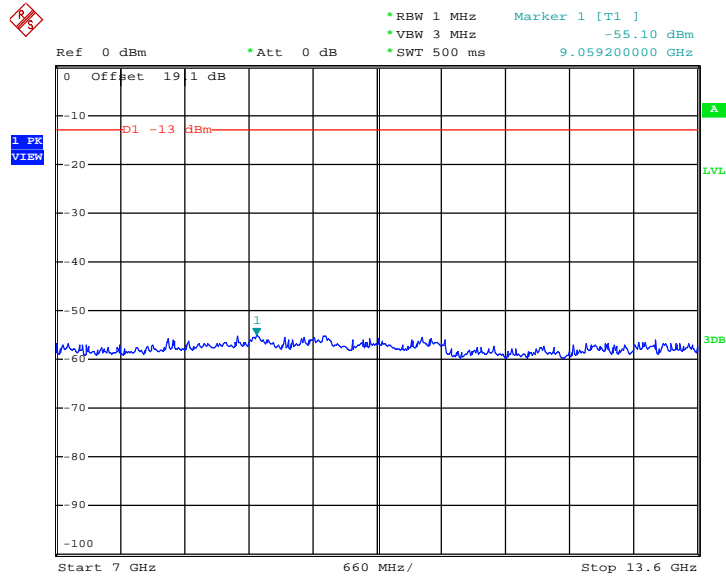

Date: 18.JUN.2014 05:14:26



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

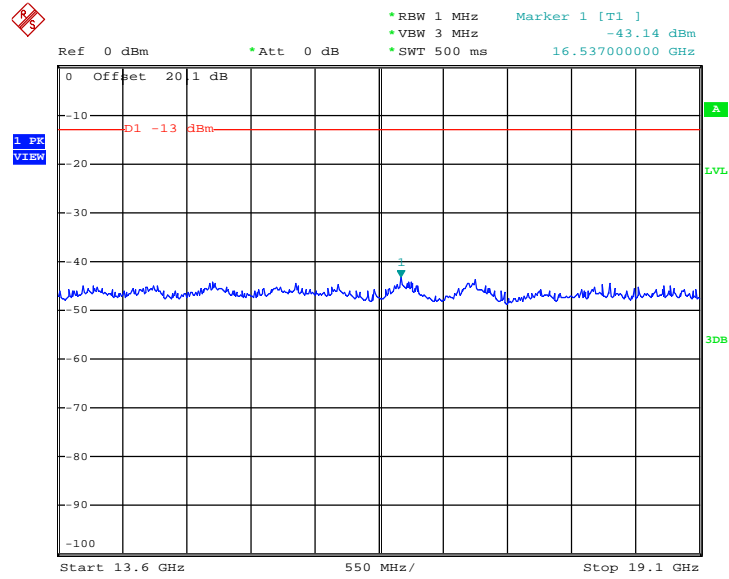


Date: 18.JUN.2014 05:17:29




Band :	GSM1900	Channel :	CH512
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1850.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

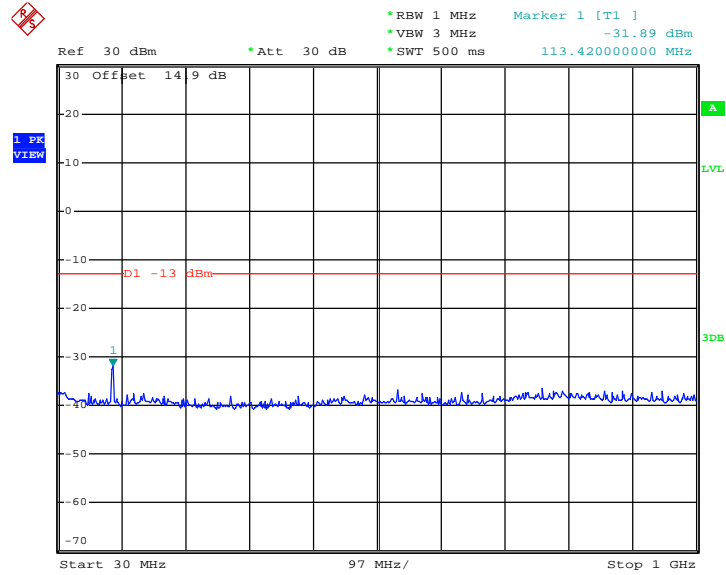

Date: 18.JUN.2014 04:55:59


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

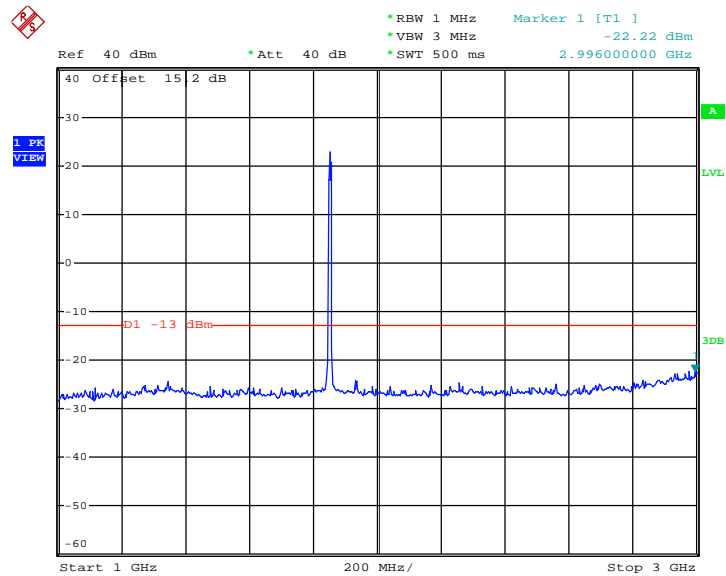

Date: 18.JUN.2014 04:58:47




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

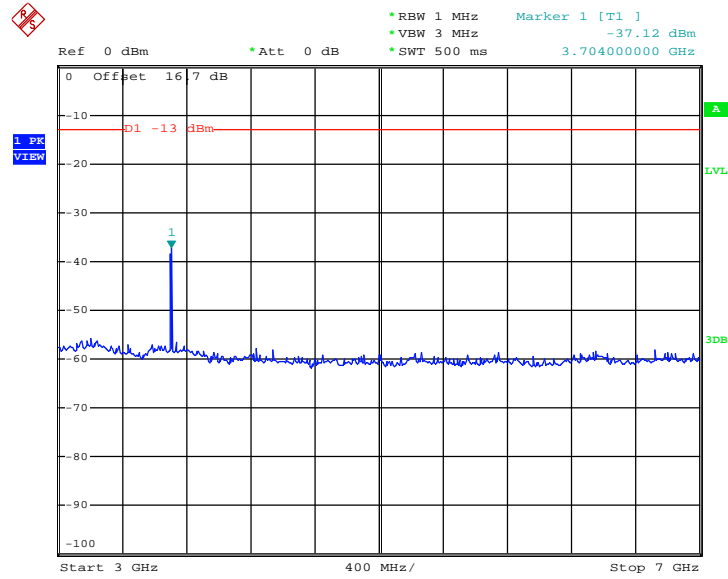

Date: 18.JUN.2014 05:09:45


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

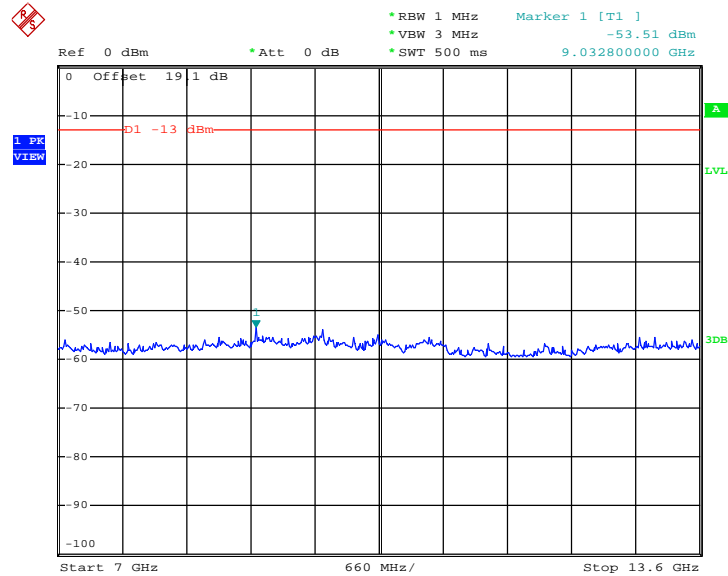

Date: 18.JUN.2014 05:13:10



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

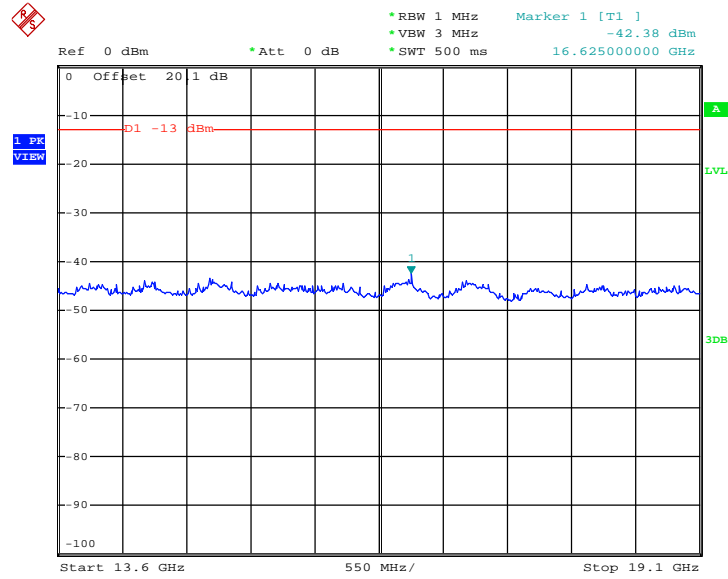


Date: 18.JUN.2014 05:15:48




Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

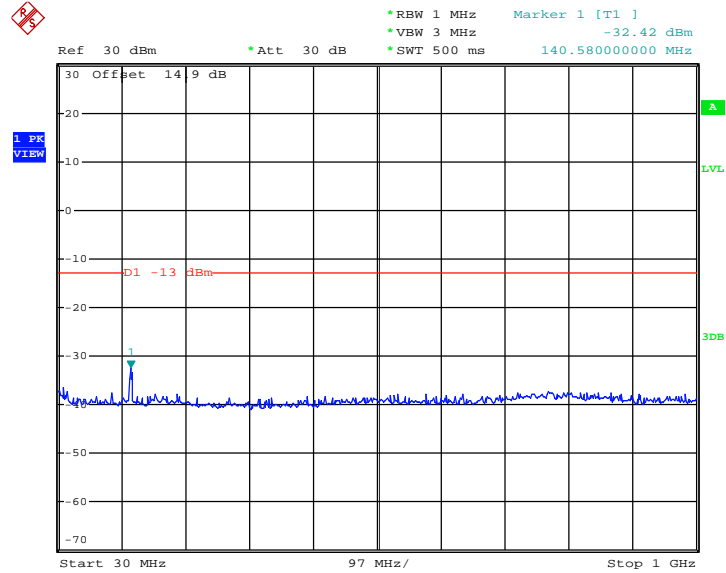

Date: 18.JUN.2014 04:56:45


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

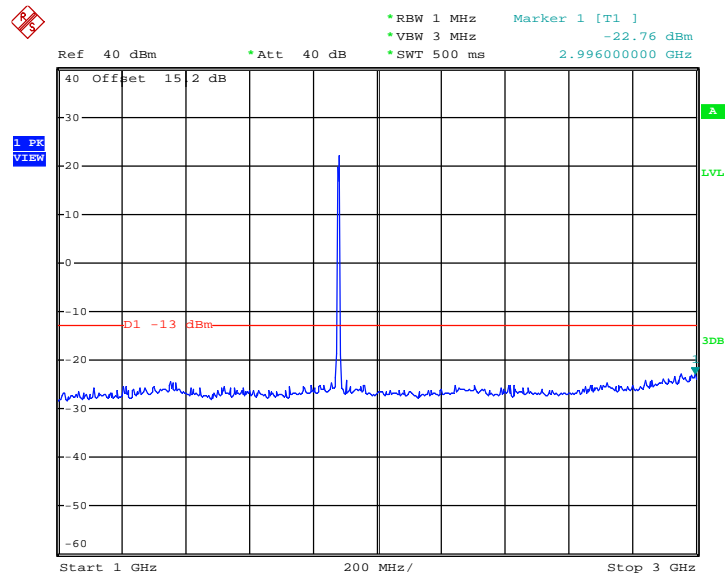

Date: 18.JUN.2014 05:00:15




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

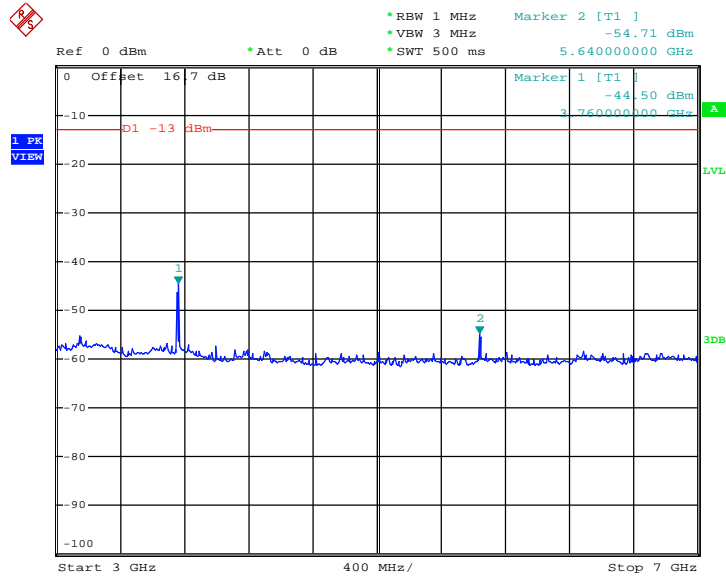

Date: 18.JUN.2014 05:10:45


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

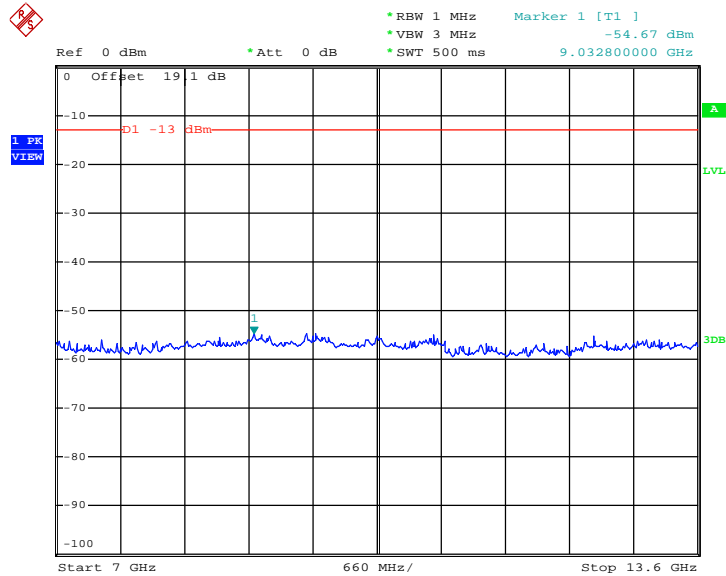

Date: 18.JUN.2014 07:33:18



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

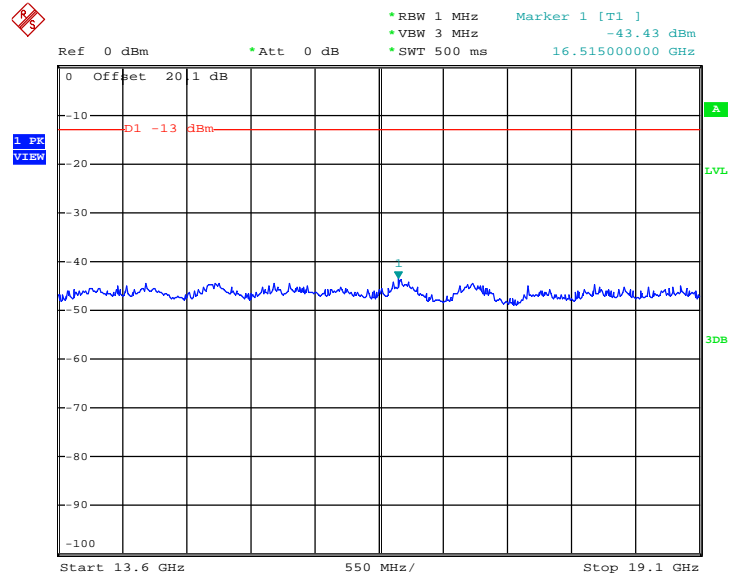


Date: 18.JUN.2014 05:16:35




Band :	GSM1900	Channel :	CH810
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1909.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

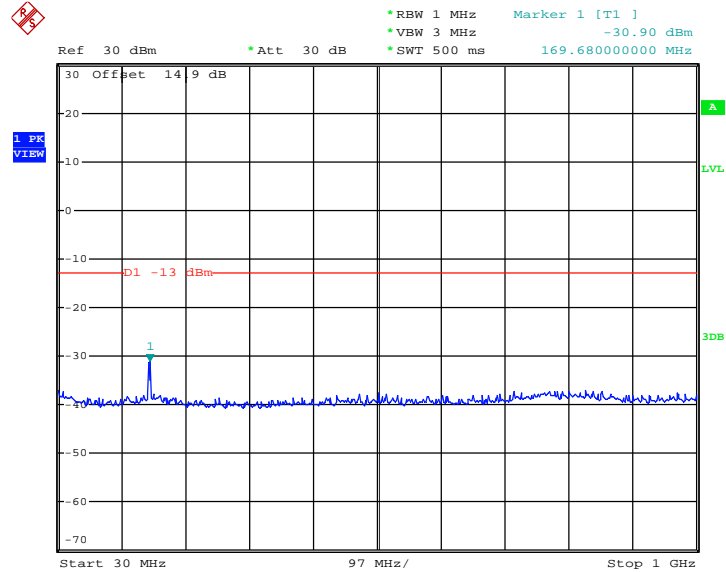

Date: 18.JUN.2014 04:57:28


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

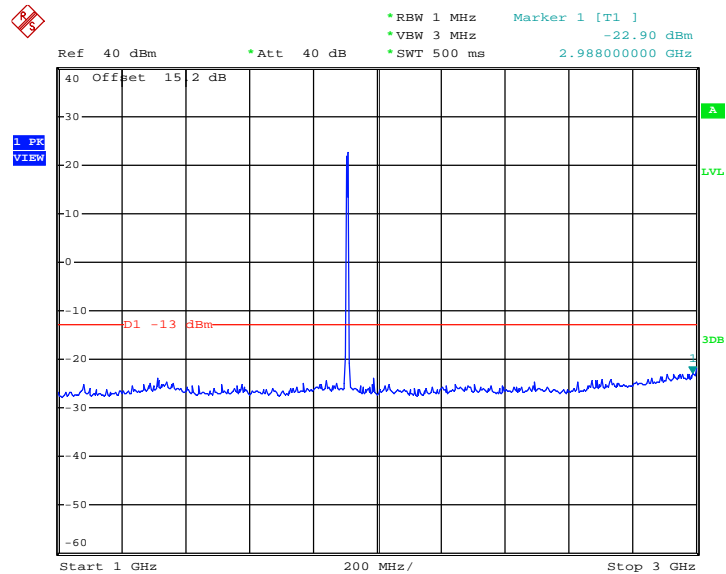

Date: 18.JUN.2014 05:01:27




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

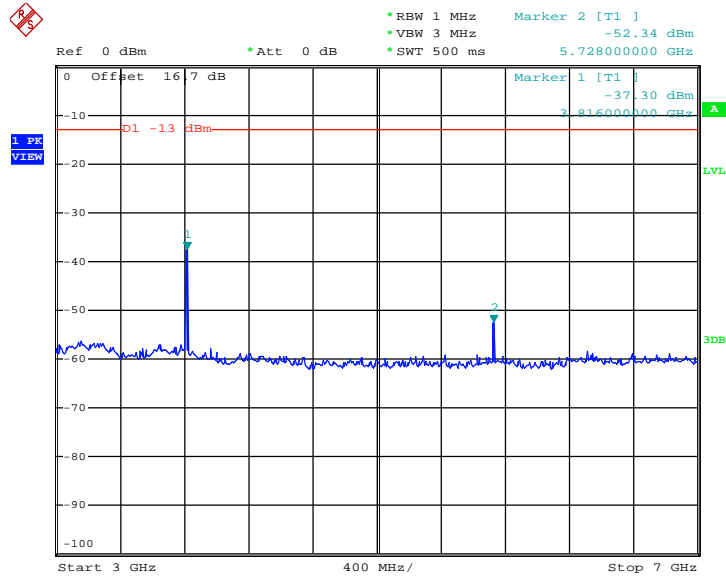

Date: 18.JUN.2014 05:11:52


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

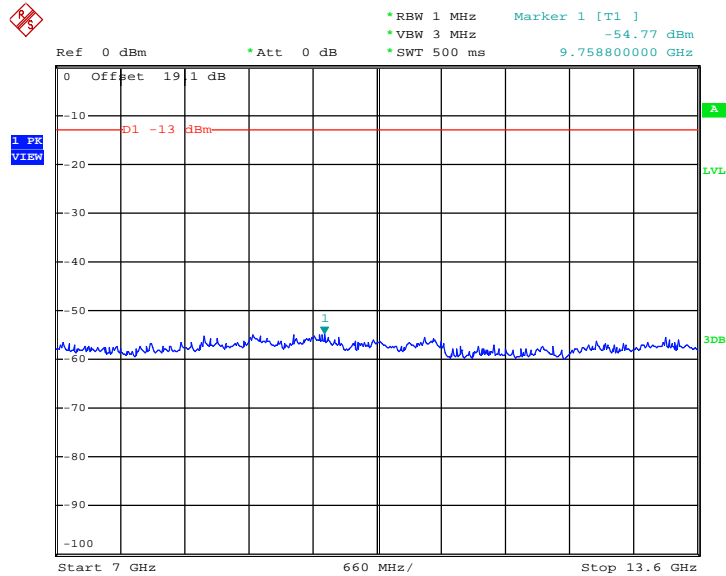

Date: 18.JUN.2014 05:14:17



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

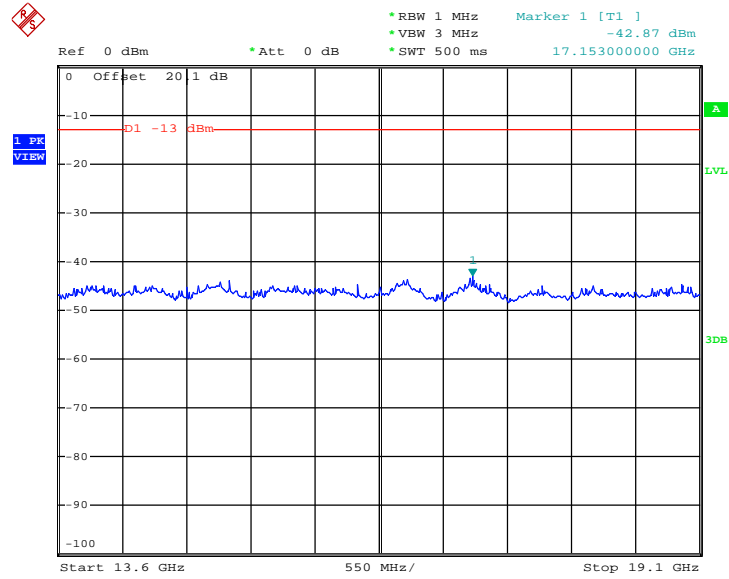


Date: 18.JUN.2014 05:17:20




Band :	WCDMA Band V	Channel :	CH4132
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	826.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

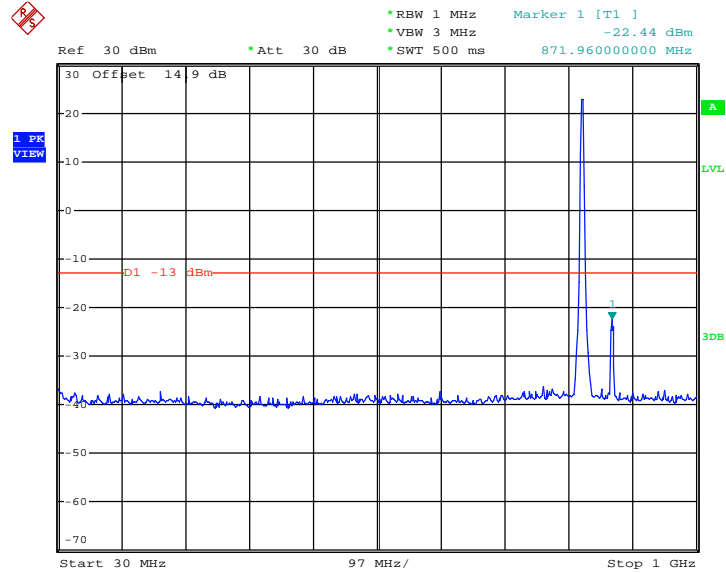

Date: 18.JUN.2014 04:27:26


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

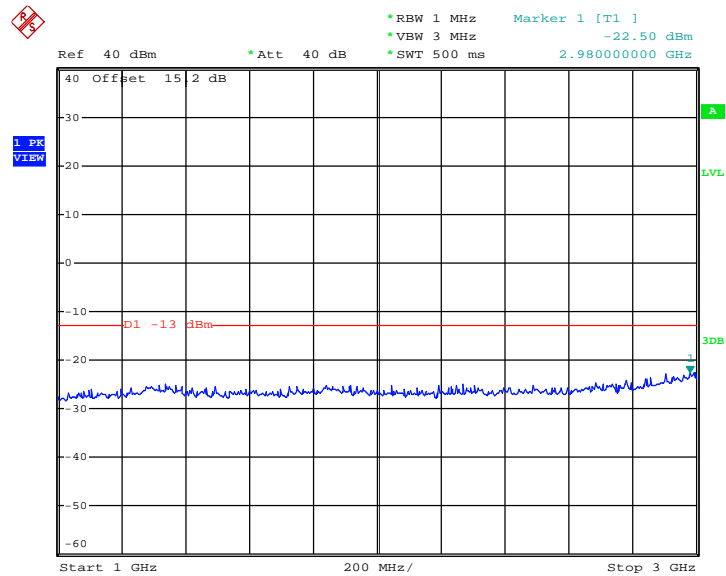

Date: 18.JUN.2014 04:28:40




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

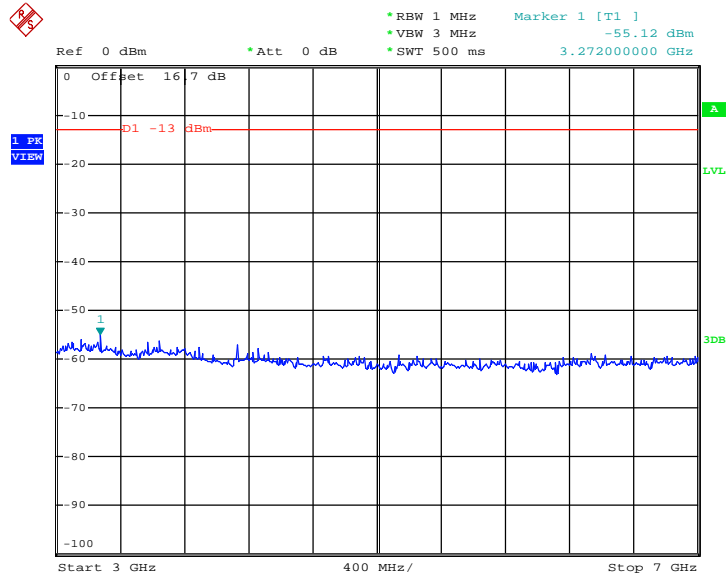

Date: 18.JUN.2014 04:33:15

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

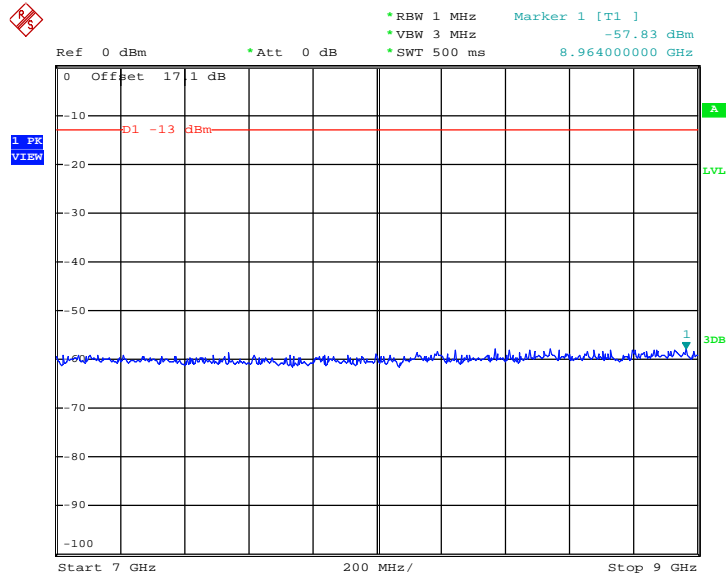


Date: 18.JUN.2014 04:35:58




Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

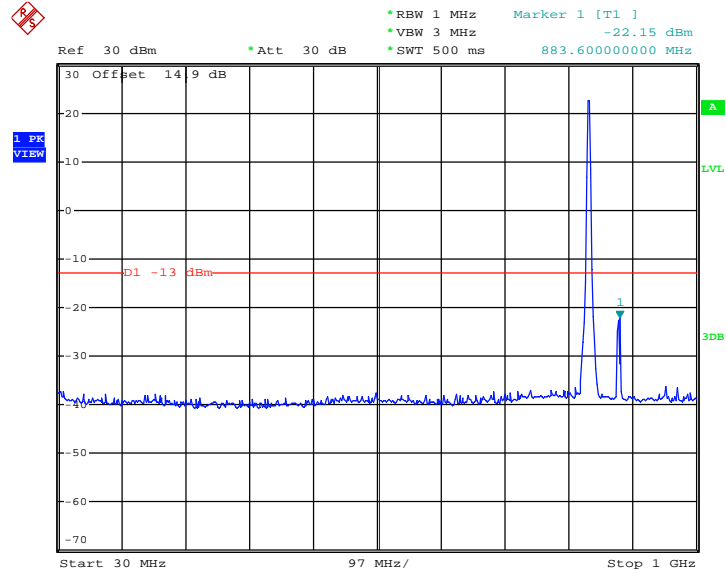

Date: 18.JUN.2014 04:26:48


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

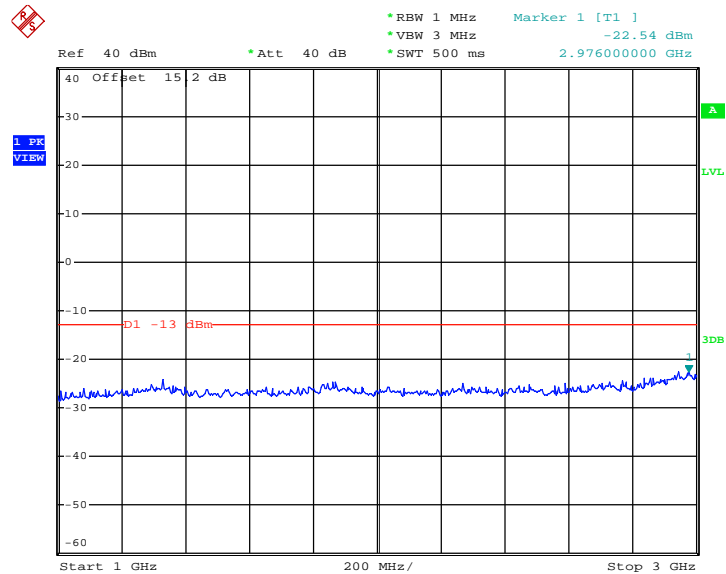

Date: 18.JUN.2014 04:29:32




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

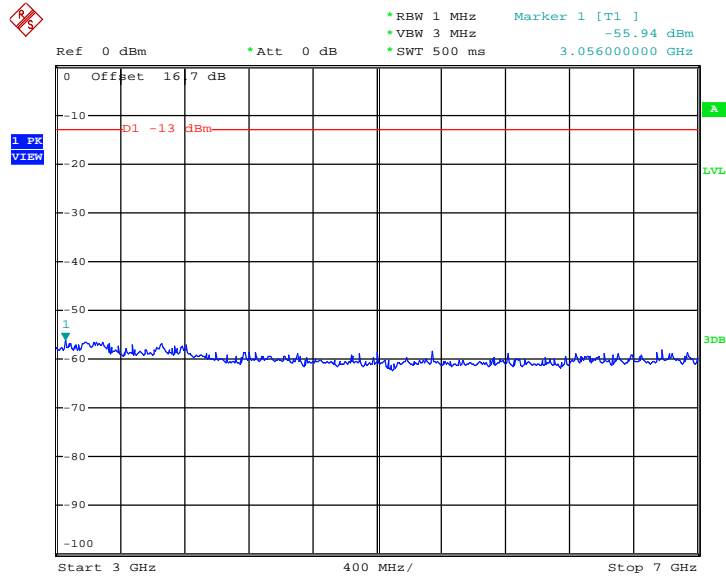

Date: 18.JUN.2014 04:34:05

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

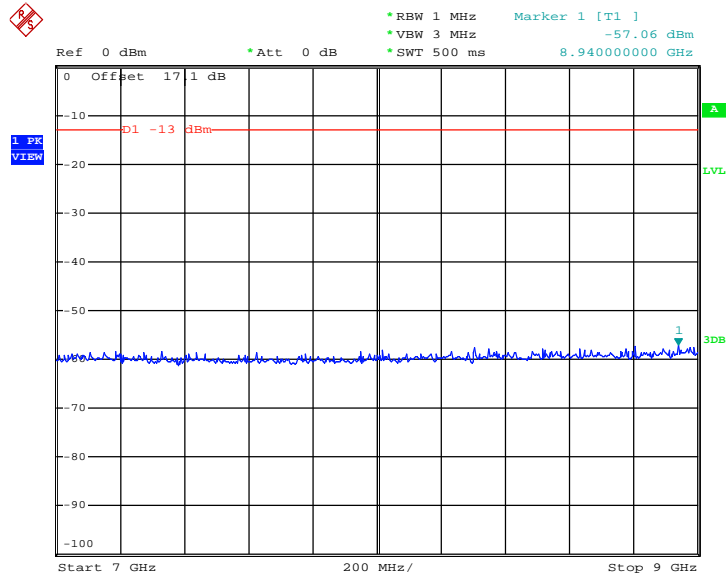


Date: 18.JUN.2014 04:36:42




Band :	WCDMA Band V	Channel :	CH4233
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	846.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

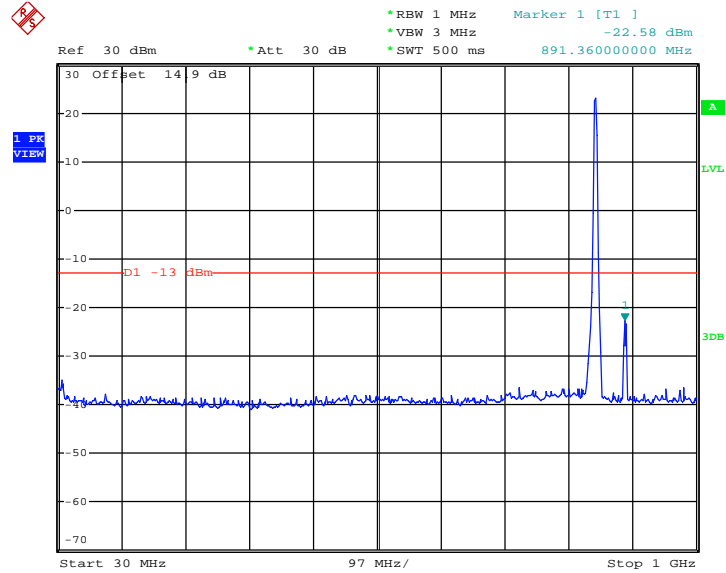

Date: 18.JUN.2014 04:26:08


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

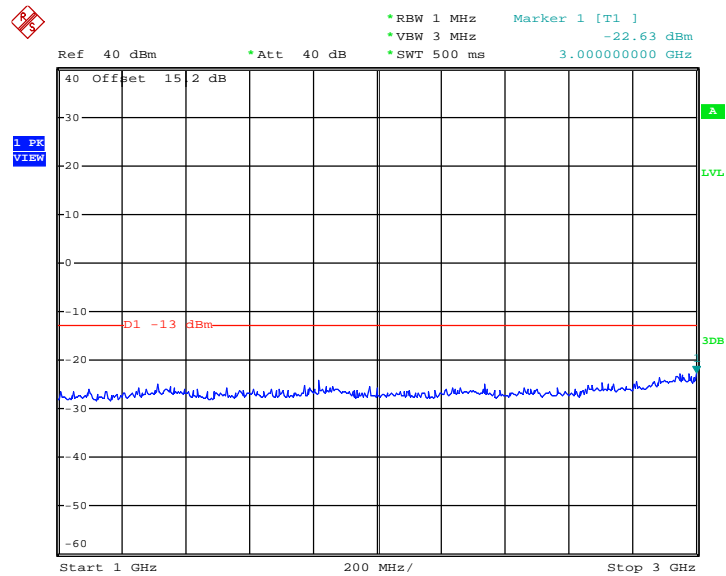

Date: 18.JUN.2014 04:30:18




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

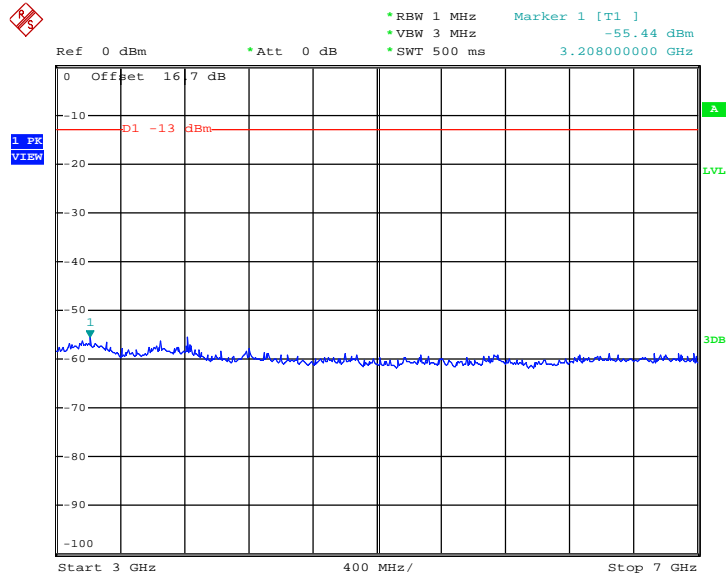

Date: 18.JUN.2014 04:34:49

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

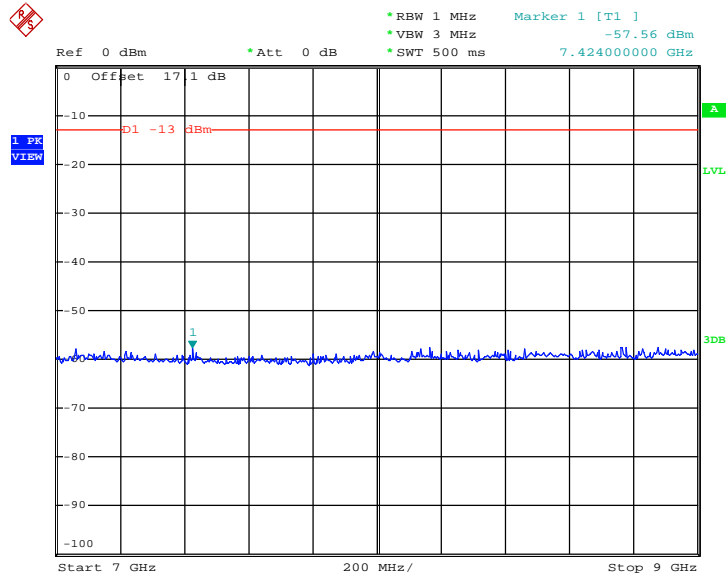


Date: 18.JUN.2014 04:39:40




Band :	WCDMA Band II	Channel :	CH9262
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1852.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

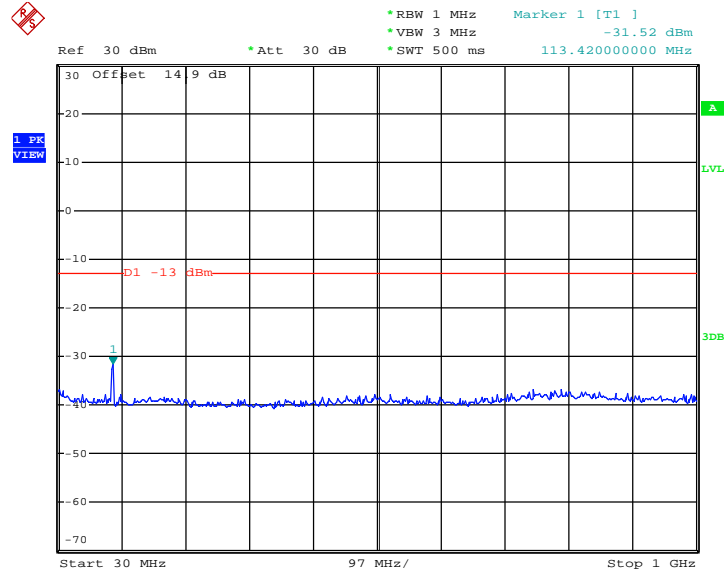

Date: 18.JUN.2014 04:56:23


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

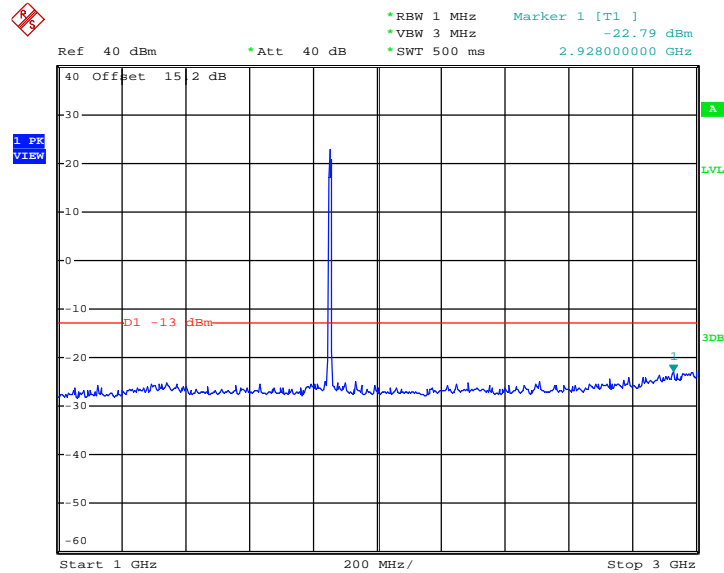

Date: 18.JUN.2014 04:59:34




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

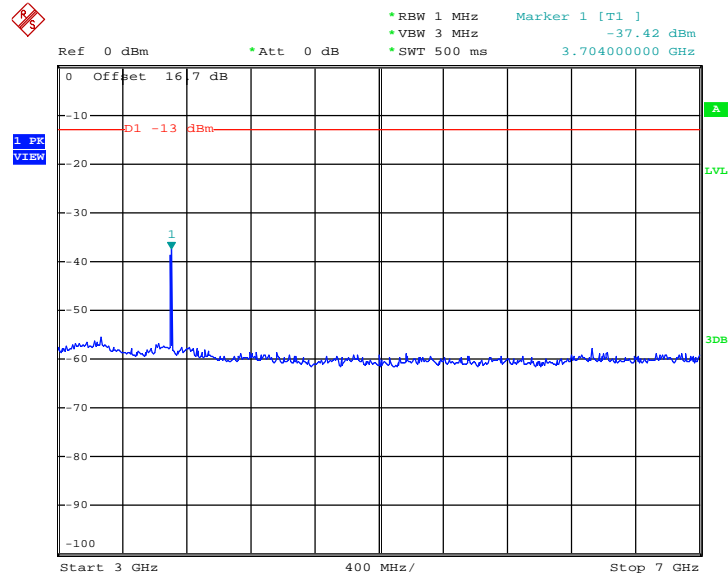

Date: 18.JUN.2014 05:10:11


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

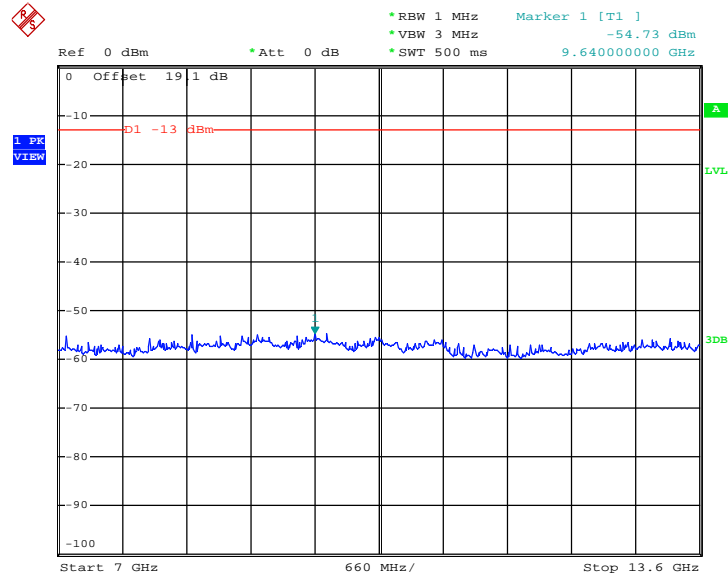

Date: 18.JUN.2014 05:13:32



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

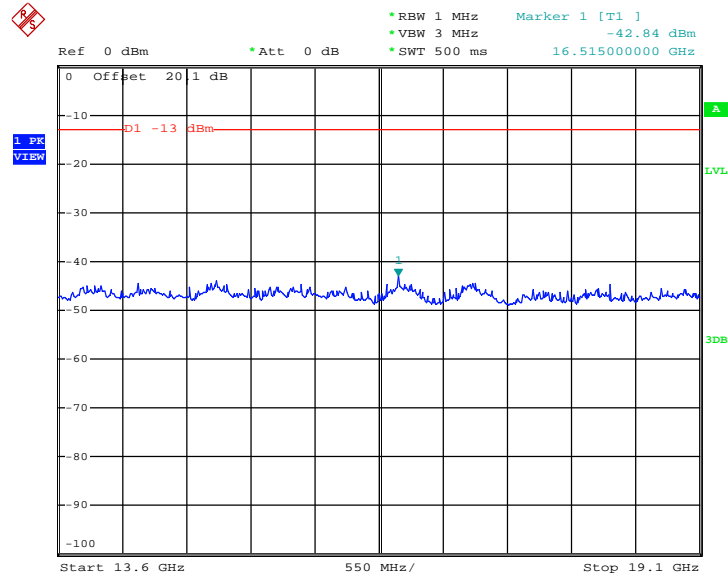


Date: 18.JUN.2014 05:16:13




Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

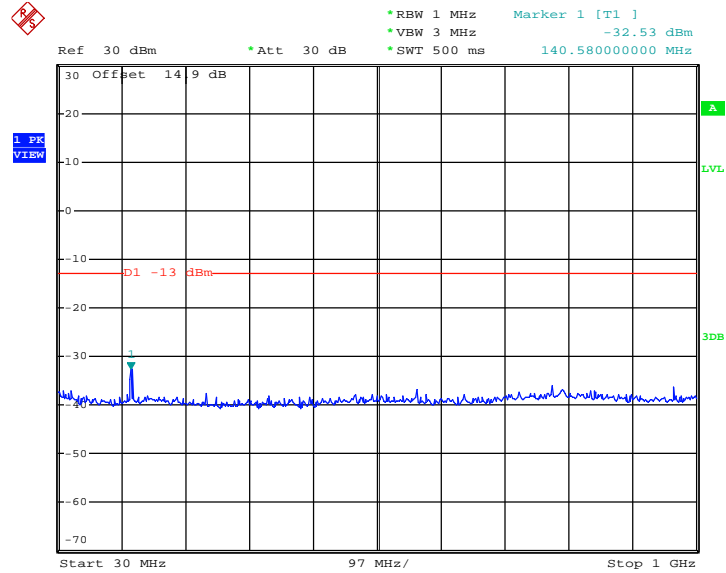

Date: 18.JUN.2014 04:57:04


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

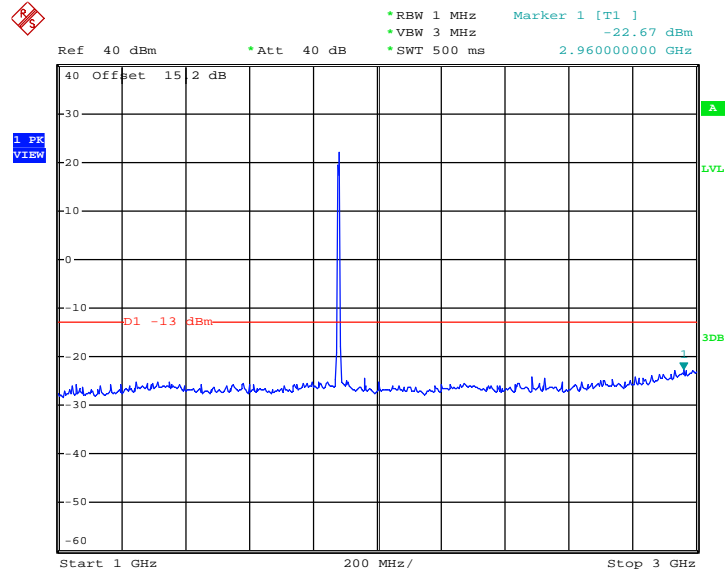

Date: 18.JUN.2014 05:00:49




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

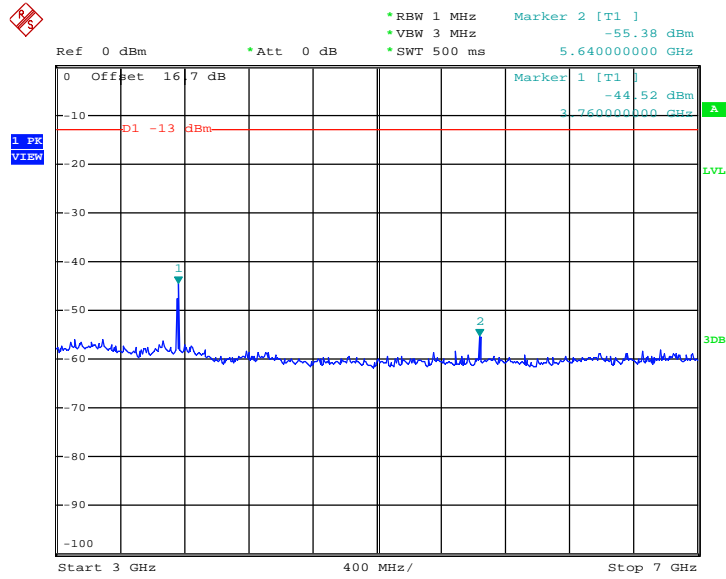

Date: 18.JUN.2014 05:11:22


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

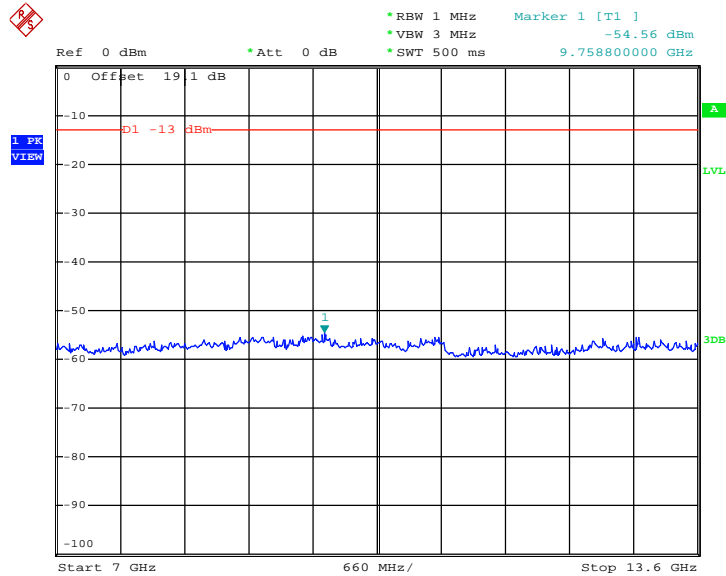

Date: 18.JUN.2014 07:33:53



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

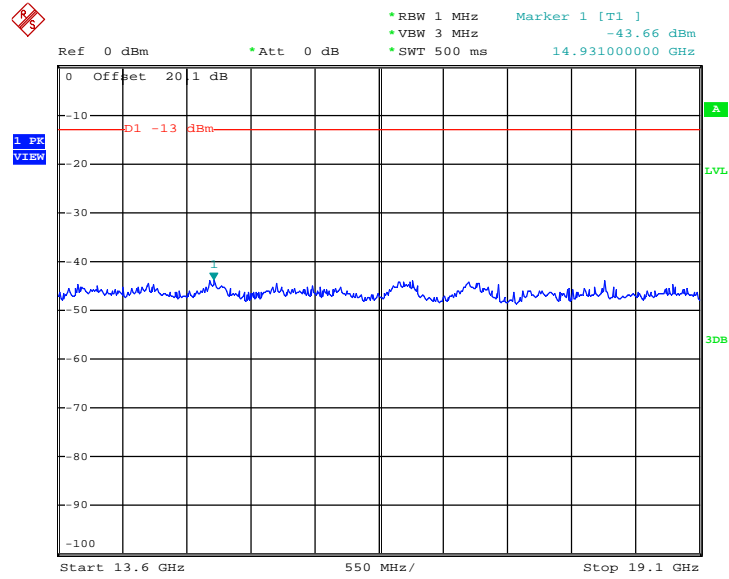


Date: 18.JUN.2014 05:16:54




Band :	WCDMA Band II	Channel :	CH9538
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1907.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

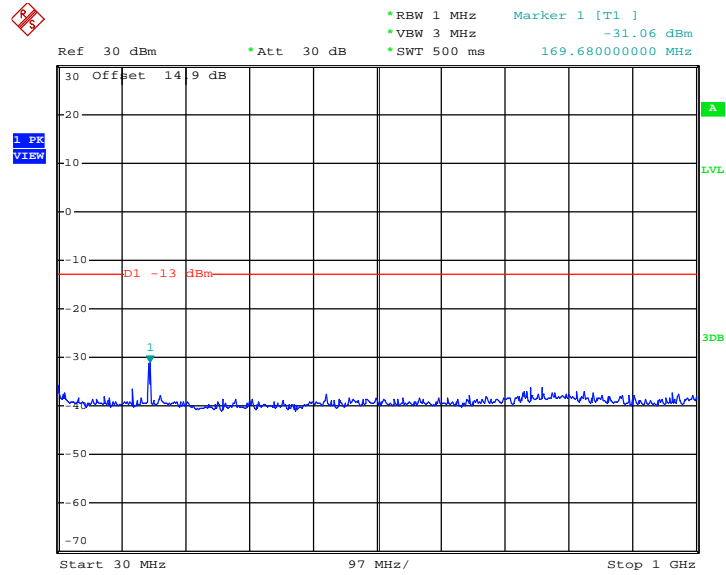

Date: 18.JUN.2014 04:57:44


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

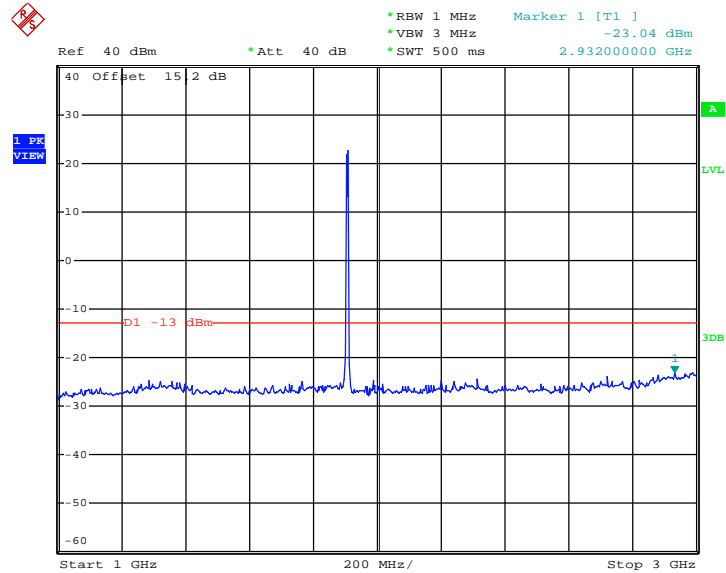

Date: 18.JUN.2014 05:02:05




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

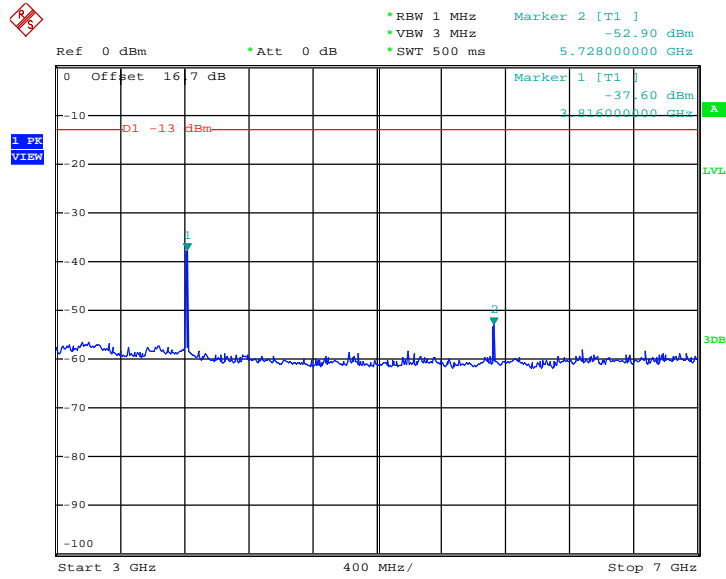

Date: 18.JUN.2014 05:12:13


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

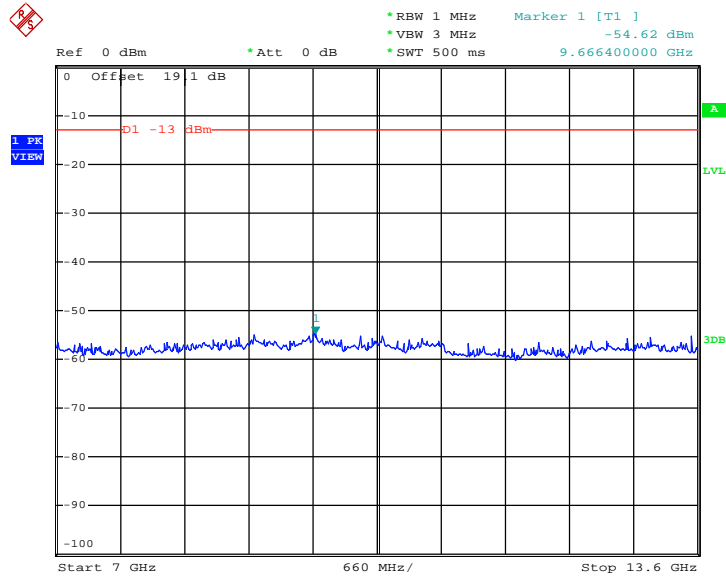

Date: 18.JUN.2014 05:14:35



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

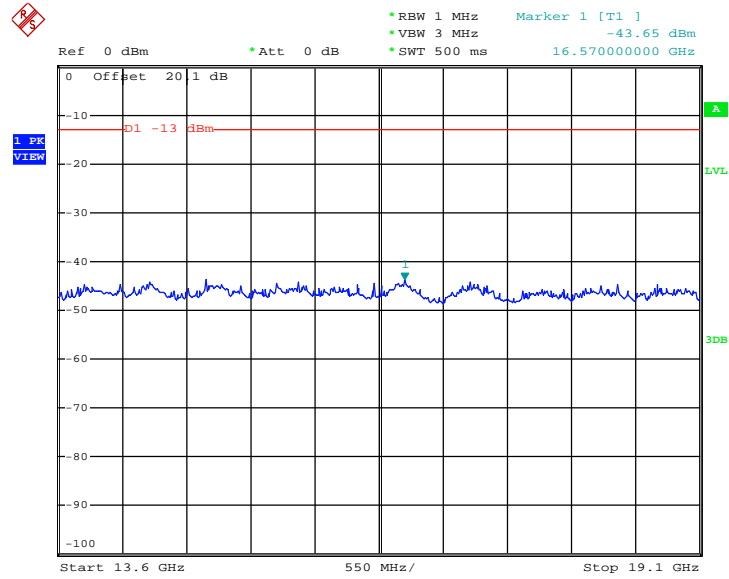

Date: 18.JUN.2014 05:17:38



3.7 Field Strength of Spurious Radiation Measurement

3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

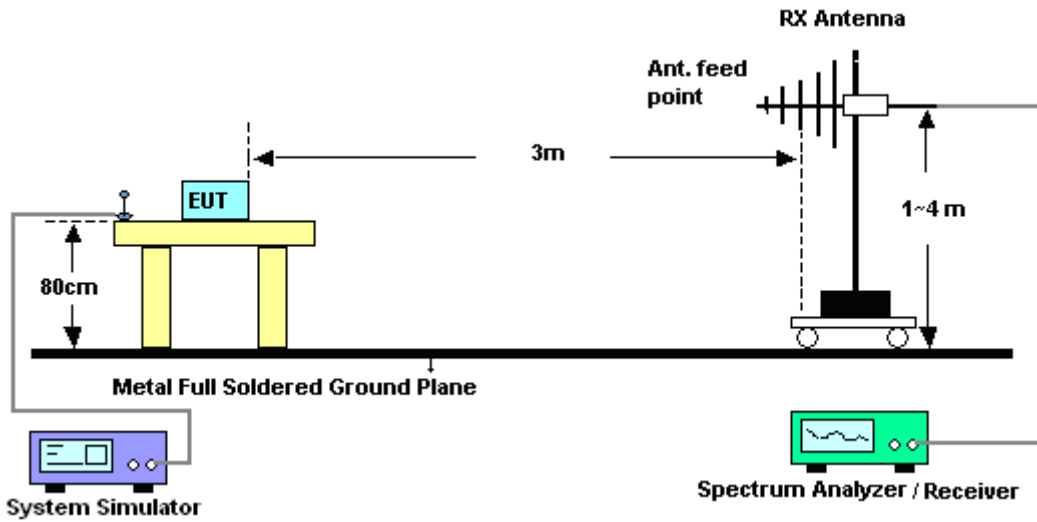

For radiated emissions above 1GHz

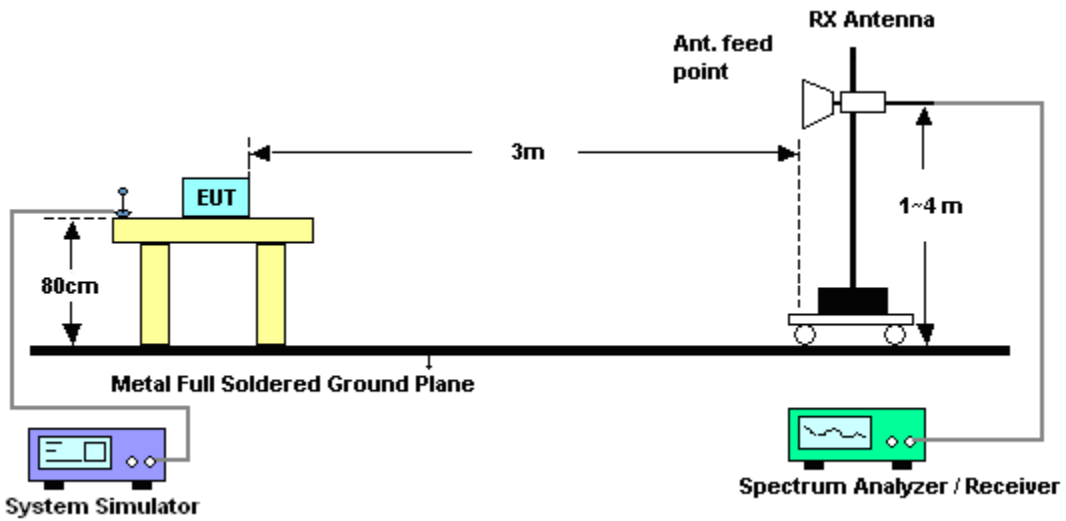



3.7.5 Test Result of Field Strength of Spurious Radiated

Band :	GSM850 for CH128		Temperature :	22~23°C					
Test Mode :	GSM Link (GMSK)		Relative Humidity :	42~43%					
Test Engineer :	Star Wei		Polarization :	Horizontal					
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-63.94	-13	-50.94	-57.60	-64.59	0.57	3.37	H	Pass
2474	-57.59	-13	-44.59	-57.86	-59.82	0.78	5.16	H	Pass
3294	-62.78	-13	-49.78	-62.41	-66.42	0.87	6.66	H	Pass
4122	-66.04	-13	-53.04	-65.73	-70.63	0.97	7.71	H	Pass
4944	-65.55	-13	-52.55	-67.19	-71.22	1.09	8.91	H	Pass
5772	-58.85	-13	-45.85	-64.31	-65.29	1.22	9.81	H	Pass
6594	-57.26	-13	-44.26	-65.85	-64.48	1.25	10.62	H	Pass
7422	-53.69	-13	-40.69	-61.69	-61.59	1.42	11.47	H	Pass

Band :	GSM850 for CH128		Temperature :	22~23°C					
Test Mode :	GSM Link (GMSK)		Relative Humidity :	42~43%					
Test Engineer :	Star Wei		Polarization :	Vertical					
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-55.80	-13	-42.80	-57.02	-56.45	0.57	3.37	V	Pass
2474	-41.73	-13	-28.73	-50.52	-43.96	0.78	5.16	V	Pass
3296	-61.94	-13	-48.94	-63.00	-65.58	0.87	6.66	V	Pass
4122	-63.48	-13	-50.48	-66.16	-68.07	0.97	7.71	V	Pass
4944	-60.11	-13	-47.11	-66.66	-65.78	1.09	8.91	V	Pass
5768	-60.95	-13	-47.95	-66.95	-67.39	1.22	9.81	V	Pass
6594	-56.71	-13	-43.71	-66.41	-63.93	1.25	10.62	V	Pass
7422	-53.46	-13	-40.46	-63.26	-61.36	1.42	11.47	V	Pass



Band :	GSM850 for CH189					Temperature :	22~23°C		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-56.98	-13	-43.98	-53.44	-57.63	0.57	3.37	H	Pass
2510	-56.44	-13	-43.44	-57.10	-58.67	0.78	5.16	H	Pass
3344	-64.18	-13	-51.18	-63.81	-67.82	0.87	6.66	H	Pass
4182	-65.43	-13	-52.43	-65.12	-70.02	0.97	7.71	H	Pass
5018	-66.58	-13	-53.58	-68.22	-72.25	1.09	8.91	H	Pass
5856	-55.33	-13	-42.33	-61.85	-61.77	1.22	9.81	H	Pass
6692	-58.19	-13	-45.19	-66.78	-65.41	1.25	10.62	H	Pass
7526	-53.13	-13	-40.13	-61.13	-61.03	1.42	11.47	H	Pass

Band :	GSM850 for CH189					Temperature :	22~23°C		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-46.08	-13	-33.08	-49.61	-46.73	0.57	3.37	V	Pass
2510	-44.12	-13	-31.12	-52.58	-46.35	0.78	5.16	V	Pass
3344	-62.40	-13	-49.40	-63.46	-66.04	0.87	6.66	V	Pass
4182	-64.46	-13	-51.46	-67.14	-69.05	0.97	7.71	V	Pass
5018	-61.64	-13	-48.64	-68.19	-67.31	1.09	8.91	V	Pass
5854	-61.30	-13	-48.30	-67.30	-67.74	1.22	9.81	V	Pass
6691	-56.53	-13	-43.53	-66.23	-63.75	1.25	10.62	V	Pass
7528	-51.99	-13	-38.99	-61.79	-59.89	1.42	11.47	V	Pass



Band :	GSM850 for CH251					Temperature :	22~23°C		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1698	-56.91	-13	-43.91	-53.39	-57.56	0.57	3.37	H	Pass
2548	-61.07	-13	-48.07	-59.74	-63.30	0.78	5.16	H	Pass
3396	-64.42	-13	-51.42	-64.05	-68.06	0.87	6.66	H	Pass
4248	-66.79	-13	-53.79	-66.48	-71.38	0.97	7.71	H	Pass
5094	-67.03	-13	-54.03	-68.67	-72.70	1.09	8.91	H	Pass
5940	-57.97	-13	-44.97	-63.43	-64.41	1.22	9.81	H	Pass
6792	-58.16	-13	-45.16	-66.75	-65.38	1.25	10.62	H	Pass
7644	-53.00	-13	-40.00	-61.00	-60.90	1.42	11.47	H	Pass

Band :	GSM850 for CH251					Temperature :	22~23°C		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1698	-44.02	-13	-31.02	-47.83	-44.67	0.57	3.37	V	Pass
2548	-45.92	-13	-32.92	-53.82	-48.15	0.78	5.16	V	Pass
3396	-64.37	-13	-51.37	-65.43	-68.01	0.87	6.66	V	Pass
4248	-63.97	-13	-50.97	-66.65	-68.56	0.97	7.71	V	Pass
5094	-61.91	-13	-48.91	-68.46	-67.58	1.09	8.91	V	Pass
5940	-60.98	-13	-47.98	-66.98	-67.42	1.22	9.81	V	Pass
6792	-57.25	-13	-44.25	-66.95	-64.47	1.25	10.62	V	Pass
7638	-53.84	-13	-40.84	-63.64	-61.74	1.42	11.47	V	Pass



Band :	GSM850 for CH128					Temperature :	22~23°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-70.65	-13	-57.65	-61.77	-71.30	0.57	3.37	H	Pass
2474	-66.39	-13	-53.39	-65.06	-68.62	0.78	5.16	H	Pass
3294	-65.03	-13	-52.03	-64.66	-68.67	0.87	6.66	H	Pass

Band :	GSM850 for CH128					Temperature :	22~23°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-63.21	-13	-50.21	-60.90	-63.86	0.57	3.37	V	Pass
2474	-59.13	-13	-46.13	-62.03	-61.36	0.78	5.16	V	Pass
3294	-63.95	-13	-50.95	-65.01	-67.59	0.87	6.66	V	Pass



Band :	GSM850 for CH189					Temperature :	22~23°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1674	-69.82	-13	-56.82	-60.94	-70.47	0.57	3.37	H	Pass
2509	-67.62	-13	-54.62	-66.29	-69.85	0.78	5.16	H	Pass
3344	-65.36	-13	-52.36	-64.99	-69.00	0.87	6.66	H	Pass

Band :	GSM850 for CH189					Temperature :	22~23°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1674	-53.19	-13	-40.19	-55.30	-53.84	0.57	3.37	V	Pass
2509	-63.48	-13	-50.48	-65.91	-65.71	0.78	5.16	V	Pass
3344	-64.68	-13	-51.68	-65.74	-68.32	0.87	6.66	V	Pass



Band :	GSM850 for CH251					Temperature :	22~23°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1698	-69.50	-13	-56.50	-60.62	-70.15	0.57	3.37	H	Pass
2548	-62.53	-13	-49.53	-61.20	-64.76	0.78	5.16	H	Pass
3396	-65.88	-13	-52.88	-65.51	-69.52	0.87	6.66	H	Pass

Band :	GSM850 for CH251					Temperature :	22~23°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1698	-59.13	-13	-46.13	-58.78	-59.78	0.57	3.37	V	Pass
2548	-52.05	-13	-39.05	-58.17	-54.28	0.78	5.16	V	Pass
3396	-65.08	-13	-52.08	-66.14	-68.72	0.87	6.66	V	Pass



Band :	GSM1900 for CH512				Temperature :	22~23°C			
Test Mode :	GSM Link (GMSK)				Relative Humidity :	42~43%			
Test Engineer :	Star Wei				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-62.11	-13	-49.11	-65.46	-68.49	0.78	7.16	H	Pass
5550	-48.87	-13	-35.87	-60.40	-57.41	1.04	9.58	H	Pass
7401	-51.04	-13	-38.04	-62.58	-61.15	1.35	11.46	H	Pass
9255	-52.51	-13	-39.51	-64.94	-63.57	1.75	12.81	H	Pass
11101	-43.97	-13	-30.97	-63.48	-55.06	2	13.09	H	Pass
12951	-43.65	-13	-30.65	-64.97	-55.36	2.04	13.75	H	Pass

Band :	GSM1900 for CH512				Temperature :	22~23°C			
Test Mode :	GSM Link (GMSK)				Relative Humidity :	42~43%			
Test Engineer :	Star Wei				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-57.28	-13	-44.28	-65.68	-63.66	0.78	7.16	V	Pass
5550	-43.52	-13	-30.52	-58.67	-52.06	1.04	9.58	V	Pass
7395	-45.17	-13	-32.17	-60.18	-55.28	1.35	11.46	V	Pass
9255	-49.09	-13	-36.09	-61.62	-60.15	1.75	12.81	V	Pass
11100	-39.92	-13	-26.92	-59.41	-51.01	2	13.09	V	Pass
12960	-44.09	-13	-31.09	-62.46	-55.80	2.04	13.75	V	Pass



Band :	GSM1900 for CH661				Temperature :	22~23°C			
Test Mode :	GSM Link (GMSK)				Relative Humidity :	42~43%			
Test Engineer :	Star Wei				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-61.57	-13	-48.57	-64.92	-67.95	0.78	7.16	H	Pass
5643	-47.54	-13	-34.54	-59.31	-56.08	1.04	9.58	H	Pass
7521	-51.25	-13	-38.25	-62.79	-61.36	1.35	11.46	H	Pass
9399	-51.58	-13	-38.58	-64.01	-62.64	1.75	12.81	H	Pass
11280	-46.48	-13	-33.48	-65.99	-57.57	2	13.09	H	Pass
13161	-43.76	-13	-30.76	-65.08	-55.47	2.04	13.75	H	Pass

Band :	GSM1900 for CH661				Temperature :	22~23°C			
Test Mode :	GSM Link (GMSK)				Relative Humidity :	42~43%			
Test Engineer :	Star Wei				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-56.44	-13	-43.44	-64.84	-62.82	0.78	7.16	V	Pass
5643	-38.57	-13	-25.57	-54.95	-47.11	1.04	9.58	V	Pass
7521	-46.85	-13	-33.85	-61.03	-56.96	1.35	11.46	V	Pass
9399	-40.43	-13	-27.43	-57.48	-51.49	1.75	12.81	V	Pass
11280	-41.94	-13	-28.94	-60.42	-53.03	2	13.09	V	Pass
13161	-41.21	-13	-28.21	-60.93	-52.92	2.04	13.75	V	Pass



Band :	GSM1900 for CH810				Temperature :	22~23°C			
Test Mode :	GSM Link (GMSK)				Relative Humidity :	42~43%			
Test Engineer :	Star Wei				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3825	-62.34	-13	-49.34	-65.69	-68.72	0.78	7.16	H	Pass
5729	-55.30	-13	-42.30	-65.36	-63.84	1.04	9.58	H	Pass
7639	-54.73	-13	-41.73	-66.27	-64.84	1.35	11.46	H	Pass
9555	-50.73	-13	-37.73	-63.16	-61.79	1.75	12.81	H	Pass

Band :	GSM1900 for CH810				Temperature :	22~23°C			
Test Mode :	GSM Link (GMSK)				Relative Humidity :	42~43%			
Test Engineer :	Star Wei				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3820	-56.17	-13	-43.17	-64.57	-62.55	0.78	7.16	V	Pass
5730	-41.02	-13	-28.02	-56.98	-49.56	1.04	9.58	V	Pass
7639	-49.05	-13	-36.05	-63.14	-59.16	1.35	11.46	V	Pass
9555	-45.18	-13	-32.18	-59.94	-56.24	1.75	12.81	V	Pass



Band :	GSM1900 for CH512				Temperature :	22~23°C			
Test Mode :	EDGE class 8 Link (8PSK)				Relative Humidity :	42~43%			
Test Engineer :	Star Wei				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-58.40	-13	-45.40	-61.94	-64.78	0.78	7.16	H	Pass
5551	-55.39	-13	-42.39	-65.45	-63.93	1.04	9.58	H	Pass
7401	-52.34	-13	-39.34	-63.88	-62.45	1.35	11.46	H	Pass

Band :	GSM1900 for CH512				Temperature :	22~23°C			
Test Mode :	EDGE class 8 Link (8PSK)				Relative Humidity :	42~43%			
Test Engineer :	Star Wei				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-55.55	-13	-42.55	-63.95	-61.93	0.78	7.16	V	Pass
5550	-51.77	-13	-38.77	-64.42	-60.31	1.04	9.58	V	Pass
7401	-49.98	-13	-36.98	-64.07	-60.09	1.35	11.46	V	Pass



Band :	GSM1900 for CH661					Temperature :	22~23°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3759	-55.12	-13	-42.12	-60.31	-61.50	0.78	7.16	H	Pass
5640	-58.37	-13	-45.37	-68.43	-66.91	1.04	9.58	H	Pass
7520	-53.89	-13	-40.89	-65.43	-64.00	1.35	11.46	H	Pass

Band :	GSM1900 for CH661					Temperature :	22~23°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3759	-53.14	-13	-40.14	-61.54	-59.52	0.78	7.16	V	Pass
5640	-55.12	-13	-42.12	-67.77	-63.66	1.04	9.58	V	Pass
7520	-52.29	-13	-39.29	-66.38	-62.40	1.35	11.46	V	Pass



Band :	GSM1900 for CH810					Temperature :	22~23°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3820	-59.88	-13	-46.88	-63.23	-66.26	0.78	7.16	H	Pass
5729	-56.89	-13	-43.89	-66.95	-65.43	1.04	9.58	H	Pass
7639	-55.77	-13	-42.77	-67.31	-65.88	1.35	11.46	H	Pass

Band :	GSM1900 for CH810					Temperature :	22~23°C		
Test Mode :	EDGE class 8 Link (8PSK)					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3820	-56.55	-13	-43.55	-64.95	-62.93	0.78	7.16	V	Pass
5729	-52.50	-13	-39.50	-65.15	-61.04	1.04	9.58	V	Pass
7639	-51.57	-13	-38.57	-65.66	-61.68	1.35	11.46	V	Pass



Band :	WCDMA Band V for CH4132	Temperature :	22~23°C						
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	42~43%						
Test Engineer :	Star Wei	Polarization :	Horizontal						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1650	-68.04	-13	-55.04	-59.64	-68.69	0.57	3.37	H	Pass
2479	-66.16	-13	-53.16	-64.83	-68.39	0.78	5.16	H	Pass
3306	-66.04	-13	-53.04	-65.67	-69.68	0.87	6.66	H	Pass

Band :	WCDMA Band V for CH4132	Temperature :	22~23°C						
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	42~43%						
Test Engineer :	Star Wei	Polarization :	Vertical						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1656	-57.05	-13	-44.05	-57.68	-57.70	0.57	3.37	V	Pass
2484	-55.16	-13	-42.16	-59.85	-57.39	0.78	5.16	V	Pass
3306	-64.76	-13	-51.76	-65.82	-68.40	0.87	6.66	V	Pass



Band :	WCDMA Band V for CH4182	Temperature :	22~23°C						
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	42~43%						
Test Engineer :	Star Wei	Polarization :	Horizontal						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1676	-60.12	-13	-47.12	-55.44	-60.77	0.57	3.37	H	Pass
2509	-65.77	-13	-52.77	-64.44	-68.00	0.78	5.16	H	Pass
3344	-66.18	-13	-53.18	-65.81	-69.82	0.87	6.66	H	Pass

Band :	WCDMA Band V for CH4182	Temperature :	22~23°C						
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	42~43%						
Test Engineer :	Star Wei	Polarization :	Vertical						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-49.60	-13	-36.60	-52.49	-50.25	0.57	3.37	V	Pass
2514	-59.78	-13	-46.78	-62.33	-62.01	0.78	5.16	V	Pass
3344	-64.29	-13	-51.29	-65.35	-67.93	0.87	6.66	V	Pass



Band :	WCDMA Band V for CH4233		Temperature :	22~23°C					
Test Mode :	RMC 12.2Kbps Link (QPSK)		Relative Humidity :	42~43%					
Test Engineer :	Star Wei		Polarization :	Horizontal					
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-57.49	-13	-44.49	-53.90	-58.14	0.57	3.37	H	Pass
2538	-61.55	-13	-48.55	-60.22	-63.78	0.78	5.16	H	Pass
3384	-64.88	-13	-51.88	-64.51	-68.52	0.87	6.66	H	Pass

Band :	WCDMA Band V for CH4233		Temperature :	22~23°C					
Test Mode :	RMC 12.2Kbps Link (QPSK)		Relative Humidity :	42~43%					
Test Engineer :	Star Wei		Polarization :	Vertical					
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-48.96	-13	-35.96	-51.98	-49.61	0.57	3.37	V	Pass
2536	-52.65	-13	-39.65	-58.68	-54.88	0.78	5.16	V	Pass
3384	-64.49	-13	-51.49	-65.55	-68.13	0.87	6.66	V	Pass



Band :	WCDMA Band II for CH9262	Temperature :	22~23°C						
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	42~43%						
Test Engineer :	Star Wei	Polarization :	Horizontal						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3705	-60.81	-13	-47.81	-64.16	-67.19	0.78	7.16	H	Pass
5550	-49.89	-13	-36.89	-61.22	-58.43	1.04	9.58	H	Pass
7410	-53.48	-13	-40.48	-65.02	-63.59	1.35	11.46	H	Pass

Band :	WCDMA Band II for CH9262	Temperature :	22~23°C						
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	42~43%						
Test Engineer :	Star Wei	Polarization :	Vertical						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3690	-50.39	-13	-37.39	-59.33	-56.77	0.78	7.16	V	Pass
5557	-51.76	-13	-38.76	-64.41	-60.30	1.04	9.58	V	Pass
7410	-51.18	-13	-38.18	-65.27	-61.29	1.35	11.46	V	Pass



Band :	WCDMA Band II for CH9400	Temperature :	22~23°C						
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	42~43%						
Test Engineer :	Star Wei	Polarization :	Horizontal						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3762	-56.30	-13	-43.30	-61.31	-62.68	0.78	7.16	H	Pass
5646	-52.13	-13	-39.13	-62.19	-60.67	1.04	9.58	H	Pass
7521	-52.39	-13	-39.39	-63.93	-62.50	1.35	11.46	H	Pass

Band :	WCDMA Band II for CH9400	Temperature :	22~23°C						
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	42~43%						
Test Engineer :	Star Wei	Polarization :	Vertical						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3756	-49.22	-13	-36.22	-58.35	-55.60	0.78	7.16	V	Pass
5646	-50.67	-13	-37.67	-63.32	-59.21	1.04	9.58	V	Pass
7521	-50.78	-13	-37.78	-64.87	-60.89	1.35	11.46	V	Pass



Band :	WCDMA Band II for CH9538				Temperature :	22~23°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)				Relative Humidity :	42~43%			
Test Engineer :	Star Wei				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3810	-58.97	-13	-45.97	-62.33	-65.35	0.78	7.16	H	Pass
5723	-54.57	-13	-41.57	-64.63	-63.11	1.04	9.58	H	Pass
7630	-53.88	-13	-40.88	-65.42	-63.99	1.35	11.46	H	Pass

Band :	WCDMA Band II for CH9538				Temperature :	22~23°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)				Relative Humidity :	42~43%			
Test Engineer :	Star Wei				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3815	-54.18	-13	-41.18	-62.58	-60.56	0.78	7.16	V	Pass
5723	-52.38	-13	-39.38	-65.03	-60.92	1.04	9.58	V	Pass
7635	-51.01	-13	-38.01	-65.1	-61.12	1.35	11.46	V	Pass

3.8 Frequency Stability Measurement

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.8.5 Test Setup

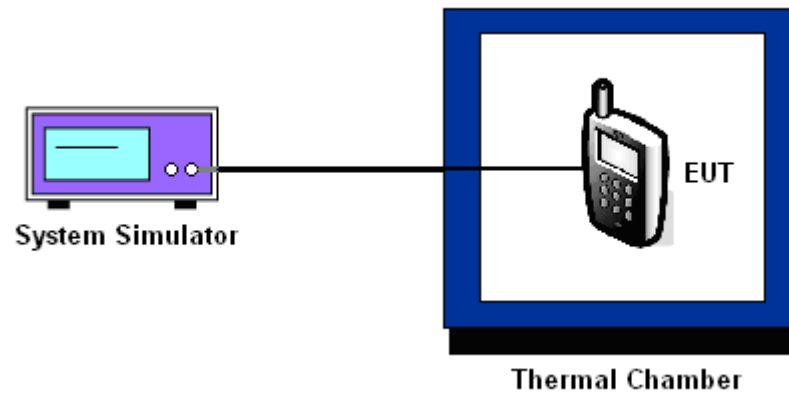



3.8.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	GSM		EDGE class 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-32	-0.04	-30	-0.04	PASS
-20	-26	-0.03	-24	-0.03	
-10	-18	-0.02	-17	-0.02	
0	-12	-0.01	-13	-0.02	
10	-16	-0.02	-15	-0.02	
20(Ref.)	-24	-0.03	-23	-0.03	
30	-31	-0.04	-28	-0.03	
40	-35	-0.04	-32	-0.04	
50	-41	-0.05	-37	-0.04	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	GSM		EDGE class 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-32	-0.02	-33	-0.02	PASS
-20	-26	-0.01	-25	-0.01	
-10	-15	-0.01	-15	-0.01	
0	-12	-0.01	-13	-0.01	
10	-16	-0.01	-14	-0.01	
20(Ref.)	-22	-0.01	-29	-0.02	
30	-29	-0.02	-33	-0.02	
40	-35	-0.02	-36	-0.02	
50	-42	-0.02	-42	-0.02	



Band :	WCDMA Band V	Channel :	4182
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-31	-0.04	PASS
-20	-24	-0.03	
-10	-16	-0.02	
0	-12	-0.01	
10	-13	-0.02	
20(Ref.)	-23	-0.03	
30	-28	-0.03	
40	-32	-0.04	
50	-34	-0.04	

Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-32	-0.02	PASS
-20	-26	-0.01	
-10	-15	-0.01	
0	-12	-0.01	
10	-18	-0.01	
20(Ref.)	-29	-0.02	
30	-30	-0.02	
40	-36	-0.02	
50	-46	-0.02	



3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GSM	3.7	-13	-0.02	2.5	PASS
		BEP	-8	-0.01		
		4.2	-10	-0.01		
	EDGE class 8	3.7	-16	-0.02		
		BEP	-11	-0.01		
		4.2	-10	-0.01		
GSM 1900 CH661	GSM	3.7	-16	-0.01		
		BEP	-11	-0.01		
		4.2	-12	-0.01		
	EDGE class 8	3.7	-15	-0.01		
		BEP	-13	-0.01		
		4.2	-12	-0.01		
WCDMA Band V CH4182	RMC 12.2Kbps	3.7	-13	-0.02		
		BEP	-8	-0.01		
		4.2	-12	-0.01		
WCDMA Band II CH9400	RMC 12.2Kbps	3.7	-15	-0.01		
		BEP	-11	-0.01		
		4.2	-16	-0.01		

Note:

1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.6 V.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Jun. 18, 2014~ Jun. 19, 2014	Dec. 27, 2014	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV30	101338	9kHz~30GHz	May 04, 2014	Jun. 18, 2014~ Jun. 19, 2014	May 03, 2015	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Dec. 10, 2013	Jun. 18, 2014~ Jun. 19, 2014	Dec. 09, 2014	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 05, 2013	Jul. 02, 2014	Nov. 04, 2014	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	101399	9kHz~30GHz	May 04, 2014	Jul. 02, 2014	May 03, 2015	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 08, 2014	Jul. 02, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 08, 2014	Jul. 02, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 18, 2013	Jul. 02, 2014	Nov. 17, 2014	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Mar. 10, 2014	Jul. 02, 2014	Mar. 09, 2015	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161073	1MHz~1GHz	May 04, 2014	Jul. 02, 2014	May 03, 2015	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02371	1GHz~26.5GHz	Dec. 10, 2013	Jul. 02, 2014	Dec. 09, 2014	Radiation (03CH01-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 02, 2014	NCR	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jul. 02, 2014	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jul. 02, 2014	NCR	Radiation (03CH01-KS)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5
---	-----