



Partial FCC RF Test Report

APPLICANT : Acer Inc.
EQUIPMENT : 3G Module
BRAND NAME : Acer, Gateway, PackardBell
MODEL NAME : EM770W
FCC ID : HLZEM770W
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter (PCB)
Tx/Rx FREQUENCY RANGE : GSM850 : 824.2 ~ 848.8 MHz /
869.2 ~ 893.8 MHz
GSM1900 : 1850.2 ~ 1909.8 MHz /
1930.2 ~ 1989.8 MHz
WCDMA Band V : 826.4 ~ 846.6 MHz /
871.4 ~ 891.6 MHz
WCDMA Band II : 1852.4 ~ 1907.6 MHz /
1932.4 ~ 1987.6 MHz
MAX. ERP/EIRP POWER : GSM850 (GPRS 8) : 0.37 W
GSM850 (EDGE 8) : 0.22 W
GSM1900 (GPRS 8) : 0.73 W
GSM1900 (EDGE 8) : 0.71 W
WCDMA Band V (RMC 12.2Kbps) : 0.05 W
WCDMA Band II (RMC 12.2Kbps) : 0.15 W

This is a partial report which is only valid combined with the WWAN Module (Brand Name: Huawei / Model Name: EM770W, FCC ID: QISEM770W)

The product was installed into Acer Laptop Computer (Brand Name: Acer, Gateway, PackardBell / Model Name: ZH8, ZH7 / Marketing Name: Aspire one, AS1810T, AS1410, AS1810TZ; EC14 series, EC18 series; dot m/u; dor mr/u) during the test.

The product was received on Aug. 26, 2009 and completely tested on Dec. 03, 2009. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Roy Wu / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : HLZEM770W

Page Number : 1 of 33

Report Issued Date : Dec. 10, 2009

Report Version : Rev. 01



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant..... 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test..... 6

 1.4 Testing Site..... 8

 1.5 Applied Standards 8

 1.6 Ancillary Equipment List..... 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1 Test Mode..... 9

 2.2 Connection Diagram of Test System 10

3 TEST RESULT..... 11

 3.1 Effective Radiated Power and Effective Isotropic Radiated Power Measurement 11

 3.2 Field Strength of Spurious Radiation Measurement 17

4 LIST OF MEASURING EQUIPMENT 31

5 UNCERTAINTY OF EVALUATION 32

6 CERTIFICATION OF TAF ACCREDITATION 33

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
3.1	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.2	§2.1053 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Field Strength of Spurious Radiation	$< 43 + 10 \log_{10}(P[\text{Watts}])$	PASS	Under limit 23.77 dB at 2509.00 MHz



1 General Description

1.1 Applicant

Acer Inc.

8F., No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan, R.O.C.

1.2 Manufacturer

Quanta Computer Inc.

1. No. 2, Lane 58, Sanzhuang Road, Songjiang Export Processing Zone, Shanghai, P.R. China
2. No. 4, Wen Ming 1st Street, Kuei Shan Hsiang, Taoyuan Shien 333, Taiwan, R.O.C.
3. No. 8, Dongjing Rd., Songjiang Industrial Zone, Shanghai, P.R. China
4. No. 4, Lane 58, Sanzhuang Road, Songjiang Export Processing Zone, Shanghai, P.R. China
5. North to Songsheng Road, Songjiang Industrial Zone, Shanghai, P.R. China
6. B#, No. 1, South Rongteng Road, Songjiang Export Processing Zone, Shanghai, P.R. China
7. Standard Factory, South to Valqua, Rongxin Road, Songjiang Export Processing Zone, Shanghai, P.R. China
8. C#, No. 1, South Rongteng Road, Songjiang Export Processing Zone, Shanghai, P.R. China
9. No. 6, Lane 66, Sanzhuang Road, Songjiang Export Processing Zone, Shanghai, P.R. China
10. No. 6, Lane 58, Sanzhuang Road, Songjiang Export Processing Zone, Shanghai, P.R. China
11. Huade Building, No. 18, ChuangYe Rd., ShandDi Zone, HaiDian District, Beijing, P.R.C.
12. No. 68, Sanzhuang Road, Songjiang Export Processing Zone, Shanghai, P.R. China
13. 2F, C Building, XinYe Rd., Export Processing District In Torch, Zhongshan, Guangdong, P.R.C.



1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	3G Module
Brand Name	Acer, Gateway, PackardBell
Model Name	EM770W
FCC ID	HLZEM770W
Host Laptop Computer	Brand Name: Acer, Gateway, PackardBell Model Name: ZH8, ZH7 Marketing Name: Aspire one, AS1810T, AS1410, AS1810TZ; EC14 series, EC18 series; dot m/u; dor mr/u HW Version: Rer C (MB) SW Version: v0.1108h (BIOS) Antenna Type: PIFA Antenna
Tx Frequency	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~ 1910 MHz WCDMA Band V : 824 MHz ~ 849 MHz WCDMA Band II : 1850 MHz ~ 1910 MHz
Rx Frequency	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz WCDMA Band V : 869 MHz ~ 894 MHz WCDMA Band II : 1930 MHz ~ 1990 MHz
Maximum Output Power to Antenna	GSM850 : 32.30 dBm GSM1900 : 29.78 dBm WCDMA Band V : 23.28 dBm WCDMA Band II : 22.36 dBm
Maximum ERP/EIRP	GSM850 (GPRS 8) : 0.37 W (25.73 dBm) GSM850 (EDGE 8) : 0.22 W (23.50 dBm) GSM1900 (GPRS 8) : 0.73 W (28.61 dBm) GSM1900 (EDGE 8) : 0.71 W (28.50 dBm) WCDMA Band V (RMC 12.2Kbps) : 0.05 W (17.39 dBm) WCDMA Band II (RMC 12.2Kbps) : 0.15 W (21.68 dBm)
WWAN Module HW Version	MD32TCPU
WWAN Module SW Version	11.126.07.02.00
Type of Modulation	GSM / GPRS : GMSK EDGE : 8PSK WCDMA : QPSK HSDPA : QPSK / 16QAM HSUPA : BPSK
EUT Stage	Production Unit

Remark:

1. For other wireless features of this EUT, the test report will be issued separately.
2. This test report recorded only product characteristics and test results of PCS Licensed Transmitter (PCB).

List of Accessory for Host (Laptop Computer):

Specification of Accessory		
AC Adapter	Brand Name	Delta
	Model Name	ADP-30JH B
	Power Rating	I/P:100-240Vac, 50-60Hz, 1.2A; O/P: 19Vdc, 1.58A
	DC Power Cord Type	1.5 meter shielded cable with ferrite core
Battery	Brand Name	Simplo
	Model Name	UM09E70
	Power Rating	11.1Vdc, 5600mAh
	Type	Li-ion
WLAN Module	Brand Name	Intel
	Model Name	112BNHMW
Bluetooth Module	Brand Name	Foxconn
	Model Name	BCM92046

Remark: Please refer to the user's manual for more detailed description of host laptop computer (Brand Name: Acer, Gateway, PackardBell / Model Name: ZH8, ZH7 / Marketing Name: Aspire one, AS1810T, AS1410, AS1810TZ; EC14 series, EC18 series; dot m/u; dor mr/u).

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	FCC/IC Registration No.
	03CH07-HY	TW1022/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- ♦ FCC 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ IC RSS-132 Issue 2
- ♦ IC RSS-133 Issue 5

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 19000 MHz for GSM1900 and WCDMA Band II.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	<ul style="list-style-type: none"> ■ GPRS 8 Link ■ EDGE 8 Link 	<ul style="list-style-type: none"> ■ GPRS 8 Link ■ EDGE 8 Link
GSM 1900	<ul style="list-style-type: none"> ■ GPRS 8 Link ■ EDGE 8 Link 	<ul style="list-style-type: none"> ■ GPRS 8 Link ■ EDGE 8 Link
WCDMA Band V	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link
WCDMA Band II	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link


Note: The maximum power levels are GPRS multi-slot class 8 mode for GMSK link, EDGE multi-slot class 8 mode for 8PSK link, RMC 12.2Kbps mode for WCDMA band V and WCDMA band II, only these modes were used for all tests.

The conducted power tables are as follows:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS 8	31.82	32.04	32.30	29.09	29.43	29.78
GPRS 10	29.23	29.45	29.73	27.45	27.75	28.08
GPRS 12	25.21	25.40	25.62	25.33	25.62	25.96
EGPRS 8	26.37	26.58	26.81	24.80	25.42	25.81
EGPRS 10	25.08	25.25	25.78	24.34	24.60	24.97
EGPRS 12	21.76	21.72	21.87	21.02	21.25	21.49

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880.0	1907.6
RMC 12.2K	23.18	23.28	23.13	21.67	22.36	21.94
HSDPA Subtest-1	22.94	23.22	23.04	21.55	22.35	21.85
HSDPA Subtest-2	22.95	23.17	22.88	21.29	21.85	21.72
HSDPA Subtest-3	22.31	22.46	22.20	20.91	21.77	21.37
HSDPA Subtest-4	22.51	22.60	22.34	21.20	21.79	21.31
HSUPA Subtest-1	22.38	22.89	22.86	21.17	21.74	21.01
HSUPA Subtest-2	21.63	21.25	21.13	19.55	20.03	19.70
HSUPA Subtest-3	21.89	21.87	21.67	19.63	20.23	19.96
HSUPA Subtest-4	21.60	21.77	21.58	19.85	20.34	20.25
HSUPA Subtest-5	22.23	22.79	22.63	21.17	21.60	21.35

2.2 Connection Diagram of Test System

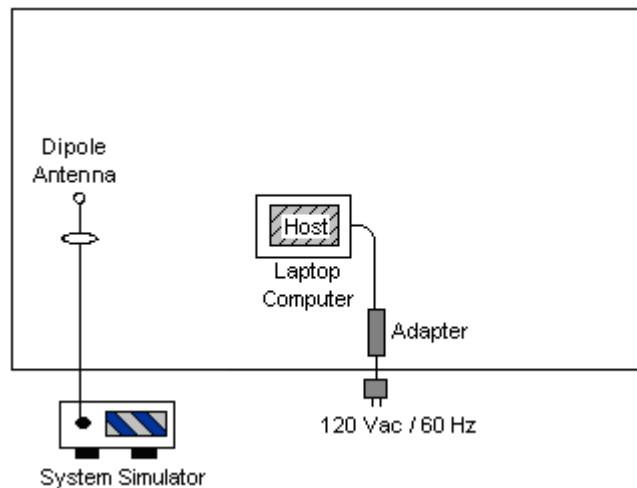

Remark: The EUT was 3G Module which was installed in the host laptop computer (Brand Name: Acer, Gateway, PackardBell / Model Name: ZH8, ZH7 / Marketing Name: Aspire one, AS1810T, AS1410, AS1810TZ; EC14 series, EC18 series; dot m/u; dor mr/u).



3 Test Result

3.1 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.1.1 Description of the ERP/EIRP Measurement

ERP/EIRP is measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The EUT was placed on an non-conductive rotating platform with 0.8 meter height in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RBW= 3MHz,VBW= 3MHz, and peak detector settings.
2. During the measurement, the EUT was enforced in maximum power and linked with a base station. The highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.

3.1.4 Test Setup

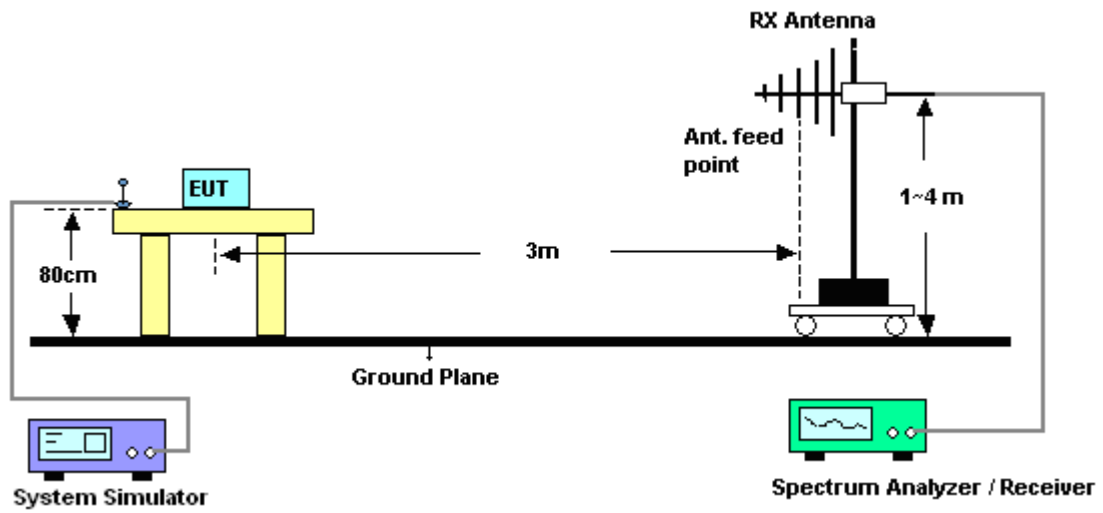

3.1.5 Test Result of ERP

GSM850 (GPRS 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-9.59	32.04	20.30	0.11
836.4	-8.78	32.91	21.98	0.16
848.8	-7.36	32.84	23.33	0.22
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-9.80	36.10	24.15	0.26
836.4	-8.71	34.41	23.55	0.23
848.8	-6.77	34.65	25.73	0.37

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

GSM850 (EDGE 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-11.77	32.04	18.12	0.06
836.4	-10.99	32.91	19.77	0.09
848.8	-9.51	32.84	21.18	0.13
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-12.02	36.10	21.93	0.16
836.4	-10.97	34.41	21.29	0.13
848.8	-9.00	34.65	23.50	0.22

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15



WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.40	-17.56	32.04	12.33	0.02
836.40	-16.51	32.91	14.25	0.03
846.60	-15.55	32.84	15.14	0.03
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.40	-16.56	36.10	17.39	0.05
836.40	-16.69	34.41	15.57	0.04
846.60	-17.90	34.65	14.60	0.03

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

3.1.6 Test Result of EIRP

GSM1900 (GPRS 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-12.63	41.24	28.61	0.73
1880.0	-13.59	41.46	27.87	0.61
1909.8	-13.36	41.21	27.85	0.61
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-15.37	41.52	26.15	0.41
1880.0	-16.58	43.10	26.52	0.45
1909.8	-15.70	42.73	27.03	0.50

* EIRP = LVL (dBm) + Correction Factor (dB)

GSM1900 (EDGE 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-12.74	41.24	28.50	0.71
1880.0	-13.53	41.46	27.93	0.62
1909.8	-13.30	41.21	27.91	0.62
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-15.31	41.52	26.21	0.42
1880.0	-16.46	43.10	26.64	0.46
1909.8	-15.63	42.73	27.10	0.51

* EIRP = LVL (dBm) + Correction Factor (dB)



WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.40	-19.56	41.24	21.68	0.15
1880.00	-19.82	41.46	21.64	0.15
1907.60	-20.84	41.21	20.37	0.11
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.40	-22.16	41.52	19.36	0.09
1880.00	-22.71	43.10	20.39	0.11
1907.60	-22.87	42.73	19.86	0.10

* EIRP = LVL (dBm) + Correction Factor (dB)



3.2 Field Strength of Spurious Radiation Measurement

3.2.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$


3.2.4 Test Setup

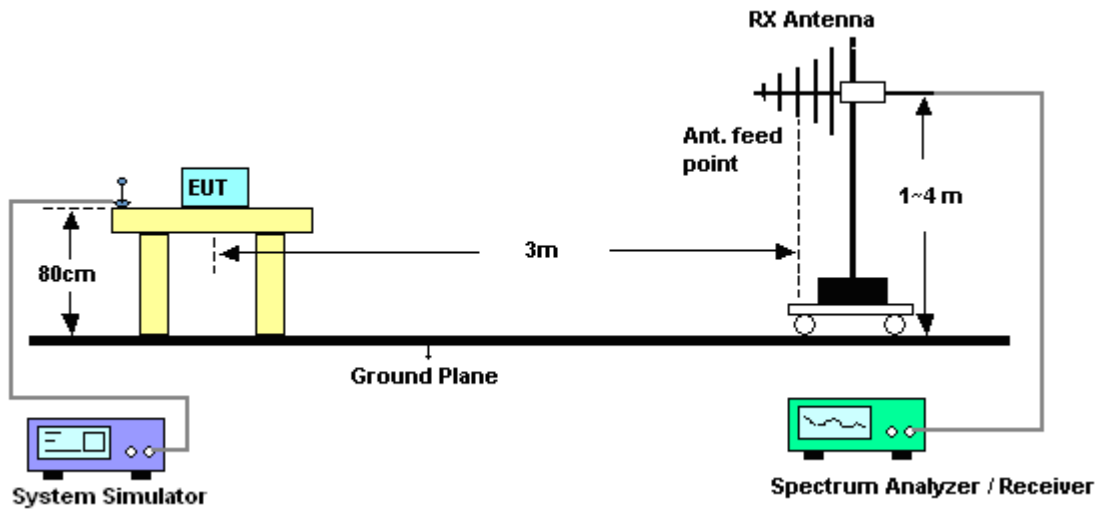



3.2.5 Test Result of Field Strength of Spurious Radiated

Band :	GSM850	Temperature :	21~22°C
Test Mode :	GPRS 8 Link	Relative Humidity :	47~48%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

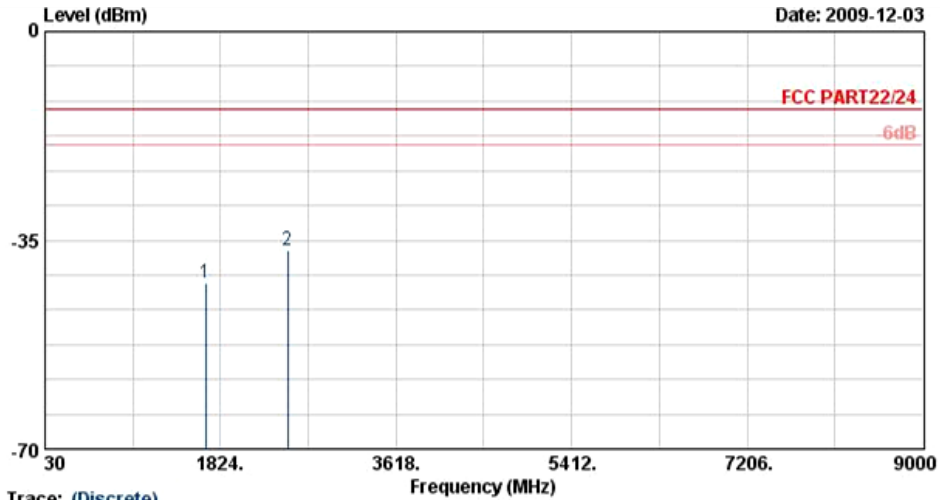


Trace: (Discrete)
 Site : 03CH07-RY
 Condition : FCC PART22/24 HF-ETRP(080306) HORIZONTAL
 Project : FG 971341-18

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-42.24	-13	-29.24	-50.63	-42.09	3.39	5.39	H	Pass
2509	-36.77	-13	-23.77	-45.13	-37.03	3.71	6.12	H	Pass



Band :	GSM850	Temperature :	21~22°C
Test Mode :	GPRS 8 Link	Relative Humidity :	47~48%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

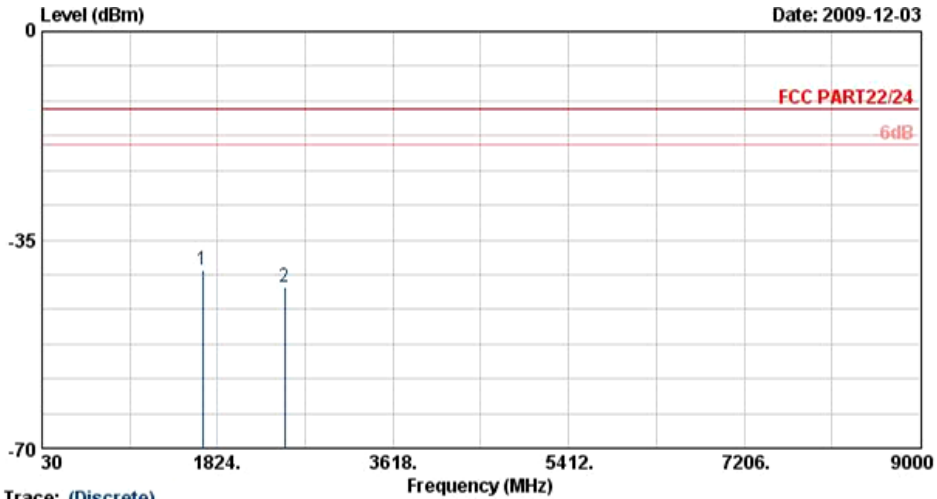


Trace: (Discrete)
 Site : 03CH07-RY
 Condition : FCC PART22/24 HF-ETRP(080306) VERTICAL
 Project : FC 971341-18

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-40.03	-13	-27.03	-48.85	-39.88	3.39	5.39	V	Pass
2509	-42.99	-13	-29.99	-53.31	-43.25	3.71	6.12	V	Pass




Band :	GSM850	Temperature :	21~22°C
Test Mode :	EDGE 8 Link	Relative Humidity :	47~48%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

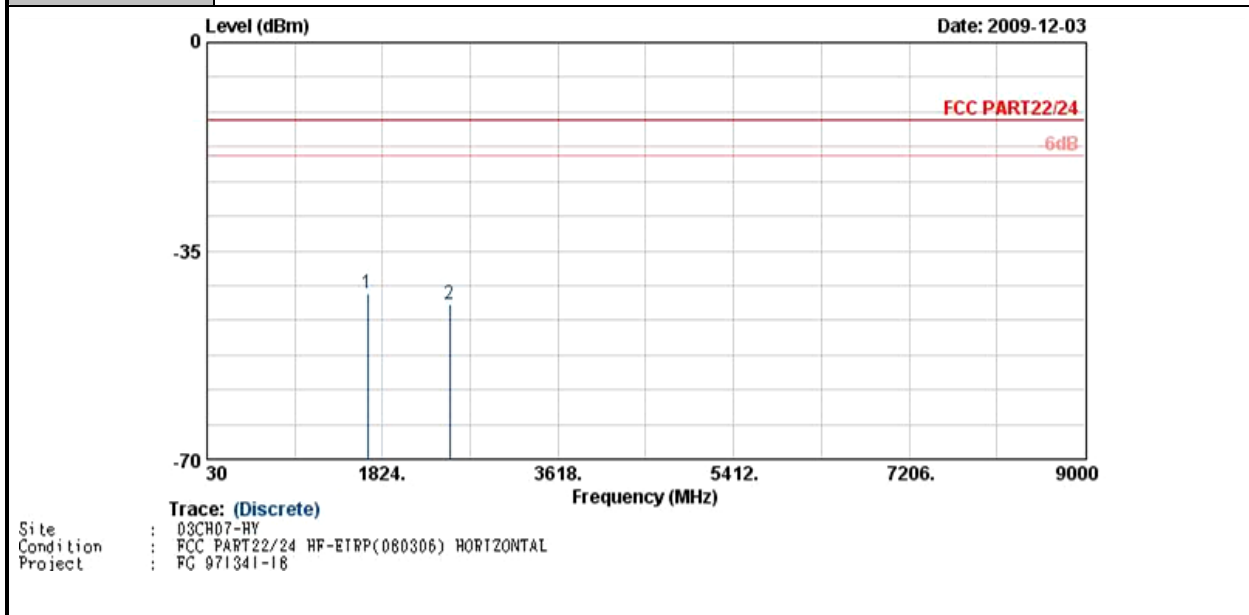

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-42.20	-13	-29.20	-50.59	-42.05	3.39	5.39	H	Pass
2509	-43.91	-13	-30.91	-51.68	-44.17	3.71	6.12	H	Pass



Band :	GSM850	Temperature :	21~22°C
Test Mode :	EDGE 8 Link	Relative Humidity :	47~48%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

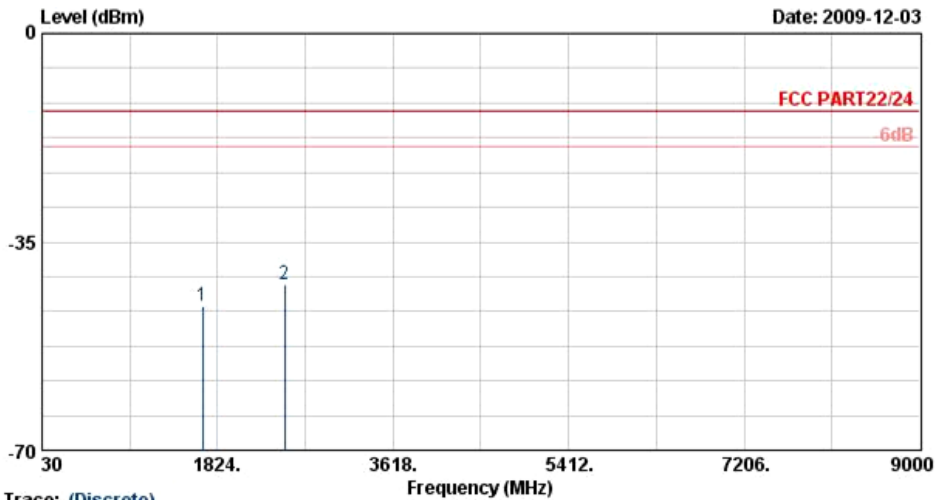


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC PART22/24 HF-ETRP(080306) VERTICAL
 Project : FG 971341-18

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-45.75	-13	-32.75	-53.7	-45.60	3.39	5.39	V	Pass
2509	-42.06	-13	-29.06	-53.16	-42.32	3.71	6.12	V	Pass




Band :	GSM1900	Temperature :	21~22°C
Test Mode :	GPRS 8 Link	Relative Humidity :	47~48%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

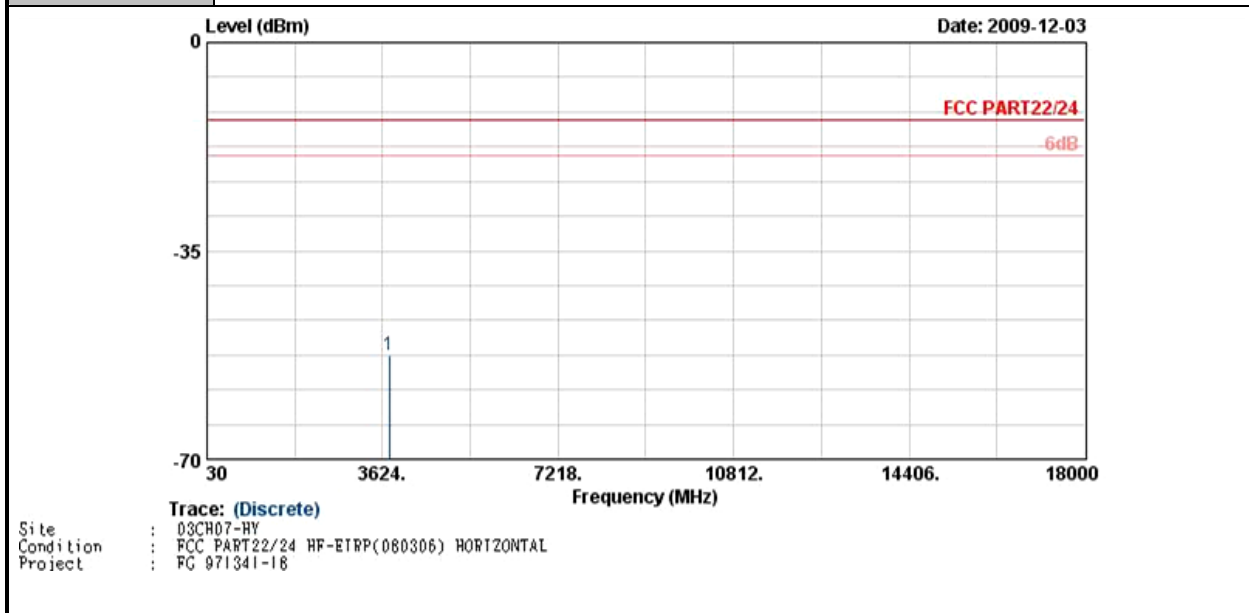

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-52.61	-13	-39.61	-63.13	-55.13	4.88	7.40	H	Pass




Band :	GSM1900	Temperature :	21~22°C
Test Mode :	GPRS 8 Link	Relative Humidity :	47~48%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line. Spurious emissions within 1000MHz ~ 10th harmonic were not found any signals.		

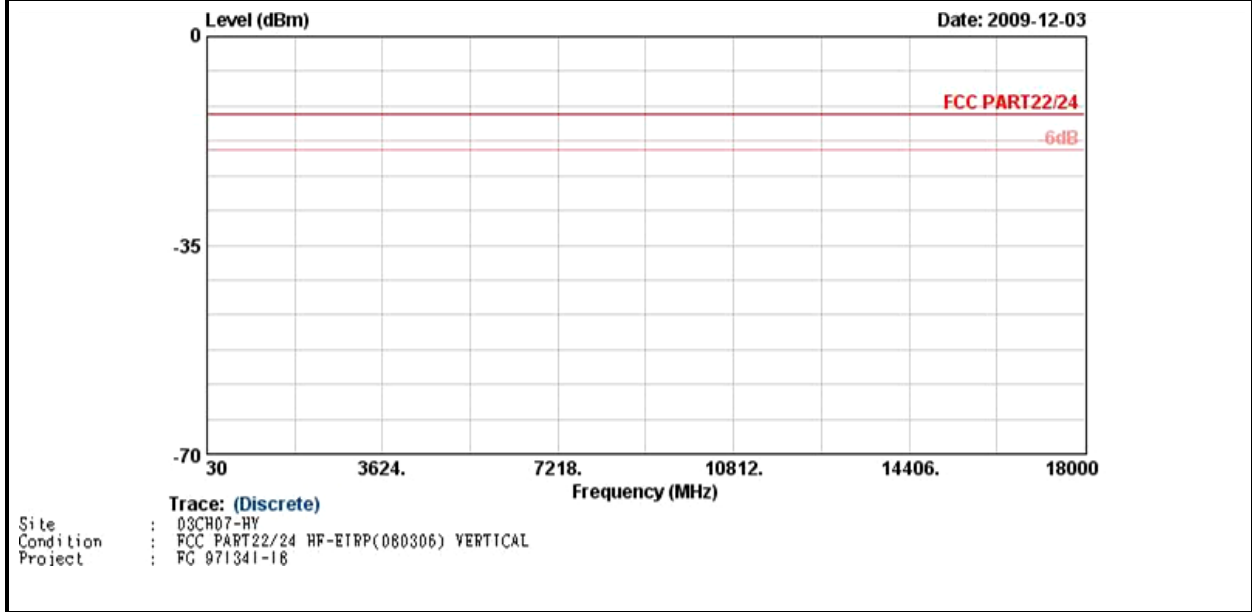




Band :	GSM1900	Temperature :	21~22°C
Test Mode :	EDGE 8 Link	Relative Humidity :	47~48%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line. Spurious emissions within 1000MHz ~ 10th harmonic were not found any signals.		

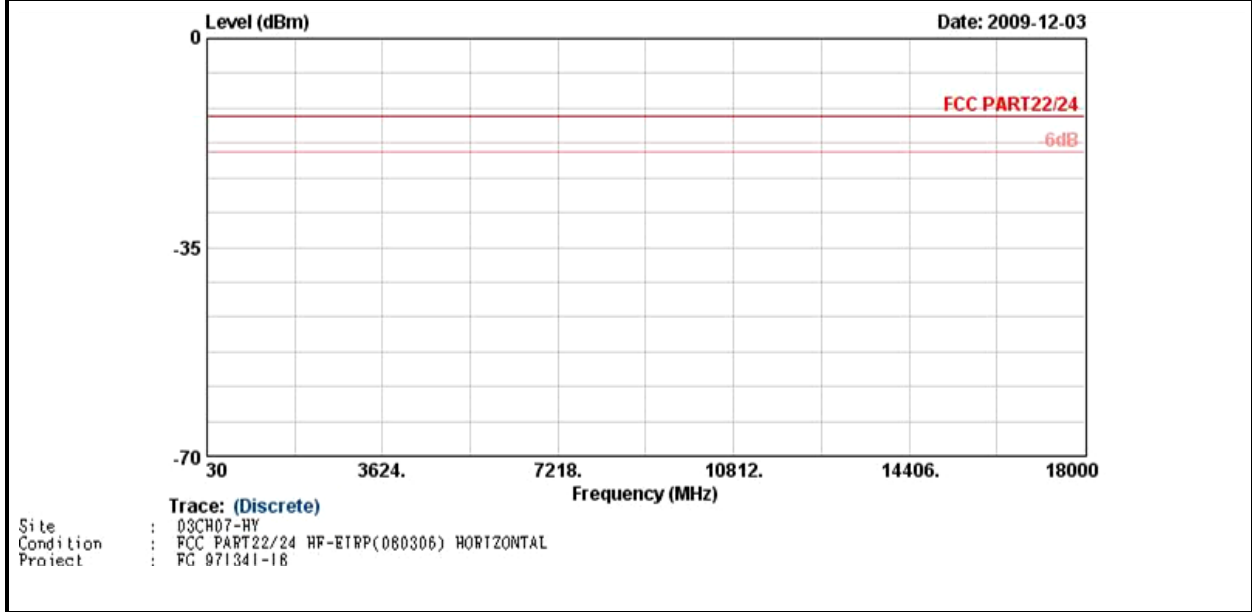




Band :	GSM1900	Temperature :	21~22°C
Test Mode :	EDGE 8 Link	Relative Humidity :	47~48%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line. Spurious emissions within 1000MHz ~ 10th harmonic were not found any signals.		

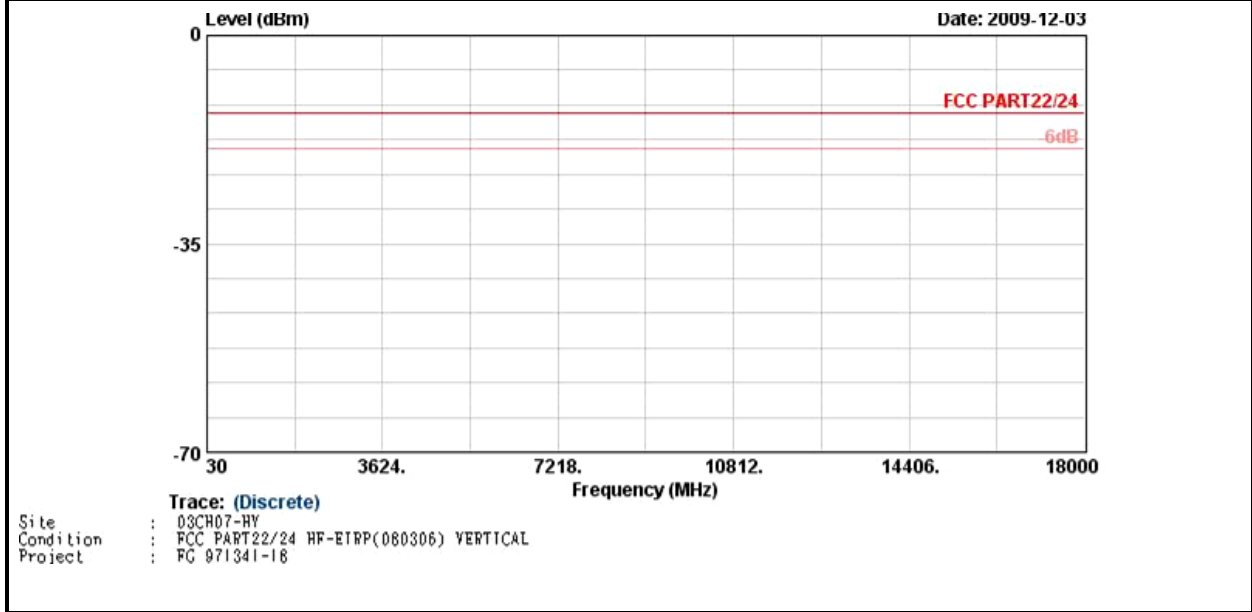




Band :	WCDMA Band V	Temperature :	21~22°C
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	47~48%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

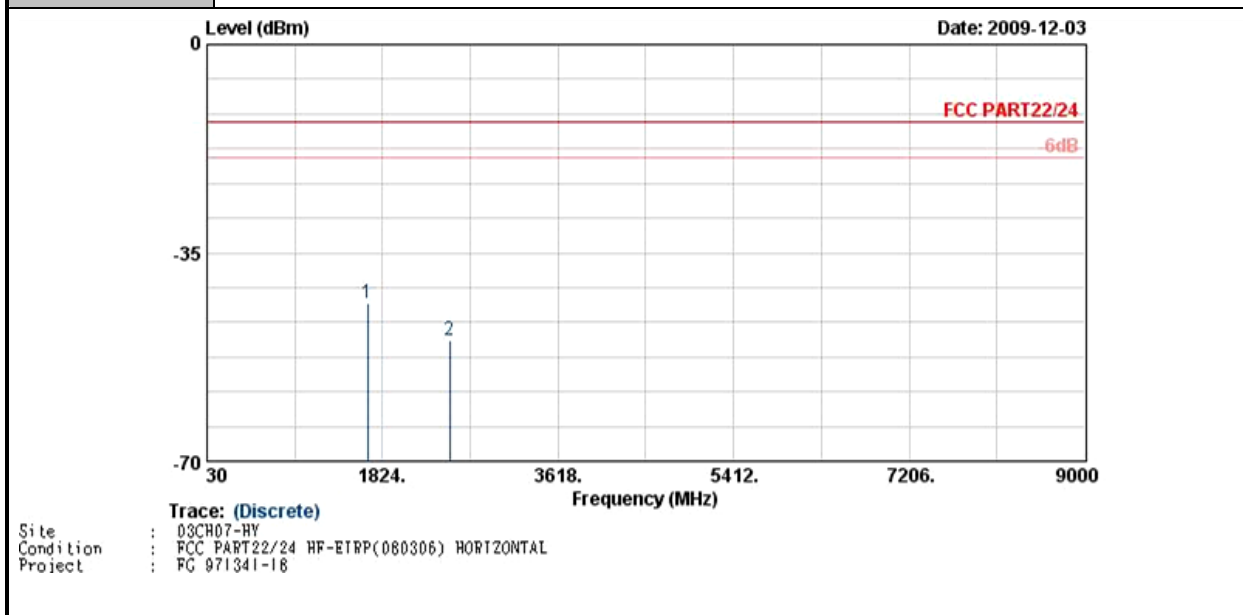

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-43.57	-13	-30.57	-51.90	-43.42	3.39	5.39	H	Pass
2509	-49.75	-13	-36.75	-59.88	-50.01	3.71	6.12	H	Pass



Band :	WCDMA Band V	Temperature :	21~22°C
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	47~48%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

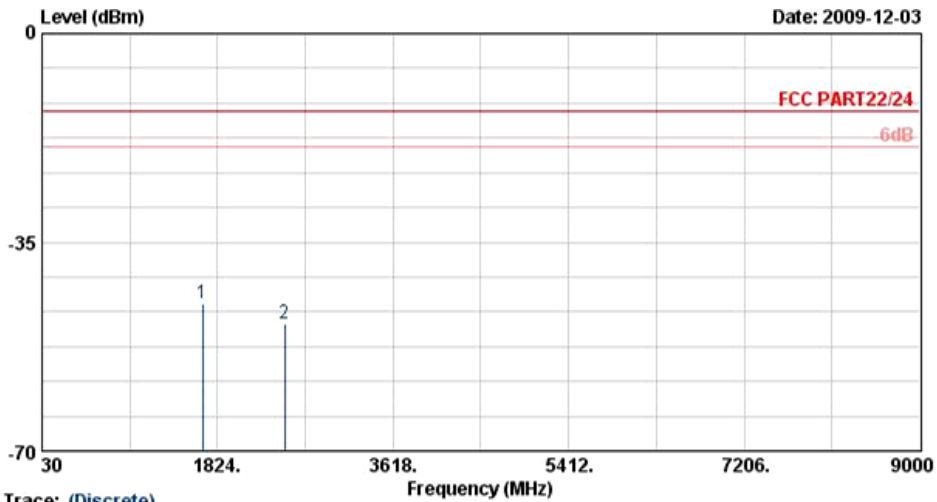


Trace: (Discrete)
 Site : 08CH07-RY
 Condition : FCC PART22/24 HF-ETRP(080306) VERTICAL
 Project : FC 971341-18

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-45.38	-13	-32.38	-53.33	-45.23	3.39	5.39	V	Pass
2509	-48.73	-13	-35.73	-58.40	-48.99	3.71	6.12	V	Pass




Band :	WCDMA Band II	Temperature :	21~22°C
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	47~48%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line. Spurious emissions within 1000MHz ~ 10th harmonic were not found any signals.		

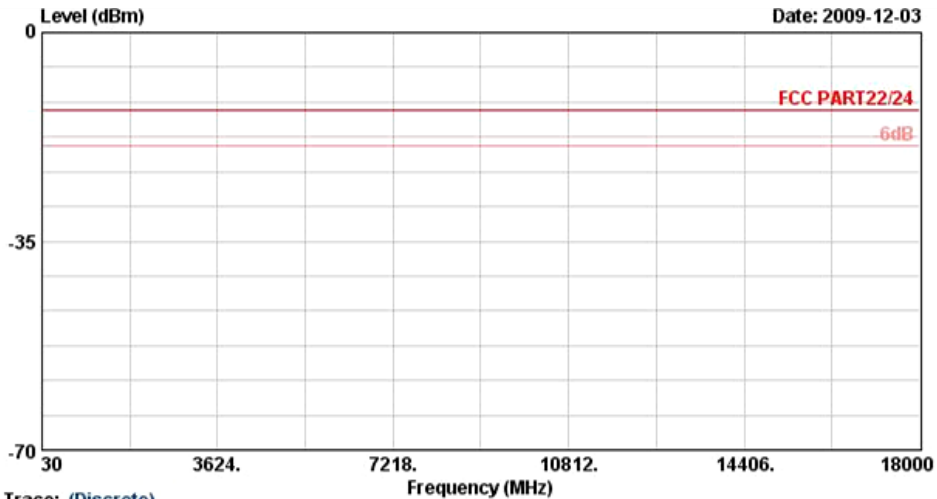

Trace: (Discrete)
Site : 03CH07-HY
Condition : FCC PART22/24 HF-ETRP(080306) HORIZONTAL
Project : FG 971341-18



Band :	WCDMA Band II	Temperature :	21~22°C
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	47~48%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line. Spurious emissions within 1000MHz ~ 10th harmonic were not found any signals.		

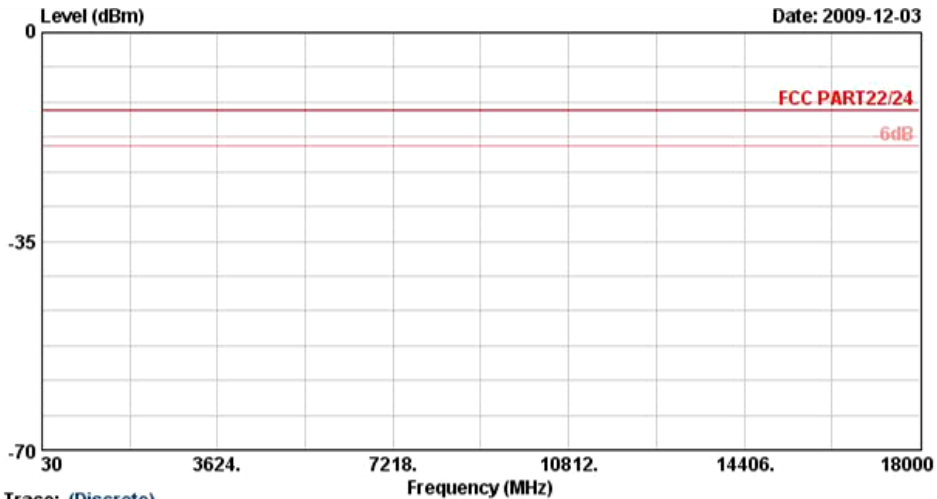

Trace: (Discrete)
Site : 03CH07-HY
Condition : FCC PART22/24 HF-ETRP(080306) VERTICAL
Project : FG 971341-18



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 31, 2009	Oct. 30, 2010	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9KHz ~ 30GHz	Dec. 04, 2009	Dec. 03, 2010	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 20, 2009	Aug. 19, 2010	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 14, 2009	Oct. 13, 2010	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec. 17, 2008	Dec. 16, 2009	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32dB. GAIN	Mar. 27, 2009	Mar. 26, 2010	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 KHz~30 MHz	May 22, 2008	May 21, 2010	Radiation (03CH07-HY)
System Simulator	R&S	CMU200	116456	N/A	Jun. 05, 2008	Jun. 04, 2010	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				

6 Certification of TAF Accreditation



Certificate No. : L1190-090417

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

Jay-San Chen

Jay-San Chen
President, Taiwan Accreditation Foundation
Date : April 17, 2009

P1, total 20 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix



Appendix A. Photographs of EUT

Please refer to Sporton report number EP971341-18 as below.