

# FCC RF Test Report

APPLICANT : Acer Incorporated  
EQUIPMENT : Smart HandHeld \_ Android  
BRAND NAME : Acer  
MODEL NAME : S100  
FCC ID : HLZSHS100  
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)  
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)  
Tx/Rx FREQUENCY RANGE : GSM850 : 824.2 ~ 848.8 MHz /  
869.2 ~ 893.8 MHz  
GSM1900 : 1850.2 ~ 1909.8 MHz /  
1930.2 ~ 1989.8 MHz  
WCDMA Band V : 826.4 ~ 846.6 MHz /  
871.4 ~ 891.6 MHz  
WCDMA Band II : 1852.4 ~ 1907.6 MHz /  
1932.4 ~ 1987.6 MHz  
MAX. ERP/EIRP POWER : GSM850 (GPRS 8) : 1.29 W  
GSM850 (EDGE 8) : 0.39 W  
GSM1900 (GPRS 8) : 1.45 W  
GSM1900 (EDGE 10) : 0.65 W  
WCDMA Band V (HSDPA) : 0.11 W  
WCDMA Band II (RMC 12.2Kbps) : 0.29 W  
EMISSION DESIGNATOR : GMSK : 246KGXW  
8PSK : 246KG7W  
QPSK : 4M18F9W

The product was received on Sep. 22, 2009 and completely tested on Sep. 30, 2009. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Roy Wu / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant..... 5

    1.2 Manufacturer ..... 5

    1.3 Feature of Equipment Under Test..... 6

    1.4 Testing Site..... 8

    1.5 Applied Standards ..... 8

    1.6 Ancillary Equipment List ..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Test Mode..... 9

    2.2 Connection Diagram of Test System ..... 10

**3 TEST RESULT ..... 11**

    3.1 Conducted Output Power Measurement..... 11

    3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement ..... 13

    3.3 Occupied Bandwidth Measurement ..... 18

    3.4 Band Edge Measurement..... 25

    3.5 Conducted Emission Measurement ..... 32

    3.6 Field Strength of Spurious Radiation Measurement ..... 48

    3.7 Frequency Stability Measurement..... 64

**4 LIST OF MEASURING EQUIPMENT ..... 68**

**5 UNCERTAINTY OF EVALUATION ..... 69**

**6 CERTIFICATION OF TAF ACCREDITATION ..... 70**

**APPENDIX A. PHOTOGRAPHS OF EUT**

**APPENDIX B. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	N/A	Conducted Output Power	N/A	PASS	
3.2	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts for FCC (<6.3 Watts for IC)	PASS	-
3.2	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.3	§2.1049 §22.917(a) §24.238(a)	N/A	Occupied Bandwidth	N/A	PASS	-
3.4	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge Measurement	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Conducted Emission	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.6	§2.1053 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Field Strength of Spurious Radiation	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 5.55 dB at 6690.00 MHz
3.7	§2.1055 §22.355 §24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



# **1 General Description**

## **1.1 Applicant**

**Acer Incorporated**

8F., No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan

## **1.2 Manufacturer**

**Compal Communication (Nanjing)**

Nanjing Jingning Export Processing Zone (South Area) No. 68-2 Suyuan Street



### 1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Smart HandHeld _ Android
Brand Name	Acer
Model Name	S100
FCC ID	HLZSHS100
Tx Frequency	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~ 1910 MHz WCDMA Band V : 824 MHz ~ 849 MHz WCDMA Band II : 1850 MHz ~ 1910 MHz
Rx Frequency	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz WCDMA Band V : 869 MHz ~ 894 MHz WCDMA Band II : 1930 MHz ~ 1990 MHz
Maximum Output Power to Antenna	GSM850 : 32.09 dBm GSM1900 : 29.40 dBm WCDMA Band V : 22.82 dBm WCDMA Band II : 22.85 dBm
Maximum ERP/EIRP	GSM850 (GPRS 8) : 1.29 W (31.10 dBm) GSM850 (EDGE 8) : 0.39 W (25.95 dBm) GSM1900 (GPRS 8) : 1.45 W (31.60 dBm) GSM1900 (EDGE 10) : 0.65 W (28.15 dBm) WCDMA Band V (HSDPA) : 0.11 W (20.28 dBm) WCDMA Band II (RMC 12.2Kbps) : 0.29 W (24.67 dBm)
Antenna Type	Fixed Internal Antenna
HW Version	1.0
SW Version	Modem : A1-00.18.07 OS : Donut.eng.poseng.20090907.201329
Type of Modulation	GSM / GPRS : GMSK EDGE : 8PSK WCDMA : QPSK HSDPA : QPSK / 16QAM HSUPA : BPSK
Type of Emission	GMSK : 246KGXW 8PSK : 246KG7W QPSK : 4M18F9W
EUT Stage	Identical Prototype

**Remark:**

1. For other wireless features of this EUT, the test report will be issued separately.
2. This test report recorded only product characteristics and test results of PCS Licensed Transmitter Held to Ear (PCE).

List of Accessory:

Specification of Accessory		
AC Adapter 1	Brand Name	PHIHONG
	Model Name	PSAC05R-050
	Part Number	AP.0050P.015
	Power Rating	I/P:100-240Vac, 50-60Hz, 300mA, 12-18VA; O/P: 5Vdc, 1A
	DC Power Cord Type	1.5 meter shielded cable without ferrite core
AC Adapter 2	Brand Name	PHIHONG
	Model Name	PSAC05R-050
	Part Number	AP.0050P.008
	Power Rating	I/P:100-240Vac, 50-60Hz, 300mA, 12-18VA; O/P: 5Vdc, 1A
	DC Power Cord Type	1.5 meter non-shielded cable without ferrite core
Battery	Brand Name	Acer
	Model Name	A7BTA020F
	Power Rating	3.7Vdc, 1350mAh, 4.995Wh
	Type	Li-ion
Earphone 1	Brand Name	Merry
	Model Name	EMC292-003-01
	Signal Line Type	1.6 meter non-shielded cable without ferrite core
Earphone 2	Brand Name	KINGSTATE
	Model Name	KJAH4028AENCB
	Signal Line Type	1.6 meter non-shielded cable without ferrite core
USB Cable 1	Brand Name	Golden Bridge
	Model Name	AS51-09030018
	Signal Line Type	1.0 meter non-shielded cable without ferrite core
USB Cable 2	Brand Name	PHIHONG
	Model Name	DCM1000(AI-H)
	Signal Line Type	1.0 meter non-shielded cable without ferrite core
LCD Panel	Brand Name	AUO
	Model Name	H353VL01 V2

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. For accessories equipped with this EUT, please refer to the appendix of the external photo.

## 1.4 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC/IC Registration No.</b>
	TH02-HY	03CH07-HY	TW1022/4086B-1

## 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- ♦ FCC 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ IC RSS-132 Issue 2
- ♦ IC RSS-133 Issue 5

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

## 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 19000 MHz for GSM1900 and WCDMA Band II.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	<ul style="list-style-type: none"> <li>■ GPRS 8 Link</li> <li>■ EDGE 8 Link</li> <li>■ GPRS 8 Link + 802.11g Tx CH01</li> </ul>	<ul style="list-style-type: none"> <li>■ GPRS 8 Link</li> <li>■ EDGE 8 Link</li> </ul>
GSM 1900	<ul style="list-style-type: none"> <li>■ GPRS 8 Link</li> <li>■ EDGE 10 Link</li> </ul>	<ul style="list-style-type: none"> <li>■ GPRS 8 Link</li> <li>■ EDGE 10 Link</li> </ul>
WCDMA Band V	<ul style="list-style-type: none"> <li>■ HSDPA Link</li> </ul>	<ul style="list-style-type: none"> <li>■ HSDPA Link</li> </ul>
WCDMA Band II	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>

**Note:** The maximum power levels are GPRS multi-slot class 8 mode for GMSK link, EDGE multi-slot class 8 mode for GSM850, and EDGE multi-slot class 10 mode for GSM1900 for 8PSK link, HSDPA mode for WCDMA band V, and RMC 12.2Kbps mode for WCDMA band II, only these modes were used for all tests.

The conducted power tables are as follows:


Conducted Power						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	31.84	32.01	32.09	29.26	29.26	29.26
GPRS 8	31.83	32.00	<b>32.09</b>	29.26	<b>29.40</b>	29.28
GPRS 10	31.99	31.96	32.03	29.16	29.32	29.22
GPRS 12	31.73	31.91	31.97	29.06	29.32	29.23
EGPRS 8	26.60	26.77	<b>26.85</b>	26.06	26.22	26.14
EGPRS 10	26.58	26.75	26.83	26.02	<b>26.67</b>	26.05
EGPRS 12	26.53	26.70	26.77	26.00	26.12	26.01

(\*Unit: dBm)

Conducted Power						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880.0	1907.6
RMC 12.2K	22.74	22.79	22.79	22.78	<b>22.85</b>	22.66
HSDPA Subtest-1	22.72	22.76	<b>22.82</b>	22.73	22.77	22.58
HSDPA Subtest-2	22.24	22.30	22.36	22.61	22.78	22.38
HSDPA Subtest-3	22.54	22.58	22.63	22.34	22.32	22.17
HSDPA Subtest-4	22.14	22.09	22.15	22.27	22.26	22.13
HSUPA Subtest-1	21.68	21.90	21.85	22.13	22.58	21.90
HSUPA Subtest-2	20.66	20.63	20.72	21.04	20.92	20.76
HSUPA Subtest-3	21.31	21.25	21.35	21.24	21.43	21.18
HSUPA Subtest-4	20.74	20.70	20.89	21.11	21.01	20.80
HSUPA Subtest-5	21.80	21.83	21.99	22.16	22.56	22.52

(\*Unit: dBm)

## 2.2 Connection Diagram of Test System

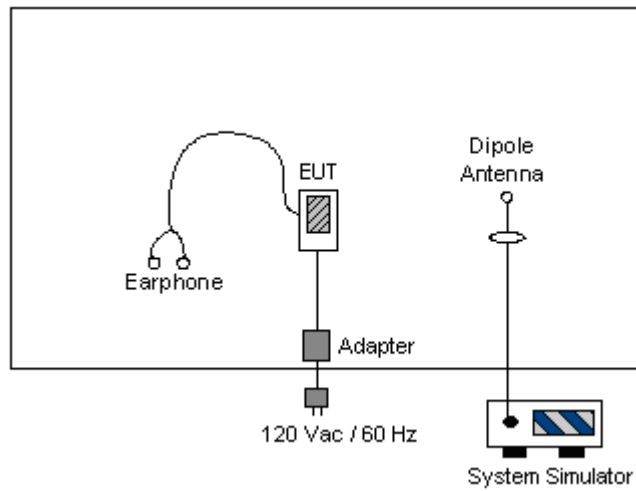

### 3 Test Result

#### 3.1 Conducted Output Power Measurement

##### 3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

##### 3.1.4 Test Setup

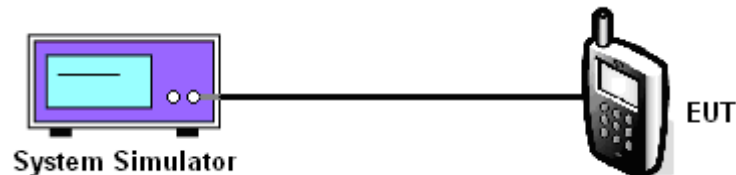

3.1.5 Test Result of Conducted Output Power

Cellular Band				
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM850 (GPRS 8)	128 (Low)	824.2	31.83	1.52
	189 (Mid)	836.4	32.00	1.58
	251 (High)	848.8	32.09	1.62
GSM850 (EDGE 8)	128 (Low)	824.2	26.60	0.46
	189 (Mid)	836.4	26.77	0.48
	251 (High)	848.8	26.85	0.48
WCDMA Band V (HSDPA)	4132 (Low)	826.4	22.72	0.19
	4182 (Mid)	836.4	22.76	0.19
	4233 (High)	846.6	22.82	0.19

PCS Band				
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM1900 (GPRS 8)	512 (Low)	1850.2	29.26	0.84
	661 (Mid)	1880.0	29.40	0.87
	810 (High)	1909.8	29.28	0.85
GSM1900 (EDGE 10)	512 (Low)	1850.2	26.02	0.40
	661 (Mid)	1880.0	26.67	0.46
	810 (High)	1909.8	26.05	0.40
WCDMA Band II (RMC 12.2Kbps)	9262 (Low)	1852.4	22.78	0.19
	9400 (Mid)	1880.0	22.85	0.19
	9538 (High)	1907.6	22.66	0.18

## 3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

### 3.2.1 Description of the ERP/EIRP Measurement

ERP/EIRP is measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.

### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The EUT was placed on a turntable with 1.0 meter height in a fully anechoic chamber.
2. The EUT was set at 1.2 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiated power.
4. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
5. Taking the record of maximum ERP/EIRP.
6. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
7. The conducted power at the terminal of the dipole antenna is measured.
8. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
9.  $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

$P_s$  (dBm) : Input power to substitution antenna.

$G_s$  (dBi or dBd) : Substitution antenna Gain.

$E_t = R_t + AF$


$E_s = R_s + AF$

AF (dB/m) : Receive antenna factor

$R_t$  : The highest received signal in spectrum analyzer for EUT.

$R_s$  : The highest received signal in spectrum analyzer for substitution antenna.

### 3.2.4 Test Setup

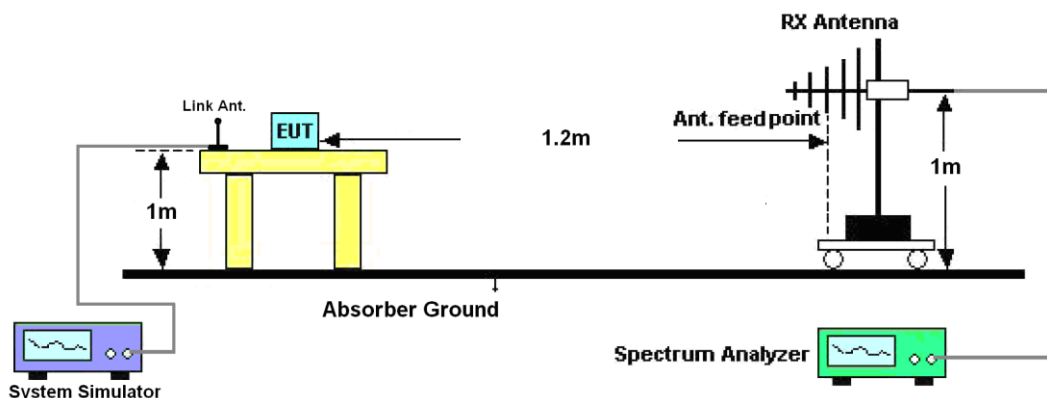



3.2.5 Test Result of ERP

GSM850 (GPRS 8) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-17.01	-48.12	0.00	-1.08	30.03	1.01
836.40	-16.25	-48.28	0.00	-0.93	31.10	1.29
848.80	-16.82	-48.35	0.00	-0.76	30.77	1.19
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-32.67	-47.97	0.00	-1.08	14.22	0.03
836.40	-30.71	-48.01	0.00	-0.93	16.37	0.04
848.80	-31.71	-48.05	0.00	-0.76	15.58	0.04

GSM850 (EDGE 8) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-21.90	-48.12	0.00	-1.08	25.14	0.33
836.40	-21.40	-48.28	0.00	-0.93	25.95	0.39
848.80	-22.18	-48.35	0.00	-0.76	25.41	0.35
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-38.03	-47.97	0.00	-1.08	8.86	0.01
836.40	-36.04	-48.01	0.00	-0.93	11.04	0.01
848.80	-37.04	-48.05	0.00	-0.76	10.25	0.01



WCDMA Band V (HSDPA) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-28.43	-48.12	0.00	-1.08	18.61	0.07
836.40	-27.07	-48.28	0.00	-0.93	20.28	0.11
846.60	-27.42	-48.35	0.00	-0.76	20.17	0.10
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-42.76	-47.97	0.00	-1.08	4.13	0.00
836.40	-40.51	-48.01	0.00	-0.93	6.57	0.00
846.60	-41.27	-48.05	0.00	-0.76	6.02	0.00



3.2.6 Test Result of EIRP

GSM1900 (GPRS 8) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-24.92	-51.88	0.00	1.96	28.92	0.78
1880.00	-24.40	-52.99	0.00	2.00	30.59	1.15
1909.80	-24.66	-54.28	0.00	1.98	31.60	1.45
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-27.82	-52.13	0.00	1.96	26.27	0.42
1880.00	-27.82	-53.17	0.00	2.00	27.35	0.54
1909.80	-28.06	-54.13	0.00	1.98	28.05	0.64

GSM1900 (EDGE 10) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-28.12	-51.88	0.00	1.96	25.72	0.37
1880.00	-27.73	-52.99	0.00	2.00	27.26	0.53
1909.80	-28.11	-54.28	0.00	1.98	28.15	0.65
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-30.62	-52.13	0.00	1.96	23.47	0.22
1880.00	-30.98	-53.17	0.00	2.00	24.19	0.26
1909.80	-31.26	-54.13	0.00	1.98	24.85	0.31





WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-30.19	-51.88	0.00	1.96	23.65	0.23
1880.00	-30.40	-52.99	0.00	2.00	24.59	0.29
1907.60	-31.59	-54.28	0.00	1.98	24.67	0.29
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-33.11	-52.13	0.00	1.96	20.98	0.13
1880.00	-33.82	-53.17	0.00	2.00	21.35	0.14
1907.60	-34.78	-54.13	0.00	1.98	21.33	0.14

### 3.3 Occupied Bandwidth Measurement

#### 3.3.1 Description of Occupied Bandwidth Measurement

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers were measured.

#### 3.3.4 Test Setup

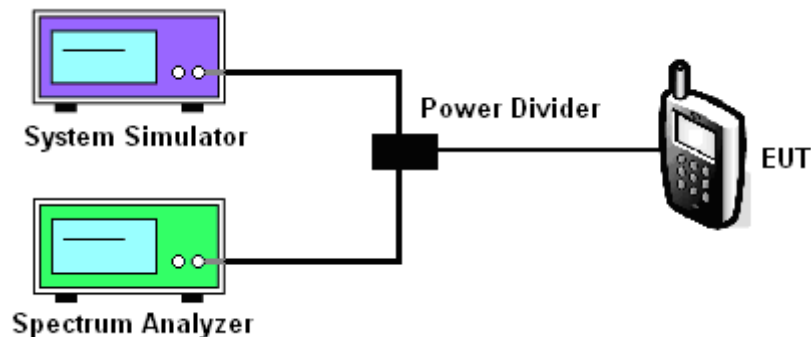




### 3.3.5 Test Result (Plots) of Occupied Bandwidth


<b>Band :</b>	GSM 850	<b>Power Stage :</b>	High
<b>Test Mode :</b>	GPRS 8 Link		

99% Occupied Bandwidth Plot on Channel 189

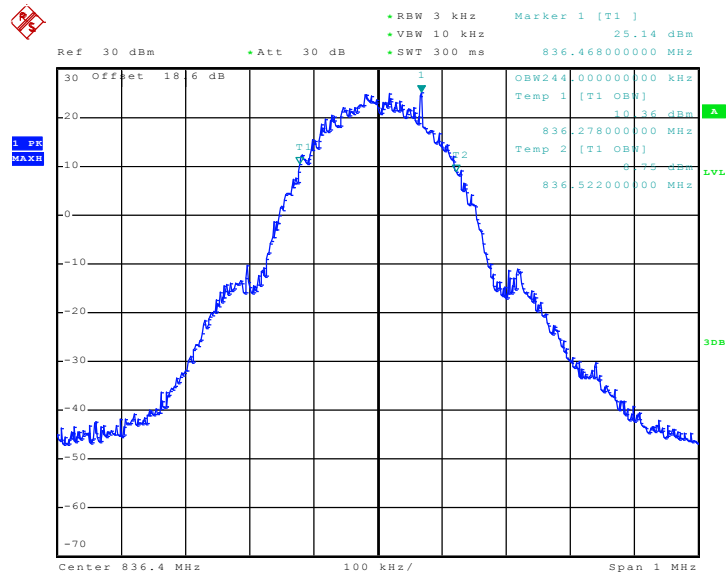

Date: 25.SEP.2009 15:17:04

26dB Bandwidth Plot on Channel 189

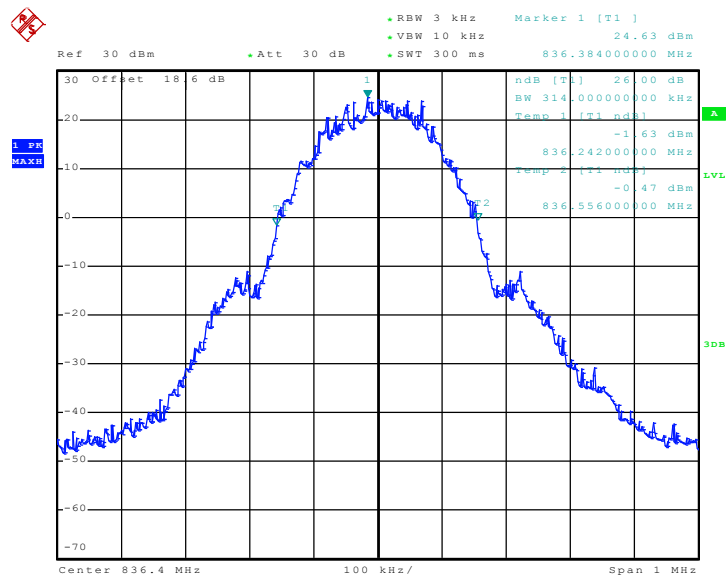


Date: 25.SEP.2009 15:11:58




<b>Band :</b>	GSM 850	<b>Power Stage :</b>	High
<b>Test Mode :</b>	EDGE 8 Link		

99% Occupied Bandwidth Plot on Channel 189

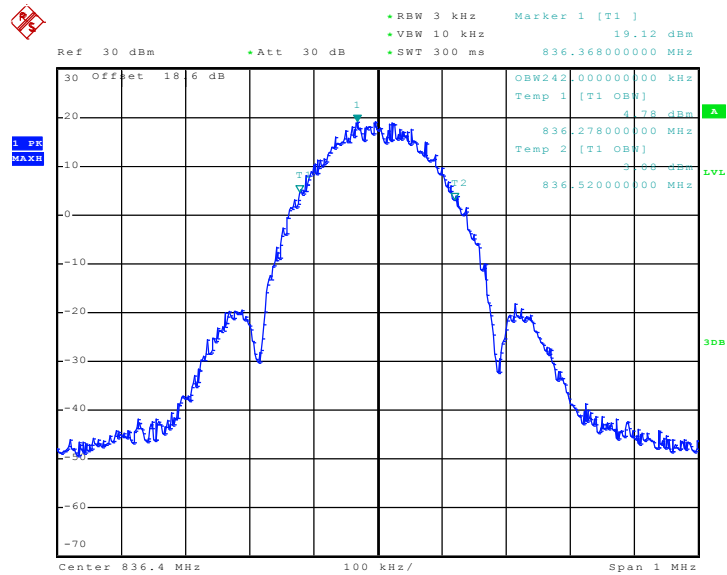

Date: 25.SEP.2009 16:26:54

26dB Bandwidth Plot on Channel 189

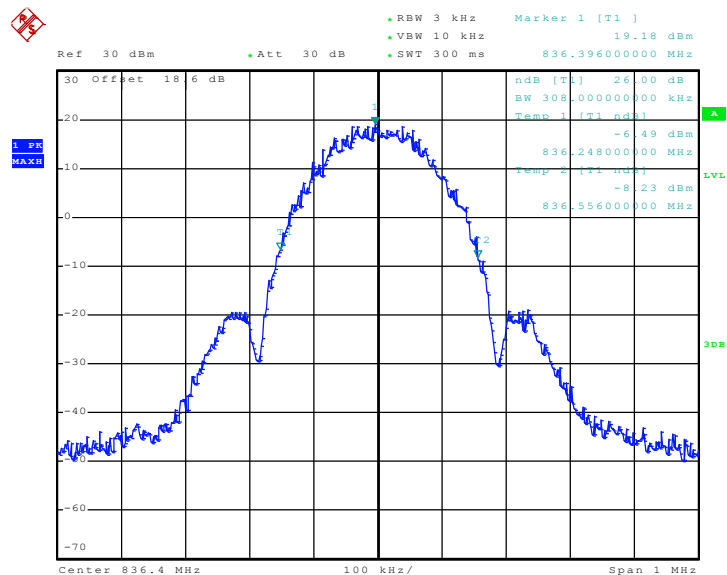


Date: 25.SEP.2009 16:22:37




<b>Band :</b>	GSM 1900	<b>Power Stage :</b>	High
<b>Test Mode :</b>	GPRS 8 Link		

99% Occupied Bandwidth Plot on Channel 661

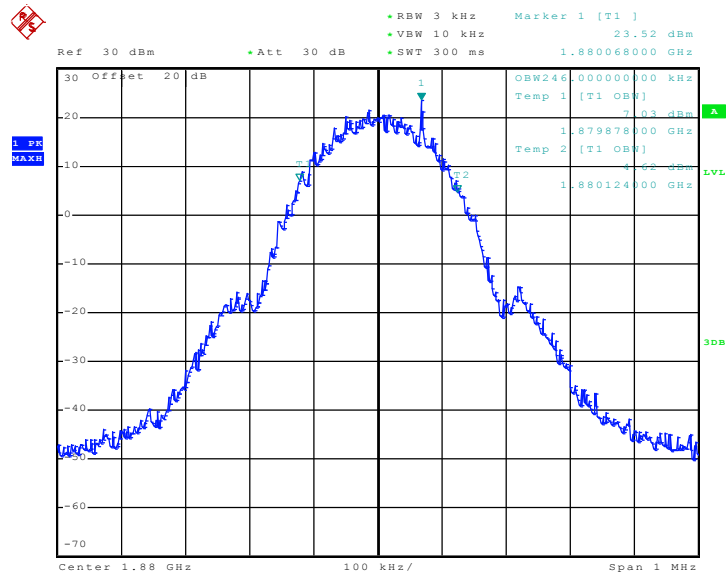

Date: 25.SEP.2009 17:46:42

26dB Bandwidth Plot on Channel 661

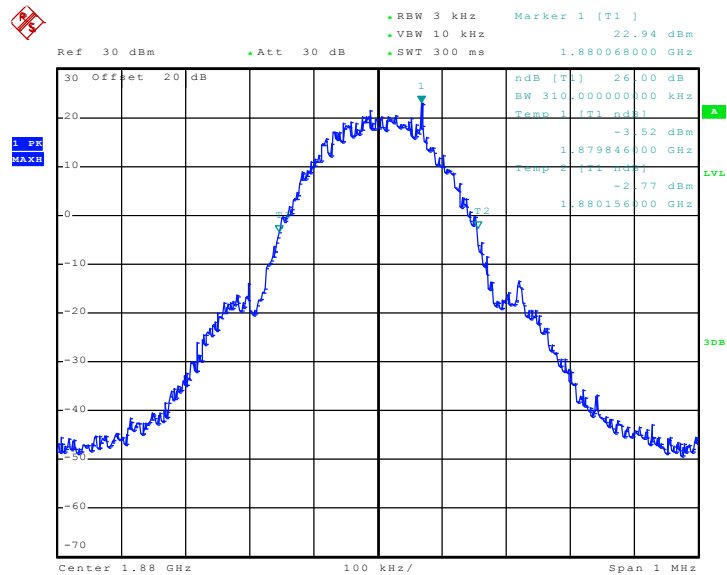


Date: 25.SEP.2009 17:41:54




<b>Band :</b>	GSM 1900	<b>Power Stage :</b>	High
<b>Test Mode :</b>	EDGE 10 Link		

99% Occupied Bandwidth Plot on Channel 661

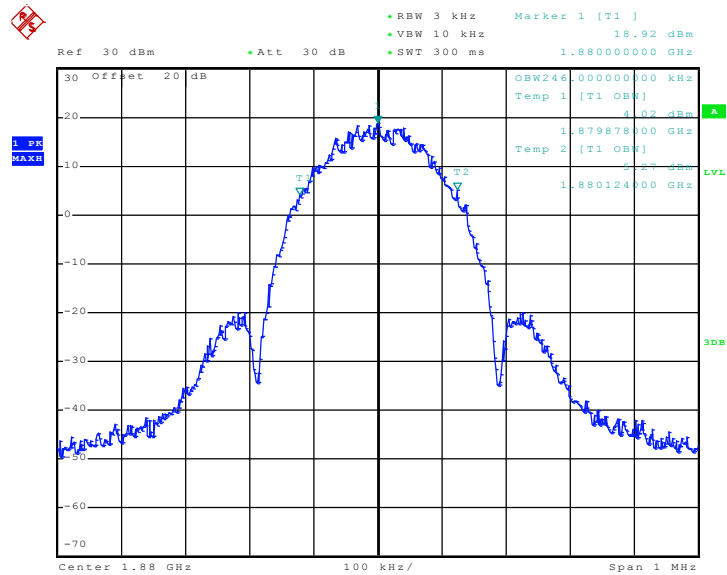

Date: 25.SEP.2009 18:44:44

26dB Bandwidth Plot on Channel 661

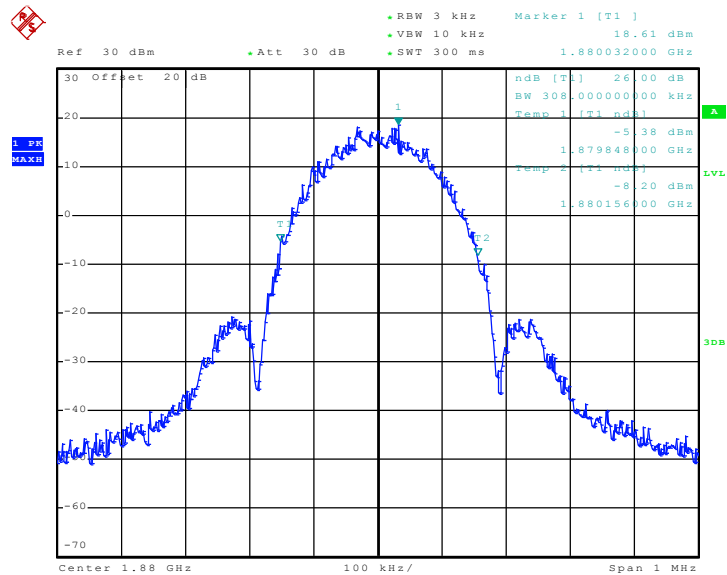


Date: 25.SEP.2009 18:39:58




<b>Band :</b>	WCDMA Band V	<b>Power Stage :</b>	High
<b>Test Mode :</b>	HSDPA Link		

99% Occupied Bandwidth Plot on Channel 4182

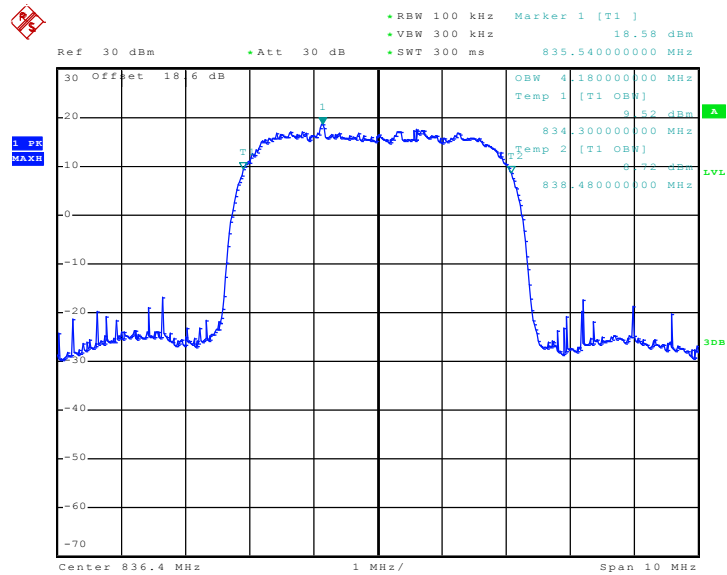

Date: 25.SEP.2009 21:03:48

26dB Bandwidth Plot on Channel 4182

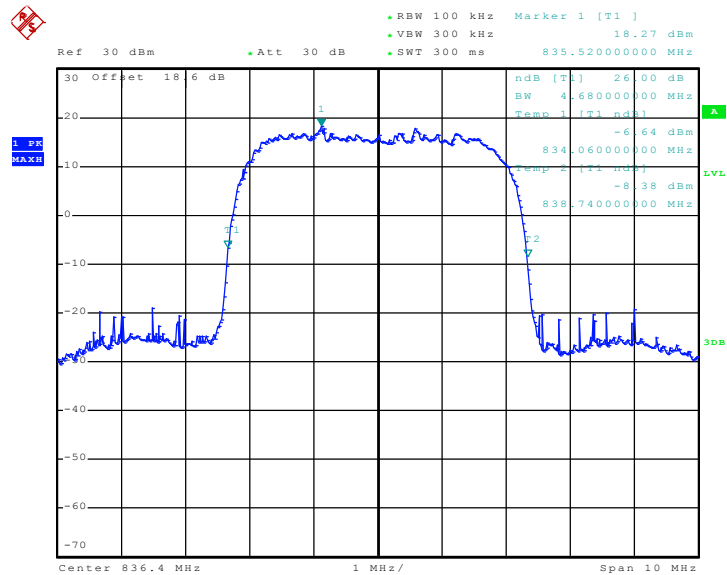


Date: 25.SEP.2009 21:01:54




<b>Band :</b>	WCDMA Band II	<b>Power Stage :</b>	High
<b>Test Mode :</b>	RMC 12.2Kbps Link		

**99% Occupied Bandwidth Plot on Channel 9400**

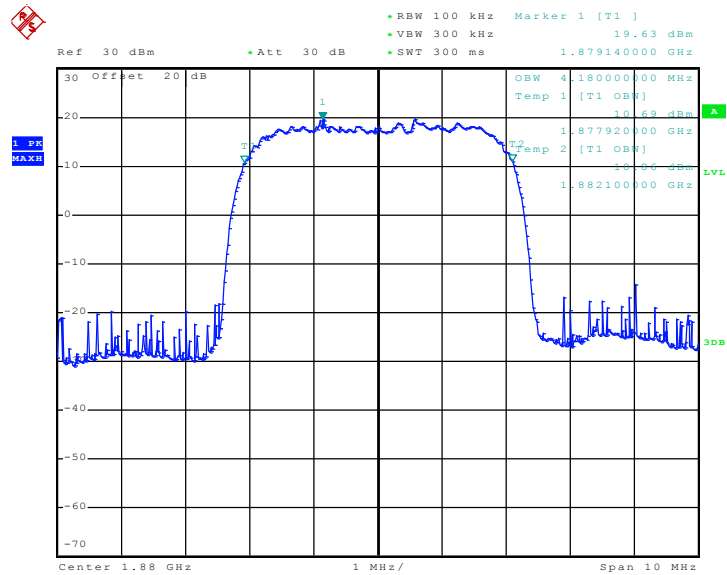

Date: 25.SEP.2009 19:54:18

**26dB Bandwidth Plot on Channel 9400**

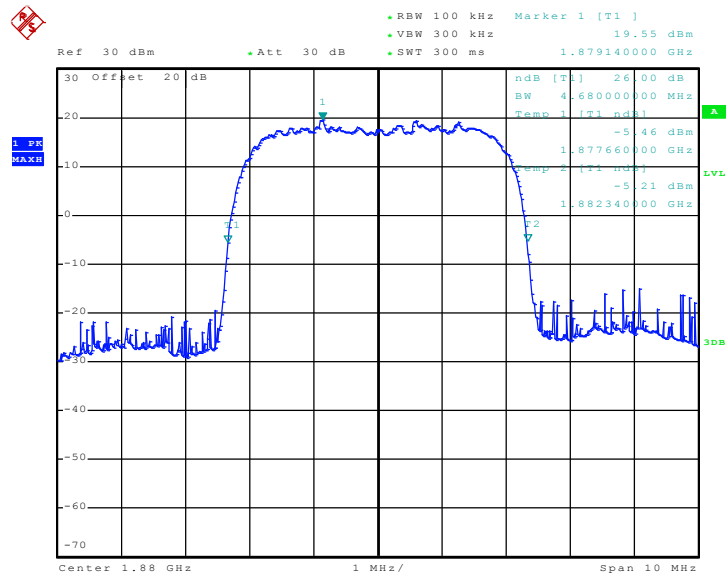

Date: 25.SEP.2009 19:50:36



### 3.4 Band Edge Measurement

#### 3.4.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.

#### 3.4.4 Test Setup

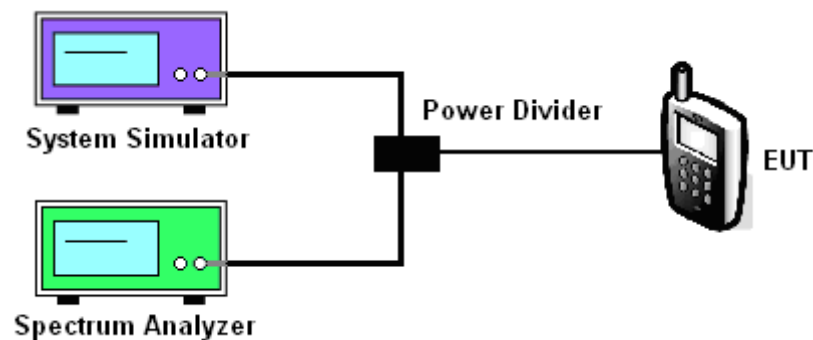




### 3.4.5 Test Result (Plots) of Conducted Band Edge


Band :	GSM850	Power Stage :	High
Test Mode :	GPRS 8 Link		

Lower Band Edge Plot on Channel 128

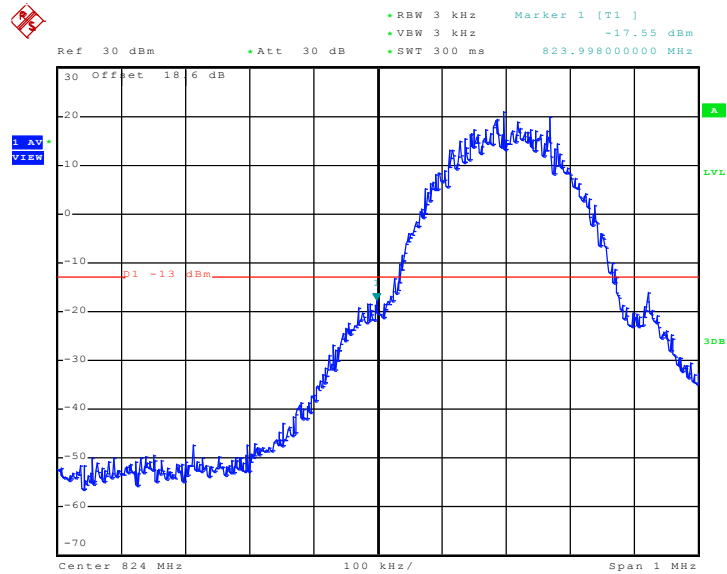

Date: 25.SEP.2009 15:21:37

Higher Band Edge Plot on Channel 251

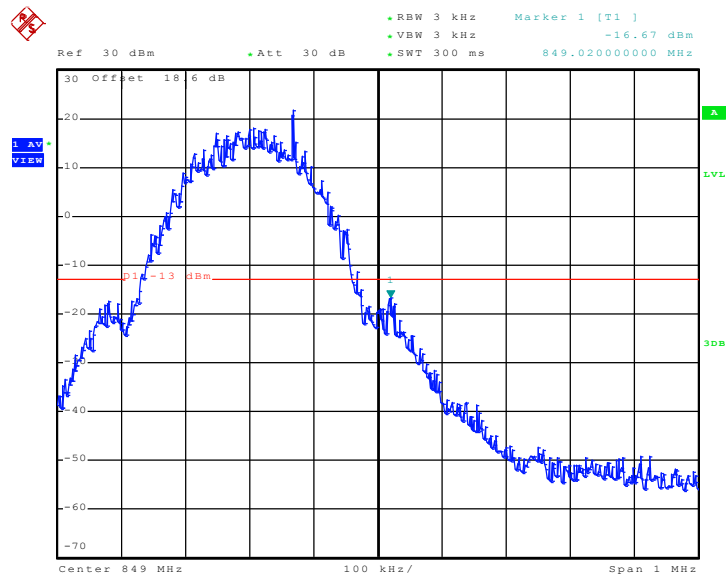


Date: 25.SEP.2009 15:26:02




Band :	GSM850	Power Stage :	High
Test Mode :	EDGE 8 Link		

Lower Band Edge Plot on Channel 128

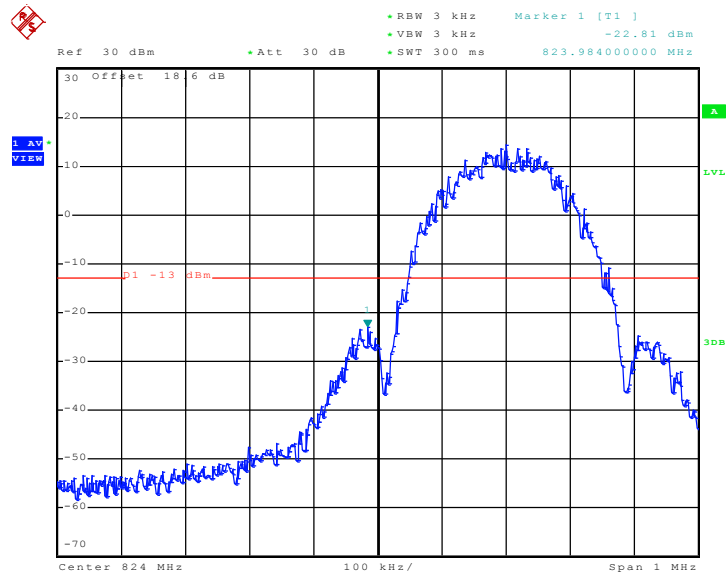

Date: 25.SEP.2009 16:31:07

Higher Band Edge Plot on Channel 251

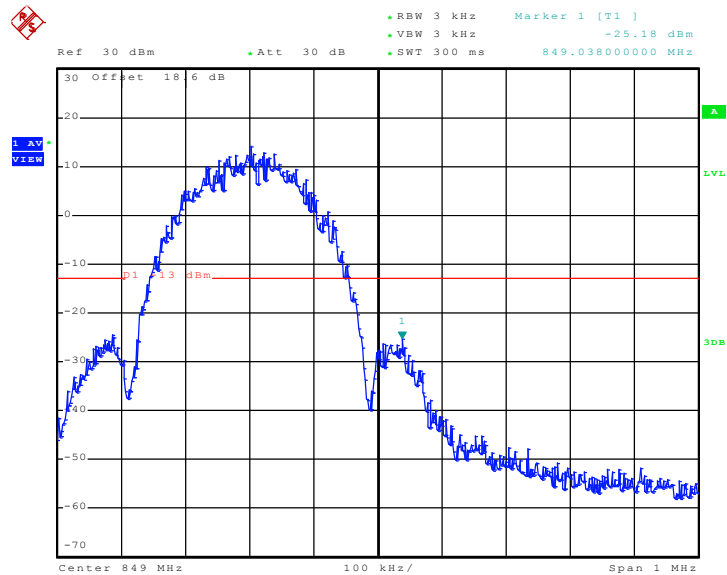


Date: 25.SEP.2009 16:46:49




Band :	GSM1900	Power Stage :	High
Test Mode :	GPRS 8 Link		

Lower Band Edge Plot on Channel 512

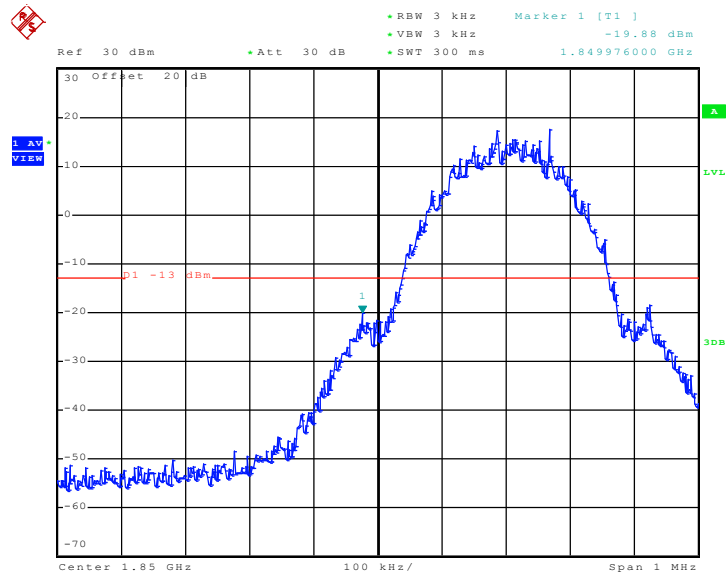

Date: 25.SEP.2009 17:50:59

Higher Band Edge Plot on Channel 810

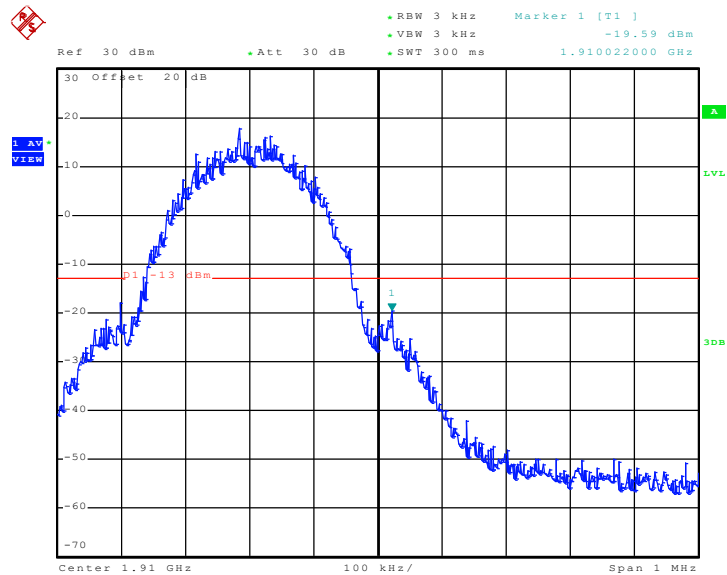


Date: 25.SEP.2009 17:55:00




Band :	GSM1900	Power Stage :	High
Test Mode :	EDGE 10 Link		

Lower Band Edge Plot on Channel 512

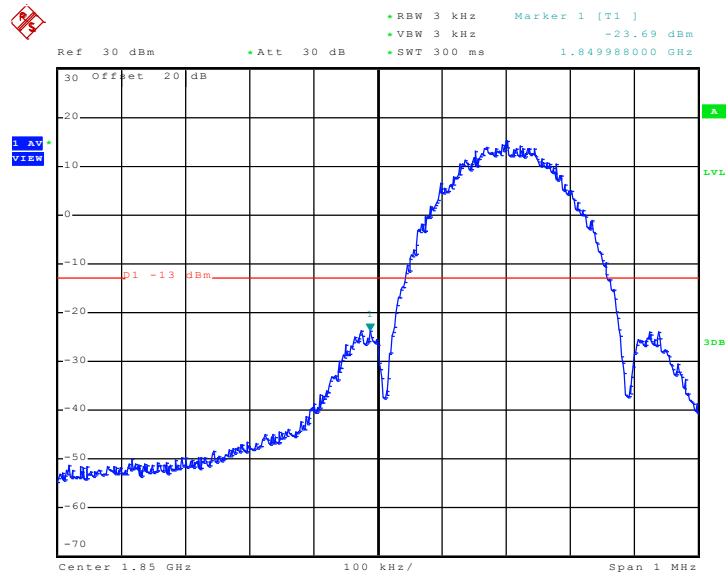

Date: 25.SEP.2009 19:07:08

Higher Band Edge Plot on Channel 810

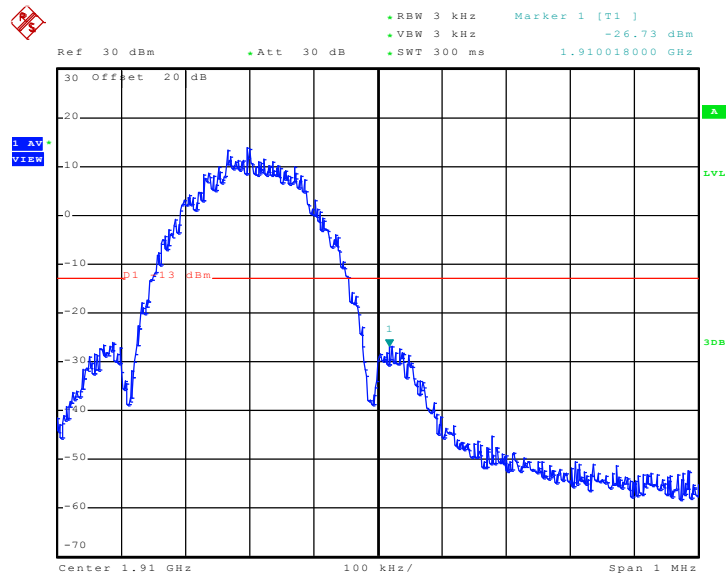


Date: 25.SEP.2009 19:11:28




Band :	WCDMA Band V	Power Stage :	High
Test Mode :	HSDPA Link		

Lower Band Edge Plot on Channel 4132

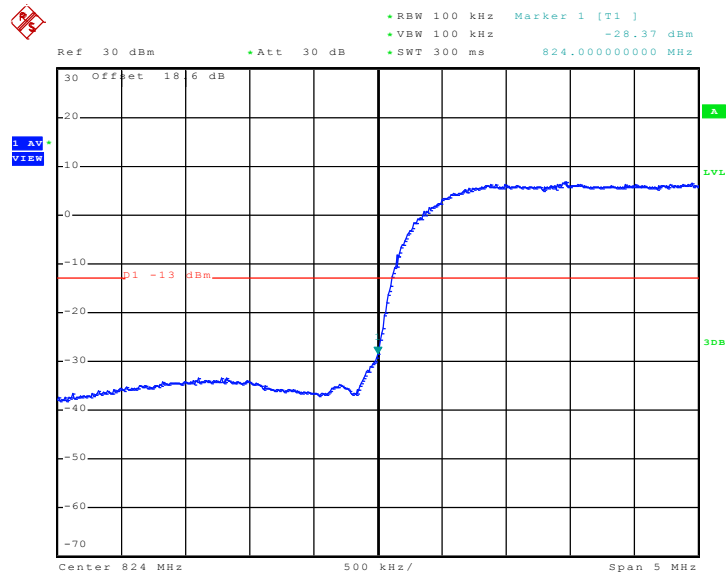

Date: 25.SEP.2009 21:06:22

Higher Band Edge Plot on Channel 4233

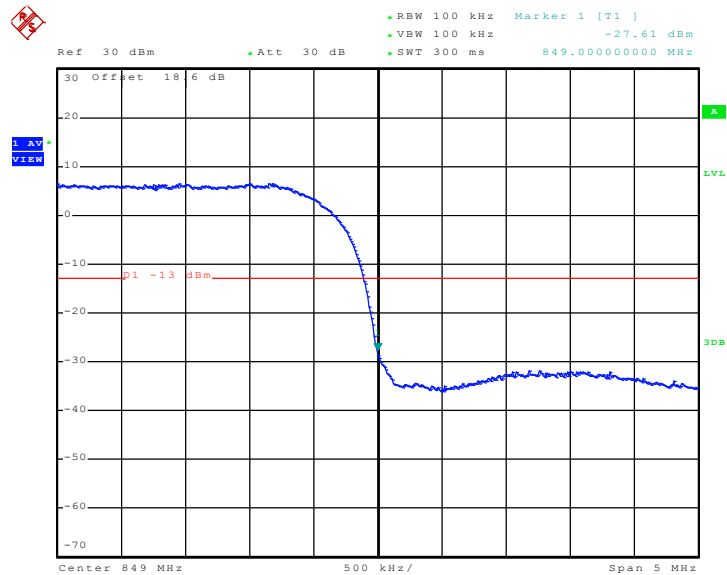


Date: 25.SEP.2009 21:07:33




Band :	WCDMA Band II	Power Stage :	High
Test Mode :	RMC 12.2Kbps Link		

Lower Band Edge Plot on Channel 9262

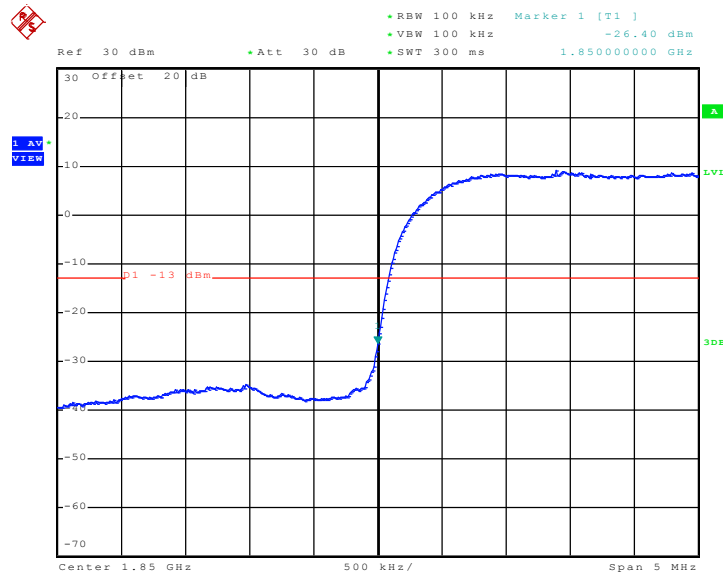

Date: 25.SEP.2009 19:58:35

Higher Band Edge Plot on Channel 9538

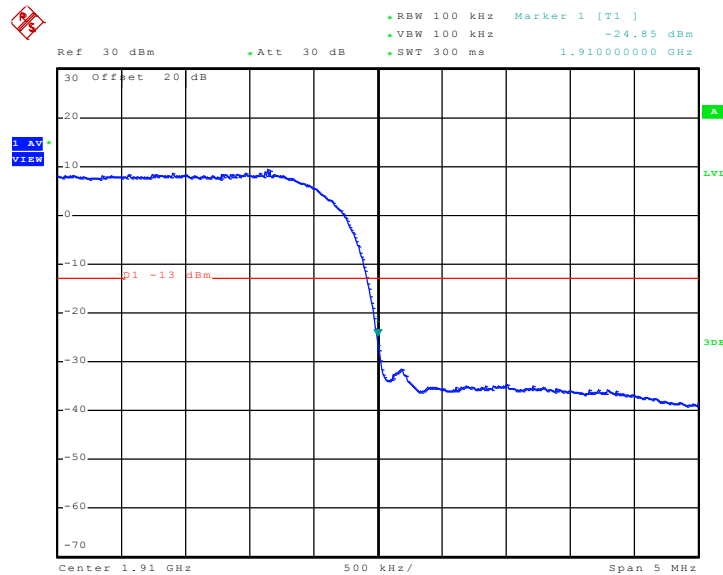

Date: 25.SEP.2009 20:01:33

## 3.5 Conducted Emission Measurement

### 3.5.1 Description of Conducted Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.5.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.

### 3.5.4 Test Setup

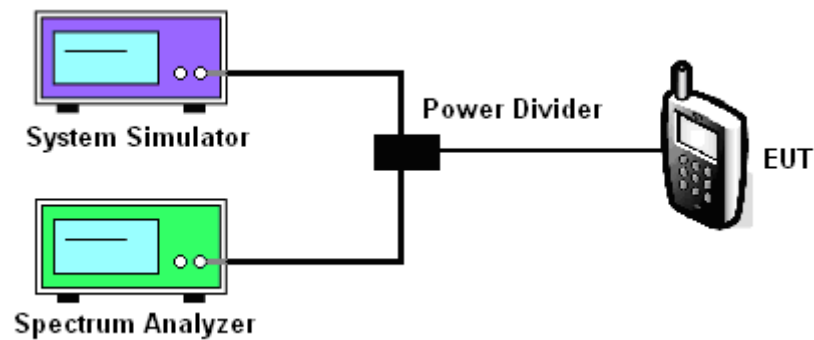




### 3.5.5 Test Result (Plots) of Conducted Emission


Band :	GSM850	Channel :	CH189
Test Mode :	GPRS 8 Link		

Conducted Emission Plot between 30MHz ~ 1GHz

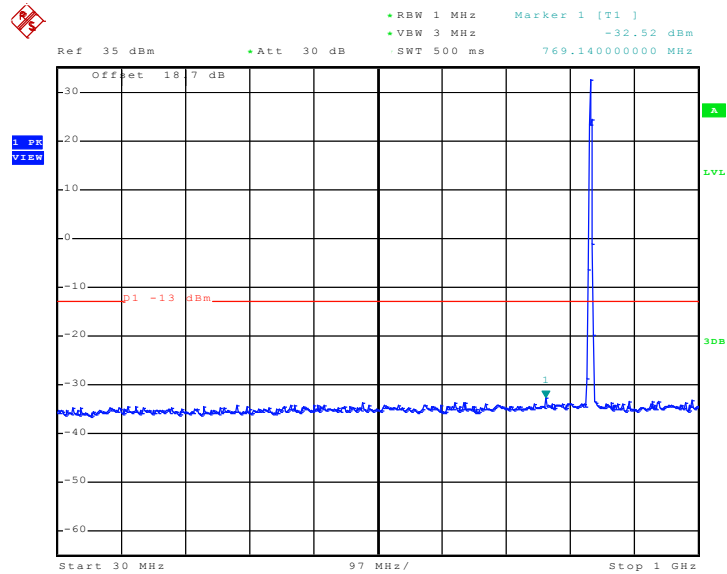

Date: 25.SEP.2009 16:00:13


Conducted Emission Plot between 1GHz ~ 3GHz

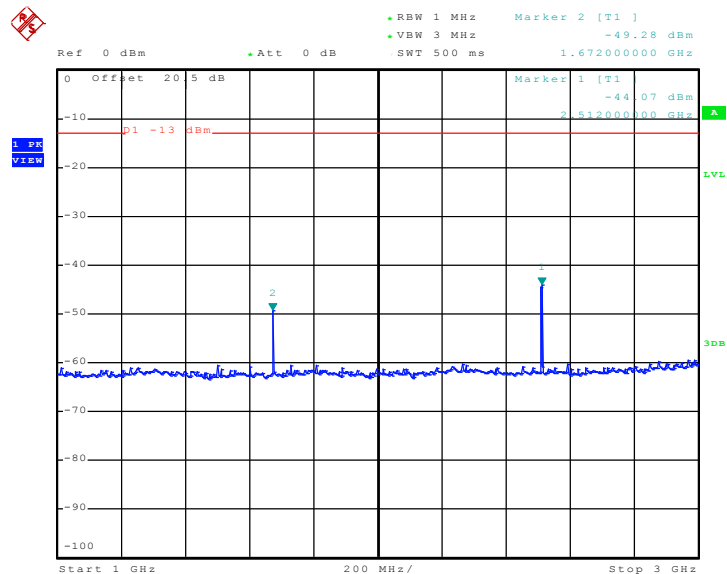

Date: 25.SEP.2009 15:49:36




### Conducted Emission Plot between 3GHz ~ 7GHz

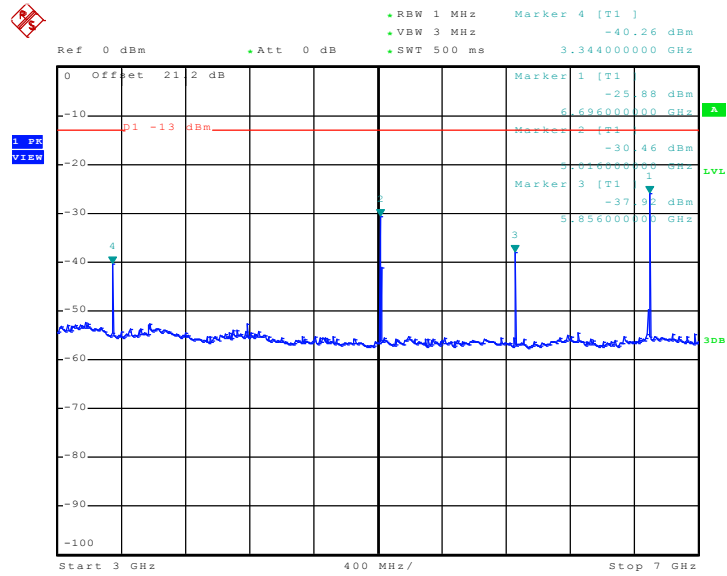

Date: 25.SEP.2009 15:53:28

### Conducted Emission Plot between 7GHz ~ 9GHz

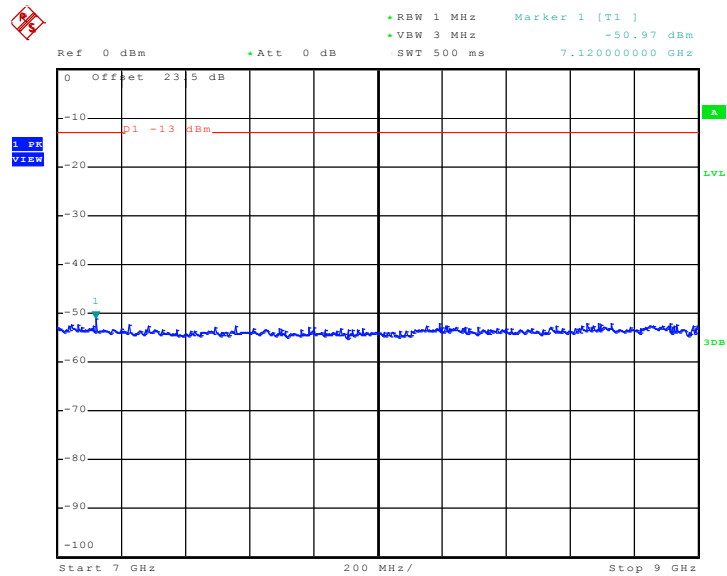


Date: 25.SEP.2009 16:07:23




Band :	GSM850	Channel :	CH189
Test Mode :	EDGE 8 Link		

Conducted Emission Plot between 30MHz ~ 1GHz

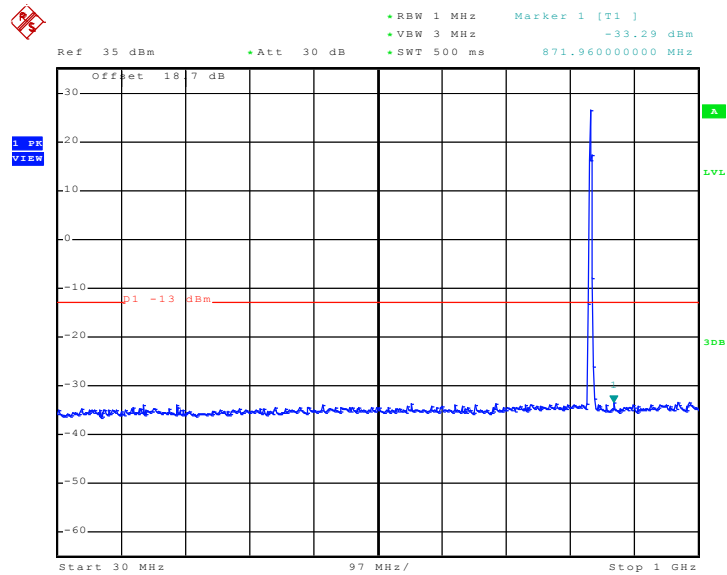

Date: 25.SEP.2009 17:19:54


Conducted Emission Plot between 1GHz ~ 3GHz

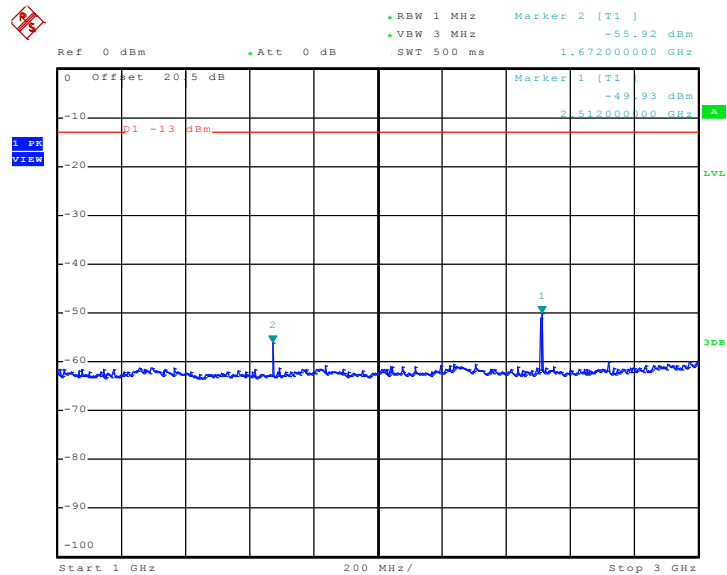

Date: 25.SEP.2009 17:24:16




Conducted Emission Plot between 3GHz ~ 7GHz

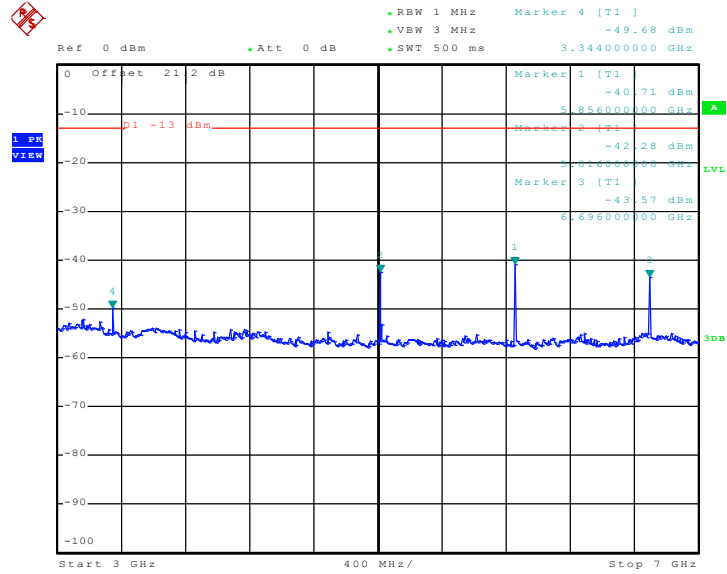

Date: 25.SEP.2009 17:34:16

Conducted Emission Plot between 7GHz ~ 9GHz

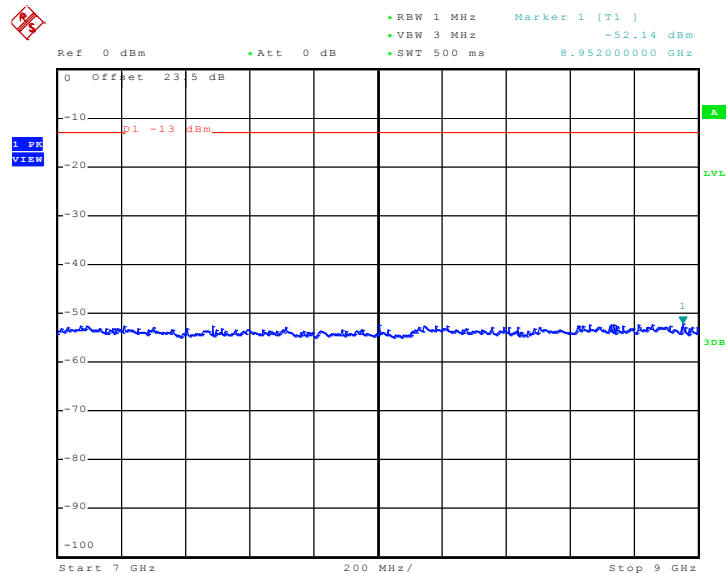


Date: 25.SEP.2009 17:30:53




Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS 8 Link		

Conducted Emission Plot between 30MHz ~ 1GHz

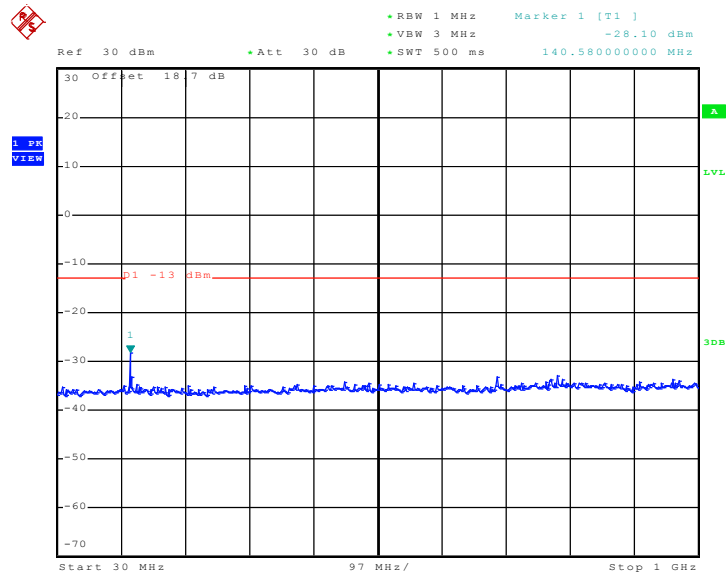

Date: 25.SEP.2009 18:07:59


Conducted Emission Plot between 1GHz ~ 3GHz

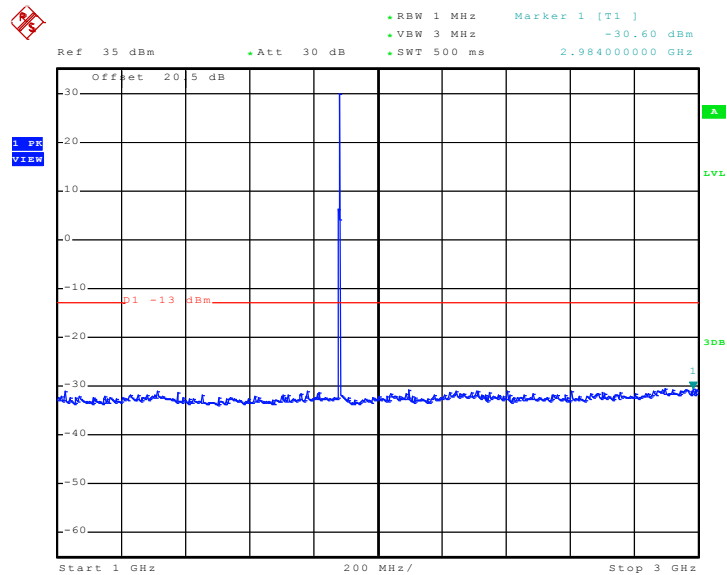

Date: 25.SEP.2009 18:10:55




Conducted Emission Plot between 3GHz ~ 7GHz

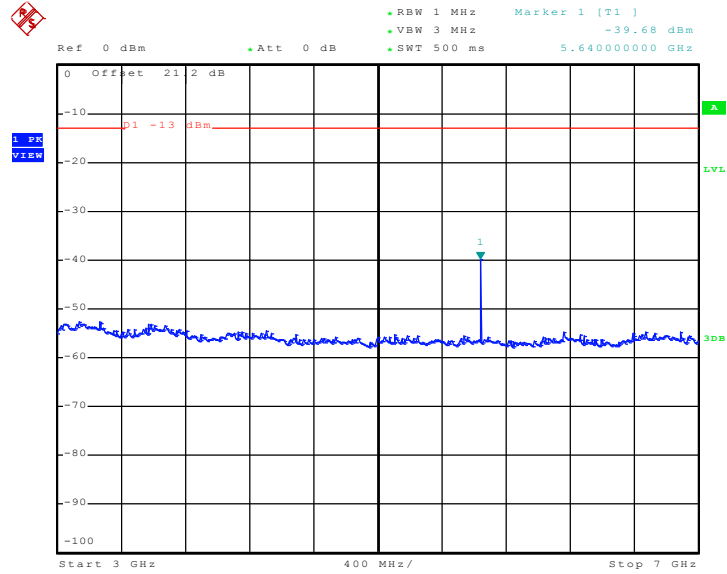

Date: 25.SEP.2009 18:16:08


Conducted Emission Plot between 7GHz ~ 13.6GHz

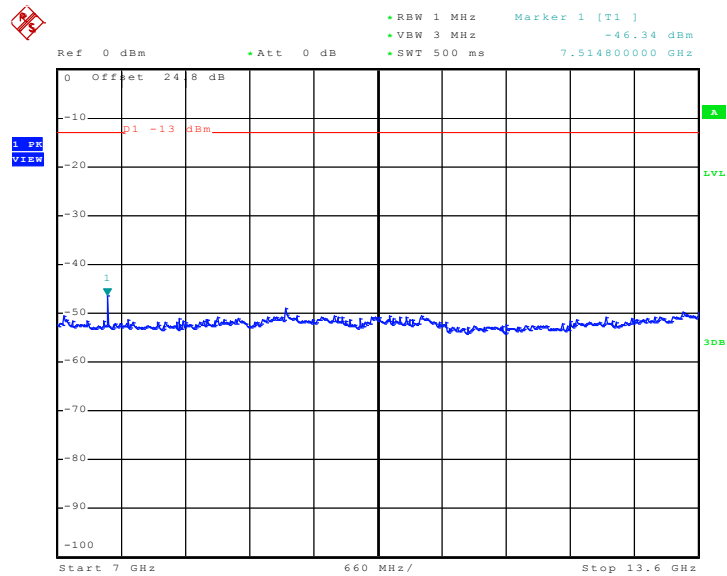

Date: 25.SEP.2009 18:33:48



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

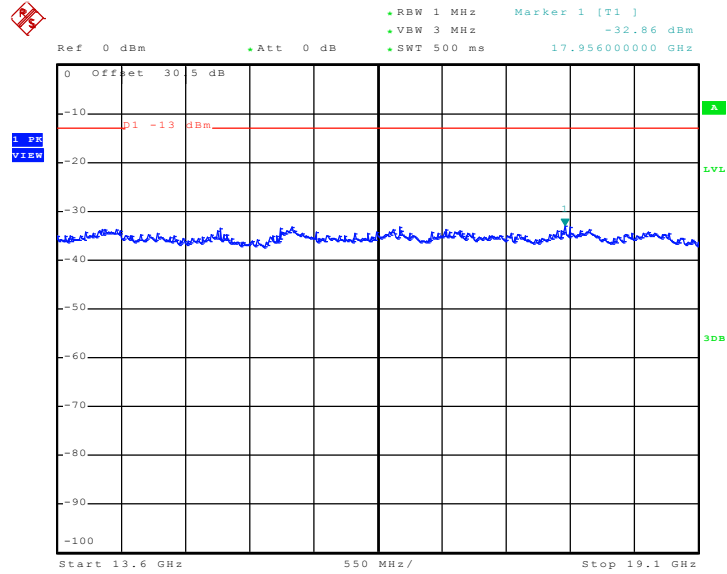


Date: 25.SEP.2009 18:35:12




Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE 10 Link		

Conducted Emission Plot between 30MHz ~ 1GHz

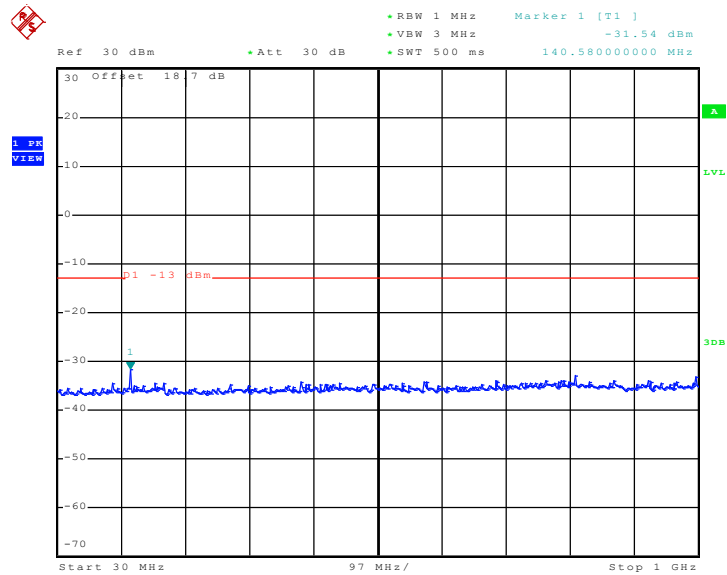

Date: 25.SEP.2009 19:29:59

Conducted Emission Plot between 1GHz ~ 3GHz

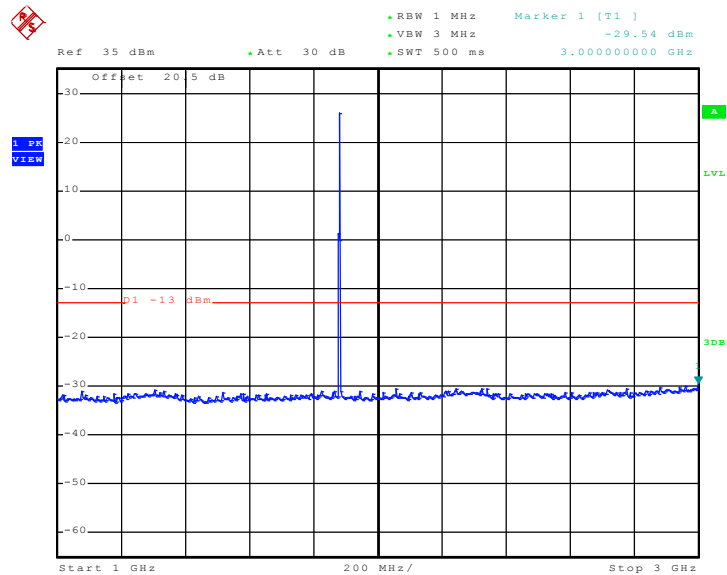


Date: 25.SEP.2009 19:32:44






Conducted Emission Plot between 3GHz ~ 7GHz

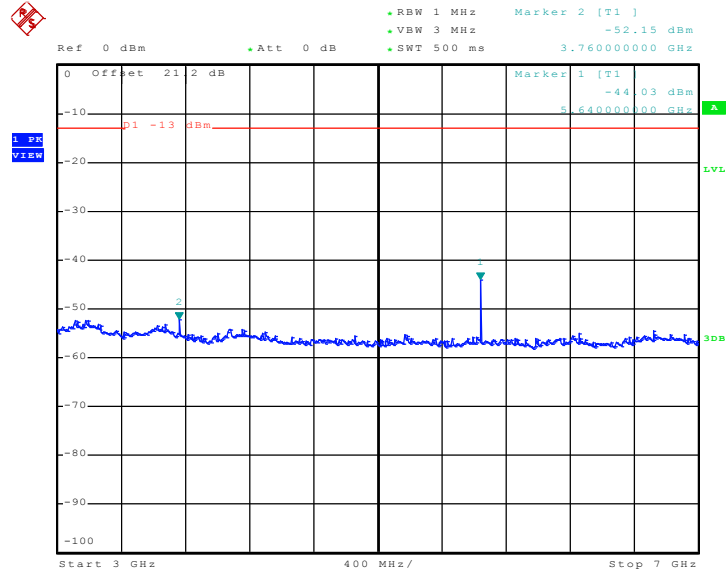

Date: 25.SEP.2009 19:34:59


Conducted Emission Plot between 7GHz ~ 13.6GHz

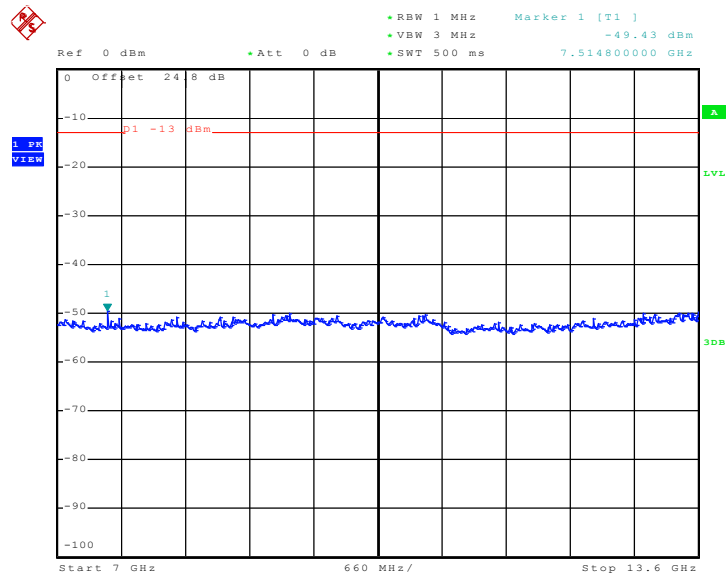

Date: 25.SEP.2009 19:37:04



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

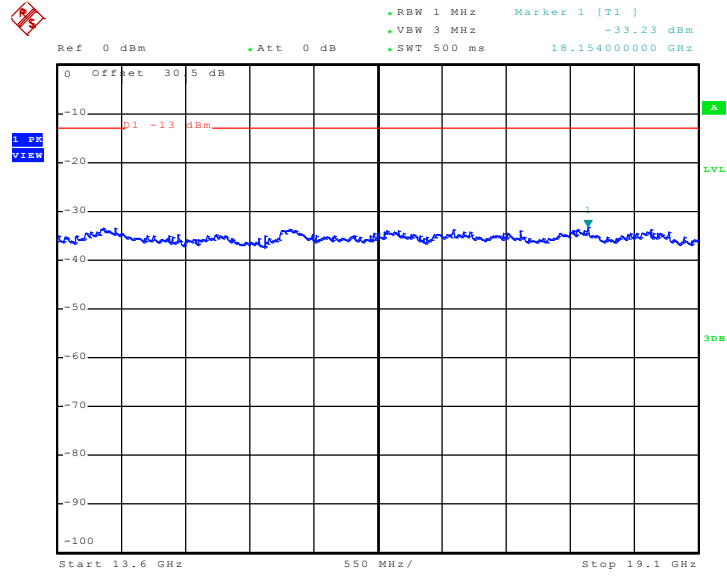


Date: 25.SEP.2009 19:38:59




Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	HSDPA Link		

Conducted Emission Plot between 30MHz ~ 1GHz

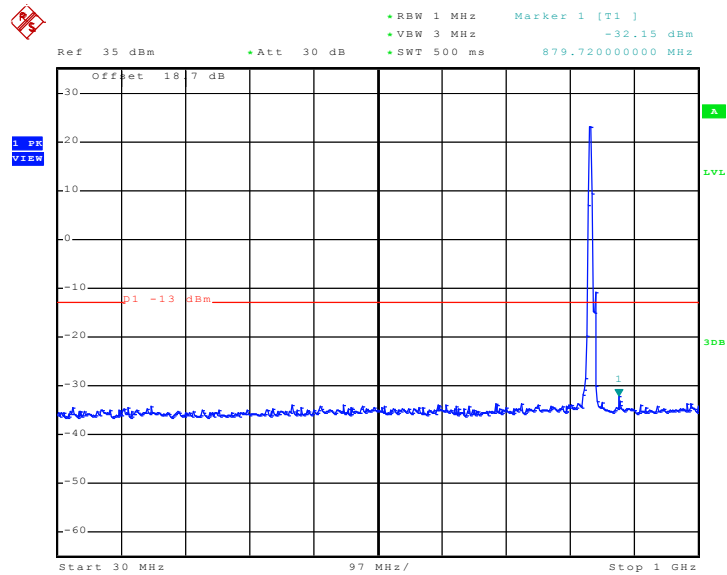

Date: 25.SEP.2009 21:20:58


Conducted Emission Plot between 1GHz ~ 3GHz

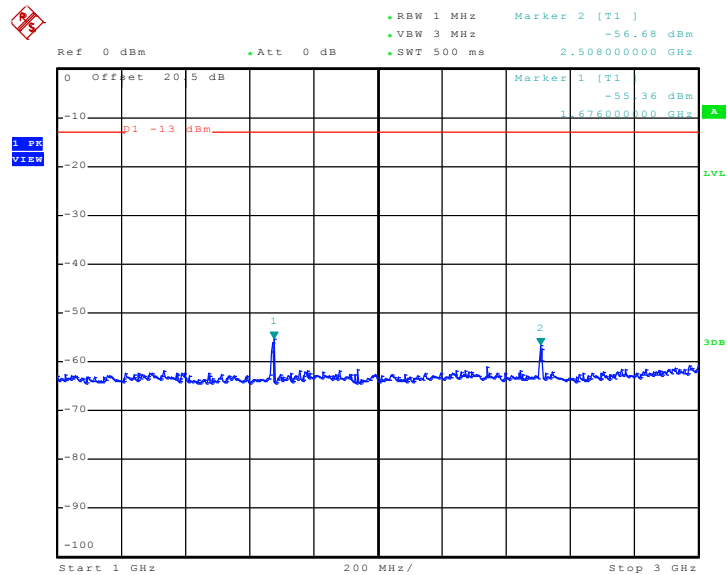

Date: 25.SEP.2009 21:22:01




Conducted Emission Plot between 3GHz ~ 7GHz

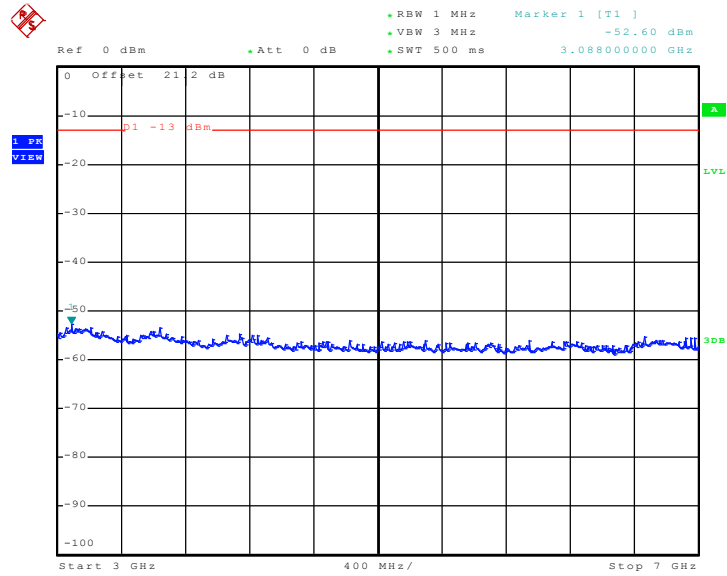

Date: 25.SEP.2009 21:22:29

Conducted Emission Plot between 7GHz ~ 9GHz

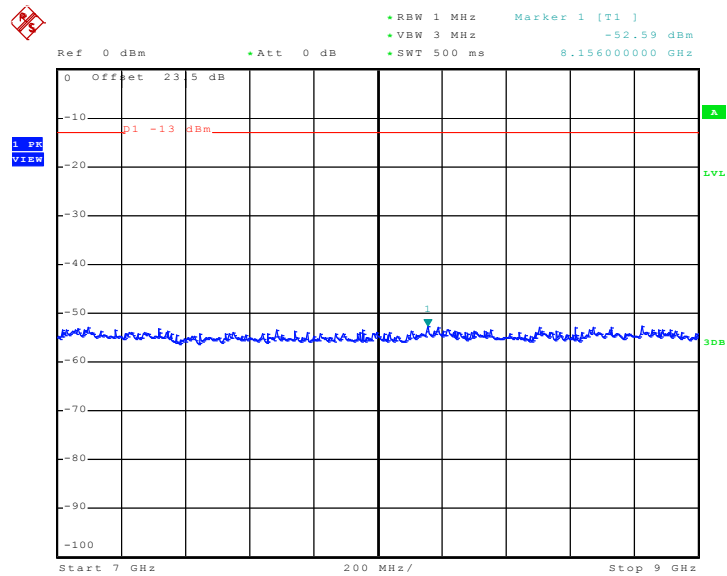


Date: 25.SEP.2009 21:22:53




Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link		

Conducted Emission Plot between 30MHz ~ 1GHz

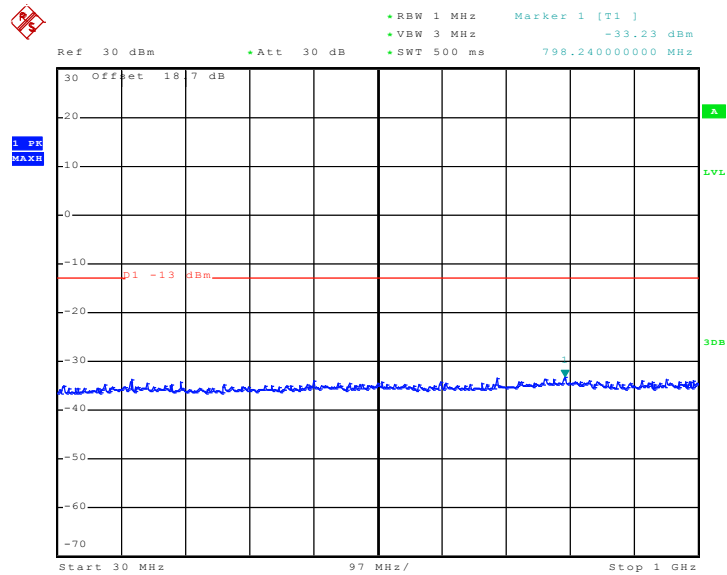

Date: 25.SEP.2009 20:29:10


Conducted Emission Plot between 1GHz ~ 3GHz

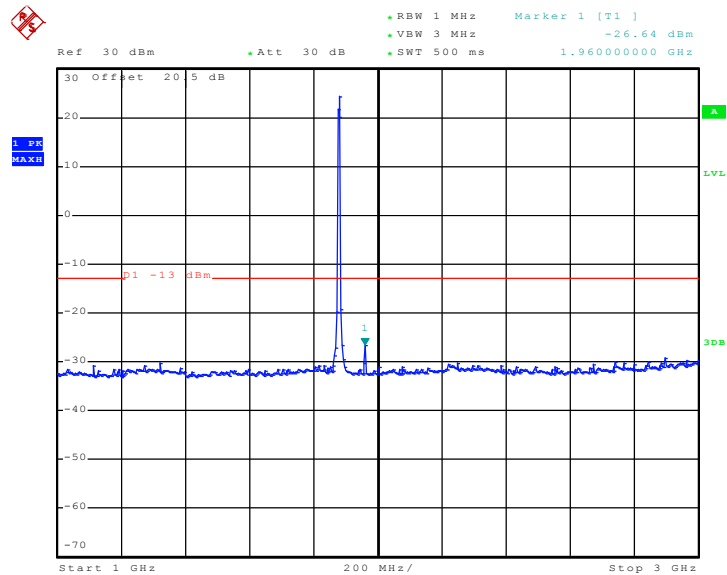

Date: 25.SEP.2009 20:51:58




Conducted Emission Plot between 3GHz ~ 7GHz

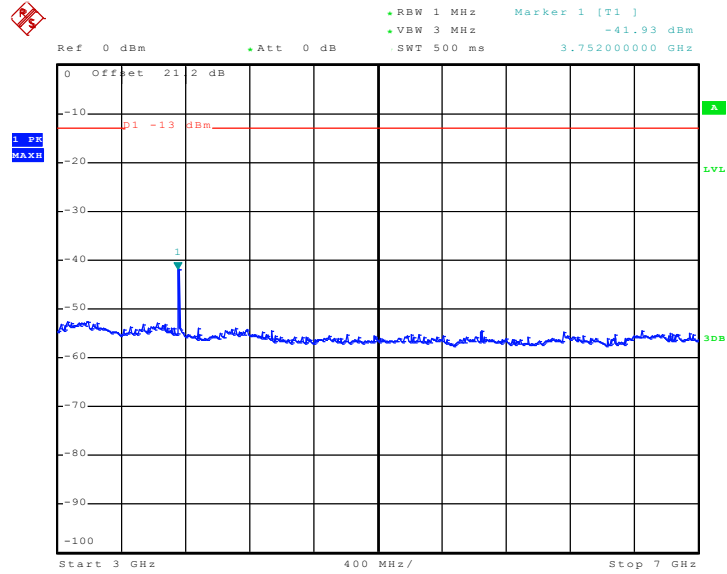

Date: 25.SEP.2009 20:53:52


Conducted Emission Plot between 7GHz ~ 13.6GHz

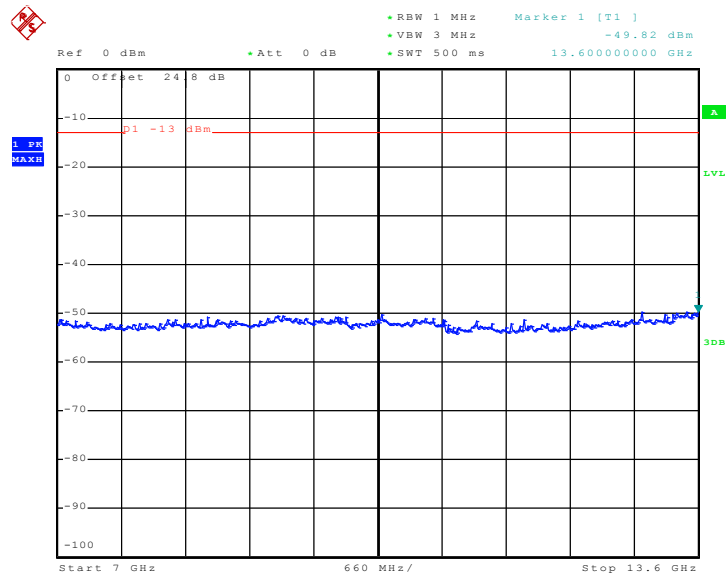

Date: 25.SEP.2009 20:55:01



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

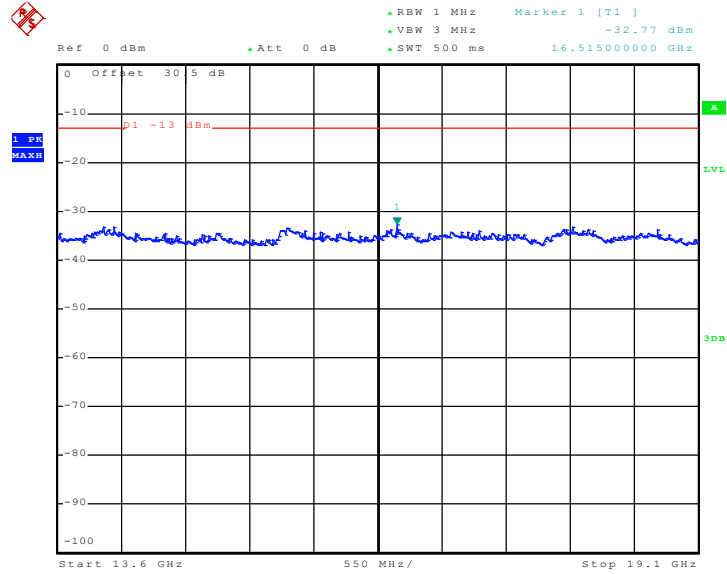

Date: 25.SEP.2009 20:58:06



## **3.6 Field Strength of Spurious Radiation Measurement**

### **3.6.1 Description of Field Strength of Spurious Radiated Measurement**

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### **3.6.2 Measuring Instruments**


See list of measuring instruments of this test report.

### **3.6.3 Test Procedures**

1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10.  $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11.  $ERP (dBm) = EIRP - 2.15$




### 3.6.4 Test Setup

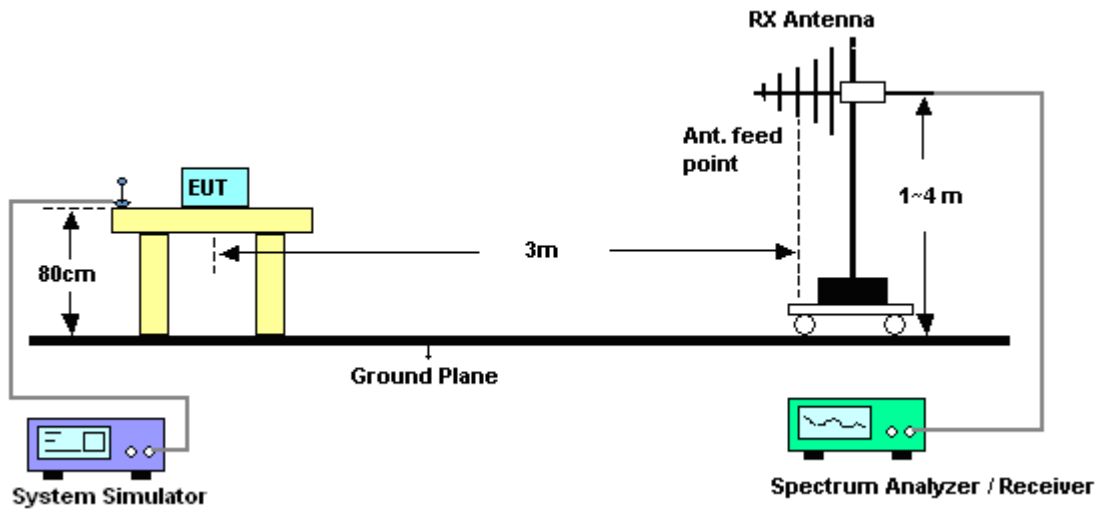



3.6.5 Test Result of Field Strength of Spurious Radiated


Band :	GSM850	Temperature :	28~29°C
Test Mode :	GPRS 8 Link	Relative Humidity :	41~42%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

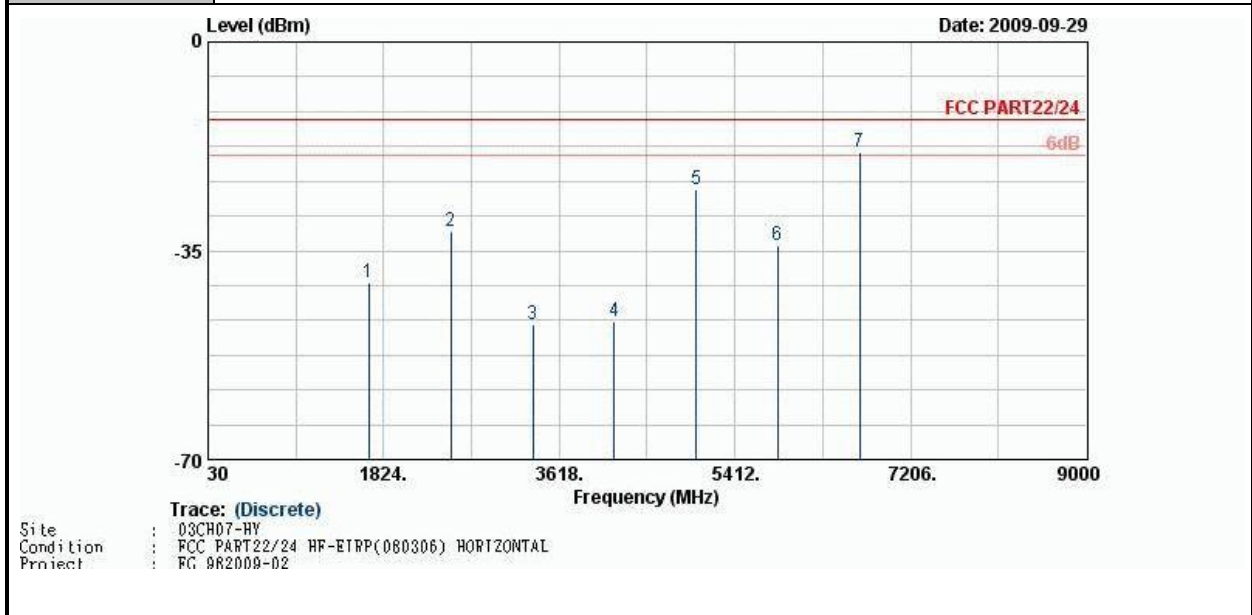

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1669	-40.29	-13	-27.29	-49	-40.14	3.39	5.39	H	Pass
2509	-31.62	-13	-18.62	-40.34	-31.88	3.71	6.12	H	Pass
3346	-47.47	-13	-34.47	-58.42	-50.19	3.13	8.00	H	Pass
4175	-46.82	-13	-33.82	-58.36	-50.66	3.01	9.00	H	Pass
5015	-24.64	-13	-11.64	-41.36	-29.61	2.61	9.73	H	Pass
5850	-33.98	-13	-20.98	-51.99	-37.85	4.38	10.40	H	Pass
6690	-18.55	-13	-5.55	-38.12	-22.33	5.22	11.15	H	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	28~29°C
<b>Test Mode :</b>	GPRS 8 Link	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

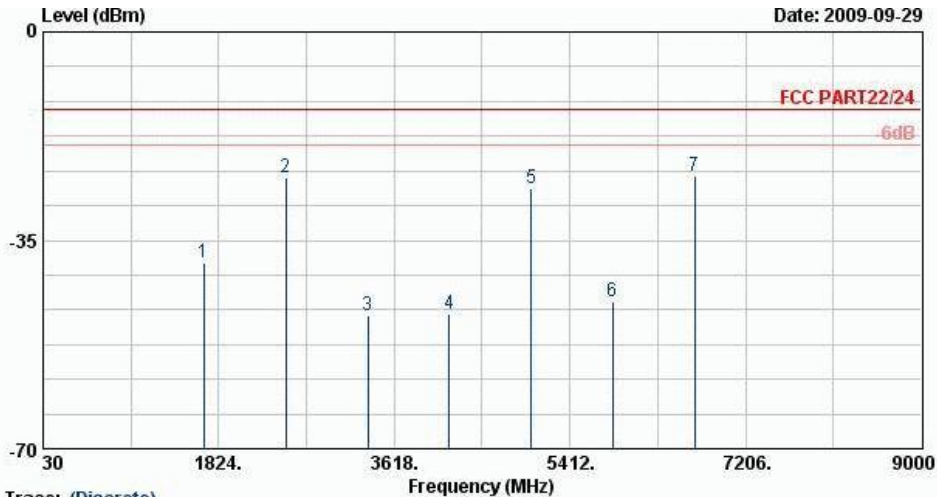


Trace: (Discrete)  
 Site : 08CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(080306) VERTICAL  
 Project : FG 982009-02

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-38.68	-13	-25.68	-47.56	-38.53	3.39	5.39	V	Pass
2509	-25.54	-13	-12.54	-37.92	-25.8	3.71	6.12	V	Pass
3346	-47.69	-13	-34.69	-58.23	-50.41	3.13	8.00	V	Pass
4175	-47.37	-13	-34.37	-60.09	-51.21	3.01	9.00	V	Pass
5015	-26.25	-13	-13.25	-44.26	-31.22	2.61	9.73	V	Pass
5850	-45.22	-13	-32.22	-59.74	-49.09	4.38	10.40	V	Pass
6690	-24.27	-13	-11.27	-42.03	-28.05	5.22	11.15	V	Pass




<b>Band :</b>	GSM850	<b>Temperature :</b>	28~29°C
<b>Test Mode :</b>	EDGE 8 Link	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

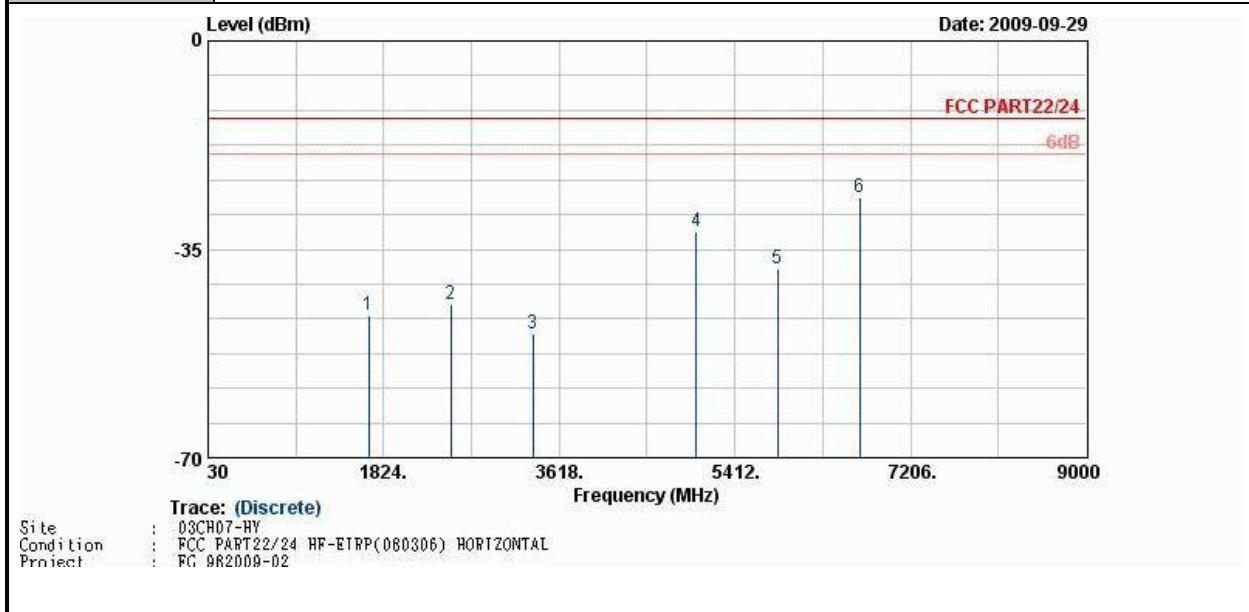

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-46.01	-13	-33.01	-53.72	-45.86	3.39	5.39	H	Pass
2509	-44.36	-13	-31.36	-52.96	-44.62	3.71	6.12	H	Pass
3346	-49.06	-13	-36.06	-60.01	-51.78	3.13	8.00	H	Pass
5015	-32.05	-13	-19.05	-47.48	-37.02	2.61	9.73	H	Pass
5850	-38.36	-13	-25.36	-55.93	-42.23	4.38	10.40	H	Pass
6690	-26.33	-13	-13.33	-47.19	-30.11	5.22	11.15	H	Pass



Band :	GSM850	Temperature :	28~29°C
Test Mode :	EDGE 8 Link	Relative Humidity :	41~42%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

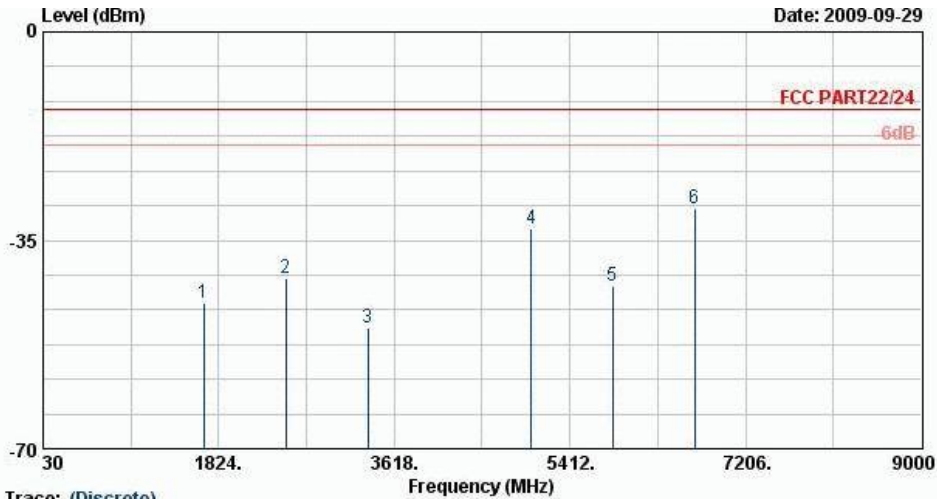


Trace: (Discrete)  
 Site : 08CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(080306) VERTICAL  
 Project : FG 982009-02

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-45.45	-13	-32.45	-53.4	-45.3	3.39	5.39	V	Pass
2509	-41.48	-13	-28.48	-52.51	-41.74	3.71	6.12	V	Pass
3346	-49.76	-13	-36.76	-62.2	-52.48	3.13	8.00	V	Pass
5015	-32.97	-13	-19.97	-50.47	-37.94	2.61	9.73	V	Pass
5850	-42.70	-13	-29.70	-60.82	-46.57	4.38	10.40	V	Pass
6690	-29.76	-13	-16.76	-48.44	-33.54	5.22	11.15	V	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	28~29°C
<b>Test Mode :</b>	GPRS 8 Link + 802.11g Tx CH01	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

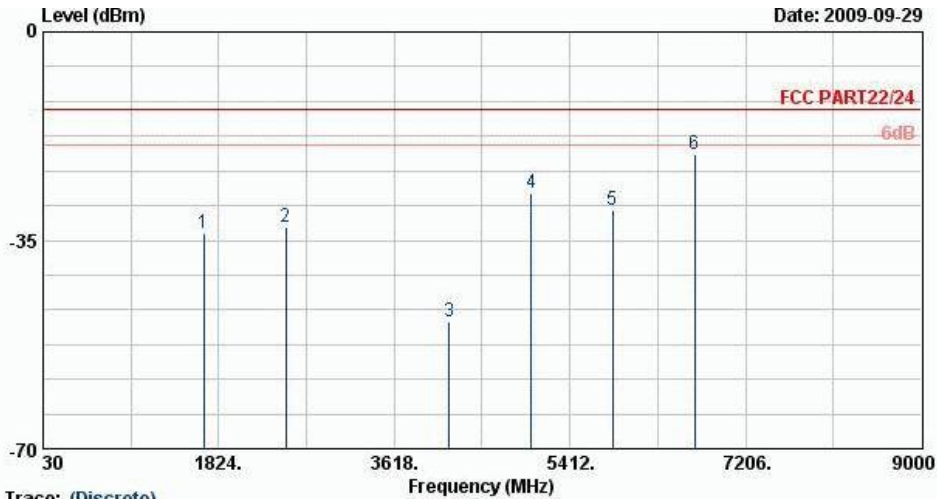


Trace: (Discrete)  
 Site : 08CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(080306) HORIZONTAL  
 Project : FG 982009-02

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-33.74	-13	-20.74	-42.97	-33.59	3.39	5.39	H	Pass
2509	-32.91	-13	-19.91	-41.58	-33.17	3.71	6.12	H	Pass
4175	-48.65	-13	-35.65	-61.75	-52.49	3.01	9.00	H	Pass
5015	-27.19	-13	-14.19	-43.77	-32.16	2.61	9.73	H	Pass
5850	-29.92	-13	-16.92	-48.44	-33.79	4.38	10.40	H	Pass
6690	-20.53	-13	-7.53	-40.03	-24.31	5.22	11.15	H	Pass




<b>Band :</b>	GSM850	<b>Temperature :</b>	28~29°C
<b>Test Mode :</b>	GPRS 8 Link + 802.11g Tx CH01	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

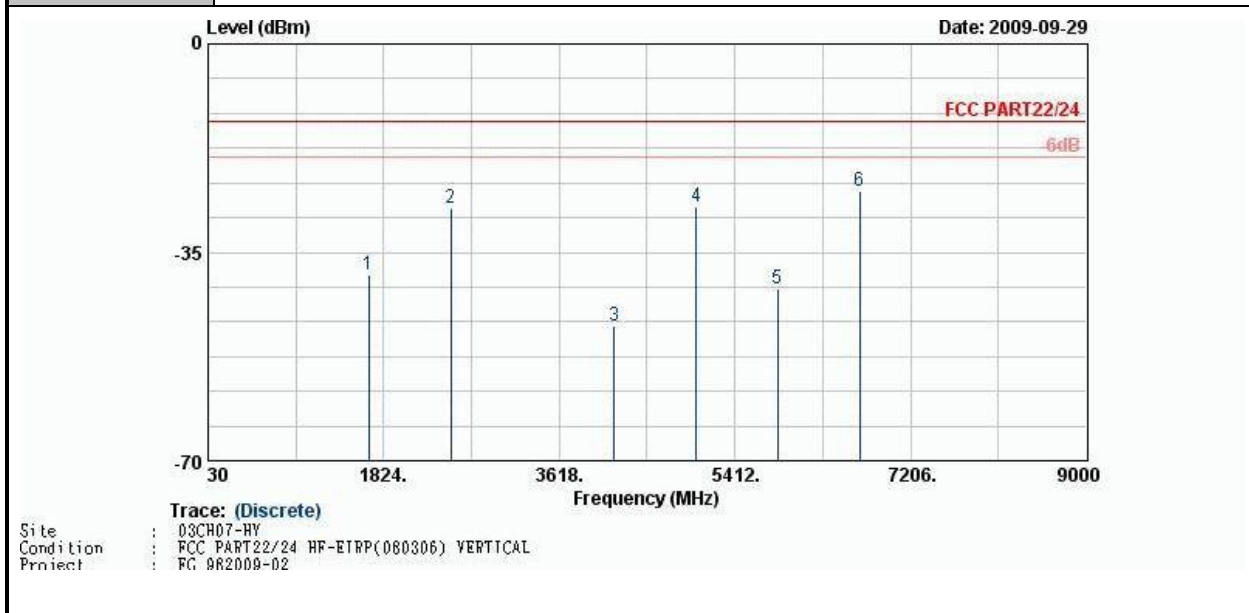

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-38.65	-13	-25.65	-47.15	-38.5	3.39	5.39	V	Pass
2509	-27.66	-13	-14.66	-39.97	-27.92	3.71	6.12	V	Pass
4175	-47.30	-13	-34.30	-61.23	-51.14	3.01	9.00	V	Pass
5015	-27.25	-13	-14.25	-45.12	-32.22	2.61	9.73	V	Pass
5850	-41.15	-13	-28.15	-56.83	-45.02	4.38	10.40	V	Pass
6690	-24.69	-13	-11.69	-43.75	-28.47	5.22	11.15	V	Pass



<b>Band :</b>	GSM1900	<b>Temperature :</b>	28~29°C
<b>Test Mode :</b>	GPRS 8 Link	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

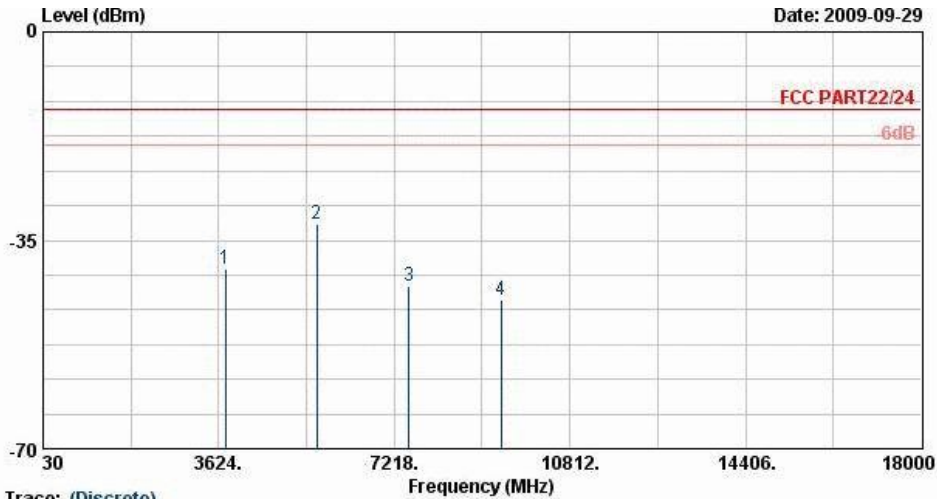


Trace: (Discrete)  
 Site : 08CH07-HY  
 Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL  
 Project : FG 982009-02

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-39.90	-13	-26.90	-54.84	-42.93	4.88	7.91	H	Pass
5636	-32.36	-13	-19.36	-53.73	-36.58	5.55	9.77	H	Pass
7520	-42.65	-13	-29.65	-64.35	-46.82	6.64	10.81	H	Pass
9396	-44.90	-13	-31.90	-65.45	-48.71	6.91	10.72	H	Pass





<b>Band :</b>	GSM1900	<b>Temperature :</b>	28~29°C
<b>Test Mode :</b>	GPRS 8 Link	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

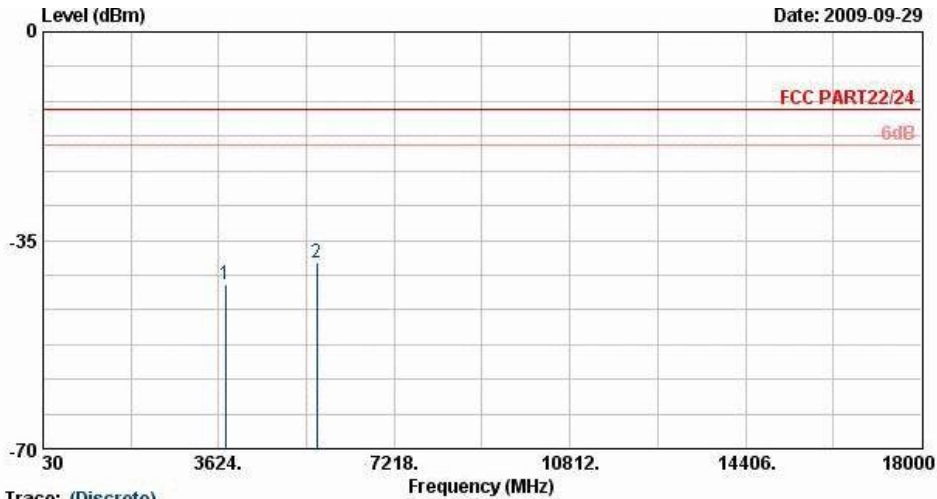


Trace: (Discrete)  
 Site : 08CH07-HY  
 Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL  
 Project : FG 982009-02

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-42.33	-13	-29.33	-58.6	-45.36	4.88	7.91	V	Pass
5636	-38.65	-13	-25.65	-59.27	-42.87	5.55	9.77	V	Pass



<b>Band :</b>	GSM1900	<b>Temperature :</b>	28~29°C
<b>Test Mode :</b>	EDGE 10 Link	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

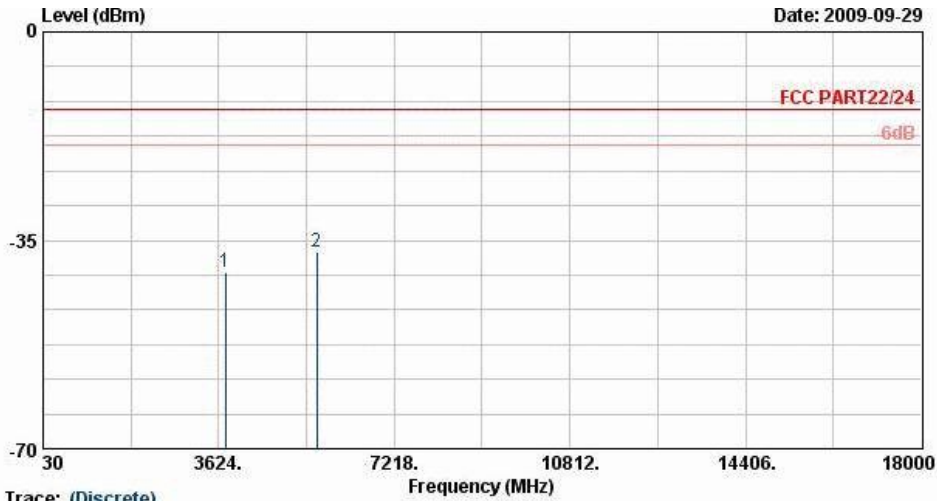


Trace: (Discrete)  
 Site : 08CH07-HY  
 Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL  
 Project : FG 982009-02

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-40.30	-13	-27.30	-55.1	-43.33	4.88	7.91	H	Pass
5636	-36.94	-13	-23.94	-57.68	-41.16	5.55	9.77	H	Pass



<b>Band :</b>	GSM1900	<b>Temperature :</b>	28~29°C
<b>Test Mode :</b>	EDGE 10 Link	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

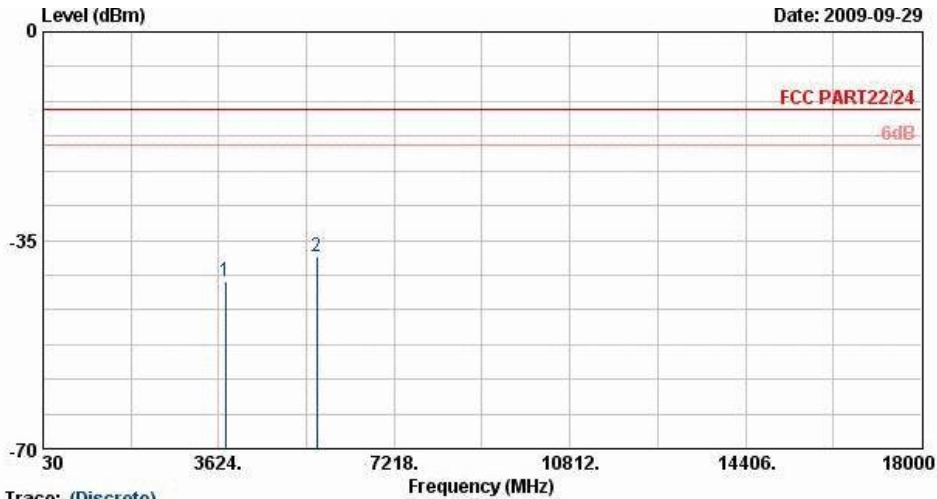


Trace: (Discrete)  
 Site : 08CH07-HY  
 Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL  
 Project : FG 982009-02

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-41.95	-13	-28.95	-58.22	-44.98	4.88	7.91	V	Pass
5636	-37.74	-13	-24.74	-58.19	-41.96	5.55	9.77	V	Pass



<b>Band :</b>	WCDMA Band V	<b>Temperature :</b>	28~29°C
<b>Test Mode :</b>	HSDPA Link	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

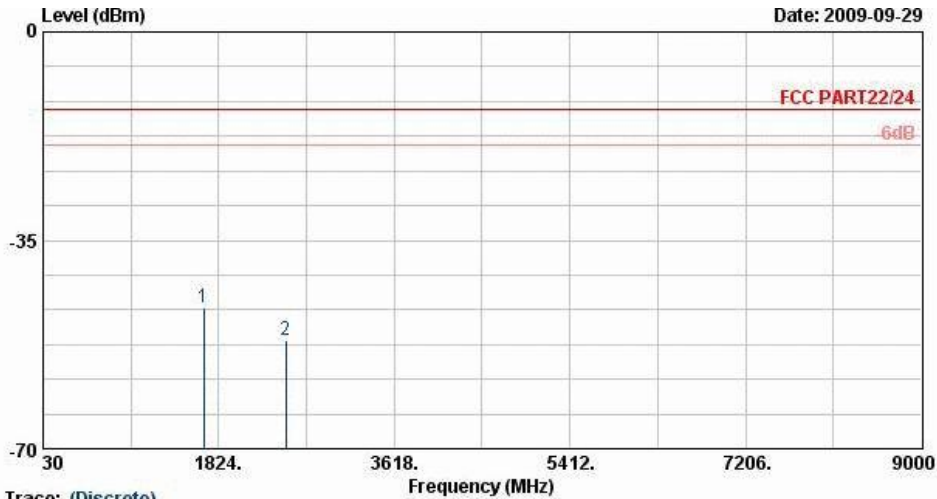


Trace: (Discrete)  
 Site : 08CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(080306) HORIZONTAL  
 Project : FG 982009-02

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1669	-46.20	-13	-33.20	-53.91	-46.05	3.39	5.39	H	Pass
2509	-51.76	-13	-38.76	-61.9	-52.02	3.71	6.12	H	Pass




<b>Band :</b>	WCDMA Band V	<b>Temperature :</b>	28~29°C
<b>Test Mode :</b>	HSDPA Link	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

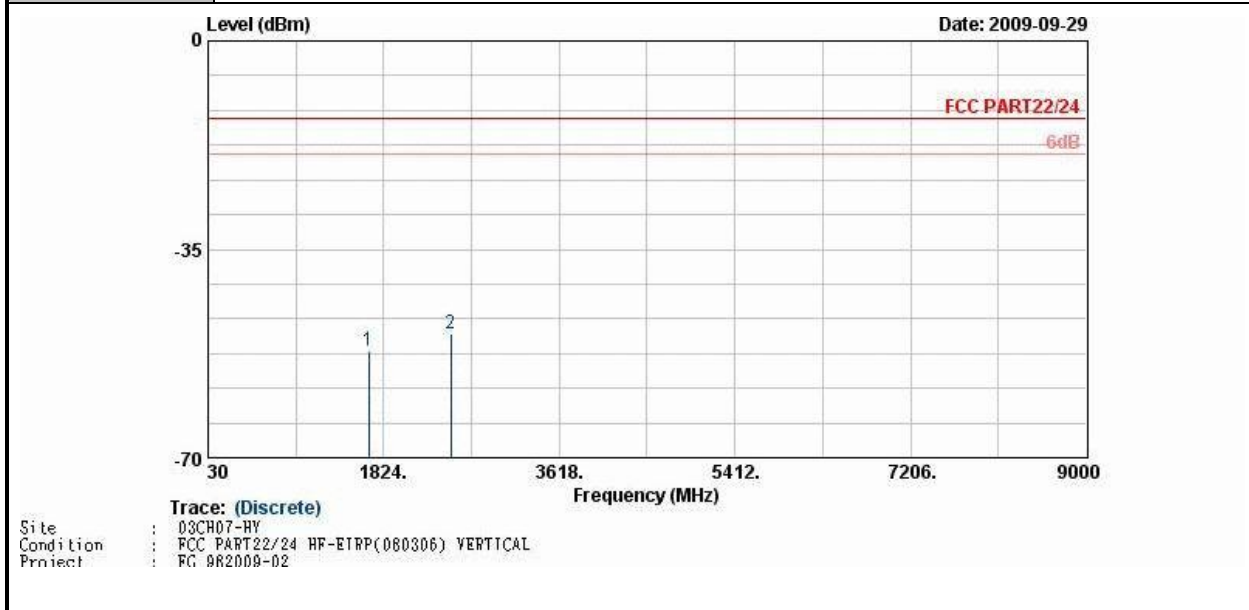

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1669	-51.95	-13	-38.95	-58.2	-51.8	3.39	5.39	V	Pass
2509	-49.22	-13	-36.22	-59.81	-49.48	3.71	6.12	V	Pass



<b>Band :</b>	WCDMA Band II	<b>Temperature :</b>	28~29°C
<b>Test Mode :</b>	RMC 12.2Kbps Link	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

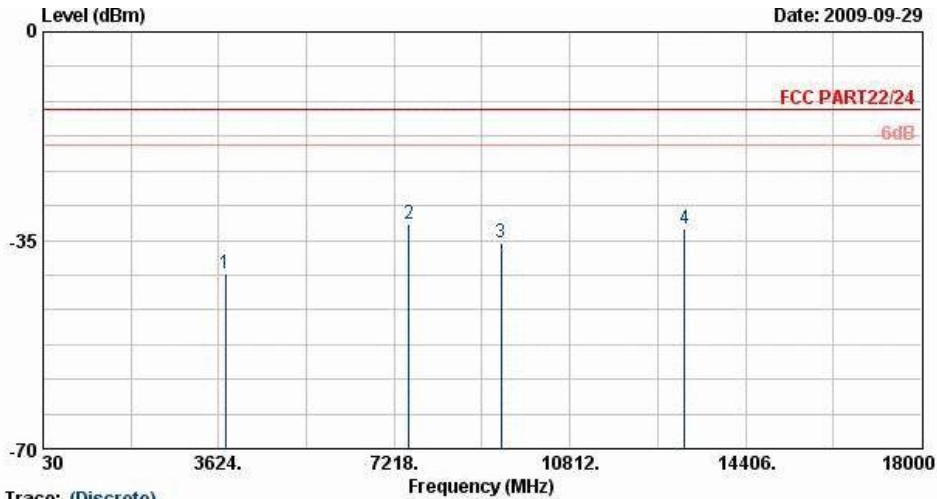


Trace: (Discrete)  
 Site : 08CH07-HY  
 Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL  
 Project : FC 982009-02

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-40.65	-13	-27.65	-55.45	-43.68	4.88	7.91	H	Pass
7520	-32.28	-13	-19.28	-56.12	-36.45	6.64	10.81	H	Pass
9396	-35.52	-13	-22.52	-59.44	-39.33	6.91	10.72	H	Pass
13156	-32.95	-13	-19.95	-65.38	-35.18	8.8	11.03	H	Pass



<b>Band :</b>	WCDMA Band II	<b>Temperature :</b>	28~29°C
<b>Test Mode :</b>	RMC 12.2Kbps Link	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

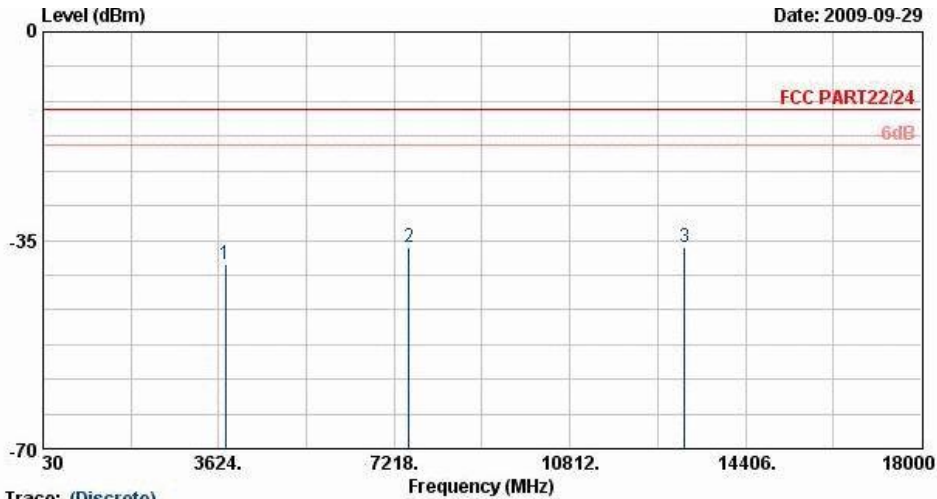

Trace: (Discrete)  
 Site : 08CH07-HY  
 Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL  
 Project : FG 982009-02

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-39.09	-13	-26.09	-55.82	-42.12	4.88	7.91	V	Pass
7520	-36.27	-13	-23.27	-58.92	-40.44	6.64	10.81	V	Pass
13156	-36.15	-13	-23.15	-66.62	-39.51	8.8	12.16	V	Pass

## 3.7 Frequency Stability Measurement

### 3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.7.2 Measuring Instruments

See list of measuring instruments of this test report.


### 3.7.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT can not be turned on at  $-30^{\circ}\text{C}$ , the testing lowest temperature will be raised in  $10^{\circ}\text{C}$  step until the EUT can be turned on.

### 3.7.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

### 3.7.5 Test Setup

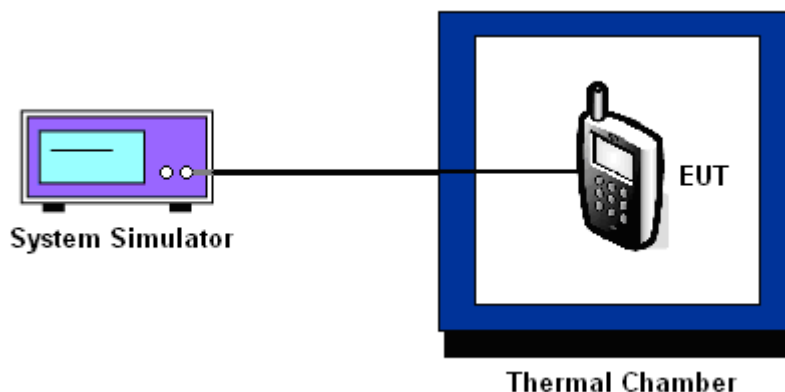





3.7.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5		

Temperature (°C)	GPRS 8		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	N/A	N/A	PASS
-20	25	0.03	44	0.05	
-10	19	0.02	-34	-0.04	
0	-15	-0.02	-19	-0.02	
10	-39	-0.05	-53	-0.06	
20	22	0.03	-25	-0.03	
30	-48	-0.06	-28	-0.03	
40	-22	-0.03	35	0.04	
50	-31	-0.04	42	0.05	

**Note:** The manufacturer declared that the EUT could work properly between temperatures -20°C~50°C.

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5		

Temperature (°C)	GPRS 8		EDGE 10		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	N/A	N/A	PASS
-20	-47	-0.02	-78	-0.04	
-10	-92	-0.05	-82	-0.04	
0	-84	-0.04	-100	-0.05	
10	-35	-0.02	-114	-0.06	
20	-55	-0.03	-89	-0.05	
30	-68	-0.04	-68	-0.04	
40	-42	-0.02	-105	-0.06	
50	-76	-0.04	-79	-0.04	

**Note:** The manufacturer declared that the EUT could work properly between temperatures -20°C~50°C.



<b>Band :</b>	WCDMA Band V	<b>Channel :</b>	4182
<b>Limit (ppm) :</b>	2.5		

Temperature (°C)	HSDPA		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	PASS
-20	16	0.02	
-10	11	0.01	
0	12	0.01	
10	-13	-0.02	
20	15	0.02	
30	-23	-0.03	
40	-20	-0.02	
50	-21	-0.02	

**Note:** The manufacturer declared that the EUT could work properly between temperatures -20°C~50°C.

<b>Band :</b>	WCDMA Band II	<b>Channel :</b>	9400
<b>Limit (ppm) :</b>	2.5		

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	PASS
-20	-29	-0.02	
-10	-24	-0.01	
0	-28	-0.01	
10	-23	-0.01	
20	22	0.01	
30	-30	-0.02	
40	-32	-0.02	
50	27	0.01	

**Note:** The manufacturer declared that the EUT could work properly between temperatures -20°C~50°C.



3.7.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS 8	3.8	-48	-0.06	2.5	PASS
		BEP	-35	-0.04		
		4.2	-30	-0.04		
	EDGE 8	3.8	-65	-0.08		
		BEP	-70	-0.08		
		4.2	-48	-0.06		
GSM 1900 CH661	GPRS 8	3.8	-40	-0.02		
		BEP	-28	-0.01		
		4.2	-33	-0.02		
	EDGE 10	3.8	-63	-0.03		
		BEP	-74	-0.04		
		4.2	-92	-0.05		
WCDMA Band V CH4182	HSDPA	3.8	-7	-0.01		
		BEP	19	0.02		
		4.2	-11	-0.01		
WCDMA Band II CH9400	RMC 12.2Kbps	3.8	-40	-0.02		
		BEP	-35	-0.02		
		4.2	-26	-0.01		

Note:

1. Normal Voltage = 3.8V.
2. Battery End Point (BEP) = 3.5 V.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
System Simulator	R&S	CMU200	116456	N/A	Jun. 05, 2008	Jun. 04, 2010	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 23, 2009	Jun. 22, 2010	Conducted (TH02-HY)
Thermal Chamber	TEN BILLION	TTH-D35P	TBN-930701	N/A	Jul. 29, 2009	Jul. 28, 2010	Conducted (TH02-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Nov. 20, 2008	Nov. 19, 2009	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9KHz ~ 30GHz	Dec. 02, 2008	Dec. 01, 2009	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 20, 2009	Aug. 19, 2010	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917025 1	15GHz- 40GHz	Oct. 16, 2008	Oct. 15, 2009	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec. 17, 2008	Dec. 16, 2009	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32dB. GAIN	Mar. 27, 2009	Mar. 26, 2010	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 KHz~30 MHz	May 22, 2008	May 21, 2010	Radiation (03CH07-HY)
System Simulator	R&S	CMU200	117997	N/A	May 14, 2009	May 13, 2011	Radiation (03CH07-HY)

## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.27</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.54</b>		

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$	$C_i$	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	$\pm 0.10$	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	$\pm 1.70$	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	$\pm 0.50$	Normal (k=2)	0.25	1	0.25
Receiver Correction	$\pm 2.00$	Rectangular	1.15	1	1.15
Antenna Factor Directional	$\pm 1.50$	Rectangular	0.87	1	0.87
Site Imperfection	$\pm 2.80$	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>4.72</b>				

## 6 Certification of TAF Accreditation



Certificate No. : L1190-090417

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

<b>Accreditation Criteria</b>	: ISO/IEC 17025:2005
<b>Accreditation Number</b>	: 1190
<b>Originally Accredited</b>	: December 15, 2003
<b>Effective Period</b>	: January 10, 2007 to January 09, 2010
<b>Accredited Scope</b>	: Testing Field, see described in the Appendix
<b>Specific Accreditation Program</b>	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

  
Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : April 17, 2009

P1, total 20 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP982009-02 as below.