

**FCC CFR47 PART 15 CERTIFICATION**



**TEST REPORT**

***FOR***

**900MHz DIGITAL SPREAD SPECTRUM CORDLESS PHONE**

**MODEL: D933**

**FCC ID: HOLD933**

**REPORT NUMBER: 02U1248-1**

**ISSUE DATE: APRIL 9, 2002**

*Prepared for*  
**CIDCO COMMUNICATIONS, LLC.**  
**105 COCHRANE CIRCLE**  
**MORGAN HILL, CA 95035**  
**USA**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES**  
**561F MONTEREY ROAD**  
**MORGAN HILL, CA 95037, USA**  
**TEL: (408) 463-0885**  
**FAX: (408) 463-0888**

## TABLE OF CONTENT

<b>1. TEST RESULT CERTIFICATION</b>	<b>3</b>
<b>2. EUT DESCRIPTION</b>	<b>4</b>
<b>3. TEST METHODOLOGY</b>	<b>4</b>
<b>4. TEST FACILITY</b>	<b>4</b>
<b>5. ACCREDITATION AND LISTING</b>	<b>4</b>
5.1. Laboratory Accreditations and Listings	5
<b>6. MEASURING INSTRUMENT CALIBRATION</b>	<b>6</b>
6.1. Measurement Uncertainty	6
<b>7. SUPPORT EQUIPMENT / TEST DIAGRAM</b>	<b>7</b>
<b>8. APPLICABLE RULES</b>	<b>8</b>
<b>9. TEST SETUP, PROCEDURE AND RESULT</b>	<b>12</b>
9.1. CONDUCTED POWER	12
9.2. 6 dB BANDWIDTH MEASUREMENT	19
9.3. CONDUCTED SPURIOUS EMISSION	26
9.4. PEAK POWER SPECTRAL DENSITY	39
9.5. BANDEDGE MEASUREMENT	46
9.6. RADIATED EMISSION	52
9.7. LINE CONDUCTED EMISSION	62
9.8. SETUP PHOTOS	64

## 1. TEST RESULT CERTIFICATION

**COMPANY NAME:** CIDCO COMMUNICATIONS, LLC.  
105 COCHRANE CIRCLE  
MORGAN HILL, CA 95035  
USA

**CONTACT PERSON:** SA FOO / ENGINEER

**TELEPHONE NO:** 408-782-8200

**EUT DESCRIPTION:** 900 MHZ DIGITAL SPREAD SPECTRUM CORDLESS PHONE

**MODEL NAME:** D933

**DATE TESTED:** APRIL 04 – APRIL 08, 2002

TYPE OF EQUIPMENT	INTENTIONAL RADIATOR
EQUIPMENT TYPE	900MHz TRANSCEIVER
MEASUREMENT PROCEDURE	ANSI 63.4 / 1992, TIA/EIA 603
PROCEDURE	CERTIFICATION
FCC RULE	CFR 47 PART 15 SUBPART C

Compliance Certification Services, Inc. tested the above equipment for compliance with the requirement set forth in CFR 47, Part 15, Subpart C. The equipment in the configuration described in this report, shows the measured emission levels emanating from the equipment do not exceed the specified limit.

**Note:** This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:

Tested By:

  
\_\_\_\_\_  
MIKE HECKROTTE  
CHIEF ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

  
\_\_\_\_\_  
THANH VAN NGUYEN  
EMC TECHNICIAN  
COMPLIANCE CERTIFICATION SERVICES

## 2. EUT DESCRIPTION

The D933 is a 900 MHz cordless phone. The phone base antenna gain is 0 dBi. The handset antenna gain is 0 dBi.

### *Crystal*

Board Name	Crystal (MHz)
Phone Base Unit	19.2MHz on the base PCB
Handset Unit	19.2MHz on the Handset PCB

## 3. TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures documented on chapter 13 of ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057.

## 4. TEST FACILITY

The open area test sites and conducted measurement facilities used to collect the radiated data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

## 5. ACCREDITATION AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200065-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (reference no: 31040/SIT (1300B3) and 31040/SIT (1300F2))

## 5.1. Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	NVLAP*	FCC Part 15, CISPR 22, AS/NZS 3548, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11, CNS 13438	 200065-0
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 1300
Japan	VCCI	CISPR 22 Two OATS and one conducted Site	 R-1014, R-619, C-640
Norway	NEMKO	EN50081-1, EN50081-2, EN50082-1, EN50082-2, IEC61000-6-1, IEC61000-6-2, EN50083-2, EN50091-2, EN50130-4, EN55011, EN55013, EN55014-1, EN55104, EN55015, EN61547, EN55022, EN55024, EN61000-3-2, EN61000-3-3, EN60945, EN61326-1	 ELA 117
Norway	NEMKO	EN60601-1-2 and IEC 60601-1-2, the Collateral Standards for Electro-Medical Products. MDD, 93/42/EEC, AIMD 90/385/EEC	 ELA-171
Taiwan	BSMI	CNS 13438	 SL2-IN-E-1012
Canada	Industry Canada	RSS210 Low Power Transmitter and Receiver	 IC2324 A,B,C, and F

\*No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government

## 6. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 6.1. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Radiated Emission	
30MHz – 200 MHz	+/- 3.3dB
200MHz – 1000MHz	+4.5/-2.9dB
1000MHz – 2000MHz	+4.6/-2.2dB
Power Line Conducted Emission	
150kHz – 30MHz	+/-2.9


Any results falling within the above values are deemed to be marginal.

## 7. SUPPORT EQUIPMENT / TEST DIAGRAM

### Support Equipment

During Radiated Emission testing, no support equipment was used.

### Test Diagram

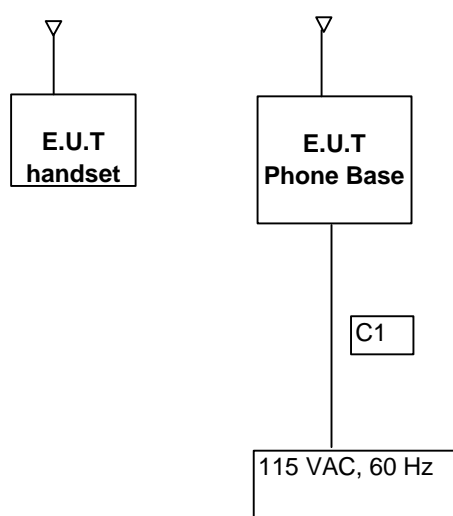

## 8. APPLICABLE RULES

### §15.247- POWER LIMIT

(b) The maximum peak output power of the intentional radiator operating in the 902-928 MHz band not exceed 1 watt.

*Spec limit: As specified above, 1W maximum.*

*Test result: No non-compliance noted.*

### §14.407- BANDWIDTH LIMITATION

(2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

*Spec limit: > 500 kHz.*

*Test result: No non-compliance noted.*

### §15.247- PEAK POWER SPECTRAL DENSITY

(d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

*Spec limit: < 8dBm.*

*Test result: No non-compliance noted.*

### §15.247- PROCESSING GAIN

(e) The processing gain of a direct sequence system shall be at least 10 dB. The processing gain represents the improvement to the received signal-to-noise ratio, after filtering to the information bandwidth, from the spreading/despreading function.

*Spec limit: >10dBm.*

*Test result: No non-compliance noted.*



# **§15.205- RESTRICTED BANDS OF OPERATIONS**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

***Spec limit: As specified above.***

***Test result: No non-compliance noted.***

### **§90.209- RADIATED EMISSION LIMITS, GENERAL REQUIREMENTS**

(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(b) In the emission table above, the tighter limit applies at the band edges.

#### FCC PART 15.209

MEASURING DISTANCE OF 3 METER		
FREQUENCY RANGE (MHz)	FIELD STRENGTH (Microvolts/m)	FIELD STRENGTH (dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

***Spec limit: As specified above.***

***Test result: No non-compliance noted.***

**§15.207- CONDUCTED LIMITS**

(a) For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 450 kHz to 30 MHz shall not exceed 250 microvolts. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

FCC PART 15.207

FREQUENCY RANGE	FIELD STRENGTH (Microvolts)	FIELD STRENGTH (dBuV)/QP
450kHz-30MHz	250	48


*Spec limit: As specified above.*

*Test result: No non-compliance noted.*

## 9. TEST SETUP, PROCEDURE AND RESULT

### 9.1. CONDUCTED POWER

#### TEST SETUP



#### TEST PROCEDURE

The EUT is configured on a test bench as shown above in a continuously transmitting mode. The transmitter output was connected to the spectrum analyzer. The output power of the fundamental frequency was measured by spectrum analyzer with 3 MHz RBW and 3 MHz VBW. The spectrum analyzer RBW is greater than the EUT bandwidth.

#### RESULT

*No non-compliance noted.*


##### Phone Base unit

<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Output Power(watts)</i>
<i>1</i>	<i>904.2</i>	<i>35.48mW (15.5 dBm)</i>
<i>10</i>	<i>914.4</i>	<i>30.9mW (14.9 dBm)</i>
<i>20</i>	<i>926</i>	<i>28.18mW (14.5 dBm)</i>


##### Handset unit

<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Output Power(watts)</i>
<i>1</i>	<i>904.2</i>	<i>26.92mW (14.3 dBm)</i>
<i>10</i>	<i>914.4</i>	<i>28.84mW (14.60 dBm)</i>
<i>20</i>	<i>926</i>	<i>24mW (13.8 dBm)</i>


**RF Power for Base Unit  
Channel 1**

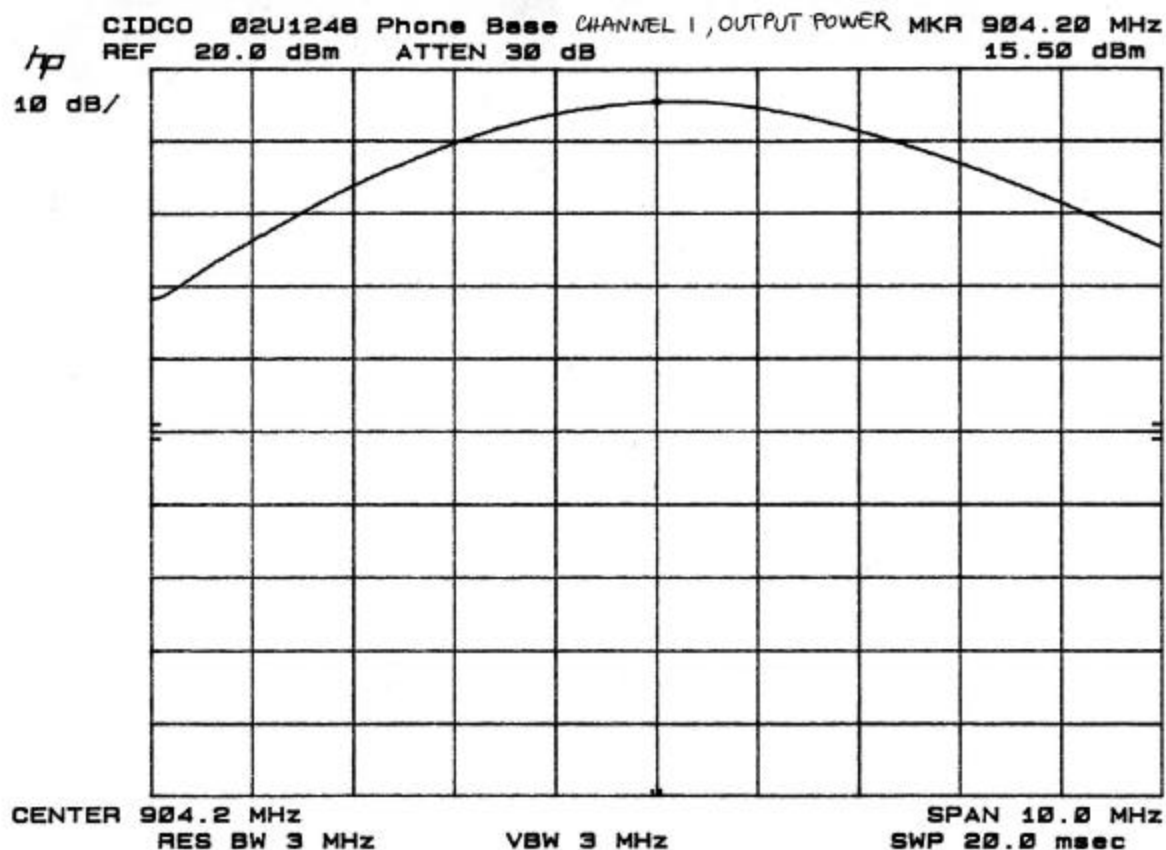


**RF Power for Base Unit**  
**Channel 10**

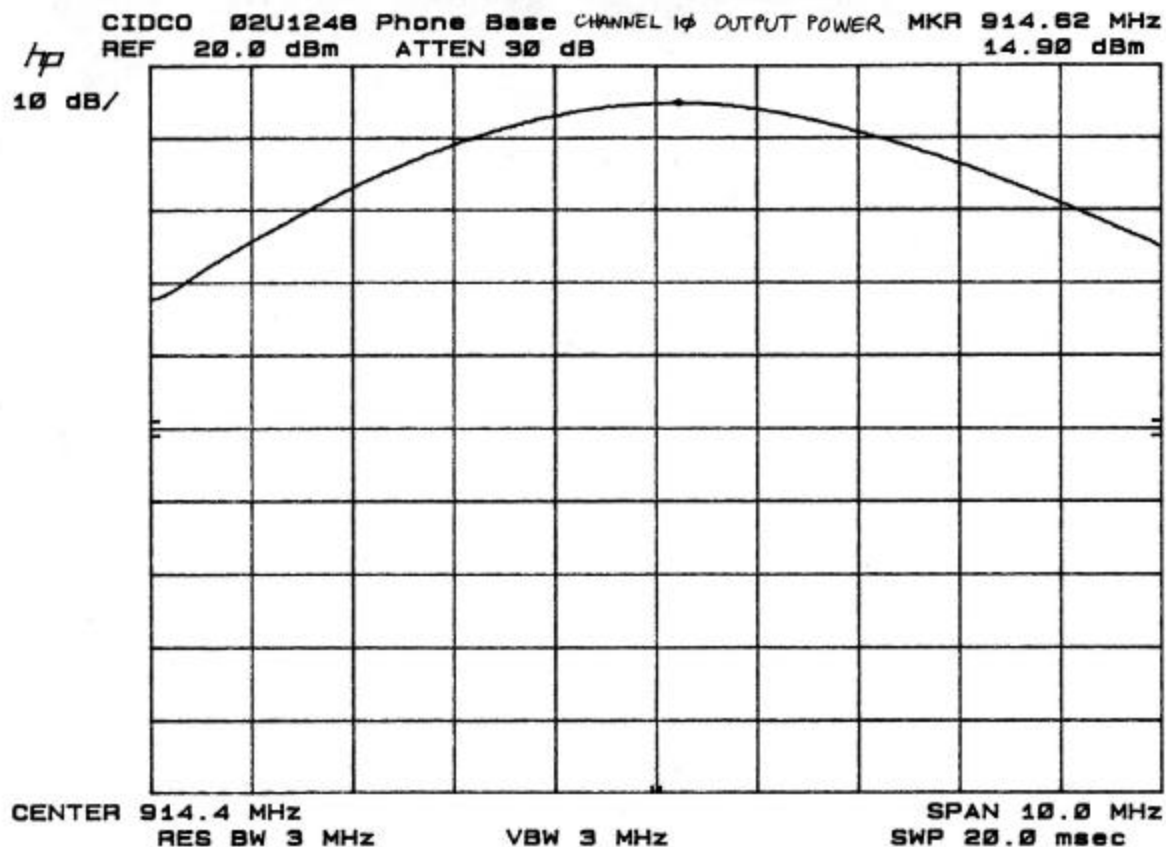

**RF Power for Base Unit**  
**Channel 20**

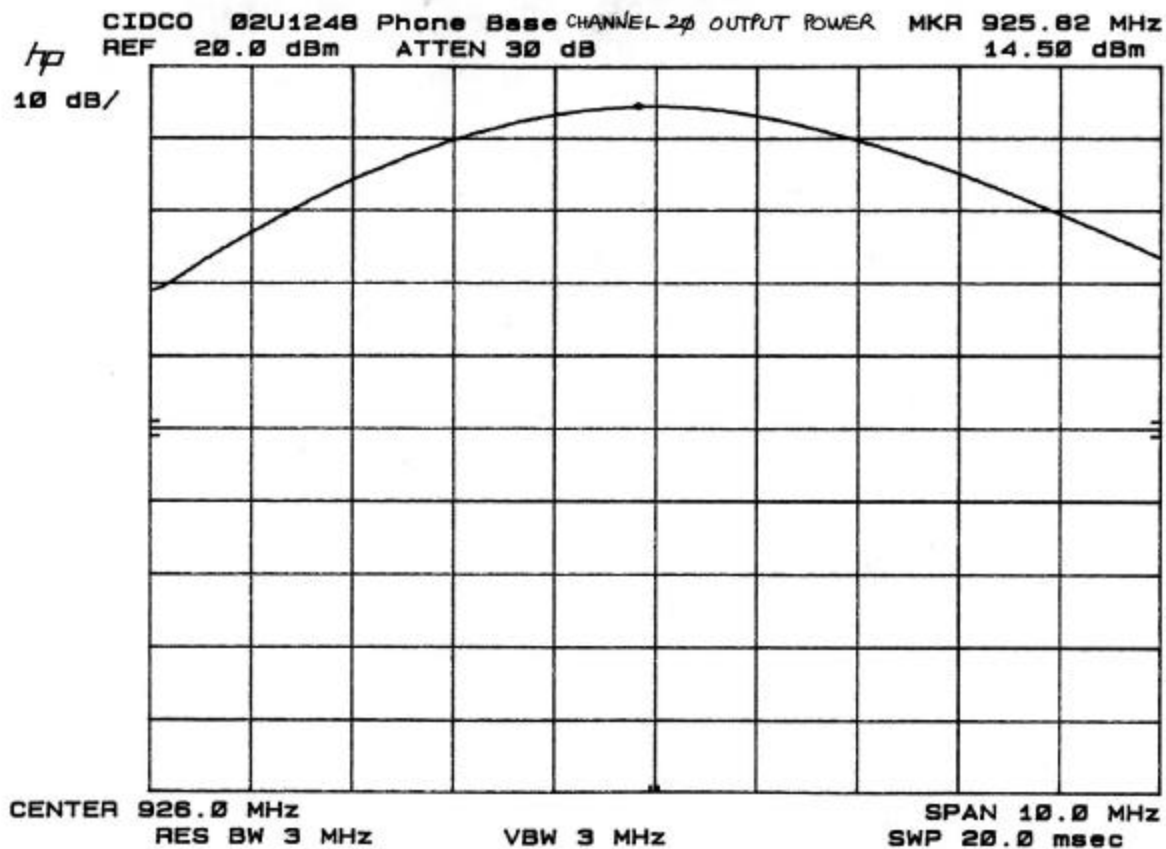


**RF Power for Handset Unit**  
**Channel 1**

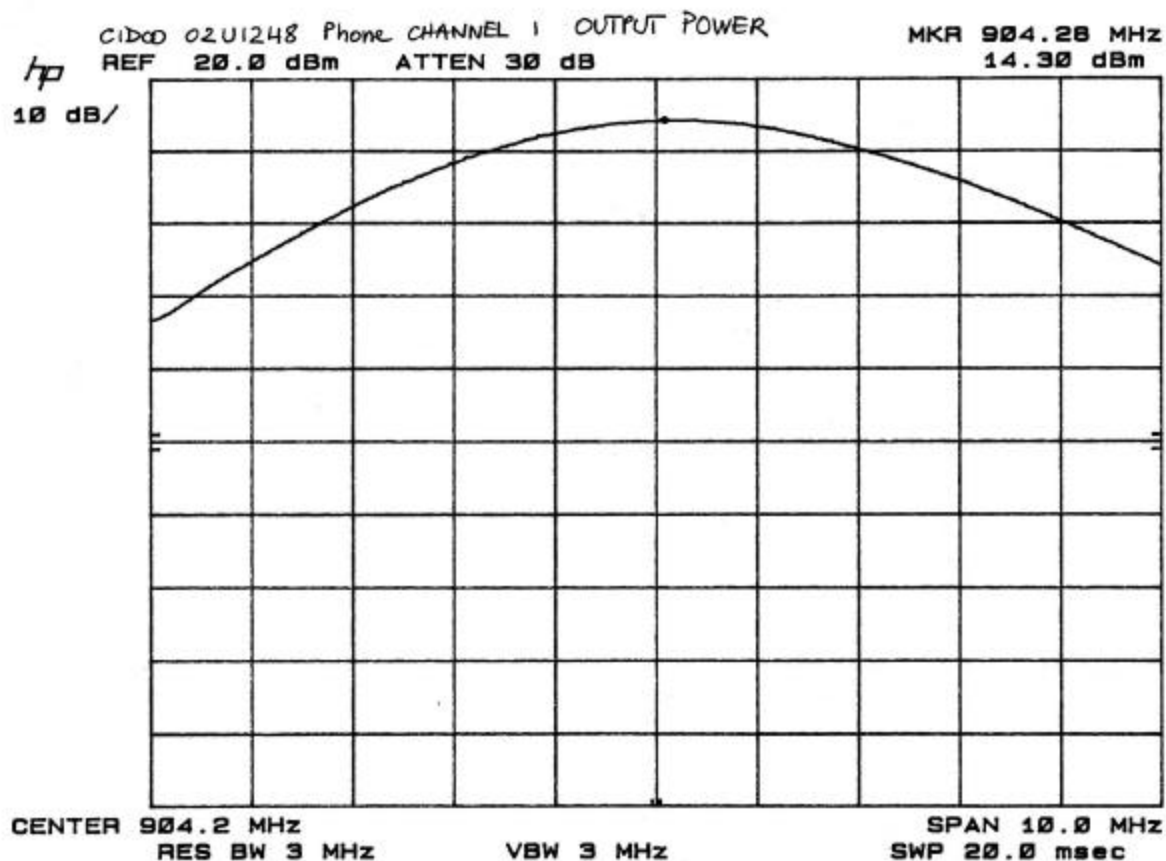




**RF Power for Handset Unit**  
**Channel 10**

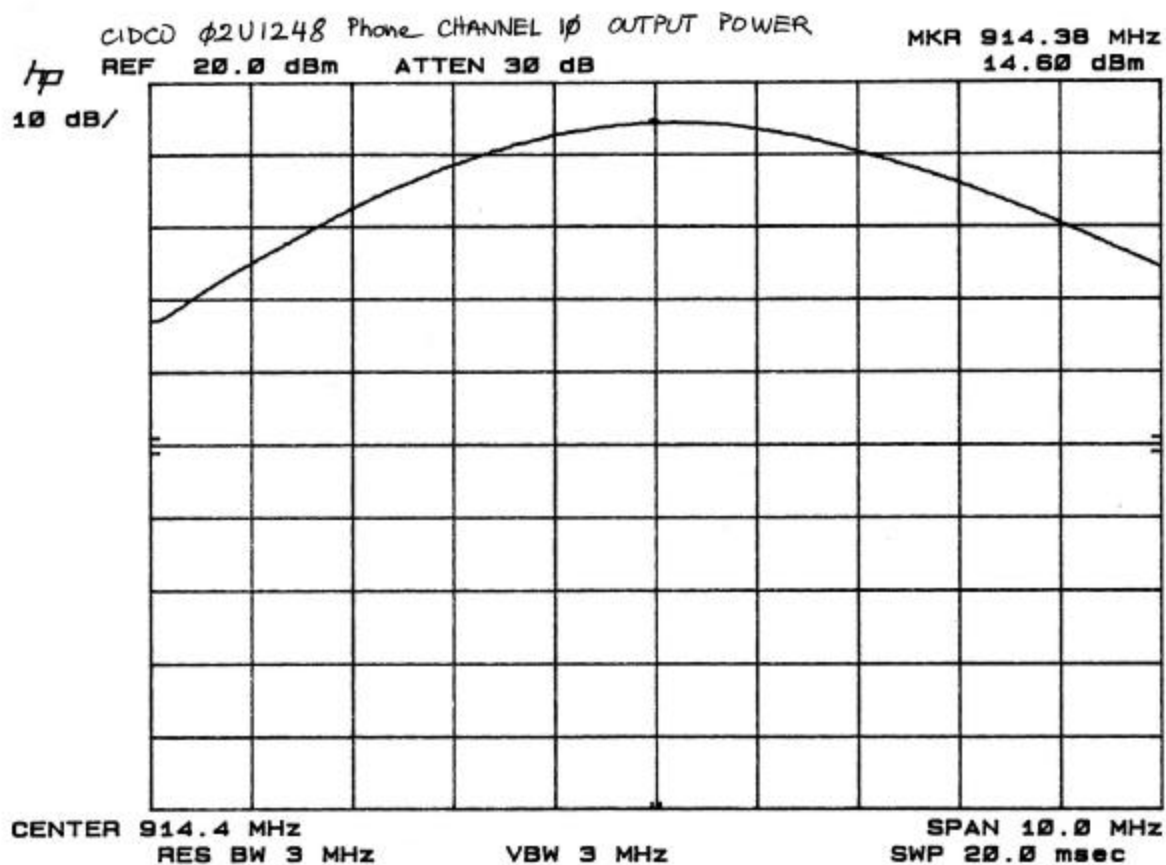


**RF Power for Handset Unit**  
**Channel 20**

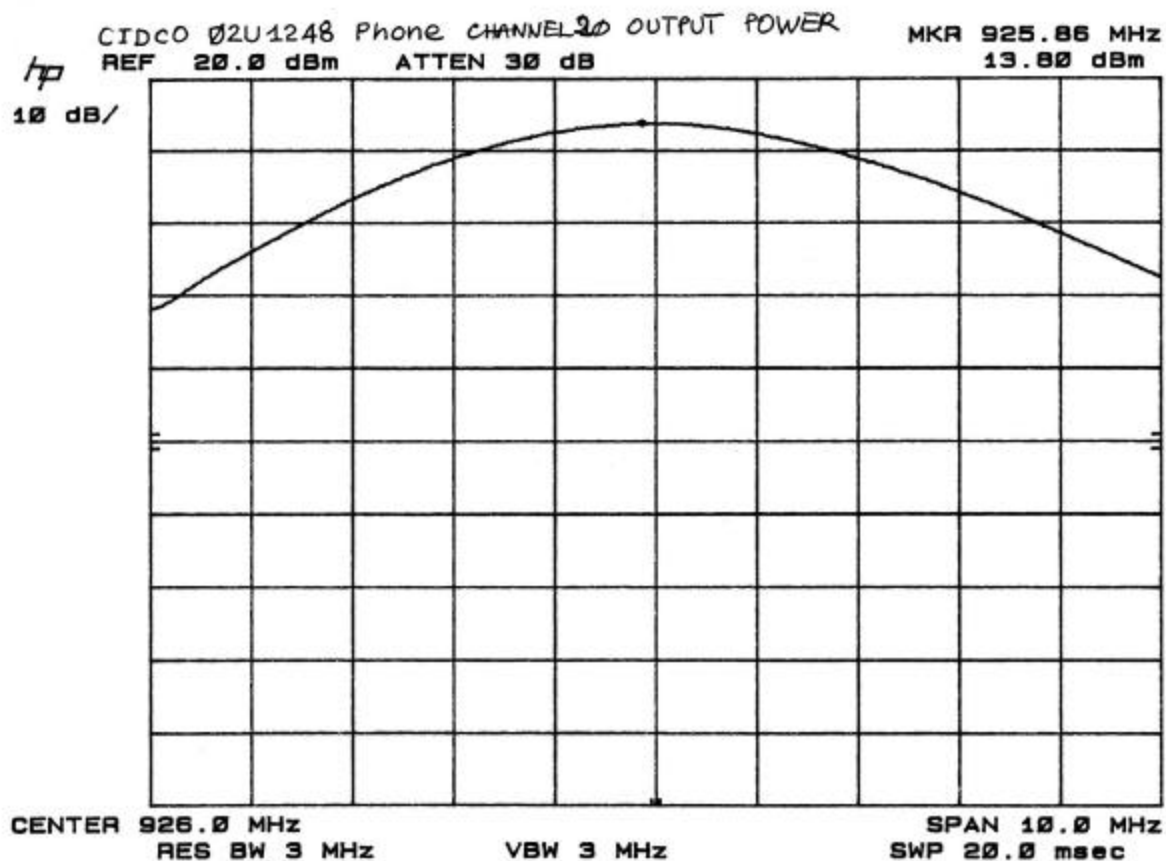

## 9.2. 6 dB BANDWIDTH MEASUREMENT

### TEST SETUP



### TEST PROCEDURE

The EUT is configured on a test bench as shown above in a continuously transmitting mode. The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum which is higher than peak power minus 6 dB.

### RESULT

*No non-compliance noted.*


#### **Phone Base unit**

<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Bandwidth(MHz)</i>
<i>1</i>	<i>904.2</i>	<i>1.4</i>
<i>10</i>	<i>914.4</i>	<i>1.365</i>
<i>20</i>	<i>926</i>	<i>1.35</i>


#### **Handset unit**


<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Bandwidth(MHz)</i>
<i>1</i>	<i>904.2</i>	<i>1.445</i>
<i>10</i>	<i>914.4</i>	<i>1.450</i>
<i>20</i>	<i>926</i>	<i>1.465</i>

### 6 dB Bandwidth for Base Unit Channel 1

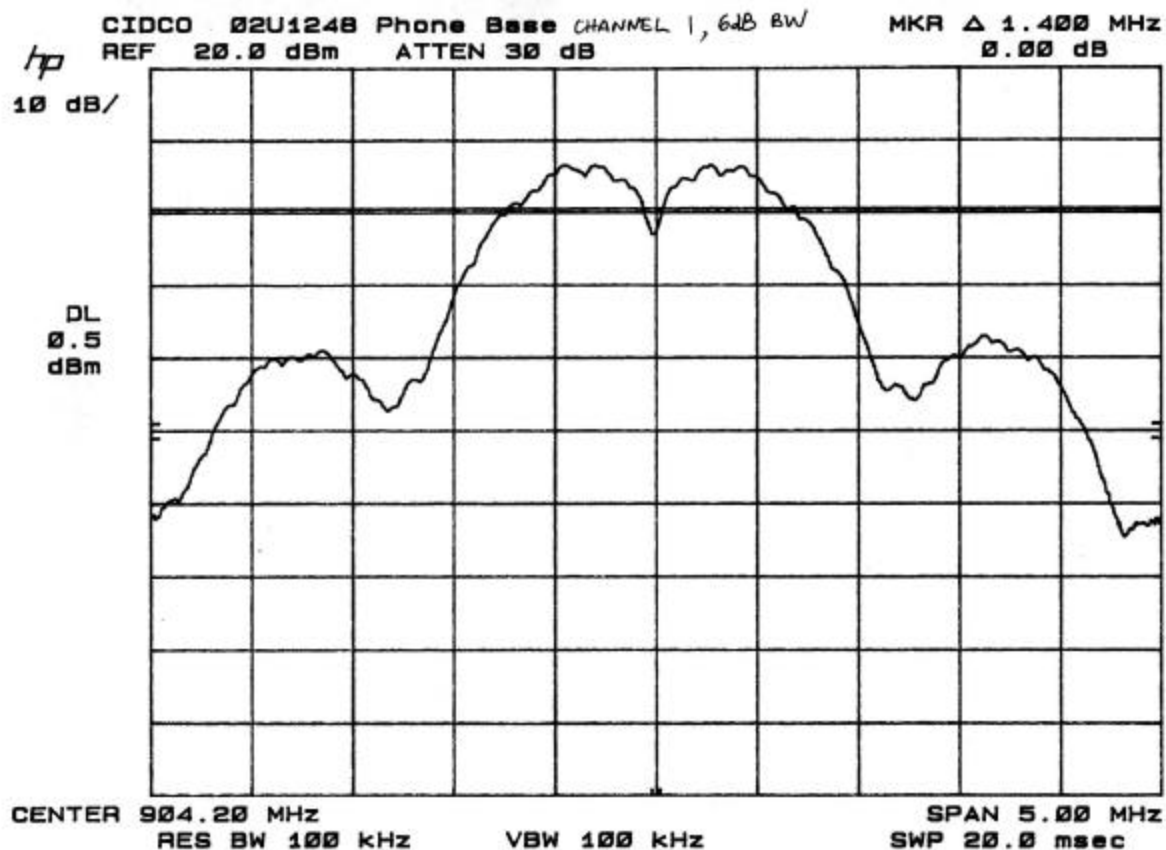


**6 dB Bandwidth for Base Unit  
Channel 10**

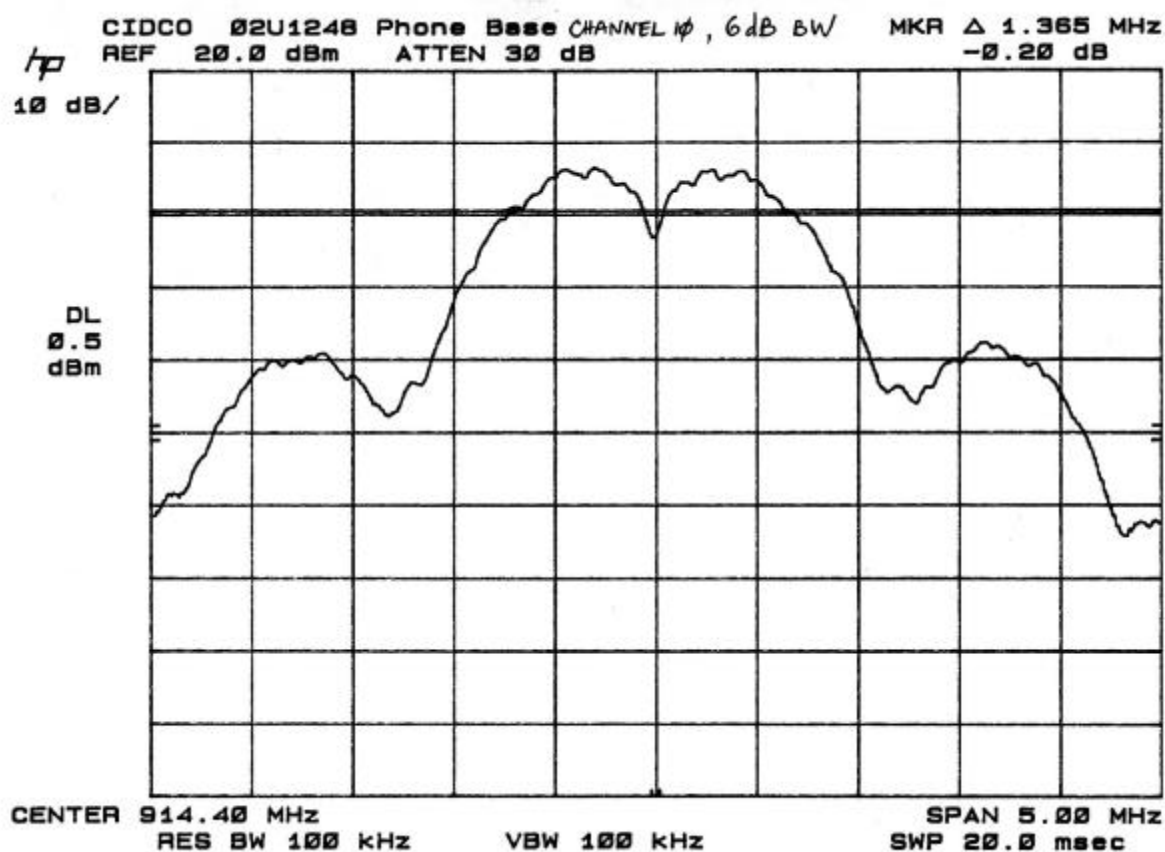


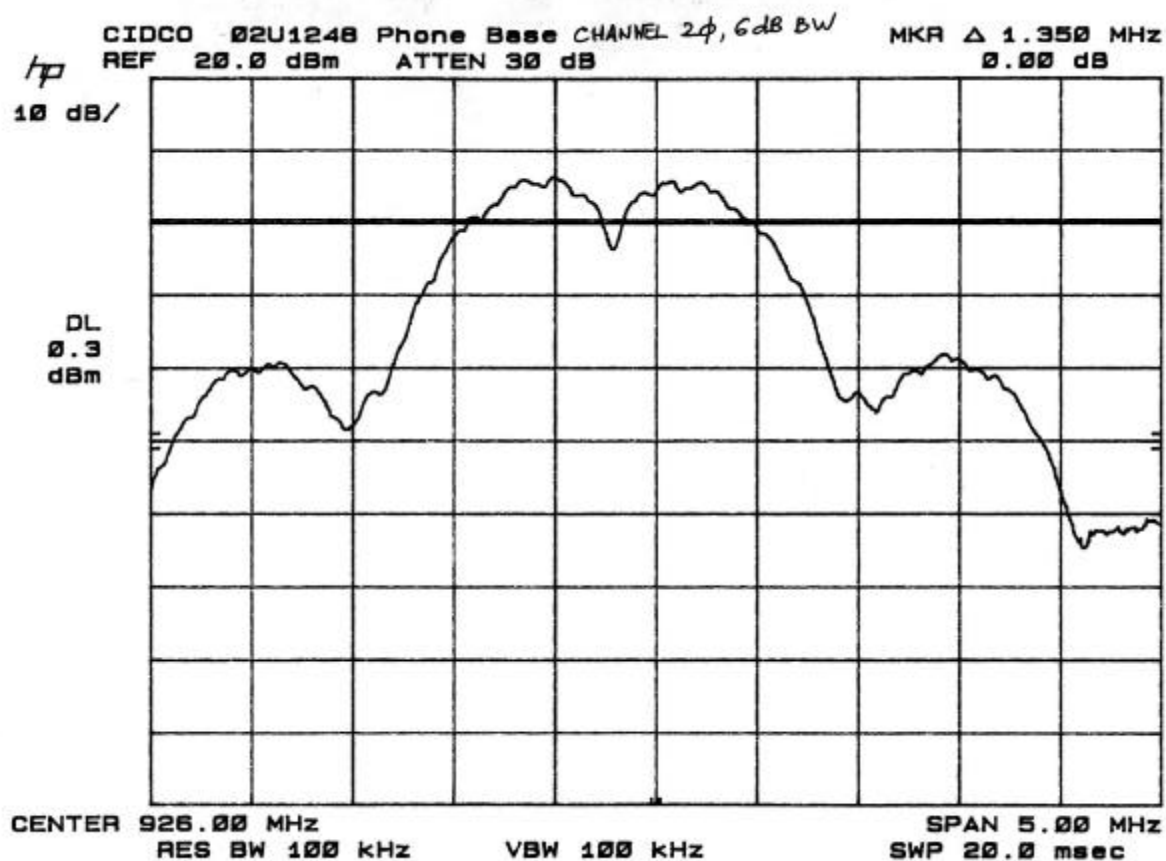**6 dB Bandwidth for Base Unit**  
**Channel 20**

**6 dB Bandwidth for Handset Unit  
Channel 1**

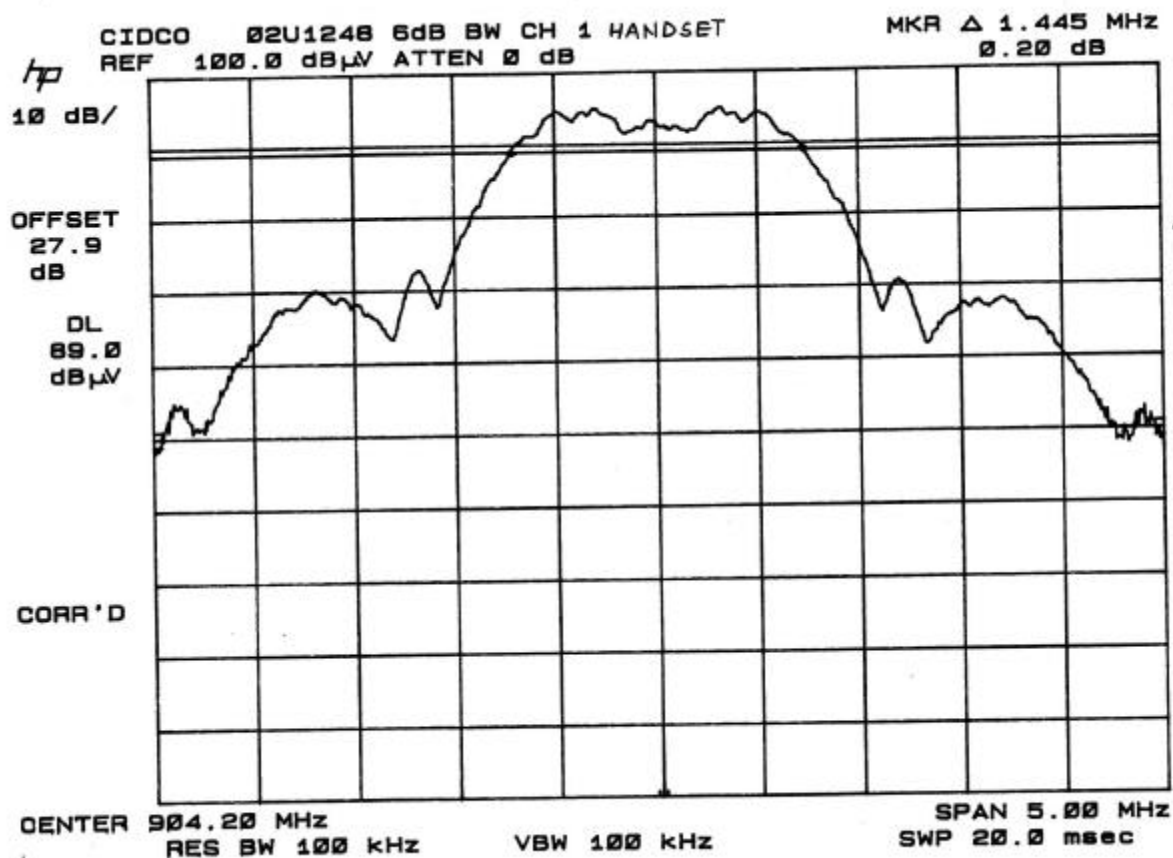


**6 dB Bandwidth for Handset Unit  
Channel 10**

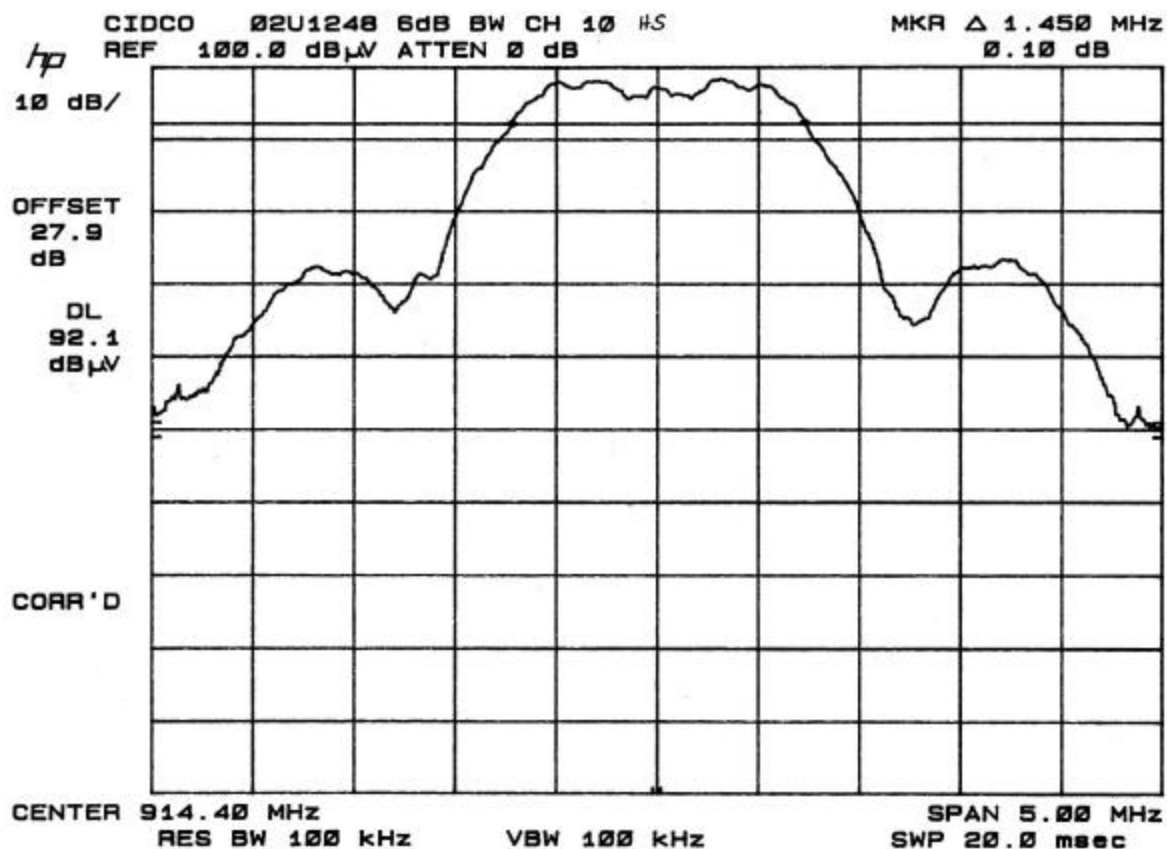




**6 dB Bandwidth for Handset Unit**  
**Channel 20**

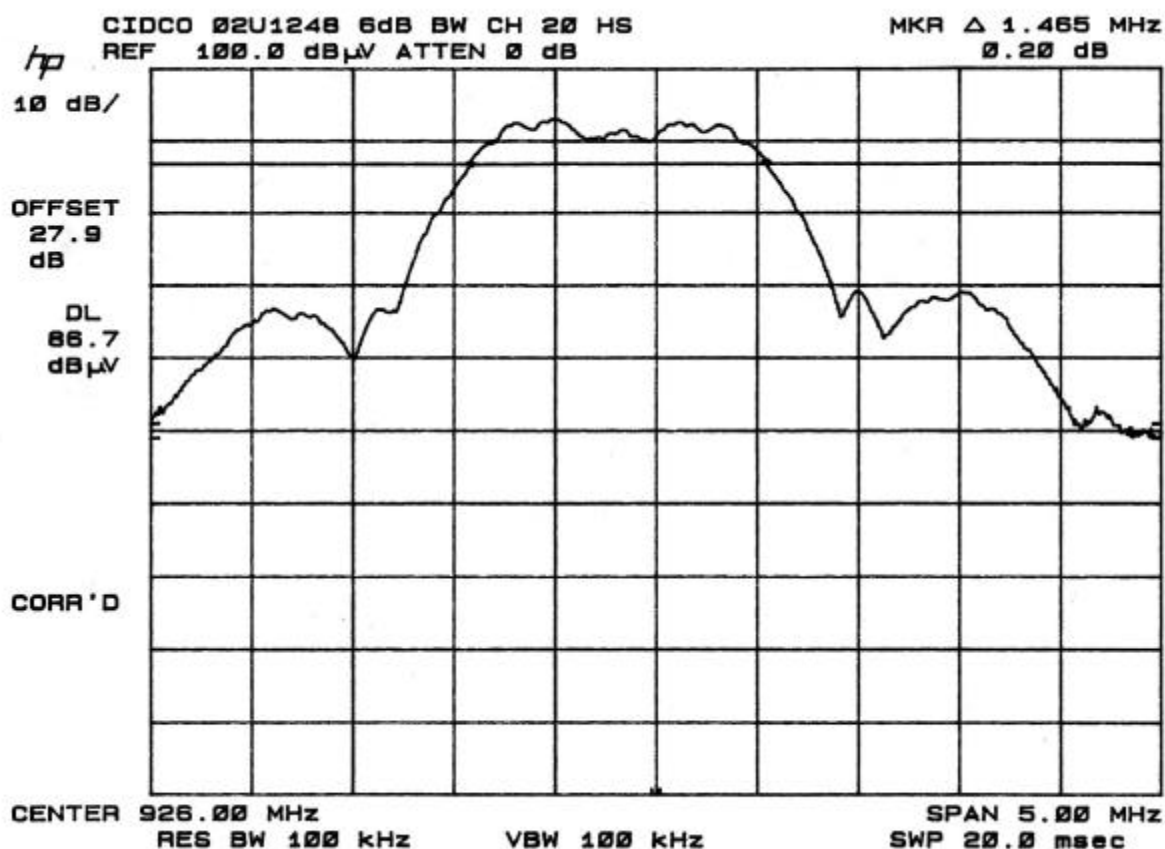

### 9.3. CONDUCTED SPURIOUS EMISSION

#### TEST SETUP



#### TEST PROCEDURE


The EUT is configured on a test bench as shown above in a continuously transmitting mode. The transmitter output was connected to the spectrum analyzer. The spectrum analyzer is set to 100 kHz RBW and 100 kHz VBW. The display line is set to -20 dBc.


The frequency range is investigated from 30 MHz to 10 GHz, in two bands: 30 MHz to 2.5 GHz and 2.5 to 10 GHz.

#### RESULT


*No non-compliance noted.*


**Conducted Spurious Emission for Phone Base Unit  
Channel 1**

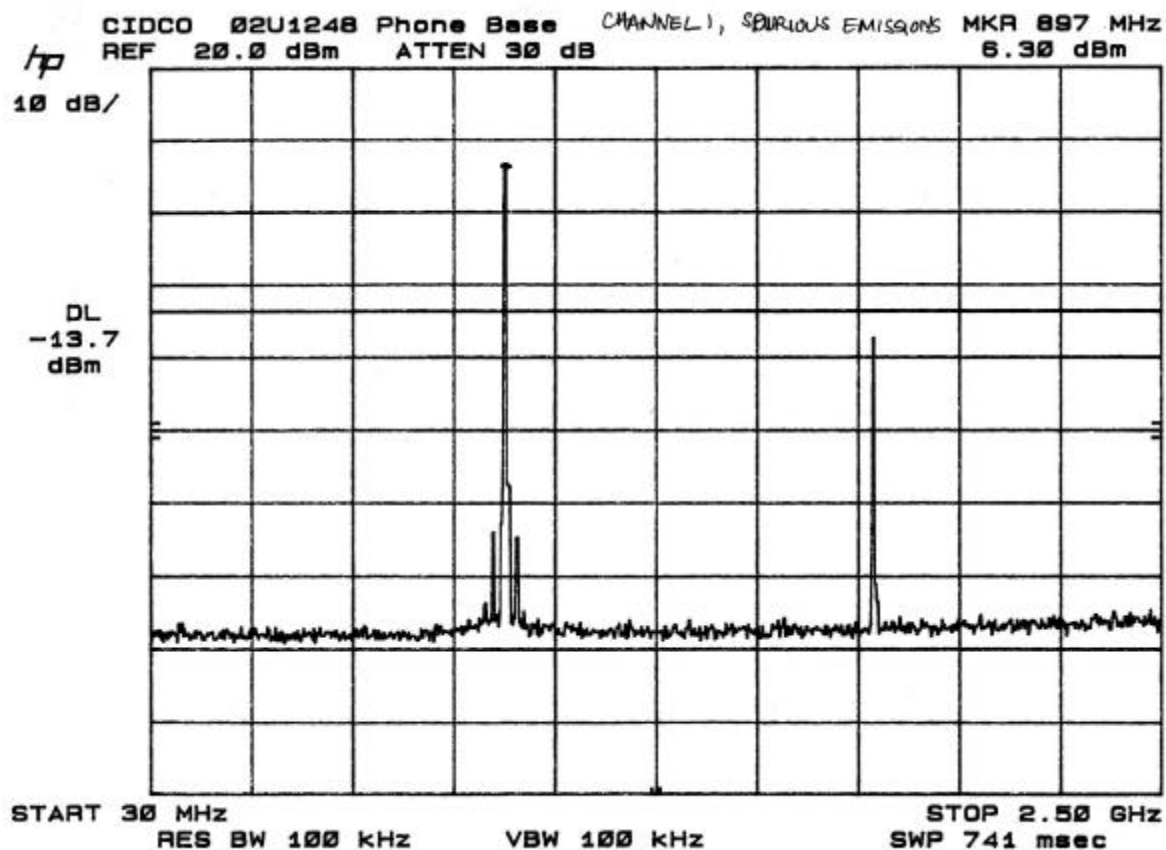


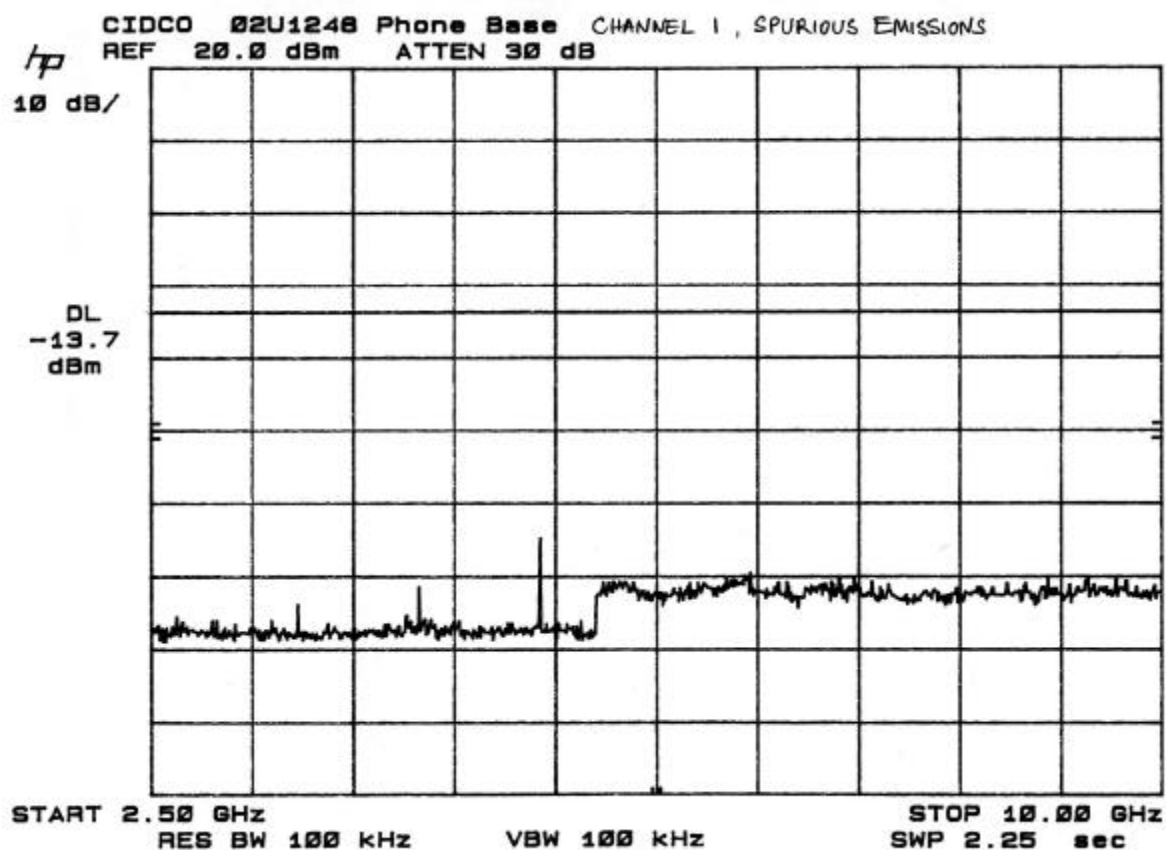


**Conducted Spurious Emission for Phone Base Unit  
Channel 10**

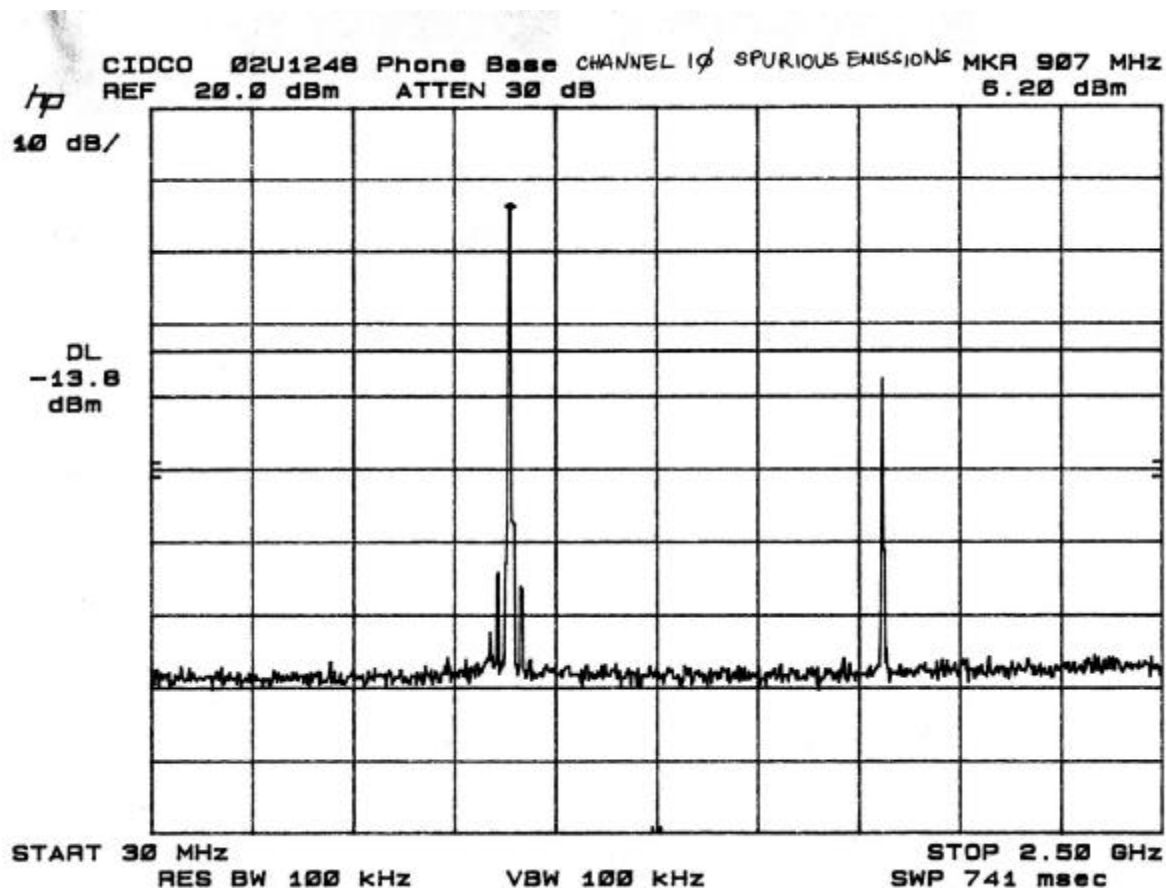


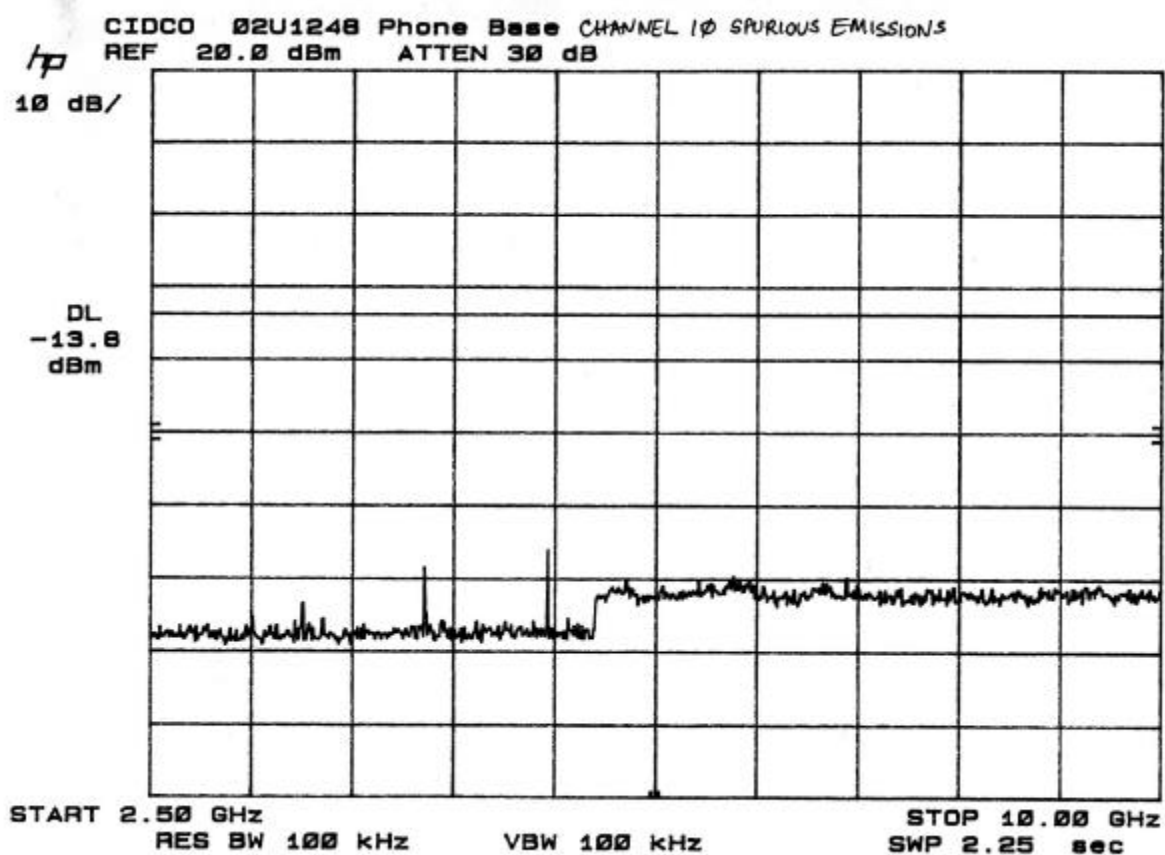


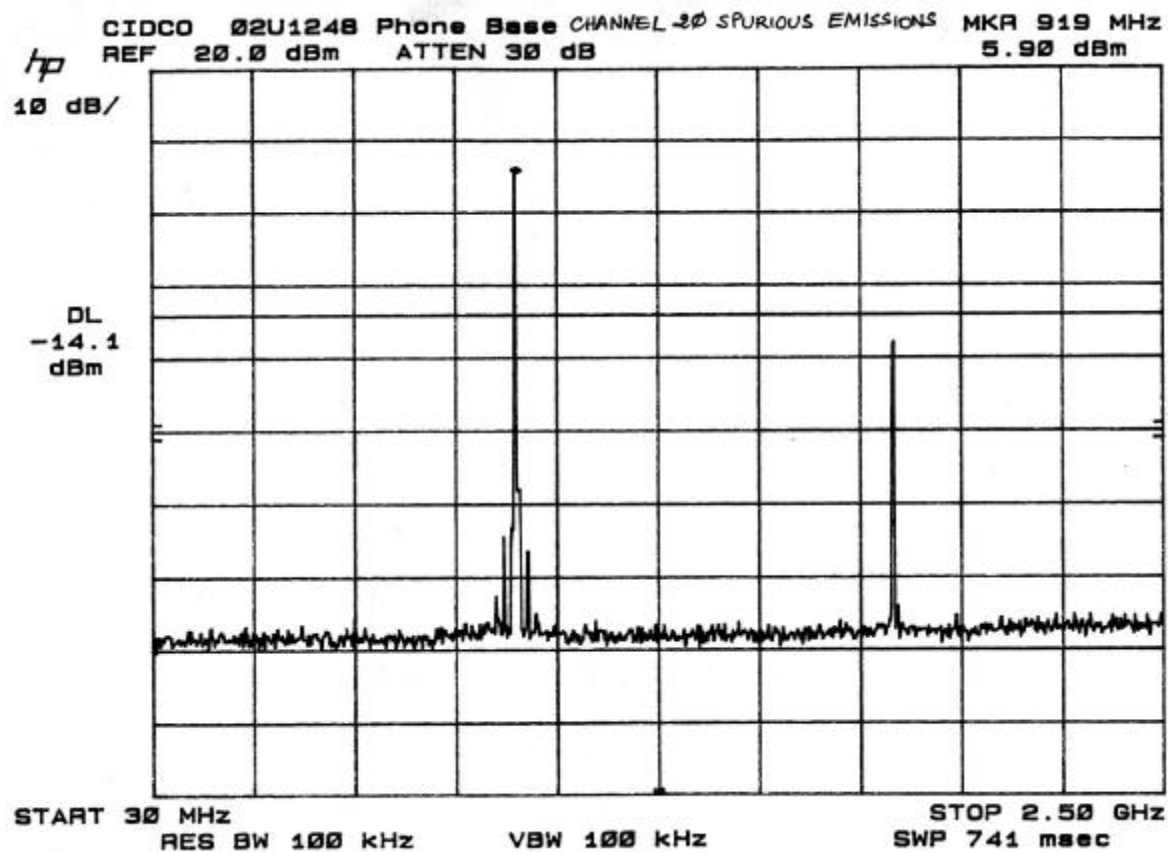**Conducted Spurious Emission for Phone Base Unit  
Channel 20**

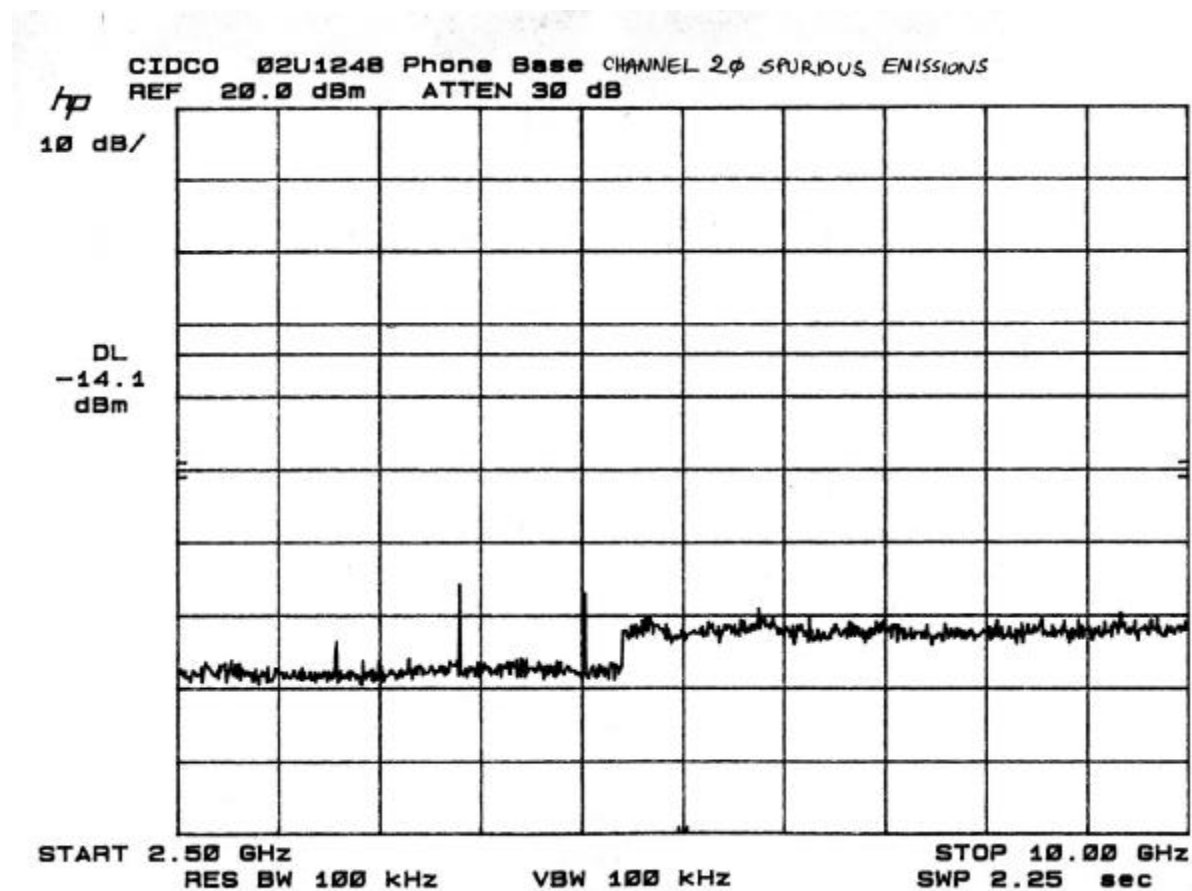


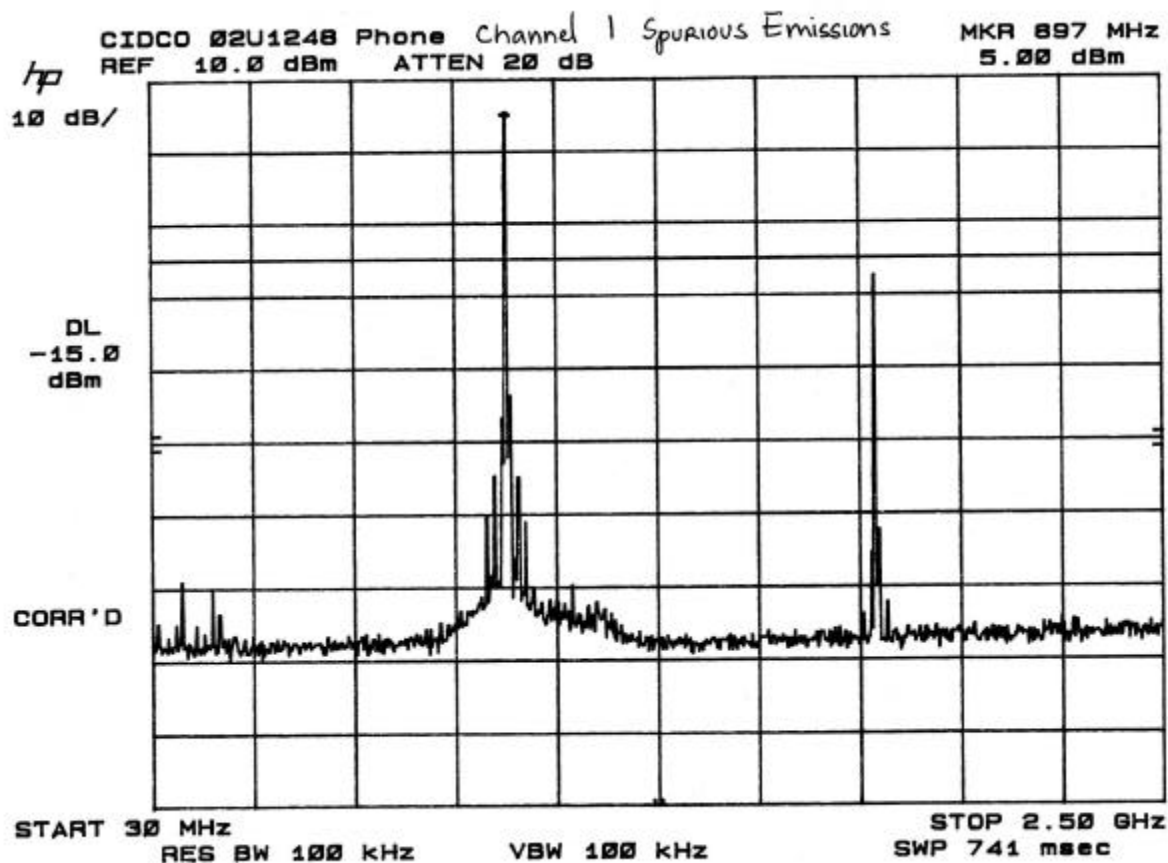


**Conducted Spurious Emission for Handset Unit  
Channel 1**

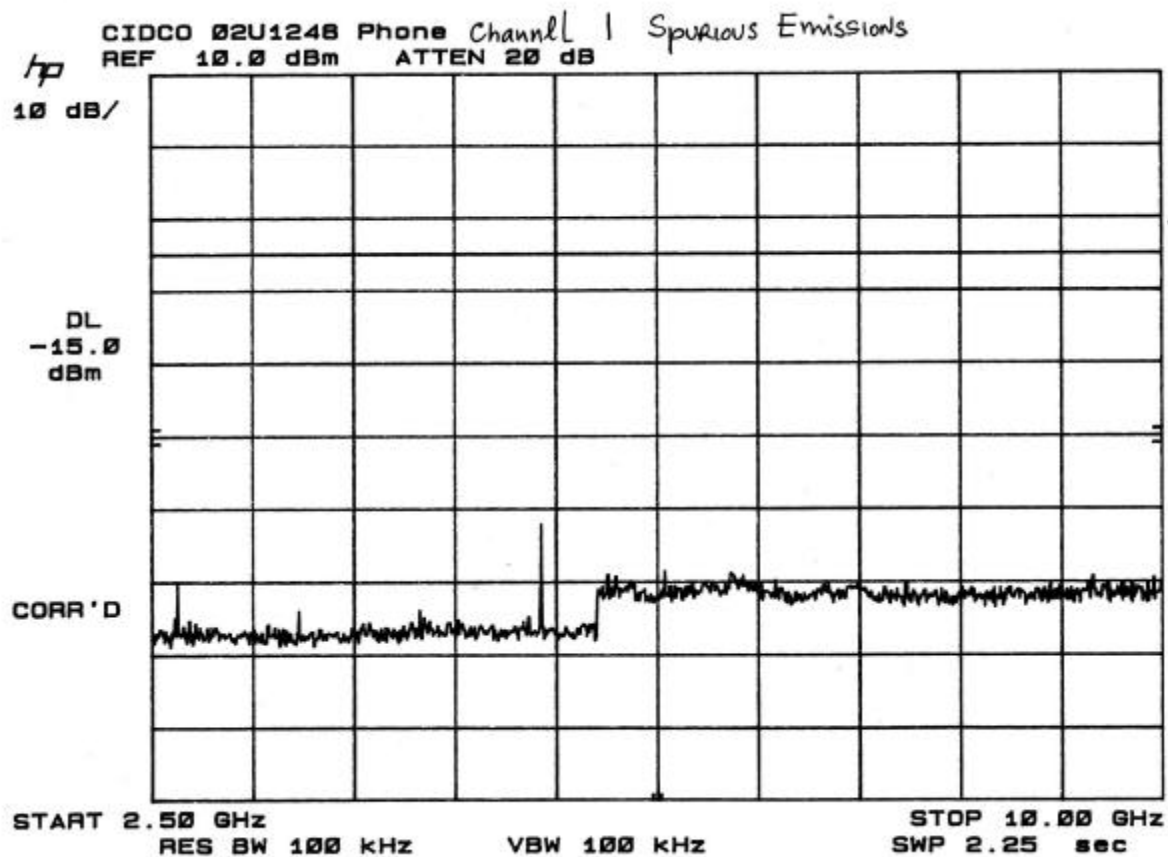



**Conducted Spurious Emission for Handset Unit  
Channel 10**

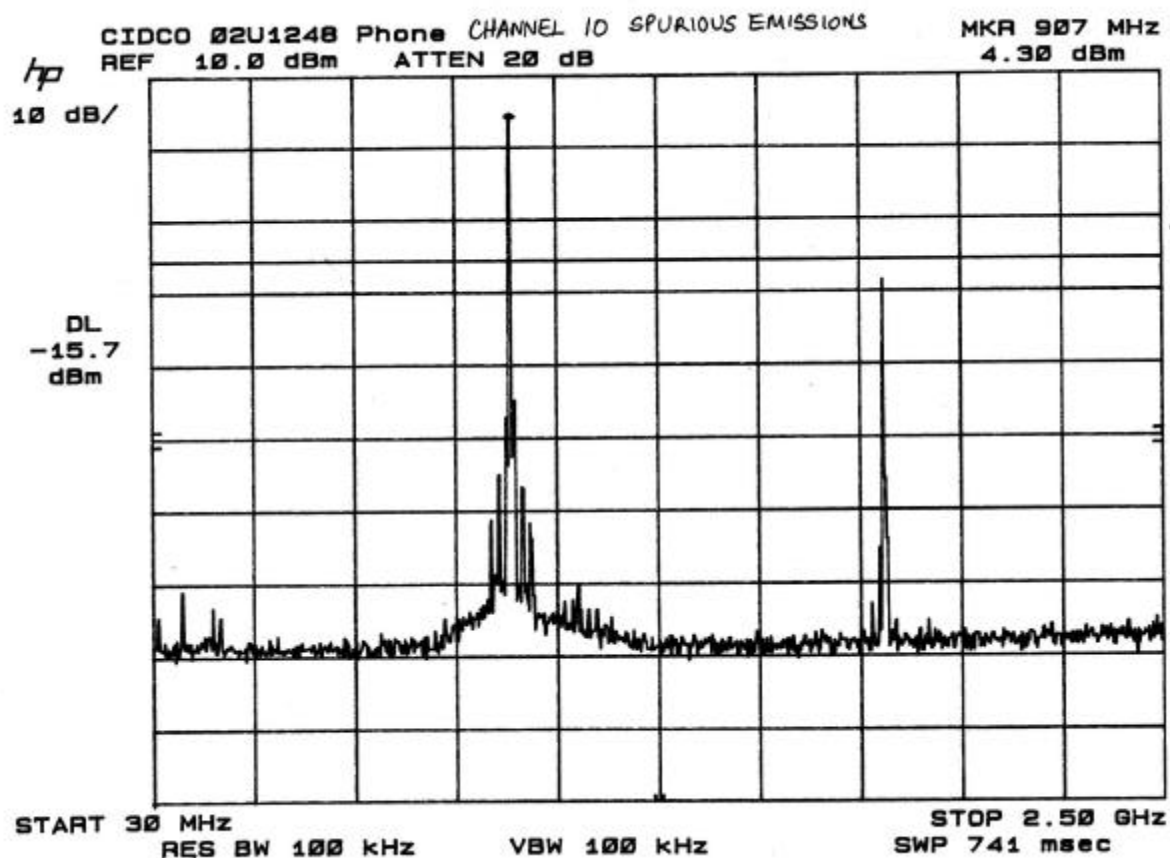

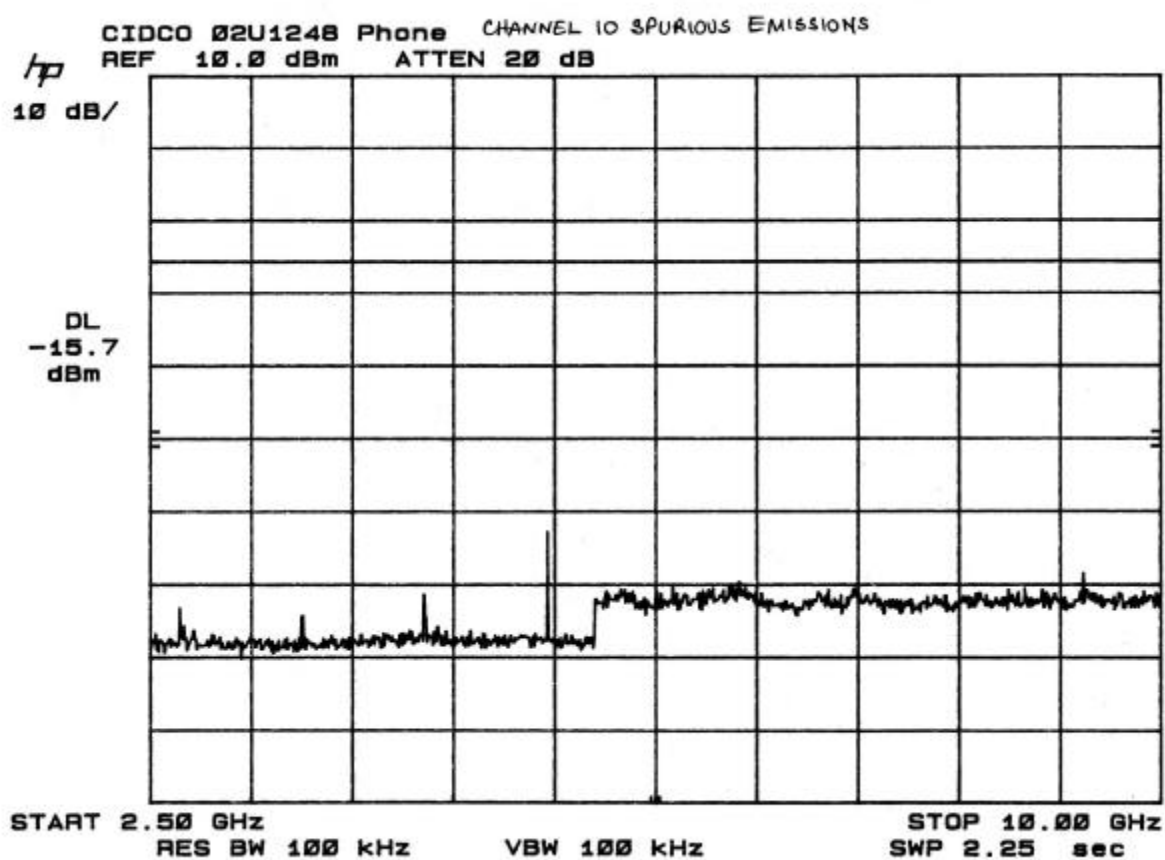


**Conducted Spurious Emission for Handset Unit  
Channel 20**

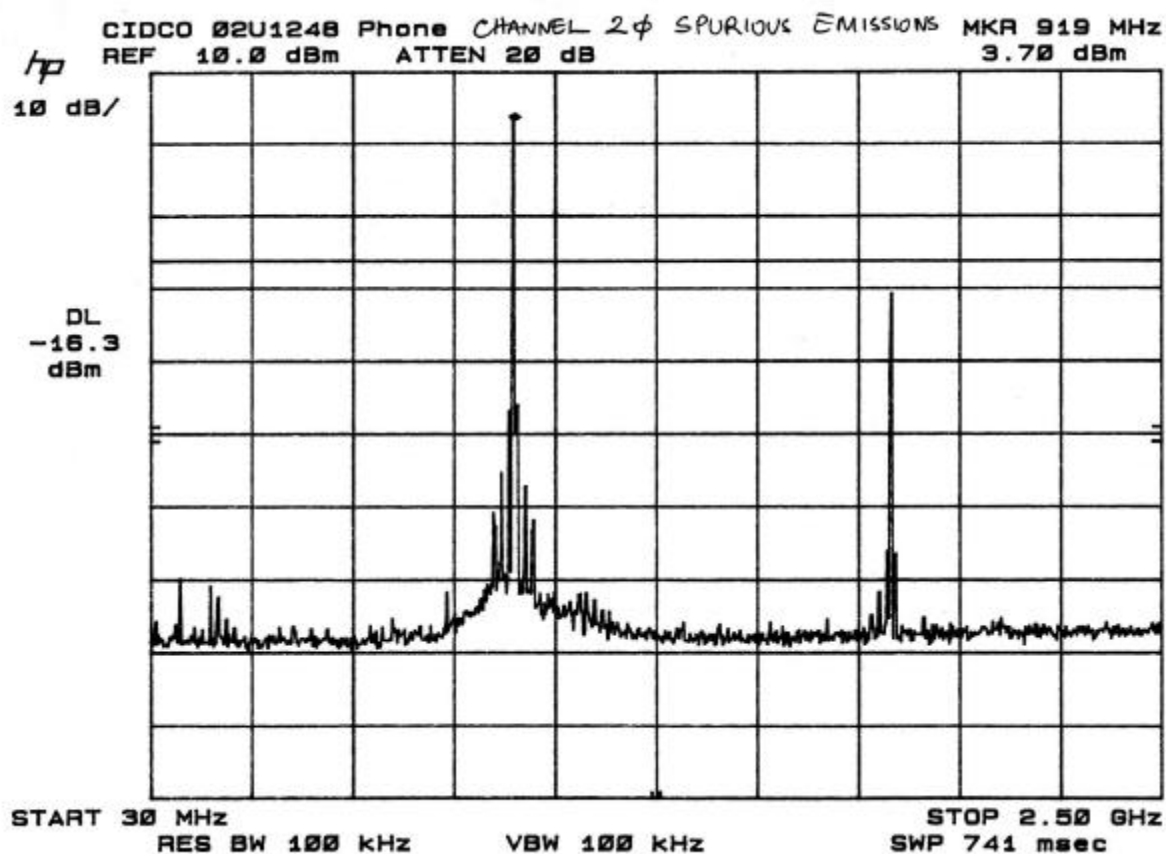

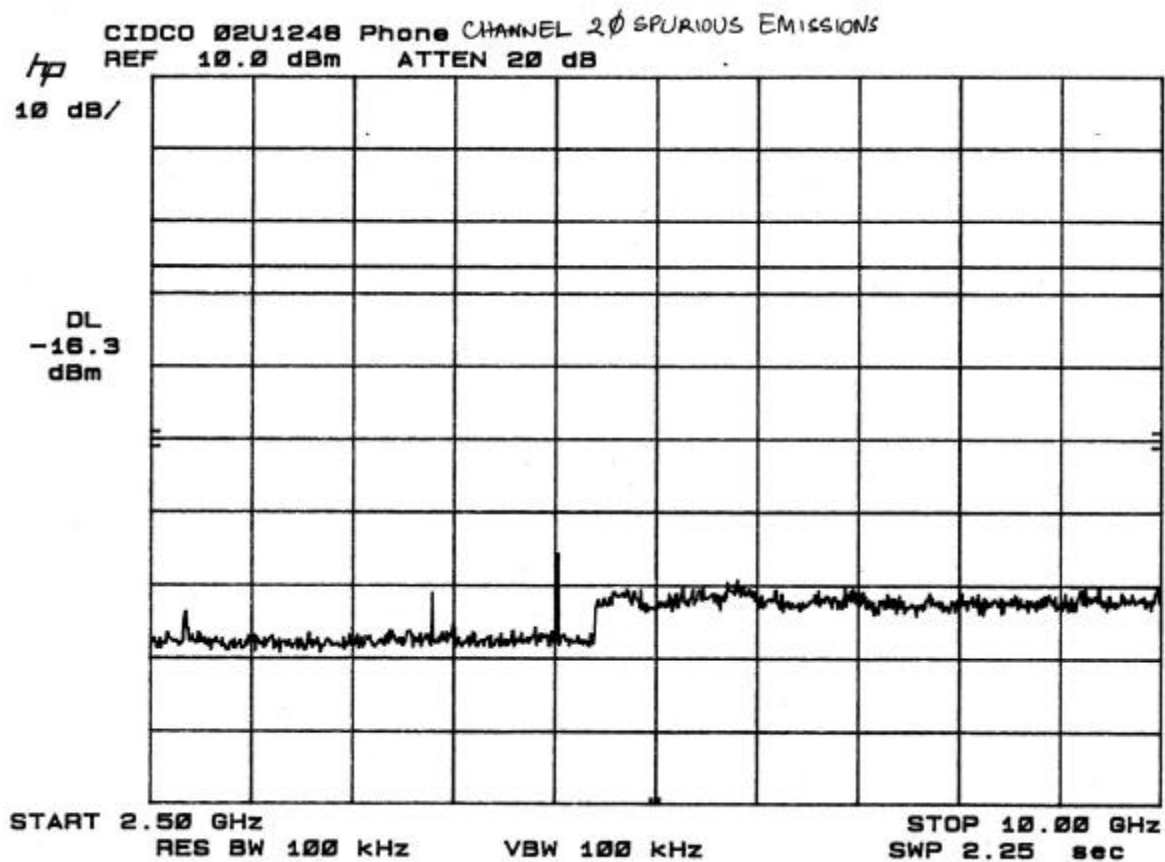

#### 9.4. PEAK POWER SPECTRAL DENSITY

##### TEST SETUP




##### TEST PROCEDURE

The EUT is configured on a test bench as shown above in a continuously transmitting mode. The transmitter output was connected to the spectrum analyzer. The spectrum analyzer is set to 3 kHz RBW and 3 kHz VBW, sweep time greater than or equal to span/3kHz. For the 1.5 MHz span, the sweep time is 500 sec.

##### Result:


*No non-compliance noted. See plots:*

**Peak Power Spectral Density for Base Unit  
Channel 1**

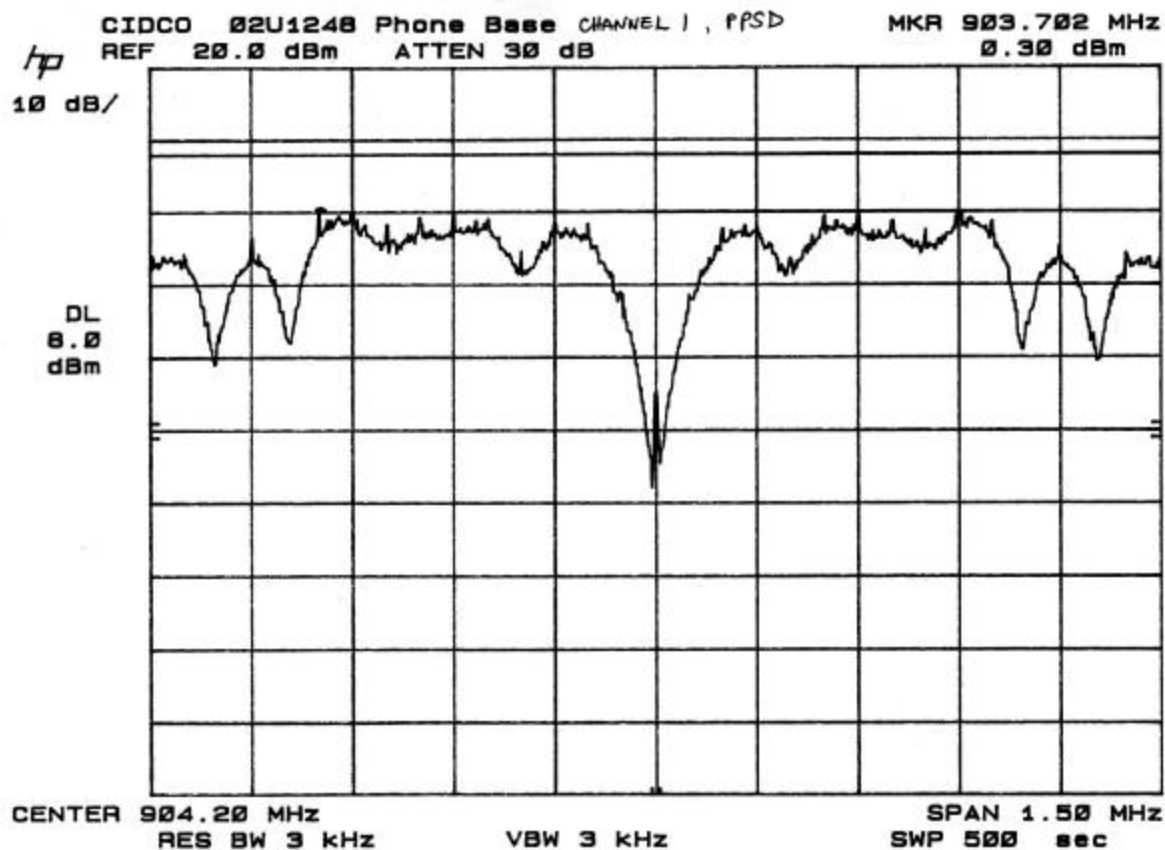





**Peak Power Spectral Density for Base Unit  
Channel 10**

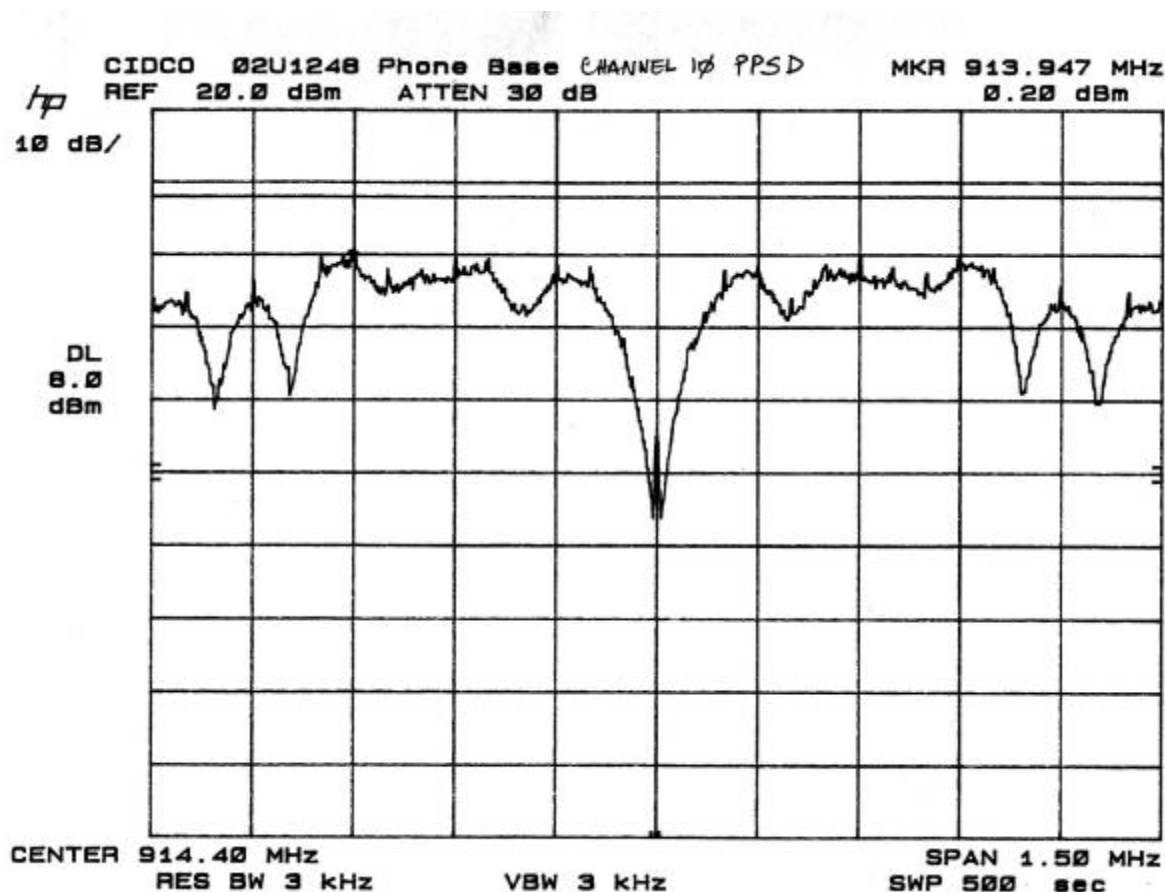



**Peak Power Spectral Density for Base Unit  
Channel 20**

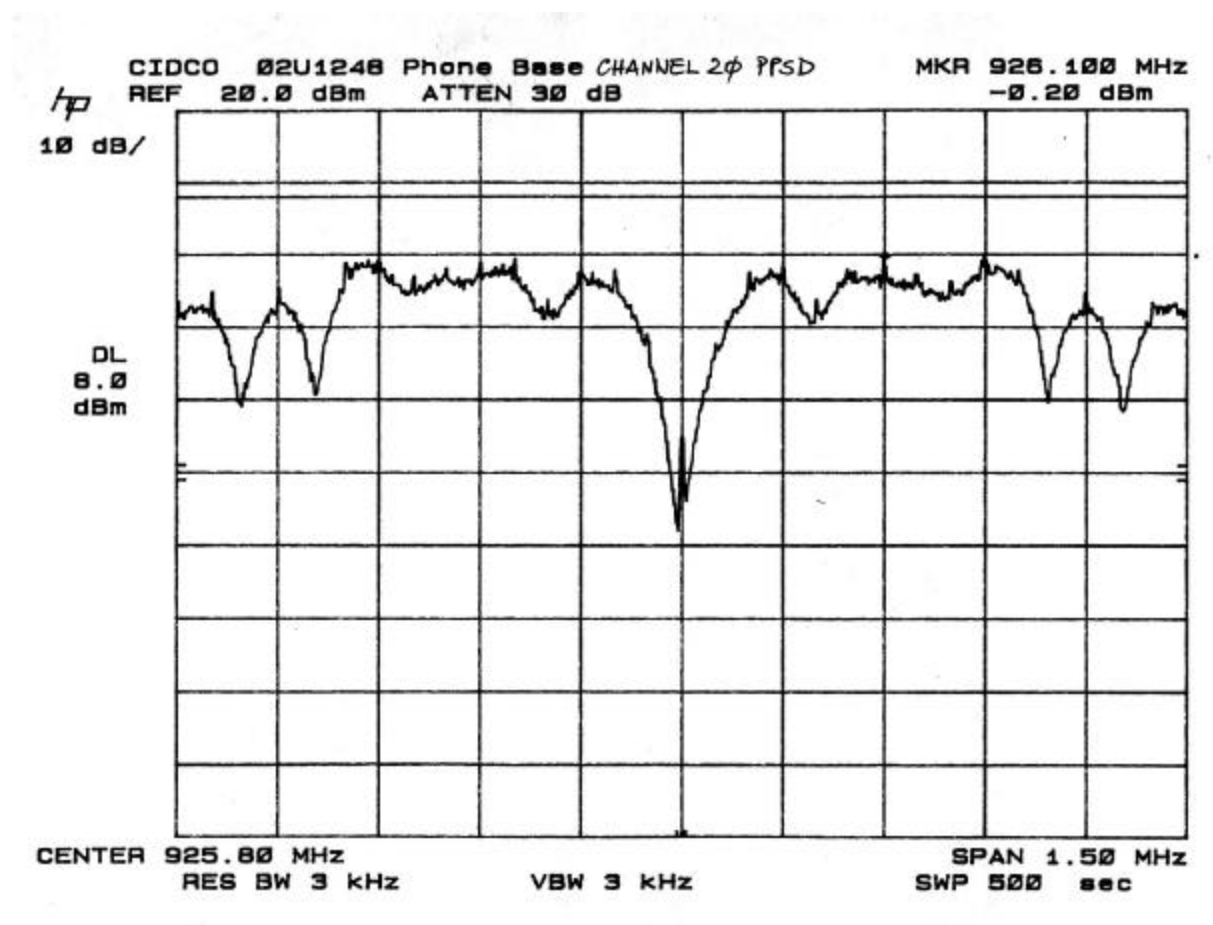

**Peak Power Spectral Density for Handset Unit  
Channel 1**

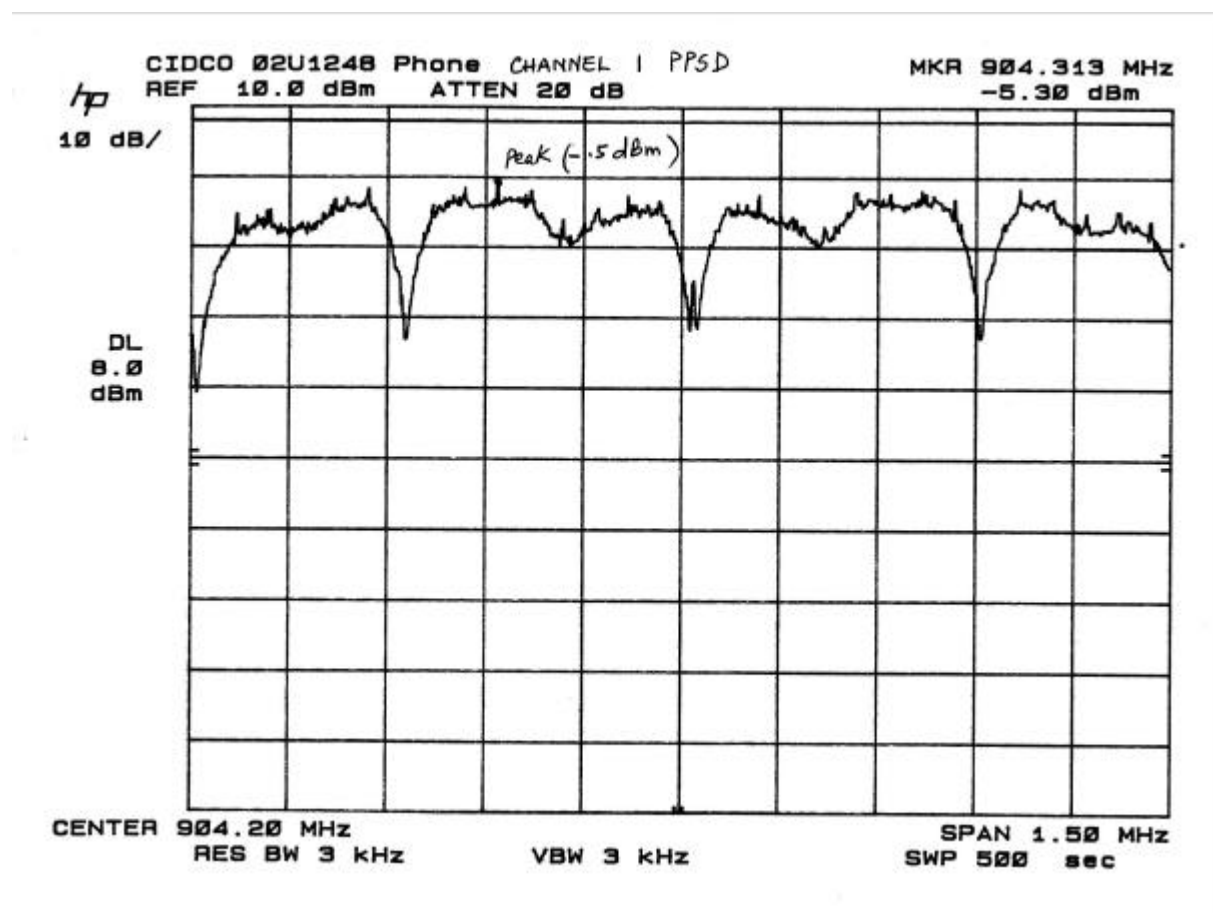

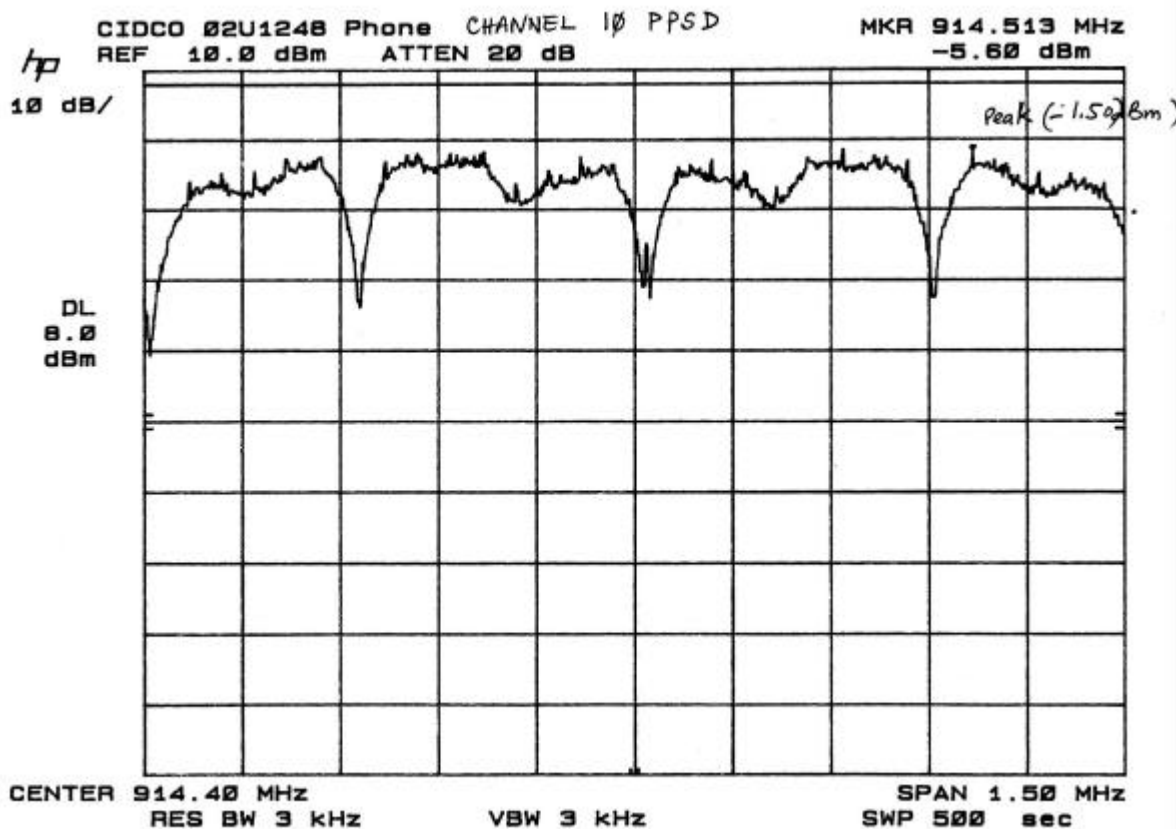**Peak Power Spectral Density for Handset Unit  
Channel 10**

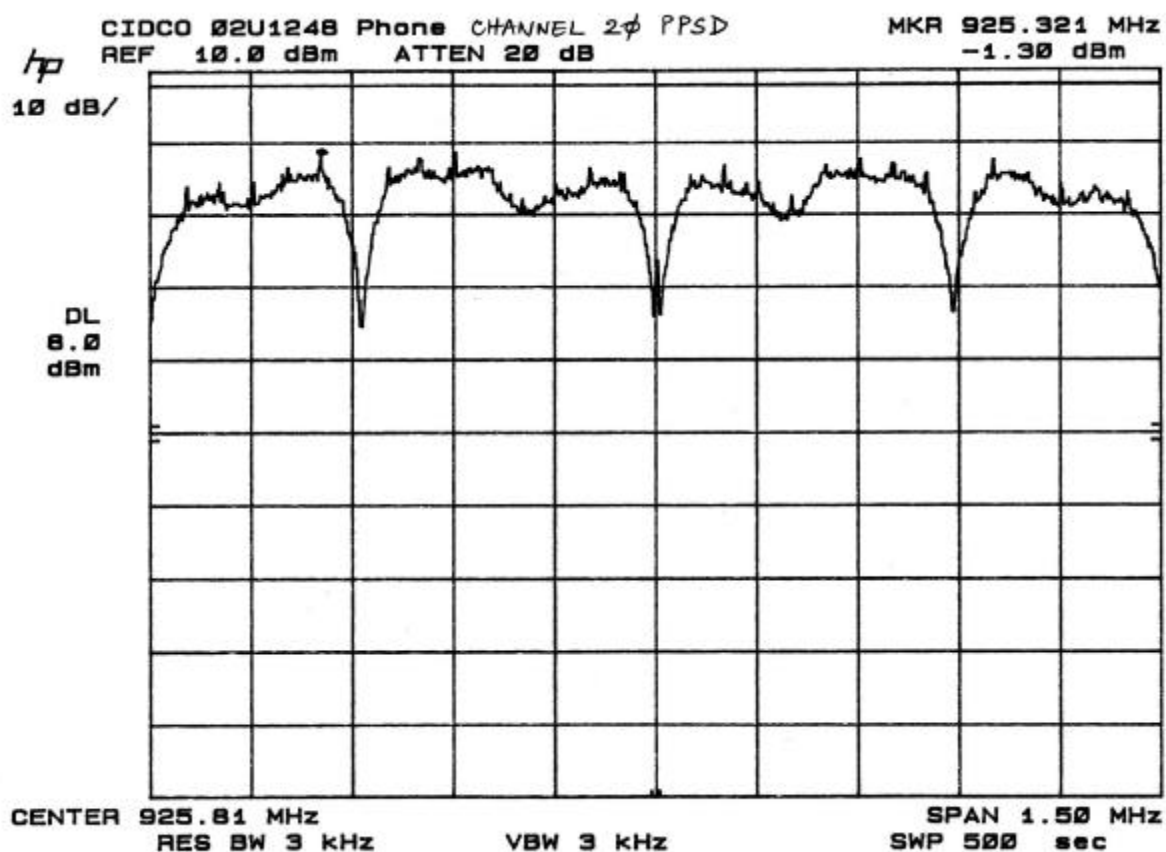**Peak Power Spectral Density for Handset Unit**  
**Channel 20**

## **9.5. BANDEDGE MEASUREMENT**

### **TEST SETUP**

See radiated emissions test procedure, section 9.7.


### **TEST PROCEDURE**

See radiated emissions test procedure, section 9.7.


### **RESULT**

*No non-compliance noted.*


**Restricted Band Edge Measurement for Base Unit  
Channel 1**

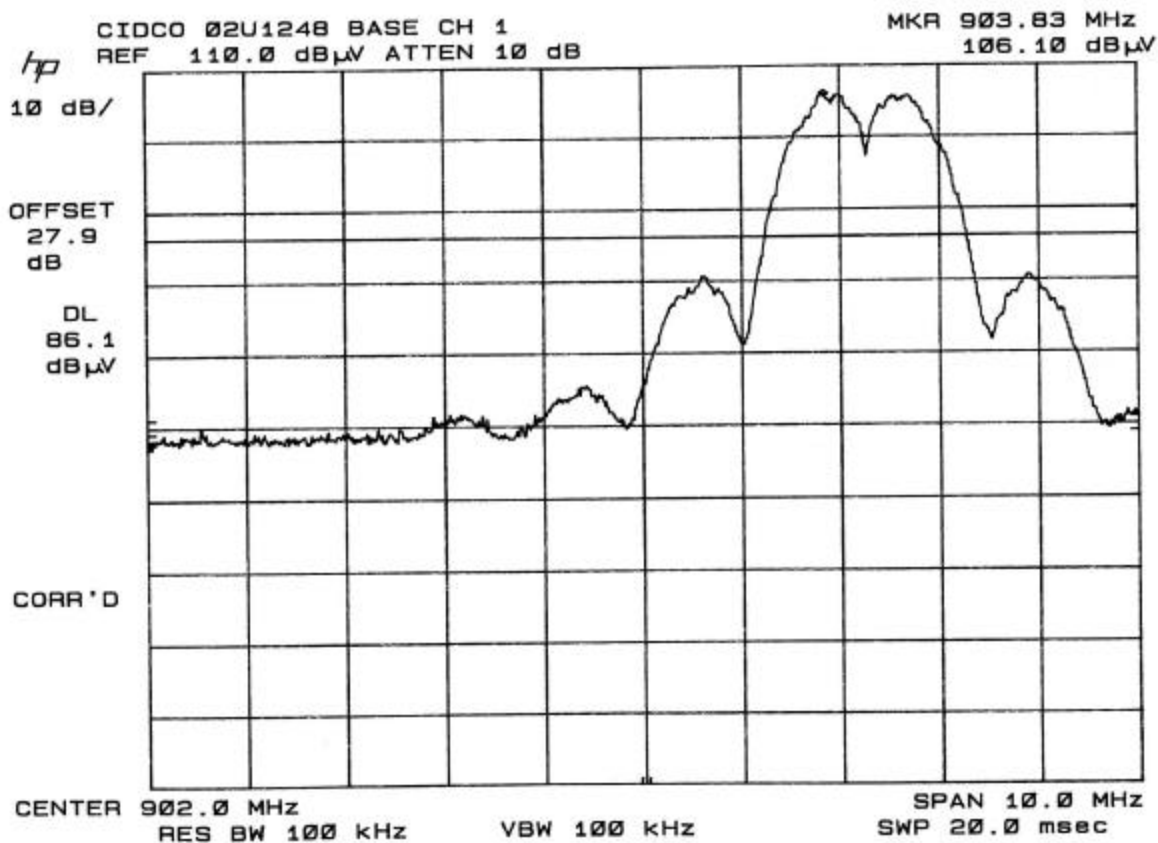


**Restricted Band Edge Measurement for Base Unit  
Channel 20**

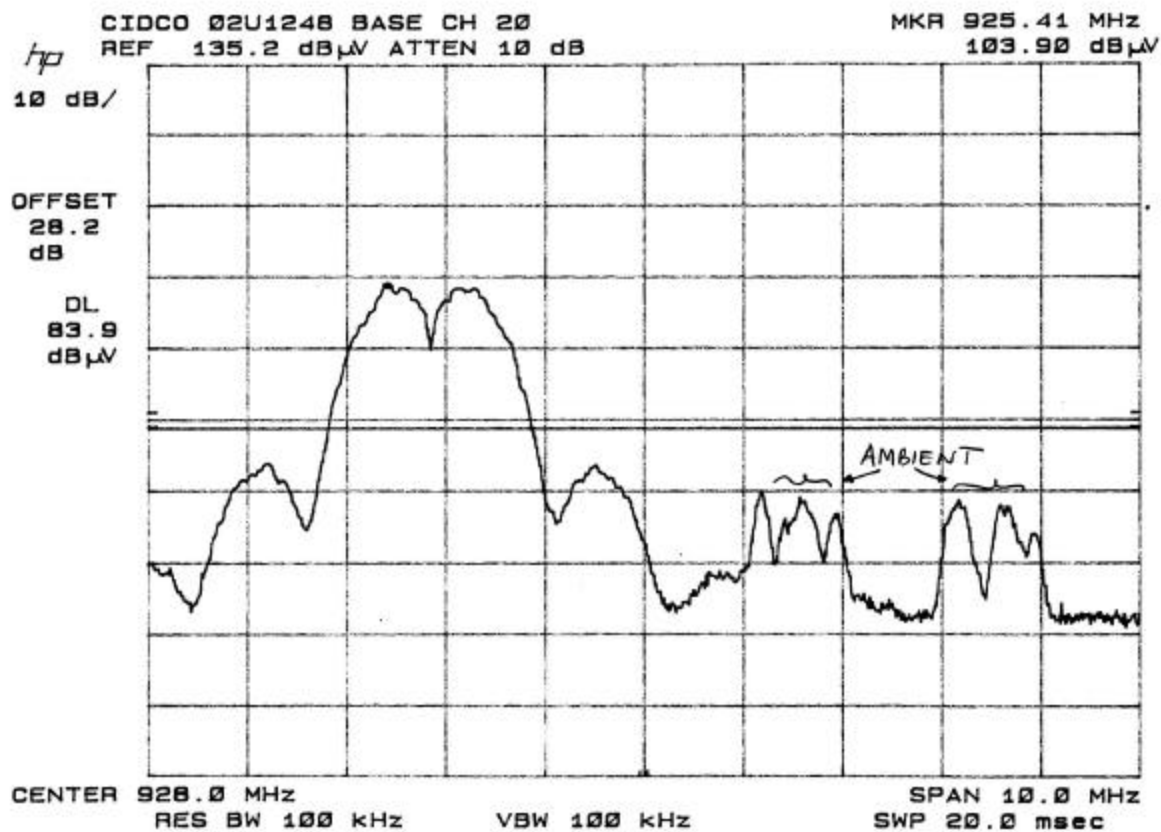

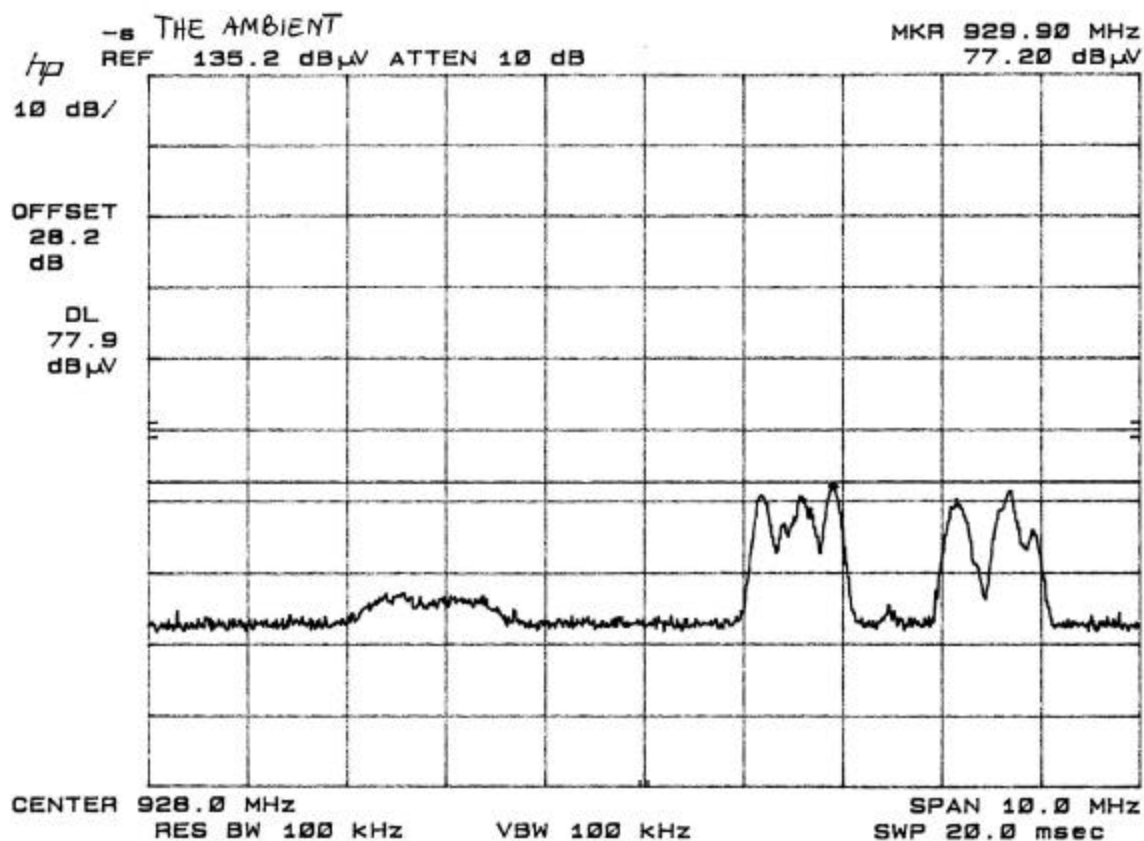


**Restricted Band Edge Measurement for Base Unit  
Ambient Signal**

**Restricted Band Edge Measurement for Handset Unit  
Channel 1**

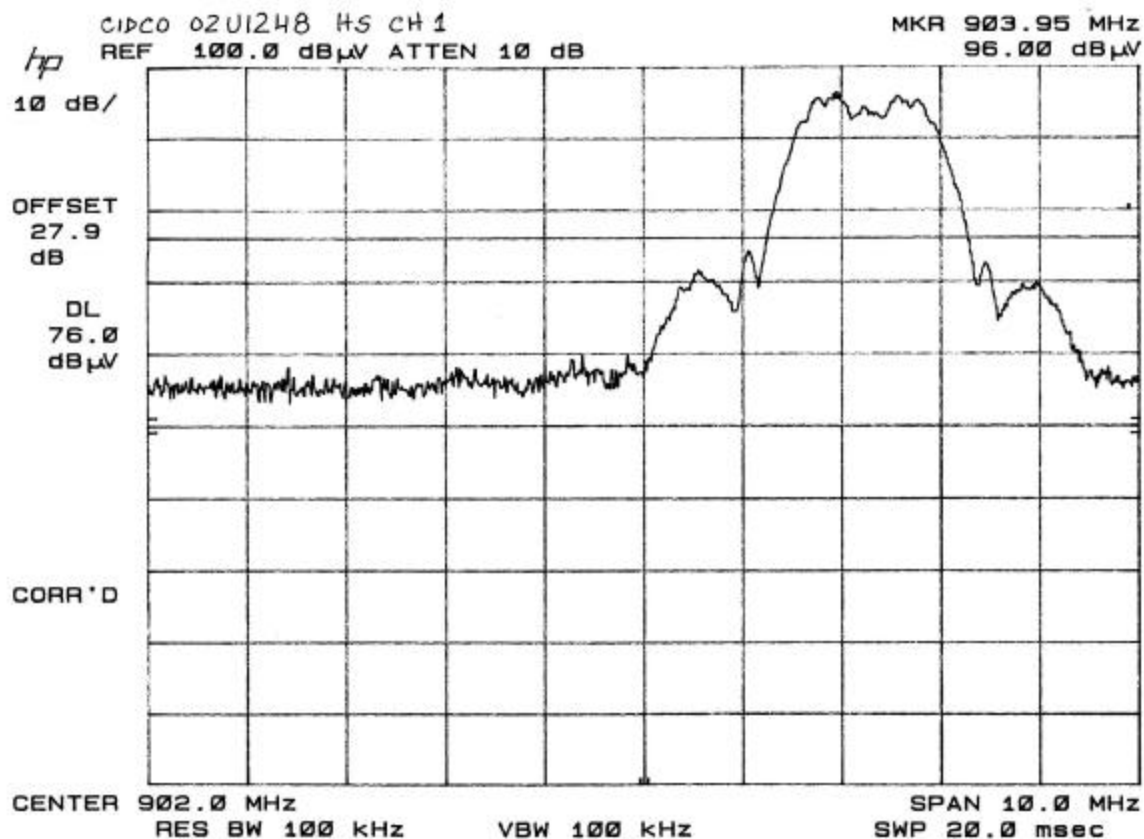

**Restricted Band Edge Measurement for Handset Unit**  
**Channel 20**

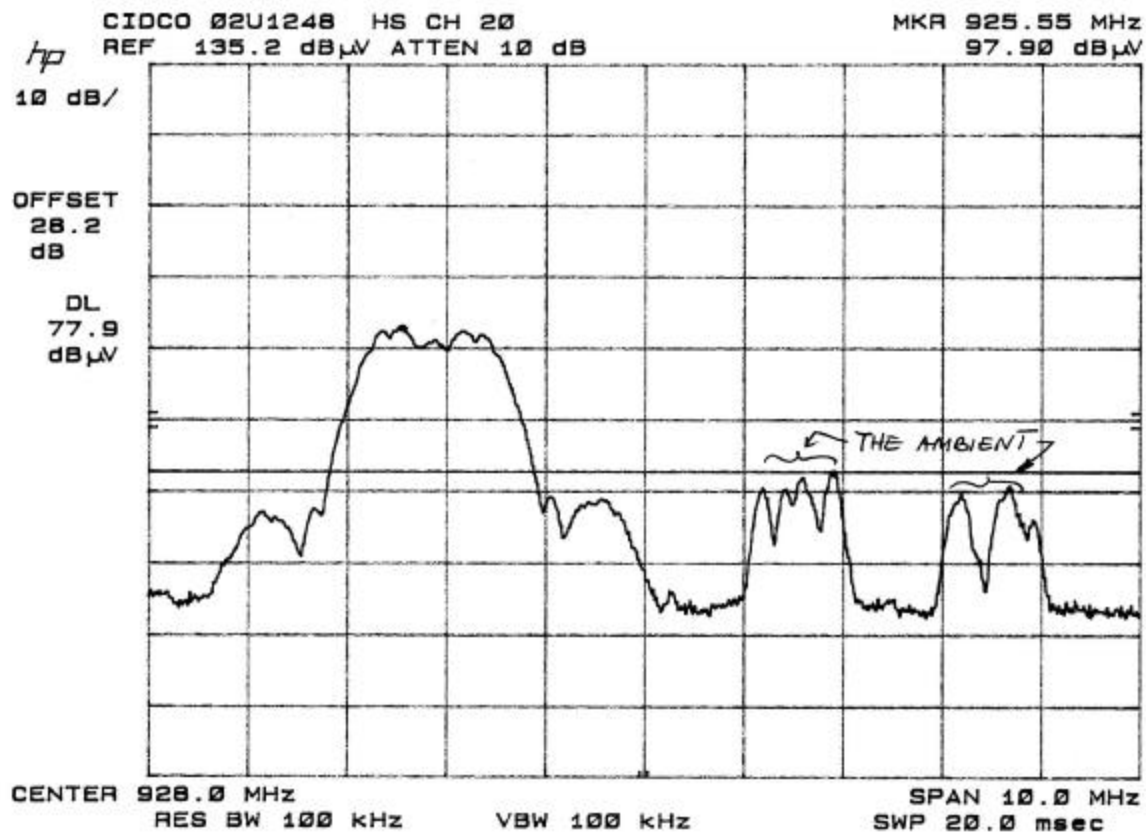

## 9.6. RADIATED EMISSION

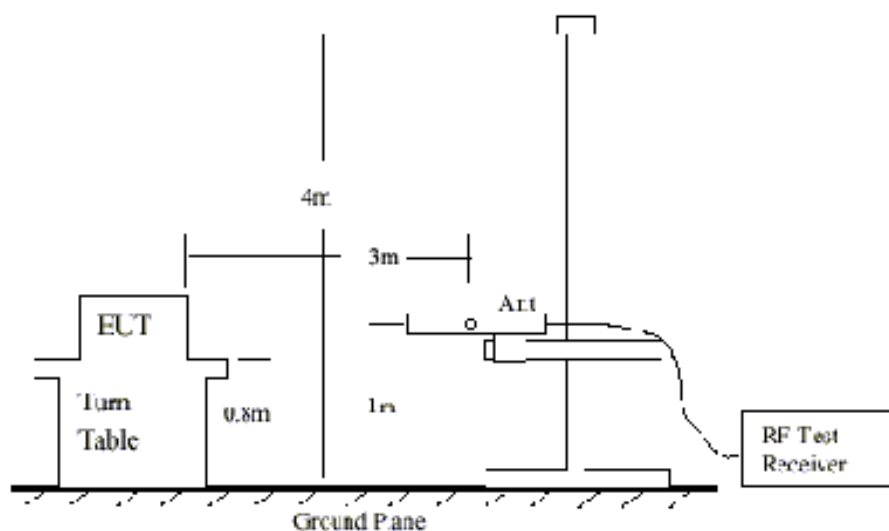


Fig 1: Radiated Emission Measurement 30 to 1000 MHz

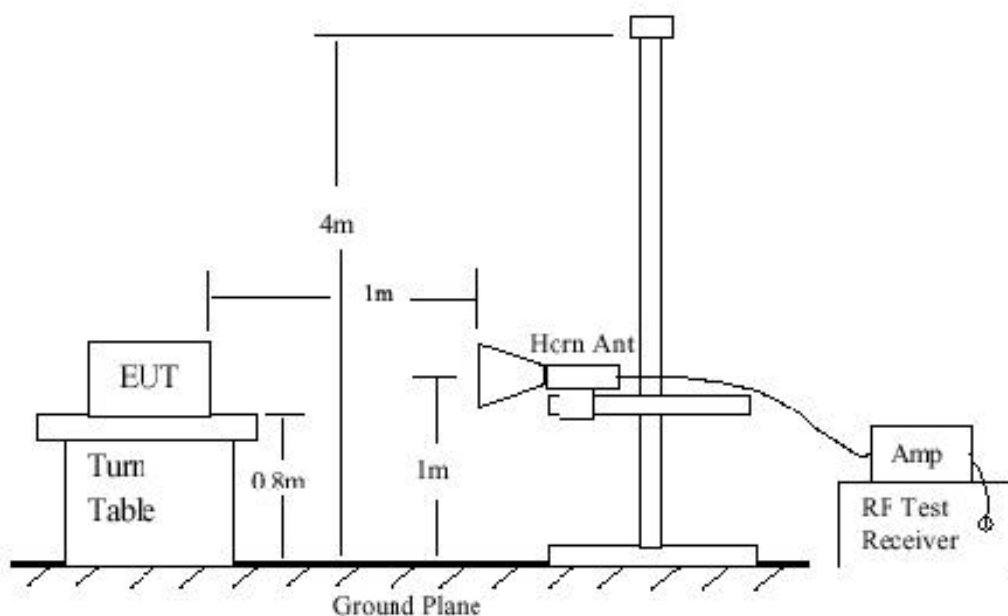


Fig 2: Radiated Emission Above 1000 MHz

**TEST SETUP & PROCEDURE**

1. The EUT was placed on the turn table 0.8 meter above ground in 3 meter open area test site.
2. Set the resolution bandwidth to 120KHz in the test receiver and select Peak function to scan the frequency below 1 GHz.
3. Shift the interference-receiving antenna located in antenna tower upwards and downwards between 1 and 4 meters above ground and find out the local peak emission on frequency domain.
4. Locate the interference-receiving antenna at the position where the local peak reach the maximum emission.
5. Rotate the turn table and stop at the angle where the measurement device has maximum reading
6. Shift the interference-receiving antenna again to detect the maximum emission of the local peak
7. If the reading of the local peak under Peak function is lower than limit by 6dB, then Quasi Peak detection is not needed and this reading should be recorded. And if it is higher than Peak limit, then the test is fail. Others, switch the receiver to Quasi Peak function, set the resolution bandwidth to 100kHz and repeat the procedures C ~ F. If the reading is lower than limit, this reading should be recorded, otherwise, the test is fail.
8. Set the resolution and video bandwidth of the spectrum analyzer to 1MHz and repeat procedures C ~ F for frequency band from 1 GHz to 10 times carrier frequency.

9. If the reading for the local peak is lower than the Average limit, no further testing is needed in this local peak and this reading should be recorded. If it is higher than Average limit but lower than Peak limit, then set the resolution bandwidth to 1MHz and video bandwidth to 300Hz. Repeat procedures C ~ F. If the maximum reading is lower than Average limit, then this reading should be recorded. If it is higher, then the test is fail.

**RESULT**

*No non-compliance noted, as shown below.*



FCC, VCCI, CISPR, CE, AUSTEL, NZ  
UL, CSA, TUV, BSMI, DHHS, NVLAP

561F MONTEREY ROAD, SAN JOSE, CA 95037-9001  
PHONE: (408) 463-0885 FAX: (408) 463-0888

*Project #:* 02U1248  
*Report #:* 020404B1  
*Date & Time:* 04/04/02 9:15 AM  
*Test Engr:* Thanh Nguyen

*Company:* CIDCO Communication Corporation  
*EUT Description:* 900 MHz Digital Spread Spectrum Phone (CIDCO)  
*Test Configuration:* Handset alone  
*Type of Test:* FCC Part 15 Class B  
*Mode of Operation:* Normal operation

[<< Main Sheet](#)

Freq. (MHz)	Reading (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Level (dBuV/m)	Limit FCC_B	Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	Mark (P/Q/A)
412.80	42.70	16.04	4.65	29.39	33.99	46.00	-12.01	3mV	180.00	1.00	P
355.20	42.20	14.56	4.21	29.11	31.86	46.00	-14.14	3mV	180.00	1.00	P
336.00	41.70	14.00	4.06	29.01	30.75	46.00	-15.25	3mV	180.00	1.00	P
182.40	45.40	8.91	2.84	29.24	27.90	43.50	-15.60	3mV	180.00	1.00	P
124.80	41.10	11.75	2.39	29.49	25.74	43.50	-17.76	3mV	180.00	1.00	P
48.00	40.50	8.58	1.72	29.68	21.12	40.00	-18.88	3mV	0.00	1.00	P
6 Worst Data											

## Hi Frequency for Phone Base Unit

April 4-02 FCC Measurement  
Compliance Certification Services, Morgan Hill Open Field Site

Equipment for 1-22 GHz  
HP8566B Analyzer  
Miteq NSP2600-44 Preamp  
EMCO 3115 Antenna  
Cable 16.0 feet

Average Measurements: 1 MHz Resolution Bandwidth  
10Hz Video Bandwidth  
Peak Measurements: 1MHz Resolution Bandwidth  
1MHz Video Bandwidth

EUT: **Base Phone** CH1, F0 = 904.2 MHz

f GHz	Dist feet	Read Peak dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Peak Lim dBuV/m	Avg Lim dBuV/m	Peak Mar dB	Avg Mar dB	Notes
2.713	3.3	60.6	53.2	28.9	4.3	-42.3	-9.5	1.0	43.0	35.6	74.0	54.0	-31.0	-18.4	V (Restricted Band)
3.617	3.3	49.4	39.4	31.8	5.1	-42.0	-9.5	1.0	35.8	25.8	74.0	54.0	-38.2	-28.2	V (Restricted Band)
4.521	3.3	51.9	43.6	32.0	5.9	-41.9	-9.5	1.0	39.4	31.1	74.0	54.0	-34.6	-22.9	V (Restricted Band)
5.425	3.3	52.9	42.3	34.0	6.6	-41.7	-9.5	1.0	43.3	32.7	74.0	54.0	-30.7	-21.3	V (Restricted Band)
8.138	3.3	56.0	45.3	37.0	8.2	-40.3	-9.5	1.0	52.4	41.7	74.0	54.0	-21.6	-12.3	V (Restricted Band)
9.042	3.3	56.3	46.2	37.9	8.7	-39.4	-9.5	1.0	55.1	45.0	74.0	54.0	-18.9	-9.0	V (Restricted Band)
2.713	3.3	53.3	43.8	32.5	4.3	-42.3	-9.5	1.0	39.4	29.9	74.0	54.0	-34.6	-24.1	H (Restricted Band)
3.617	3.3	53.1	44.9	24.2	5.1	-42.0	-9.5	1.0	31.8	23.6	74.0	54.0	-42.2	-30.4	H (Restricted Band)
4.521	3.3	52.4	42.3	24.2	5.9	-41.9	-9.5	1.0	32.1	22.0	74.0	54.0	-41.9	-32.0	H (Restricted Band)
5.425	3.3	51.1	41.1	34.0	6.6	-41.7	-9.5	1.0	41.5	31.5	74.0	54.0	-32.5	-22.5	H (Restricted Band)
8.138	3.3	56.5	45.2	37.0	8.2	-40.3	-9.5	1.0	52.9	41.6	74.0	54.0	-21.1	-12.4	H (Restricted Band)
9.042	3.3	56.3	46.2	37.9	8.7	-39.4	-9.5	1.0	55.1	45.0	74.0	54.0	-18.9	-9.0	H (Restricted Band)

The frequencies higher than 5.4 GHz are the noise floor at test site.

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		



April 4-02	FCC Measurement															
Compliance Certification Services, Morgan Hill Open Field Site																
Equipment for 1-22 GHz																
	HP8566B Analyzer															
	Miteq NSP2600-44 Preamp															
	EMCO 3115 Antenna															
	Cable	16.0		feet												
Average Measurements:																
	1 MHz Resolution Bandwidth								1MHz Resolution Bandwidth							
	10Hz Video Bandwidth								1MHz Video Bandwidth							
EUT:	Base Phone								CH10, F0 = 914.4 MHz							
f GHz	Dist feet	Read Peak dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Peak Lim dBuV/m	Avg Lim dBuV/m	Peak Mar dB	Avg Mar dB	Notes	
2.743	3.3	57.4	51.7	29.0	4.3	-42.2	-9.5	1.0	40.0	34.3	74.0	54.0	-34.0	-19.7	V	(Restrictd Band)
3.658	3.3	45.3	37.3	31.9	5.1	-42.0	-9.5	1.0	31.8	23.8	74.0	54.0	-42.2	-30.2	V	(Restrictd Band)
4.572	3.3	47.8	40.5	32.1	5.9	-41.8	-9.5	1.0	35.5	28.2	74.0	54.0	-38.5	-25.8	V	(Restrictd Band)
5.486	3.3	41.4	31.0	34.2	6.6	-41.7	-9.5	1.0	32.0	21.6	74.0	54.0	-42.0	-32.4	V	(Restrictd Band)
7.315	3.3	56.8	47.0	36.7	7.8	-41.1	-9.5	1.0	51.7	41.9	74.0	54.0	-22.3	-12.1	V	(Restrictd Band)
8.230	3.3	56.0	46.2	37.1	8.3	-40.2	-9.5	1.0	52.7	42.9	74.0	54.0	-21.3	-11.1	V	(Restrictd Band)
9.144	3.3	57.4	47.3	37.7	8.8	-39.4	-9.5	1.0	56.1	46.0	74.0	54.0	-17.9	-8.0	V	(Restrictd Band)
2.743	3.3	48.8	39.2	32.5	4.3	-42.2	-9.5	1.0	34.9	25.3	74.0	54.0	-39.1	-28.7	H	(Restrictd Band)
3.658	3.3	50.6	46.2	24.2	5.1	-42.0	-9.5	1.0	29.4	25.0	74.0	54.0	-44.6	-29.0	H	(Restrictd Band)
4.572	3.3	49.4	41.9	24.2	5.9	-41.8	-9.5	1.0	29.2	21.7	74.0	54.0	-44.8	-32.3	H	(Restrictd Band)
5.486	3.3	45.5	38.4	34.2	6.6	-41.7	-9.5	1.0	36.1	29.0	74.0	54.0	-37.9	-25.0	H	(Restrictd Band)
7.315	3.3	56.3	47.0	36.7	7.8	-41.1	-9.5	1.0	51.2	41.9	74.0	54.0	-22.8	-12.1	H	(Restrictd Band)
8.230	3.3	56.8	46.5	37.1	8.3	-40.2	-9.5	1.0	53.5	43.2	74.0	54.0	-20.5	-10.8	H	(Restrictd Band)
9.144	3.3	57.0	47.3	37.7	8.8	-39.4	-9.5	1.0	55.7	46.0	74.0	54.0	-18.3	-8.0	H	(Restrictd Band)
The frequencies higher than 5.4 GHz are the noise floor at test site.																
f	Measurement Frequency						Amp	Preamp Gain						Avg Lim	Average Field Strength Limit	
Dist	Distance to Antenna						D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit	
Read	Analyzer Reading						Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit	
AF	Antenna Factor						Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit	
CL	Cable Loss						HPF	High Pass Filter								

April 4-02	FCC Measurement														
Compliance Certification Services, Morgan Hill Open Field Site															
Equipment for 1-22 GHz															
	HP8566B Analyzer														
	Miteq NSP2600-44 Preamp														
	EMCO 3115 Antenna														
	Cable	16.0		feet											
Average Measurements:															
	1 MHz Resolution Bandwidth					1MHz Resolution Bandwidth									
	10Hz Video Bandwidth					1MHz Video Bandwidth									
EUT:	Base Phone					CH20, F0 = 925.8 MHz									
f	Dist	Read Peak	Read Avg.	AF	CL	Amp	D Corr	HPF	Peak	Avg	Peak Lim	Avg Lim	Peak Mar	Avg Mar	Notes
GHz	feet	dBuV	dBuV	dB/m	dB	dB	dB		dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	
2.777	3.3	56.9	50.8	29.2	4.3	-42.2	-9.5	1.0	39.7	33.6	74.0	54.0	-34.3	-20.4	V (Restricted Band)
3.703	3.3	45.0	38.0	32.0	5.2	-42.0	-9.5	1.0	31.6	24.6	74.0	54.0	-42.4	-29.4	V (Restricted Band)
4.629	3.3	49.7	41.9	32.2	5.9	-41.8	-9.5	1.0	37.5	29.7	74.0	54.0	-36.5	-24.3	V (Restricted Band)
7.406	3.3	56.2	46.5	36.9	7.8	-41.0	-9.5	1.0	51.4	41.7	74.0	54.0	-22.6	-12.3	V (Restricted Band)
8.332	3.3	56.2	45.8	37.2	8.3	-40.1	-9.5	1.0	53.2	42.8	74.0	54.0	-20.8	-11.2	V (Restricted Band)
2.777	3.3	44.5	34.8	32.5	4.3	-42.2	-9.5	1.0	30.6	20.9	74.0	54.0	-43.4	-33.1	H (Restricted Band)
3.703	3.3	53.2	49.4	24.2	5.2	-42.0	-9.5	1.0	32.0	28.2	74.0	54.0	-42.0	-25.8	H (Restricted Band)
4.629	3.3	50.0	42.9	24.2	5.9	-41.8	-9.5	1.0	29.8	22.7	74.0	54.0	-44.2	-31.3	H (Restricted Band)
7.406	3.3	56.2	46.5	36.9	7.8	-41.0	-9.5	1.0	51.4	41.7	74.0	54.0	-22.6	-12.3	H (Restricted Band)
8.332	3.3	56.0	45.8	37.2	8.3	-40.1	-9.5	1.0	53.0	42.8	74.0	54.0	-21.0	-11.2	H (Restricted Band)
The frequencies higher than 5.4 GHz are the noise floor at test site.															
f	Measurement Frequency					Amp	Preamp Gain						Avg Lim	Average Field Strength Limit	
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit	
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit	
AF	Antenna Factor					Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit	
CL	Cable Loss					HPF	High Pass Filter								

## Hi Frequency for Handset Unit

April 4-02 FCC Measurement  
Compliance Certification Services, Morgan Hill Open Field Site

Equipment for 1-22 GHz  
HP8566B Analyzer  
Miteq NSP2600-44 Preamp  
EMCO 3115 Antenna  
Cable 16.0 feet

Average Measurements: 1 MHz Resolution Bandwidth  
10Hz Video Bandwidth  
Peak Measurements: 1MHz Resolution Bandwidth  
1MHz Video Bandwidth

EUT: **Handset** CH1, F0 = 904.2 MHz

f GHz	Dist feet	Read Peak dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Peak Lim dBuV/m	Avg Lim dBuV/m	Peak Mar dB	Avg Mar dB	Notes
2.713	3.3	72.3	66.1	28.9	4.3	-42.3	-9.5	1.0	54.7	48.5	74.0	54.0	-19.3	-5.5	V (Restricted Band)
3.617	3.3	57.1	52.1	31.8	5.1	-42.0	-9.5	1.0	43.5	38.5	74.0	54.0	-30.5	-15.5	V (Restricted Band)
4.521	3.3	51.5	42.4	32.0	5.9	-41.9	-9.5	1.0	39.0	29.9	74.0	54.0	-35.0	-24.1	V (Restricted Band)
5.425	3.3	50.3	40.8	34.0	6.6	-41.7	-9.5	1.0	40.7	31.2	74.0	54.0	-33.3	-22.8	V (Restricted Band)
8.138	3.3	54.4	44.7	37.0	8.2	-40.3	-9.5	1.0	50.8	41.1	74.0	54.0	-23.2	-12.9	V (Restricted Band)
9.042	3.3	55.3	45.1	37.9	8.7	-39.4	-9.5	1.0	54.1	43.9	74.0	54.0	-19.9	-10.1	V (Restricted Band)
2.713	3.3	72.5	65.4	32.5	4.3	-42.3	-9.5	1.0	58.6	51.5	74.0	54.0	-15.4	-2.5	H (Restricted Band)
3.617	3.3	54.6	47.4	24.2	5.1	-42.0	-9.5	1.0	33.3	26.1	74.0	54.0	-40.7	-27.9	H (Restricted Band)
4.521	3.3	55.9	47.7	24.2	5.9	-41.9	-9.5	1.0	35.6	27.4	74.0	54.0	-38.4	-26.6	H (Restricted Band)
5.425	3.3	50.3	40.8	34.0	6.6	-41.7	-9.5	1.0	40.7	31.2	74.0	54.0	-33.3	-22.8	H (Restricted Band)
8.138	3.3	54.8	45.2	37.0	8.2	-40.3	-9.5	1.0	51.2	41.6	74.0	54.0	-22.8	-12.4	H (Restricted Band)
9.042	3.3	54.2	45.8	37.9	8.7	-39.4	-9.5	1.0	53.0	44.6	74.0	54.0	-21.0	-9.4	H (Restricted Band)

The frequencies higher than 5.425 GHZ are the noise floor at test site


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

April 4-02	FCC Measurement															
Compliance Certification Services, Morgan Hill Open Field Site																
Equipment for 1-22 GHz																
	HP8566B Analyzer															
	Miteq NSP2600-44 Preamp															
	EMCO 3115 Antenna															
	Cable	16.0		feet												
Average Measurements:																
	1 MHz Resolution Bandwidth								1MHz Resolution Bandwidth							
	10Hz Video Bandwidth								1MHz Video Bandwidth							
EUT:	Handset								CH10, F0 = 914.4 MHz							
f GHz	Dist feet	Read Peak dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Peak Lim dBuV/m	Avg Lim dBuV/m	Peak Mar dB	Avg Mar dB	Notes	
0.914																
2.743	3.3	70.2	63.9	29.0	4.3	-42.2	-9.5	1.0	52.8	46.5	74.0	54.0	-21.2	-7.5	V	(Restricted Band)
3.658	3.3	56.3	49.4	31.9	5.1	-42.0	-9.5	1.0	42.8	35.9	74.0	54.0	-31.2	-18.1	V	(Restricted Band)
4.572	3.3	50.9	40.6	32.1	5.9	-41.8	-9.5	1.0	38.6	28.3	74.0	54.0	-35.4	-25.7	V	(Restricted Band)
5.486	3.3	54.1	46.9	34.2	6.6	-41.7	-9.5	1.0	44.7	37.5	74.0	54.0	-29.3	-16.5	V	(Restricted Band)
7.315	3.3	55.3	46.3	36.7	7.8	-41.1	-9.5	1.0	50.2	41.2	74.0	54.0	-23.8	-12.8	V	(Restricted Band)
8.230	3.3	54.8	45.8	37.1	8.3	-40.2	-9.5	1.0	51.5	42.5	74.0	54.0	-22.5	-11.5	V	(Restricted Band)
9.144	3.3	55.6	45.7	37.7	8.8	-39.4	-9.5	1.0	54.3	44.4	74.0	54.0	-19.7	-9.6	V	(Restricted Band)
2.743	3.3	67.1	61.2	32.5	4.3	-42.2	-9.5	1.0	53.2	47.3	74.0	54.0	-20.8	-6.7	H	(Restricted Band)
3.658	3.3	55.1	49.4	24.2	5.1	-42.0	-9.5	1.0	33.9	28.2	74.0	54.0	-40.1	-25.8	H	(Restricted Band)
4.572	3.3	53.1	42.9	24.2	5.9	-41.8	-9.5	1.0	32.9	22.7	74.0	54.0	-41.1	-31.3	H	(Restricted Band)
5.486	3.3	50.9	43.6	34.2	6.6	-41.7	-9.5	1.0	41.5	34.2	74.0	54.0	-32.5	-19.8	H	(Restricted Band)
7.315	3.3	55.3	45.2	36.7	7.8	-41.1	-9.5	1.0	50.2	40.1	74.0	54.0	-23.8	-13.9	H	(Restricted Band)
8.230	3.3	54.8	45.2	37.1	8.3	-40.2	-9.5	1.0	51.5	41.9	74.0	54.0	-22.5	-12.1	H	(Restricted Band)
9.144	3.3	55.6	45.8	37.7	8.8	-39.4	-9.5	1.0	54.3	44.5	74.0	54.0	-19.7	-9.5	H	(Restricted Band)
The frequencies higher than 5.425 GHZ are the noise floor at test site																
f	Measurement Frequency						Amp	Preamp Gain						Avg Lim	Average Field Strength Limit	
Dist	Distance to Antenna						D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit	
Read	Analyzer Reading						Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit	
AF	Antenna Factor						Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit	
CL	Cable Loss						HPF	High Pass Filter								

April 4-02	FCC Measurement														
Compliance Certification Services, Morgan Hill Open Field Site															
Equipment for 1-22 GHz															
	HP8566B Analyzer														
	Miteq NSP2600-44 Preamp														
	EMCO 3115 Antenna														
	Cable	16.0		feet											
Average Measurements:					Peak Measurements:										
	1 MHz Resolution Bandwidth					1MHz Resolution Bandwidth									
	10Hz Video Bandwidth					1MHz Video Bandwidth									
EUT:	Handset					CH20, F0 = 926 MHz									
f	Dist	Read Peak	Read Avg.	AF	CL	Amp	D Corr	HPF	Peak	Avg	Peak Lim	Avg Lim	Peak Mar	Avg Mar	Notes
GHz	feet	dBuV	dBuV	dB/m	dB	dB	dB		dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	
2.778	3.3	67.1	61.0	29.2	4.3	-42.2	-9.5	1.0	49.9	43.8	74.0	54.0	-24.1	-10.2	V (Restrictd Band)
3.704	3.3	54.7	49.2	32.0	5.2	-42.0	-9.5	1.0	41.3	35.8	74.0	54.0	-32.7	-18.2	V (Restrictd Band)
4.630	3.3	53.2	42.8	32.2	5.9	-41.8	-9.5	1.0	41.1	30.7	74.0	54.0	-32.9	-23.3	V (Restrictd Band)
7.408	3.3	56.2	46.5	36.9	7.8	-41.0	-9.5	1.0	51.4	41.7	74.0	54.0	-22.6	-12.3	V (Restrictd Band)
8.334	3.3	56.0	45.8	37.2	8.3	-40.1	-9.5	1.0	53.0	42.8	74.0	54.0	-21.0	-11.2	V (Restrictd Band)
2.778	3.3	66.0	59.3	32.5	4.3	-42.2	-9.5	1.0	52.1	45.4	74.0	54.0	-21.9	-8.6	H (Restricted Band)
3.704	3.3	55.3	49.1	24.2	5.2	-42.0	-9.5	1.0	34.1	27.9	74.0	54.0	-39.9	-26.1	H (Restricted Band)
4.630	3.3	57.8	50.2	24.2	5.9	-41.8	-9.5	1.0	37.6	30.0	74.0	54.0	-36.4	-24.0	H (Restricted Band)
7.408	3.3	55.6	45.2	36.9	7.8	-41.0	-9.5	1.0	50.8	40.4	74.0	54.0	-23.2	-13.6	H (Restricted Band)
8.334	3.3	55.4	45.2	37.2	8.3	-40.1	-9.5	1.0	52.4	42.2	74.0	54.0	-21.6	-11.8	H (Restricted Band)
The frequencies higher than 5.425 GHZ are the noise floor at test site															
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit		
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit		
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit		
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit		
CL	Cable Loss					HPF	High Pass Filter								

## 9.7. LINE CONDUCTED EMISSION

### TEST SETUP

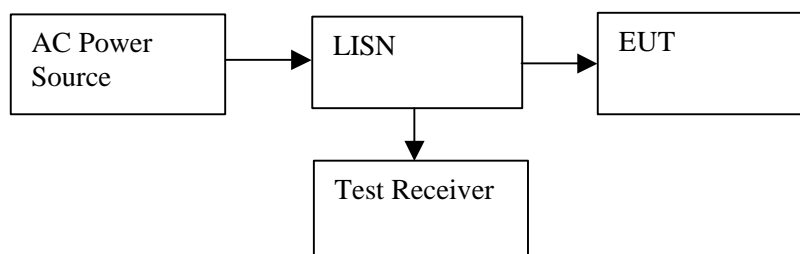

### TEST PROCEDURE

1. EMI Receiver was set to 9 kHz bandwidth.
2. The EUT was placed on a wooden table 40 cm from a vertical ground plane and approximately 80 cm above the horizontal ground plane on the floor. The EUT was set to transmit in a continuous mode.
3. Line conducted data was recorded for both NEUTRAL and HOT lines.

### RESULT


No non-compliance noted. See plot Line Conduction.

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	FCC_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.45	35.90	--	--	0.00	48.00	--	-12.10	--	L1
0.67	32.40	--	--	0.00	48.00	--	-15.60	--	L1
0.76	31.10	--	--	0.00	48.00	--	-16.90	--	L1
0.46	40.50	--	--	0.00	48.00	--	-7.50	--	L2
0.73	37.40	--	--	0.00	48.00	--	-10.60	--	L2
0.85	36.90	--	--	0.00	48.00	--	-11.10	--	L2
6 Worst Data									



561F Monterey Road,  
San Jose, CA 95037 USA  
Tel: (408) 463-0885  
Fax: (408) 463-0888

Data#: 6 File#: CIDCO.EMI Date: 04-08-2002 Time: 12:26:15  
Level (dBuV) Compliance Certification Service

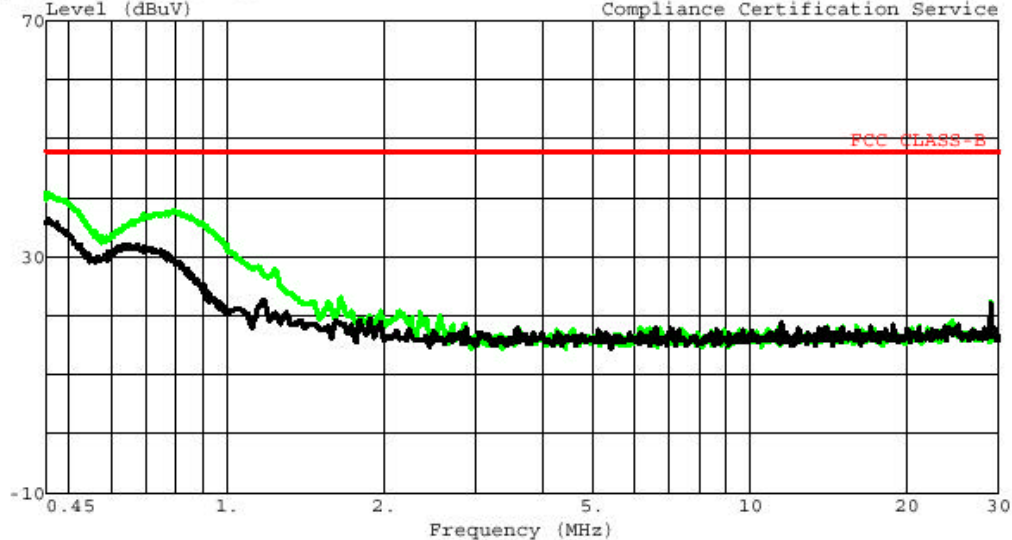

Trace: 5  
Project # : 02U1248-1  
Test Technician: Thanh Nguyen  
Company : Cidco  
EUT : 900MHz Digital Spread Spectrum Phone  
Test Config : Base  
Type of Test : FCC Class B  
Mode of Op. : Normal  
Peak: L1 (Green), L2 (Black)

Ref Trace:

## 9.8. SETUP PHOTOS

### RADIATED EMISSION PHOTOS

#### Handset Unit-Z Position



#### Handset Unit-X Position





**Handset Unit-Y Position**



**Phone Base Unit (Front)**




**Phone Base Unit (Back)**



## CONDUCTED EMISSION PHOTOS

**Phone Base Unit (Front)**

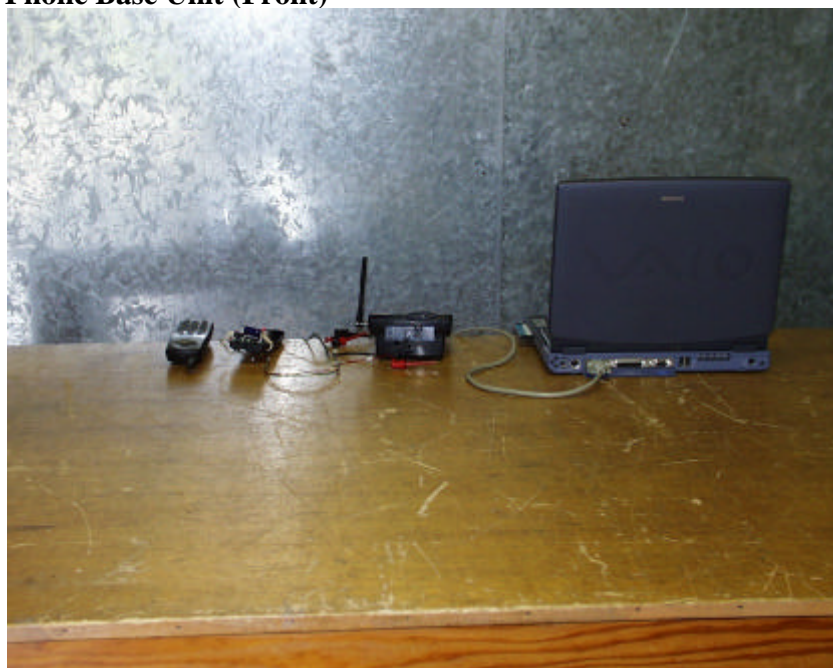

**Phone Base Unit (Back)**





## FCC TESTING TO ANTENNA PORT

### Handset Unit



### Phone Base Unit



**END OF REPORT**