



# RADIO TEST REPORT

Test Report No. : 30BE0121-HO-01-A

**Applicant** : DENSO CORPORATION  
**Type of Equipment** : Remote Keyless Entry System (Transmitter)  
**Model No.** : 12BDH  
**Test regulation** : FCC Part 15 Subpart C : 2009  
Section 15.231  
**FCC ID** : HYQ12BDH  
**Test Result** : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Date of test:

September 24, 2009

Tested by:

Seiki Oitani  
EMC Services

Approved by :

Shinya Watanabe  
Group Leader of EMC Services



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.  
\*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://uljapan.co.jp/emc/nvlap.html>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b (09.01.08)

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer information</b> .....	<b>3</b>
<b>SECTION 2: Equipment under test (E.U.T.)</b> .....	<b>3</b>
<b>SECTION 3: Test specification, procedures &amp; results</b> .....	<b>4</b>
<b>SECTION 4: Operation of E.U.T. during testing</b> .....	<b>7</b>
<b>SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)</b> .....	<b>8</b>
<b>SECTION 6: Automatically deactivate</b> .....	<b>9</b>
<b>SECTION 7: -20dB and 99% Occupied Bandwidth</b> .....	<b>9</b>
<b>APPENDIX 1: Photographs of test setup</b> .....	<b>10</b>
Radiated emission .....	10
Worst case position .....	11
<b>APPENDIX 2: Data of EMI test</b> .....	<b>12</b>
Automatically deactivate.....	12
Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission).....	13
-20dB Bandwidth .....	14
99% Occupied Bandwidth .....	15
Duty Cycle .....	16
<b>APPENDIX 3: Test Instruments</b> .....	<b>18</b>

## **SECTION 1: Customer information**

Company Name : DENSO CORPORATION  
Address : 1-1 Showa-cho, Kariya-shi, Aichi-ken, 448-8661 Japan  
Telephone Number : +81-566-61-5214  
Facsimile Number : +81-566-25-4837  
Contact Person : Jun Namizaki

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : Remote Keyless Entry System (Transmitter)  
Model No. : 12BDH  
Serial No. : Refer to Clause 4.2  
Rating : DC3.0V  
Receipt Date of Sample : September 18, 2009  
Country of Mass-production : Japan  
Condition of EUT : Engineering prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No Modification by the test lab

### **2.2 Product Description**

This system is mainly used for locking or unlocking the doors of the vehicle.  
The transmitter sends a radio wave signal while the button is pushed.  
The receiver becomes active in response to the signal from the transmitter.

### **Radio Specification**

Radio Type : Transmitter  
Frequency of Operation : 314.35 MHz  
Local oscillator frequency : 314.37 MHz SAW resonator  
Modulation : ASK  
Power Supply (radio part input) : DC 3.0V (One lithium battery: CR2016 x 1)  
Antenna type : Built-in type (Fixed)

---

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

## **SECTION 3: Test specification, procedures & results**

### **3.1 Test Specification**

Test Specification : FCC Part 15 Subpart C: 2009, final revised on February 27, 2009  
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators  
Section 15.231 Periodic operation in the band 40.66 - 40.70MHz  
and above 70MHz

### **3.2 Procedures and results**

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted emission	FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements ----- IC: RSS-Gen 7.2.2	FCC: Section 15.207 ----- IC: RSS-Gen 7.2.2	N/A	N/A*1)	-
Automatically Deactivate	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators ----- IC: -	FCC: Section 15.231(a)(1) ----- IC: RSS-210 A1.1.1	N/A	Complied	Radiated
Electric Field Strength of Fundamental Emission	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators ----- IC: RSS-Gen 4.8	FCC: Section 15.231(b) ----- IC: RSS-210 A1.1.2	9.2dB 314.388MHz Horizontal, PK with Duty Factor	Complied	Radiated
Electric Field Strength of Spurious Emission	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators ----- IC: RSS-Gen 4.9	FCC: Section 15.205 Section 15.209 Section 15.231(b) ----- IC: RSS-210 A1.1.2, 2.6, 2.7	19.3dB 2829.493MHz Horizontal /Vertical PK with Duty Factor	Complied	Radiated
-20dB Bandwidth	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators ----- IC: -	FCC: Section 15.231(c) ----- IC: Reference data	N/A	Complied	Radiated

Note: UL Japan, Inc.'s EMI Work Procedures No.QPM05 and QPM15.  
\*1) The test is not applicable since the EUT does not have AC Mains.

#### **FCC 15.31 (e)**

This test was performed with the New Battery (DC 3.0V) and the constant voltage was supplied to the EUT during the tests. Therefore, the EUT complies with the requirement.

#### **FCC Part 15.203 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

### 3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	IC: RSS-Gen 4.6.1	IC: RSS-Gen 4.6.1	N/A	Complied	Radiated

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

#### EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room (semi-anechoic chamber)	Radiated emission (10m*)(+dB)			Radiated emission (3m*)(+dB)					
	9kHz-30MHz	30MHz-300MHz	300MHz-1GHz	9kHz-30MHz	30MHz-300MHz	300MHz-1GHz	1GHz-18GHz	18GHz-26.5GHz	26.5GHz-40GHz
No.1	3.1dB	4.4dB	3.9dB	3.2dB	3.8dB	3.9dB	5.0dB	5.0dB	5.4dB
No.2	-	-	-	3.2dB	4.4dB	4.0dB	5.0dB	5.2dB	5.4dB
No.3	-	-	-	3.2dB	4.2dB	3.8dB	5.0dB	5.3dB	5.3dB
No.4	-	-	-	3.2dB	4.0dB	3.8dB	5.0dB	5.3dB	5.3dB

\*10m/3m = Measurement distance

#### Radiated emission test(3m)

The data listed in this test report has enough margin, more than the site margin.

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

### 3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. \*NVLAP Lab. code: 200572-0  
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test set up, Data of EMI, Test instruments.

Refer to APPENDIX.


## **SECTION 4: Operation of E.U.T. during testing**

### **4.1 Operating Modes**

<b>Test Item*</b>	<b>Mode</b>
Automatically Deactivate	Normal use mode
Electric Field Strength of Fundamental Emission Electric Field Strength of Spurious Emission -20dB & 99% Occupied Bandwidth Duty Cycle	Transmitting mode (Tx)
* The system was configured in typical fashion (as a customer would normally use it) for testing.	

### **4.2 Configuration and peripherals**

A:EUT

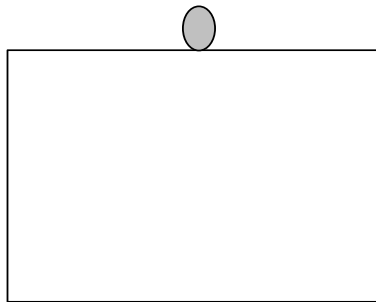

\* Test data was taken under worse case conditions.

#### **Description of EUT**

<b>No.</b>	<b>Item</b>	<b>Model number</b>	<b>Serial number</b>	<b>Manufacturer</b>	<b>Remarks</b>
A	Remote Keyless Entry System (Transmitter)	12BDH	001 *1) 002 *2)	DENSO CORPORATION	EUT

\*1) Used for Radiated Emission, -20dB Bandwidth, 99% Occupied Bandwidth and Duty cycle tests

\*2) Used for Automatically deactivate test

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

**SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)**

**Test Procedure and conditions**

EUT was placed on a urethane platform of nominal size, 1.5m by 1.0m, raised 0.8m above the conducting ground plane. The EUT was set on the center of the tabletop.  
Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.  
Photographs of the set up are shown in Appendix 1.

**[Transmitting mode]**

The Radiated Electric Field Strength has been measured on Semi anechoic chamber with a ground plane and at a distance of 3m.  
The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.  
The measurements were performed for both vertical and horizontal antenna polarization.  
The radiated emission measurements were made with the following detector function of the test receiver/spectrum analyzer.

**Test Antennas are used as below;**

Frequency	30MHz to 300MHz	300MHz to 1GHz	Above 1GHz
Antenna Type	Biconical	Logperiodic	Horn

	Below or equal to 1GHz (Test Receiver )	Above 1GHz (Spectrum Analyzer)
Detector Type	Peak and Peak with Duty factor	Peak and Peak with Duty factor
IF Bandwidth	120kHz	PK: RBW:1MHz VBW:1MHz

- The carrier level (or, noise levels) was (or were) measured at each position of all three axes X, Y and Z, and the position that has the maximum noise was determined.  
With the position, the noise levels of all the frequencies was measured.

\*The result is rounded off to the second decimal place, so some differences might be observed.

**Measurement range** : 30MHz-3.2GHz  
**Test data** : APPENDIX  
**Test result** : Pass



## **SECTION 6: Automatically deactivate**

### **Test Procedure**

The measurement was performed with Electric field strength using a spectrum analyzer.

Test data : APPENDIX  
Test result : Pass

## **SECTION 7: -20dB and 99% Occupied Bandwidth**

### **Test Procedure**

The measurement was performed in the antenna height to gain the maximum of Electric field strength.

Test data : APPENDIX  
Test result : Pass