



FCC RADIO TEST REPORT

FCC ID : I28-WYSBHVDXP
Equipment : WLAN/BTLE module
Brand Name : ZEBRA
Model Name : WYSBHVDXP
Applicant : Zebra Technologies Corporation
 3 Overlook Point, Lincolnshire, IL
 60069, United States
Manufacturer : Zebra Technologies Corporation
 3 Overlook Point, Lincolnshire, IL
 60069, United States
Standard : FCC Part 15 Subpart C §15.247

The product was received on Mar. 08, 2021 and testing was started from Mar. 12, 2021 and completed on Apr. 27, 2021. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Reviewed by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report	3
Summary of Test Result	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	6
1.4 Testing Location	7
1.5 Applicable Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode	9
2.3 Connection Diagram of Test System	12
2.4 Support Unit used in test configuration and system	13
2.5 EUT Operation Test Setup	13
2.6 Measurement Results Explanation Example	13
3 Test Result	14
3.1 Number of Channel Measurement	14
3.2 Hopping Channel Separation Measurement	16
3.3 Dwell Time Measurement	21
3.4 20dB and 99% Bandwidth Measurement	23
3.5 Output Power Measurement	32
3.6 Conducted Band Edges Measurement	34
3.7 Conducted Spurious Emission Measurement	39
3.8 Radiated Band Edges and Spurious Emission Measurement	46
3.9 AC Conducted Emission Measurement	50
3.10 Antenna Requirements	52
4 List of Measuring Equipment.....	53
5 Uncertainty of Evaluation	55
Appendix A. AC Conducted Emission Test Result	
Appendix B. Radiated Spurious Emission	
Appendix C. Radiated Spurious Emission Plots	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(1)	Number of Channels	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	Pass	-
3.4	2.1049	99% Occupied Bandwidth	Reporting only	-
3.5	15.247(b)(1)	Peak Output Power	Pass	-
3.6	15.247(d)	Conducted Band Edges	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	Under limit 9.53 dB at 402.480 MHz
3.9	15.207	AC Conducted Emission	Pass	Under limit 9.58 dB at 13.241 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Lucy Wu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	WLAN/BTLE module
Brand Name	ZEBRA
Model Name	WYSBHVDXP
FCC ID	I28-WYSBHVDXP
EUT supports Radios application	WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 WLAN 11ax HE20/HE40/HE80 Bluetooth BR/EDR/LE
HW Version	Revision F
SW Version	17.68.01.p13
EUT Stage	Identical Prototype

Remark: The above EUTs information was declared by manufacturer.

Supported Unit Used in Test Configuration and System				
Printer	Brand Name	ZEBRA	Model Name	ZQ521
Battery	Brand Name	ZEBRA	Part Number	P1089503-003
AC Adapter	Brand Name	ZEBRA	Model Name	FSP025-DYAA3
Bluetooth Antenna 1	Brand Name	gigaAnt	Model Name	3030A5645-01
Bluetooth Antenna 2	Brand Name	TAIYO YUDEN	Model Name	AH 168M245001
Bluetooth Antenna 3	Brand Name	Johanson Technology	Model Name	2450AT07A0100
WLAN Antenna 1	Brand Name	Laird	Model Name	RD2458-5
WLAN Antenna 2	Brand Name	Pulse	Model Name	W3006
WLAN Antenna 3	Brand Name	Auden	Model Name	220370-09
WLAN Antenna 4	Brand Name	Auden	Model Name	B91882-30



1.2 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR (1Mbps): 11.72 dBm / 0.0149 W Bluetooth EDR (2Mbps): 11.05 dBm / 0.0127 W Bluetooth EDR (3Mbps): 11.32 dBm / 0.0136 W
99% Occupied Bandwidth	Bluetooth BR (1Mbps): 0.856MHz Bluetooth EDR (2Mbps): 1.163MHz Bluetooth EDR (3Mbps): 1.160MHz
Antenna Type / Gain	<3030A5645-01>: Monopole Antenna with gain 2.7 dBi <AH 168M245001>: Monopole Antenna with gain 3.0 dBi <2450AT07A0100>: Monopole Antenna with gain 1.0 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05HY, CO07-HY, 03CH13-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-



2.2 Test Mode

Channel	Frequency	Bluetooth Average Output Power		
		GFSK / 1Mbps		
		DH1	DH3	DH5
Ch00	2402MHz	11.66 dBm	8.65 dBm	11.64 dBm
Ch39	2441MHz	11.65 dBm	11.64 dBm	11.63 dBm
Ch78	2480MHz	11.56 dBm	11.55 dBm	11.52 dBm

Channel	Frequency	Bluetooth Average Output Power		
		$\pi/4$ -DQPSK / 2Mbps		
		2DH1	2DH3	2DH5
Ch00	2402MHz	8.81 dBm	8.75 dBm	8.69 dBm
Ch39	2441MHz	8.76 dBm	8.73 dBm	8.64 dBm
Ch78	2480MHz	8.59 dBm	8.56 dBm	8.52 dBm

Channel	Frequency	Bluetooth Average Output Power		
		8-DPSK / 3Mbps		
		3DH1	3DH3	3DH5
Ch00	2402MHz	8.83 dBm	8.81 dBm	8.74 dBm
Ch39	2441MHz	8.77 dBm	8.76 dBm	8.65 dBm
Ch78	2480MHz	8.63 dBm	8.60 dBm	8.54 dBm



Channel	Frequency	Bluetooth Peak Output Power		
		GFSK / 1Mbps		
		DH1	DH3	DH5
Ch00	2402MHz	11.72 dBm	11.71 dBm	11.69 dBm
Ch39	2441MHz	11.67 dBm	11.66 dBm	11.65 dBm
Ch78	2480MHz	11.51 dBm	11.50 dBm	11.48 dBm

Channel	Frequency	Bluetooth Peak Output Power		
		$\pi/4$ -DQPSK / 2Mbps		
		2DH1	2DH3	2DH5
Ch00	2402MHz	11.05 dBm	11.04 dBm	11.03 dBm
Ch39	2441MHz	10.99 dBm	10.98 dBm	10.94 dBm
Ch78	2480MHz	10.77 dBm	10.75 dBm	10.74 dBm

Channel	Frequency	Bluetooth Peak Output Power		
		8-DPSK / 3Mbps		
		3DH1	3DH3	3DH5
Ch00	2402MHz	11.32 dBm	11.31 dBm	11.30 dBm
Ch39	2441MHz	11.22 dBm	11.21 dBm	11.20 dBm
Ch78	2480MHz	11.08 dBm	11.06 dBm	11.05 dBm

Remark: The data rate was set in 1Mbps for all the test items due to the highest RF output power.




- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in two config (Ant. Horizontal and Ant. Vertical). The worst cases (Ant. Horizontal) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
Conducted Test Cases	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps π /4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth BR 1Mbps GFSK		
	Mode 1: CH00_2402 MHz		
	Mode 2: CH39_2441 MHz		
	Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 :WLAN (2.4GHz) Link + Bluetooth Link + Printer + AC Adapter + WLAN Antenna *2 + Bluetooth Antenna		
Remark:			
1. For Radiated Test Cases, the worst mode data rate 1Mbps was reported only since the highest RF output power in the preliminary tests. The conducted spurious emissions and conducted band edge measurement for other data rates were not worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission.			
2. For Radiated Test Cases, the tests were performed Bluetooth Antenna (AH 168M245001).			

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

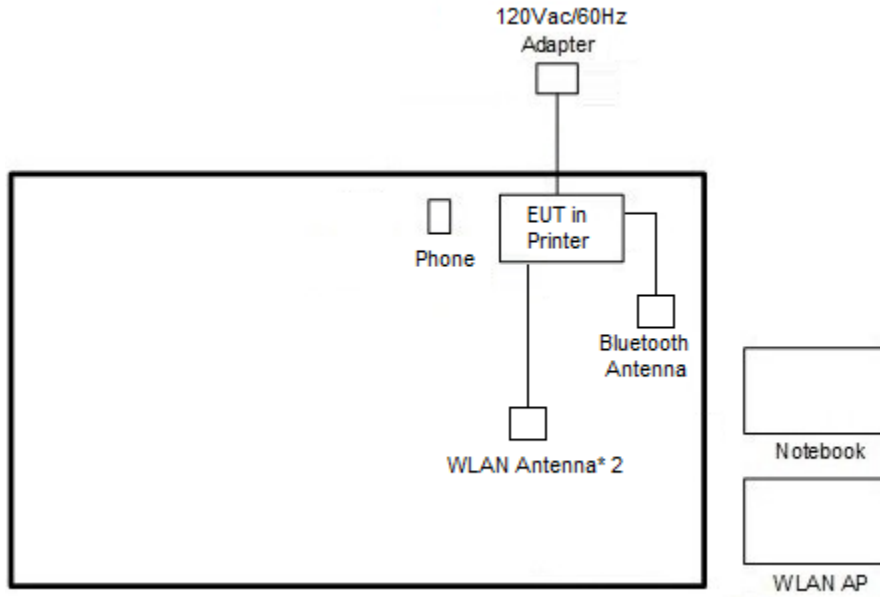

<Bluetooth Tx Mode>

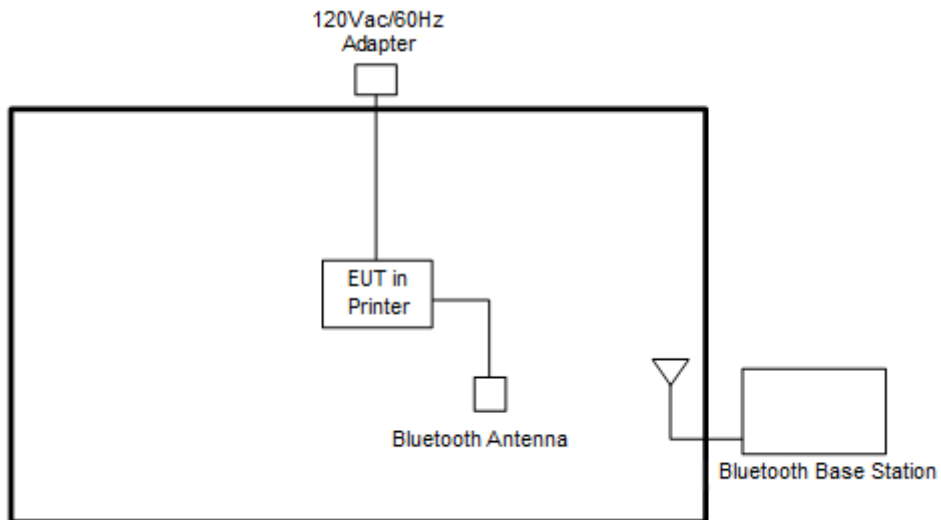



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Phone	SUGAR	Y12s	FCC DoC	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m

2.5 EUT Operation Test Setup

The RF test items, utility “Toolbox_Version 1.84” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to contact with base station to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300 kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

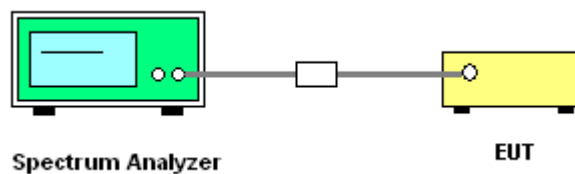




3.1.5 Test Result of Number of Hopping Frequency

Test Engineer :	Rebecca Li, Hank Hsu and Tommy Lee	Temperature :	21~25°C
		Relative Humidity :	51~54%

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

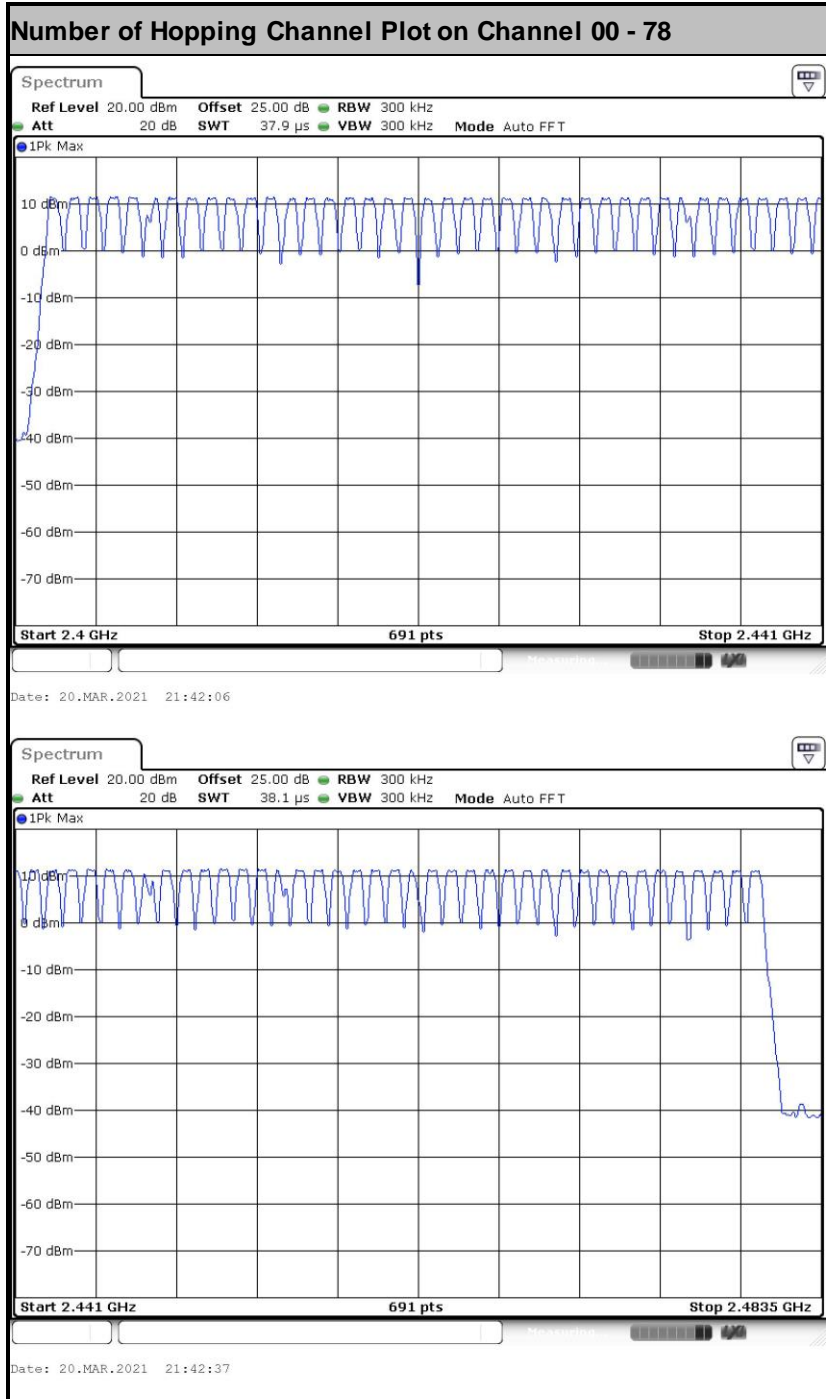

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300 kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

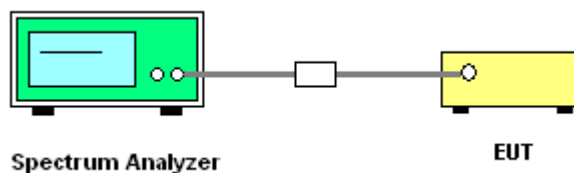




3.2.5 Test Result of Hopping Channel Separation

Test Engineer :	Rebecca Li, Hank Hsu and Tommy Lee	Temperature :	21~25°C
		Relative Humidity :	51~54%

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.672	0.6227	Pass
DH	1Mbps	1	39	2441	0.998	0.6247	Pass
DH	1Mbps	1	78	2480	0.998	0.6213	Pass
2DH	2Mbps	1	0	2402	0.998	0.8273	Pass
2DH	2Mbps	1	39	2441	1.263	0.8273	Pass
2DH	2Mbps	1	78	2480	1.107	0.8620	Pass
3DH	3Mbps	1	0	2402	1.150	0.8393	Pass
3DH	3Mbps	1	39	2441	0.998	0.8393	Pass
3DH	3Mbps	1	78	2480	0.994	0.8420	Pass




<1Mbps>

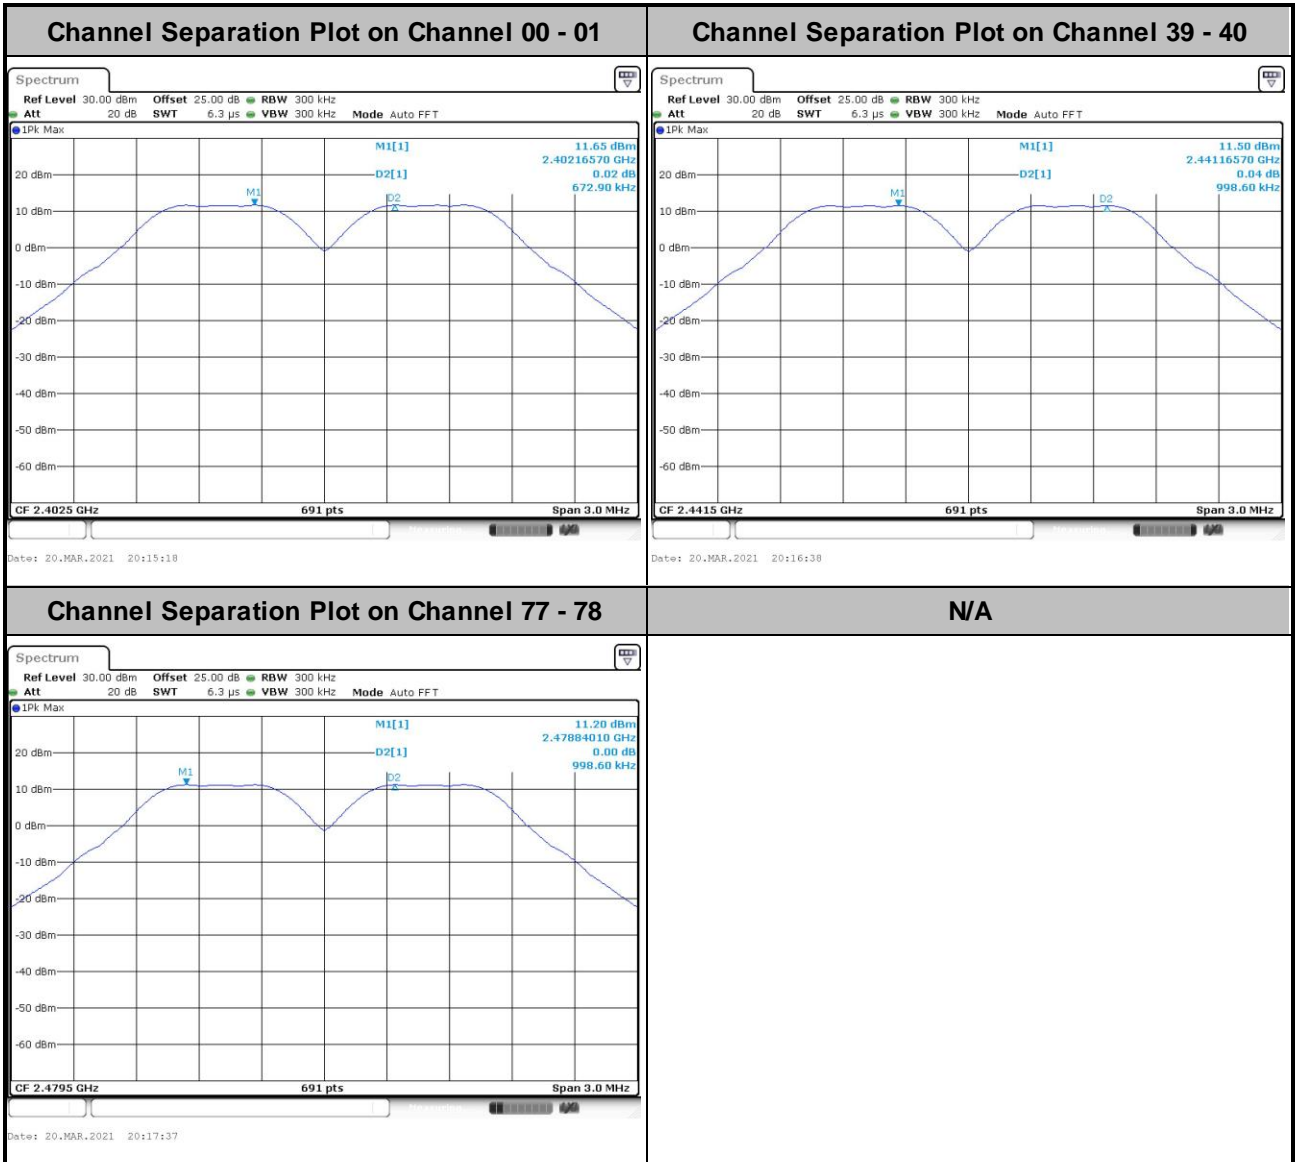




<2Mbps>

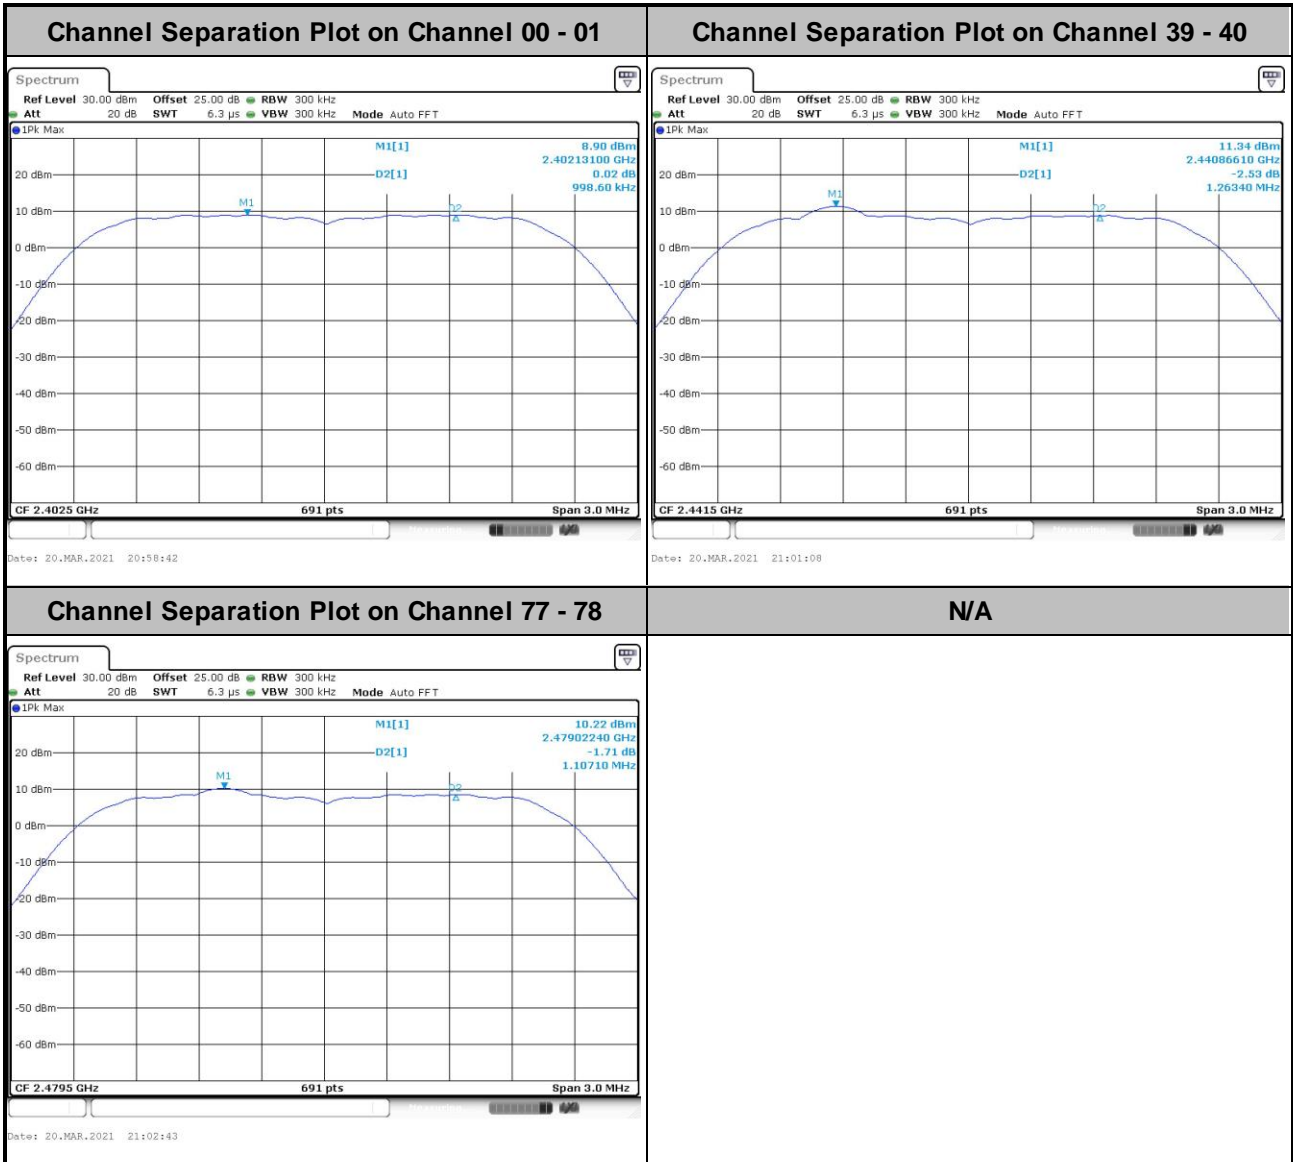



<3Mbps>

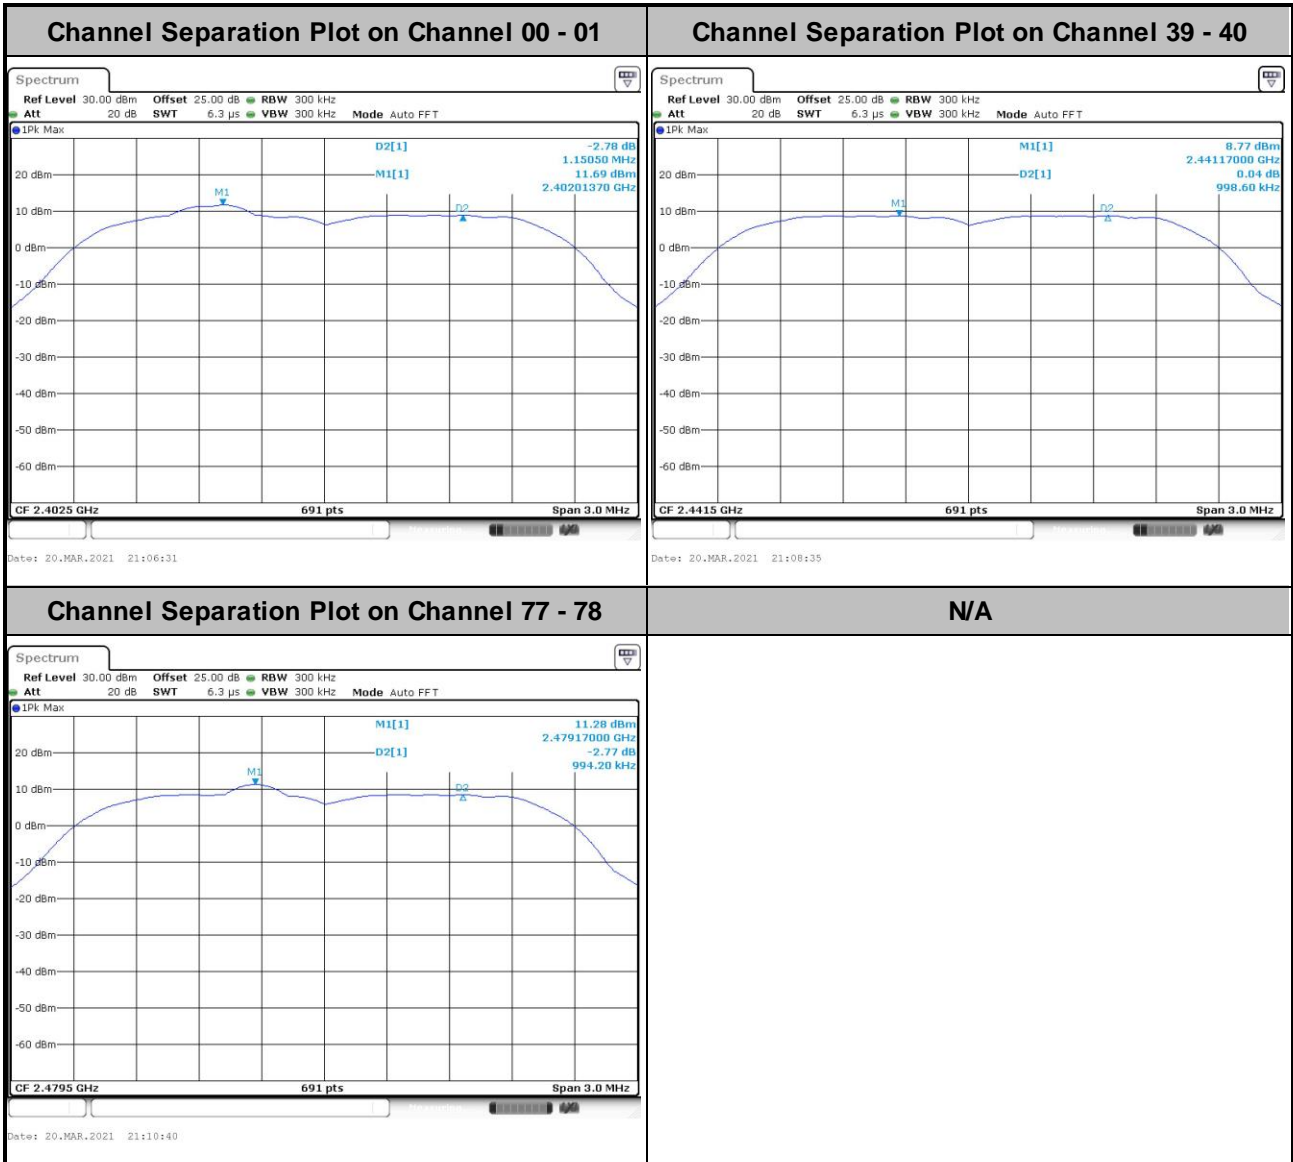

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

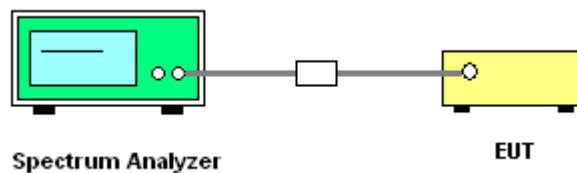




3.3.5 Test Result of Dwell Time

Test Engineer :	Rebecca Li, Hank Hsu and Tommy Lee	Temperature :	21~25°C
		Relative Humidity :	51~54%

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.88	0.31	0.4	Pass
AFH	20	53.33	2.88	0.15	0.4	Pass

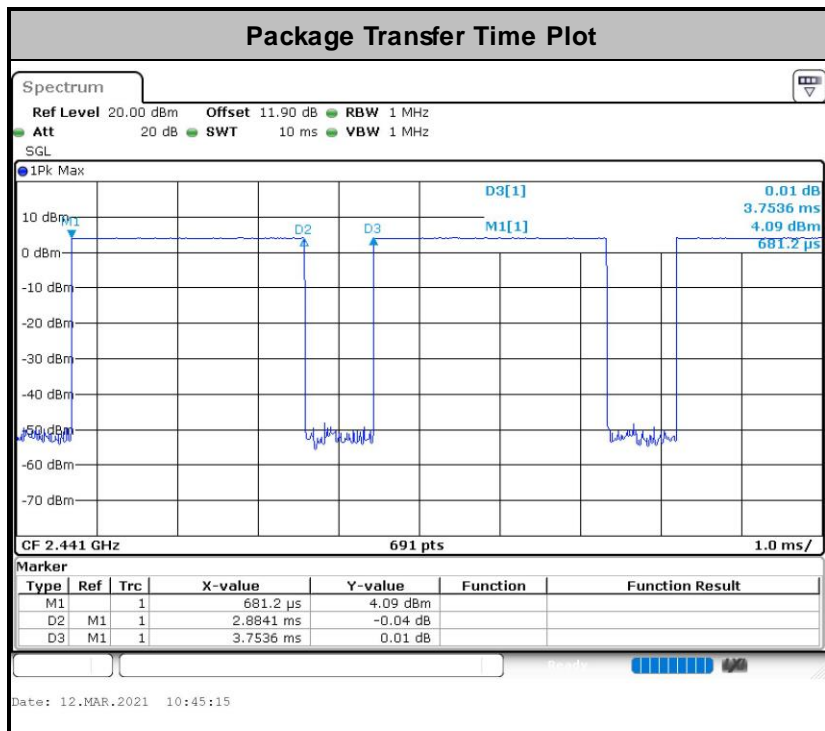

Remark:

- In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels. With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s), Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
- In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels. With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s), Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Use the following spectrum analyzer settings for 20 dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW \geq 1-5% of the 99% bandwidth; VBW \geq 3 * RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

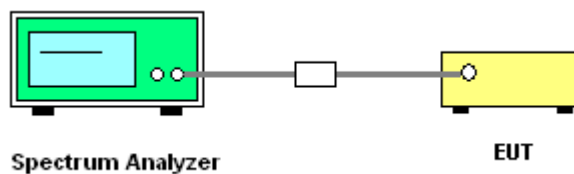


**3.4.5 Test Result of 20dB Bandwidth**

Test Engineer :	Rebecca Li, Hank Hsu and Tommy Lee	Temperature :	21~25°C			
		Relative Humidity :	51~54%			
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	20db BW (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.934	Pass
DH	1Mbps	1	39	2441	0.937	Pass
DH	1Mbps	1	78	2480	0.932	Pass
2DH	2Mbps	1	0	2402	1.241	Pass
2DH	2Mbps	1	39	2441	1.241	Pass
2DH	2Mbps	1	78	2480	1.293	Pass
3DH	3Mbps	1	0	2402	1.259	Pass
3DH	3Mbps	1	39	2441	1.259	Pass
3DH	3Mbps	1	78	2480	1.263	Pass




<1Mbps>

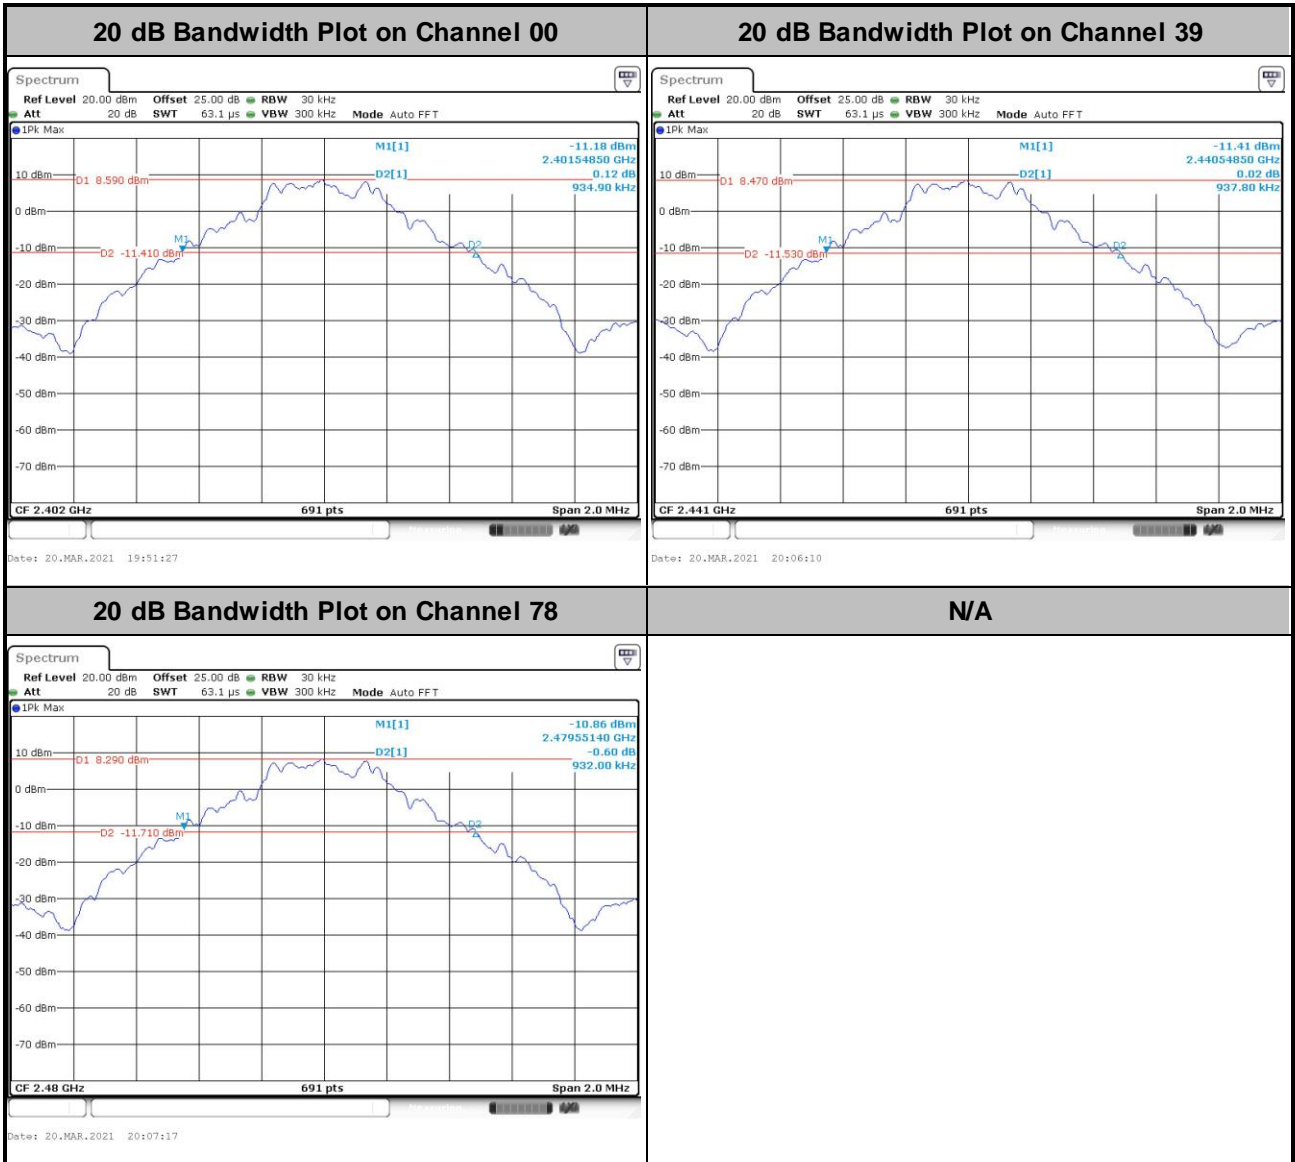




<2Mbps>

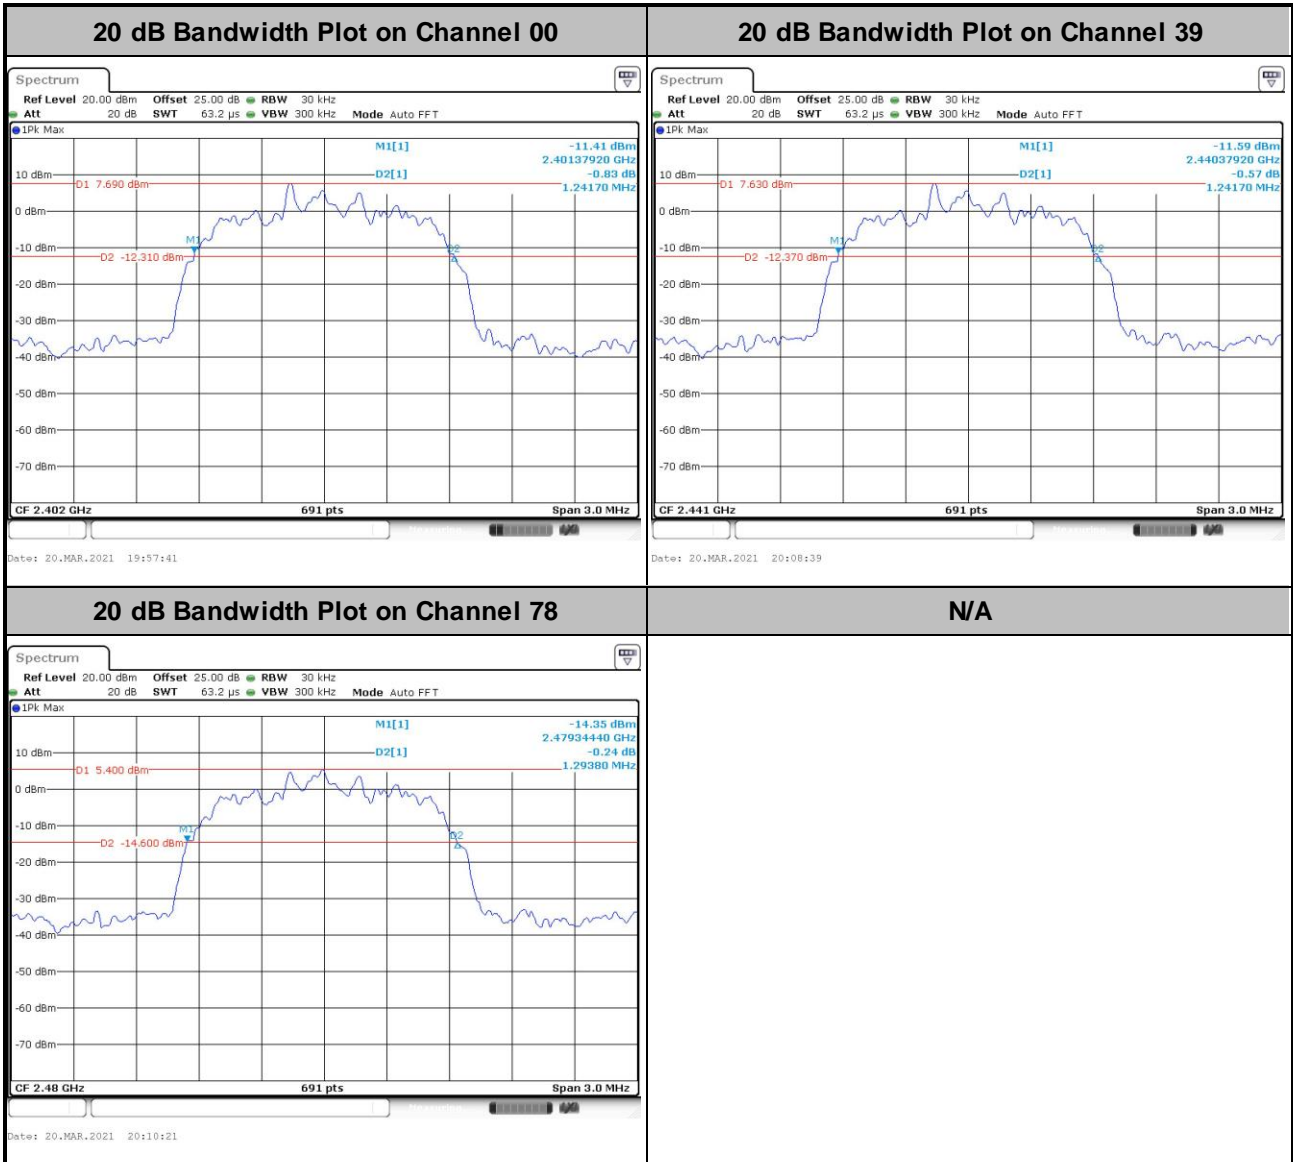



<3Mbps>

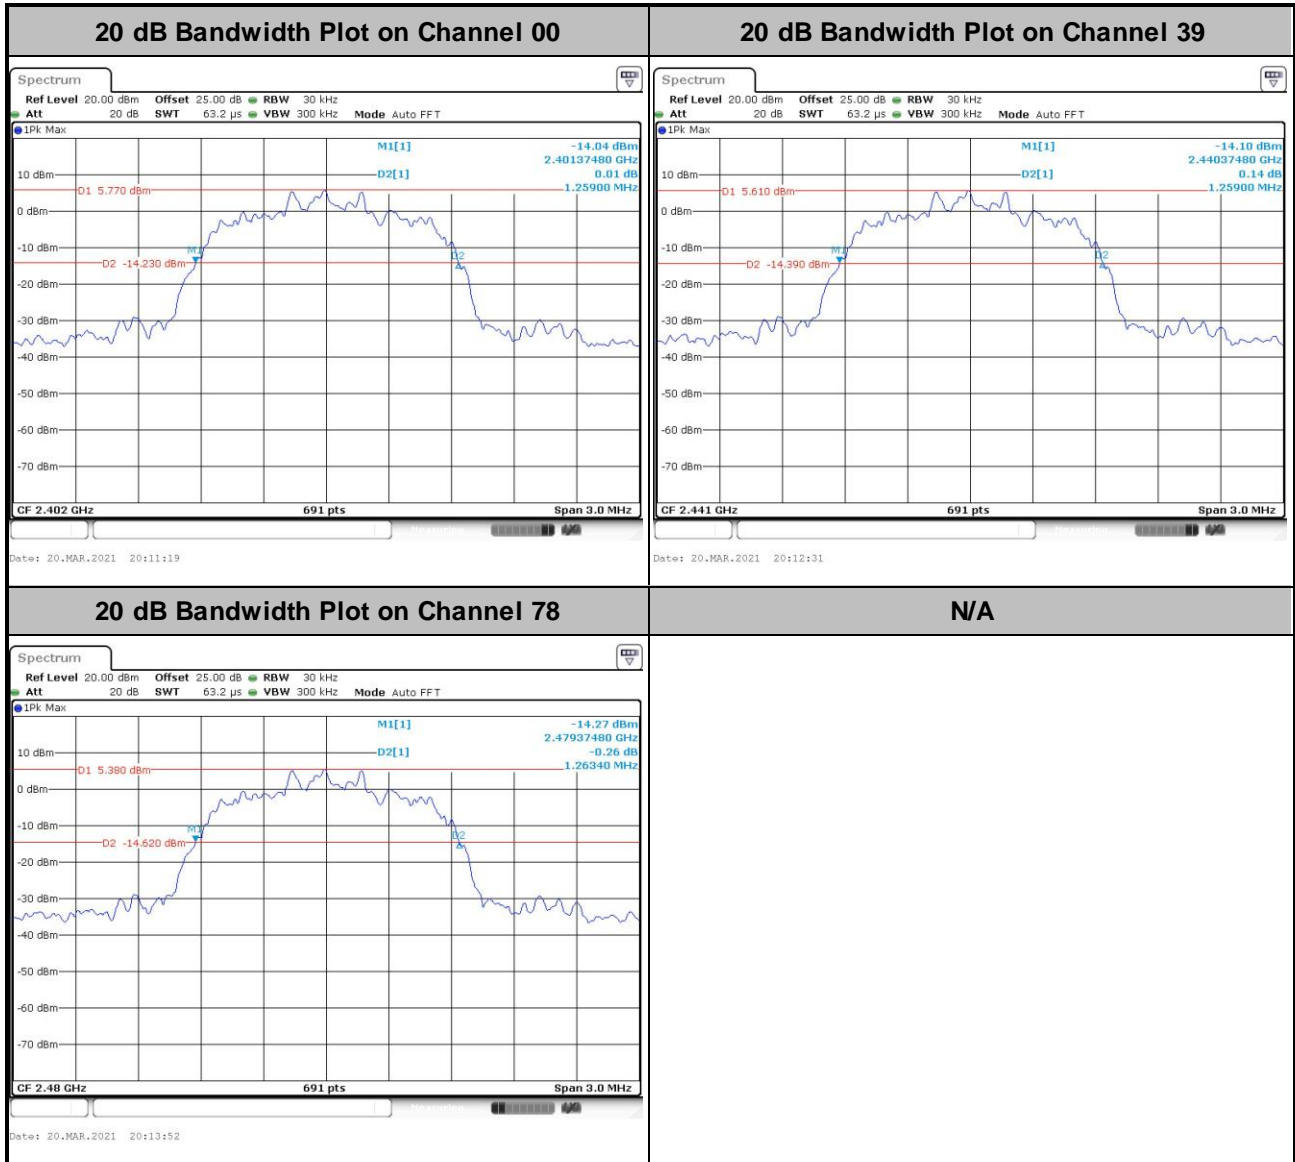




3.4.6 Test Result of 99% Occupied Bandwidth

Test Engineer :	Rebecca Li, Hank Hsu and Tommy Lee	Temperature :	21~25°C
		Relative Humidity :	51~54%

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.833	Pass
DH	1Mbps	1	39	2441	0.856	Pass
DH	1Mbps	1	78	2480	0.856	Pass
2DH	2Mbps	1	0	2402	1.157	Pass
2DH	2Mbps	1	39	2441	1.163	Pass
2DH	2Mbps	1	78	2480	1.163	Pass
3DH	3Mbps	1	0	2402	1.151	Pass
3DH	3Mbps	1	39	2441	1.154	Pass
3DH	3Mbps	1	78	2480	1.160	Pass




<1Mbps>

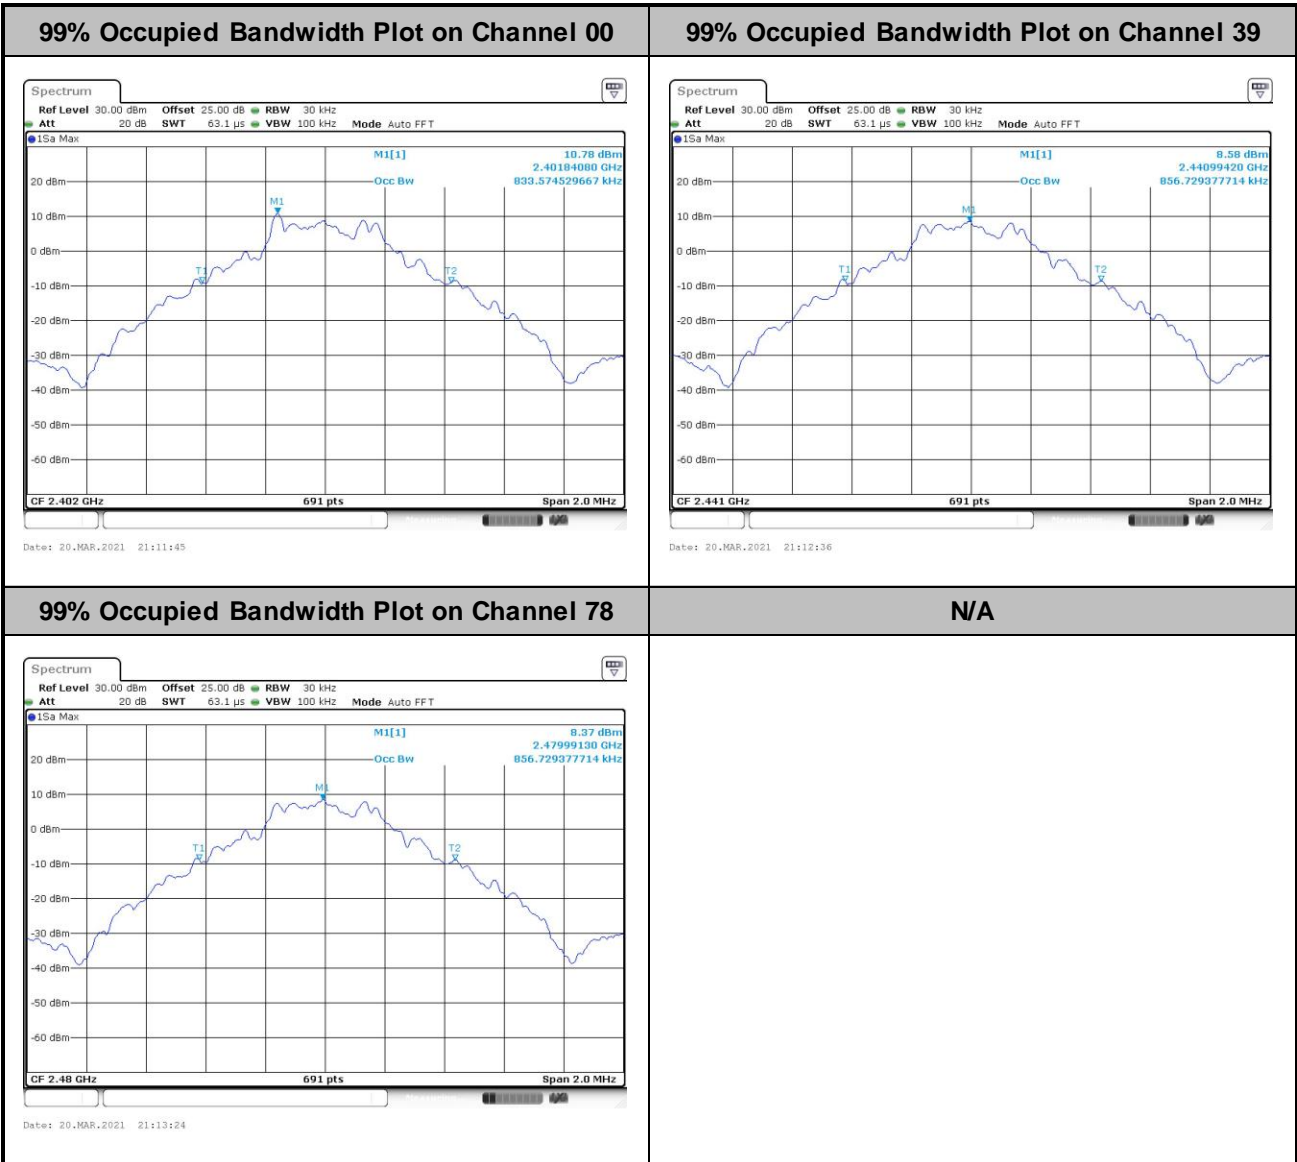

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<2Mbps>

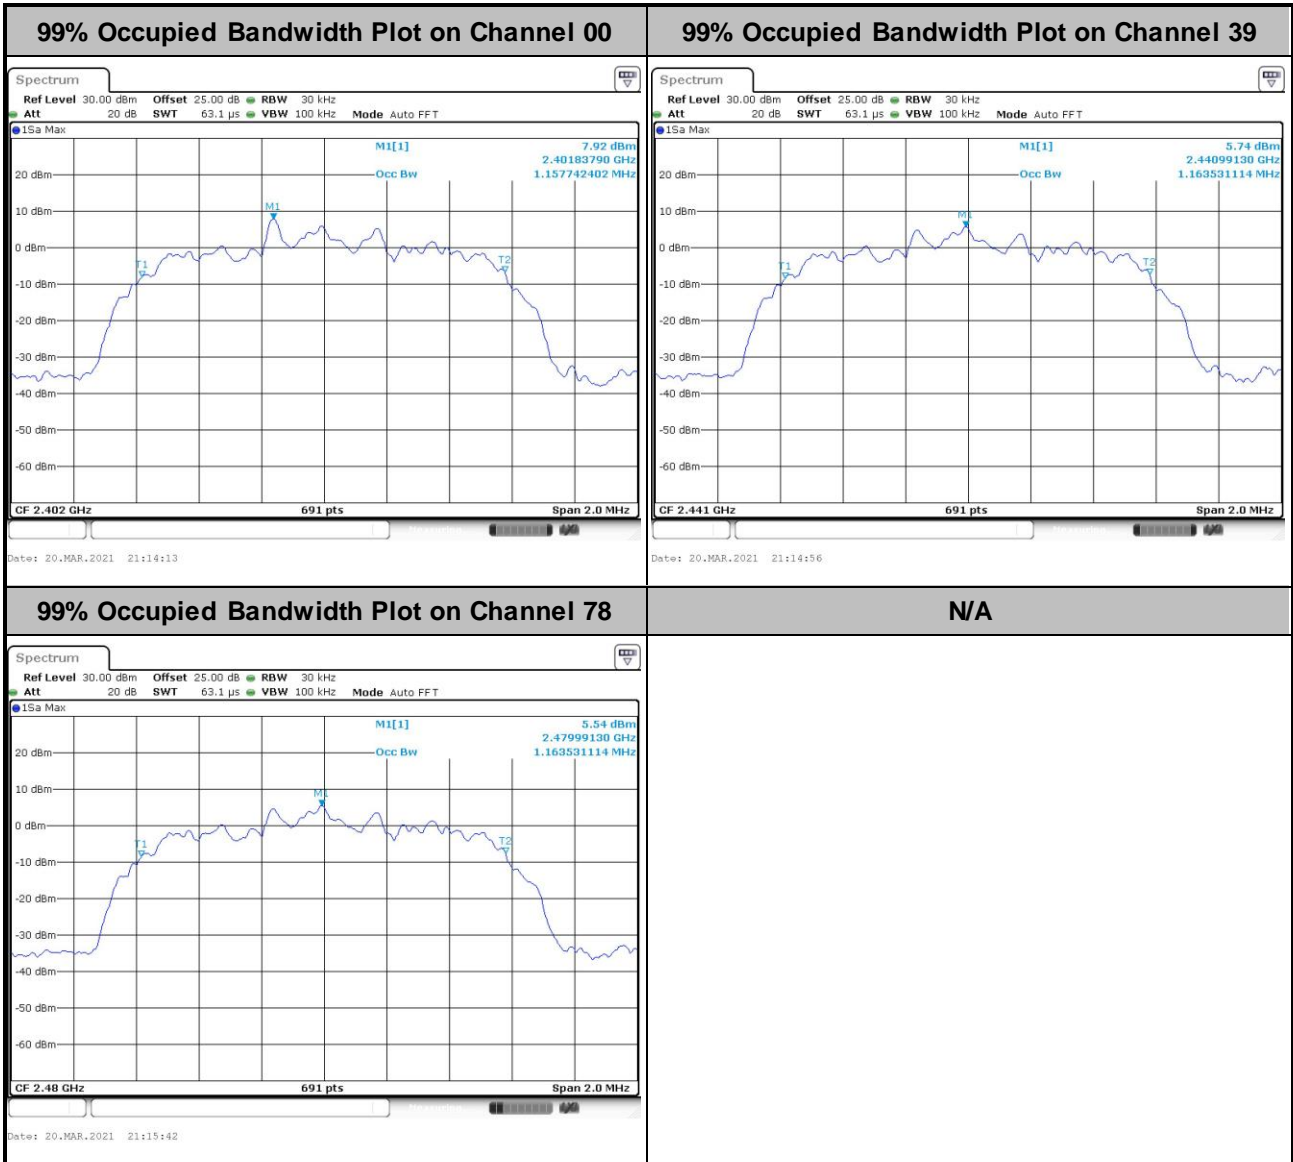

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<3Mbps>

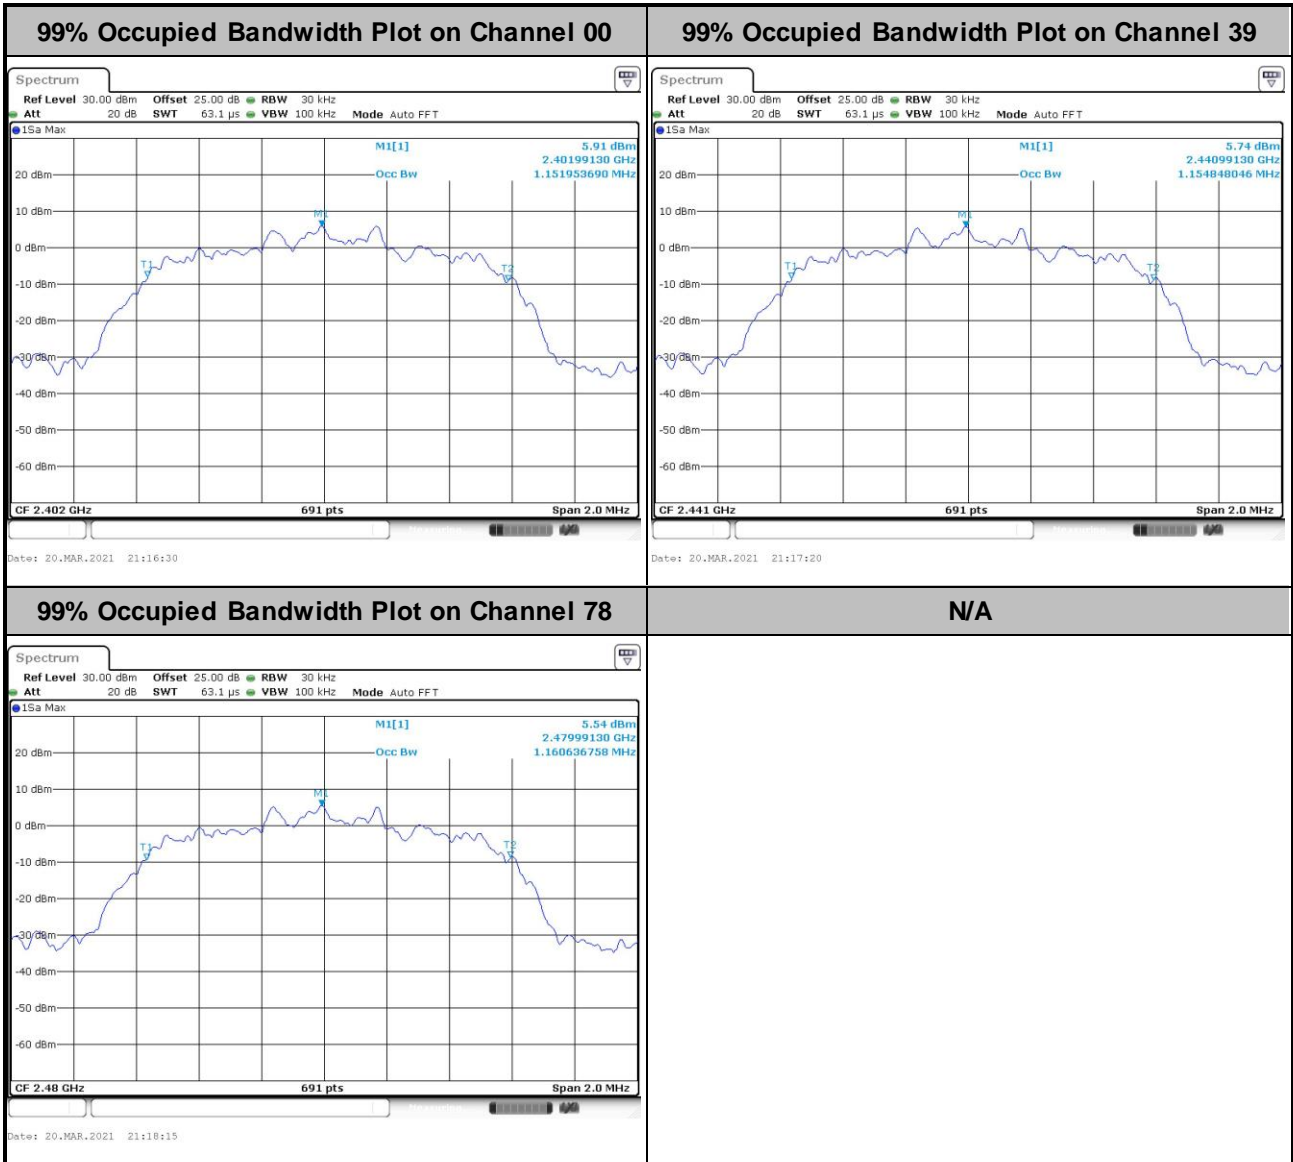

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:
For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.


3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

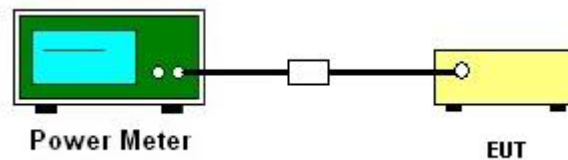



3.5.5 Test Result of Peak Output Power

Test Engineer :	Rebecca Li, Hank Hsu and Tommy Lee	Temperature :	21~25°C
		Relative Humidity :	51~54%

DH	CH.	N _{TX}	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	11.72	20.97	Pass
	39	1	11.67	20.97	Pass
	78	1	11.51	20.97	Pass

2DH	CH.	N _{TX}	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	11.05	20.97	Pass
	39	1	10.99	20.97	Pass
	78	1	10.77	20.97	Pass

3DH	CH.	N _{TX}	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	11.32	20.97	Pass
	39	1	11.22	20.97	Pass
	78	1	11.08	20.97	Pass

3.5.6 Test Result of Average Output Power (Reporting Only)

Test Engineer :	Rebecca Li, Hank Hsu and Tommy Lee	Temperature :	21~25°C
		Relative Humidity :	51~54%

DH	CH.	N _{TX}	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	11.66	5.15
	39	1	11.65	5.15
	78	1	11.56	5.15

2DH	CH.	N _{TX}	Average Power (dBm)	Duty Factor (dB)
2DH1	0	1	8.81	5.15
	39	1	8.76	5.15
	78	1	8.59	5.15

3DH	CH.	N _{TX}	Average Power (dBm)	Duty Factor (dB)
3DH1	0	1	8.83	5.13
	39	1	8.77	5.13
	78	1	8.63	5.13

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set the maximum power setting and enable the EUT to transmit continuously.
3. Set RBW = 100 kHz, VBW = 300 kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2 and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

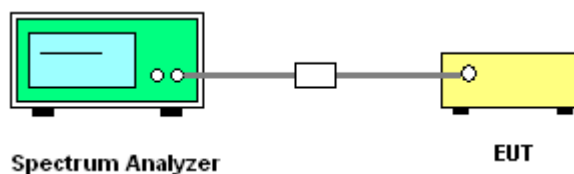





3.6.5 Test Result of Conducted Band Edges

Test Engineer :	Rebecca Li, Hank Hsu and Tommy Lee	Temperature :	21~25°C
		Relative Humidity :	51~54%

<1Mbps>

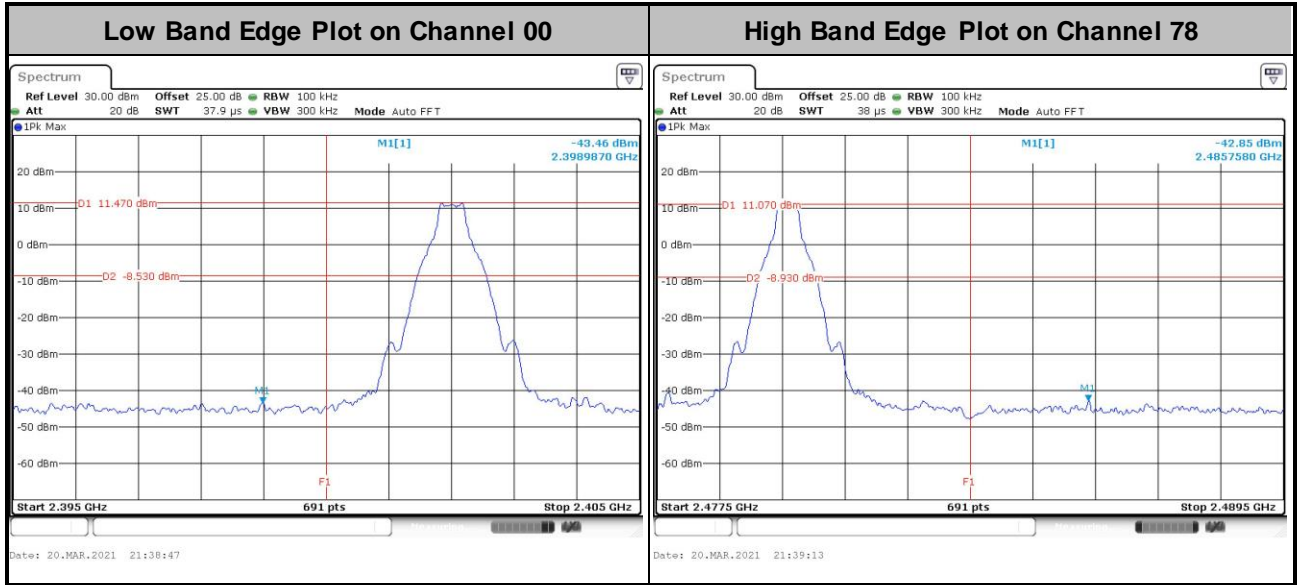


<2Mbps>

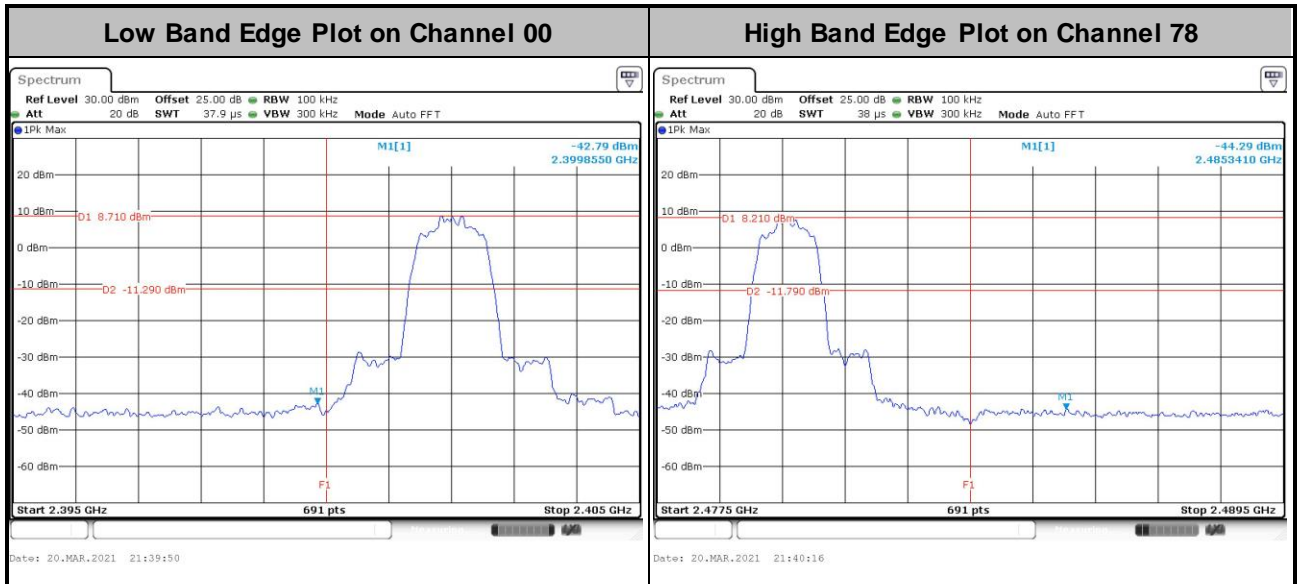



<3Mbps>

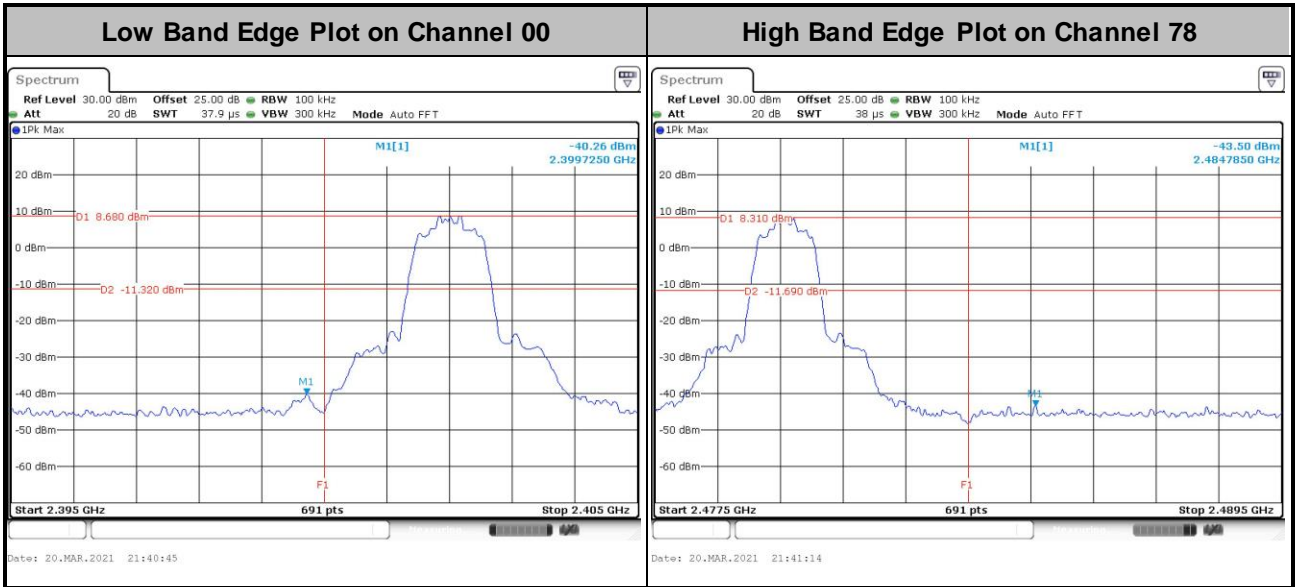





3.6.6 Test Result of Conducted Hopping Mode Band Edges

Test Engineer :	Rebecca Li, Hank Hsu and Tommy Lee	Temperature :	21~25°C
		Relative Humidity :	51~54%

<1Mbps>

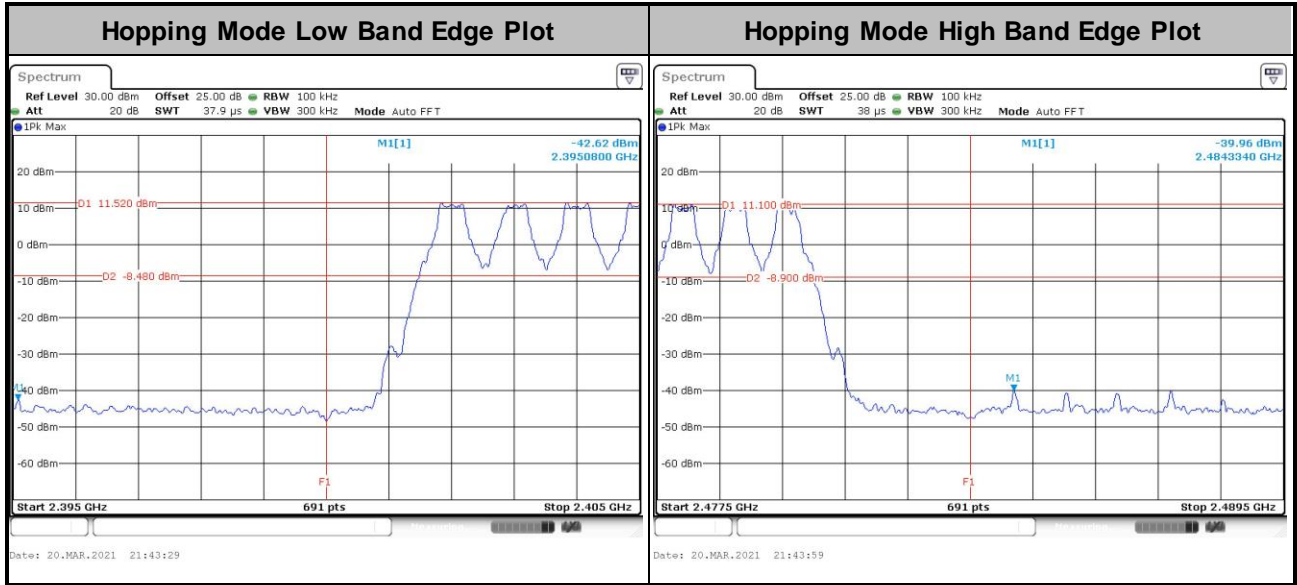


<2Mbps>

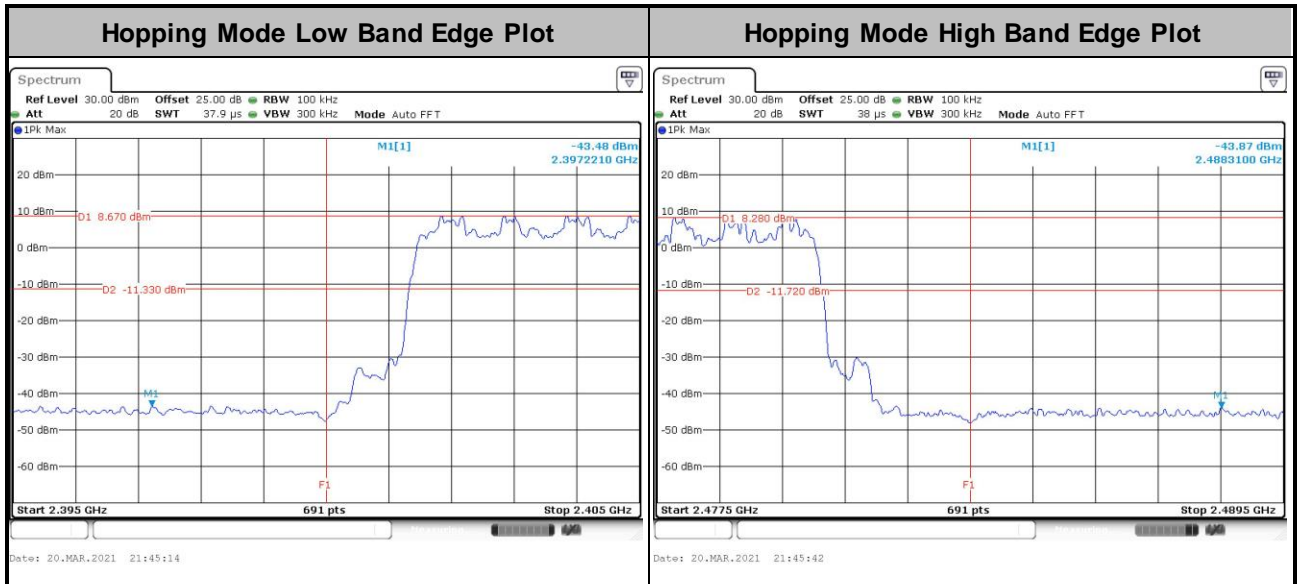



<3Mbps>

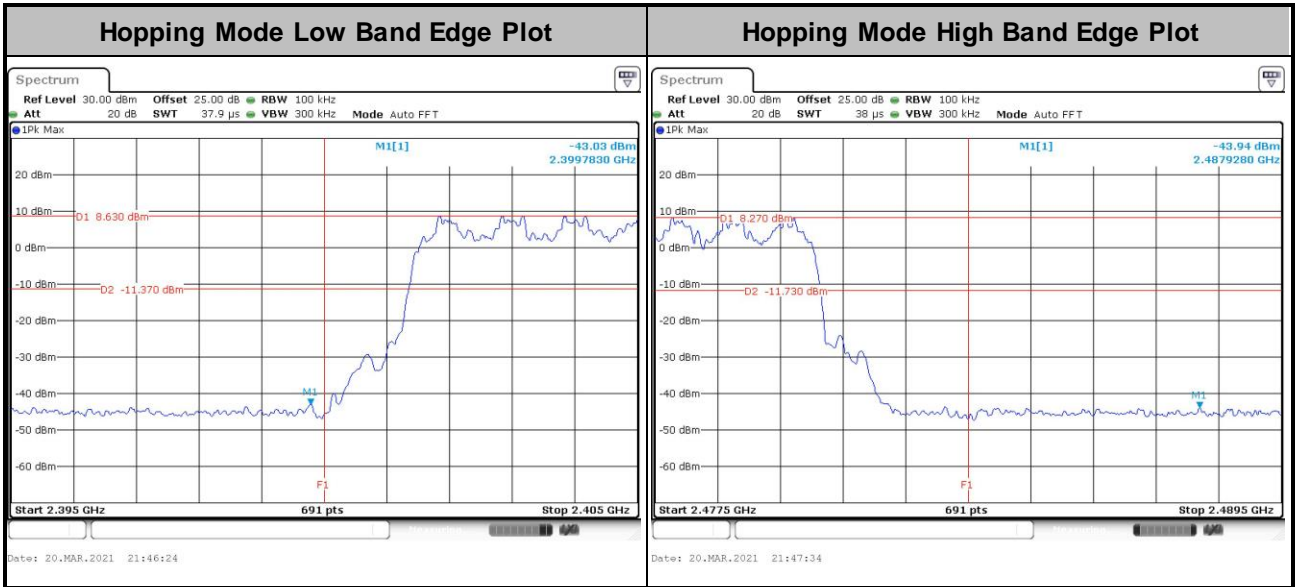

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, scan up through 10th harmonic. All harmonics / spurious must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

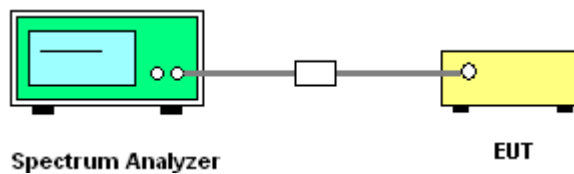





3.7.5 Test Result of Conducted Spurious Emission

Test Engineer :	Rebecca Li, Hank Hsu and Tommy Lee	Temperature :	21~25°C
		Relative Humidity :	51~54%


<1Mbps>

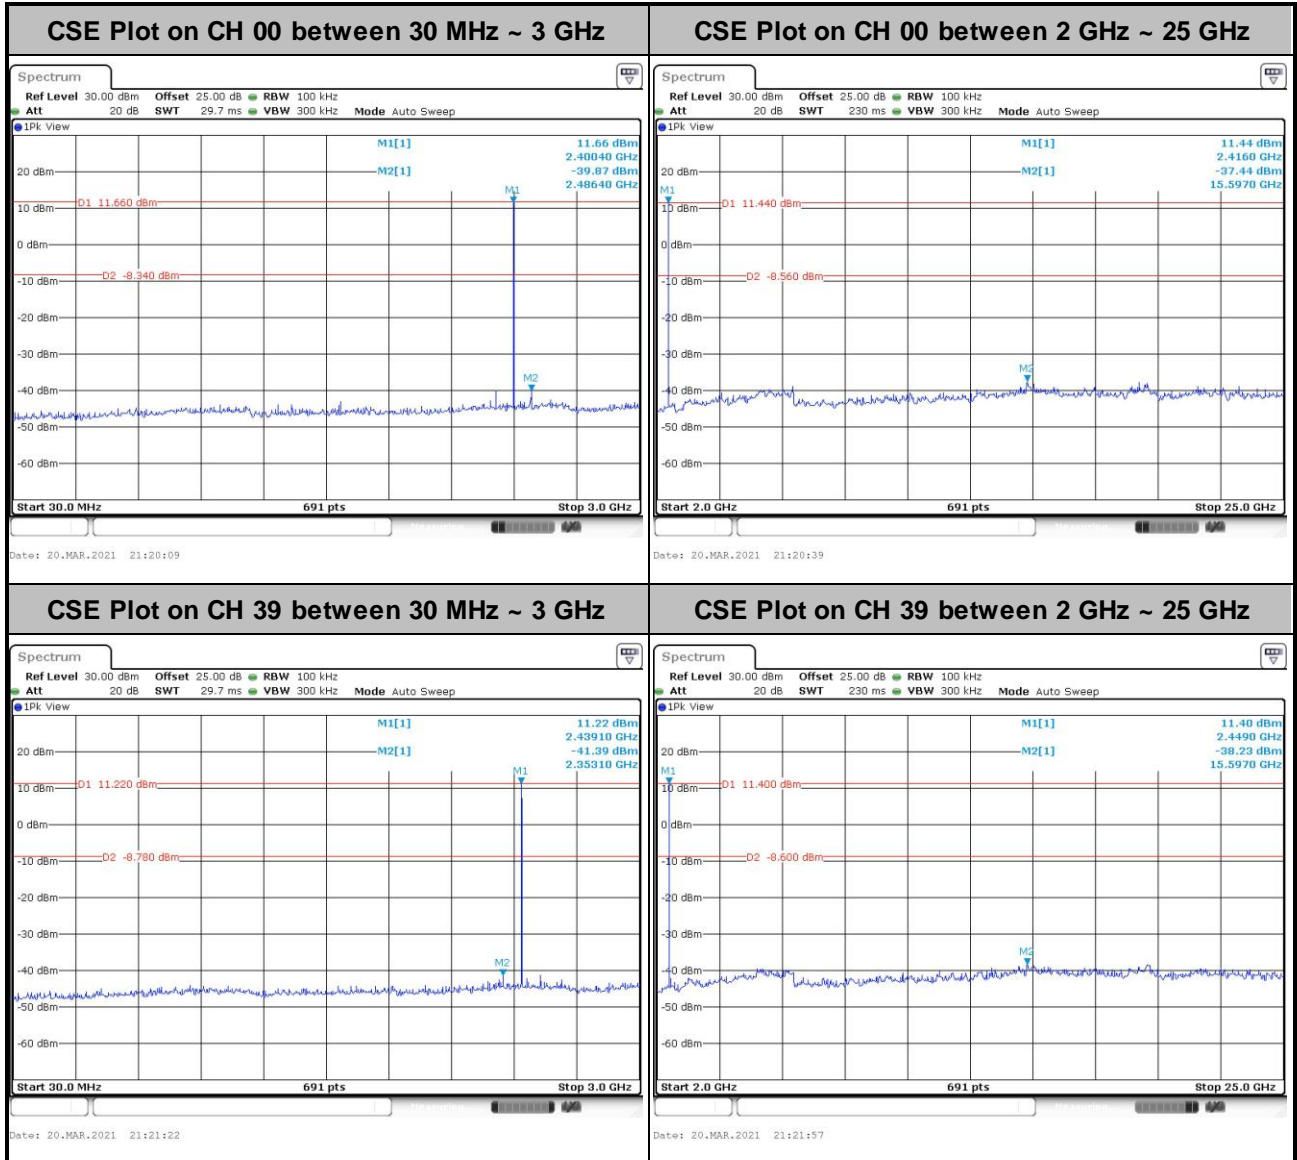


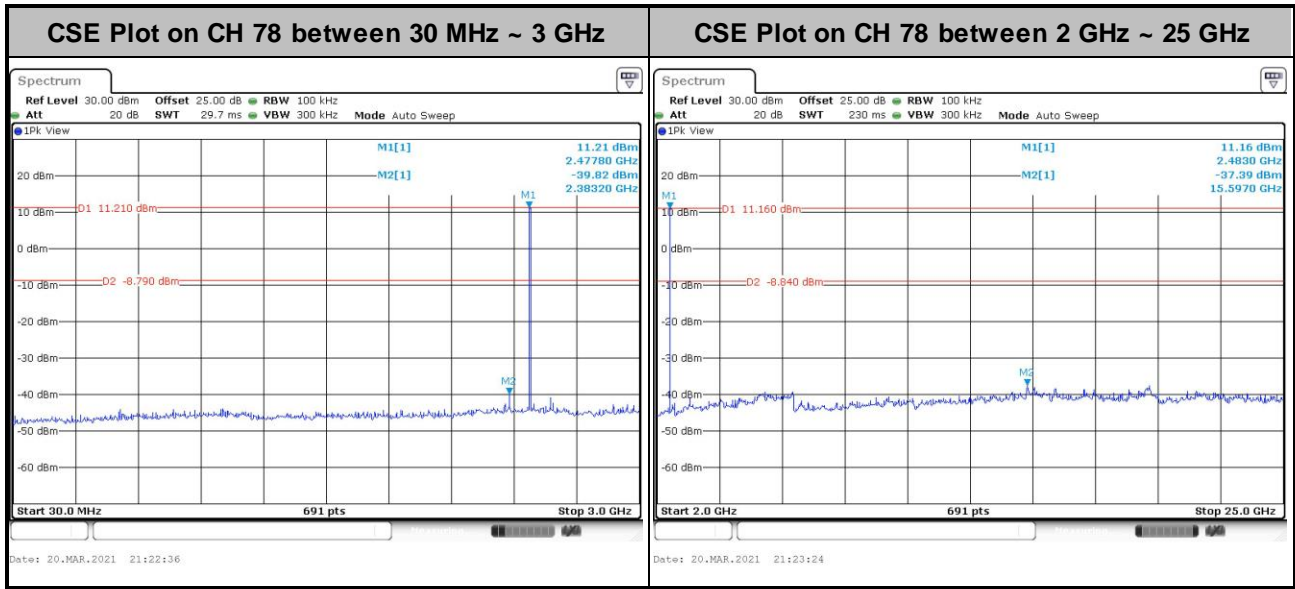




<2Mbps>

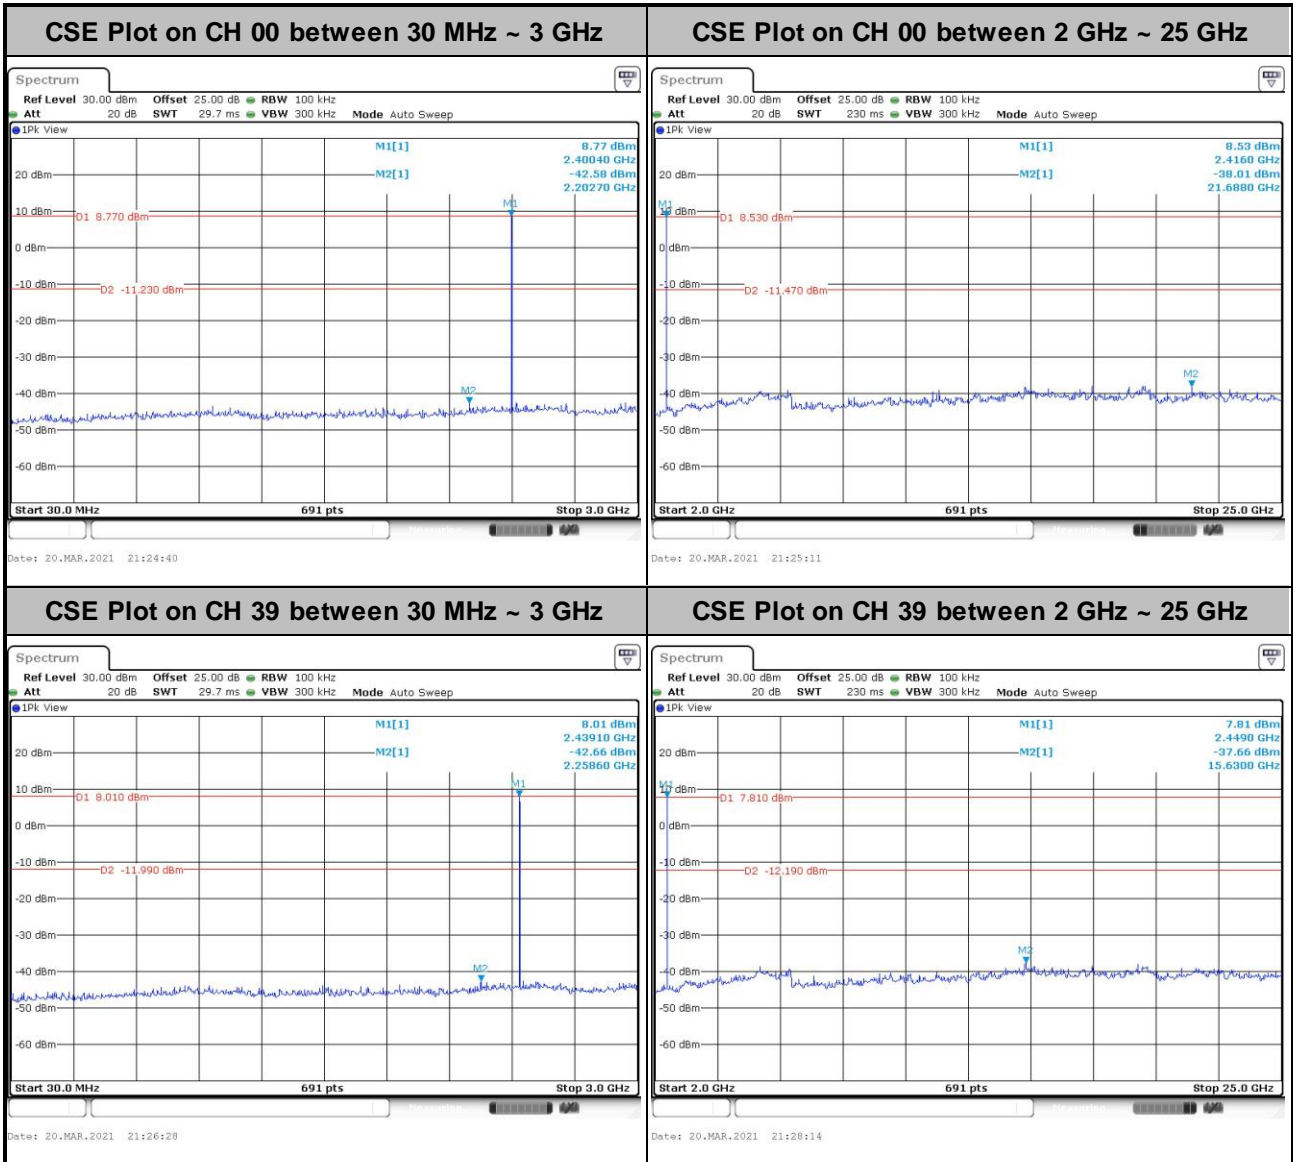


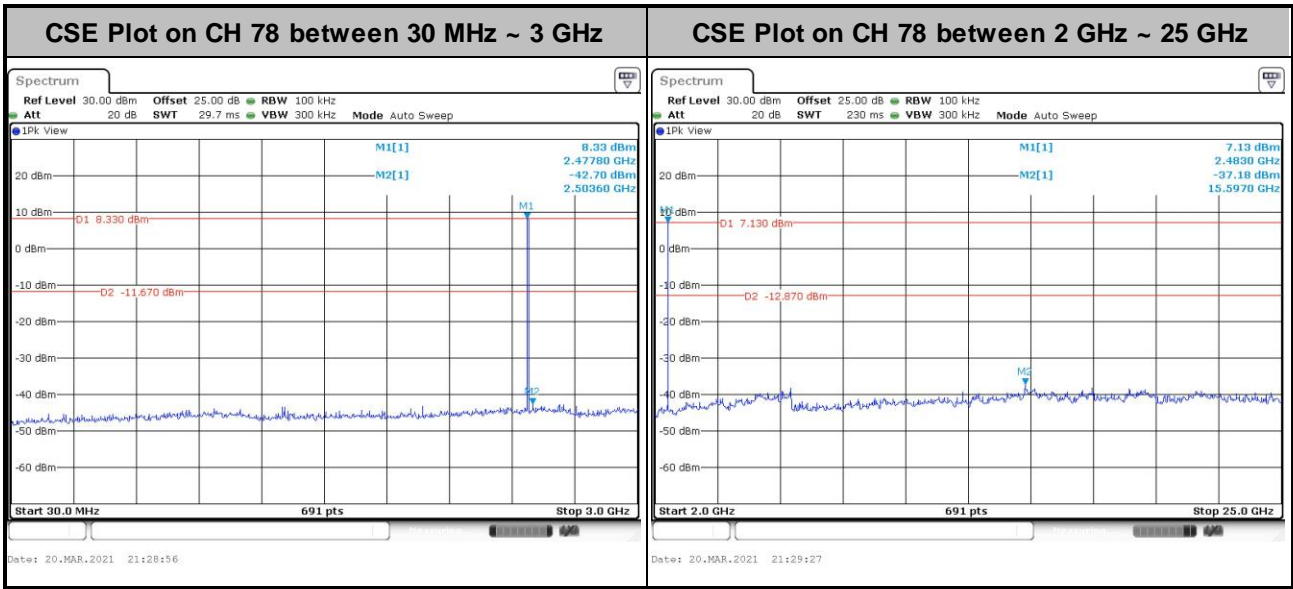



<3Mbps>

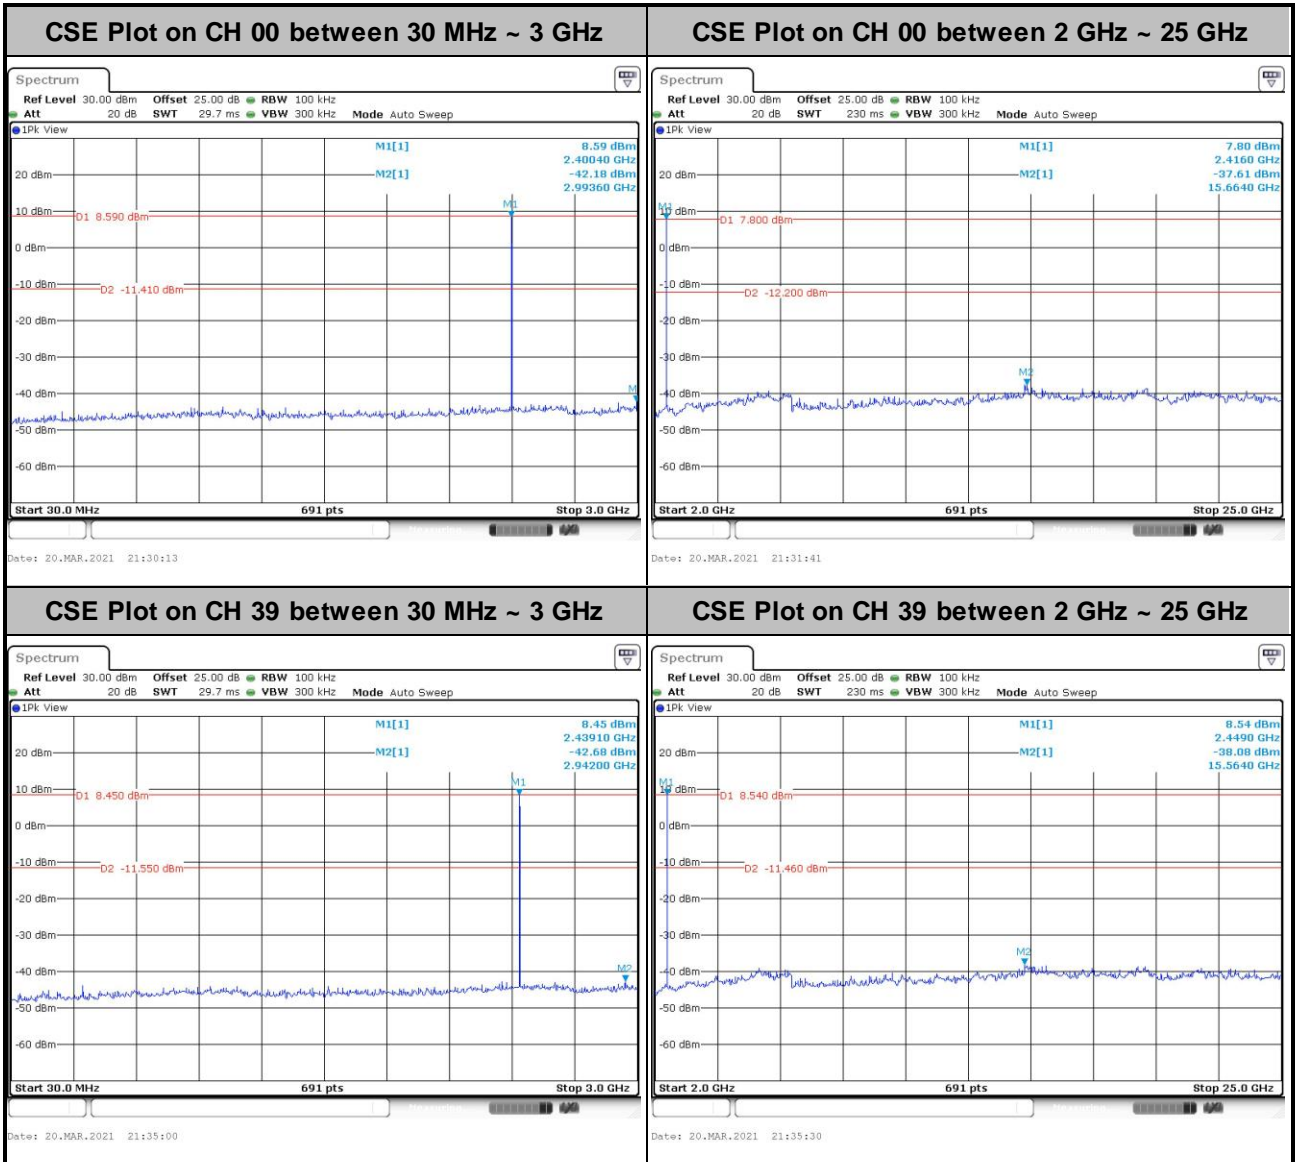

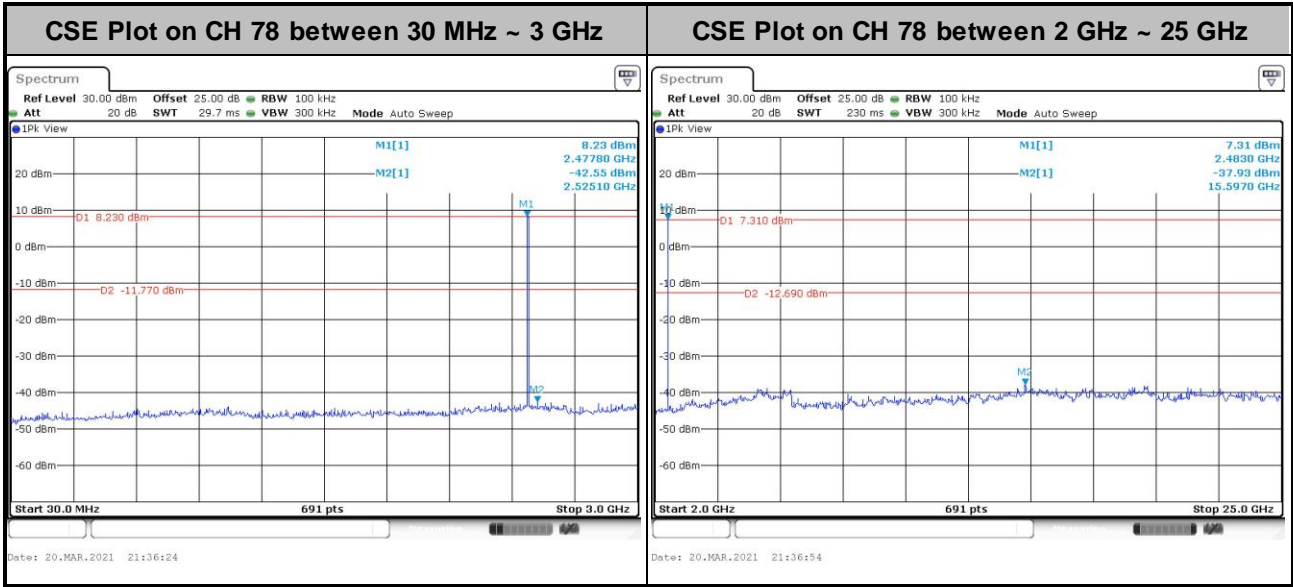



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics / spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

See list of measuring equipment of this test report.




3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz, RBW = 1 MHz for $f > 1$ GHz ; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1 GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated test below 30MHz

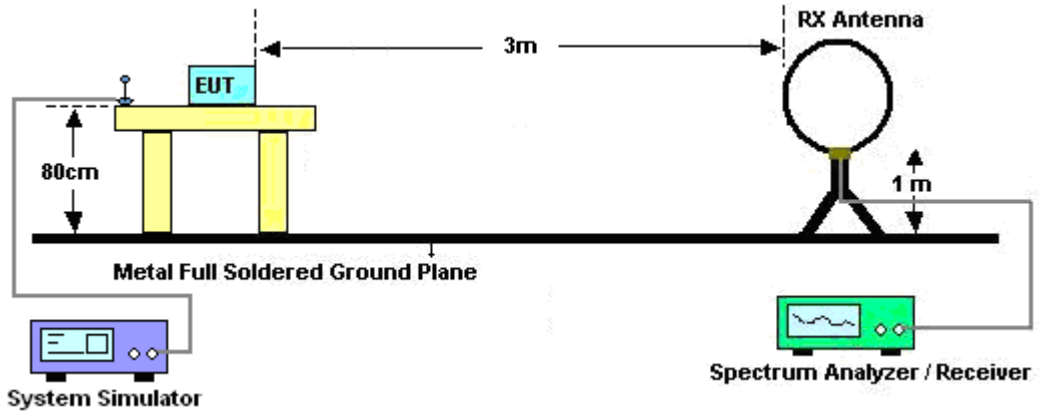

For radiated test from 30MHz to 1GHz

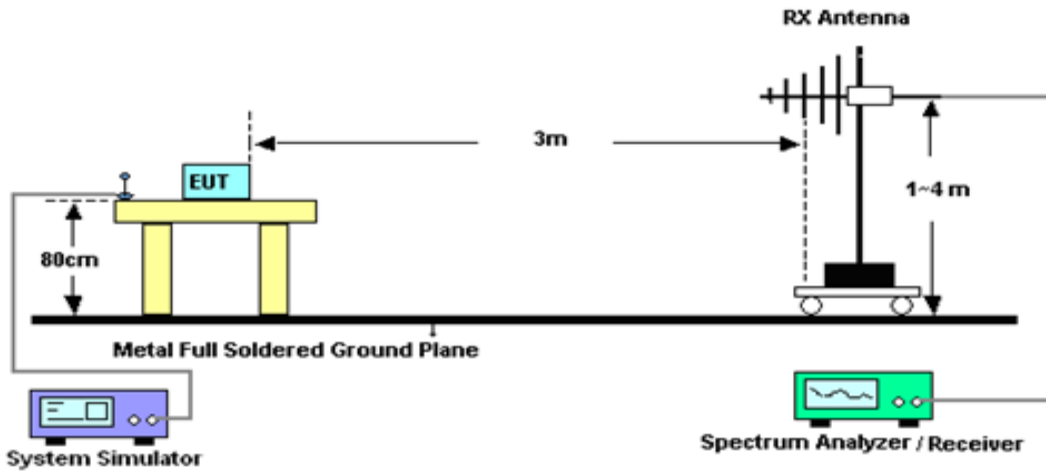

For radiated test above 1GHz

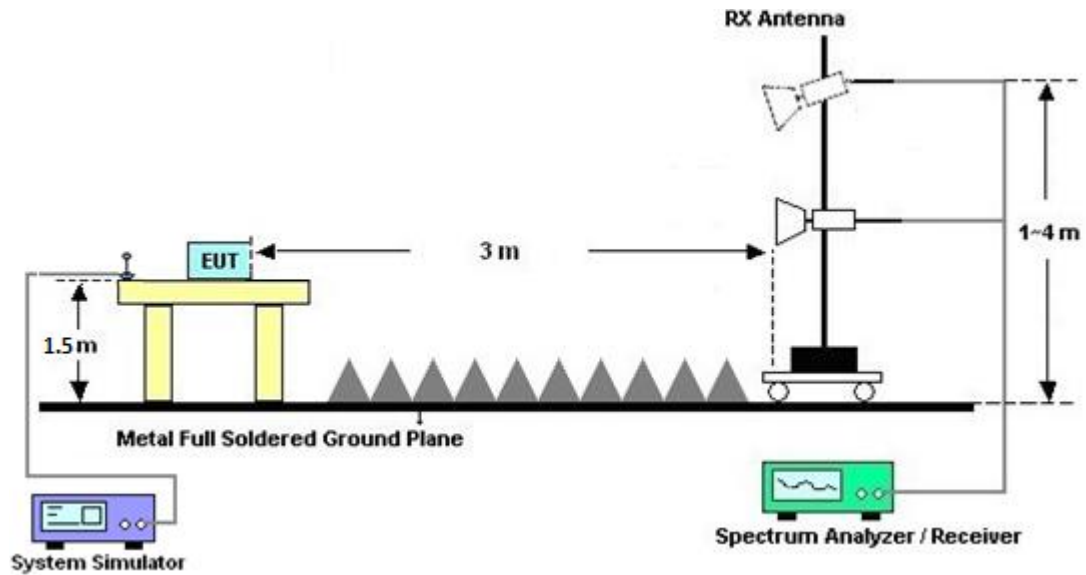

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.8.7 Duty Cycle

Please refer to Appendix D.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

See list of measuring equipment of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

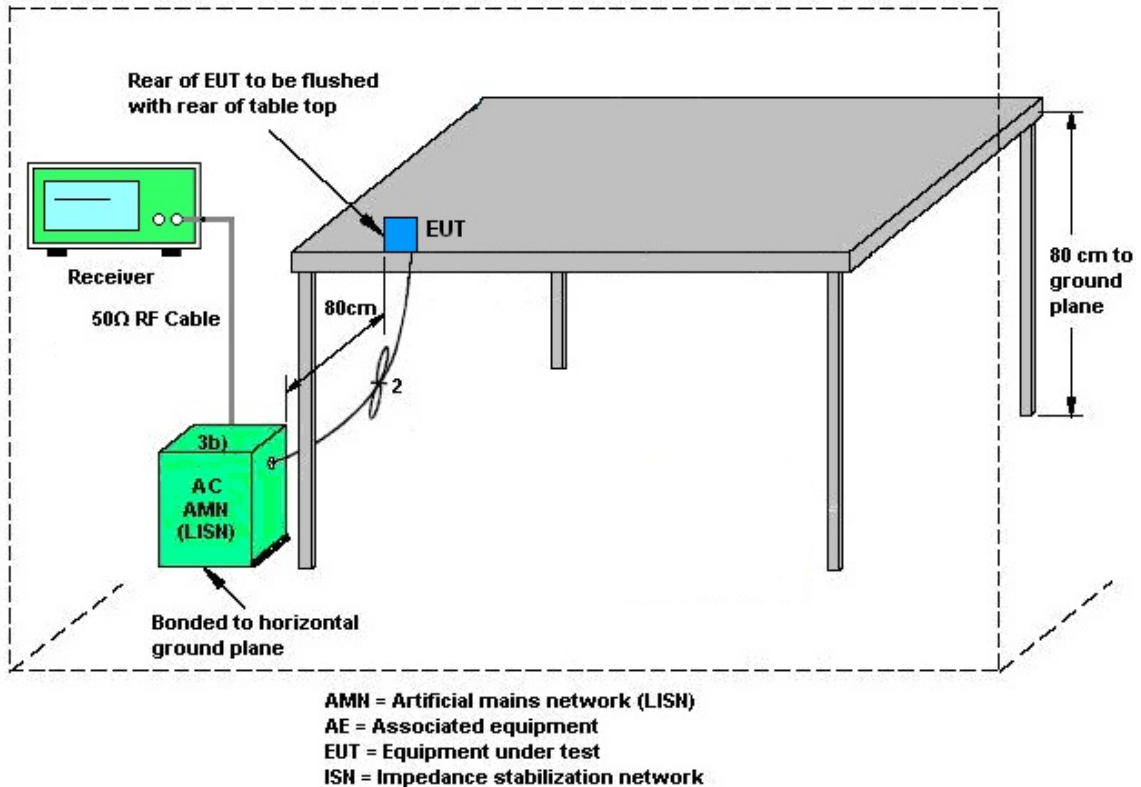

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jul. 14, 2020	Mar. 24, 2021~ Apr. 14, 2021	Jul. 13, 2021	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	40103 & 07	30MHz~1GHz	Apr. 29, 2020	Mar. 24, 2021~ Apr. 14, 2021	Apr. 28, 2021	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-124 1	1GHz~18GHz	Jul. 15, 2020	Mar. 24, 2021~ Apr. 14, 2021	Jul. 14, 2021	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 576	18GHz~40GHz	May 22, 2020	Mar. 24, 2021~ Apr. 14, 2021	May 21, 2021	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 19, 2020	Mar. 24, 2021~ Apr. 14, 2021	May 18, 2021	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY532701 47	1GHz~26.5GHz	Oct. 28, 2020	Mar. 24, 2021~ Apr. 14, 2021	Oct. 27, 2021	Radiation (03CH13-HY)
Preamplifier	EMEC	EM18G40G	0600789	18GHz~40GHz	Jul. 31, 2020	Mar. 24, 2021~ Apr. 14, 2021	Jul. 30, 2021	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010B	MY602405 20	10Hz~44GHz	Dec. 02, 2020	Mar. 24, 2021~ Apr. 14, 2021	Dec. 01, 2021	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz~30MHz	Mar. 11, 2021	Mar. 24, 2021~ Apr. 14, 2021	Mar. 10, 2022	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz~40GHz	Mar. 11, 2021	Mar. 24, 2021~ Apr. 14, 2021	Mar. 10, 2022	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30MHz~18GHz	Feb. 10, 2021	Mar. 24, 2021~ Apr. 14, 2021	Feb. 09, 2022	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30MHz~18GHz	Feb. 10, 2021	Mar. 24, 2021~ Apr. 14, 2021	Feb. 09, 2022	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/ 4	30MHz~18GHz	Feb. 10, 2021	Mar. 24, 2021~ Apr. 14, 2021	Feb. 09, 2022	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1m~4m	N/A	Mar. 24, 2021~ Apr. 14, 2021	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Mar. 24, 2021~ Apr. 14, 2021	N/A	Radiation (03CH13-HY)
Softw are	AUDIX	E3 6.2009-8-24c	RK-001124	N/A	N/A	Mar. 24, 2021~ Apr. 14, 2021	N/A	Radiation (03CH13-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY532900 45	20MHz~8.4GHz	Jan. 13, 2021	Mar. 24, 2021~ Apr. 14, 2021	Jan. 12, 2022	Radiation (03CH13-HY)
Filter	Wainw right	WHKX12-270 0-3000-18000 -60SS	SN2	3GHz High Pass Filter	Jul. 13, 2020	Mar. 24, 2021~ Apr. 14, 2021	Jul. 12, 2021	Radiation (03CH13-HY)
Filter	Wainw right	WHKX8-5872. 5-6750-18000 -40ST	SN5	6.75GHz High Pass Filter	Mar. 11, 2021	Mar. 24, 2021~ Apr. 14, 2021	Mar. 10, 2022	Radiation (03CH13-HY)
Amplifier	Sonoma-Instru ment	310 N	187282	9KHz~1GHz	Dec. 16, 2020	Mar. 24, 2021~ Apr. 14, 2021	Dec. 15, 2021	Radiation (03CH13-HY)
Filter	Wainw right	WLK4-1000-1 530-8000-40S S	SN12	1.53GHz Low Pass Filter	Sep. 15, 2020	Mar. 24, 2021~ Apr. 14, 2021	Sep. 14, 2021	Radiation (03CH13-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 02, 2021	Mar. 12, 2021~ Mar. 20, 2021	Mar. 01, 2022	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Aug. 12, 2020	Mar. 12, 2021~ Mar. 20, 2021	Aug. 11, 2021	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Aug. 12, 2020	Mar. 12, 2021~ Mar. 20, 2021	Aug. 11, 2021	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz ~ 40GHz	Jul. 22, 2020	Mar. 12, 2021~ Mar. 20, 2021	Jul. 21, 2021	Conducted (TH05-HY)
BT Base Station	Rohde & Schwarz	CBT	101135	BT 3.0	Sep. 15, 2020	Mar. 12, 2021~ Mar. 20, 2021	Sep. 14, 2022	Conducted (TH05-HY)
Switch Control Manframe	E-IUSTRUMENT	ETF-1405-0	EC1900157	N/A	Aug. 15, 2020	Mar. 12, 2021~ Mar. 20, 2021	Aug. 14, 2021	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Apr. 27, 2021	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 27, 2021	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	9561-FN00373	9kHz-200MHz	Nov. 02, 2020	Apr. 27, 2021	Nov. 01, 2021	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	N/A	Apr. 27, 2021	N/A	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Feb. 01, 2021	Apr. 27, 2021	Jan. 31, 2022	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 11, 2020	Apr. 27, 2021	Sep. 10, 2021	Conduction (CO07-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.2
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6
---	-----




Appendix A. AC Conducted Emission Test Results

Test Engineer :	Tom Lee	Temperature :	23~26°C
		Relative Humidity :	40~50%

EUT Information

Report NO : 0D2423
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

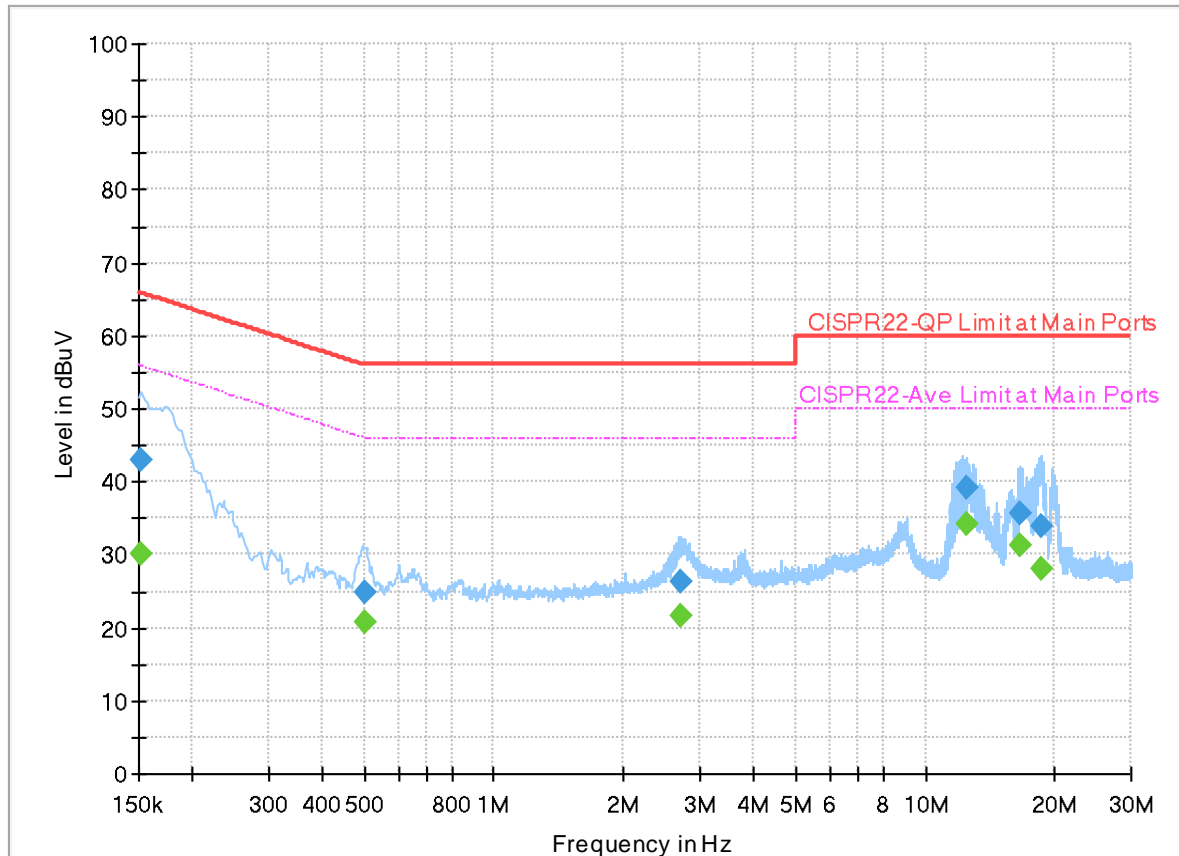


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	30.20	55.88	25.68	L1	OFF	20.0
0.152250	43.10	---	65.88	22.78	L1	OFF	20.0
0.501000	---	20.89	46.00	25.11	L1	OFF	20.0
0.501000	24.80	---	56.00	31.20	L1	OFF	20.0
2.719500	---	21.73	46.00	24.27	L1	OFF	20.1
2.719500	26.27	---	56.00	29.73	L1	OFF	20.1
12.491250	---	34.11	50.00	15.89	L1	OFF	20.2
12.491250	39.22	---	60.00	20.78	L1	OFF	20.2
16.599750	---	31.27	50.00	18.73	L1	OFF	20.2
16.599750	35.77	---	60.00	24.23	L1	OFF	20.2
18.577500	---	28.03	50.00	21.97	L1	OFF	20.2
18.577500	33.94	---	60.00	26.06	L1	OFF	20.2

EUT Information

Report NO : 0D2423
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

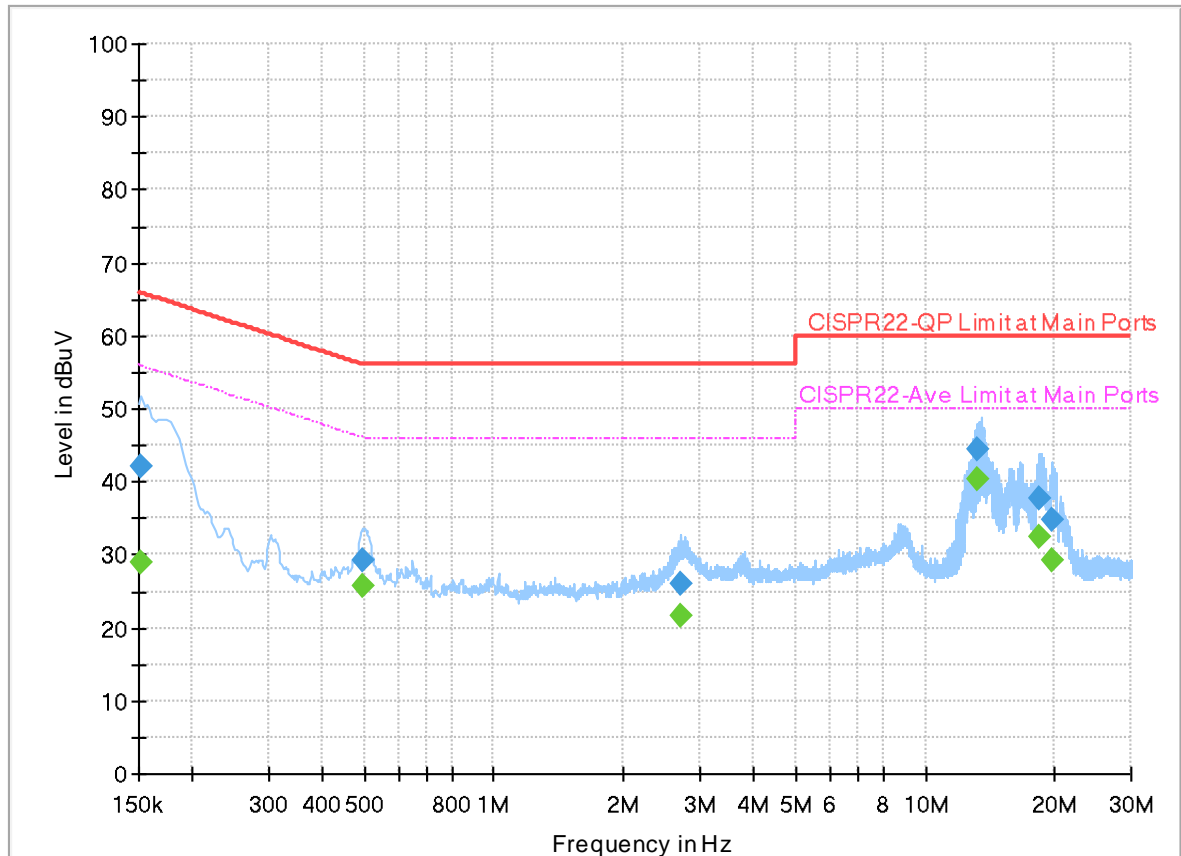

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	28.98	55.88	26.90	N	OFF	20.0
0.152250	42.14	---	65.88	23.74	N	OFF	20.0
0.494250	---	25.79	46.10	20.31	N	OFF	20.0
0.494250	29.15	---	56.10	26.95	N	OFF	20.0
2.717250	---	21.69	46.00	24.31	N	OFF	20.1
2.717250	26.08	---	56.00	29.92	N	OFF	20.1
13.240500	---	40.42	50.00	9.58	N	OFF	20.2
13.240500	44.44	---	60.00	15.56	N	OFF	20.2
18.462750	---	32.39	50.00	17.61	N	OFF	20.3
18.462750	37.75	---	60.00	22.25	N	OFF	20.3
19.770000	---	29.33	50.00	20.67	N	OFF	20.3
19.770000	34.78	---	60.00	25.22	N	OFF	20.3



Appendix B. Radiated Spurious Emission

Test Engineer :	Daniel Lee, Jacky Hung and Wilson Wu	Temperature :	20~25°C
		Relative Humidity :	50~60%

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
					Line	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BT CH00 2402MHz		2326.59	47.84	-26.16	74	43.81	27.75	4.13	27.85	328	99	P	H	
		2326.59	23.05	-30.95	54	-	-	-	-	-	-	A	H	
	*	2402	98.47	-	-	94.51	27.6	4.2	27.84	328	99	P	H	
	*	2402	73.68	-	-	-	-	-	-	-	-	A	H	
													H	
														H
			2326.695	47.18	-26.82	74	43.15	27.75	4.13	27.85	374	61	P	V
			2326.695	22.39	-31.61	54	-	-	-	-	-	-	A	V
	*		2402	96.09	-	-	92.13	27.6	4.2	27.84	374	61	P	V
	*		2402	71.3	-	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		2338.42	48.73	-25.27	74	44.72	27.72	4.14	27.85	312	100	P	H	
		2338.42	23.94	-30.06	54	-	-	-	-	-	-	A	H	
	*	2441	98.11	-	-	94.19	27.52	4.23	27.83	312	100	P	H	
	*	2441	73.32	-	-	-	-	-	-	-	-	A	H	
			2484.6	45.11	-28.89	74	41.16	27.5	4.27	27.82	312	100	P	H
			2484.6	20.32	-33.68	54	-	-	-	-	-	-	A	H
			2353.4	46.46	-27.54	74	42.47	27.69	4.15	27.85	363	58	P	V
			2353.4	21.67	-32.33	54	-	-	-	-	-	-	A	V
	*		2441	94.64	-	-	90.72	27.52	4.23	27.83	363	58	P	V
	*		2441	69.85	-	-	-	-	-	-	-	-	A	V
			2491.04	44.72	-29.28	74	40.77	27.5	4.27	27.82	363	58	P	V
			2491.04	19.93	-34.07	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	97.44	-	-	93.5	27.5	4.26	27.82	308	97	P	H
	*	2480	72.65	-	-	-	-	-	-	-	-	A	H
		2483.52	45.74	-28.26	74	41.79	27.5	4.27	27.82	308	97	P	H
		2483.52	20.95	-33.05	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	94.22	-	-	90.28	27.5	4.26	27.82	352	58	P	V
	*	2480	69.43	-	-	-	-	-	-	-	-	A	V
		2488.72	44.51	-29.49	74	40.56	27.5	4.27	27.82	352	58	P	V
		2488.72	19.72	-34.28	54	-	-	-	-	-	-	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	46.25	-27.75	74	66.12	31.11	6.51	57.49	100	0	P	H
		4804	21.46	-32.54	54	-	-	-	-	-	-	A	H
													H
													H
		4804	47.82	-26.18	74	67.69	31.11	6.51	57.49	100	0	P	V
		4804	23.03	-30.97	54	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		4882	49.11	-24.89	74	68.39	31.2	6.84	57.32	100	0	P	H
		4882	24.32	-29.68	54	-	-	-	-	-	-	A	H
		7323	44.27	-29.73	74	55.9	36.75	8.72	57.1	100	0	P	H
		7323	19.48	-34.52	54	-	-	-	-	-	-	A	H
		4882	51.14	-22.86	74	70.42	31.2	6.84	57.32	100	0	P	V
		4882	26.35	-27.65	54	-	-	-	-	-	-	A	V
		7323	44.09	-29.91	74	55.72	36.75	8.72	57.1	100	0	P	V
		7323	19.3	-34.7	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	50.15	-23.85	74	68.72	31.42	7.17	57.16	100	0	P	H
		4960	25.36	-28.64	54	-	-	-	-	-	-	A	H
		7440	45.09	-28.91	74	56.85	36.82	8.7	57.28	100	0	P	H
		7440	20.3	-33.7	54	-	-	-	-	-	-	A	H
		4960	52.26	-21.74	74	70.83	31.42	7.17	57.16	100	0	P	V
		4960	27.47	-26.53	54	-	-	-	-	-	-	A	V
		7440	45.05	-28.95	74	56.81	36.82	8.7	57.28	100	0	P	V
		7440	20.26	-33.74	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BT LF		30	22.15	-17.85	40	29.27	24.59	0.51	32.22	-	-	P	H	
		257.95	33.17	-12.83	46	44.26	19.47	1.47	32.03	-	-	P	H	
		320.03	31.79	-14.21	46	42.46	19.51	1.62	31.8	-	-	P	H	
		402.48	36.47	-9.53	46	44.26	21.99	1.77	31.55	100	0	P	H	
		859.35	31.58	-14.42	46	31.08	29.01	2.65	31.16	-	-	P	H	
		937.92	32.39	-13.61	46	30.67	29.79	2.78	30.85	-	-	P	H	
														H
														H
														H
														H
														H
														H
			30.97	21.75	-18.25	40	29.25	24.21	0.52	32.23	-	-	P	V
			72.68	29.82	-10.18	40	48.51	12.78	0.79	32.26	100	0	P	V
			259.89	25.61	-20.39	46	36.38	19.77	1.48	32.02	-	-	P	V
			409.27	30.55	-15.45	46	38.1	22.25	1.78	31.58	-	-	P	V
			837.04	31.07	-14.93	46	31.01	28.66	2.62	31.22	-	-	P	V
			944.71	32.25	-13.75	46	30.05	30.23	2.79	30.82	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 00		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2402MHz													

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots



Test Engineer :	Daniel Lee, Jacky Hung and Wilson Wu	Temperature :	20~25°C
		Relative Humidity :	50~60%

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH00 2402MHz	
	Horizontal	Fundamental
Peak	<p> Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 0D2423 Mode : 1 </p>	<p> Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 0D2423 Mode : 1 </p>


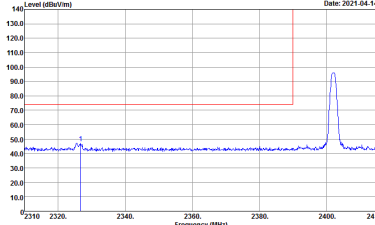
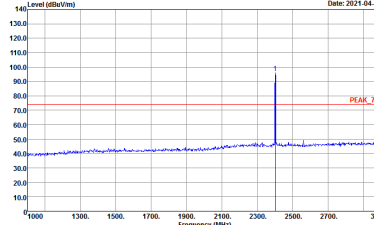


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH00 2402MHz		
	Vertical	Fundamental
Peak	 <p data-bbox="430 712 702 784">Date: 2021-04-14 Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 002423 Mode : 1</p>	 <p data-bbox="901 712 1173 784">Date: 2021-04-14 Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 002423 Mode : 1</p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH39 2441MHz		
	Horizontal	Fundamental
Peak	<p>Date: 2021-04-14</p> <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 002423 Mode : 2</p>	<p>Date: 2021-04-14</p> <p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 002423 Mode : 2</p>
Peak	<p>Date: 2021-04-14</p> <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 002423 Mode : 2</p>	Left blank

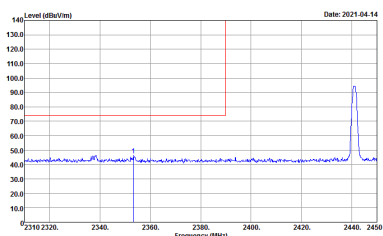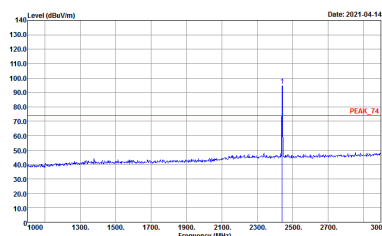
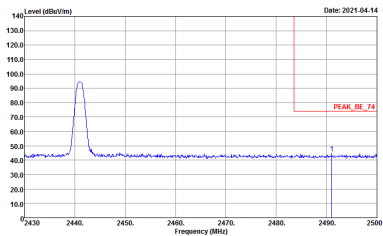


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH39 2441MHz		
	Vertical	Fundamental
Peak	 <p>Date: 2021-04-14</p> <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWF:Auto Detector : Peak Project : 002423 Mode : 2</p>	 <p>Date: 2021-04-14</p> <p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWF:Auto Detector : Peak Project : 002423 Mode : 2</p>
Peak	 <p>Date: 2021-04-14</p> <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWF:Auto Detector : Peak Project : 002423 Mode : 2</p>	Left blank

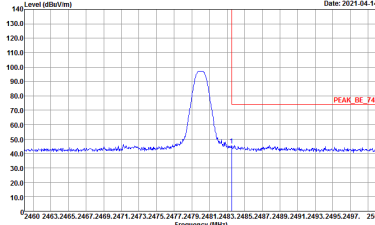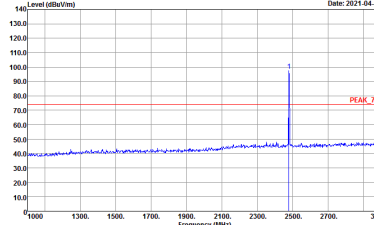

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Horizontal	Fundamental
Peak	 <p>Date: 2021-04-14</p> <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 002423 Mode : 3</p>	 <p>Date: 2021-04-14</p> <p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 002423 Mode : 3</p>

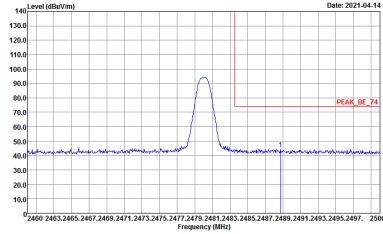
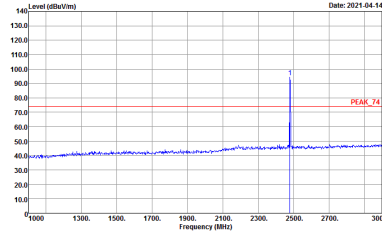


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH78 2480MHz		
	Vertical	Fundamental
Peak	 <p>Date: 2021.04.14</p> <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 002423 Mode : 3</p>	 <p>Date: 2021.04.14</p> <p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 002423 Mode : 3</p>





2.4GHz 2400~2483.5MHz



BT (Harmonic @ 3m)

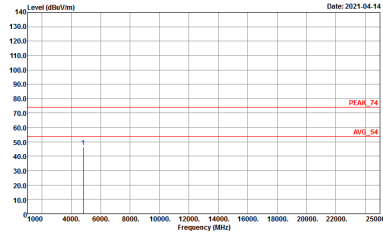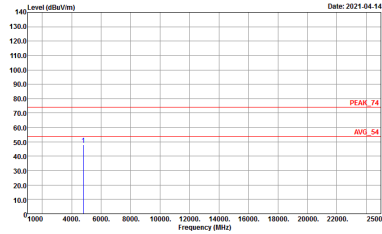BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BT CH00 2402MHz		
Horizontal		Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH13-1FY Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : 002423 Mode : 1</p>	 <p>Site : 03CH13-1FY Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL Detector : Peak Project : 002423 Mode : 1</p>

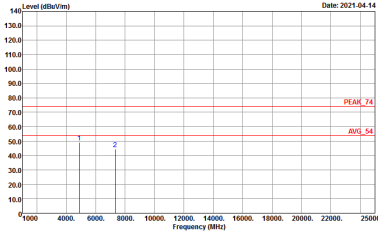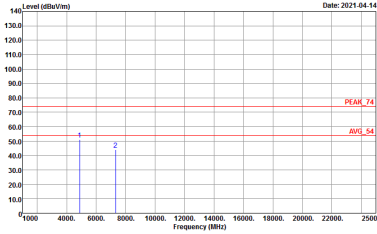

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BT CH39 2441MHz		
	Horizontal	Vertical
<p>Peak Avg.</p>	 <p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : 002423 Mode : 2</p>	 <p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL Detector : Peak Project : 002423 Mode : 2</p>

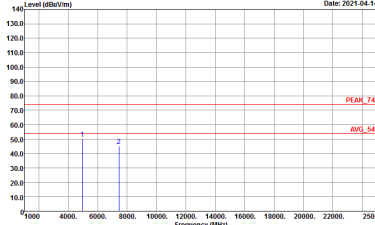
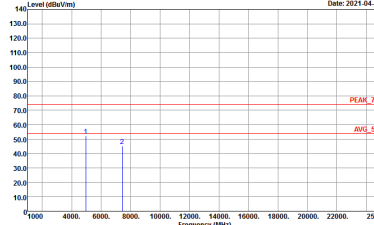


BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BT CH78 2480MHz		
	Horizontal	Vertical
<p>Peak Avg.</p>	 <p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : 002423 Mode : 3</p>	 <p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL Detector : Peak Project : 002423 Mode : 3</p>




Emission below 1GHz

2.4GHz BT (LF)

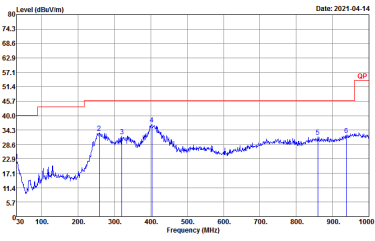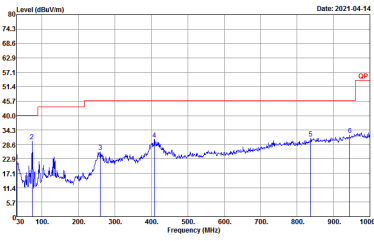BT	2.4GHz 2400~2483.5MHz	
BT LF		
Horizontal		Vertical
QP / Peak	 <p data-bbox="430 795 654 862"> Site : 03CH12-HY Condition : QP 3m BILEG_40103 HORIZONTAL Detector : Peak Project : 002423 Mode : 3 </p>	 <p data-bbox="904 795 1128 862"> Site : 03CH12-HY Condition : QP 3m BILEG_40103 VERTICAL Detector : Peak Project : 002423 Mode : 3 </p>



Appendix D. Duty Cycle Plots

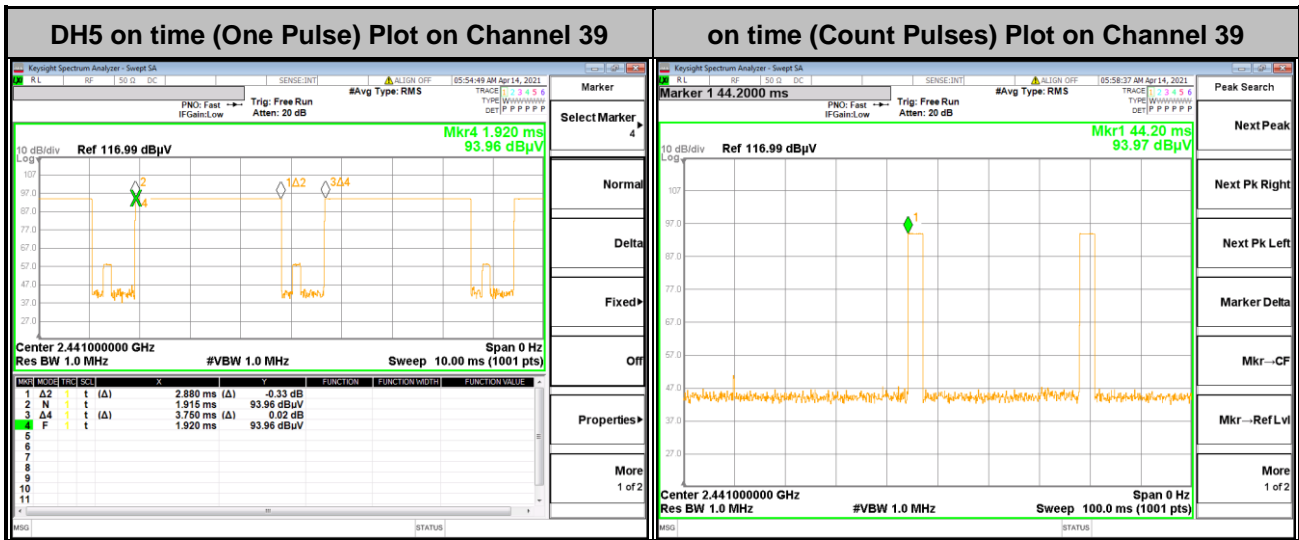

Note:

1. Worst case Duty cycle = on time/100 milliseconds = 2 * 2.88 / 100 = 5.76 %
2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
3. DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. [100 ms / 57.6 ms] = 2 hops

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100 \text{ ms}) = -24.79 \text{ dB}$$