

RF TEST REPORT



Report No.: FCC_IC_RF_SL18102402-ZBR-062_DSS_Rev1.0
Supersede Report No.: FCC_IC_RF_SL18102402-ZBR-062_DSS

Applicant	:	Zebra Technologies Corporation
Host Product Name	:	Thermal Printer
Host Model No.	:	ZT610, ZT620
Module Model No.	:	ZQ3BT
Test Standard	:	47 CFR 15.247 RSS247 Issue 2, 2017
Test Method	:	ANSI C63.10: 2013 RSS-Gen Issue 5, April 2018 558074 D01 DTS Meas Guidance v05
FCC ID	:	I28-ZBRZQ3BT
IC	:	3798B- ZBRZQ3BT
Dates of test	:	12/10/2018 – 12/19/2018
Issue Date	:	12/27/2018
Test Result	:	☒ Pass ☐ Fail
Equipment complied with the specification [X]		
Equipment did not comply with the specification []		

This Test Report is Issued Under the Authority of:

	
Shuo Zhang	Chen Ge
Test Engineer	Engineer Reviewer

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at:



Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRR, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

CONTENTS

1	REPORT REVISION HISTORY.....	4
2	EXECUTIVE SUMMARY	5
3	CUSTOMER INFORMATION	5
4	TEST SITE INFORMATION.....	5
5	MODIFICATION.....	5
6	EUT INFORMATION.....	6
6.1	EUT Description	6
6.2	Spec for BT Radio	6
6.3	EUT test modes/configuration Description	6
7	SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION	7
7.1	Supporting Equipment.....	7
7.2	Cabling Description.....	7
7.3	Test Software Description.....	7
8	TEST SUMMARY	8
9	MEASUREMENT UNCERTAINTY	9
10	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	10
10.1	Transmitter Radiated Spurious Emissions Below 1GHz.....	11
10.2	Transmitter Radiated Spurious Emissions > 1GHz & Restricted band & non-restricted band emission.....	14
ANNEX A. TEST INSTRUMENT		19
ANNEX B. SIEMIC ACCREDITATION		20

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_IC_RF_SL18102402-ZBR-062_DSS	None	Original	12/20/2018
FCC_IC_RF_SL18102402-ZBR-062_DSS_Rev1.0	1.0	Update EUT info	12/27/2018

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Zebra Technologies Corporation
Host Product Name: Thermal Printer
Host Model No.: ZT610, ZT620
Module Model No. ZQ3BT

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

Applicant Name	Zebra Technologies Corporation
Applicant Address	3 Overlook Point, Lincolnshire, IL 60069
Manufacturer Name	Zebra Technologies Corporation
Manufacturer Address	3 Overlook Point, Lincolnshire, IL 60069

4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Host Product Name	Thermal Printer
Host Model No.	ZT610, ZT620
Module Model No.	ZQ3BT
Trade Name	Zebra Technologies Corporation
Serial No.	76J184300386, 76J184400121
Input Power	1100-240V, 50-60Hz
Power Adapter Manu/Model	N/A, internal PSU
Power Adapter SN	N/A, internal PSU
Product Hardware version	N/A
Date of EUT received	12/01/2018
Equipment Class/ Category	DTS, DSS
Port/Connectors	USB, USB host x2, Gig-Ethernet, RS232, Parallel
Remark	Only model ZT620 is tested as worst case. ZT610 and ZT620 have the same internal power supply and control PCB

6.2 Spec for BT Radio

Radio Type	Bluetooth (Ver4.0+EDR)
Operating Frequency	2402MHz-2480MHz
Modulation	FHSS (BDR, EDR)
Channel Spacing	1MHz (BDR, EDR)
Antenna Type	Chip
Antenna Gain	1.69 dBi
Antenna Connector Type	-

6.3 EUT test modes/configuration Description

Mode	Note
Bluetooth	BDR (GFSK)
Bluetooth	EDR (8-DPSK)

7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	ThinkPad T420s	N/A	Lenovo	-

7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
USB	EUT	I/O Port	Laptop	USB	2	Unshielded	-

7.3 Test Software Description

Test Item	Software	Description
RF Testing	Zebra Toolbox	Set the EUT to transmit continuously in diferent test mode

8 Test Summary

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Antenna Requirement	FCC	15.203	FCC	ANSI C63.10 – 2013	☒ Pass
	IC	-	IC	558074 D01 DTS Meas Guidance v05	☐ N/A
Restricted Band of Operation	FCC	15.205	FCC	ANSI C63.10:2013	☒ Pass
	IC	RSS Gen 8.10	IC	558074 D01 DTS Meas Guidance v05	☐ N/A
AC Conducted Emissions	FCC	15.207(a)	FCC	ANSI C63.10:2013	☒ Pass*
	IC	RSS Gen 8.8	IC	RSS Gen Issue 5: 2018	☐ N/A

DSS Band Requirement

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Channel Separation	FCC	15.247 (a)(1)	FCC	558074 D01 DTS Meas Guidance v05	☒ Pass*
	IC	RSS247 (5.1.5)	IC	-	☐ N/A
20dB Occupied Bandwidth	FCC	15.247(a)(1)	FCC	558074 D01 DTS Meas Guidance v05	☒ Pass*
	IC	RSS247 (5.1.2)	IC	-	☐ N/A
99% Occupied Bandwidth	FCC	15.247(a)(2)	FCC	-	☒ Pass*
	IC	RSS Gen 6.6	IC	RSS Gen Issue 5: 2018	☐ N/A
Number of Hopping Channels	FCC	15.247(a)(1)	FCC	558074 D01 DTS Meas Guidance v05	☒ Pass*
	IC	RSS247 (5.1.5)	IC	-	☐ N/A
Band Edge and Radiated Spurious Emissions	FCC	15.247(d)	FCC	558074 D01 DTS Meas Guidance v05	☒ Pass
	IC	RSS247(5.5)	IC	-	☐ N/A
Time of Occupancy	FCC	15.247(a)(1)	FCC	558074 D01 DTS Meas Guidance v05	☒ Pass *
	IC	RSS247 (5.1.5)	IC	-	☐ N/A
Output Power	FCC	15.247(b)	FCC	558074 D01 DTS Meas Guidance v05	☒ Pass *
	IC	RSS247 (5.4.2)	IC	-	☐ N/A
Receiver Spurious Emissions	FCC	15.247(d)	FCC	-	☐ Pass
	IC	RSS Gen (7.1)	IC	RSS Gen Issue 5: 2018	☒ N/A
Antenna Gain > 6 dBi	FCC	15.247(e)	FCC	558074 D01 DTS Meas Guidance v05	☐ Pass
	IC	RSS247 (5.4.6)	IC	-	☒ N/A
Power Spectral Density	FCC	15.247(e)	FCC	558074 D01 DTS Meas Guidance v05	☐ Pass
	IC	RSS247 (5.2.2)	IC	-	☒ N/A
Hybrid System Requirement	FCC	15.247(f)	FCC	558074 D01 DTS Meas Guidance v05	☐ Pass
	IC	RSS247 (5.3)	IC	-	☒ N/A
Hopping Capability	FCC	15.247(g)	FCC	558074 D01 DTS Meas Guidance v05	☒ Pass *
	IC	RSS247 (5.1.5)	IC	-	☐ N/A
RF Exposure requirement	FCC	15.247(i)	FCC	558074 D01 DTS Meas Guidance v05	☐ Pass
	IC	RSS Gen(3.2)	IC	-	☒ N/A
Remark	- All measurement uncertainties are not taken into consideration for all presented test result. - The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual. - Pass* : Please refer to FCC IC_SL17060501-ZBR-021-DSS_Rev2.0 test report.				

9 Measurement Uncertainty

Emissions			
Test Item	Frequency Range	Description	Uncertainty
AC Conducted Emissions	150KHz – 30MHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2	±3.5dB
RF conducted measurement	150KHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2	±0.95dB
Radiated Spurious Emissions	30MHz – 1GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	±6dB
Radiated Spurious Emissions	1GHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	±6dB


10 Measurements, Examination and Derived Results

10.1 Antenna Requirement

Spec	Requirement	Applicable
§15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. Antenna requirement must meet at least one of the following: a) Antenna must be permanently attached to the device. b) The antenna must use a unique type of connector to attach to the device. c) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.	☒
Remark	The EUT uses a Chip antenna that is permanently attached to the board which meets the requirement.	
Result	☒ PASS ☐ FAIL	

10.2 Transmitter Radiated Spurious Emissions Below 1GHz

Requirement(s):

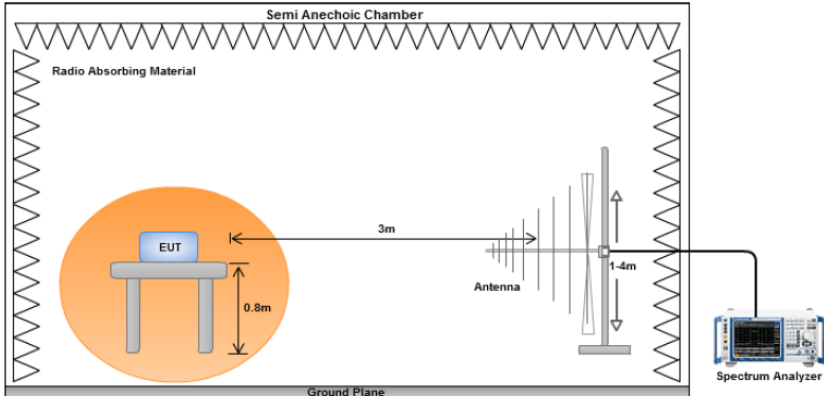Spec	Item	Requirement	Applicable										
47CFR§15.247(d), RSS247(5.5)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges <table><tr><th>Frequency range (MHz)</th><th>Field Strength (uV/m)</th></tr><tr><td>30 – 88</td><td>100</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 960</td><td>200</td></tr><tr><td>Above 960</td><td>500</td></tr></table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	☒
Frequency range (MHz)	Field Strength (uV/m)												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												
Test Setup													
Procedure	1. 2. The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: a. b. c. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. A Quasi-peak measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.												
Remark	The EUT was scanned up to 1GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.												
Result	☒ Pass ☐ Fail												


Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by **Shuo Zhang** at **10m Chamber**.

Radiated Emission Test Results (Below 1GHz)

Test specification:	Radiated Spurious Emissions (30MHz – 1000MHz)				
Test specification:	Radiated Spurious Emissions (30MHz – 1000MHz)				
Environmental Conditions:	Temp(°C):	22	Result :	☒ Pass ☐ Fail	
	Humidity (%):	37			
	Atmospheric(mbar):	1021			
Mains Power:	120VAC, 60Hz				
Tested by:	Shuo Zhang				
Test Date:	12/12/2018				
Remarks:	BDR 2441MHz				

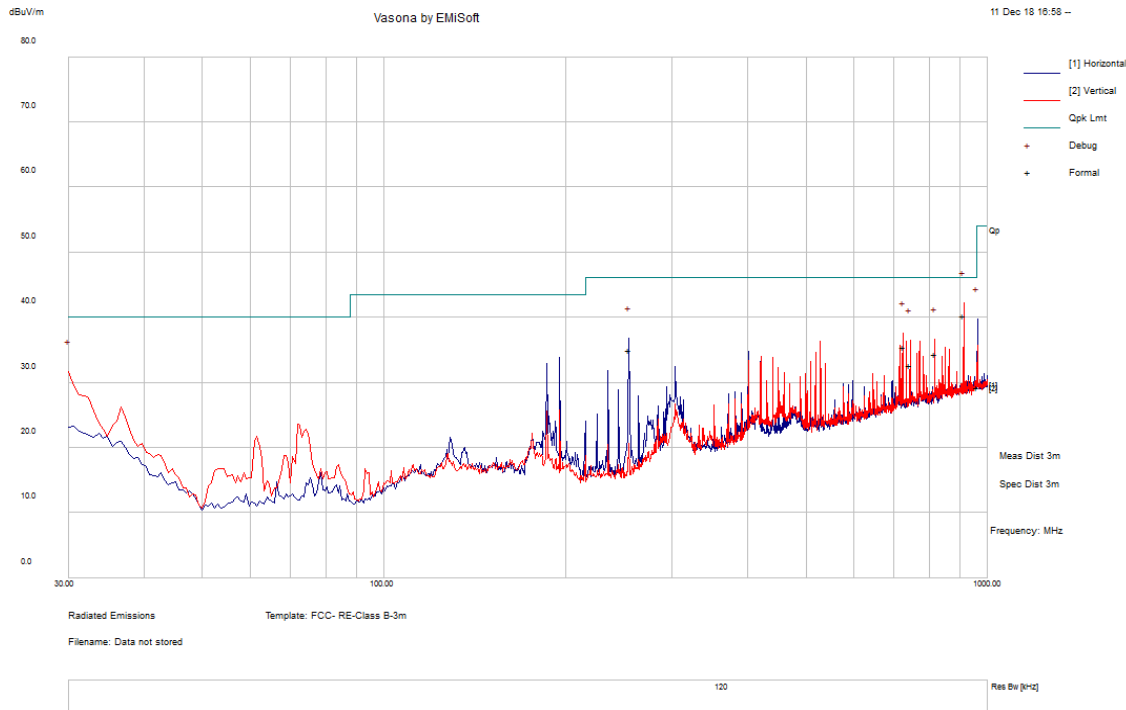


Quasi Max Measurement

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
913.06	36.92	15.9	-12.54	40.27	Quasi Max	V	102	131	46	-5.73	Pass
724.12	35.47	15.19	-15.1	35.56	Quasi Max	V	101	26	46	-10.44	Pass
254.43	46.26	12.96	-24.21	35.01	Quasi Max	H	103	356	46	-10.99	Pass
816.92	33.18	15.52	-14.22	34.48	Quasi Max	V	147	93	46	-11.52	Pass
743.70	32.56	15.19	-15.03	32.72	Quasi Max	V	155	21	46	-13.28	Pass
961.25	25.58	16.07	-12.34	29.31	Quasi Max	H	107	98	54	-24.69	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

Environmental Conditions:	Temp(°C):	22	Result :	☒ Pass ☐ Fail
	Humidity (%):	37		
	Atmospheric(mbar):	1021		
Mains Power:	120VAC, 60Hz			
Tested by:	Shuo Zhang			
Test Date:	12/12/2018			
Remarks:	EDR 2441MHz			

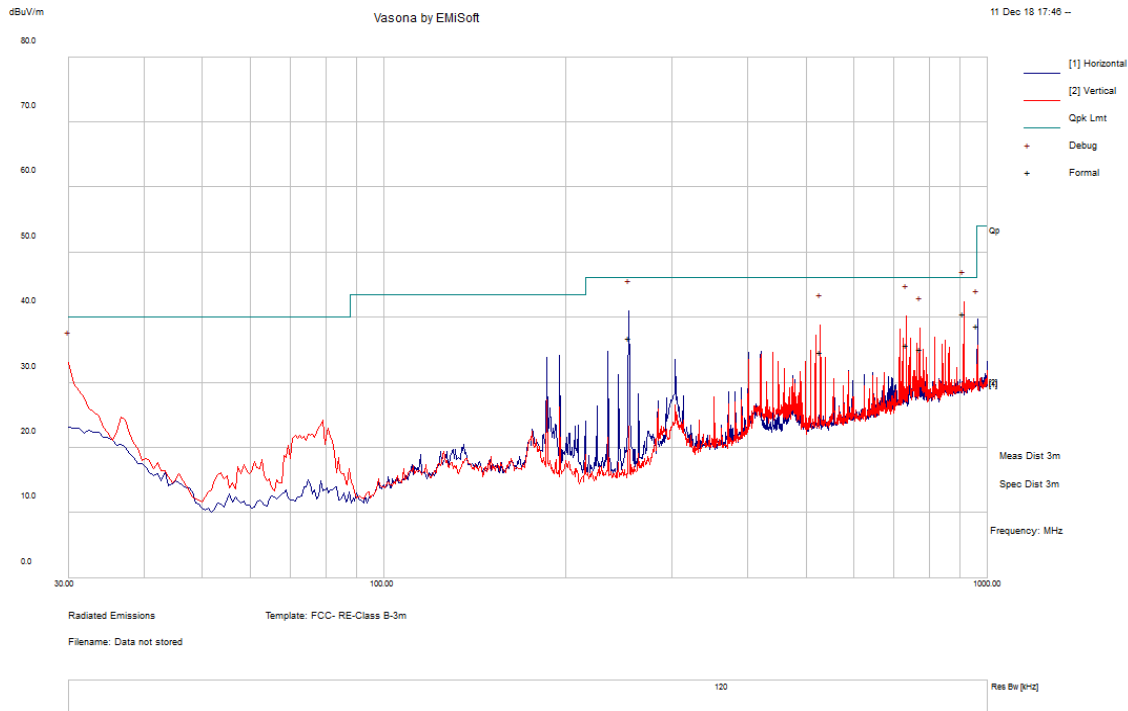


Quasi Max Measurement

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
913.07	37.32	15.9	-12.54	40.68	Quasi Max	V	100	117	46	-5.32	Pass
254.43	48.18	12.96	-24.21	36.93	Quasi Max	H	115	32	46	-9.07	Pass
733.90	35.69	15.17	-15.09	35.77	Quasi Max	V	100	356	46	-10.23	Pass
528.41	38.06	14.45	-17.79	34.72	Quasi Max	V	111	321	46	-11.28	Pass
773.04	33.94	15.49	-14.31	35.11	Quasi Max	V	110	123	46	-10.89	Pass
961.08	35.09	16.07	-12.35	38.81	Quasi Max	H	102	91	54	-15.19	Pass

10.3 Transmitter Radiated Spurious Emissions > 1GHz & Restricted band & non-restricted band emission

Requirement(s):

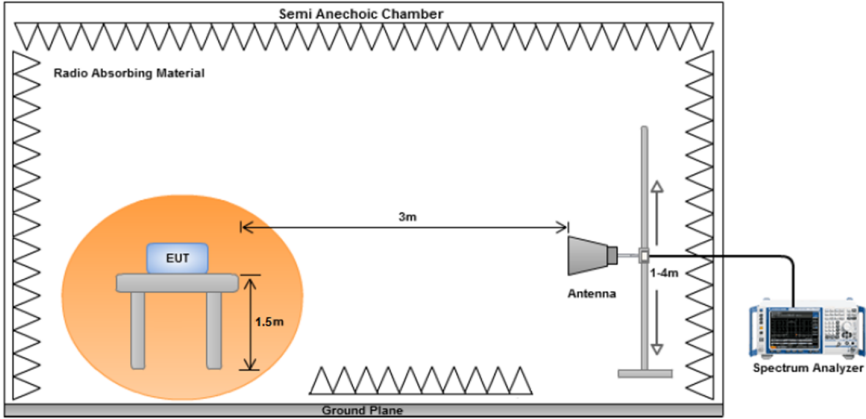Spec	Item	Requirement	Applicable
47CFR§15.247(d), RSS247(5.5)	a)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required ☒ 20 dB down ☐ 30 dB down	☒
	b)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	☒
Test Setup			
Procedure		- The EUT was switched on and allowed to warm up to its normal operating condition. - The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: - Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. - The EUT was then rotated to the direction that gave the maximum emission. - Finally, the antenna height was adjusted to the height that gave the maximum emission. - An average measurement was then made for that frequency point. - Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.	
Remark		The EUT was scanned up to 26GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.	
Result		☒ Pass ☐ Fail	

Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

Test was done by **Shuo Zhang** at **10m Chamber**.

Radiated Emission Test Results

Bluetooth BDR – 2402MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
4653.06	40.78	4.12	-0.91	44	Peak Max	H	314	307	74	-30	Pass
4803.97	46	4.1	-0.93	49.17	Peak Max	V	107	33	74	-24.83	Pass
7201.82	40.72	5.15	-0.45	45.41	Peak Max	V	152	217	74	-28.59	Pass
4653.06	28.16	4.12	-0.91	31.38	Average Max	H	314	307	54	-22.62	Pass
4803.97	36.4	4.1	-0.93	39.58	Average Max	V	107	33	54	-14.42	Pass
7201.82	27.23	5.15	-0.45	31.93	Average Max	V	152	217	54	-22.07	Pass

Bluetooth BDR – 2441MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
4656.68	40.97	4.12	-0.91	44.18	Peak Max	H	331	178	74	-29.82	Pass
2444.95	41.96	2.98	-3.55	41.38	Peak Max	H	258	44	74	-32.62	Pass
1901.30	42.08	2.68	-2.61	42.14	Peak Max	H	296	152	74	-31.86	Pass
4656.68	28.08	4.12	-0.91	31.3	Average Max	H	331	178	54	-22.7	Pass
2444.95	29.35	2.98	-3.55	28.78	Average Max	H	258	44	54	-25.22	Pass
1901.30	29.45	2.68	-2.61	29.52	Average Max	H	296	152	54	-24.48	Pass

Bluetooth BDR – 2480MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
6570.50	40	4.88	-0.24	44.65	Peak Max	V	149	311	74	-29.35	Pass
1904.29	41.8	2.68	-2.62	41.85	Peak Max	H	165	222	74	-32.15	Pass
5250.37	40.46	4.35	-0.88	43.93	Peak Max	V	169	346	74	-30.07	Pass
6570.50	27.17	4.88	-0.24	31.81	Average Max	V	149	311	54	-22.19	Pass
1904.29	29.51	2.68	-2.62	29.56	Average Max	H	165	222	54	-24.44	Pass
5250.37	27.35	4.35	-0.88	30.83	Average Max	V	169	346	54	-23.17	Pass

Bluetooth EDR – 2402MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
4804.19	54.94	4.1	-0.93	58.11	Peak Max	H	111	50	74	-15.89	Pass
11241.82	40.1	6.03	2.15	48.28	Peak Max	V	198	53	74	-25.72	Pass
3088.48	41.27	3.34	-1.43	43.18	Peak Max	V	240	356	74	-30.82	Pass
4804.19	48.53	4.1	-0.93	51.71	Average Max	H	111	50	54	-2.29	Pass
11241.82	26.36	6.03	2.15	34.54	Average Max	V	198	53	54	-19.46	Pass
3088.48	28.69	3.34	-1.43	30.61	Average Max	V	240	356	54	-23.39	Pass

Bluetooth EDR – 2441MHz


Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
4880.11	43.52	4.18	-1	46.7	Peak Max	H	253	345	74	-27.3	Pass
2444.10	41.21	2.98	-3.56	40.63	Peak Max	V	139	287	74	-33.37	Pass
1904.31	41.95	2.68	-2.62	42	Peak Max	V	152	186	74	-32	Pass
4880.11	28.15	4.18	-1	31.33	Average Max	H	253	345	54	-22.67	Pass
2444.10	29.2	2.98	-3.56	28.62	Average Max	V	139	287	54	-25.38	Pass
1904.31	29.53	2.68	-2.62	29.58	Average Max	V	152	186	54	-24.42	Pass

Bluetooth EDR – 2480MHz


Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
4961.14	53.04	4.25	-1.07	56.22	Peak Max	H	111	53	74	-17.78	Pass
11073.65	39.95	6.1	2.1	48.15	Peak Max	V	193	35	74	-25.85	Pass
1905.76	42.15	2.68	-2.63	42.2	Peak Max	V	282	356	74	-31.8	Pass
4961.14	41.44	4.25	-1.07	44.63	Average Max	H	111	53	54	-9.37	Pass
11073.65	26.31	6.1	2.1	34.51	Average Max	V	193	35	54	-19.49	Pass
1905.76	29.54	2.68	-2.63	29.59	Average Max	V	282	356	54	-24.41	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.


Restricted Band Test plot (Bluetooth BDR/EDR)

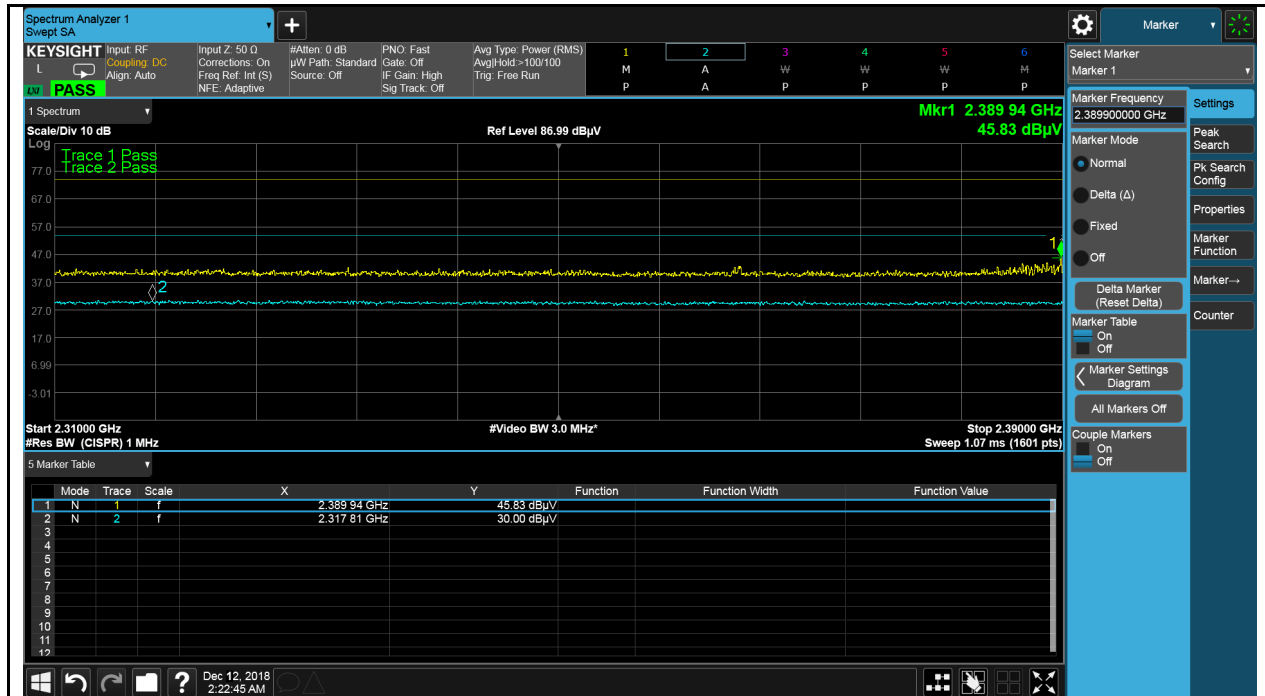


Restricted Band BDR 2402MHz

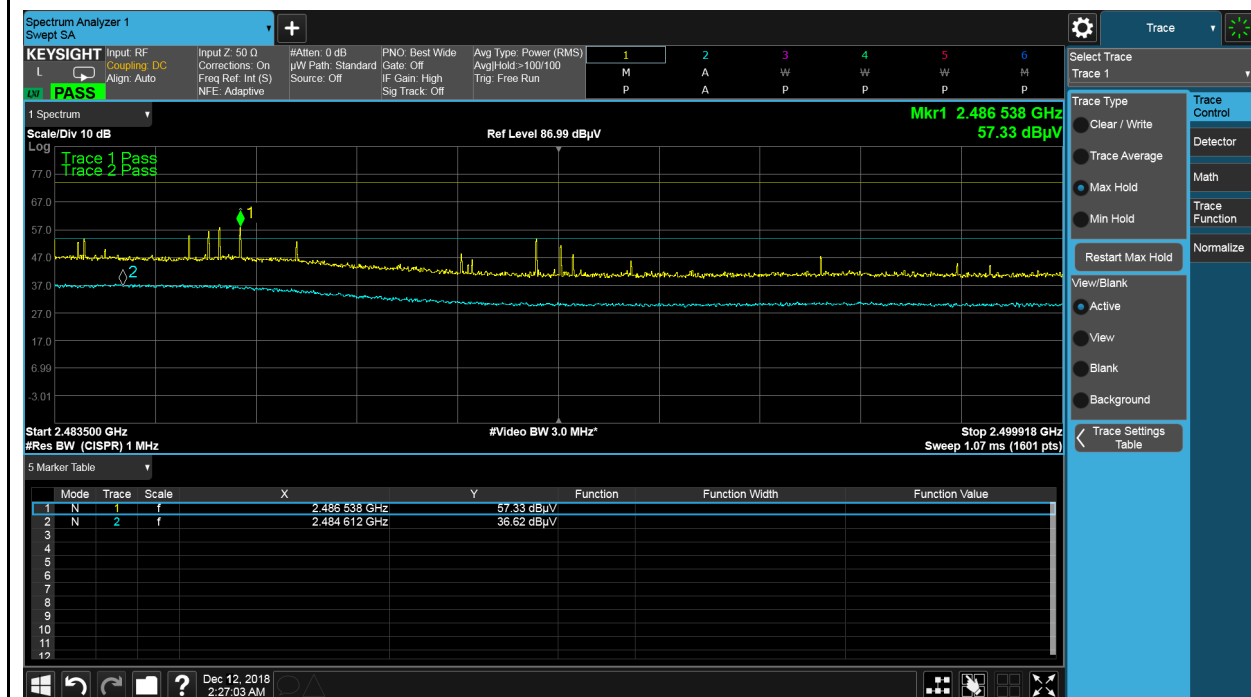

Restricted Band BDR 2480MHz

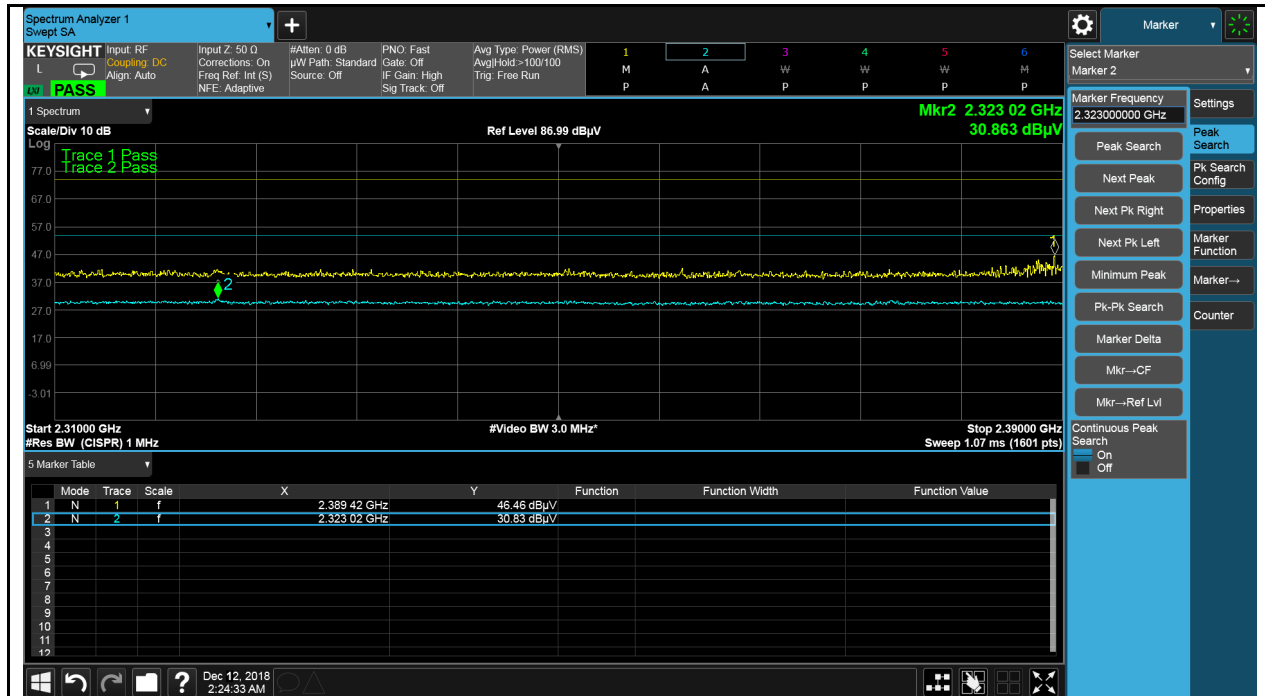

Restricted Band EDR 2402MHz

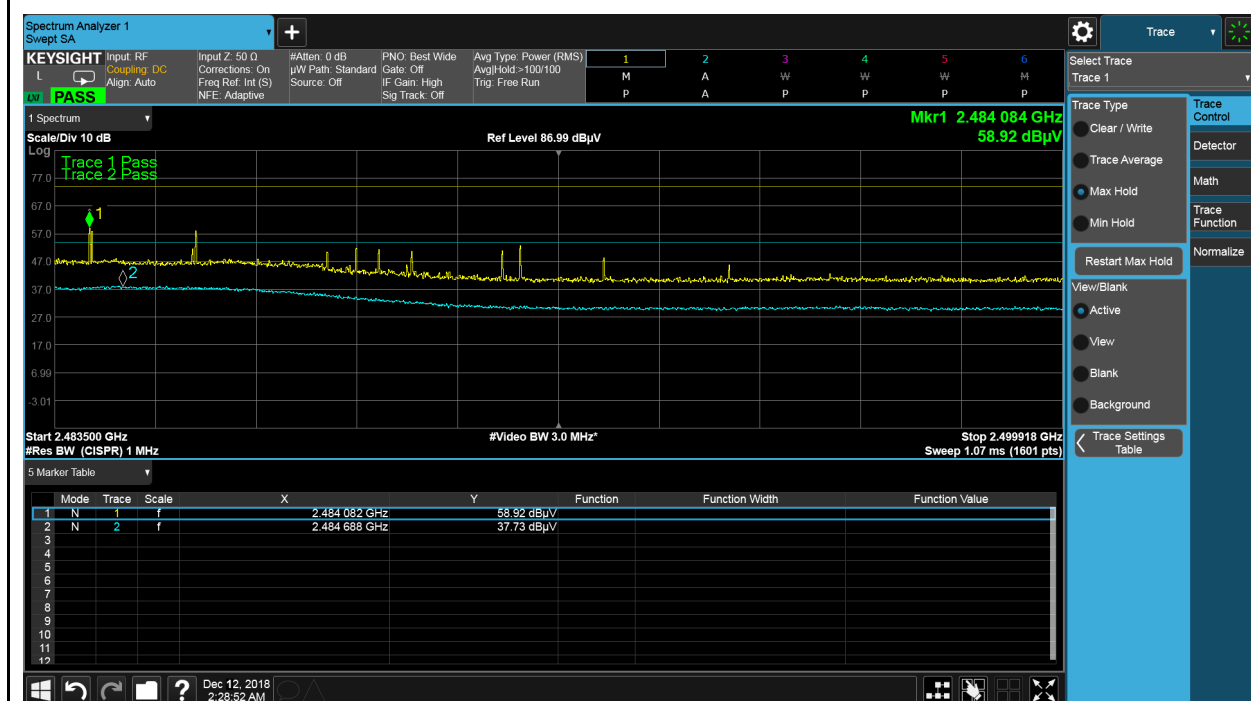

Restricted Band EDR 2480MHz

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Radiated Emissions						
Keysight EXA 44GHz Spectrum Analyzer	N9030B(PXA)	MY57140374	09/06/2018	1 Year	09/06/2019	☒
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	03/09/2018	1 Year	03/09/2019	☒
Horn Antenna (1GHz~26GHz)	3115	100059	11/09/2018	1 Year	11/09/2019	☒
Horn Antenna (18GHz~40GHz)	PA-840	181251	06/23/2018	1 Year	06/23/2019	☒
Preamplifier (100KHz-7GHz)	LPA-6-30	11170602	05/09/2018	1 Year	05/09/2019	☒
Pre-Amplifier (1-26.5GHz)	8449B	3008A00715	08/16/2018	1 Year	08/16/2019	☒

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1 , A2 , A3 , A4 , B1 , B2 , B3 , B4 , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)		Phase I , Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		Radio: A1. Terminal equipment for purpose of calling Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law
Korea CAB Accreditation		EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68 Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		R-3083: Radiation 3 meter site C-3421: Main Ports Conducted Interference Measurement T-1597: Telecommunication Ports Conducted Interference Measurement
Australia CAB Recognition		EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4 Radio communications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771 Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06, AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2