



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR
352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

**FCC PART 15.231(a) &
RSS-210 (i8) ANNEX 1
MOMENTARILY OPERATED TRANSMITTER
COMBO TEST REPORT**

Applicant	GTO ACCESS SYSTEMS, LLC
Address	3121 HARTSFIELD ROAD TALLAHASSEE FLORIDA 32303 USA
Product Model Number	SGER
Product Description	GATE EDGE CONTROL UNIT
FCC ID	I6H-SGER
IC Cert	21449-SGER
Date Sample Received	4/25/2017
Date Tested	6/08/2017
Tested By	FRANKLIN ROSE
Approved By	Sid Sanders

Report Number	Version Number	Description	Issue Date
680AUT17TestReport	Rev1	Initial Issue	6/9/2017

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



TABLE OF CONTENTS

GENERAL REMARKS	3
GENERAL INFORMATION	4
TEST RESULTS SUMMARY	5
TEST SETUP.....	5
PERIODIC OPERATION.....	6
Declaration Provided by Applicant	7
Periodic Transmission Per Hour Calculation	7
Test Data: Transmitter Deactivation Plot	8
DUTY CYCLE	9
Test Data: Calculation of Duty Cycle.....	9
Test Data: 100 ms Number of Pulses Plot	10
Test Data: Sub Pulse 1 Duration Plot	11
RADIATION EMISSIONS:	12
Test Data: Emissions from 9 KHz to the 10th harmonic of the Fundamental.....	14
OCCUPIED BANDWIDTH.....	15
Test Data: Occupied Bandwidth Measurement Table	15
Test Data: 20 dB Occupied Bandwidth Plot.....	16
Test Data: 99% Occupied Bandwidth Plot	17
TEST EQUIPMENT LIST	18

Applicant: GTO ACCESS SYSTEMS, LLC
FCC ID: I6H-SGER
IC Cert: 21449-SGER
Report: 680AUT17TestReport_Rev1

[Table of Contents](#)

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

- Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Tested by:

Name and Title: Franklin Rose, Project Manager/Testing Technician

Date: 6/08/2017



Reviewed and approved by: Name and Title: Sid Sanders, Engineer

Date: 6/27/2017

Applicant: GTO ACCESS SYSTEMS, LLC
FCC ID: I6H-SGER
IC Cert: 21449-SGER
Report: 680AUT17TestReport_Rev1

[Table of Contents](#)



GENERAL INFORMATION

EUT Description	GATE EDGE CONTROL UNIT
FCC ID	I6H-SGER
IC Certification	21449-SGER
Model Number	SGER
Operating Frequency	433 MHz
Test Frequencies	433 MHz
Modulation	FSK
EUT Power Source	<input type="checkbox"/> 110–120Vac/50– 60Hz
	<input checked="" type="checkbox"/> DC Power 12V
	<input type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
Type of Equipment	<input checked="" type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input type="checkbox"/> Portable
Test Conditions	Temperature: 24-26°C Relative humidity: 50-65% Barometric Pressure: 1010 mb
Modification to the EUT	None
Test Exercise	For radiated emissions testing a continuously transmitting modulated carrier was used, for verification of duty cycle and compliance with periodic operation a normally operating transmitter was used
Regulatory Standards	FCC CFR Title 47 Part 15C IC RSS-210 (i8) Annex 1
Measurement Standards	ANSI C63.10: 2013 FCC CFR Title 47 Part 15.31, 15.33, 15.35 RSS-GEN (i4)

Applicant: GTO ACCESS SYSTEMS, LLC
 FCC ID: I6H-SGER
 IC Cert: 21449-SGER
 Report: 680AUT17TestReport_Rev1

[Table of Contents](#)

TEST RESULTS SUMMARY

Requirement	FCC Rules Part No.	IC RSS §	RESULTS Pass/Fail/NA
Types of Momentary Signals	15.231(a)	210 A1.1.1	PASS
Fundamental Output Power	15.231(b)	210 A1.1.2 GEN 6.12	PASS
Spurious Emissions and Harmonics	15.231(b) 15.209(a) 15.205(a)(b)	210 A1.1.2 GEN 8.9 GEN 8.10	PASS
Occupied Bandwidth	15.231(c) 15.215(c)	210 A1.1.3 GEN 6.6	PASS

Receiver

The receiver portion of this system has been tested and meets all of the FCC requirements per FCC rules Part 15.109. A report was issued and a copy of this report is available upon request.

TEST SETUP

Test Exercise (e.g. software description, test signal, etc.):	For radiated emissions testing a continuously transmitting modulated carrier was used, for verification of duty cycle and compliance with periodic operation a normally operating transmitter was used
Deviation from the standard(s)	No deviation from the standard(s)
Modification to the DUT:	No modification was made to the DUT.
Supporting Peripheral Equipment	None

[Table of Contents](#)

Applicant: GTO ACCESS SYSTEMS, LLC
 FCC ID: I6H-SGER
 IC Cert: 21449-SGER
 Report: 680AUT17TestReport_Rev1

[Table of Contents](#)

PERIODIC OPERATION

FCC Rule Part No: 15.231(a)

IC RSS: 210 A1.1.1

Requirements:

The intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:

- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
- (4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition
- (5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (1) and (2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

Procedure: ANSI C63.10 § 7.4(e) Compliance for periodic operation

PERIODIC OPERATION

Declaration Provided by Applicant

Item	Description	Yes	No
1	Does this device transmit a signal that is only used to control another device?	Y	
2	Does this device send data with this control signal?		N
3	Does this device send data? Data is, things like: temperature, wind direction, fluid amount, rate of flow, etc.		N
4	Does this device transmit continuously or automatically?		N
5	If manually operated does this device stop transmitting within 5 seconds of releasing the button?	Y	
6	If automatically operated does it deactivate 5 seconds after activation?	Y	
7	Does it transmit at regular predetermined intervals? <i>Only on power up.</i>	Y	
8	Does it poll or send supervisory information? <i>See 7</i>	Y	
	If yes does it do a system integrity check? How often? <i>Upon Power up. 600uSec pulses x3. Then it times out.</i>	Y	
9	Is this a fire, security or safety of life device?	Y	
	If YES does the device stop transmitting after the alarm condition is satisfied?	Y	
10	Duty cycle: Maximum on-time? <i>12msec</i>		
	If YES, on-time in 100 mS? If Other, please specify here	Y	
	On time in	NA	
11	Modulation technique: Please specify the modulation of the test sample, FM, or AFSK, or FSK, or on-off keying, or others?	FSK	

Periodic Transmission Per Hour Calculation

Transmissions Per Hour	On Time per Transmission	Total Hourly On Time (s)	Hourly On Time Limit (s)	Margin (s)
54	6.422 ms	346.788 ms	2 s	1.65 s


Meets all requirements

Applicant: GTO ACCESS SYSTEMS, LLC
 FCC ID: I6H-SGER
 IC Cert: 21449-SGER
 Report: 680AUT17TestReport_Rev1

[Table of Contents](#)

PERIODIC OPERATION

Test Data: Transmitter Deactivation Plot

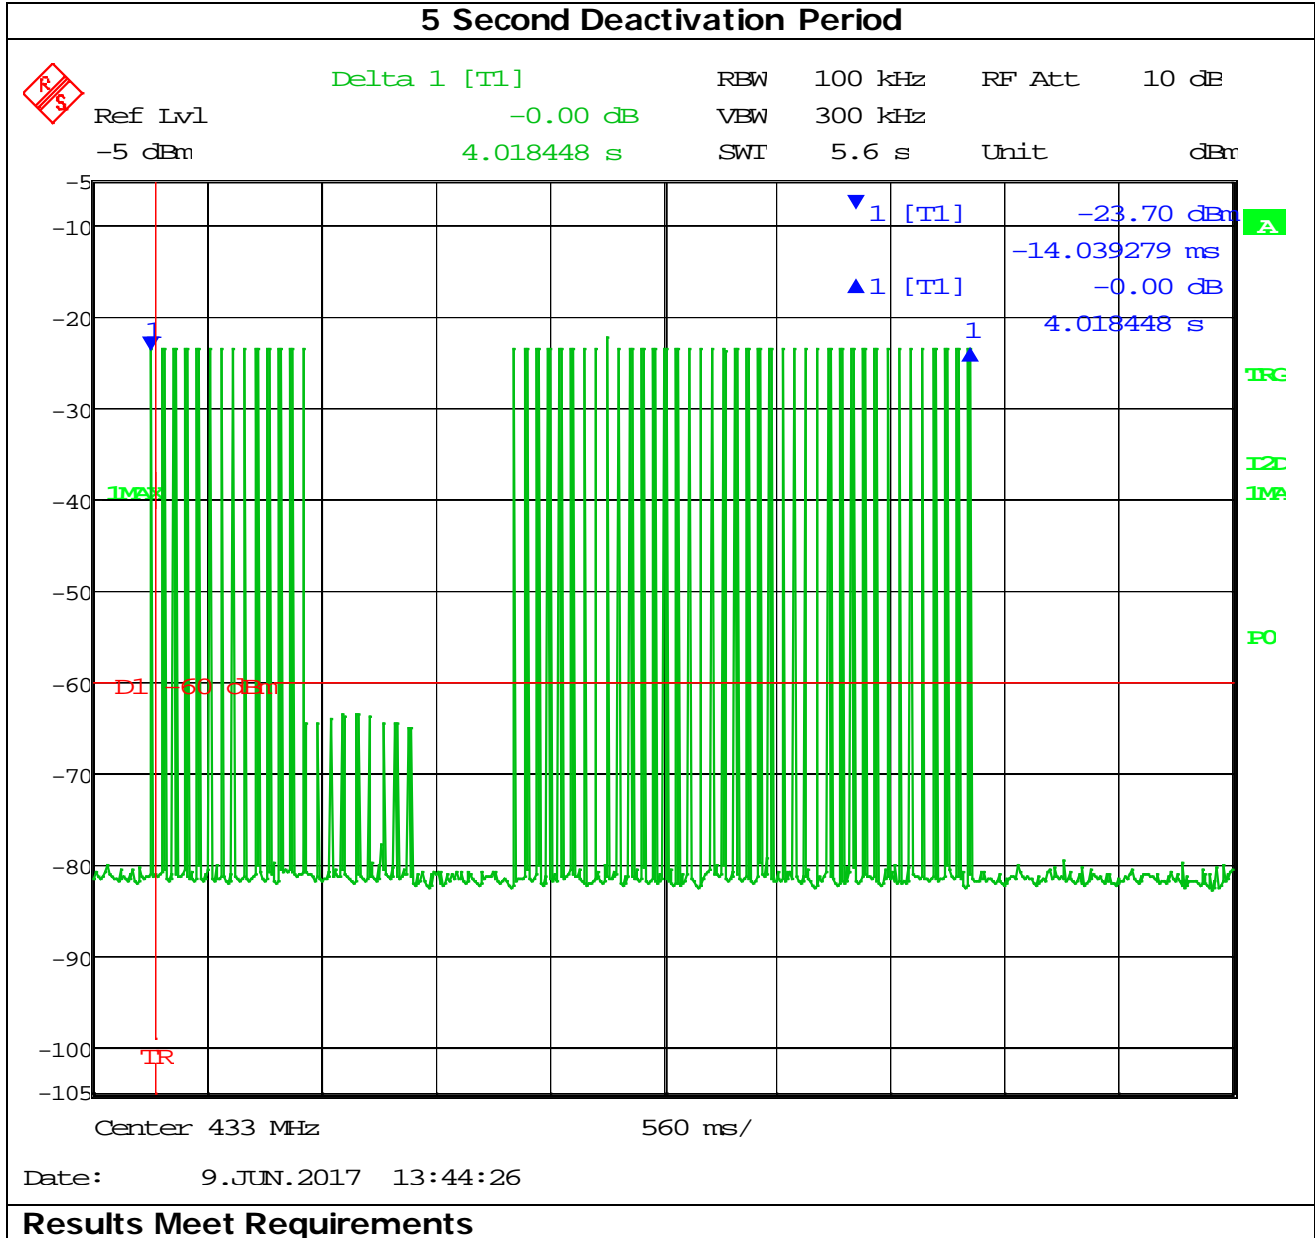

Note: The emissions below -60 dBm are from a paired "SGET" used to activate the EUT.

DUTY CYCLE

Requirements: There are no requirements for the duty cycle; it is measured to determine compliance with the periodic operation average emission limits and the automatic transmission on time requirement.

Procedure: ANSI C63.10 § 7.5 Average value of pulsed emissions

Formula: $\delta \text{ (dB)} = 20 \log (n_1 t_1 + n_2 t_2 + n_3 t_3) / T$

Where:

- δ is the duty cycle correction factor (dB)
- T is the pulse width (100 ms period)
- t1 is the pulse width of sub pulse 1
- t2 is the pulse width of sub pulse 2
- t3 is the pulse width of sub pulse 3
- n1 is the number of t1 pulses
- n2 is the number of t2 pulses
- n3 is the number of t3 pulses

Test Data: Calculation of Duty Cycle


Sub Pulse	Duration (ms)	Number	On Time (ms)
1	6.422	2	12.844
Total On Time (ms)			12.844
Period (ms)			100
Duty Cycle (%)			13%
Cor Factor (dB)			-17.83

See the following plots.

DUTY CYCLE

Test Data: 100 ms Number of Pulses Plot

Number of Pulses per 100 ms = 2

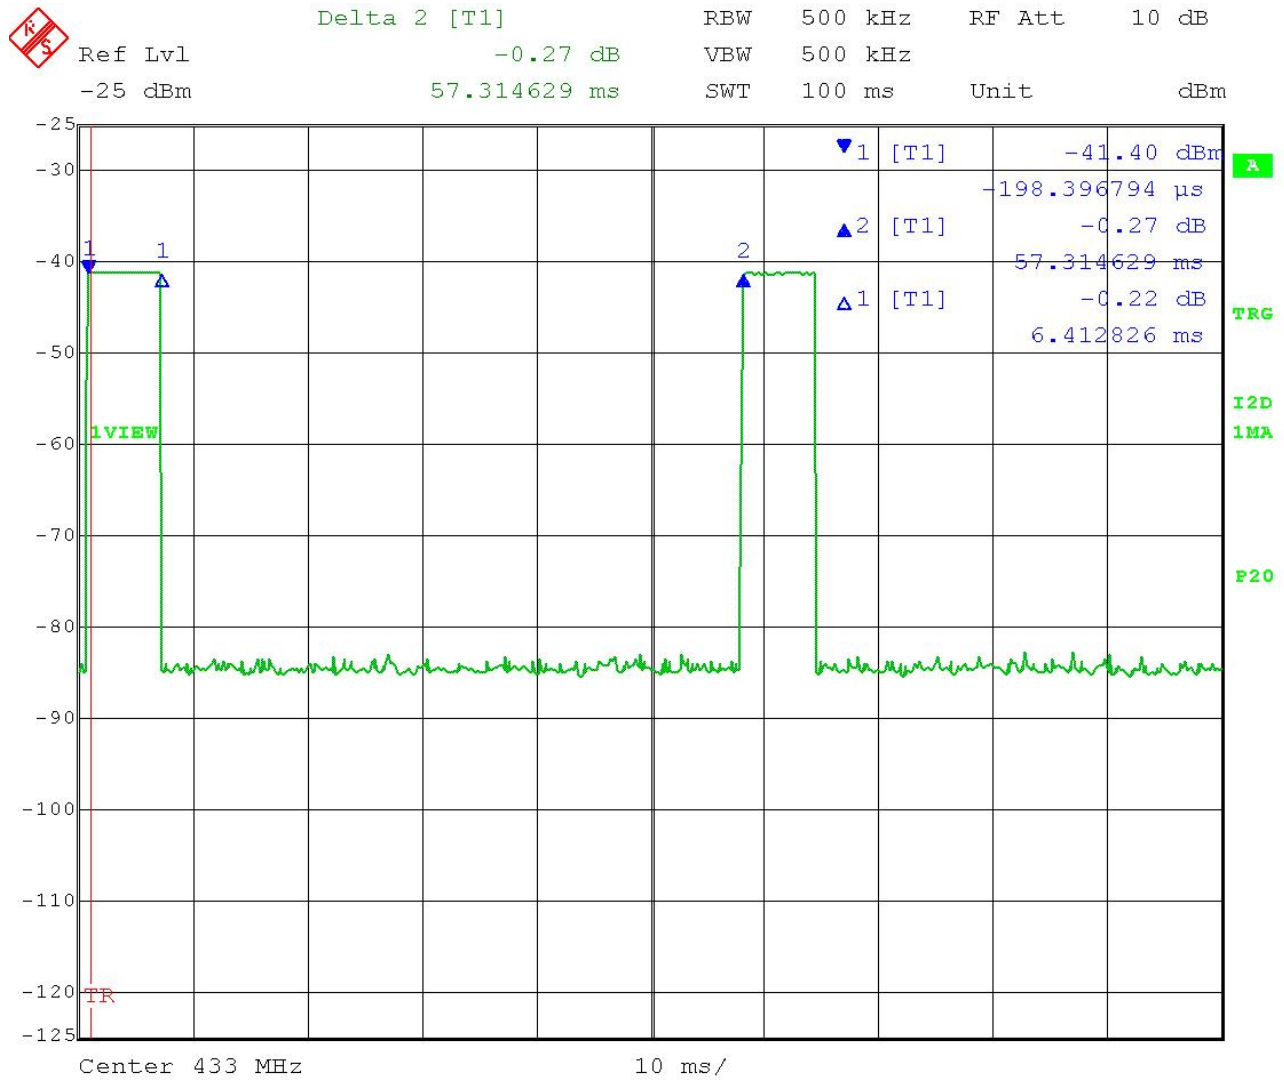


Date: 6.JUN.2017 15:20:16

DUTY CYCLE

Test Data: Sub Pulse 1 Duration Plot

Sub pulse 1 Duration = 6.422 ms

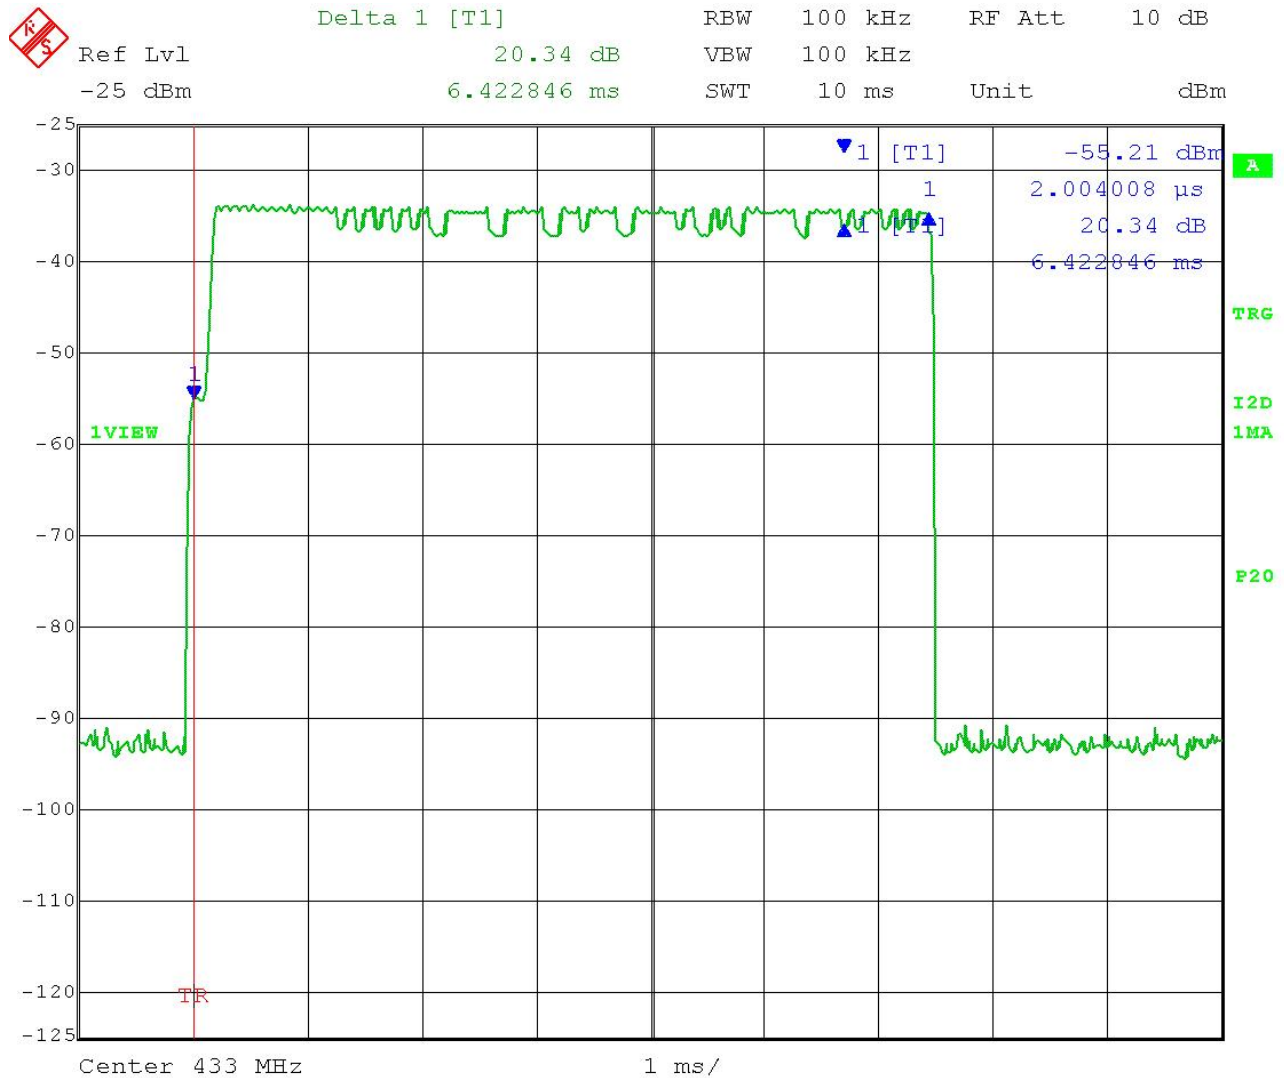

Date: 6.JUN.2017 15:25:12

DUTY CYCLE

RADIATION EMISSIONS:

Fundamental Emission Limit Formula:

- 1) For the band 130-174 MHz, uV/m at 3 meters = $56.81818(F)-6136.3636$;
- 2) For the band 260-470MHz, uV/m at 3 meters = $41.6667(F)-7083.3333$.

Where F is the fundamental emission frequency in MHz

Example Calculation of limit @ 433.92 MHz:

$$41.6667 (433.9)-7083.3333 = 10,995.85 \text{ uV/m}$$

$$20\log (10,995.85) = 80.82 \text{ dBuV/m}$$

Harmonics and Spurious Emissions Limit:

- 1) 20 dBc for all emissions outside of restricted bands
- 2) General limits of 15.209(a) & RSS-Gen for emissions inside restricted bands

3 Meter Field Strength Limit for this EUT:

Fund Freq (MHz)	Fund Limit (dBuV/m)	Harm & Spur (dBuV/m)	Restricted Bands
433	80.79	60.79	Limit of 15.209

RADIATION EMISSIONS:

Test Method: ANSI C63.10 § 6.3 – 6.6 Radiated Emissions Unlicensed Devices

The EUT was placed on a table with dimensions of 1m by 1.5m, 80 cm high below 1 GHz and 150 cm high above 1 GHz. The EUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 9 KHz or the lowest frequency generated to the 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes when necessary and the highest readings were converted to average readings based on the duty cycle.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

Formula of Conversion Factors:

The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB/m. The gain of the preselector was accounted for in the spectrum analyzer reading.

Example:

Freq. MHz	Meter Reading dBµV	ACF dB/m	Cable Loss dB	Field Strength dBµV/m @ 3 m
33	20	+10.36	+1.2	= 31.56

[Table of Contents](#)

RADIATION EMISSIONS:

Test Data: Emissions from 9 KHz to the 10th harmonic of the Fundamental

Emission Frequency (MHz)	Antenna Polarity	Field Strength (dBuV/M)	Limit (dBuV/M)	Margin (dBuV/M)
0.04	H	58.65	60.80	2.15
433	H	77.51	80.80	3.29
433	V	71.64	80.80	9.16
*4330	V	34.81	46.02	11.21
*4330	H	34.71	46.02	11.31
*3897	V	34.03	46.02	11.99
*3897	H	33.63	46.02	12.39

* -Denotes restricted bands which must comply with limits 15.209

Note: Emissions that are 20 dB below the limit are not required to be reported.

OCCUPIED BANDWIDTH

FCC Rules Part No.: 15.231(C), & 15.215(c)

IC RSS: 210 § A1.1.3, & GEN § 6.6

Requirements:

The bandwidth of the emission shall fall completely inside the band of operation, and be no wider than .25% of the center frequency for devices operating between 70 and 900 MHz.

For FCC compliance the Bandwidth is determined at the points 20 dB down from the modulated carrier.

For IC compliance the Bandwidth is determined as the 99% power bandwidth.

Test Method: ANSI C63.10 § 6.9.2 Occupied bandwidth Relative procedure
ANSI C63.10 § 6.9.3 Occupied bandwidth 99% Power

Test Data: Occupied Bandwidth Measurement Table


Tuned Frequency (MHz)	Limit (KHz)	Measured 20 dB BW (KHz)	Measured 99% BW (KHz)
433	1082.5	173.88	173.88
Margin (KHz)		908.62	908.62

Results Meet Requirements

[Table of Contents](#)

OCCUPIED BANDWIDTH

Test Data: 20 dB Occupied Bandwidth Plot

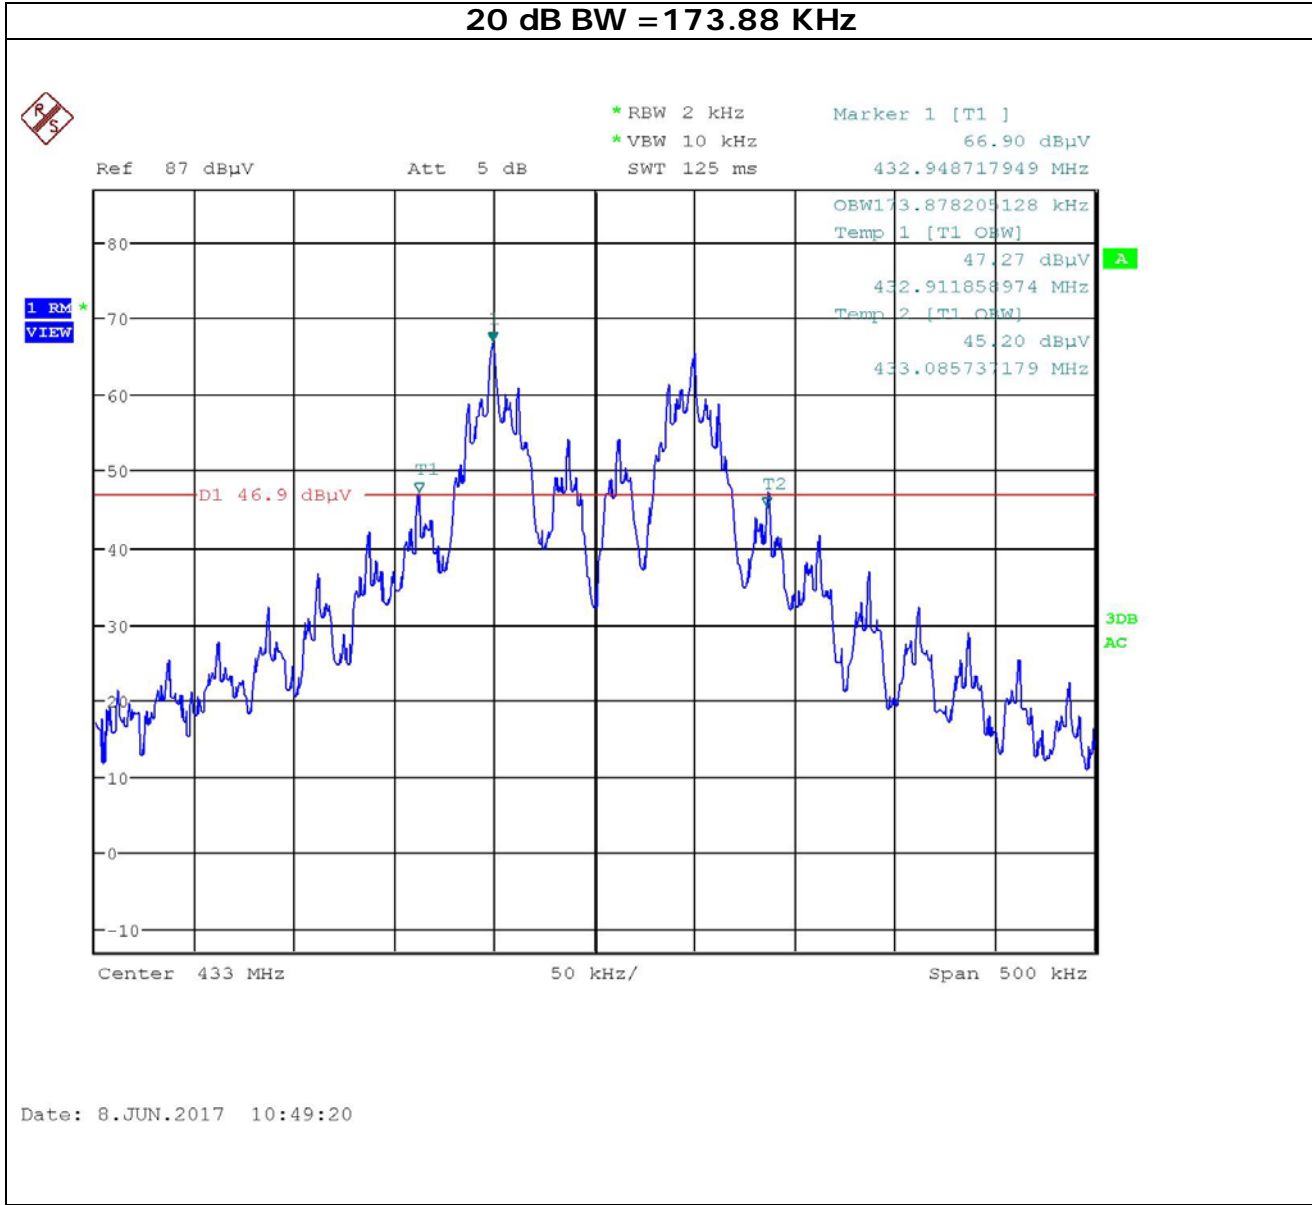


Results Meet Requirements

[Table of Contents](#)

OCCUPIED BANDWIDTH

Test Data: 99% Occupied Bandwidth Plot

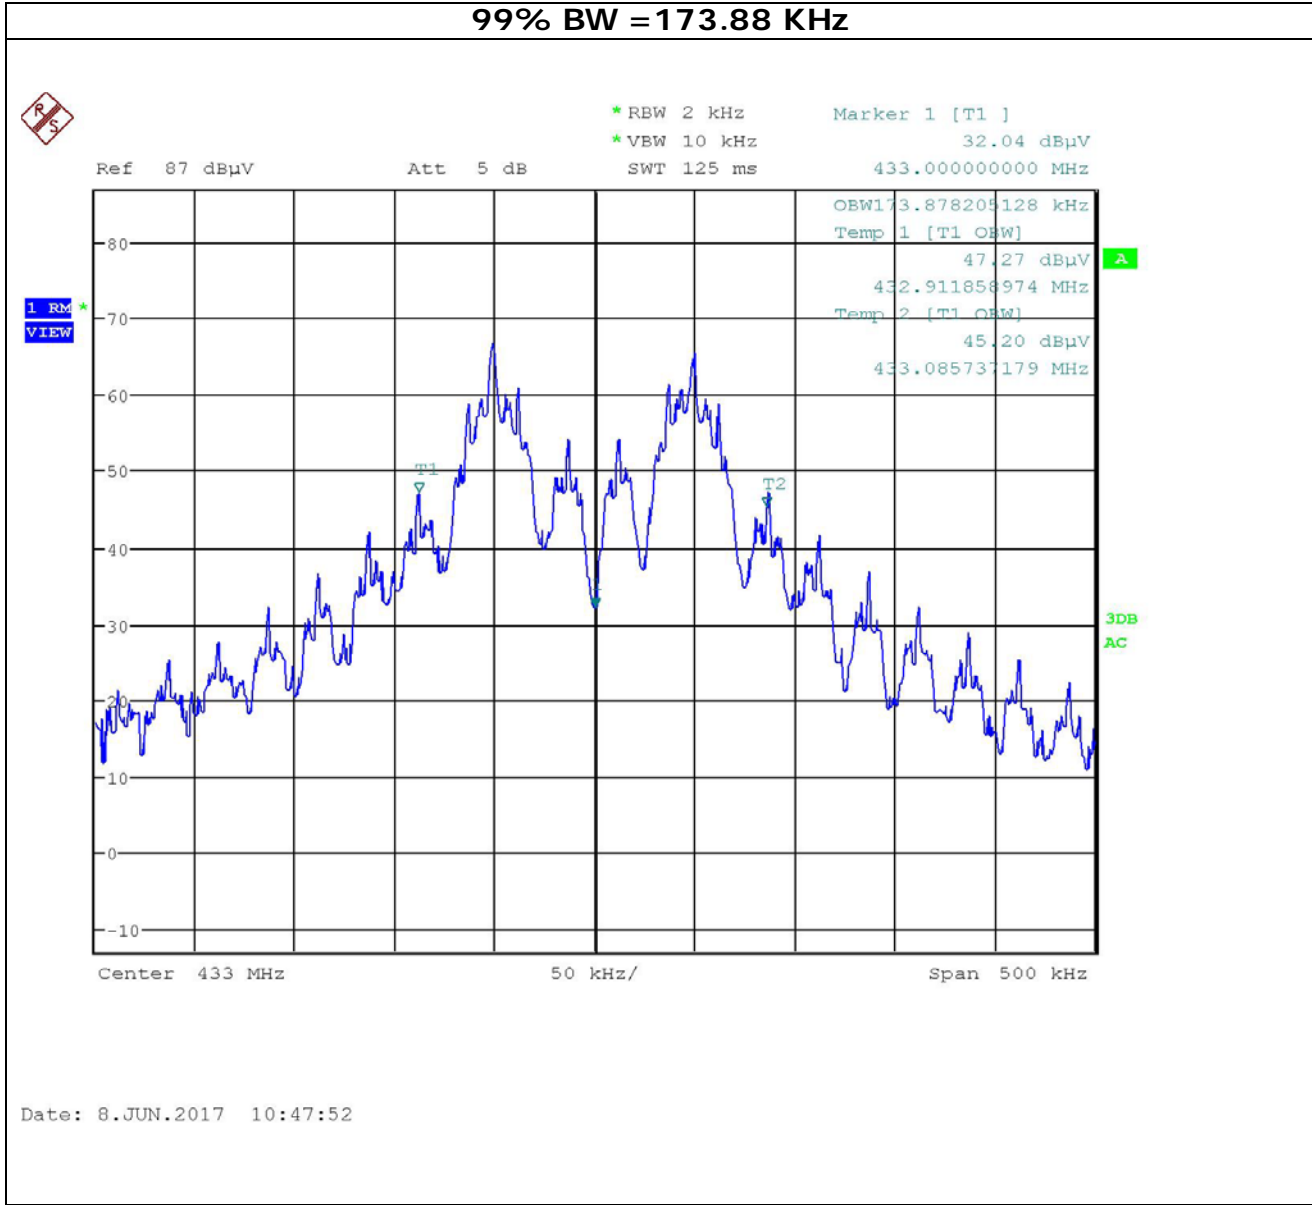

Results Meet Requirements

[Table of Contents](#)



TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconical 1057	Eaton	94455-1	1057	11/18/15	11/18/17
Antenna: Log-Periodic 1122	Electro-Metrics	LPA-25	1122	07/14/15	07/14/17
CHAMBER	Panashield	3M	N/A	04/25/16	12/31/17
Antenna: Double- Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	01/30/17	01/30/19
EMI Test Receiver R & S ESIB 40 Screen Room	Rohde & Schwarz	ESIB 40	100274	08/16/16	08/16/18
Software: EMI Test Receiver	Rohde Schwartz	EMC 32	Version 4.30.0	n/a	n/a
Software: Field Strength Program	Timco	N/A	Version 4.10.7.0	n/a	n/a
Antenna: Active Loop	ETS-Lindgren	6502	00062529	11/18/15	11/18/17
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	04/01/16	04/01/18
Coaxial Cable - Chamber 3 cable set (Primary)	Micro-Coax	Chamber 3 cable set (Primary)	KMKM-0244- 01; KMKM- 0670-00; KFKF-0198- 01	08/09/16	08/09/18
Bore-sight Antenna Positioning Tower	Sunol Sciences	TLT2	N/A	n/a	n/a

***EMI RECEIVER SOFTWARE VERSION**

The receiver firmware used was version 4.43 Service Pack 3

END OF REPORT

Applicant: GTO ACCESS SYSTEMS, LLC
 FCC ID: I6H-SGER
 IC Cert: 21449-SGER
 Report: 680AUT17TestReport_Rev1

[Table of Contents](#)